

Prüfbericht-Nr.: <i>Test report no.:</i>	CN25JMHA 001	Auftrags-Nr.: <i>Order no.:</i>	48278653	Seite 1 von 36 Page 1 of 36
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2025-06-23	
Auftraggeber: <i>Client:</i>	Wistron Corporation 21F., No. 88, Sec. 1, HsinTai 5th Rd., Hsichih Dist, New Taipei City 221, Taiwan			
Prüfgegenstand: <i>Test item:</i>	MERCURY			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	MERCURY			
Auftrags-Inhalt: <i>Order content:</i>	FCC Part 15C Test report (WiFi 2.4GHz)			
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2025-06-25			
Prüfmuster-Nr.: <i>Test sample no.:</i>	A004028791-001 A004028791-010			
Prüfzeitraum: <i>Testing period:</i>	2025-07-09 - 2025-08-15			
Ort der Prüfung: <i>Place of testing:</i>	EMC/RF Taipei Testing Site			
Prüflaboratorium: <i>Testing laboratory:</i>	Taipei Testing Laboratories			
Prüfergebnis*: <i>Test result*:</i>	Pass			
überprüft von: <i>compiled by:</i>	genehmigt von: <i>authorized by:</i>			
Datum: <i>Date:</i>	2025-09-03	Ausstellungsdatum: <i>Issue date:</i>	2025-09-03	
Stellung / Position:	David Huang Project Manager	Stellung / Position:	Brenda Chen Senior Project Manager	
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.:
Test report no.:

CN25JMHA 001

Seite 2 von 36
Page 2 of 36

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)(3)	Output Power	Pass
5.1.3	15.247(a)(2)	6 dB Bandwidth	Pass
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.247(e)	Power Spectral Density	Pass
5.1.5	15.247(d)	Conducted Spurious Emissions and Band Edges	Pass
5.1.6	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
5.2.1	15.207	Mains Conducted Emission	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	6
1. GENERAL REMARKS	7
1.1 COMPLEMENTARY MATERIALS.....	7
1.2 DECISION RULE OF CONFORMITY	7
2. TEST SITES	8
2.1 TEST LABORATORY	8
2.2 TEST FACILITY.....	8
2.3 TRACEABILITY	9
2.4 CALIBRATION	9
2.5 MEASUREMENT UNCERTAINTY	9
3. GENERAL PRODUCT INFORMATION.....	10
3.1 PRODUCT FUNCTION AND INTENDED USE	10
3.2 SYSTEM DETAILS AND RATINGS.....	10
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	11
3.4 SUBMITTED DOCUMENTS.....	11
4. TEST SET-UP AND OPERATION MODES.....	12
4.1 PRINCIPLE OF CONFIGURATION SELECTION	12
4.2 CARRIER FREQUENCY AND CHANNEL.....	13
4.3 TEST OPERATION AND TEST SOFTWARE.....	14
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	17
4.5 TEST SETUP DIAGRAM	17
4.6 DUTY CYCLE OF TEST SIGNAL	18
5. TEST RESULTS	21
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	21
5.1.1 Antenna Requirement.....	21
5.1.2 Output Power	22
5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth.....	27
5.1.4 Power Spectral Density	28
5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100 kHz Bandwidth	29
5.1.6 Radiated Spurious Emissions and Band Edges	30
5.2 MAINS EMISSION	35
5.2.1 Mains Conducted Emission	35

Prüfbericht - Nr.: **CN25JMHA 001**
Test Report No.

Seite 5 von 36
Page 5 of 36

APPENDIX A - TEST RESULT OF CONDUCTED

APPENDIX B - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION

APPENDIX SP - PHOTOGRAPHS OF TEST SETUP

APPENDIX EP - PHOTOGRAPHS OF EUT

Prüfbericht - Nr.: CN25JMHA 001
Test Report No.

Seite 6 von 36
Page 6 of 36

HISTORY OF THIS TEST REPORT

Revision	Description	Date Issued
R01	Original Release	2025-09-03

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted

Appendix B - Test Result of Radiated Emissions & Mains Conducted Emission

Appendix SP - Photographs of Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.247
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
KDB 558074 D01 15.247 Meas Guidance v05r02
KDB 662911 D01 Multiple Transmitter Output v02r01

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 180491
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.30 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.30 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.54 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.52 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a MERCURY. It contains a WLAN compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	MERCURY
Type Identification	MERCURY
FCC ID	PU5-MERCURY

Technical Specification of EUT

Item	EUT information	
Operating Frequency	2404 MHz ~ 2472 MHz	
Channel Number	5MHz (802.11n/ac/ax HT5/VHT5/HE5)	26
	10MHz (802.11n/ac/ax HT10/VHT10/HE10)	26
	20MHz (802.11b/g/n/ac/ax HT20/VHT20/HE20)	11
Data Rate	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to MCS7 802.11ac: up to MCS9 802.11ax: up to MCS11	
Operation Voltage	12 Vdc	
Modulation	DSSS (DBPSK, DQPSK, CCK) OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) OFDMA (1024QAM)	

Item	EUT information	
Maximum Output Power (mW)	CDD	802.11b: 894.21
		802.11g: 847.41
		802.11n HT5: 889.14
		802.11n HT10: 874.32
		802.11n HT20: 876.7
		802.11ac VHT5: 909.35
		802.11ac VHT10: 892.61
		802.11ac VHT20: 898.16
		802.11ax HE5: 929.96
		802.11ax HE10: 914.44
		802.11ax HE20: 915.4
	Beamforming	802.11ax HE5: 232.52
		802.11ax HE10: 228.64
		802.11ax HE20: 228.88
Antenna Information	Refer to 5.1.1	
Accessory Device	Refer to 4.4	

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

<CDD>

802.11b		802.11g		802.11n HT5 802.11ac VHT5 802.11ax HE5		802.11n HT10 802.11ac VHT10 802.11ax HE10		802.11n HT20 802.11ac VHT20 802.11ax HE20	
Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting
2412	24	2412	21	2404	24	2407	22	2412	21
2437	24	2417	22	2437	24	2437	24	2417	22
2462	24	2437	24	2469	22	2467	24	2437	24
		2462	24			2469	20.5	2457	22
						2472	20	2462	21

802.11ax HE20_Partial RU								
Freq. (MHz)	RU Config.	Power Setting	Freq. (MHz)	RU Config.	Power Setting	Freq. (MHz)	RU Config.	Power Setting
2412	26/0	9.5	2412	52/37	12.5	2412	106/53	15
2437	26/0	12	2437	52/37	15.5	2437	106/53	17.5
2462	26/8	10	2462	52/40	12.5	2462	106/54	15

<Beamforming>

802.11ax HE5		802.11ax HE10		802.11ax HE20	
Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting
2404	18	2407	16	2412	15
2437	18	2437	18	2417	16
2469	16	2467	18	2437	17.5
		2469	14	2457	16
		2472	13.5	2462	15

4.2 Carrier Frequency and Channel

802.11b, 802.11g, 802.11n HT20, 802.11ac VHT20, 802.11ax HE20:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

802.11n HT5, 802.11ac VHT5, 802.11ax HE5:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
192	2404	208	2439
194	2409	7	2442
1	2412	209	2444
203	2414	8	2447
2	2417	210	2449
204	2419	9	2452
3	2422	211	2454
205	2424	10	2457
4	2427	212	2459
206	2429	11	2462
5	2432	213	2464
207	2434	12	2467
6	2437	214	2469

802.11n HT10, 802.11ac VHT10, 802.11ax HE10:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
193	2407	208	2439
194	2409	7	2442
1	2412	209	2444
203	2414	8	2447
2	2417	210	2449
204	2419	9	2452
3	2422	211	2454
205	2424	10	2457
4	2427	212	2459
206	2429	11	2462
5	2432	213	2464
207	2434	12	2467
6	2437	13	2472

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	QRCT4 V4.0.209.0
---------------	------------------

The samples were used as follows:

A004028791-001

A004028791-010

Full test was applied on all test modes, but only worst case was shown.

The EUT provides four completed transmitters and receivers.

Modulation Mode	Tx Function
802.11b	4TX
802.11g	4TX
802.11n HT5	4Tx
802.11n HT10	4Tx
802.11n HT20	4TX
802.11ac VHT5	4TX
802.11ac VHT10	4TX
802.11ac VHT20	4TX
802.11ax HE5	4TX
802.11ax HE10	4TX
802.11ax HE20	4TX

* The modulation and bandwidth are similar for 802.11n mode HT5/HT10/HT20 and 802.11ac mode VHT5/VHT10/VHT20 and 802.11ax mode HE5/HE10/HE20, therefore investigated worse case as representative mode in test report.

** For Beamforming mode, only the output power is evaluated and presented in this report.

*** 802.11ax HE20 for Full RU and Partial RU had been pre-tested, and Full RU is found as the worst case for the final tests.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **Z-plane**.
2. "-" means no effect.

Antenna Port Conducted Measurement (Power only)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
CDD	802.11b	2412 to 2462	2412, 2437, 2462	1.0
	802.11g	2412 to 2462	2412, 2417, 2437, 2462	6.0
	802.11n HT5	2404 to 2469	2404, 2437, 2469	MCS0
	802.11n HT10	2407 to 2472	2407, 2437, 2467, 2469, 2472	MCS0
	802.11n HT20	2412 to 2462	2412, 2417, 2437, 2457, 2462	MCS0
	802.11ac VHT5	2404 to 2469	2404, 2437, 2469	NSS1 MCS0
	802.11ac VHT10	2407 to 2472	2407, 2437, 2467, 2469, 2472	NSS1 MCS0
	802.11ac VHT20	2412 to 2462	2412, 2417, 2437, 2457, 2462	NSS1 MCS0
	802.11ax HE5	2404 to 2469	2404, 2437, 2469	NSS1 MCS0
	802.11ax HE10	2407 to 2472	2407, 2437, 2467, 2469, 2472	NSS1 MCS0
	802.11ax HE20	2412 to 2462	2412, 2417, 2437, 2457, 2462	NSS1 MCS0
	802.11ax HE20_RU26	2412 to 2462	2412, 2437, 2462	NSS1 MCS0
	802.11ax HE20_RU52	2412 to 2462	2412, 2437, 2462	NSS1 MCS0
	802.11ax HE20_RU106	2412 to 2462	2412, 2437, 2462	NSS1 MCS0
Beamforming	802.11ax HE5	2404 to 2469	2404, 2437, 2469	NSS1 MCS0
	802.11ax HE10	2407 to 2472	2407, 2437, 2467, 2469, 2472	NSS1 MCS0
	802.11ax HE20	2412 to 2462	2412, 2417, 2437, 2457, 2462	NSS1 MCS0

Antenna Port Conducted Measurement (All other conducted)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	802.11b	2412 to 2462	2412, 2437, 2462	1.0
-	802.11g	2412 to 2462	2412, 2437, 2462	6.0
-	802.11ax HE5	2404 to 2469	2404, 2437, 2469	NSS1 MCS0
-	802.11ax HE10	2407 to 2472	2407, 2437, 2472	NSS1 MCS0
-	802.11ax HE20	2412 to 2462	2412, 2437, 2462	NSS1 MCS0
-	802.11ax HE20_RU26 (PSD only)	2412 to 2462	2412, 2437, 2462	NSS1 MCS0
-	802.11ax HE20_RU52 (PSD only)	2412 to 2462	2412, 2437, 2462	NSS1 MCS0
-	802.11ax HE20_RU106 (PSD only)	2412 to 2462	2412, 2437, 2462	NSS1 MCS0

Radiated Spurious Emissions (Above 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	802.11b	2412 to 2462	2412, 2437, 2462	1.0
-	802.11g	2412 to 2462	2412, 2437, 2462	6.0
-	802.11ax HE5	2404 to 2469	2404, 2437, 2469	NSS1 MCS0
-	802.11ax HE10	2407 to 2472	2407, 2437, 2472	NSS1 MCS0
-	802.11ax HE20	2412 to 2462	2412, 2437, 2462	NSS1 MCS0
-	802.11ax HE20_RU106	2412 to 2462	2437	NSS1 MCS0

Radiated Spurious Emissions (Below 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	802.11ax HE20	2412 to 2462	2437	NSS1 MCS0

Mains Conducted Emission

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	802.11ax HE20	2412 to 2462	2437	NSS1 MCS0

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	23.2-24.2 °C	62-73 %	Andy Chen
Radiated Spurious Emissions above 1 GHz	23.2-25.8 °C	55-58 %	Roger Liao
Radiated Spurious Emissions below 1 GHz	23.2-25.8 °C	55-58 %	Roger Liao
Mains Conducted Emission	22.1 °C	54 %	Chuan Chu

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


None

Support Unit


Support Unit								
No	Description	Brand	Model	S/N	Shielded	Ferrite Core (Qty)	Length (cm)	Remark
A	Adapter	APD	WA-30J12FU	N/A	NO	NO	170	--
-	Notebook	DELL	Latitude 7490	887V7Y2	-	-	-	--
-	Power Supply	Keysight	E3642A	MY63016446	-	-	-	--
-	USB Cable	TUV	TUV-06	1	NO	NO	150	--
-	QC405 DEBUG BOARD	Wistron	DEBUG BOARD	N/A	-	-	-	--

4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>




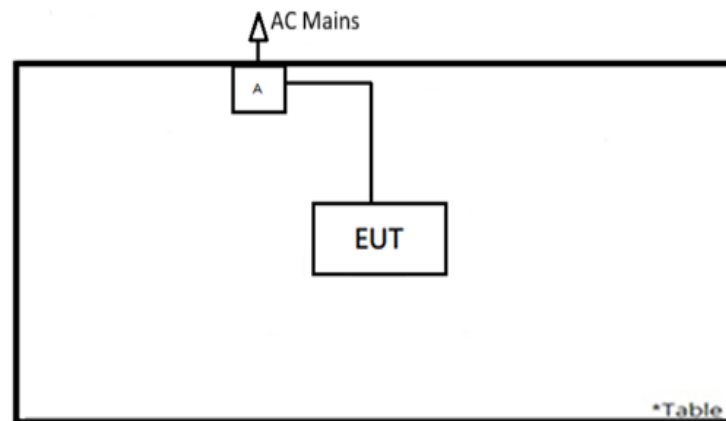








<Mains Conducted Emission mode>

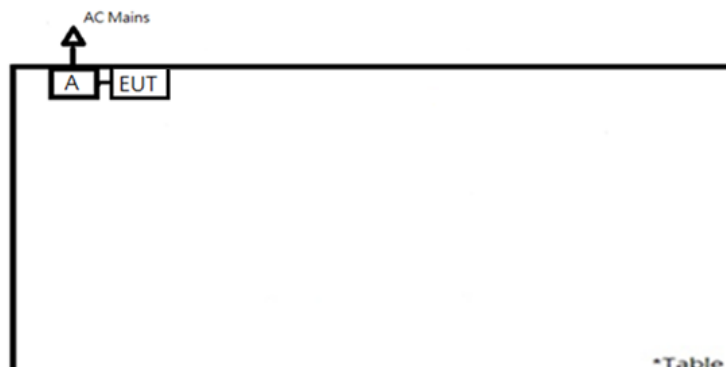


4.6 Duty Cycle of Test Signal

Mode	On + Off Time (ms)	On Time (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11b	8.62	8.30	96.29	0.16
802.11g	1.47	1.37	93.11	0.31
802.11n HT5	6.36	5.42	85.14	0.70
802.11n HT10	6.36	5.40	84.91	0.71
802.11n HT20	6.39	5.43	84.98	0.71
802.11ac VHT5	6.41	5.43	84.78	0.72
802.11ac VHT10	6.35	5.43	85.51	0.68
802.11ac VHT20	6.41	5.43	84.78	0.72
802.11ax HE5	6.41	5.46	85.25	0.69
802.11ax HE10	6.39	5.46	85.45	0.68
802.11ax HE20	6.35	5.45	85.82	0.66

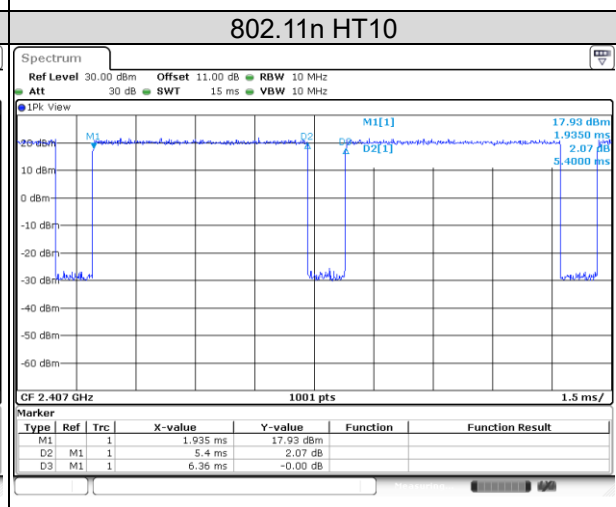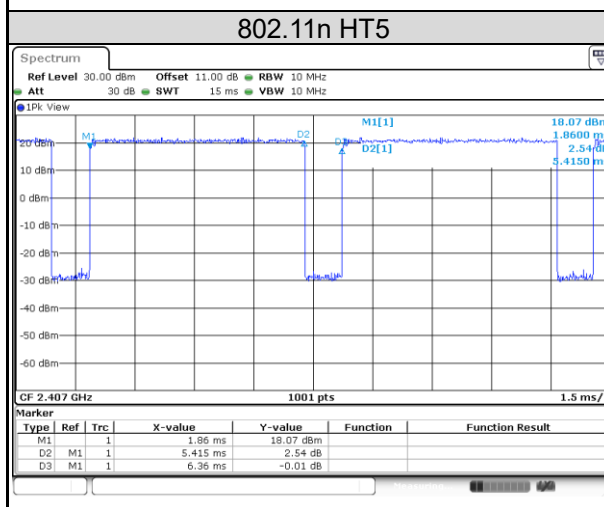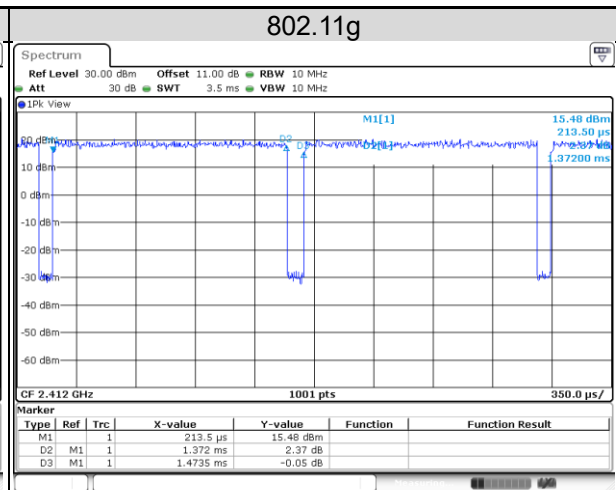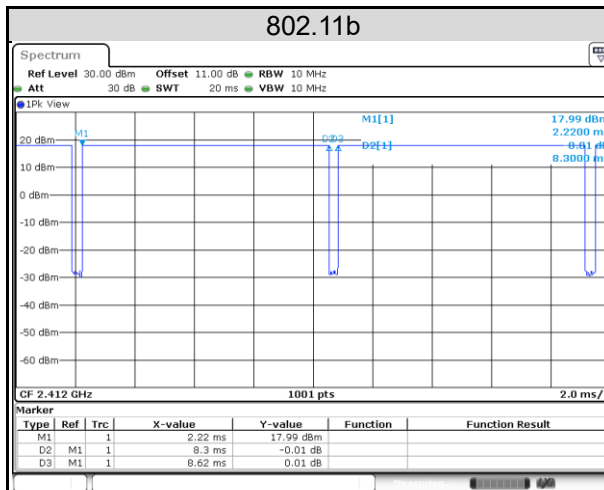

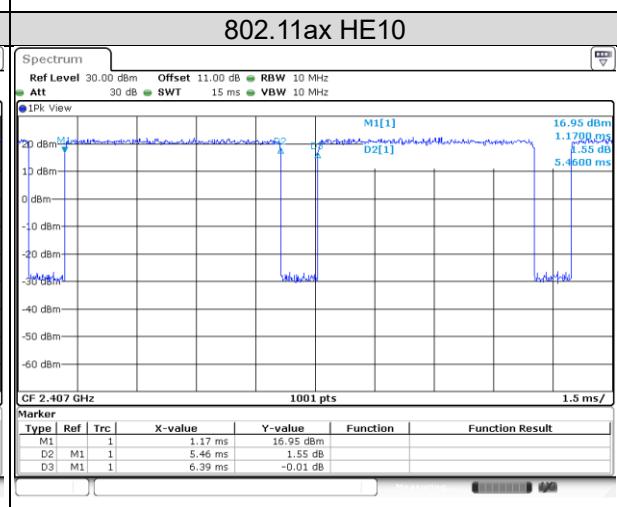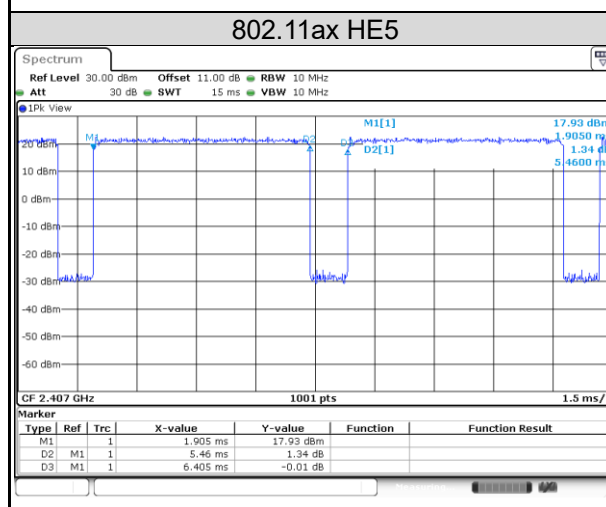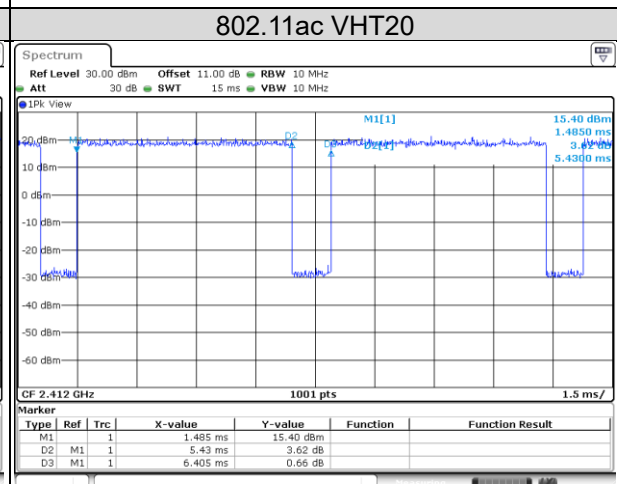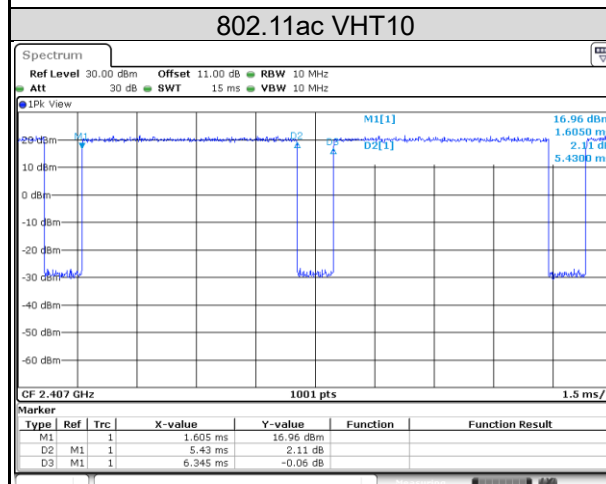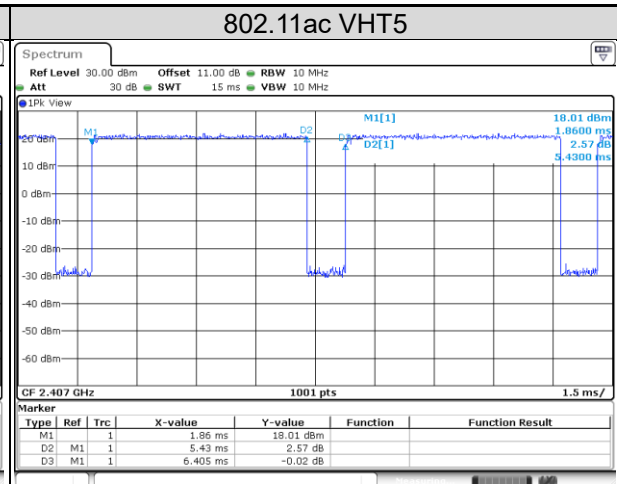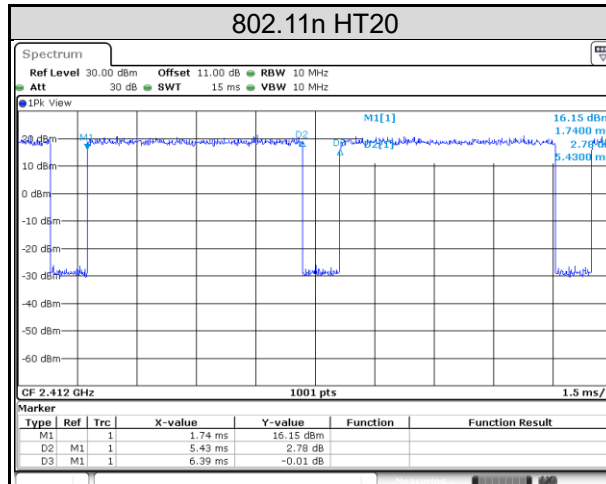

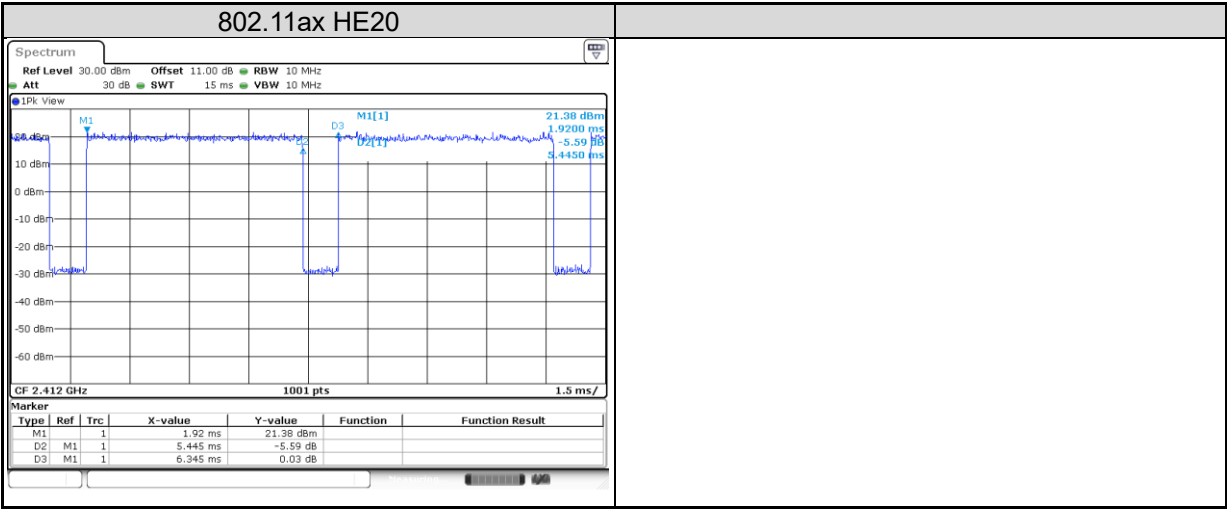

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only

According to the manufacturer declaration, the antenna information is as listed below. The antenna is with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Brand	Model	Ant No.	Antenna Gain (dBi)	Antenna Type
HONGBO WIRELESS COMMUNICATION	260-29228	1/2/3/4	2.71	Dipole Antenna
Auden Techno. Corp.	B93640-30	1/2/3/4	2.37	Dipole Antenna
Auden Techno. Corp.	B93641-30	1/2/3/4	2.4	Dipole Antenna
CDD Mode	Power Directional Gain		2.71	-
	PSD Directional Gain		8.73	-
Beamforming Mode	Power Directional Gain		8.73	-
	PSD Directional Gain		8.73	-

Note:

1. $PSD\ Directional\ Gain = G_{ANT} + 10 \cdot \log(N_{ANT})$
2. Only the antenna model 260-29228 was used for the testing.

Refer to EUT photo for details.

Prüfbericht - Nr.: CN25JMHA 001
Test Report No.


Seite 22 von 36
 Page 22 of 36

5.1.2 Output Power

Limit 1 watt (30 dBm)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2025/02/26	2026/02/25	2025/7/9	2025/8/14
Power Sensor	Anritsu	MA2411B	1725269	2025/02/26	2026/02/25	2025/7/9	2025/8/14

Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

Test Result

Average Output Power

CDD Mode

<802.11b>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)				Total Power		Limit (dBm)
		Chain 0	Chain1	Chain 2	Chain 3	(dBm)	(mW)	
1	2412	23.58	23.46	23.40	23.18	29.43	876.60	30
6	2437	23.59	23.47	23.43	23.40	29.49	889.96	30
11	2462	23.72	23.52	23.51	23.21	29.51	894.21	30

<802.11g>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)				Total Power		Limit (dBm)
		Chain 0	Chain1	Chain 2	Chain 3	(dBm)	(mW)	
1	2412	20.69	20.82	20.65	20.48	26.68	465.83	30
2	2417	21.52	21.72	21.63	21.39	27.59	573.77	30
6	2437	23.34	23.27	23.24	23.19	29.28	847.41	30
11	2462	23.36	23.32	23.21	23.02	29.25	841.41	30

<802.11n HT5>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)				Total Power		Limit (dBm)
		Chain 0	Chain1	Chain 2	Chain 3	(dBm)	(mW)	
192	2404	23.57	23.60	23.33	23.37	29.49	889.14	30
6	2437	23.52	23.27	23.16	23.43	29.37	864.54	30
214	2469	21.72	21.60	21.70	21.57	27.67	584.60	30

<802.11n HT10>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)				Total Power		Limit (dBm)
		Chain 0	Chain1	Chain 2	Chain 3	(dBm)	(mW)	
193	2407	21.70	21.70	21.56	21.44	27.62	578.36	30
6	2437	23.56	23.34	23.31	23.37	29.42	874.32	30
12	2467	23.39	23.40	23.25	23.05	29.30	850.23	30
214	2469	20.28	20.37	20.42	20.09	26.31	427.80	30
13	2472	19.56	19.84	19.99	19.76	25.81	381.14	30

<802.11n HT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)				Total Power		Limit (dBm)
		Chain 0	Chain1	Chain 2	Chain 3	(dBm)	(mW)	
1	2412	20.85	20.78	20.87	20.65	26.81	479.62	30
2	2417	21.68	21.75	21.62	21.54	27.67	584.63	30
6	2437	23.51	23.36	23.37	23.39	29.43	876.70	30
10	2457	21.82	21.54	21.84	21.81	27.77	599.08	30
11	2462	20.88	20.77	20.98	20.73	26.86	485.48	30

<802.11ac VHT5>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)				Total Power		Limit (dBm)
		Chain 0	Chain1	Chain 2	Chain 3	(dBm)	(mW)	
192	2404	23.68	23.69	23.41	23.48	29.59	909.35	30
6	2437	23.63	23.36	23.25	23.52	29.46	883.70	30
214	2469	21.81	21.71	21.80	21.67	27.77	598.21	30

<802.11ac VHT10>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)				Total Power		Limit (dBm)
		Chain 0	Chain1	Chain 2	Chain 3	(dBm)	(mW)	
193	2407	21.81	21.80	21.68	21.53	27.73	592.53	30
6	2437	23.64	23.42	23.40	23.48	29.51	892.61	30
12	2467	23.48	23.49	23.35	23.16	29.39	869.49	30
214	2469	20.37	20.47	20.53	20.19	26.41	437.77	30
13	2472	19.66	19.95	20.08	19.86	25.91	390.01	30

<802.11ac VHT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)				Total Power		Limit (dBm)
		Chain 0	Chain1	Chain 2	Chain 3	(dBm)	(mW)	
1	2412	20.94	20.88	20.97	20.76	26.91	490.78	30
2	2417	21.77	21.84	21.73	21.62	27.76	597.22	30
6	2437	23.62	23.48	23.46	23.49	29.53	898.16	30
10	2457	21.90	21.65	21.93	21.90	27.87	611.94	30
11	2462	20.97	20.87	21.08	20.84	26.96	496.78	30

<802.11ax HE5>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)				Total Power		Limit (dBm)
		Chain 0	Chain1	Chain 2	Chain 3	(dBm)	(mW)	
192	2404	23.76	23.79	23.52	23.58	29.68	929.96	30
6	2437	23.72	23.46	23.35	23.61	29.56	903.21	30
214	2469	21.91	21.80	21.89	21.77	27.86	611.43	30

<802.11ax HE10>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)				Total Power		Limit (dBm)
		Chain 0	Chain1	Chain 2	Chain 3	(dBm)	(mW)	
193	2407	21.92	21.88	21.78	21.62	27.82	605.64	30
6	2437	23.74	23.53	23.51	23.58	29.61	914.44	30
12	2467	23.56	23.59	23.46	23.25	29.49	888.71	30
214	2469	20.45	20.56	20.62	20.29	26.50	446.93	30
13	2472	19.76	20.05	20.18	19.95	26.01	398.87	30

<802.11ax HE20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)				Total Power		Limit (dBm)
		Chain 0	Chain1	Chain 2	Chain 3	(dBm)	(mW)	
1	2412	21.04	20.97	21.06	20.86	27.00	501.63	30
2	2417	21.89	21.94	21.83	21.73	27.87	612.18	30
6	2437	23.71	23.56	23.54	23.57	29.62	915.40	30
10	2457	21.98	21.74	22.01	21.99	27.95	624.02	30
11	2462	21.05	20.97	21.18	20.94	27.06	507.76	30

<802.11ax HE20_Partial RU>

Channel	Channel Frequency (MHz)	RU Config.	Average Output Power (dBm)				Total Power		Limit (dBm)
			Chain 0	Chain1	Chain 2	Chain 3	(dBm)	(mW)	
1	2412	26/0	9.54	9.67	9.39	9.50	15.55	35.87	30
6	2437	26/0	12.28	12.10	12.04	12.16	18.17	65.56	30
11	2462	26/8	9.67	9.32	9.69	9.58	15.59	36.21	30
1	2412	52/37	12.69	12.74	12.57	12.52	18.65	73.31	30
6	2437	52/37	15.68	15.75	15.39	15.50	21.60	144.64	30
11	2462	52/40	12.86	12.60	12.34	12.53	18.61	72.56	30
1	2412	106/53	15.08	15.29	15.11	15.02	21.15	130.22	30
6	2437	106/53	17.49	17.74	17.46	17.53	23.58	227.88	30
11	2462	106/54	15.01	15.12	14.91	14.77	20.98	125.17	30

Beamforming Mode

<802.11ax HE5>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)				Total Power		Limit (dBm)
		Chain 0	Chain1	Chain 2	Chain 3	(dBm)	(mW)	
192	2404	17.74	17.77	17.50	17.56	23.66	232.52	27.27
6	2437	17.70	17.44	17.33	17.59	23.54	225.83	27.27
214	2469	15.89	15.78	15.87	15.75	21.84	152.88	27.27

<802.11ax HE10>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)				Total Power		Limit (dBm)
		Chain 0	Chain1	Chain 2	Chain 3	(dBm)	(mW)	
193	2407	15.90	15.86	15.76	15.60	21.80	151.43	27.27
6	2437	17.72	17.51	17.49	17.56	23.59	228.64	27.27
12	2467	17.54	17.57	17.44	17.23	23.47	222.21	27.27
214	2469	14.43	14.54	14.60	14.27	20.48	111.75	27.27
13	2472	13.74	14.03	14.16	13.93	19.99	99.73	27.27

<802.11ax HE20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)				Total Power		Limit (dBm)
		Chain 0	Chain1	Chain 2	Chain 3	(dBm)	(mW)	
1	2412	15.02	14.95	15.04	14.84	20.98	125.42	27.27
2	2417	15.87	15.92	15.81	15.71	21.85	153.07	27.27
6	2437	17.69	17.54	17.52	17.55	23.60	228.88	27.27
10	2457	15.96	15.72	15.99	15.97	21.93	156.03	27.27
11	2462	15.03	14.95	15.16	14.92	21.04	126.96	27.27

Prüfbericht - Nr.: CN25JMHA 001
Test Report No.


Seite 27 von 36
Page 27 of 36

5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth

Limit The minimum 6 dB bandwidth shall be at least 500 kHz.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2025/02/26	2026/02/25	2025/7/9	2025/8/14

Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- For 99% occupied bandwidth measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

Test Results

Please refer to Appendix A.


5.1.4 Power Spectral Density

Limit

The power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2025/02/26	2026/02/25	2025/7/9	2025/8/14

Test Procedure

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Detector = power averaging (rms) or sample detector (when rms not available).
- Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- Sweep time = auto couple
- Do not use sweep triggering; allow sweep to "free run."
- Employ trace averaging (rms) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $[10 \log (1 / D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time. If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

Test Results

Please refer to Appendix A.


5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100 kHz Bandwidth

Limit

30 dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2025/02/26	2026/02/25	2025/7/9	2025/8/14

Test Procedure

Measurement procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Results

Please refer to Appendix A.

5.1.6 Radiated Spurious Emissions and Band Edges

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

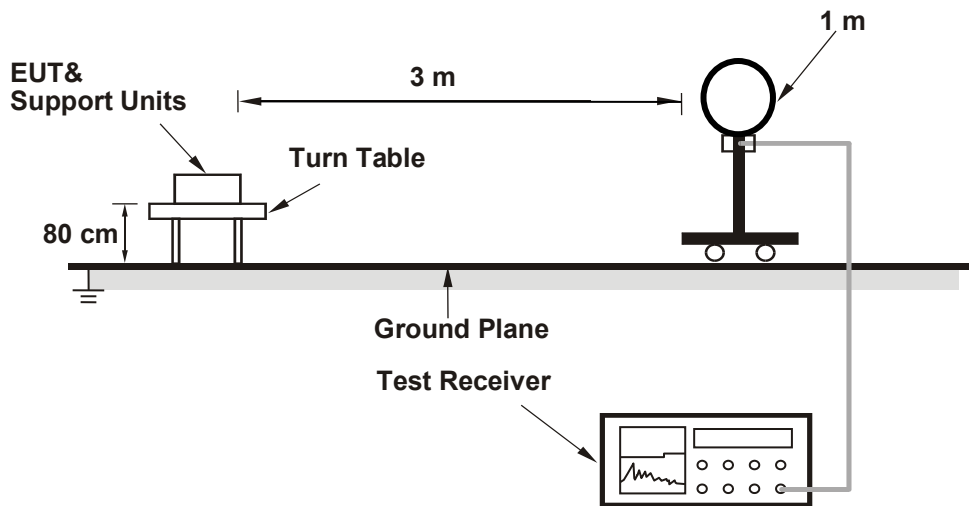

<Radiated Emissions 30 MHz to 1 GHz>

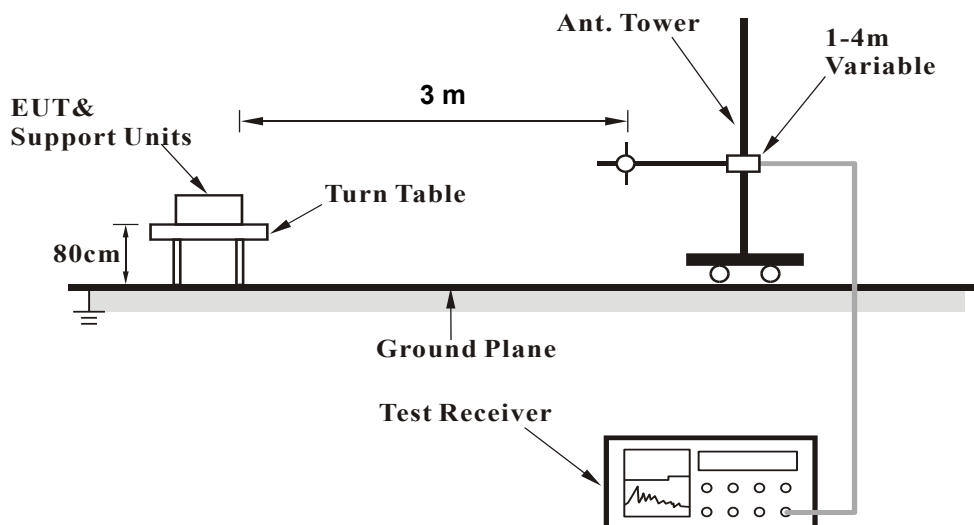

<Radiated Emissions above 1 GHz>

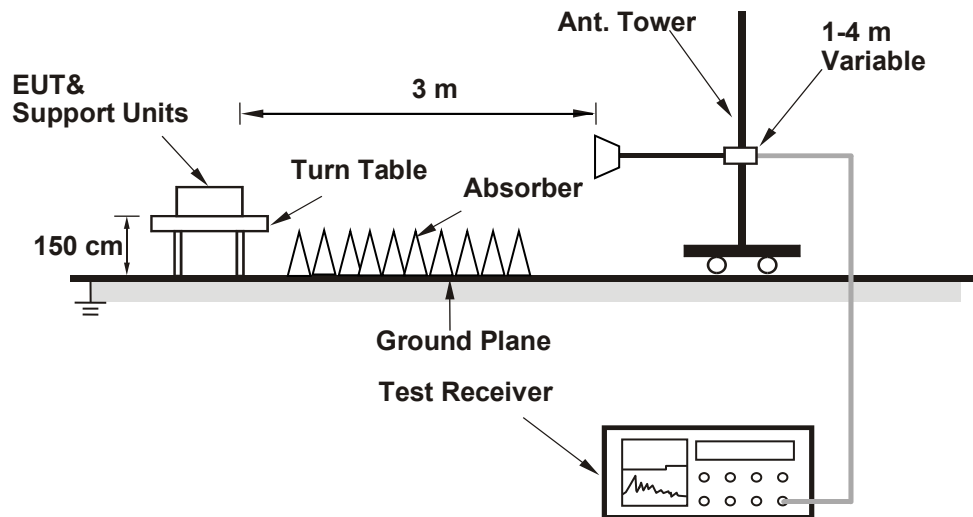

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Prüfbericht - Nr.: CN25JMHA 001
Test Report No.

Seite 32 von 36
Page 32 of 36

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Above 1 GHz					
Signal Analyzer	R&S	FSV40	101509	2025/5/7	2026/5/6
Horn Antenna	ETS-Lindgren	3117	00218930	2024/12/10	2025/12/9
Horn Antenna	SCHWARZBECK	BBHA 9170	00887	2025/3/28	2026/3/27
Amplifier	EM	EM01G18GA	060967	2025/4/2	2026/4/1
HF-AMP + AC source	EMCI	EMC184045SE	980657	2025/2/4	2026/2/3
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
30 MHz ~ 1 GHz					
Receiver	R&S	ESR7	102109	2025/2/13	2026/2/12
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2025/4/8	2026/4/7
LF-AMP	Agilent	8447D	2944A107722	2025/3/19	2026/3/18
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
Below 30 MHz					
Receiver	R&S	ESR7	102109	2025/2/13	2026/2/12
Loop Antenna	SCHWARZBECK	FMZB 1519B	00215	2024/12/11	2025/12/10
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.
6. The emission levels of other frequencies (including the 10th harmonic of the highest fundamental frequency) are very lower than the limit and are not shown in the test report.

Prüfbericht - Nr.: **CN25JMHA 001**
Test Report No.

Seite 34 von 36
Page 34 of 36

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – Amplifier (dB)

Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.

5.2 Mains Emission


5.2.1 Mains Conducted Emission

Limit

Mains Conducted Emission as defined in §15.207 must comply with the mains conducted emission limits.

Kind of Test Site Shielded room

Test Setup

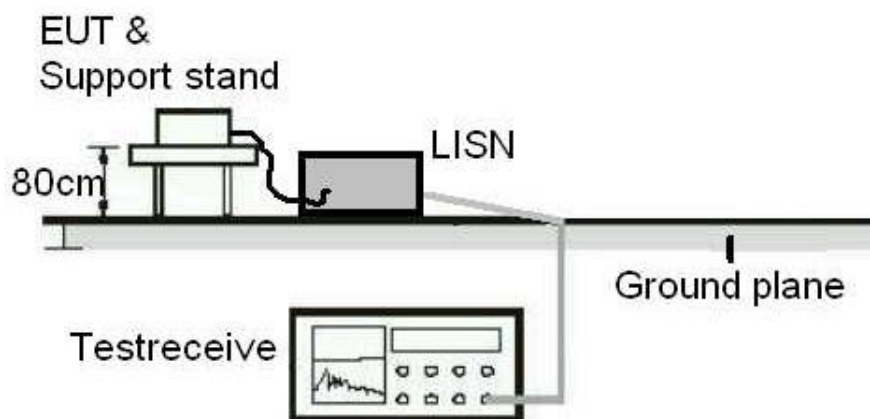

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Two-Line V-Network	Rohde & Schwarz	ENV216	101938	2024/10/22	2025/10/21
EMI Test Receiver	R&S	ESCI	101094	2024/11/25	2025/11/24

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

Test Results

Please refer to Appendix B.