

WiFi 5.2 GHz band

Frequency: 5180 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.424$ mho/m; $\epsilon_r = 47.72$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(4.17, 4.17, 4.17); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 36/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.258 mW/g


Rear/Ch 36/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 7.576 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.5680

SAR(1 g) = 0.161 mW/g; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.314 mW/g

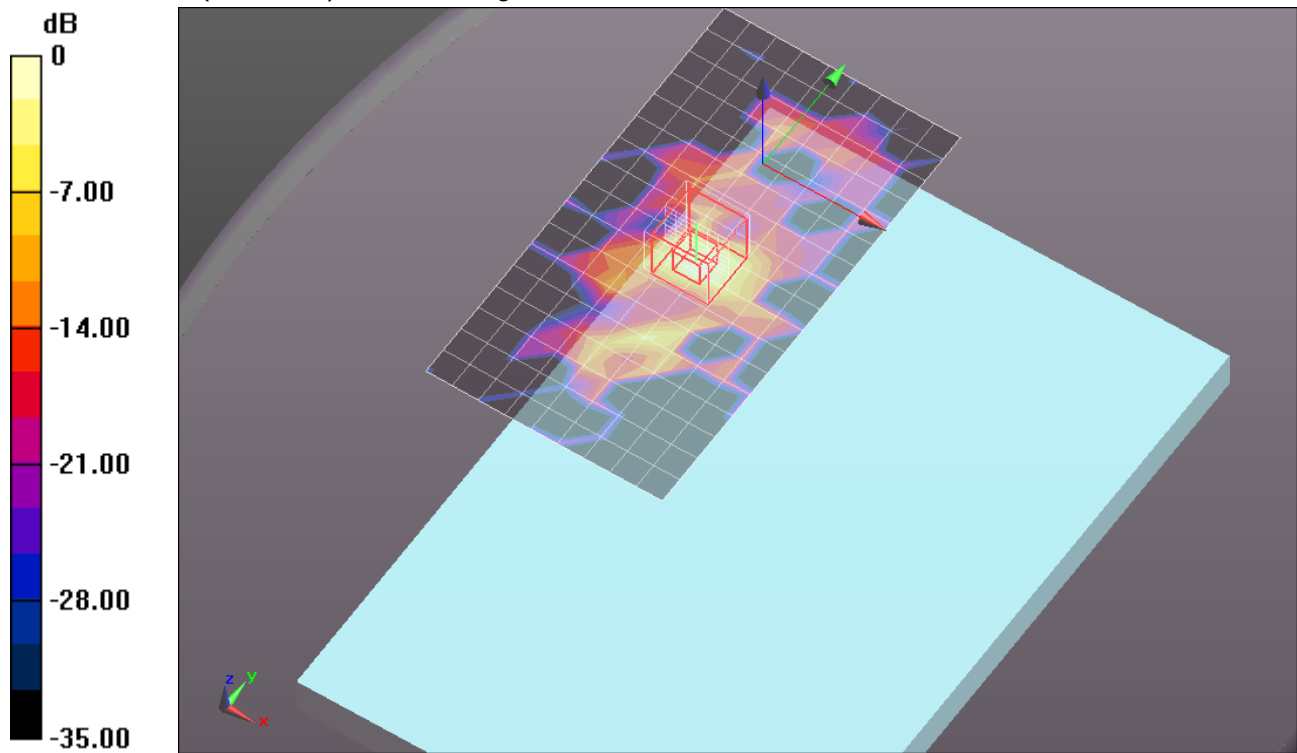

0 dB = 0.310mW/g = -10.17 dB mW/g

WiFi 5.2 GHz band

Frequency: 5240 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5240$ MHz; $\sigma = 5.505$ mho/m; $\epsilon_r = 47.631$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(4.17, 4.17, 4.17); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 48/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.597 mW/g


Rear/Ch 48/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 10.512 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.0190

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.573 mW/g

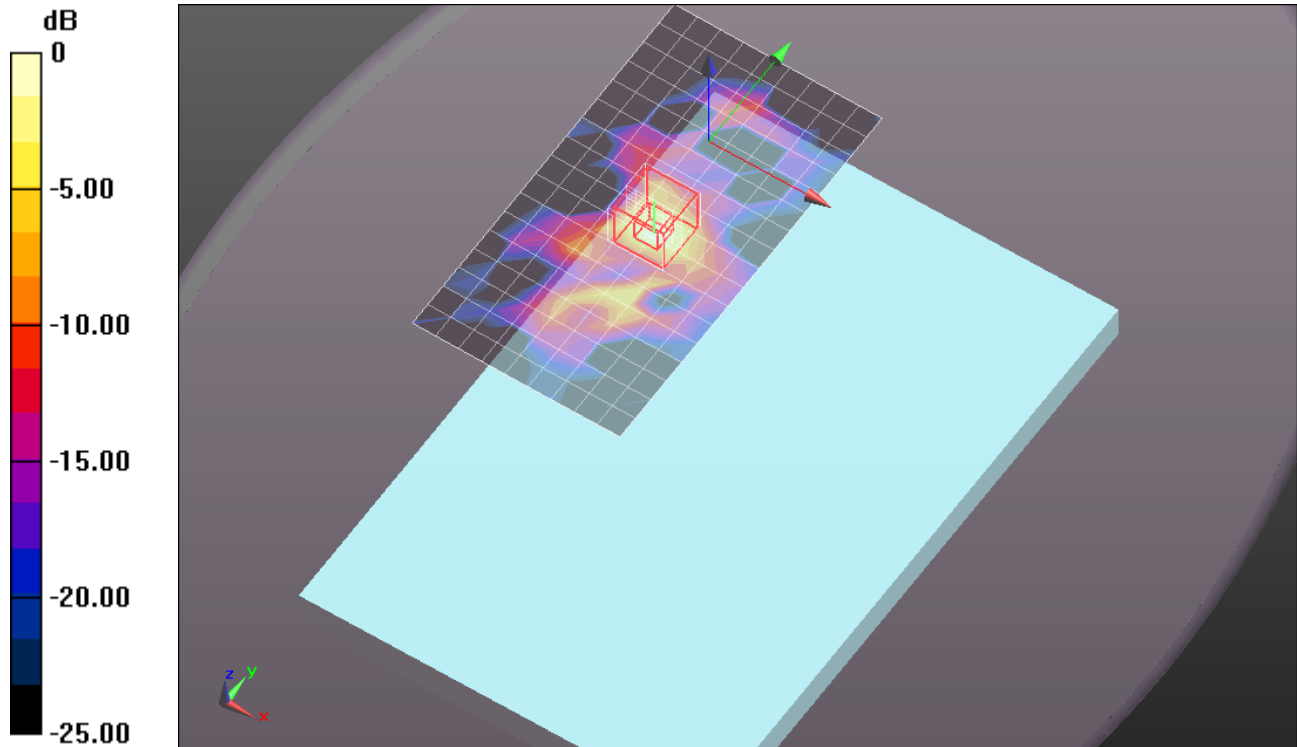

0 dB = 0.570mW/g = -4.88 dB mW/g

WiFi 5.2 GHz band

Frequency: 5180 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5180$ MHz; $\sigma = 5.424$ mho/m; $\epsilon_r = 47.72$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(4.17, 4.17, 4.17); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 3/Ch 36/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.147 mW/g


Rear 20 deg. tilt @ Edge 3/Ch 36/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 5.659 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.3280

SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.159 mW/g

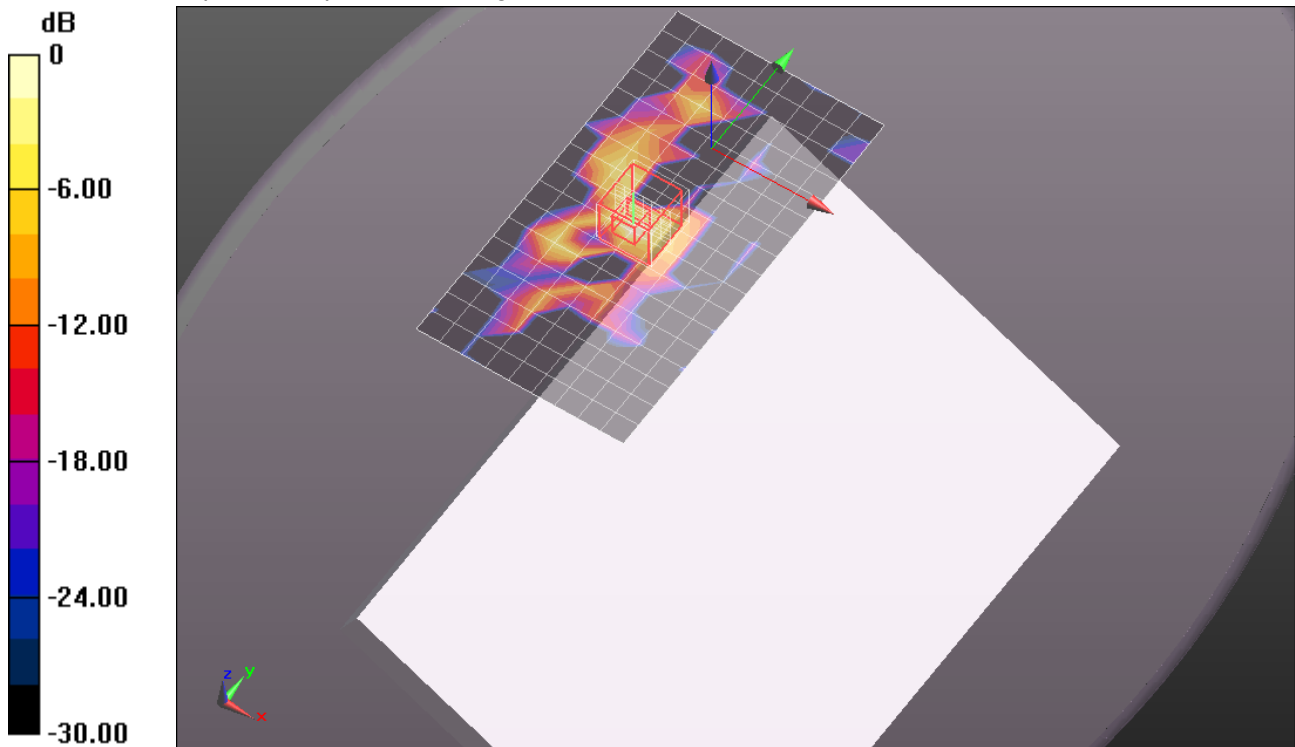

0 dB = 0.160mW/g = -15.92 dB mW/g

WiFi 5.2 GHz band

Frequency: 5240 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5240$ MHz; $\sigma = 5.505$ mho/m; $\epsilon_r = 47.631$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(4.17, 4.17, 4.17); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 3/Ch 48/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.337 mW/g


Rear 20 deg. tilt @ Edge 3/Ch 48/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 7.783 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.1570

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.033 mW/g

Maximum value of SAR (measured) = 0.280 mW/g

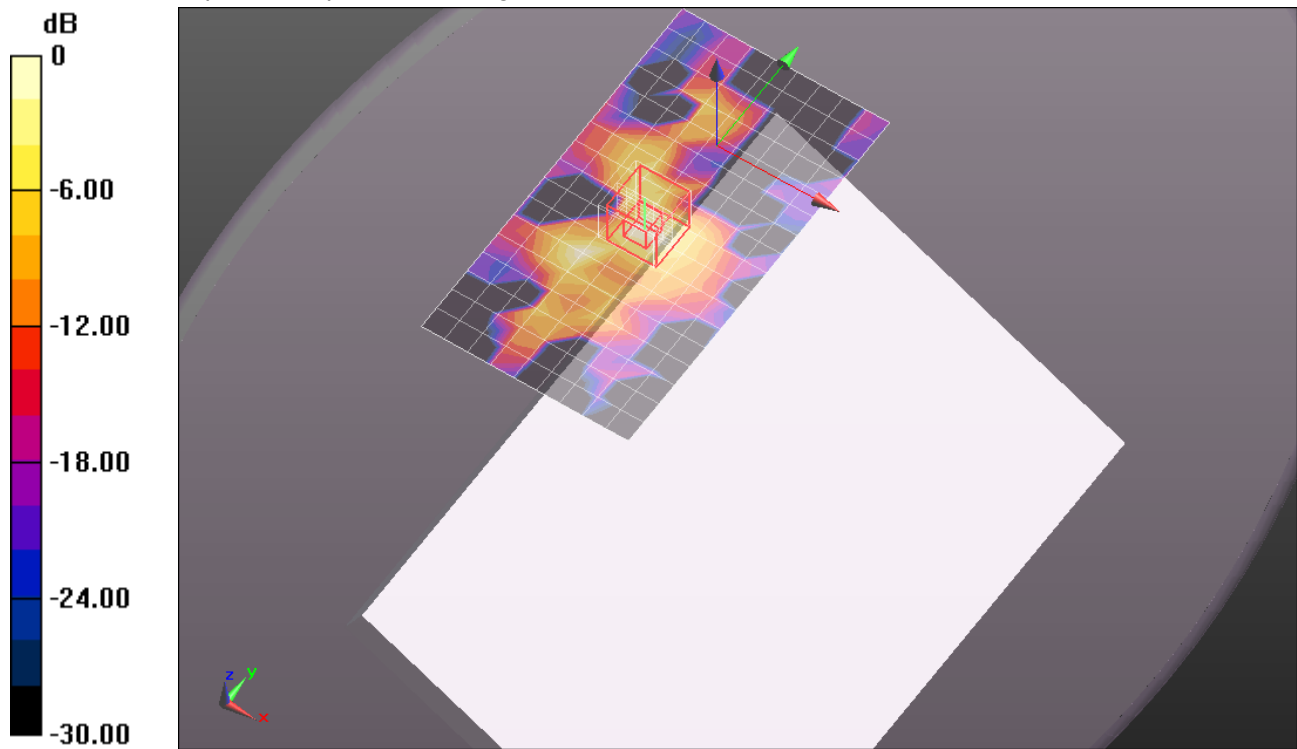

0 dB = 0.280mW/g = -11.06 dB mW/g

WiFi 5.2 GHz band

Frequency: 5180 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5180$ MHz; $\sigma = 5.424$ mho/m; $\epsilon_r = 47.72$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(4.17, 4.17, 4.17); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 36/Area Scan (8x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.732 mW/g


Edge 3/Ch 36/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 13.419 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.7540

SAR(1 g) = 0.372 mW/g; SAR(10 g) = 0.103 mW/g

Maximum value of SAR (measured) = 0.914 mW/g

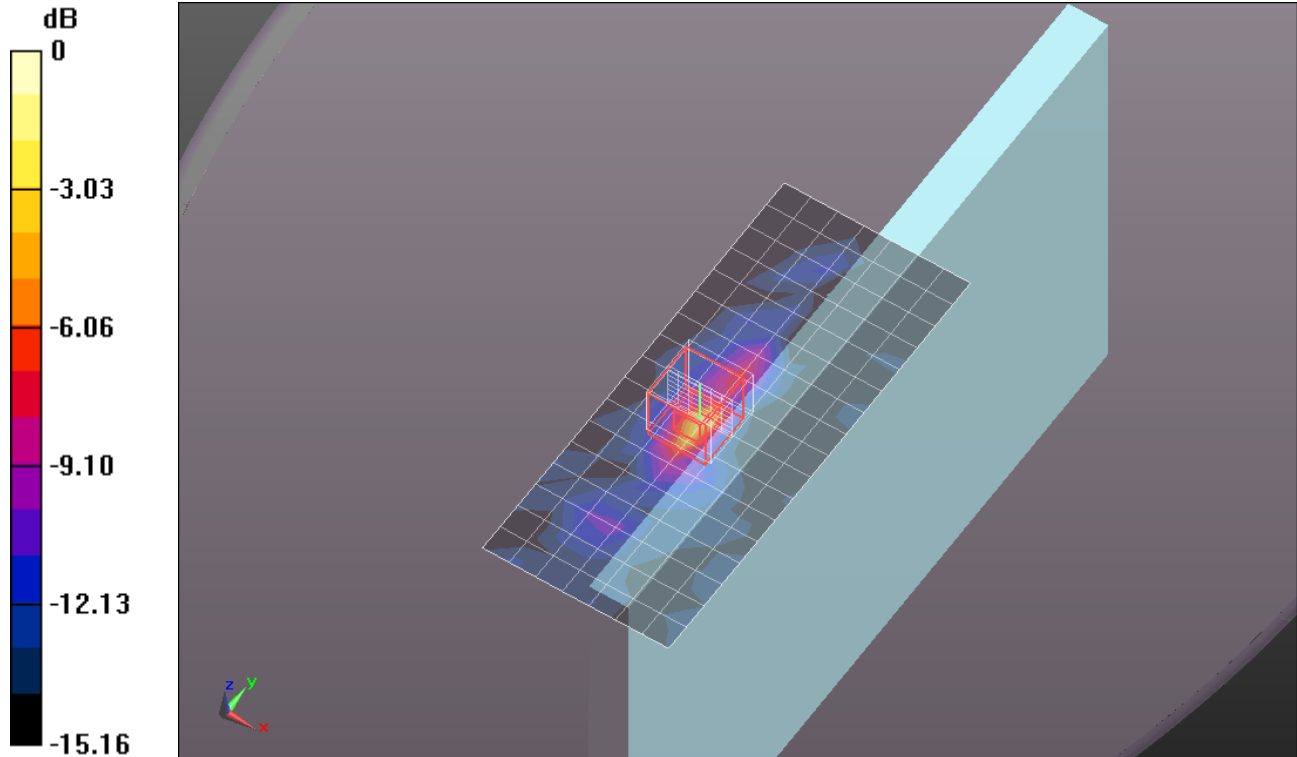

0 dB = 0.910mW/g = -0.82 dB mW/g

WiFi 5.2 GHz band

Frequency: 5240 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5240$ MHz; $\sigma = 5.505$ mho/m; $\epsilon_r = 47.631$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(4.17, 4.17, 4.17); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 48/Area Scan (8x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.424 mW/g


Edge 3/Ch 48/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 9.384 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 3.0760

SAR(1 g) = 0.429 mW/g; SAR(10 g) = 0.078 mW/g

Maximum value of SAR (measured) = 1.146 mW/g

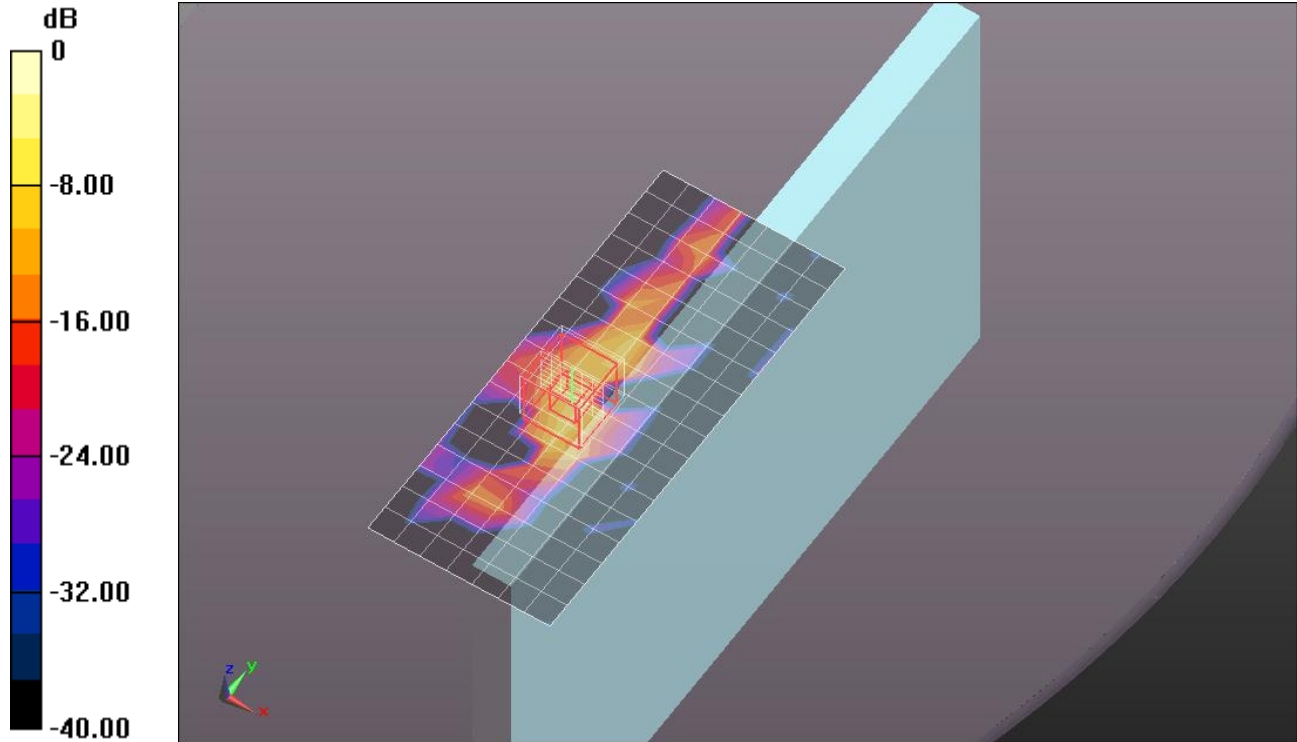


0 dB = 1.150mW/g = 1.21 dB mW/g

WiFi 5.2 GHz band

Frequency: 5240 MHz; Duty Cycle: 1:1

Edge 3/Ch 48/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.354 mW/g

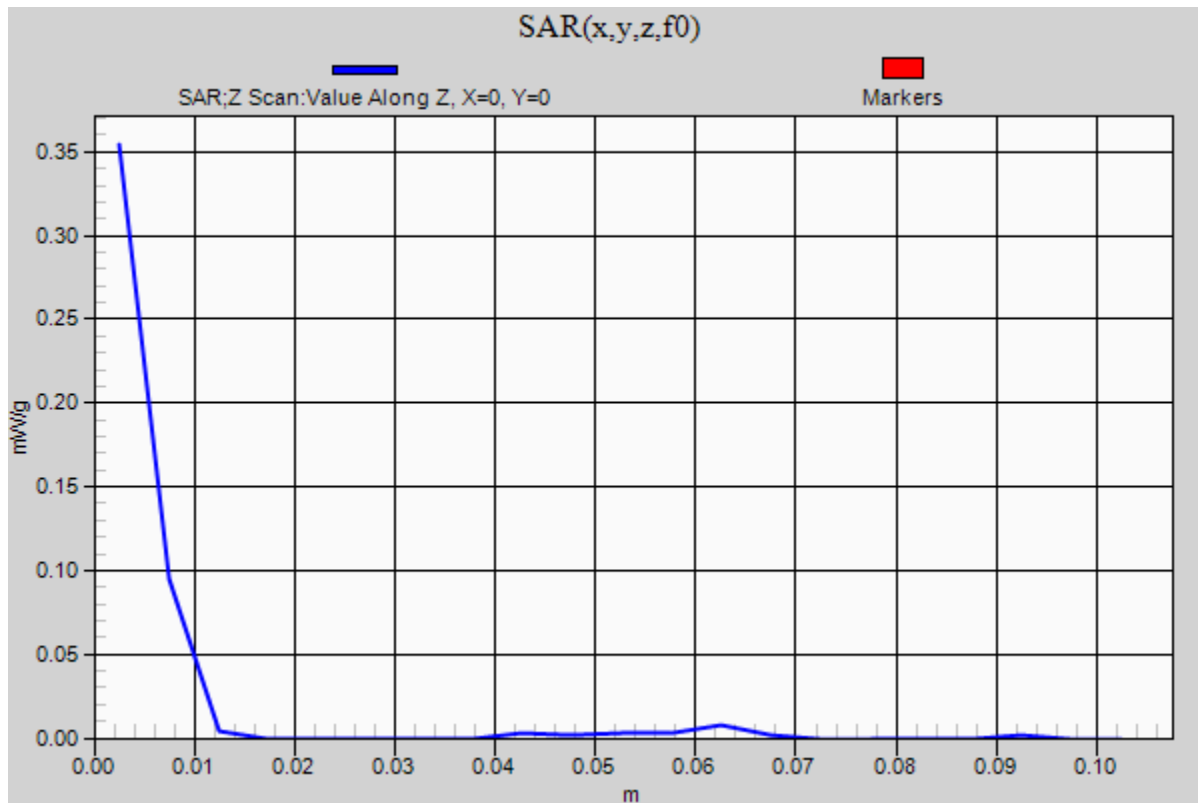

WiFi 5.3 GHz band

Frequency: 5260 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5260$ MHz; $\sigma = 5.527$ mho/m; $\epsilon_r = 47.586$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.99, 3.99, 3.99); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 52/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.548 mW/g


Rear/Ch 52/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 10.079 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.4950

SAR(1 g) = 0.414 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.663 mW/g

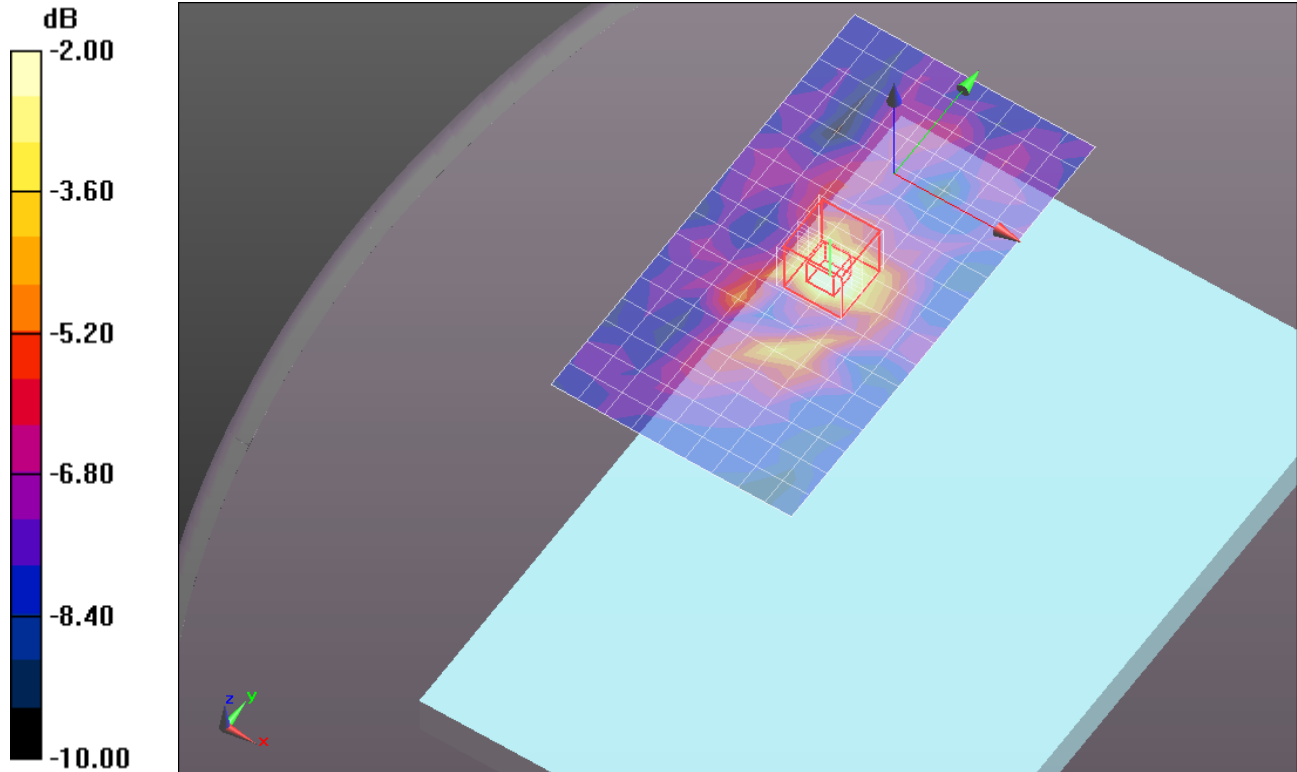

0 dB = 0.660mW/g = -3.61 dB mW/g

WiFi 5.3 GHz band

Frequency: 5320 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5320$ MHz; $\sigma = 5.604$ mho/m; $\epsilon_r = 47.48$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.99, 3.99, 3.99); Calibrated: 2/16/2012;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 64/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.589 mW/g


Rear/Ch 64/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 10.984 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.469 mW/g

SAR(1 g) = 0.435 mW/g; SAR(10 g) = 0.212 mW/g

Maximum value of SAR (measured) = 0.668 mW/g

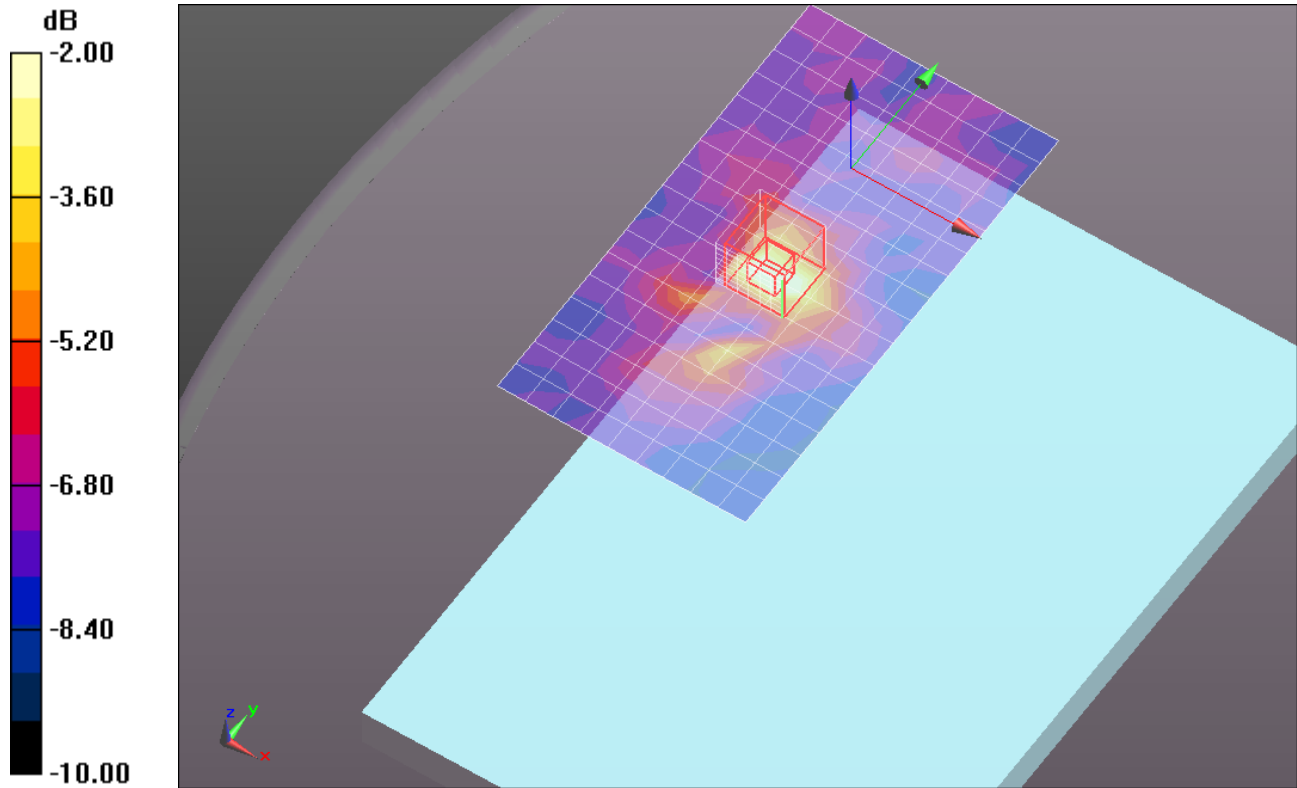

0 dB = 0.668 mW/g = -3.50 dB mW/g

WiFi 5.3 GHz band

Frequency: 5260 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5260$ MHz; $\sigma = 5.527$ mho/m; $\epsilon_r = 47.586$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.99, 3.99, 3.99); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 3/Ch 52/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.301 mW/g


Rear 20 deg. tilt @ Edge 3/Ch 52/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 8.072 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.8960

SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.118 mW/g

Maximum value of SAR (measured) = 0.386 mW/g

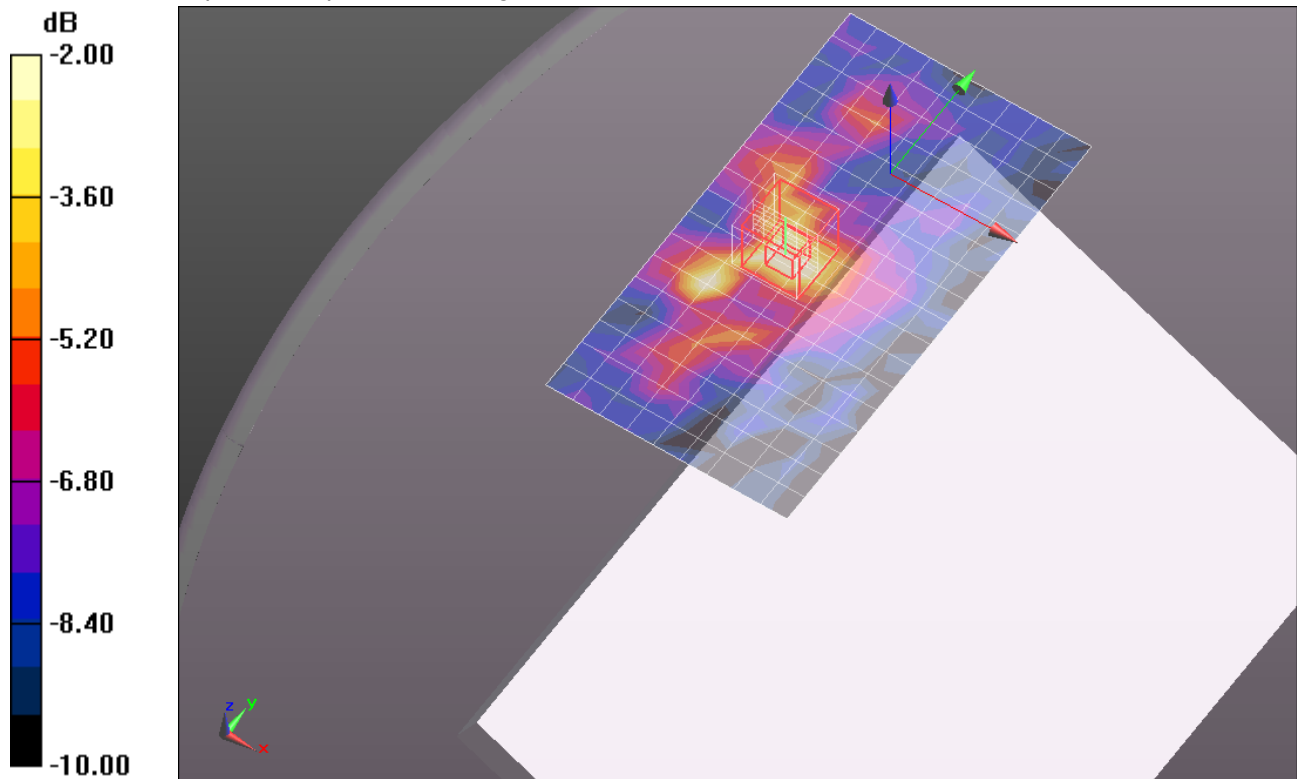

0 dB = 0.390mW/g = -8.18 dB mW/g

WiFi 5.3 GHz band

Frequency: 5320 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.604$ mho/m; $\epsilon_r = 47.48$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.99, 3.99, 3.99); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 3/Ch 64/Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.423 mW/g


Rear 20 deg. tilt @ Edge 3/Ch 64/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 8.119 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.8410

SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.121 mW/g

Maximum value of SAR (measured) = 0.418 mW/g

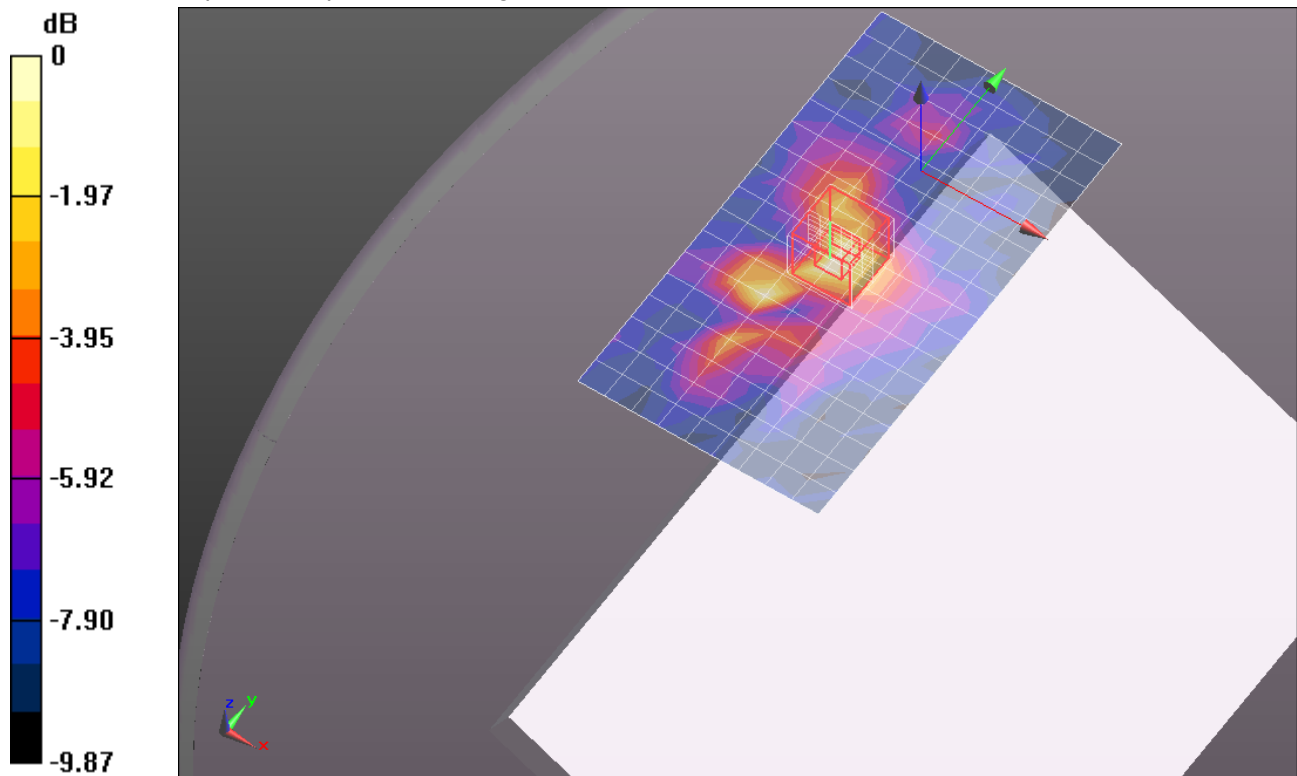

0 dB = 0.420mW/g = -7.54 dB mW/g

WiFi 5.3 GHz band

Frequency: 5260 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5260$ MHz; $\sigma = 5.527$ mho/m; $\epsilon_r = 47.586$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.99, 3.99, 3.99); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 52/Area Scan (8x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.977 mW/g


Edge 3/Ch 52/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 14.119 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.6010

SAR(1 g) = 0.506 mW/g; SAR(10 g) = 0.143 mW/g

Maximum value of SAR (measured) = 1.209 mW/g

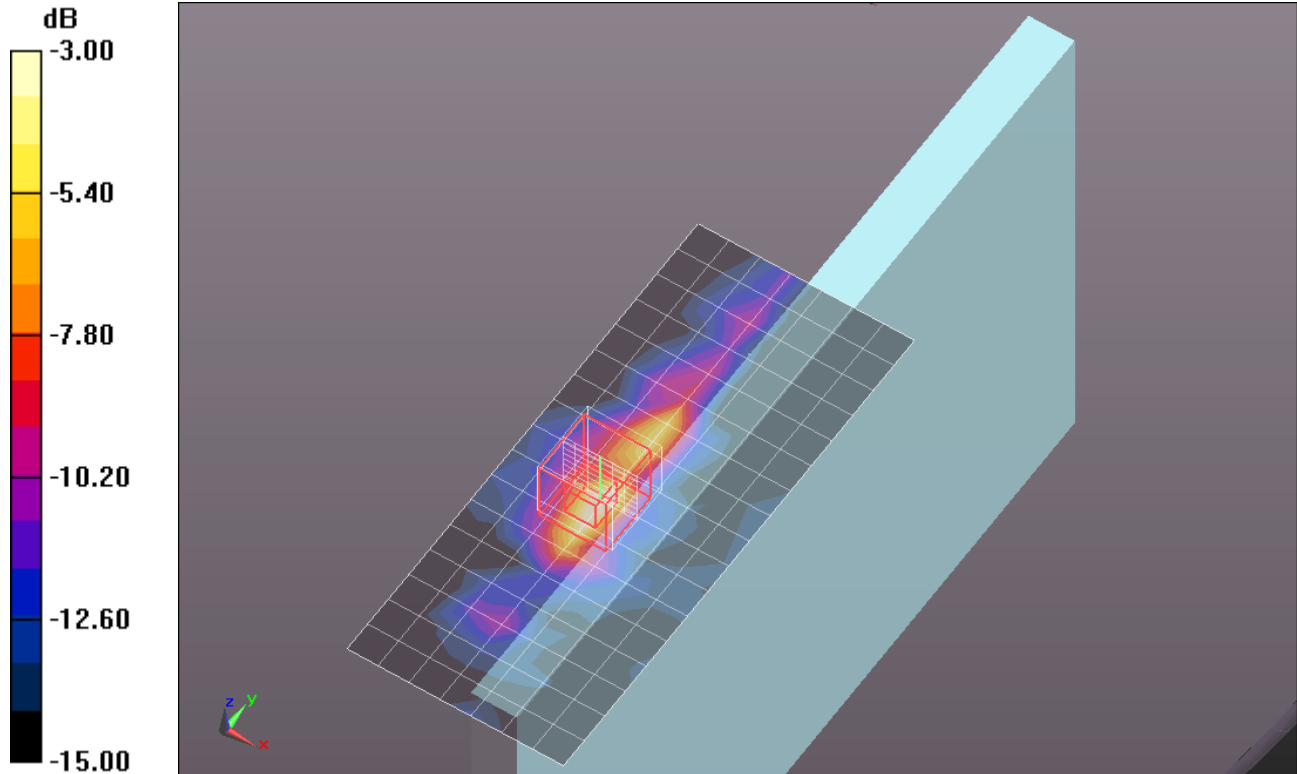

0 dB = 1.210mW/g = 1.66 dB mW/g

WiFi 5.3 GHz band

Frequency: 5320 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5320$ MHz; $\sigma = 5.604$ mho/m; $\epsilon_r = 47.48$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.99, 3.99, 3.99); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 64/Area Scan (8x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.767 mW/g


Edge 3/Ch 64/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 13.864 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 4.7610

SAR(1 g) = 0.519 mW/g; SAR(10 g) = 0.139 mW/g

Maximum value of SAR (measured) = 1.004 mW/g

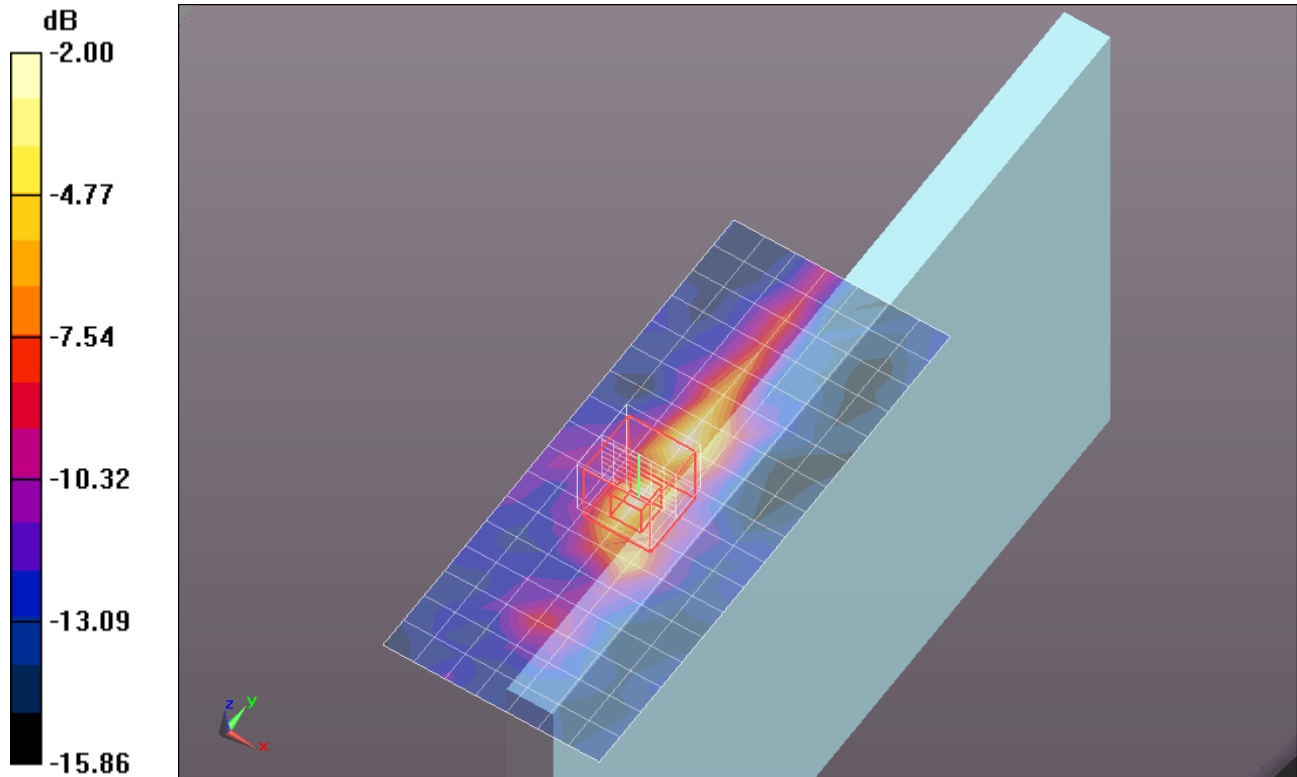


0 dB = 1.000mW/g = 0 dB mW/g

WiFi 5.3 GHz band

Frequency: 5320 MHz; Duty Cycle: 1:1

Edge 3/Ch 64/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.922 mW/g

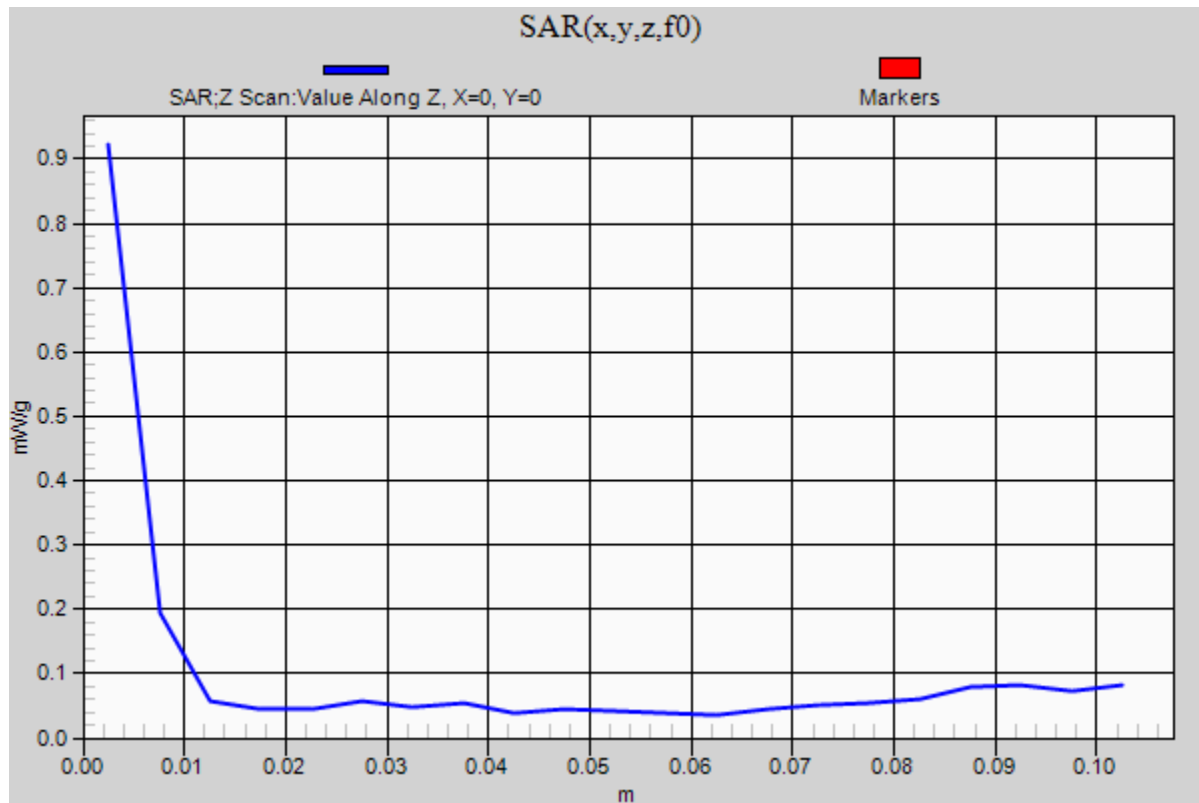

WiFi 5.5 GHz band

Frequency: 5520 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5520$ MHz; $\sigma = 5.857$ mho/m; $\epsilon_r = 47.143$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.49, 3.49, 3.49); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 104/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.463 mW/g


Rear/Ch 104/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 10.010 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.0880

SAR(1 g) = 0.381 mW/g; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 0.531 mW/g

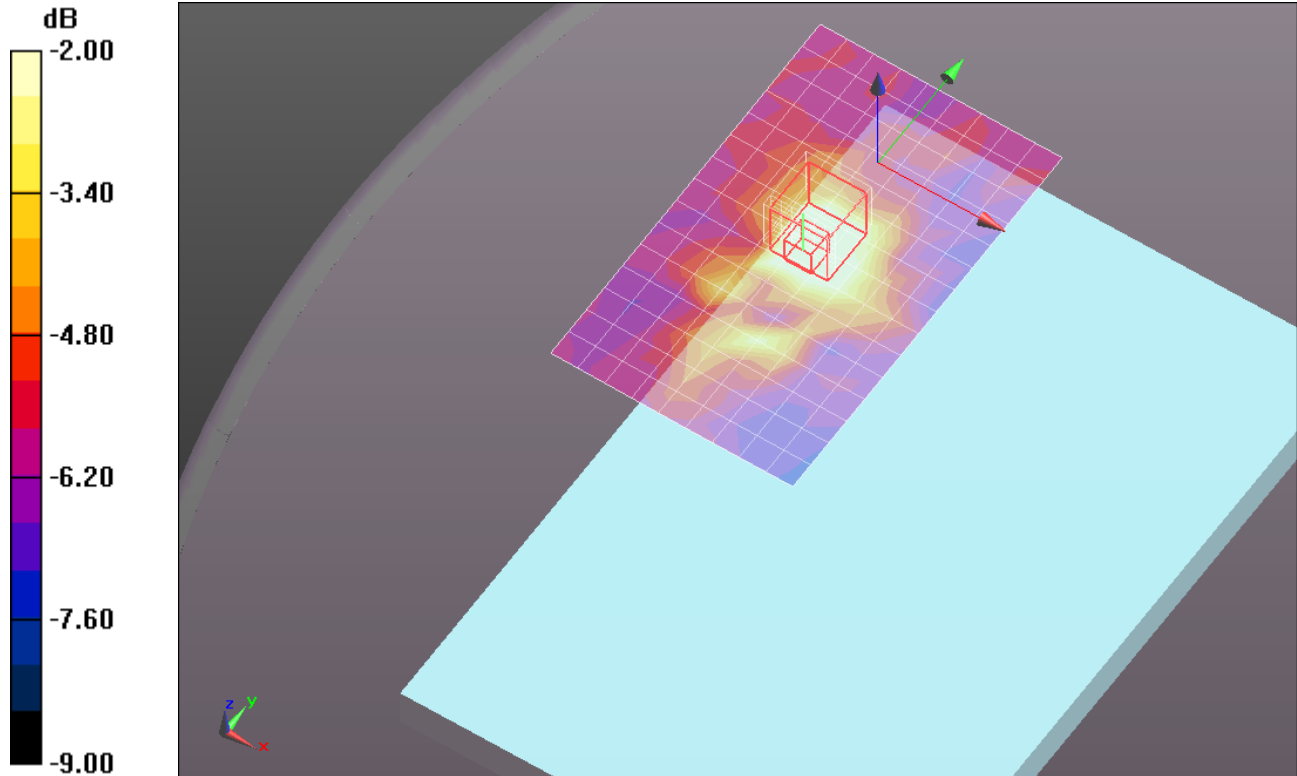

0 dB = 0.530mW/g = -5.51 dB mW/g

WiFi 5.5 GHz band

Frequency: 5580 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5580$ MHz; $\sigma = 5.953$ mho/m; $\epsilon_r = 47.013$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.26, 3.26, 3.26); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 116/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.629 mW/g


Rear/Ch 116/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 11.201 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.4260

SAR(1 g) = 0.468 mW/g; SAR(10 g) = 0.274 mW/g

Maximum value of SAR (measured) = 0.632 mW/g

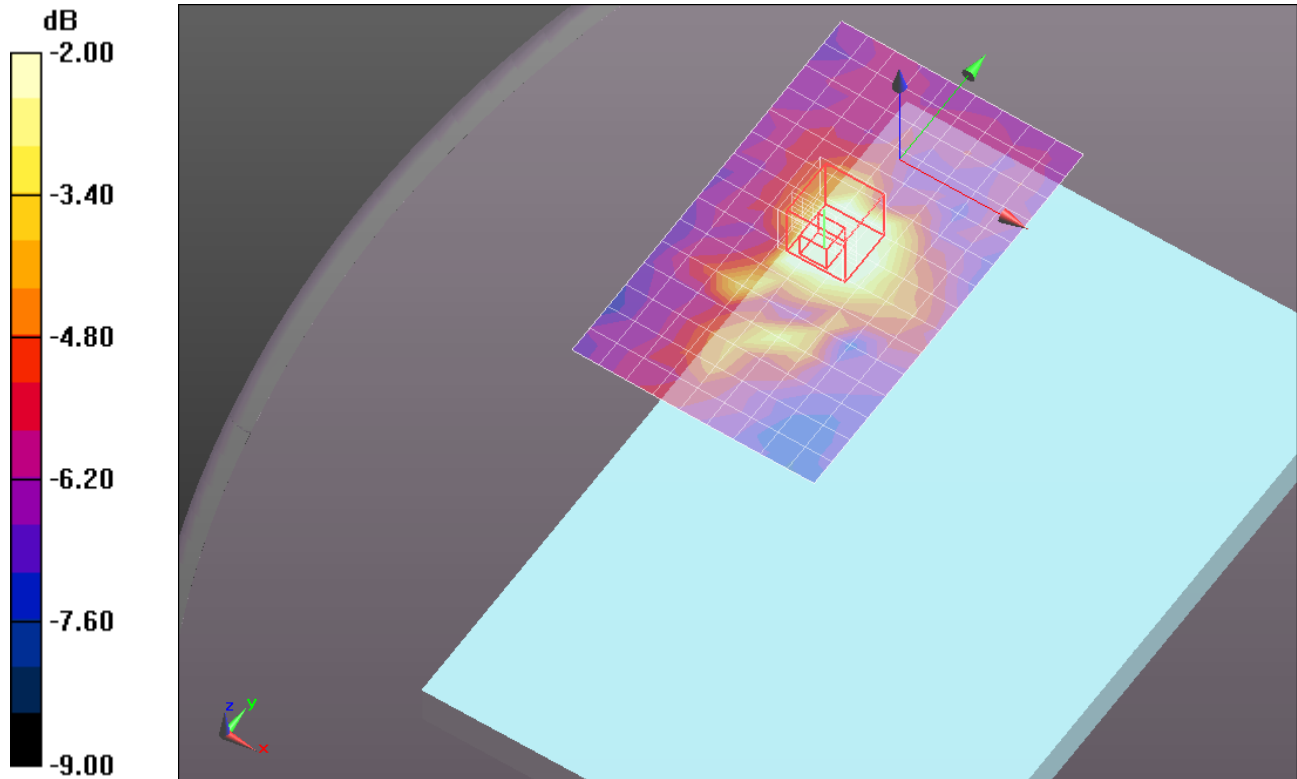

0 dB = 0.630mW/g = -4.01 dB mW/g

WiFi 5.5 GHz band

Frequency: 5620 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5620$ MHz; $\sigma = 5.994$ mho/m; $\epsilon_r = 46.971$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.26, 3.26, 3.26); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 124/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.890 mW/g


Rear/Ch 124/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 12.419 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.6160

SAR(1 g) = 0.567 mW/g; SAR(10 g) = 0.321 mW/g

Maximum value of SAR (measured) = 0.816 mW/g

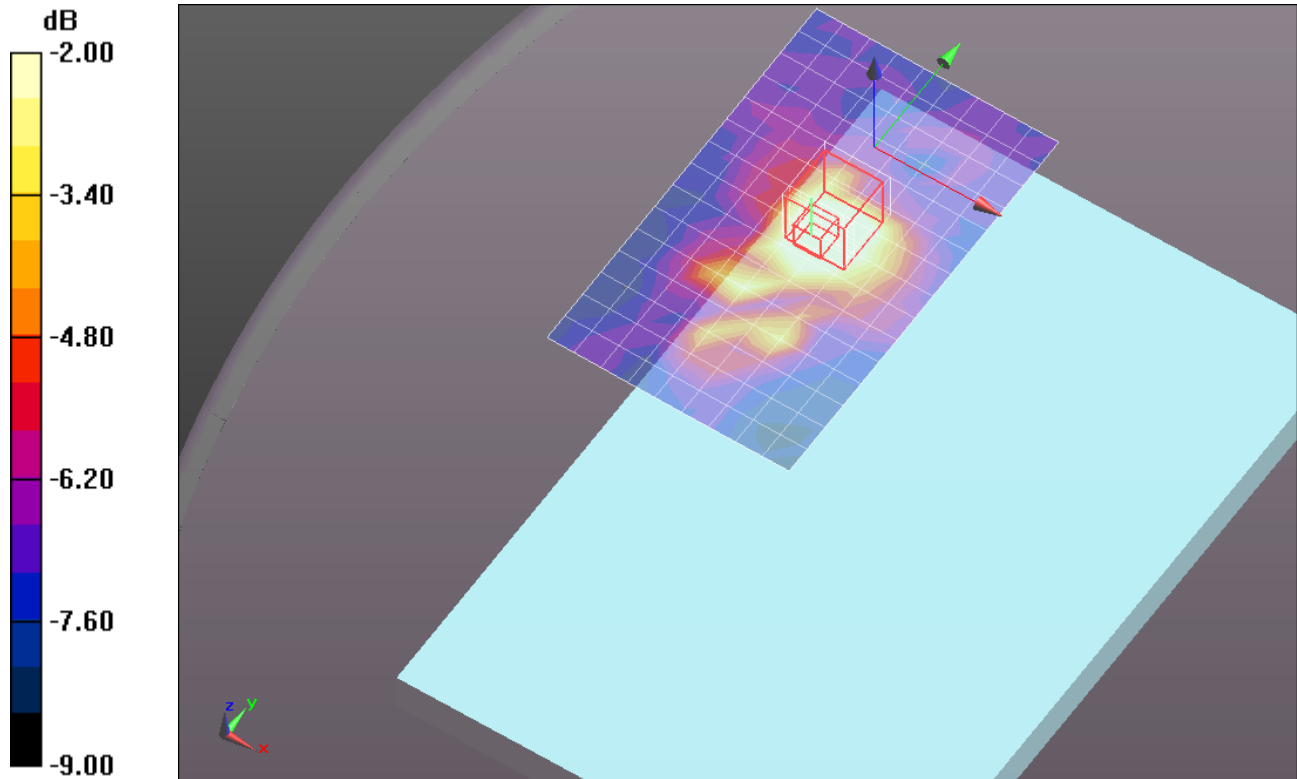

0 dB = 0.820mW/g = -1.72 dB mW/g

WiFi 5.5 GHz band

Frequency: 5680 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5680$ MHz; $\sigma = 6.075$ mho/m; $\epsilon_r = 46.834$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.26, 3.26, 3.26); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 136/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.698 mW/g


Rear/Ch 136/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 11.820 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.9990

SAR(1 g) = 0.531 mW/g; SAR(10 g) = 0.293 mW/g

Maximum value of SAR (measured) = 0.743 mW/g

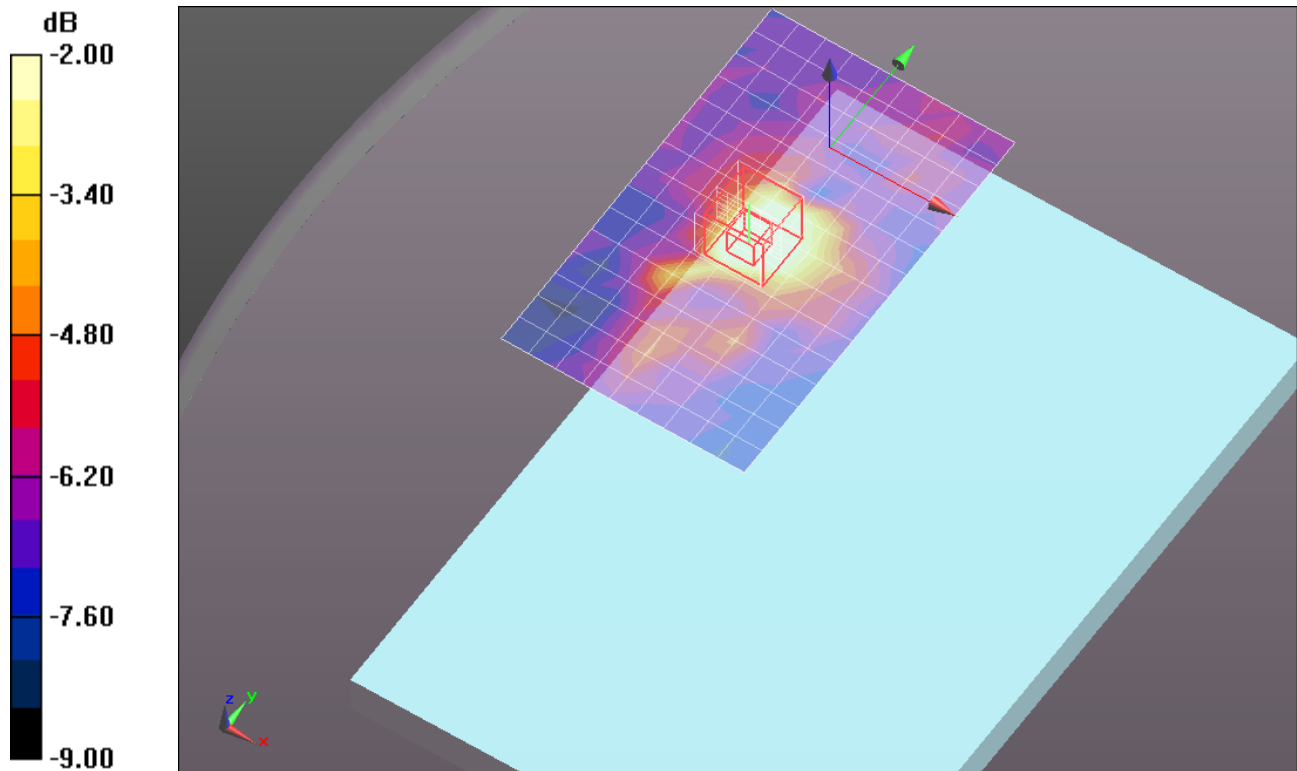

0 dB = 0.740mW/g = -2.62 dB mW/g

WiFi 5.5 GHz band

Frequency: 5520 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5520$ MHz; $\sigma = 5.857$ mho/m; $\epsilon_r = 47.143$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.49, 3.49, 3.49); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 3/Ch 104/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.613 mW/g


Rear 20 deg. tilt @ Edge 3/Ch 104/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 11.022 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.3320

SAR(1 g) = 0.332 mW/g; SAR(10 g) = 0.139 mW/g

Maximum value of SAR (measured) = 0.605 mW/g

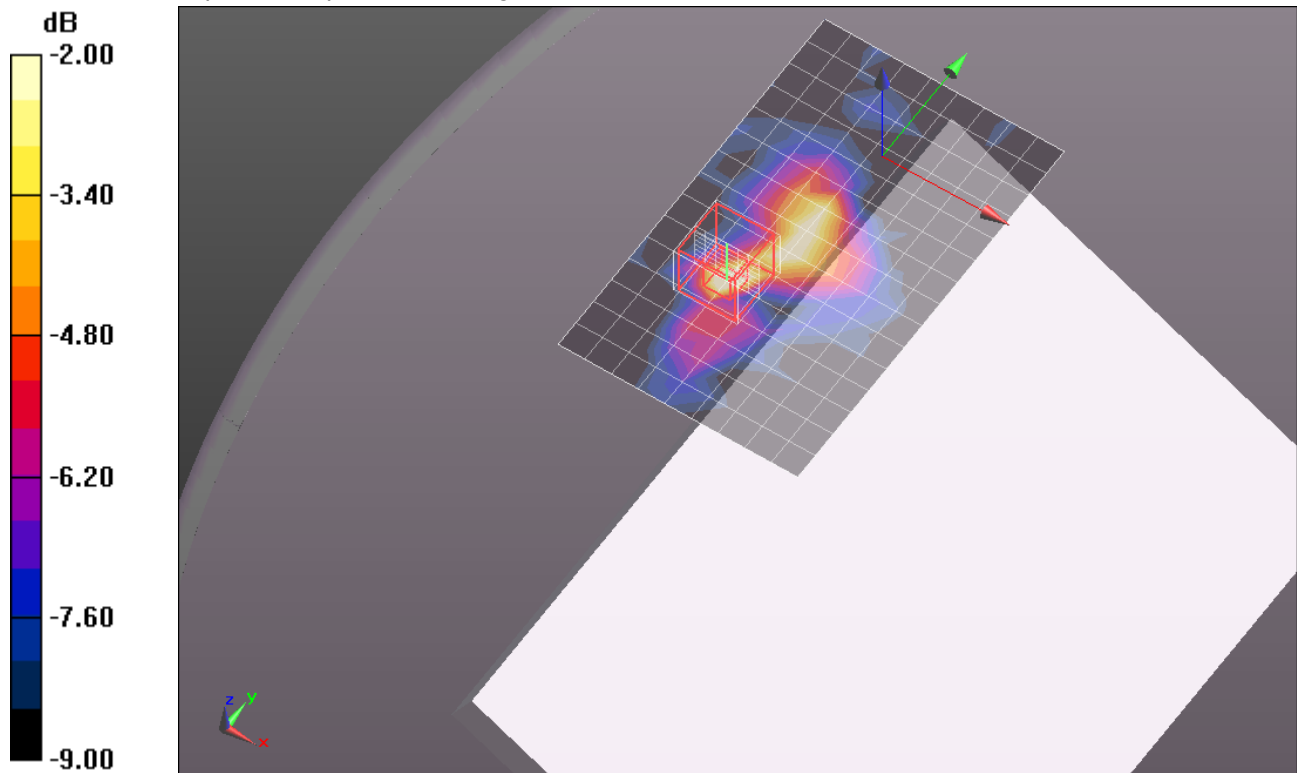

0 dB = 0.600mW/g = -4.44 dB mW/g

WiFi 5.5 GHz band

Frequency: 5580 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5580$ MHz; $\sigma = 5.953$ mho/m; $\epsilon_r = 47.013$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.26, 3.26, 3.26); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 3/Ch 116/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.598 mW/g


Rear 20 deg. tilt @ Edge 3/Ch 116/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 9.161 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.8270

SAR(1 g) = 0.388 mW/g; SAR(10 g) = 0.160 mW/g

Maximum value of SAR (measured) = 0.662 mW/g

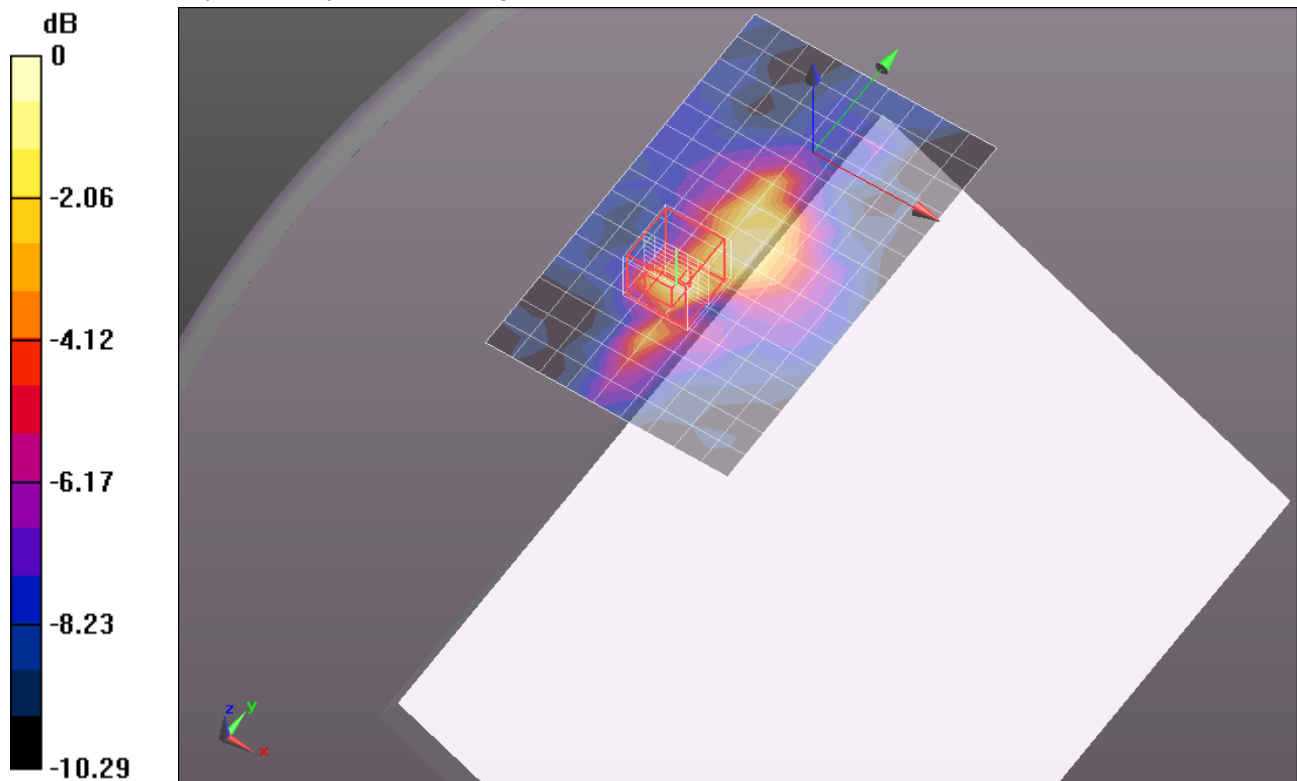

0 dB = 0.660mW/g = -3.61 dB mW/g

WiFi 5.5 GHz band

Frequency: 5620 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5620$ MHz; $\sigma = 5.994$ mho/m; $\epsilon_r = 46.971$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.26, 3.26, 3.26); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 3/Ch 124/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.877 mW/g


Rear 20 deg. tilt @ Edge 3/Ch 124/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 12.045 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.3330

SAR(1 g) = 0.433 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 0.673 mW/g

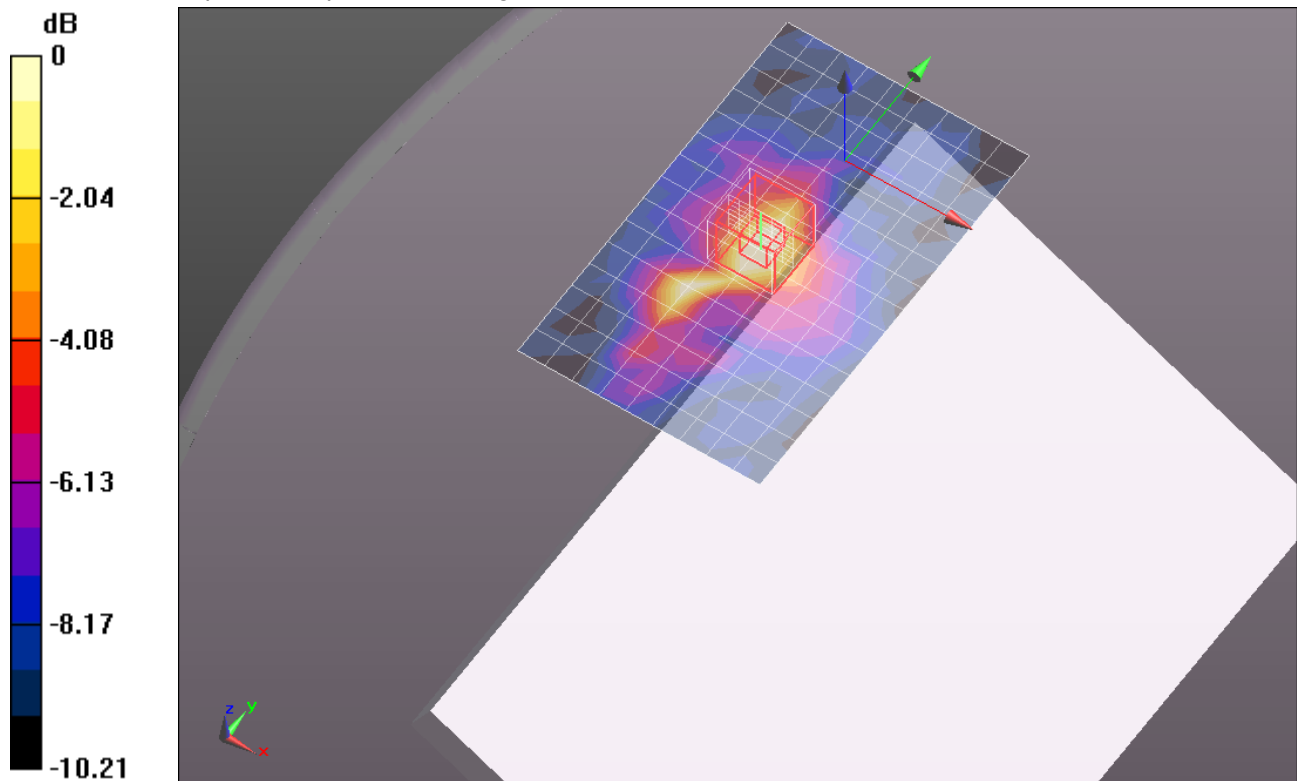

0 dB = 0.670mW/g = -3.48 dB mW/g

WiFi 5.5 GHz band

Frequency: 5680 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5680$ MHz; $\sigma = 6.075$ mho/m; $\epsilon_r = 46.834$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.26, 3.26, 3.26); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 3/Ch 136/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.984 mW/g


Rear 20 deg. tilt @ Edge 3/Ch 136/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 11.575 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.4760

SAR(1 g) = 0.447 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 0.704 mW/g

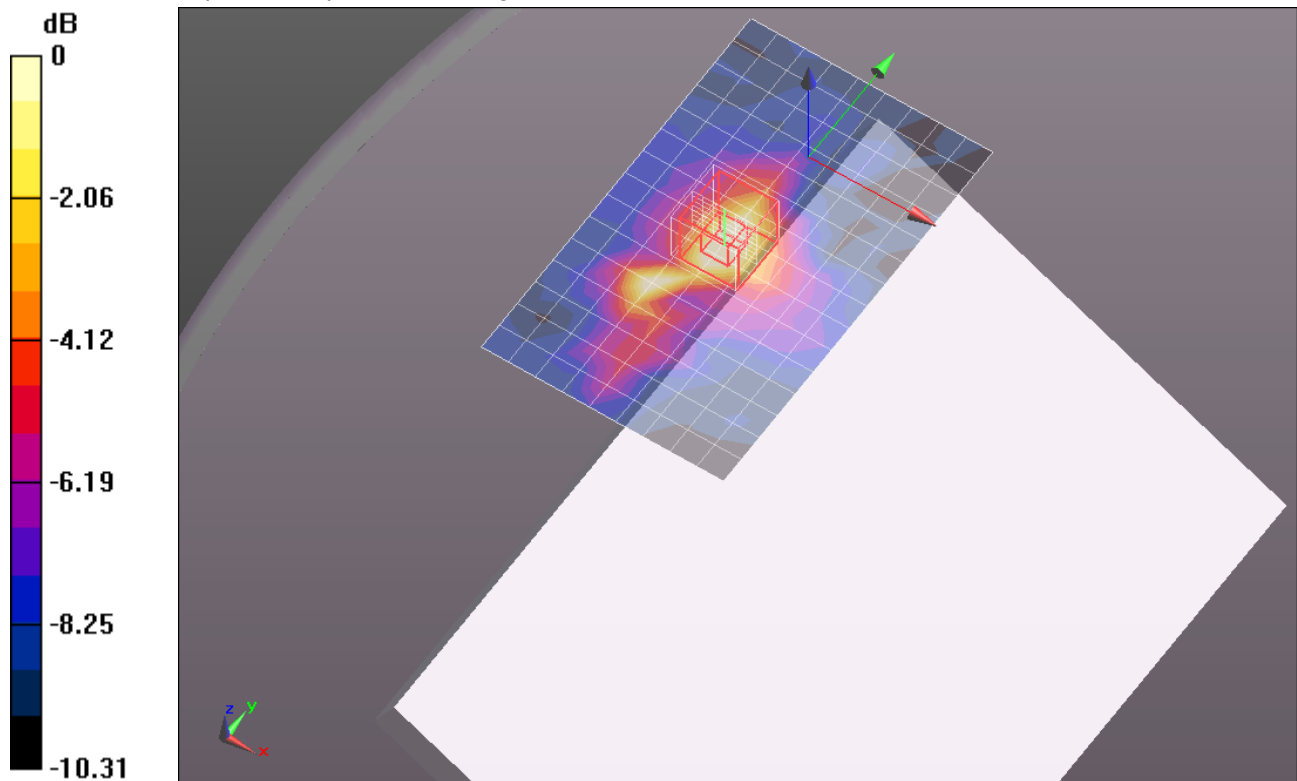

0 dB = 0.700mW/g = -3.10 dB mW/g

WiFi 5.5 GHz band

Frequency: 5520 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5520$ MHz; $\sigma = 5.857$ mho/m; $\epsilon_r = 47.143$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.49, 3.49, 3.49); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 104/Area Scan (8x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.226 mW/g


Edge 3/Ch 104/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 15.764 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 3.2030

SAR(1 g) = 0.548 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 1.304 mW/g

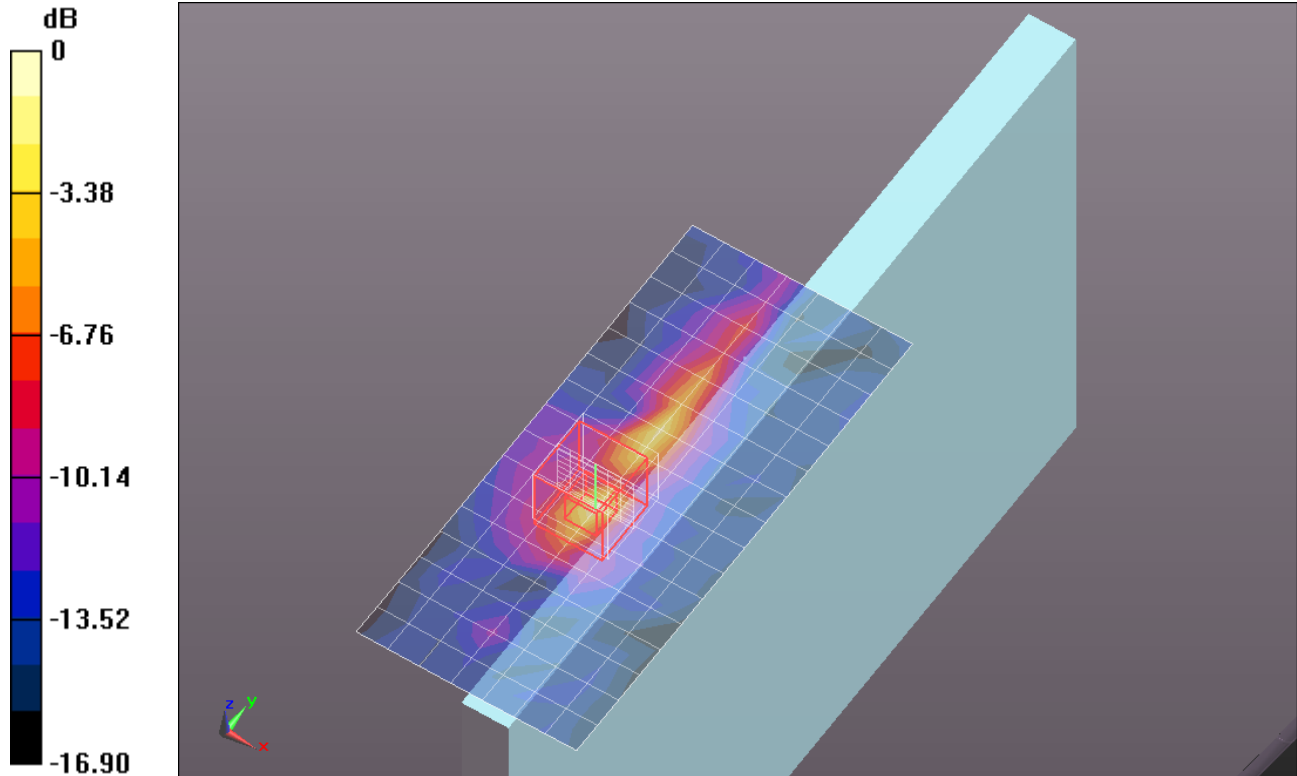

0 dB = 1.300mW/g = 2.28 dB mW/g

WiFi 5.5 GHz band

Frequency: 5580 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5580$ MHz; $\sigma = 5.953$ mho/m; $\epsilon_r = 47.013$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.26, 3.26, 3.26); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 116/Area Scan (8x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.613 mW/g


Edge 3/Ch 116/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 18.212 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 3.9730

SAR(1 g) = 0.704 mW/g; SAR(10 g) = 0.204 mW/g

Maximum value of SAR (measured) = 1.709 mW/g

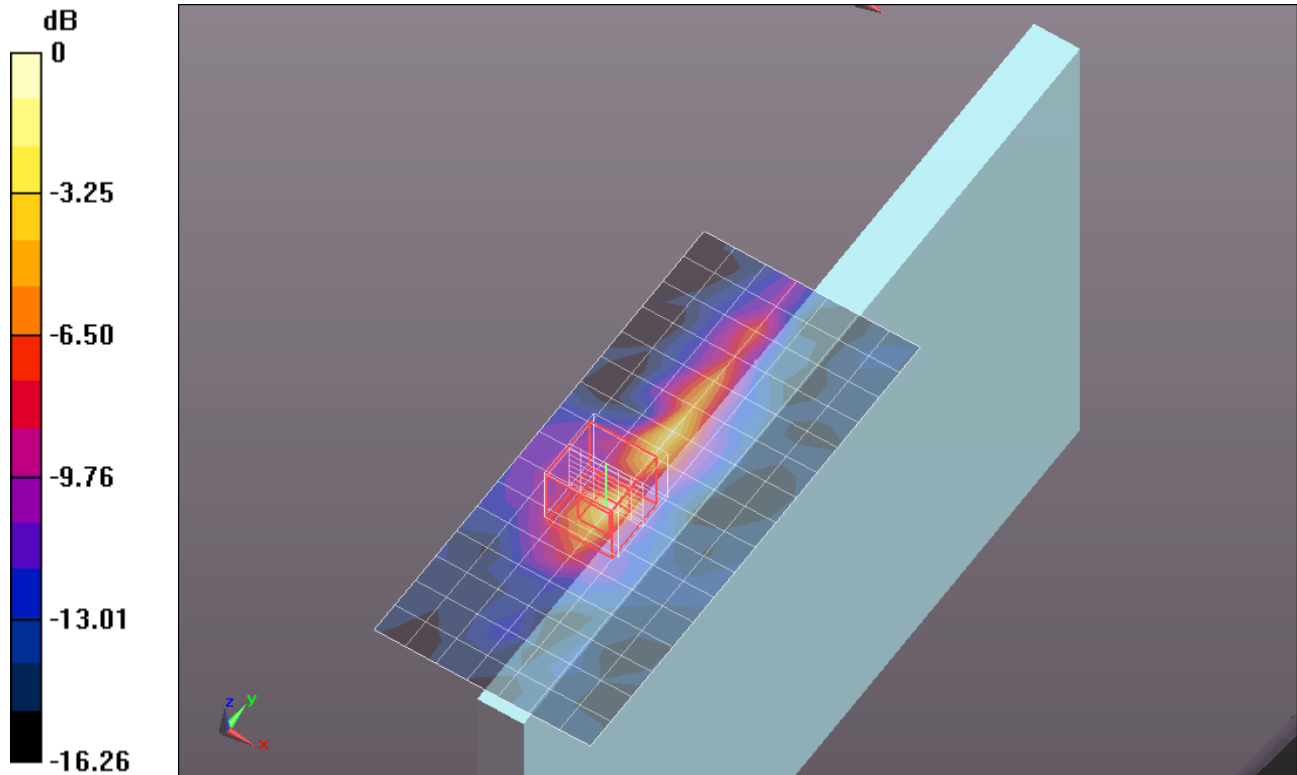

0 dB = 1.710mW/g = 4.66 dB mW/g

WiFi 5.5 GHz band

Frequency: 5620 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5620$ MHz; $\sigma = 5.994$ mho/m; $\epsilon_r = 46.971$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.26, 3.26, 3.26); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 124/Area Scan (8x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.646 mW/g


Edge 3/Ch 124/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 17.903 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.7480

SAR(1 g) = 0.710 mW/g; SAR(10 g) = 0.213 mW/g

Maximum value of SAR (measured) = 1.724 mW/g

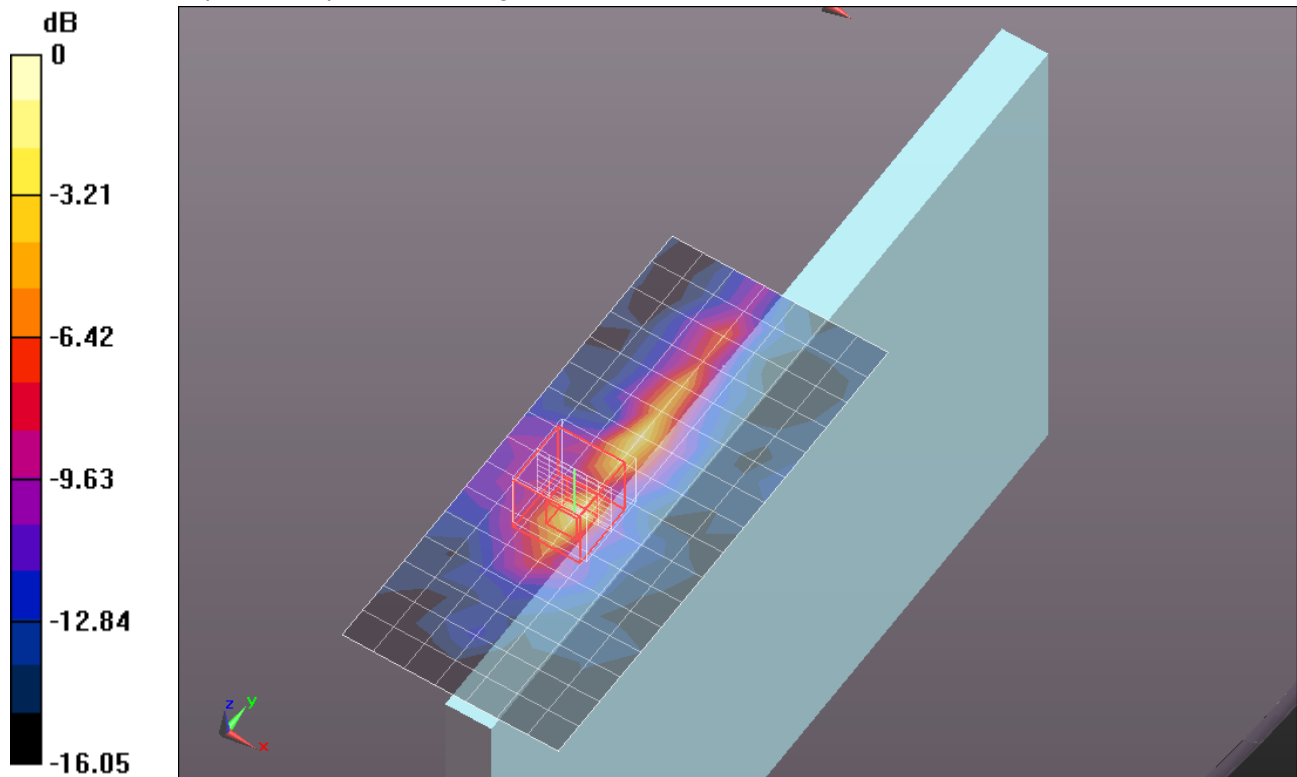


0 dB = 1.720mW/g = 4.71 dB mW/g

WiFi 5.5 GHz band

Frequency: 5620 MHz; Duty Cycle: 1:1

Edge 3/Ch 124/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 1.606 mW/g

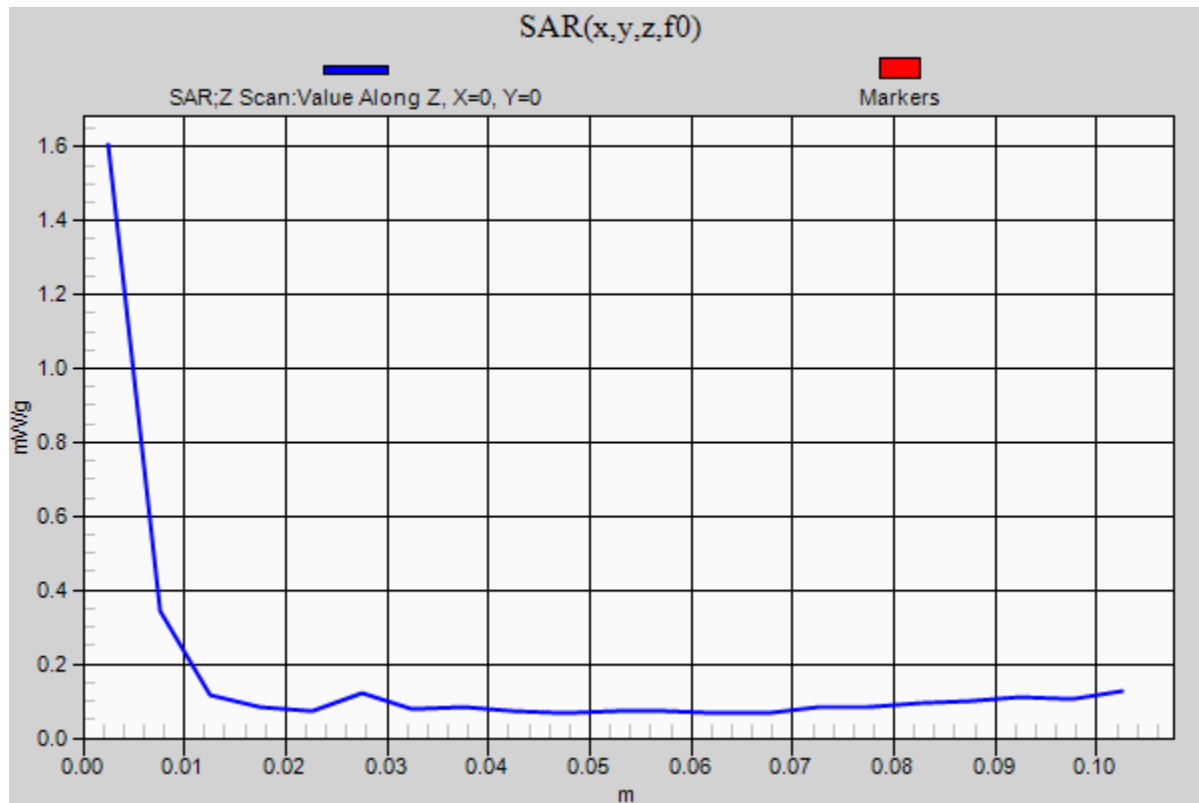

WiFi 5.5 GHz band

Frequency: 5680 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5680$ MHz; $\sigma = 6.075$ mho/m; $\epsilon_r = 46.834$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.26, 3.26, 3.26); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 136/Area Scan (8x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.385 mW/g


Edge 3/Ch 136/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 16.433 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.6290

SAR(1 g) = 0.620 mW/g; SAR(10 g) = 0.198 mW/g

Maximum value of SAR (measured) = 1.423 mW/g

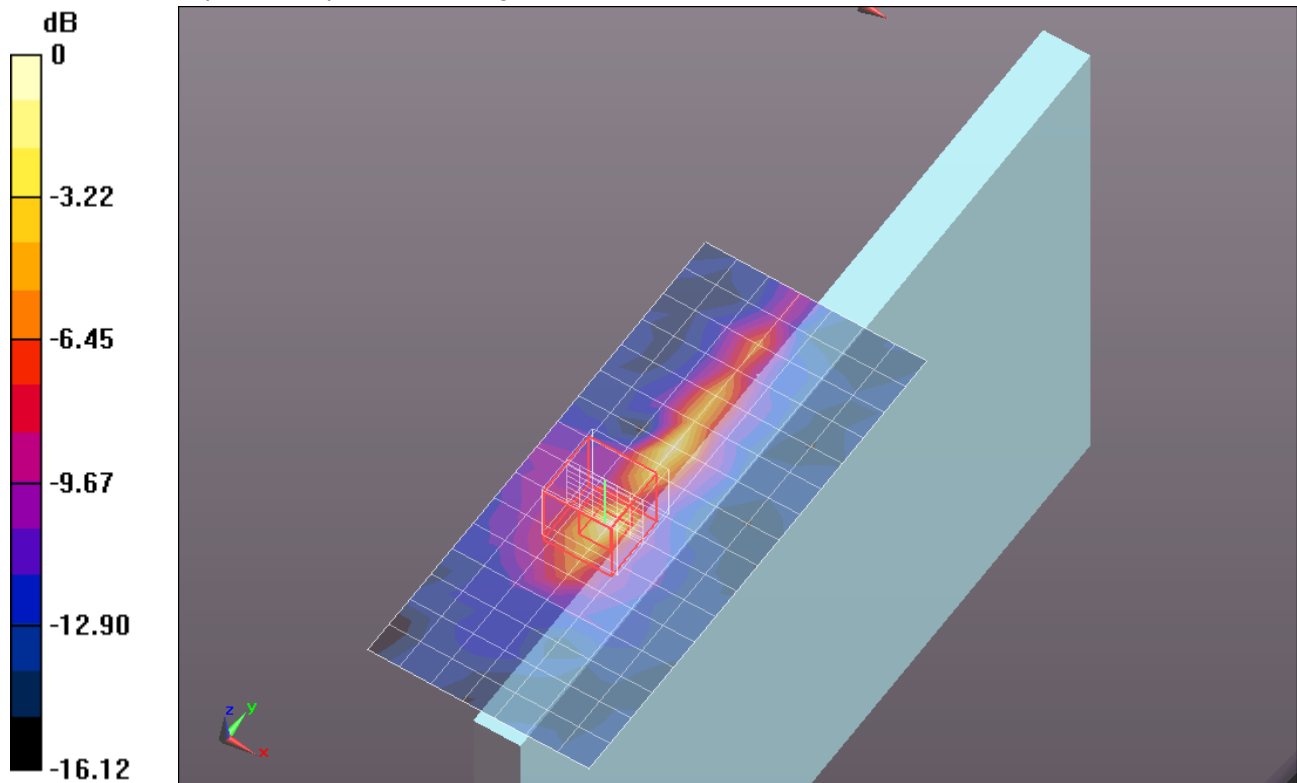

0 dB = 1.420mW/g = 3.05 dB mW/g

WiFi 5.8 GHz band

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5745$ MHz; $\sigma = 6.156$ mho/m; $\epsilon_r = 46.764$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.58, 3.58, 3.58); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 149/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.565 mW/g


Rear/Ch 149/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 10.350 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.5690

SAR(1 g) = 0.461 mW/g; SAR(10 g) = 0.278 mW/g

Maximum value of SAR (measured) = 0.615 mW/g

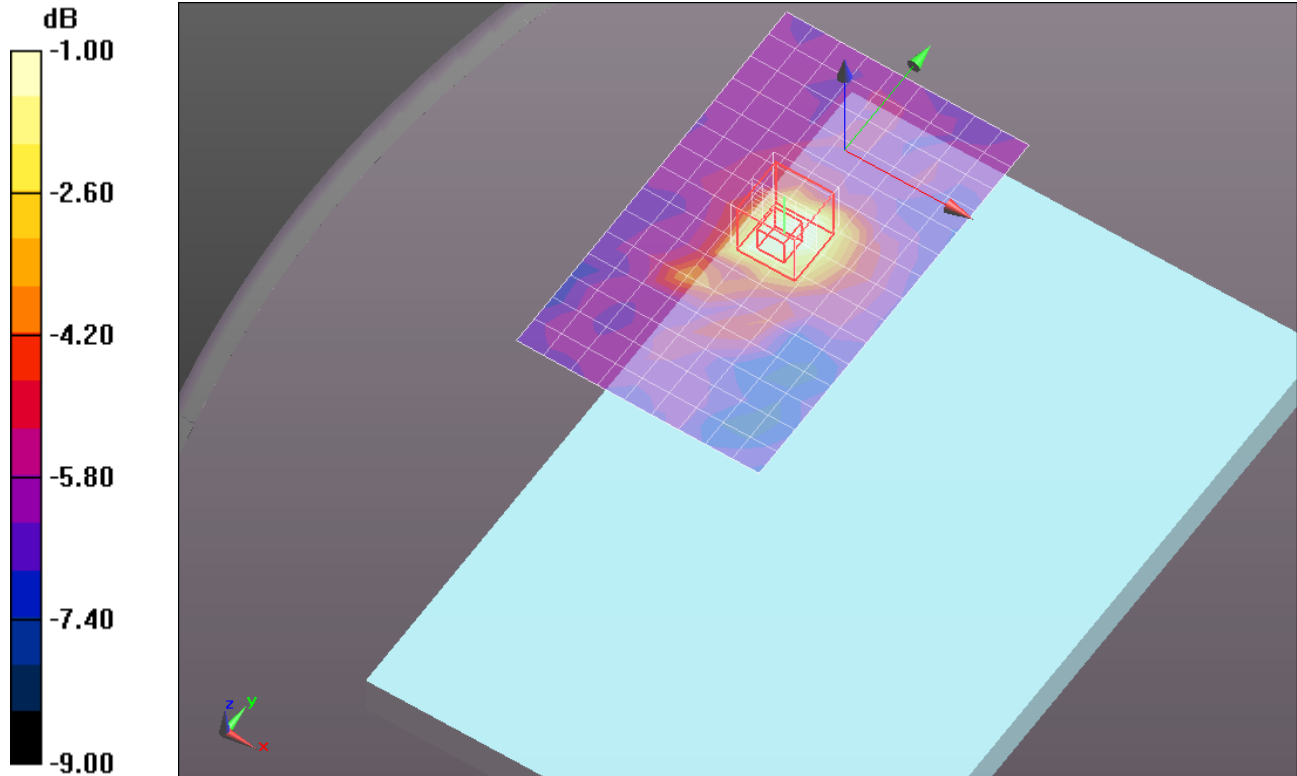

0 dB = 0.620mW/g = -4.15 dB mW/g

WiFi 5.8 GHz band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5785$ MHz; $\sigma = 6.204$ mho/m; $\epsilon_r = 46.658$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.58, 3.58, 3.58); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 157/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.529 mW/g


Rear/Ch 157/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 10.140 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.3930

SAR(1 g) = 0.434 mW/g; SAR(10 g) = 0.258 mW/g

Maximum value of SAR (measured) = 0.603 mW/g

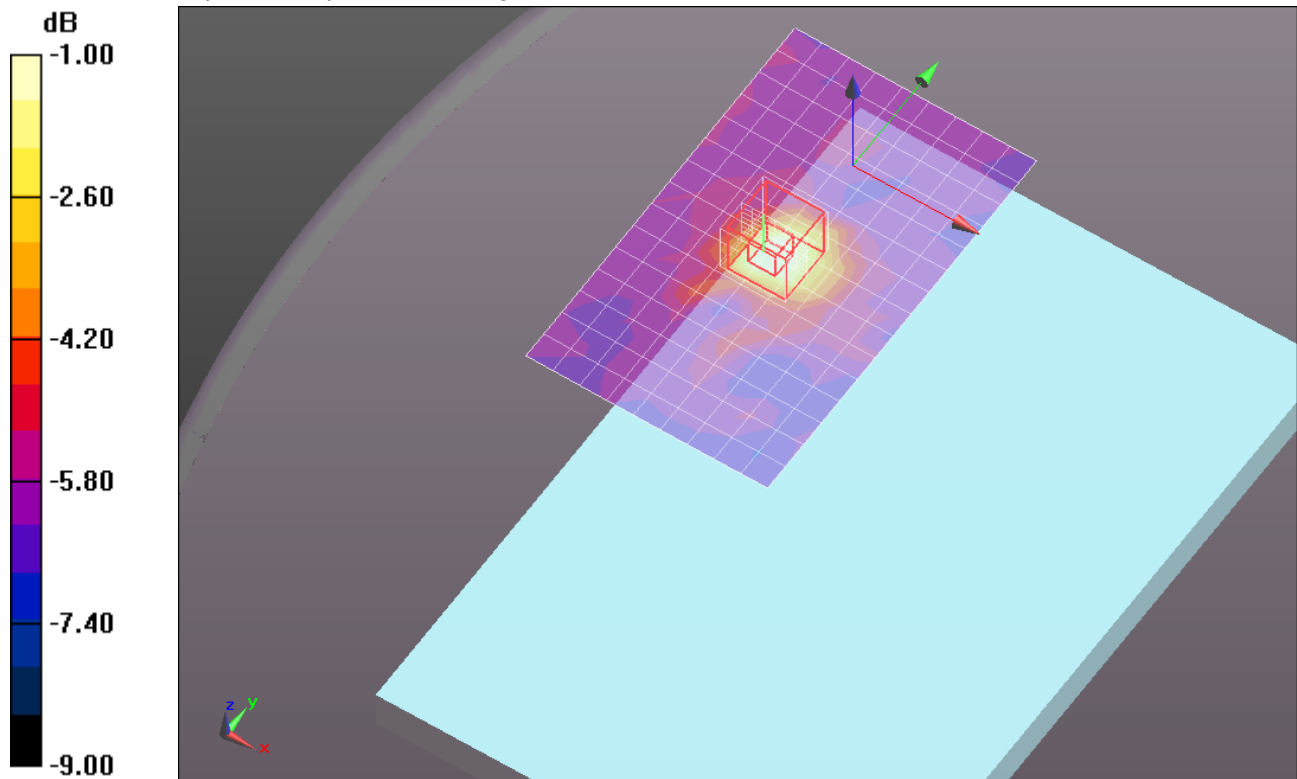

0 dB = 0.600mW/g = -4.44 dB mW/g

WiFi 5.8 GHz band

Frequency: 5825 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5825$ MHz; $\sigma = 6.286$ mho/m; $\epsilon_r = 46.585$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.58, 3.58, 3.58); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/Ch 165/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.548 mW/g


Rear/Ch 165/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 11.042 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.1880

SAR(1 g) = 0.427 mW/g; SAR(10 g) = 0.262 mW/g

Maximum value of SAR (measured) = 0.590 mW/g

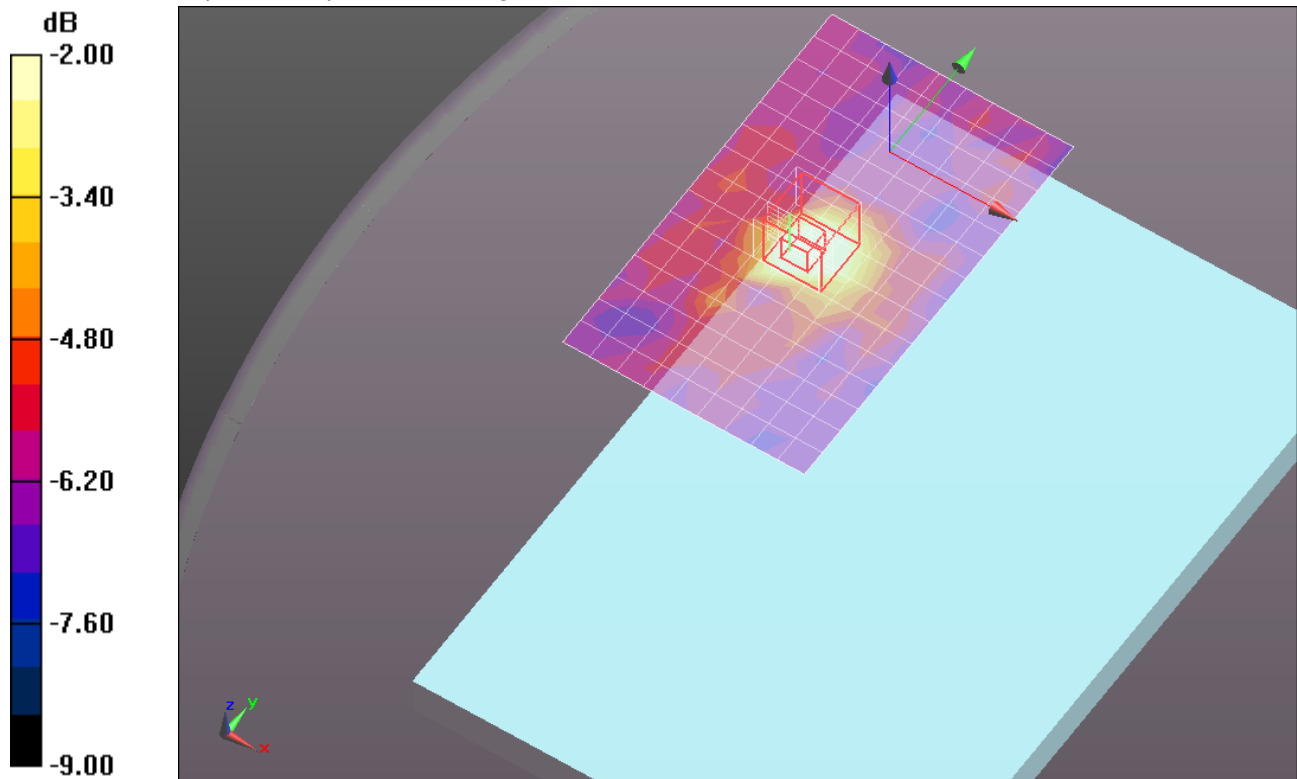

0 dB = 0.590mW/g = -4.58 dB mW/g

WiFi 5.8 GHz band

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5745$ MHz; $\sigma = 6.156$ mho/m; $\epsilon_r = 46.764$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.58, 3.58, 3.58); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 3/Ch 149/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.443 mW/g


Rear 20 deg. tilt @ Edge 3/Ch 149/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 9.356 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.9360

SAR(1 g) = 0.315 mW/g; SAR(10 g) = 0.158 mW/g

Maximum value of SAR (measured) = 0.489 mW/g

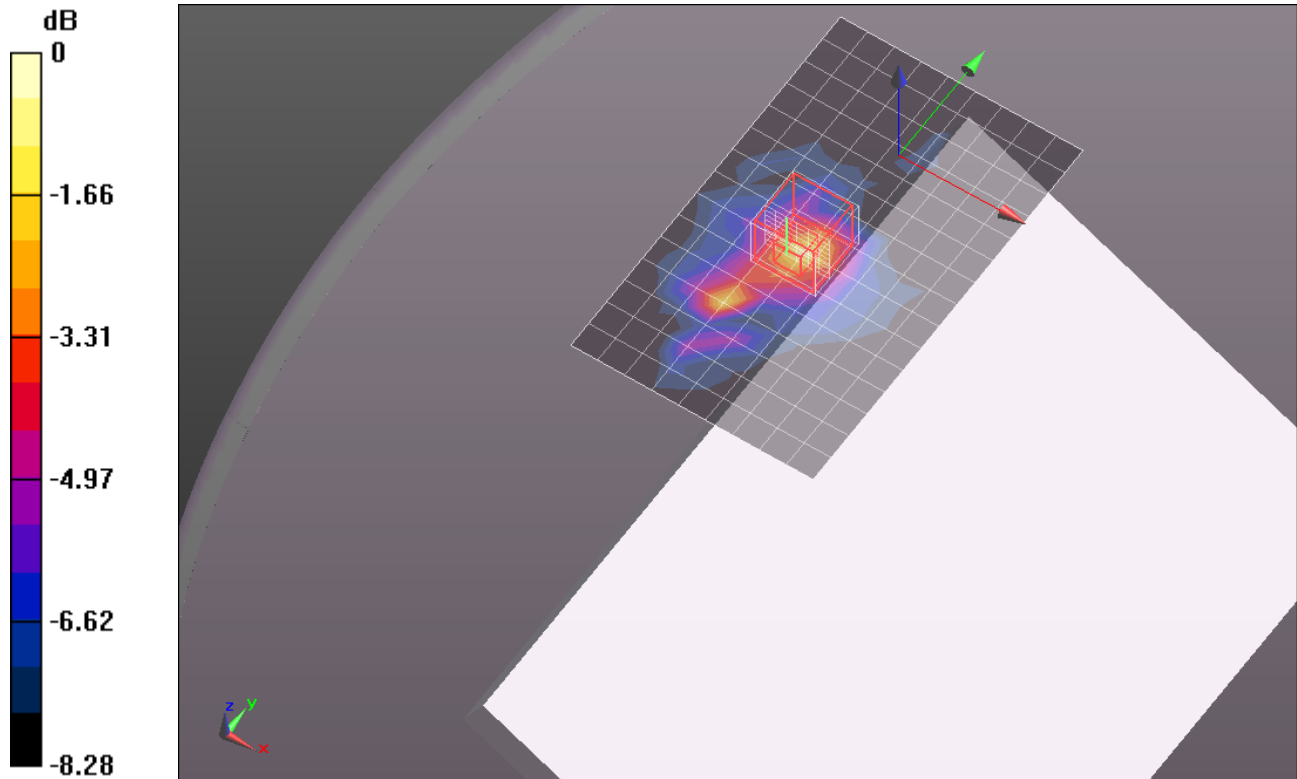

0 dB = 0.490mW/g = -6.20 dB mW/g

WiFi 5.8 GHz band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5785$ MHz; $\sigma = 6.204$ mho/m; $\epsilon_r = 46.658$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.58, 3.58, 3.58); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 3/Ch 157/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.524 mW/g


Rear 20 deg. tilt @ Edge 3/Ch 157/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 9.902 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.9730

SAR(1 g) = 0.316 mW/g; SAR(10 g) = 0.156 mW/g

Maximum value of SAR (measured) = 0.514 mW/g

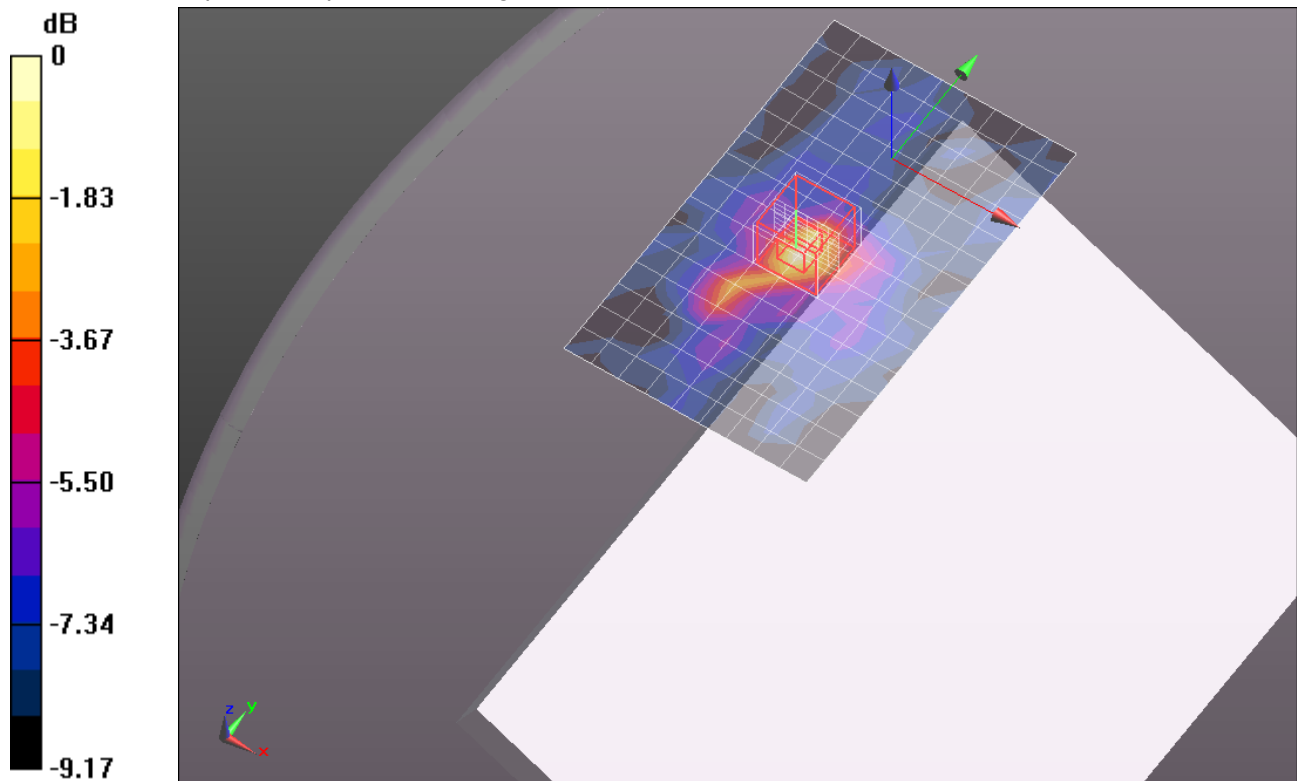

0 dB = 0.510mW/g = -5.85 dB mW/g

WiFi 5.8 GHz band

Frequency: 5825 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5825$ MHz; $\sigma = 6.286$ mho/m; $\epsilon_r = 46.585$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.58, 3.58, 3.58); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear 20 deg. tilt @ Edge 3/Ch 165/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.396 mW/g


Rear 20 deg. tilt @ Edge 3/Ch 165/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 8.999 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.3650

SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.172 mW/g

Maximum value of SAR (measured) = 0.575 mW/g

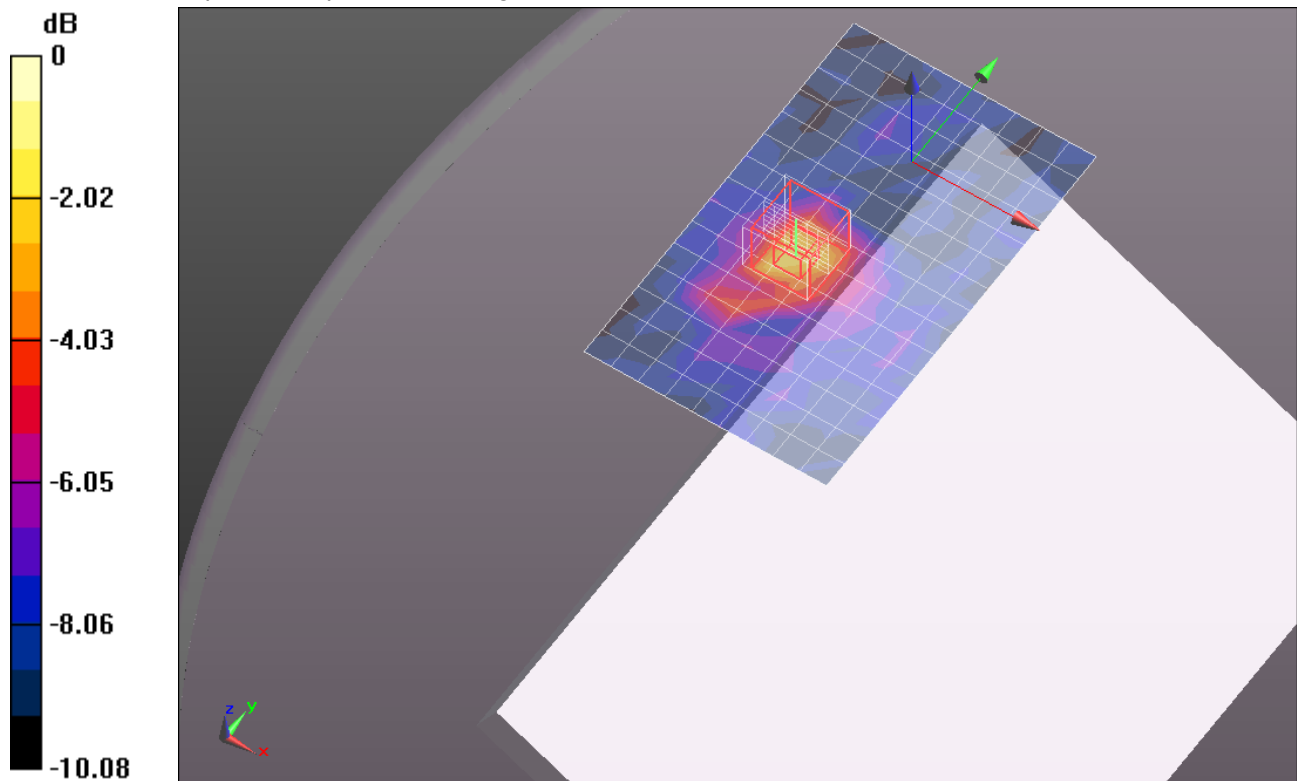

0 dB = 0.580mW/g = -4.73 dB mW/g

WiFi 5.8 GHz band

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5745$ MHz; $\sigma = 6.156$ mho/m; $\epsilon_r = 46.764$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.58, 3.58, 3.58); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 149/Area Scan (8x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.877 mW/g


Edge 3/Ch 149/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 12.764 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.3860

SAR(1 g) = 0.402 mW/g; SAR(10 g) = 0.139 mW/g

Maximum value of SAR (measured) = 0.866 mW/g

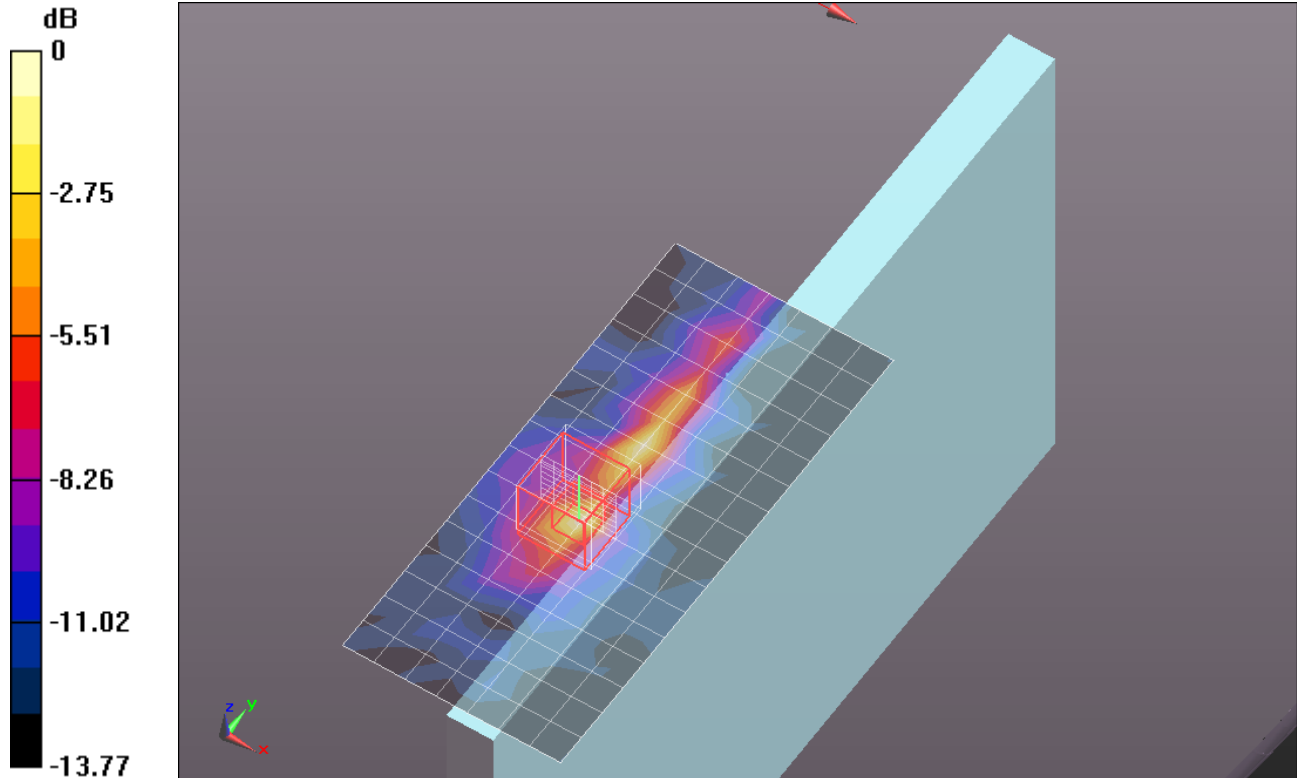

0 dB = 0.870mW/g = -1.21 dB mW/g

WiFi 5.8 GHz band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5785$ MHz; $\sigma = 6.204$ mho/m; $\epsilon_r = 46.658$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.58, 3.58, 3.58); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 157/Area Scan (8x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.882 mW/g


Edge 3/Ch 157/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 13.164 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.7840

SAR(1 g) = 0.427 mW/g; SAR(10 g) = 0.139 mW/g

Maximum value of SAR (measured) = 0.964 mW/g

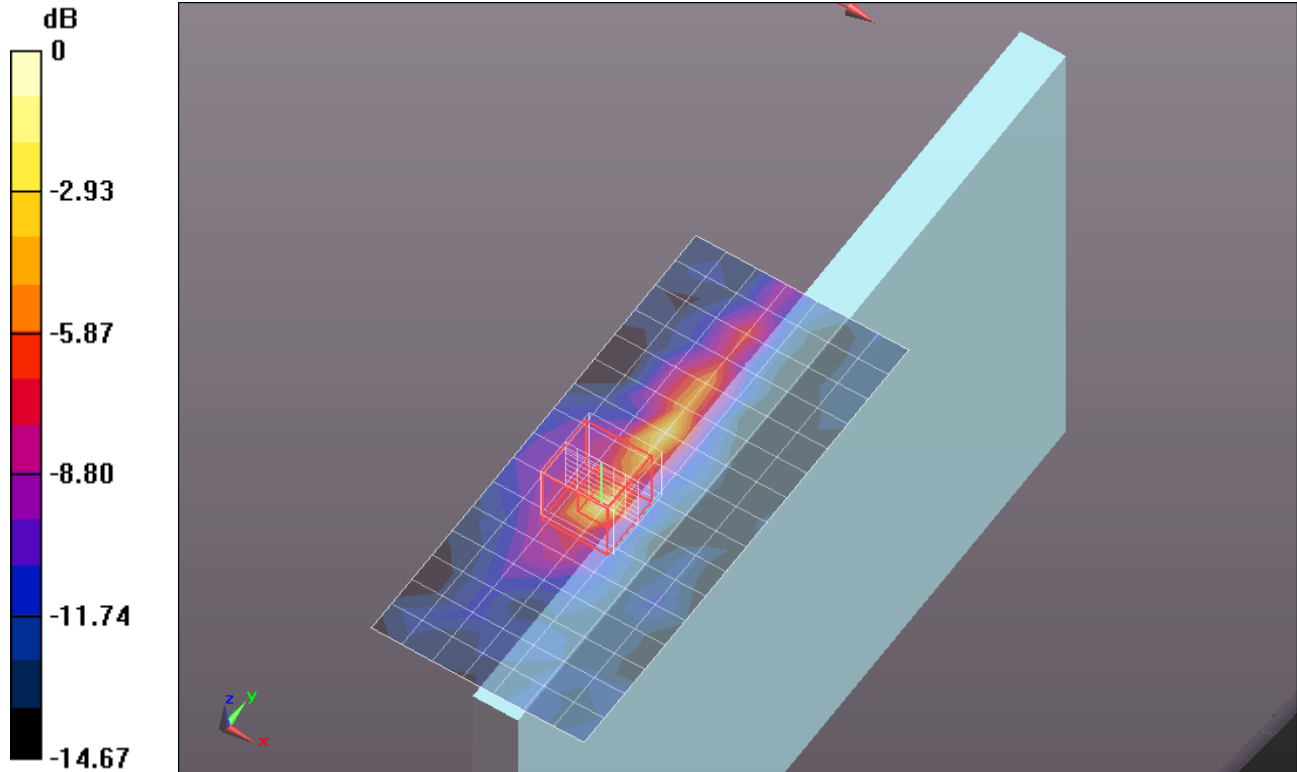

0 dB = 0.960mW/g = -0.35 dB mW/g

WiFi 5.8 GHz band

Frequency: 5825 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 25.0°C; Liquid Temperature: 24.0°C
Medium parameters used: $f = 5825$ MHz; $\sigma = 6.286$ mho/m; $\epsilon_r = 46.585$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(3.58, 3.58, 3.58); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/Ch 165/Area Scan (8x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.364 mW/g


Edge 3/Ch 165/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 14.521 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 3.8630

SAR(1 g) = 0.558 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 1.337 mW/g

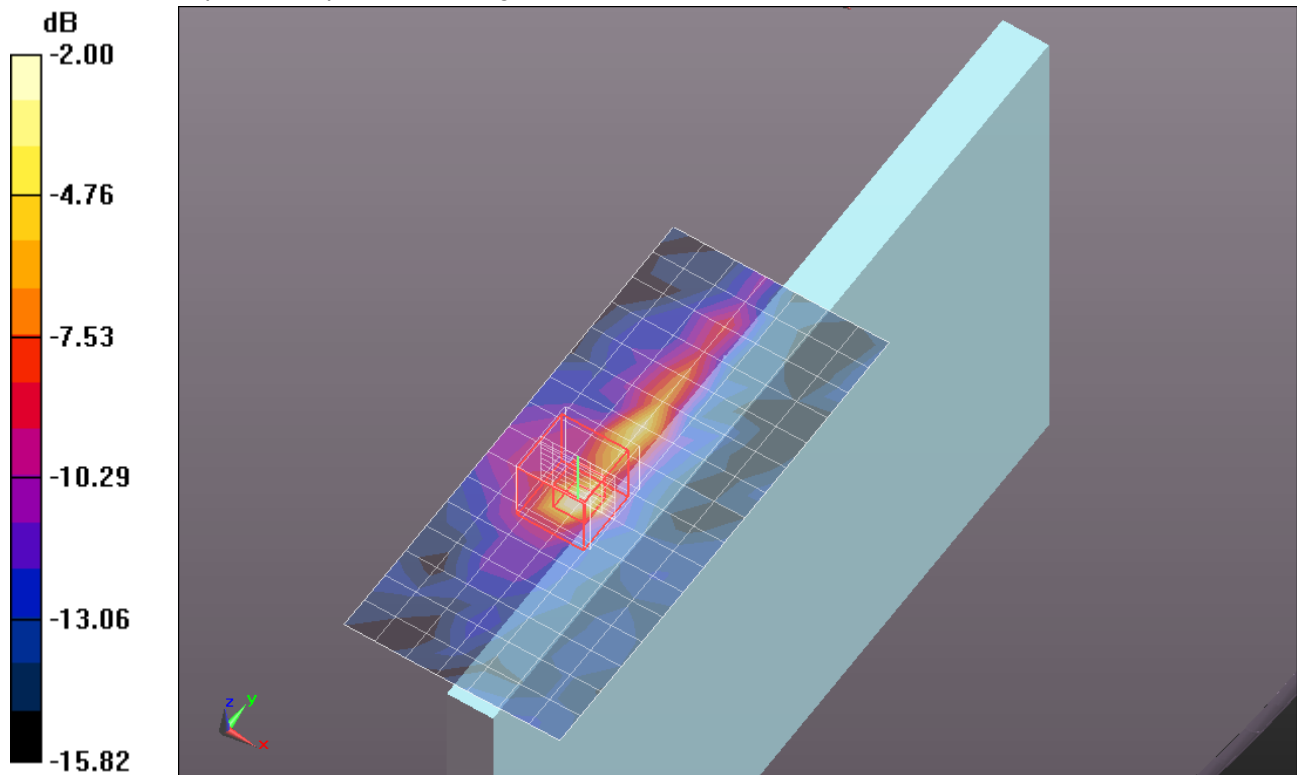

0 dB = 1.340mW/g = 2.54 dB mW/g

WiFi 5.8 GHz band

Frequency: 5825 MHz; Duty Cycle: 1:1

Edge 3/Ch 165/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 1.071 mW/g

