




FCC RADIO TEST REPORT

FCC ID : PU5-TP00139AM
Equipment : Notebook Computer
Brand Name : Lenovo
Model Name : TP00139A
Applicant : Wistron Corporation
21F, No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih Dist,
New Taipei City 221, Taiwan
Manufacturer : Lenovo PC HK Limited.
23/F, Lincoln House, Taikoo Place, 979 King's Road,
Quarry Bay, Hong Kong, P.R. China
Standard : FCC 47 CFR Part 2, 96

Equipment: Foxconn T99W175 tested inside of Lenovo Notebook Computer.

The product was received on Jan. 17, 2022 and testing was performed from Feb. 11, 2022 to Feb. 26, 2022. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Product Specification of Equipment Under Test	6
1.3 Modification of EUT	6
1.4 Testing Location	6
1.5 Applied Standards	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration	9
2.4 Frequency List of Low/Middle/High Channels.....	10
3 Conducted Test Items	12
3.1 Measuring Instruments.....	12
3.2 Conducted Output Power	13
3.3 EIRP	14
4 Radiated Test Items	15
4.1 Measuring Instruments.....	15
4.2 Test Setup	15
4.3 Test Result of Radiated Test.....	16
4.4 Radiated Spurious Emission	17
5 List of Measuring Equipment.....	18
6 Uncertainty of Evaluation	20
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG1D1645I	01	Initial issue of report	Mar. 02, 2022

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
-	§96.41	Peak-to-Average Ratio	-	See Note
3.3	§96.41	Effective Isotropic Radiated Power	Pass	-
-	§2.1049 §96.41	Occupied Bandwidth	-	See Note
-	§2.1051 §96.41	Conducted Band Edge Measurement	-	See Note
-	§2.1051 §96.41	Conducted Spurious Emission	-	See Note
-	§2.1055	Frequency Stability for Temperature & Voltage	-	See Note
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 8.85 dB at 28644.000 MHz

Note: The module (Model: T99W175) makes no difference after verifying output power, this report reuses test data from the module report.

Declaration of Conformity:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
- The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: William Chen

Report Producer: Vivian Hsu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer
Brand Name	Lenovo
Model Name	TP00139A
FCC ID	PU5-TP00139AM
Sample 1	EUT with AWAN Antenna
Sample 2	EUT with LUXSHARE-ICT Antenna
EUT supports Radios application	WCDMA/HSPA/LTE/5G NR/GNSS WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer.
2. Equipment: Foxconn T99W175 tested inside of Lenovo Notebook Computer.

WWAN Antenna Information				
MIMO 2 Antenna	Manufacturer	AWAN	Peak gain (dBi)	LTE Band 42: -0.76 LTE Band 48: -1.07
	Part number	SA30Y56105AA	Type	PIFA
	Manufacturer	LUXSHARE-ICT	Peak gain (dBi)	LTE Band 42: -0.90 LTE Band 48: -2.00
	Part number	SA30Y56104AA	Type	PIFA

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	LTE Band 42 : 3452.5 MHz ~ 3597.5 MHz LTE Band 48 : 3552.5 MHz ~ 3697.5 MHz
Rx Frequency	LTE Band 42 : 3452.5 MHz ~ 3597.5 MHz LTE Band 48 : 3552.5 MHz ~ 3697.5 MHz
Bandwidth	5 MHz / 10 MHz / 15 MHz / 20 MHz
Maximum Output Power to Antenna	MIMO 2 Antenna: LTE Band 42: 21.46 dBm LTE Band 48: 21.35 dBm LTE Band 48C: 21.67 dBm
Type of Modulation	QPSK / 16QAM / 64QAM

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333
Test Site No.	Sporton Site No.
	TH03-HY (TAF Code: 1190)
Test Engineer	Hao En Zhang
Temperature (°C)	22.3~24.5
Relative Humidity (%)	51.6~54.8
Remark	The Conducted test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010
Test Site No.	Sporton Site No.
	03CH12-HY
Test Engineer	Jack Cheng, Lance Chiang and Chuan Chu
Temperature (°C)	21.6~26.2
Relative Humidity (%)	56~68

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786



1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS Eqpt v01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	42	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	48	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
E.I.R.P.	42	-	-	v	v	v	v	v	v	v	v	Max. Power					
	48	-	-	v	v	v	v	v	v	v	v						
Radiated Spurious Emission	42						v	v				v			v	v	v
	48	-	-				v	v				v			v	v	v
Remark	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. All the radiated test cases were performed with Adapter 2.																

Test Items	Band	Bandwidth (MHz)										Modulation				RB #			Test Channel		
		20+20	20+15	15+20	20+10	10+20	20+5	5+20	15+15	15+10	10+15	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	48_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v	v	v	v	v	v	v
E.I.R.P.	48_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v	Max. Power					
Radiated Spurious Emission	48_CA	v										v				v			v	v	v
Remark	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. All the radiated test cases were performed with Adapter 2.																				

2.2 Connection Diagram of Test System

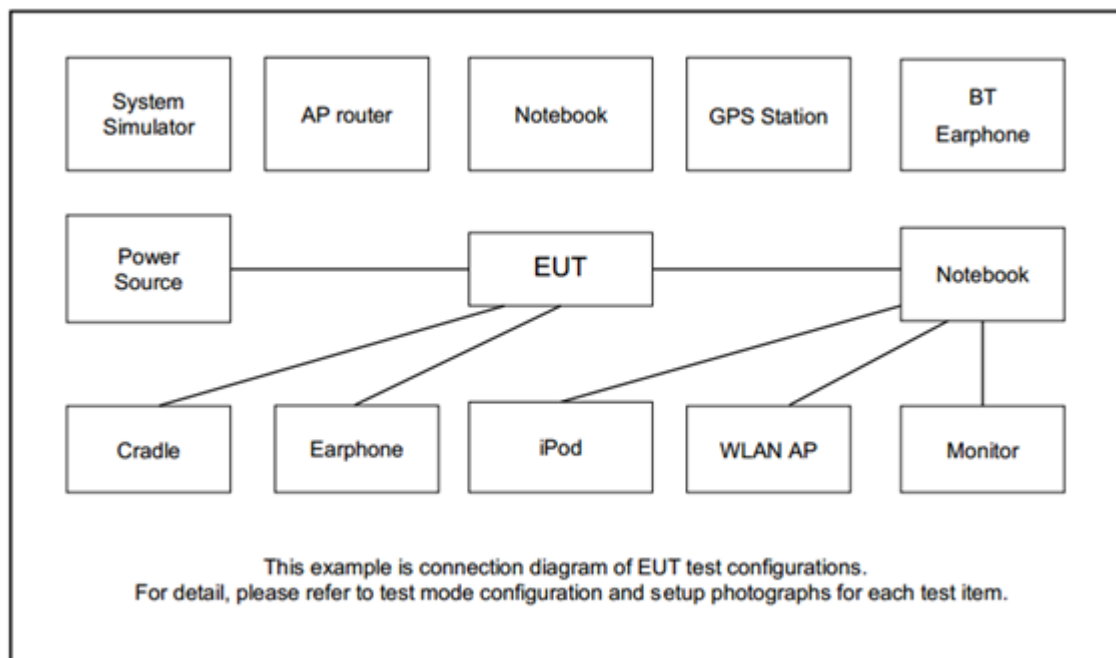

2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

2.4 Frequency List of Low/Middle/High Channels

LTE Band 42 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	43190	43340	43490
	Frequency	3560.0	3575.0	3590.0
15	Channel	43165	43340	43515
	Frequency	3557.5	3575.0	3592.5
10	Channel	43140	43340	43540
	Frequency	3555.0	3575.0	3595.0
5	Channel	43115	43340	43565
	Frequency	3552.5	3575.0	3597.5

LTE Band 48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	55340	55990	56640
	Frequency	3560.0	3625.0	3690.0
15	Channel	55315	55990	56665
	Frequency	3557.5	3625.0	3692.5
10	Channel	55290	55990	56690
	Frequency	3555.0	3625.0	3695.0
5	Channel	55265	55990	56715
	Frequency	3552.5	3625.0	3697.5

LTE Band 48C Channel and Frequency List_CA					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
5 + 20	PCC	Channel	55273	55898	56523
		Frequency	3553.3	3615.8	3678.3
	SCC	Channel	55390	56015	56640
		Frequency	3565	3627.5	3690
20 + 5	PCC	Channel	55340	55965	56590
		Frequency	3560	3622.5	3685
	SCC	Channel	55457	56082	56707
		Frequency	3571.7	3634.2	3696.7
10 + 20	PCC	Channel	55295	55896	56496
		Frequency	3555.5	3615.6	3675.6
	SCC	Channel	55439	56040	56640
		Frequency	3569.9	3630	3690
20 + 10	PCC	Channel	55340	55941	56541
		Frequency	3560	3620.1	3680.1
	SCC	Channel	55484	56085	56685
		Frequency	3574.4	3634.5	3694.5
15 + 20	PCC	Channel	55318	55893	56469
		Frequency	3557.8	3615.3	3672.9
	SCC	Channel	55489	56064	56640
		Frequency	3574.9	3632.4	3690
20 + 15	PCC	Channel	55340	55916	56491
		Frequency	3560	3617.6	3675.1
	SCC	Channel	55511	56087	56662
		Frequency	3577.1	3634.7	3692.2
20 + 20	PCC	Channel	55340	55891	56442
		Frequency	3560	3615.1	3670.2
	SCC	Channel	55538	56089	56640
		Frequency	3579.8	3634.9	3690

3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power



3.1.3 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power

3.2.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.3 EIRP

3.3.1 Description of the EIRP Measurement

The EIRP of mobile transmitters must not exceed 23 dBm /10 megahertz for LTE Band 48.

The testing follows ANSI C63.26-2015 Section 5.2.5.5

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

Device	Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
End User Device	23	n/a

Remark: Total channel power is complied with EIRP limit 23dBm/10MHz.

3.3.1 Test Procedures

The testing follows procedure in Section 5.2 of ANSI C63.26-2015 and KDB 940660 D01 Part 96 CBRS Eqpt v03 Section 3.2(b)(2)

Determine the EIRP by adding the effective antenna gain to the measured average conducted power level.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


For radiated test below 30MHz

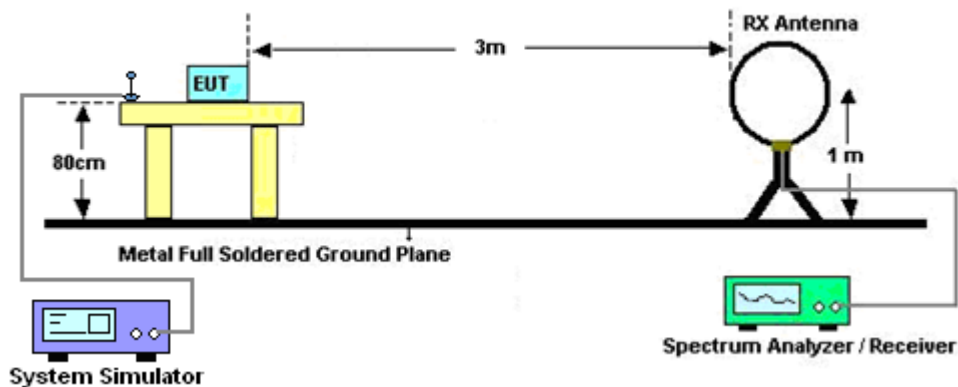


For radiated test from 30MHz to 1GHz

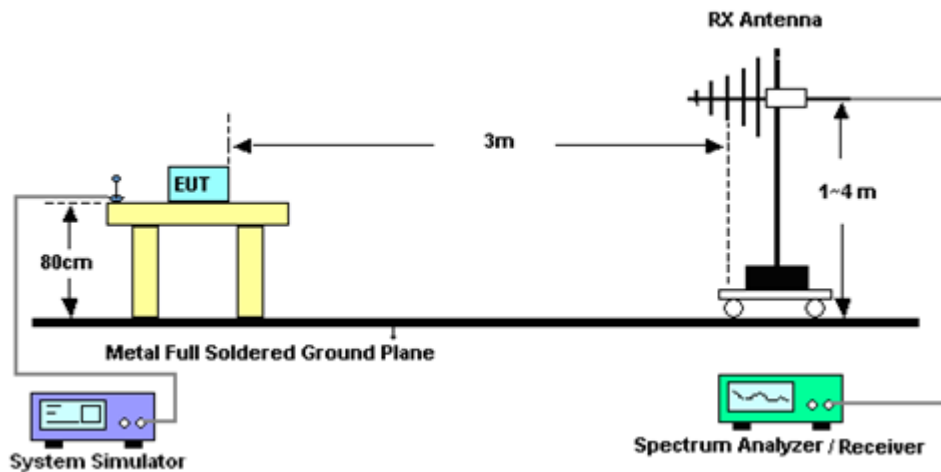

For radiated test from 1GHz to 18GHz

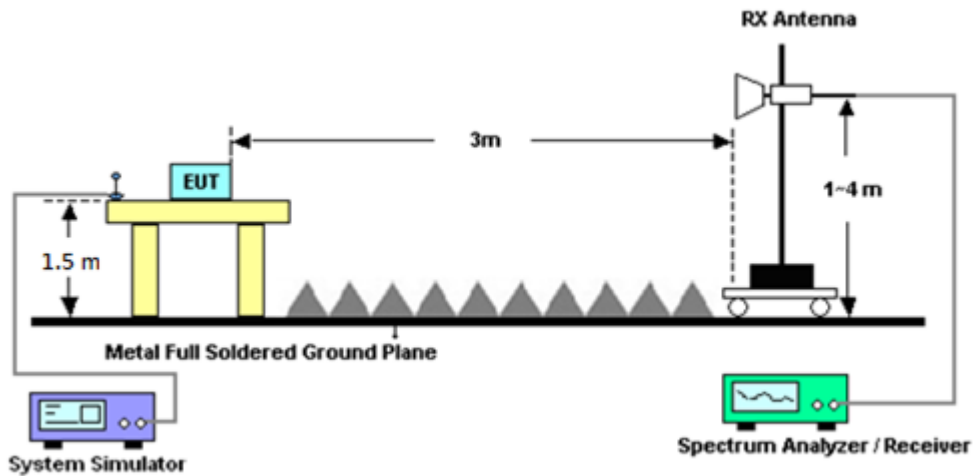

For radiated test above 18GHz

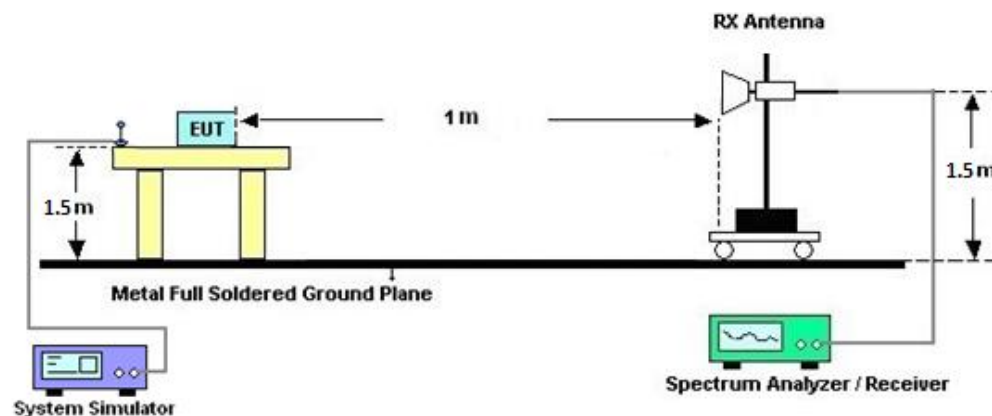

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
The limit line is -40dBm/MHz



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 07, 2021	Feb. 11, 2022~ Feb. 26, 2022	Sep. 06, 2022	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	37059 & 01	30MHz~1GHz	Oct. 09, 2021	Feb. 11, 2022~ Feb. 26, 2022	Oct. 08, 2022	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 09, 2021	Feb. 11, 2022~ Feb. 26, 2022	Oct. 08, 2022	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz~18GHz	Oct. 25, 2021	Feb. 11, 2022~ Feb. 26, 2022	Oct. 24, 2022	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1212	1GHz~18GHz	May 18, 2021	Feb. 11, 2022~ Feb. 26, 2022	May 17, 2022	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz~40GHz	Nov. 30, 2021	Feb. 11, 2022~ Feb. 26, 2022	Nov. 29, 2022	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz~40GHz	May 21, 2021	Feb. 11, 2022~ Feb. 26, 2022	May 20, 2022	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 24, 2021	Feb. 11, 2022~ Feb. 26, 2022	Mar. 23, 2022	Radiation (03CH12-HY)
Preamplifier	Aglient	8449B	3008A02375	1GHz~26.5GHz	May 25, 2021	Feb. 11, 2022~ Feb. 26, 2022	May 24, 2022	Radiation (03CH12-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18 G-56-01-A70	EC1900270	1GHz-18GHz	Dec. 27, 2021	Feb. 11, 2022~ Feb. 26, 2022	Dec. 26, 2022	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 22, 2021	Feb. 11, 2022~ Feb. 26, 2022	Jun. 21, 2022	Radiation (03CH12-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 15, 2021	Feb. 11, 2022~ Feb. 26, 2022	Oct. 14, 2022	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 22, 2021	Feb. 11, 2022~ Feb. 20, 2022	Feb. 21, 2022	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 21, 2022	Feb. 21, 2022~ Feb. 26, 2022	Feb. 20, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30MHz~40GHz	Feb. 22, 2021	Feb. 11, 2022~ Feb. 20, 2022	Feb. 21, 2022	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30MHz~40GHz	Feb. 21, 2022	Feb. 21, 2022~ Feb. 26, 2022	Feb. 20, 2023	Radiation (03CH12-HY)
Filter	Wainwright	WLKS1200-12 SS	SN2	1.2GHz Low Pass Filter	Mar. 17, 2021	Feb. 11, 2022~ Feb. 26, 2022	Mar. 16, 2022	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-1080 -1200-15000-6 OSS	SN1	1.2GHz High Pass Filter	Mar. 17, 2021	Feb. 11, 2022~ Feb. 26, 2022	Mar. 16, 2022	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 OST	SN2	3GHz High Pass Filter	Jul. 12, 2021	Feb. 11, 2022~ Feb. 26, 2022	Jul. 11, 2022	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP140349	N/A	Sep. 30, 2021	Feb. 11, 2022~ Feb. 26, 2022	Sep. 29, 2022	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 11, 2022~ Feb. 26, 2022	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Feb. 11, 2022~ Feb. 26, 2022	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Feb. 11, 2022~ Feb. 26, 2022	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Feb. 11, 2022~ Feb. 26, 2022	N/A	Radiation (03CH12-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Radio Communication Analyzer	Anritsu	MT8821C	6201664755	2/3/4G/LTE FDD/TDD with44)/LTE-3C C DLCA/2CC ULCA, CatM1/NB1/NB2	Jul. 21, 2021	Feb. 17, 2022~ Feb. 18, 2022	Jul. 20, 2022	Conducted (TH03-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#B	1-18GHz	Jan. 07, 2022	Feb. 17, 2022~ Feb. 18, 2022	Jan. 06, 2023	Conducted (TH03-HY)

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.10 dB
--	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.39 dB
--	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.34 dB
--	---------



Appendix A. Test Results of Conducted Test

Conducted Output Power (Average power & EIRP)

<MIMO 2 Antenna>

LTE Band 48 Maximum Average Power [dBm] (GT - LC = -1.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
20	1	0	QPSK	21.35	21.00	21.10	20.28	0.1067
20	1	49		21.33	20.92	21.02		
20	1	99		21.21	20.99	21.03		
20	50	0		20.39	20.01	20.20		
20	50	24		20.29	20.19	20.38		
20	50	50		20.38	20.17	20.11		
20	100	0		20.32	20.26	20.18		
20	1	0	16-QAM	20.53	19.92	20.31	19.46	0.0883
20	1	49		20.41	20.07	20.02		
20	1	99		20.16	20.10	20.00		
20	50	0		19.30	19.14	19.40		
20	50	24		19.46	19.25	19.01		
20	50	50		19.39	19.11	19.40		
20	100	0		19.19	19.03	19.05		
20	1	0	64-QAM	19.48	18.94	19.27	18.41	0.0693
20	1	49		19.16	18.89	19.33		
20	1	99		19.21	18.86	19.09		
20	50	0		18.30	18.20	18.01		
20	50	24		18.30	18.15	18.40		
20	50	50		18.51	18.04	18.06		
20	100	0		18.49	17.90	18.35		
20	1	0	256-QAM	16.49	16.23	16.57	15.57	0.0361
20	1	49		16.63	16.43	16.20		
20	1	99		16.59	16.30	16.57		
20	50	0		16.39	16.33	16.22		
20	50	24		16.64	16.05	16.40		
20	50	50		16.29	16.23	16.48		
20	100	0		16.36	16.19	16.24		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



LTE Band 48 Maximum Average Power [dBm] (GT - LC = -1.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
15	1	0	QPSK	21.32	21.17	21.09	20.25	0.1059
15	1	37		21.15	20.90	21.01		
15	1	74		21.02	21.02	20.94		
15	36	0		20.06	19.74	20.07		
15	36	20		20.25	20.09	20.22		
15	36	39		20.32	20.06	20.10		
15	75	0		20.15	19.99	19.99		
15	1	0	16-QAM	20.40	19.72	20.18	19.34	0.0859
15	1	37		20.41	19.79	19.93		
15	1	74		19.99	19.97	19.94		
15	36	0		19.20	18.92	19.35		
15	36	20		19.44	19.16	19.00		
15	36	39		19.32	18.95	19.32		
15	75	0		19.14	19.10	19.02		
15	1	0	64-QAM	19.44	18.77	19.14	18.37	0.0687
15	1	37		19.02	18.95	19.32		
15	1	74		19.03	18.91	19.06		
15	36	0		18.28	18.00	17.82		
15	36	20		18.26	17.95	18.25		
15	36	39		18.44	17.87	18.06		
15	75	0		18.49	18.00	18.22		
15	1	0	256-QAM	16.51	16.41	16.50	15.55	0.0359
15	1	37		16.62	16.39	16.23		
15	1	74		16.62	16.15	16.57		
15	36	0		16.39	16.11	16.15		
15	36	20		16.57	15.98	16.40		
15	36	39		16.31	16.18	16.51		
15	75	0		16.36	16.13	16.27		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



LTE Band 48 Maximum Average Power [dBm] (GT - LC = -1.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
10	1	0	QPSK	21.24	20.88	21.07	20.17	0.1040
10	1	25		21.17	21.02	20.89		
10	1	49		21.14	20.93	20.88		
10	25	0		20.18	19.79	20.04		
10	25	12		20.27	20.19	20.30		
10	25	25		20.34	19.96	19.95		
10	50	0		20.14	20.15	20.07		
10	1	0	16-QAM	20.43	19.73	20.19	19.36	0.0863
10	1	25		20.37	19.96	19.86		
10	1	49		20.07	19.96	19.86		
10	25	0		19.24	18.94	19.37		
10	25	12		19.42	19.11	19.00		
10	25	25		19.33	18.96	19.25		
10	50	0		19.11	19.05	18.97		
10	1	0	64-QAM	19.31	18.81	19.11	18.24	0.0667
10	1	25		19.03	19.04	19.30		
10	1	49		19.07	18.77	18.91		
10	25	0		18.22	18.14	17.87		
10	25	12		18.30	18.03	18.26		
10	25	25		18.48	18.02	17.99		
10	50	0		18.30	17.89	18.19		
10	1	0	256-QAM	16.50	16.30	16.48	15.58	0.0361
10	1	25		16.65	16.26	16.20		
10	1	49		16.55	16.15	16.54		
10	25	0		16.35	16.19	16.14		
10	25	12		16.54	16.09	16.37		
10	25	25		16.26	16.28	16.51		
10	50	0		16.31	16.10	16.24		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



LTE Band 48 Maximum Average Power [dBm] (GT - LC = -1.07 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
5	1	0	QPSK	21.19	20.89	21.08	20.25	0.1059
5	1	12		21.32	20.92	20.93		
5	1	24		21.01	20.83	20.99		
5	12	0		20.15	19.71	20.12		
5	12	7		20.09	20.19	20.31		
5	12	13		20.29	20.02	20.11		
5	25	0		20.09	19.93	20.13		
5	1	0	16-QAM	20.53	19.95	20.17	19.46	0.0883
5	1	12		20.31	19.89	19.84		
5	1	24		20.05	20.06	19.88		
5	12	0		19.10	19.14	19.32		
5	12	7		19.34	18.98	18.92		
5	12	13		19.35	19.05	19.25		
5	25	0		19.09	19.05	18.98		
5	1	0	64-QAM	19.47	18.79	19.09	18.40	0.0692
5	1	12		19.04	18.79	19.14		
5	1	24		19.15	18.73	18.89		
5	12	0		18.16	18.09	17.95		
5	12	7		18.14	17.91	18.33		
5	12	13		18.38	18.10	17.88		
5	25	0		18.43	17.86	18.24		
5	1	0	256-QAM	16.44	16.25	16.48	15.55	0.0359
5	1	12		16.62	16.37	16.20		
5	1	24		16.56	16.03	16.55		
5	12	0		16.30	16.20	16.13		
5	12	7		16.53	16.04	16.40		
5	12	13		16.29	16.10	16.51		
5	25	0		16.34	16.18	16.26		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



LTE Band 42 Maximum Average Power [dBm] (GT - LC = -0.76 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
20	1	0	QPSK	21.42	21.46	21.45	20.39	0.1094
20	1	49		21.29	21.34	21.44		
20	1	99		21.35	21.30	21.29		
20	50	0		20.56	20.62	20.41		
20	50	24		20.36	20.42	20.38		
20	50	50		20.42	20.50	20.25		
20	100	0		20.49	20.59	20.58		
20	1	0	16-QAM	20.28	20.53	20.50	19.51	0.0893
20	1	49		20.58	20.51	20.52		
20	1	99		20.48	20.56	20.46		
20	50	0		19.24	19.65	19.44		
20	50	24		19.46	19.46	19.34		
20	50	50		19.44	19.48	19.38		
20	100	0		19.30	19.50	19.59		
20	1	0	64-QAM	19.45	19.65	19.42	18.58	0.0721
20	1	49		19.41	19.50	19.49		
20	1	99		19.36	19.60	19.34		
20	50	0		18.39	18.61	18.38		
20	50	24		18.30	18.52	18.49		
20	50	50		18.48	18.53	18.57		
20	100	0		18.56	18.64	18.51		
20	1	0	256-QAM	16.39	16.86	16.61	15.79	0.0379
20	1	49		16.59	16.66	16.53		
20	1	99		16.65	16.61	16.52		
20	50	0		16.49	16.69	16.78		
20	50	24		16.59	16.85	16.61		
20	50	50		16.56	16.72	16.71		
20	100	0		16.55	16.73	16.55		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



LTE Band 42 Maximum Average Power [dBm] (GT - LC = -0.76 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
15	1	0	QPSK	21.32	21.27	21.37	20.30	0.1072
15	1	37		21.14	21.24	21.36		
15	1	74		21.16	21.17	21.29		
15	36	0		20.49	20.48	20.22		
15	36	20		20.27	20.42	20.44		
15	36	39		20.38	20.30	20.13		
15	75	0		20.39	20.19	20.55		
15	1	0	16-QAM	20.27	20.43	20.48	19.44	0.0879
15	1	37		20.39	20.46	20.51		
15	1	74		20.47	20.50	20.42		
15	36	0		19.15	19.63	19.34		
15	36	20		19.33	19.32	19.20		
15	36	39		19.42	19.38	19.20		
15	75	0		19.12	19.33	19.59		
15	1	0	64-QAM	19.36	19.46	19.39	18.53	0.0713
15	1	37		19.36	19.47	19.30		
15	1	74		19.36	19.60	19.24		
15	36	0		18.37	18.61	18.32		
15	36	20		18.25	18.34	18.39		
15	36	39		18.41	18.44	18.46		
15	75	0		18.48	18.51	18.49		
15	1	0	256-QAM	16.40	16.79	16.57	15.74	0.0375
15	1	37		16.59	16.68	16.46		
15	1	74		16.64	16.62	16.49		
15	36	0		16.50	16.68	16.77		
15	36	20		16.61	16.81	16.58		
15	36	39		16.49	16.65	16.65		
15	75	0		16.58	16.69	16.48		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



LTE Band 42 Maximum Average Power [dBm] (GT - LC = -0.76 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
10	1	0	QPSK	21.33	21.37	21.38	20.31	0.1074
10	1	25		21.27	21.25	21.24		
10	1	49		21.26	21.20	21.15		
10	25	0		20.36	20.55	20.24		
10	25	12		20.16	20.29	20.41		
10	25	25		20.27	20.32	20.08		
10	50	0		20.47	20.21	20.40		
10	1	0	16-QAM	20.08	20.38	20.36	19.50	0.0891
10	1	25		20.57	20.37	20.37		
10	1	49		20.45	20.39	20.46		
10	25	0		19.16	19.47	19.25		
10	25	12		19.30	19.30	19.34		
10	25	25		19.36	19.47	19.36		
10	50	0		19.26	19.50	19.57		
10	1	0	64-QAM	19.38	19.52	19.34	18.45	0.0700
10	1	25		19.40	19.41	19.48		
10	1	49		19.28	19.51	19.29		
10	25	0		18.25	18.46	18.20		
10	25	12		18.16	18.44	18.39		
10	25	25		18.34	18.47	18.49		
10	50	0		18.54	18.46	18.45		
10	1	0	256-QAM	16.36	16.81	16.55	15.75	0.0376
10	1	25		16.62	16.71	16.44		
10	1	49		16.67	16.61	16.48		
10	25	0		16.53	16.71	16.80		
10	25	12		16.57	16.82	16.59		
10	25	25		16.52	16.61	16.65		
10	50	0		16.51	16.70	16.42		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



LTE Band 42 Maximum Average Power [dBm] (GT - LC = -0.76 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
5	1	0	QPSK	21.31	21.42	21.29	20.35	0.1084
5	1	12		21.22	21.23	21.36		
5	1	24		21.31	21.10	21.19		
5	12	0		20.52	20.50	20.35		
5	12	7		20.24	20.38	20.46		
5	12	13		20.26	20.41	20.15		
5	25	0		20.49	20.10	20.47		
5	1	0	16-QAM	20.20	20.53	20.30	19.46	0.0883
5	1	12		20.44	20.43	20.36		
5	1	24		20.44	20.47	20.37		
5	12	0		19.16	19.64	19.26		
5	12	7		19.38	19.44	19.23		
5	12	13		19.37	19.36	19.21		
5	25	0		19.25	19.36	19.55		
5	1	0	64-QAM	19.34	19.65	19.30	18.58	0.0721
5	1	12		19.30	19.34	19.33		
5	1	24		19.19	19.53	19.27		
5	12	0		18.32	18.58	18.21		
5	12	7		18.27	18.52	18.41		
5	12	13		18.30	18.52	18.54		
5	25	0		18.36	18.60	18.46		
5	1	0	256-QAM	16.32	16.81	16.57	15.75	0.0376
5	1	12		16.59	16.74	16.39		
5	1	24		16.62	16.64	16.43		
5	12	0		16.55	16.71	16.82		
5	12	7		16.60	16.76	16.62		
5	12	13		16.47	16.64	16.65		
5	25	0		16.46	16.72	16.36		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



LTE Band 48C_CA Maximum Average Power [dBm] (GT - LC = 0.5 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
20+20	100	0	100	0	QPSK	20.08	20.04	19.83	22.17	0.1648
20+20	1	0	1	99		13.65	13.51	13.34		
20+20	1	99	1	0		21.67	21.51	21.39		
20+20	100	0	100	0	16-QAM	19.06	18.96	18.79	21.74	0.1493
20+20	1	0	1	99		14.15	14.03	13.87		
20+20	1	99	1	0		21.24	21.23	21.09		
20+20	100	0	100	0	64-QAM	19.03	18.95	18.78	20.44	0.1107
20+20	1	0	1	99		13.81	13.69	13.49		
20+20	1	99	1	0		19.94	19.82	19.66		
20+20	100	0	100	0	256-QAM	17.08	16.99	16.78	17.58	0.0573
20+20	1	0	1	99		13.82	13.74	13.56		
20+20	1	99	1	0		16.94	16.84	16.71		
20+15	100	0	75	0	QPSK	19.97	19.90	19.77	22.08	0.1614
20+15	1	0	1	74		13.50	13.47	13.32		
20+15	1	74	1	0		21.58	21.54	21.39		
20+15	100	0	75	0	16-QAM	18.92	18.86	18.73	21.68	0.1472
20+15	1	0	1	74		14.06	14.01	13.85		
20+15	1	74	1	0		21.17	21.18	21.08		
20+15	100	0	75	0	64-QAM	18.93	18.91	18.72	20.37	0.1089
20+15	1	0	1	74		13.74	13.64	13.46		
20+15	1	74	1	0		19.87	19.84	19.72		
20+15	100	0	75	0	256-QAM	16.99	16.92	16.79	17.49	0.0561
20+15	1	0	1	74		13.75	13.73	13.55		
20+15	1	74	1	0		16.88	16.86	16.76		
15+20	75	0	100	0	QPSK	20.02	19.92	19.98	22.16	0.1644
15+20	1	0	1	99		13.47	13.43	13.46		
15+20	1	74	1	0		21.58	21.50	21.66		
15+20	75	0	100	0	16-QAM	18.96	18.88	18.89	21.76	0.1500
15+20	1	0	1	99		14.04	13.97	13.99		
15+20	1	74	1	0		21.16	21.18	21.26		
15+20	75	0	100	0	64-QAM	18.97	18.89	18.94	20.38	0.1091
15+20	1	0	1	99		13.71	13.69	13.70		
15+20	1	74	1	0		19.87	19.85	19.88		
15+20	75	0	100	0	256-QAM	17.01	16.94	16.96	17.51	0.0564
15+20	1	0	1	99		13.67	13.70	13.78		
15+20	1	74	1	0		16.90	16.83	16.87		
Limit	EIRP < 23dBm/10MHz					Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



LTE Band 48C_CA Maximum Average Power [dBm] (GT - LC = 0.5 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
20+10	100	0	50	0	QPSK	19.95	19.98	19.80	22.17	0.1648
20+10	1	0	1	49		13.46	13.66	13.33		
20+10	1	99	1	0		21.55	21.67	21.42		
20+10	100	0	50	0	16-QAM	18.89	18.92	18.76	21.76	0.1500
20+10	1	0	1	49		14.03	14.11	13.92		
20+10	1	99	1	0		21.10	21.26	21.11		
20+10	100	0	50	0	64-QAM	18.84	18.98	18.76	20.42	0.1102
20+10	1	0	1	49		13.72	13.74	13.45		
20+10	1	99	1	0		19.77	19.92	19.82		
20+10	100	0	50	0	256-QAM	16.89	16.99	16.80	17.49	0.0561
20+10	1	0	1	49		13.69	13.77	13.58		
20+10	1	99	1	0		16.82	16.91	16.77		
10+20	50	0	100	0	QPSK	19.88	19.95	19.82	22.06	0.1607
10+20	1	0	1	99		13.31	13.69	13.35		
10+20	1	49	1	0		21.36	21.56	21.56		
10+20	50	0	100	0	16-QAM	18.72	18.76	18.66	21.63	0.1455
10+20	1	0	1	99		13.95	14.02	13.86		
10+20	1	49	1	0		21.02	21.13	21.05		
10+20	50	0	100	0	64-QAM	18.76	18.83	18.77	20.31	0.1074
10+20	1	0	1	99		13.66	13.66	13.42		
10+20	1	49	1	0		19.65	19.81	19.76		
10+20	50	0	100	0	256-QAM	16.71	16.82	16.75	17.32	0.0540
10+20	1	0	1	99		13.56	13.65	13.55		
10+20	1	49	1	0		16.44	16.76	16.74		
20+5	100	0	25	0	QPSK	19.94	19.90	19.86	22.06	0.1607
20+5	1	0	1	24		13.42	13.61	13.37		
20+5	1	99	1	0		21.53	21.56	21.56		
20+5	100	0	25	0	16-QAM	18.79	18.82	18.55	21.63	0.1455
20+5	1	0	1	24		13.96	14.02	13.69		
20+5	1	99	1	0		21.06	21.13	21.13		
20+5	100	0	25	0	64-QAM	18.75	18.77	18.82	20.38	0.1091
20+5	1	0	1	24		13.69	13.67	13.56		
20+5	1	99	1	0		19.72	19.82	19.88		
20+5	100	0	25	0	256-QAM	16.77	16.86	16.45	17.36	0.0545
20+5	1	0	1	24		13.56	13.71	13.56		
20+5	1	99	1	0		16.72	16.55	16.77		
Limit	EIRP < 23dBm/10MHz					Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.



LTE Band 48C_CA Maximum Average Power [dBm] (GT - LC = 0.5 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
5+20	25	0	100	0	QPSK	19.92	19.85	19.81	22.04	0.1600
5+20	1	0	1	99		13.44	13.44	13.36		
5+20	1	24	1	0		21.46	21.54	21.44		
5+20	25	0	100	0	16-QAM	18.88	18.76	18.76	21.67	0.1469
5+20	1	0	1	99		14.06	13.95	13.89		
5+20	1	24	1	0		21.17	21.16	21.13		
5+20	25	0	100	0	64-QAM	18.93	18.88	18.77	20.37	0.1089
5+20	1	0	1	99		13.74	13.64	13.49		
5+20	1	24	1	0		19.87	19.76	19.78		
5+20	25	0	100	0	256-QAM	16.78	16.82	16.82	17.32	0.0540
5+20	1	0	1	99		13.66	13.66	13.65		
5+20	1	24	1	0		16.46	16.74	16.77		
Limit	EIRP < 23dBm/10MHz					Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

Appendix B. Test Results of Radiated Test

<Sample 1>

LTE Band 42

LTE Band 42 / 20MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7100	-60.32	-40	-20.32	-55.82	-70.29	1.77	11.74	H
	10655	-58.69	-40	-18.69	-56.21	-67.12	2.47	10.90	H
	14205	-54.79	-40	-14.79	-57.57	-63.63	2.87	11.71	H
	21307	-55.37	-40	-15.37	-77.38	-72.09	1.98	18.70	H
	24857	-52.47	-40	-12.47	-77.43	-68.48	2.07	18.07	H
	28411	-50.75	-40	-10.75	-76.26	-68.00	2.32	19.56	H
									H
	7100	-57.52	-40	-17.52	-52.63	-67.49	1.77	11.74	V
	10655	-58.86	-40	-18.86	-56.12	-67.29	2.47	10.90	V
	14205	-55.15	-40	-15.15	-57.65	-63.99	2.87	11.71	V
	21307	-53.79	-40	-13.79	-75.67	-70.51	1.98	18.70	V
	24857	-50.79	-40	-10.79	-76.96	-66.80	2.07	18.07	V
	28411	-49.04	-40	-9.04	-76.37	-66.29	2.32	19.56	V
									V
Middle	7130	-59.82	-40	-19.82	-55.38	-69.72	1.79	11.69	H
	10700	-58.48	-40	-18.48	-56.07	-66.89	2.49	10.90	H
	14266	-55.00	-40	-15.00	-57.76	-63.70	2.86	11.56	H
	21396	-55.37	-40	-15.37	-77.16	-72.12	1.95	18.70	H
	24962	-52.73	-40	-12.73	-77.69	-68.89	2.08	18.24	H
	28522	-50.56	-40	-10.56	-75.97	-67.83	2.30	19.57	H
									H
	7130	-57.60	-40	-17.60	-52.8	-67.50	1.79	11.69	V
	10700	-58.80	-40	-18.80	-56.14	-67.21	2.49	10.90	V
	14266	-55.63	-40	-15.63	-57.99	-64.33	2.86	11.56	V
	21396	-53.84	-40	-13.84	-75.56	-70.59	1.95	18.70	V
	24962	-50.45	-40	-10.45	-76.57	-66.61	2.08	18.24	V
	28522	-48.89	-40	-8.89	-76.2	-66.16	2.30	19.57	V
									V



LTE Band 42 / 20MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Highest	7160	-59.60	-40	-19.60	-55.2	-69.44	1.81	11.64	H
	10745	-58.30	-40	-18.30	-55.97	-66.68	2.52	10.90	H
	14321	-55.36	-40	-15.36	-58.1	-63.93	2.86	11.43	H
	21485	-54.07	-40	-14.07	-75.64	-70.85	1.92	18.70	H
	25067	-51.83	-40	-11.83	-76.87	-68.13	2.09	18.39	H
	28644	-50.03	-40	-10.03	-75.41	-67.14	2.32	19.43	H
									H
	7160	-59.93	-40	-19.93	-55.21	-69.77	1.81	11.64	V
	10743	-57.97	-40	-17.97	-55.41	-66.35	2.52	10.90	V
	14321	-55.94	-40	-15.94	-58.16	-64.51	2.86	11.43	V
	21485	-53.76	-40	-13.76	-75.31	-70.54	1.92	18.70	V
	25067	-50.57	-40	-10.57	-76.78	-66.87	2.09	18.39	V
	28644	-48.85	-40	-8.85	-76.04	-65.96	2.32	19.43	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Sample 2>

LTE Band 48

LTE Band 48 / 20MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7100	-60.32	-40	-20.32	-55.82	-70.29	1.77	11.74	H
	10655	-58.77	-40	-18.77	-56.29	-67.20	2.47	10.90	H
	14205	-55.23	-40	-15.23	-58.01	-64.07	2.87	11.71	H
	21307	-54.84	-40	-14.84	-76.85	-71.56	1.98	18.70	H
	24859	-52.61	-40	-12.61	-77.57	-68.62	2.07	18.07	H
	28408	-52.44	-40	-12.44	-77.95	-69.68	2.32	19.56	H
									H
	7100	-60.67	-40	-20.67	-55.78	-70.64	1.77	11.74	V
	10655	-59.07	-40	-19.07	-56.32	-67.50	2.47	10.90	V
	14205	-55.58	-40	-15.58	-58.08	-64.42	2.87	11.71	V
	21307	-55.36	-40	-15.36	-77.24	-72.08	1.98	18.70	V
	24859	-51.50	-40	-11.50	-77.67	-67.51	2.07	18.07	V
	28408	-50.65	-40	-10.65	-77.98	-67.89	2.32	19.56	V
									V
Middle	7230	-60.00	-40	-20.00	-55.62	-69.69	1.84	11.53	H
	10848	-57.89	-40	-17.89	-55.74	-66.22	2.57	10.90	H
	14464	-55.95	-40	-15.95	-58.65	-64.18	2.85	11.09	H
	18077	-54.18	-40	-14.18	-72.32	-70.41	1.76	17.98	H
	21696	-54.17	-40	-14.17	-75.81	-70.96	1.99	18.78	H
	25314	-52.18	-40	-12.18	-77.52	-68.78	2.14	18.74	H
									H
	7230	-60.83	-40	-20.83	-56.19	-70.52	1.84	11.53	V
	10848	-58.38	-40	-18.38	-56.02	-66.71	2.57	10.90	V
	14462	-57.01	-40	-17.01	-58.89	-65.25	2.85	11.09	V
	18077	-54.98	-40	-14.98	-72.19	-71.21	1.76	17.98	V
	21696	-54.80	-40	-14.80	-76.43	-71.59	1.99	18.78	V
	25314	-51.04	-40	-11.04	-77.64	-67.64	2.14	18.74	V
									V



LTE Band 48 / 20MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Highest	7360	-54.81	-40	-14.81	-50.22	-64.22	1.91	11.32	H
	11045	-58.31	-40	-18.31	-56.55	-66.63	2.63	10.95	H
	14724	-54.07	-40	-14.07	-57.68	-62.87	2.91	11.72	H
	18399	-55.12	-40	-15.12	-73.59	-71.17	1.87	17.92	H
	22086	-55.08	-40	-15.08	-77.27	-71.87	2.08	18.87	H
	25770	-51.84	-40	-11.84	-77.94	-68.86	2.03	19.05	H
									H
	7360	-57.89	-40	-17.89	-53.11	-67.30	1.91	11.32	V
	11045	-58.72	-40	-18.72	-56.79	-67.04	2.63	10.95	V
	14724	-56.40	-40	-16.40	-58.34	-65.20	2.91	11.72	V
	18399	-56.61	-40	-16.61	-74.2	-72.66	1.87	17.92	V
	22086	-55.23	-40	-15.23	-77.42	-72.02	2.08	18.87	V
	25770	-50.56	-40	-10.56	-77.84	-67.58	2.03	19.05	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**LTE Band 48C**

LTE Band 48C / 20+20MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7140	-59.74	-40	-19.74	-55.31	-69.62	1.80	11.68	H
	10705	-58.78	-40	-18.78	-56.38	-67.18	2.50	10.90	H
	14279	-55.14	-40	-15.14	-57.89	-63.81	2.86	11.53	H
	21418	-54.76	-40	-14.76	-76.49	-71.51	1.95	18.70	H
	24981	-52.62	-40	-12.62	-77.58	-68.81	2.08	18.27	H
	28556	-52.28	-40	-12.28	-77.69	-69.50	2.31	19.53	H
									H
	7140	-59.63	-40	-19.63	-54.85	-69.51	1.80	11.68	V
	10705	-59.25	-40	-19.25	-56.61	-67.65	2.50	10.90	V
	14279	-55.88	-40	-15.88	-58.2	-64.55	2.86	11.53	V
	21418	-54.53	-40	-14.53	-76.2	-71.28	1.95	18.70	V
	24981	-51.58	-40	-11.58	-77.69	-67.77	2.08	18.27	V
	28556	-49.96	-40	-9.96	-77.24	-67.18	2.31	19.53	V
									V
Middle	7250	-58.42	-40	-18.42	-54.01	-68.07	1.86	11.50	H
	10870	-57.48	-40	-17.48	-55.36	-65.80	2.58	10.90	H
	14498	-55.24	-40	-15.24	-57.93	-63.39	2.85	11.00	H
	18122	-54.30	-40	-14.30	-72.49	-70.50	1.77	17.98	H
	21751	-54.66	-40	-14.66	-76.33	-71.45	2.01	18.80	H
	25370	-52.06	-40	-12.06	-77.47	-68.73	2.15	18.82	H
									H
	7250	-59.28	-40	-19.28	-54.62	-68.93	1.86	11.50	V
	10870	-57.78	-40	-17.78	-55.46	-66.10	2.58	10.90	V
	14498	-56.69	-40	-16.69	-58.48	-64.84	2.85	11.00	V
	18122	-55.07	-40	-15.07	-72.34	-71.27	1.77	17.98	V
	21751	-55.24	-40	-15.24	-76.9	-72.03	2.01	18.80	V
	25370	-50.92	-40	-10.92	-77.62	-67.59	2.15	18.82	V
									V



LTE Band 48C / 20+20MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Highest	7360	-55.00	-40	-15.00	-50.41	-64.41	1.91	11.32	H
	11040	-58.18	-40	-18.18	-56.4	-66.49	2.63	10.95	H
	14718	-54.66	-40	-14.66	-58.24	-63.45	2.91	11.70	H
	18399	-55.13	-40	-15.13	-73.6	-71.18	1.87	17.92	H
	22073	-54.91	-40	-14.91	-77.04	-71.70	2.08	18.87	H
	25758	-51.49	-40	-11.49	-77.56	-68.51	2.04	19.05	H
									H
	7360	-56.93	-40	-16.93	-52.15	-66.34	1.91	11.32	V
	11040	-58.61	-40	-18.61	-56.66	-66.92	2.63	10.95	V
	14718	-55.87	-40	-15.87	-57.81	-64.66	2.91	11.70	V
	18399	-56.08	-40	-16.08	-73.67	-72.13	1.87	17.92	V
	22073	-54.98	-40	-14.98	-77.11	-71.77	2.08	18.87	V
	25758	-50.58	-40	-10.58	-77.84	-67.60	2.04	19.05	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**LTE Band 42**

LTE Band 42 / 20MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	7100	-60.08	-40	-20.08	-55.58	-70.05	1.77	11.74	H
	10655	-58.96	-40	-18.96	-56.48	-67.39	2.47	10.90	H
	14205	-54.94	-40	-14.94	-57.72	-63.78	2.87	11.71	H
	21307	-54.70	-40	-14.70	-76.71	-71.42	1.98	18.70	H
	24857	-52.92	-40	-12.92	-77.88	-68.93	2.07	18.07	H
	28411	-52.65	-40	-12.65	-78.16	-69.90	2.32	19.56	H
									H
	7100	-59.66	-40	-19.66	-54.77	-69.63	1.77	11.74	V
	10655	-59.07	-40	-19.07	-56.33	-67.50	2.47	10.90	V
	14205	-55.35	-40	-15.35	-57.85	-64.19	2.87	11.71	V
	21307	-54.54	-40	-14.54	-76.42	-71.26	1.98	18.70	V
	24857	-51.75	-40	-11.75	-77.92	-67.76	2.07	18.07	V
	28411	-50.80	-40	-10.80	-78.13	-68.05	2.32	19.56	V
									V
									V
Middle	7130	-54.88	-40	-14.88	-55.88	-64.78	1.79	11.69	H
	10700	-55.02	-40	-15.02	-56.02	-63.43	2.49	10.90	H
	14266	-54.99	-40	-14.99	-57.75	-63.69	2.86	11.56	H
	21396	-54.76	-40	-14.76	-76.55	-71.51	1.95	18.70	H
	24962	-52.62	-40	-12.62	-77.58	-68.78	2.08	18.24	H
	28522	-52.23	-40	-12.23	-77.66	-69.50	2.30	19.57	H
									H
	7130	-60.81	-40	-20.81	-56.01	-70.71	1.79	11.69	V
	10700	-59.06	-40	-19.06	-56.4	-67.47	2.49	10.90	V
	14266	-55.13	-40	-15.13	-57.48	-63.83	2.86	11.56	V
	21396	-54.68	-40	-14.68	-76.39	-71.43	1.95	18.70	V
	24962	-51.27	-40	-11.27	-77.39	-67.43	2.08	18.24	V
	28522	-50.03	-40	-10.03	-77.34	-67.30	2.30	19.57	V
									V
									V



LTE Band 42 / 20MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Highest	7160	-60.26	-40	-20.26	-55.86	-70.10	1.81	11.64	H
	10745	-58.62	-40	-18.62	-56.29	-67.00	2.52	10.90	H
	14321	-55.66	-40	-15.66	-58.4	-64.23	2.86	11.43	H
	21485	-54.41	-40	-14.41	-75.98	-71.19	1.92	18.70	H
	25067	-52.75	-40	-12.75	-77.8	-69.05	2.09	18.39	H
	28644	-51.64	-40	-11.64	-77.02	-68.75	2.32	19.43	H
									H
	7160	-59.15	-40	-19.15	-54.43	-68.99	1.81	11.64	V
	10743	-58.44	-40	-18.44	-55.88	-66.82	2.52	10.90	V
	14321	-56.18	-40	-16.18	-58.4	-64.75	2.86	11.43	V
	21485	-54.35	-40	-14.35	-75.9	-71.13	1.92	18.70	V
	25067	-51.69	-40	-11.69	-77.9	-67.99	2.09	18.39	V
	28644	-49.67	-40	-9.67	-76.86	-66.78	2.32	19.43	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.