



FCC RADIO TEST REPORT

FCC ID : PU5-TP00168A
Equipment : Notebook Computer
Brand Name : Lenovo
Model Name : TP00168A,TP00168B
Applicant : Wistron Corporation
21F, No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih Dist, New
Taipei City 221,Taiwan
Manufacturer : Lenovo PC HK Limited.
23/F, Lincoln House, Taikoo Place, 979 King's Road,
Quarry Bay, Hong Kong, P.R. China
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

Equipment: Quectel EM061K-GL tested inside of Lenovo Notebook Computer.

The product was received on Feb. 14, 2025 and testing was performed from Feb. 26, 2025 to Mar. 12, 2025. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	6
1.1 Product Feature of Equipment Under Test	6
1.2 Product Specification of Equipment Under Test	7
1.3 Modification of EUT	7
1.4 Testing Location	8
1.5 Applicable Standards	9
2 Test Configuration of Equipment Under Test	10
2.1 Test Mode.....	10
2.2 Connection Diagram of Test System	11
2.3 Support Unit used in test configuration	11
2.4 Frequency List of Low/Middle/High Channels	11
3 Conducted Test Result	12
3.1 Measuring Instruments.....	12
3.2 Conducted Output Power and ERP/EIRP	13
4 Radiated Test Items	14
4.1 Measuring Instruments.....	14
4.2 Test Setup	14
4.3 Test Result of Radiated Test.....	15
4.4 Field Strength of Spurious Radiation Measurement	16
5 List of Measuring Equipment.....	17
6 Measurement Uncertainty	18
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG512519A	01	Initial issue of report	Mar. 18, 2025
FG512519A	02	Revise Test Mode This report is an updated version, replacing the report issued on Mar. 18, 2025.	May 06, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5)	Effective Radiated Power (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (WCDMA Band II)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
-	§24.232 (d)	Peak-to-Average Ratio	Pass	See Note
-	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	See Note
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	See Note
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	See Note
-	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	See Note
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	-
Remark: 1. For host device, Field Strength of Spurious Radiation, Effective Radiated Power and Equivalent Isotropic Radiated Power are verified and complies with the limit in this test report. 2. For host device, the Conducted Output Power is no difference after compared to module (Model: EM061K-GL)				

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The purpose of different model name is for marketing segmentation.

Reviewed by: Sheng Kuo**Report Producer: Mila Chen**

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer
Brand Name	Lenovo
Model Name	TP00168A,TP00168B
FCC ID	PU5-TP00168A
Sample 1	EUT with AWAN Antenna
Sample 2	EUT with Speed Antenna
Integrated WLAN Module	Brand Name: Intel Model Name: BE201D2W FCC ID: PD9BE201D2
Integrated WLAN Module	Brand Name: Intel Model Name: AX211D2W FCC ID: PD9AX211D2
Integrated NFC Module	Brand Name: Foxconn Model Name: T77H747 FCC ID: MCLT77H747
EUT supports Radios application	WCDMA/HSPA/LTE/GNSS/NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 WLAN 11be EHT20/ EHT40/EHT80/EHT160/EHT320 Bluetooth BR/EDR/LE

Remark:

1. The above EUT's information was declared by manufacturer.
2. Equipment: Quectel EM061K-GL tested inside of Lenovo Notebook Computer.
3. All the tests were performed with TP00168A.

WWAN Antenna Information				
Main Antenna	Manufacturer	AWAN	Peak gain (dBi)	WCDMA Band II: -2.54 WCDMA Band IV: -4.94 WCDMA Band V: -5.15
	Part number	025.902IY.0001	Type	PIFA
	Manufacturer	Speed	Peak gain (dBi)	WCDMA Band II: 0.90 WCDMA Band IV: 0.98 WCDMA Band V: -0.66
	Part number	025.902J9.0001	Type	PIFA

Remark: The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz
Rx Frequency	WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz
Maximum Output Power to Antenna	WCDMA: Band V: 23.81 dBm Band II: 23.63 dBm Band IV: 23.80 dBm
Type of Modulation	WCDMA: BPSK (Uplink) HSDPA: 64QAM (Downlink) HSUPA: QPSK (Uplink)

1.3 Modification of EUT

No modifications made to the EUT during the testing.



1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333
Test Site No.	Sporton Site No.
	TH03-HY
Test Engineer	Eric Wu
Temperature (°C)	19.6~21.6
Relative Humidity (%)	45.7~47.7

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010
Test Site No.	Sporton Site No.
	03CH23-HY (TAF Code: 3786)
Test Engineer	Leo Li, Karl Hou, and Lucifer Jiang
Temperature (°C)	19.4~21.1
Relative Humidity (%)	44.7~65.1
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

ISED Company Number: 4086B and 4086H

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in Tablet Type (three orthogonal axis (X: flat, Y: portrait, Z: landscape)) and Notebook Type, and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for WCDMA Band II


All modes, data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

Remark: All the radiated test cases were performed with Sample 2.

2.2 Connection Diagram of Test System

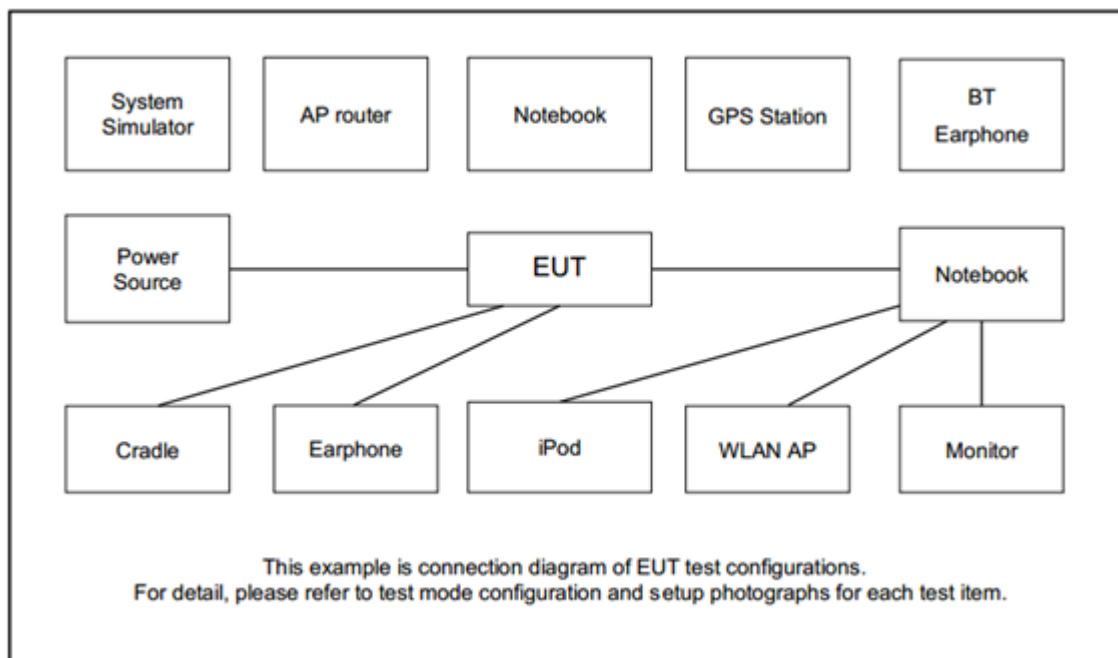

2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

2.4 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6

3 Conducted Test Result

3.1 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power



3.1.3 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port is connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.


4 Radiated Test Items

4.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

4.2 Test Setup


For radiated test below 30MHz

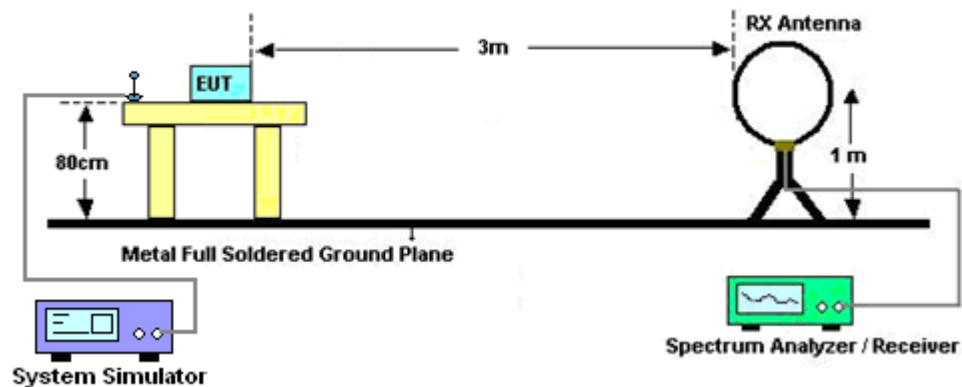


For radiated test from 30MHz to 1GHz

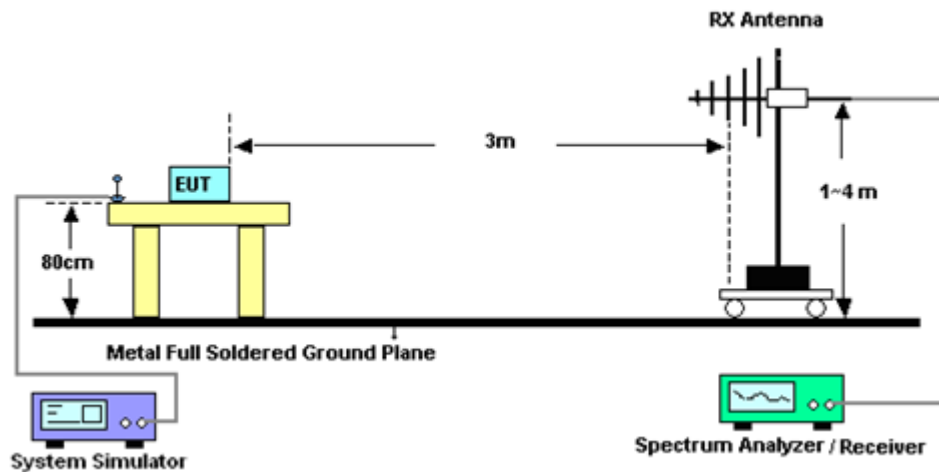

For radiated test from 1GHz to 18GHz

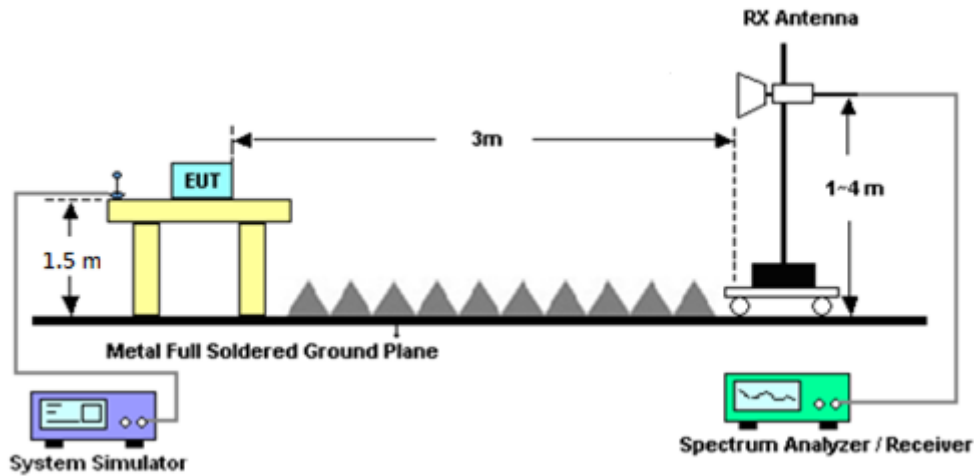

For radiated test above 18GHz

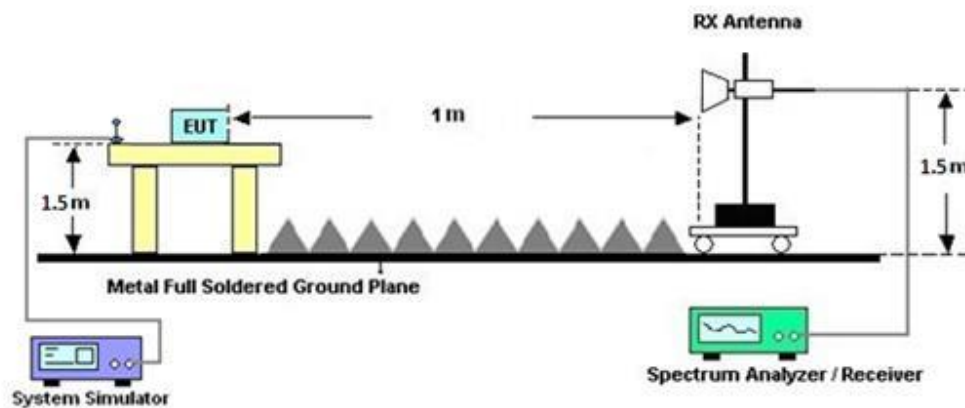

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT is placed on a rotatable wooden table 0.8 meters for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz above the ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the antenna tower.
3. The table is rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1 MHz, VBW = 3 MHz, taking record of maximum spurious emission.
6. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77,$$
where d is the distance at which field strength limit is specified in the rules
7. Field Strength Level (dBm) = Spectrum Reading (dBm) + Antenna Factor + Cable Loss + Read Level - Preamp Factor.
8. ERP (dBm) = EIRP (dBm) - 2.15
9. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Feb. 26, 2025~ Mar. 10, 2025	Aug. 28, 2025	Radiation (03CH23-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	62028 & 003	30MHz~1GHz	Nov. 27, 2024	Feb. 26, 2025~ Mar. 10, 2025	Nov. 26, 2025	Radiation (03CH23-HY)
Amplifier	SONOMA	310N	421582	9kHz~1GHz	Jul. 14, 2024	Feb. 26, 2025~ Mar. 10, 2025	Jul. 13, 2025	Radiation (03CH23-HY)
Amplifier	EMEC	EM01G18GA	060878	N/A	Sep. 27, 2024	Feb. 26, 2025~ Mar. 10, 2025	Sep. 26, 2025	Radiation (03CH23-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C05A18E N	1GHz~18GHz	Jun. 20, 2024	Feb. 26, 2025~ Mar. 10, 2025	Jun. 19, 2025	Radiation (03CH23-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	1225	18GHz~40GHz	Jun. 24, 2024	Feb. 26, 2025~ Mar. 10, 2025	Jun. 23, 2025	Radiation (03CH23-HY)
Preamplifier	EMEC	EM18G40G	060872	18GHz~40GHz	Nov. 29, 2024	Feb. 26, 2025~ Mar. 10, 2025	Nov. 28, 2025	Radiation (03CH23-HY)
Signal Analyzer	Keysight	N9010B	MY62170337	N/A	Aug. 21, 2024	Feb. 26, 2025~ Mar. 10, 2025	Aug. 20, 2025	Radiation (03CH23-HY)
Hygrometer	TECPEL	DTM-303B	TP211542	N/A	Oct. 21, 2024	Feb. 26, 2025~ Mar. 10, 2025	Oct. 20, 2025	Radiation (03CH23-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 26, 2025~ Mar. 10, 2025	N/A	Radiation (03CH23-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Feb. 26, 2025~ Mar. 10, 2025	N/A	Radiation (03CH23-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Feb. 26, 2025~ Mar. 10, 2025	N/A	Radiation (03CH23-HY)
Software	Audix	E3 6.09824_2019 122	RK-002348	N/A	N/A	Feb. 26, 2025~ Mar. 10, 2025	N/A	Radiation (03CH23-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 06, 2024	Feb. 26, 2025~ Mar. 04, 2025	Mar. 05, 2025	Radiation (03CH23-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 05, 2025	Mar. 05, 2025~ Mar. 10, 2025	Mar. 04, 2026	Radiation (03CH23-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804395/2	N/A	Nov. 26, 2024	Feb. 26, 2025~ Mar. 10, 2025	Nov. 25, 2025	Radiation (03CH23-HY)
RF Cable	EMC	EMC101Y	231115/2311 19/231122	N/A	Nov. 26, 2024	Feb. 26, 2025~ Mar. 10, 2025	Nov. 25, 2025	Radiation (03CH23-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~40GHz	Sep. 25, 2024	Mar. 12, 2025	Sep. 24, 2025	Conducted (TH03-HY)
DC Power Supply	GW Instek	GPE-2323	GEU871221	0V~64V ; 0A~6A	Apr. 09, 2024	Mar. 12, 2025	Apr. 08, 2025	Conducted (TH03-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 08, 2024	Mar. 12, 2025	Aug. 07, 2025	Conducted (TH03-HY)
Temperature & Humidity Cabinet Chamber	ESPEC	SH-641	92013720	-40℃~90℃	Sep. 06, 2024	Mar. 12, 2025	Sep. 05, 2025	Conducted (TH03-HY)
Hygrometer	TECPEL	DTM-303B	TP200886	N/A	Mar. 14, 2024	Mar. 12, 2025	Mar. 13, 2025	Conducted (TH03-HY)

6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 6 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.4 dB
---	--------

Uncertainty of Radiated Emission Measurement (6 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7 dB
---	--------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) & ERP / EIRP

WCDMA Band V Maximum Average Power [dBm] (GT - LC = -0.66 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	23.75	23.81	23.73	21.00	0.1259
HSDPA Subtest-1	22.74	22.79	22.76		
HSDPA Subtest-2	22.72	22.53	22.78		
HSDPA Subtest-3	22.24	22.24	22.24		
HSDPA Subtest-4	22.26	22.28	22.22		
HSUPA Subtest-1	22.74	22.72	22.69		
HSUPA Subtest-2	20.76	20.79	20.68		
HSUPA Subtest-3	21.69	21.71	21.70		
HSUPA Subtest-4	20.78	20.82	20.77		
HSUPA Subtest-5	22.72	22.62	22.62		
Limit	ERP < 7W			Result	Pass

WCDMA Band II Maximum Average Power [dBm] (GT - LC = 0.9 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2K	23.60	23.63	23.62	24.53	0.2838
HSDPA Subtest-1	22.63	22.80	22.96		
HSDPA Subtest-2	22.62	22.74	23.00		
HSDPA Subtest-3	22.14	22.26	22.43		
HSDPA Subtest-4	22.13	22.24	22.44		
HSUPA Subtest-1	22.65	22.77	22.93		
HSUPA Subtest-2	20.74	20.75	20.88		
HSUPA Subtest-3	21.62	21.82	21.90		
HSUPA Subtest-4	20.67	20.69	20.94		
HSUPA Subtest-5	22.61	22.71	22.81		
Limit	EIRP < 2W			Result	Pass

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = 0.98 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	23.76	23.80	23.63	24.78	0.3006
HSDPA Subtest-1	22.67	22.73	22.69		
HSDPA Subtest-2	22.70	22.70	22.65		
HSDPA Subtest-3	22.21	22.20	22.14		
HSDPA Subtest-4	22.16	22.16	22.12		
HSUPA Subtest-1	22.67	22.70	22.64		
HSUPA Subtest-2	20.64	20.74	20.68		
HSUPA Subtest-3	21.69	21.67	21.75		
HSUPA Subtest-4	20.73	20.68	20.69		
HSUPA Subtest-5	22.62	22.62	22.62		
Limit	EIRP < 1W			Result	Pass



Appendix B. Test Results of Radiated Test

B1. Summary of each worse mode

Mode	Part	Band	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	AmplCbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
13	Part 22H	WCDMA B5	H	2540	-33.05	RMS	27.00	-24.63	1.35	-95.23	58.46	-13.00	-20.05	V	Main
16	Part 24E	WCDMA B2	H	7630	-54.96	RMS	36.90	-23.40	2.00	-95.23	24.77	-13.00	-41.96	H	Main
3	Part 27L	WCDMA B4	L	5137	-48.65	RMS	32.80	-22.98	1.69	-95.23	35.07	-13.00	-35.65	V	Main




Main

Part 22H Mode 13

WCDMA B5 Ch4132

L

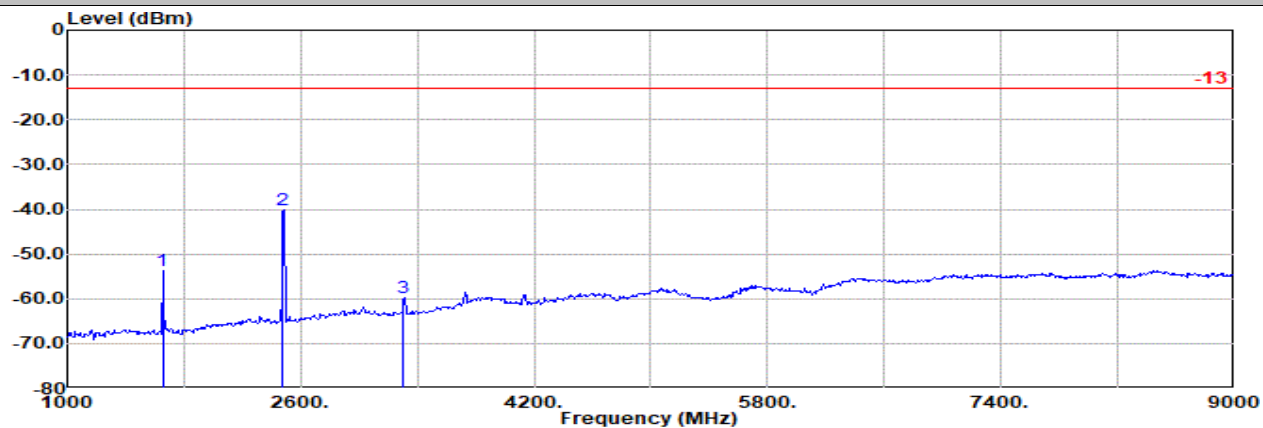


Site : 03CH23-HY

Condition: -13 3m DRH18-E_LE2C05A18EN_240620 Horizontal

: WCDMA Ch4132

	Freq MHz	Level dBm	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
				Factor	1						
1	1653.00	-53.76	RMS	24.77	-25.28	1.29	-95.23	40.69	-13.00	-40.76	Horizontal
2	2479.00	-40.04	RMS	26.80	-24.69	1.33	-95.23	51.75	-13.00	-27.04	Horizontal
3	3306.00	-59.89	RMS	28.21	-23.97	1.44	-95.23	29.66	-13.00	-46.89	Horizontal

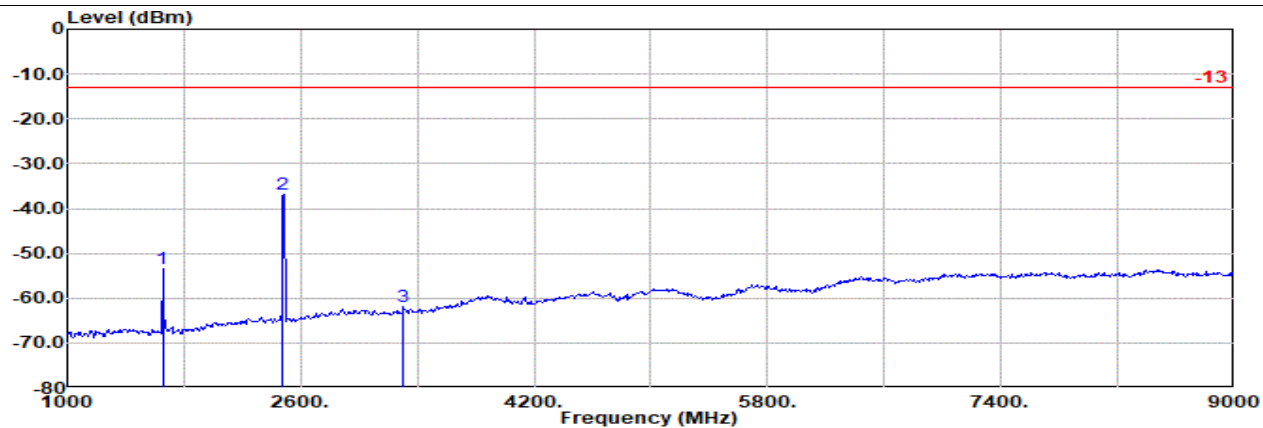

Site : 03CH23-HY

Condition: -13 3m DRH18-E_LE2C05A18EN_240620 Vertical

: WCDMA Ch4132

	Freq MHz	Level dBm	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
				Factor	1						
1	1653.00	-53.35	RMS	24.77	-25.28	1.29	-95.23	41.10	-13.00	-40.35	Vertical
2	2479.00	-36.81	RMS	26.80	-24.69	1.33	-95.23	54.98	-13.00	-23.81	Vertical
3	3306.00	-61.84	RMS	28.21	-23.97	1.44	-95.23	27.71	-13.00	-48.84	Vertical




Main

Part 22H Mode 13

WCDMA B5 Ch4182

M

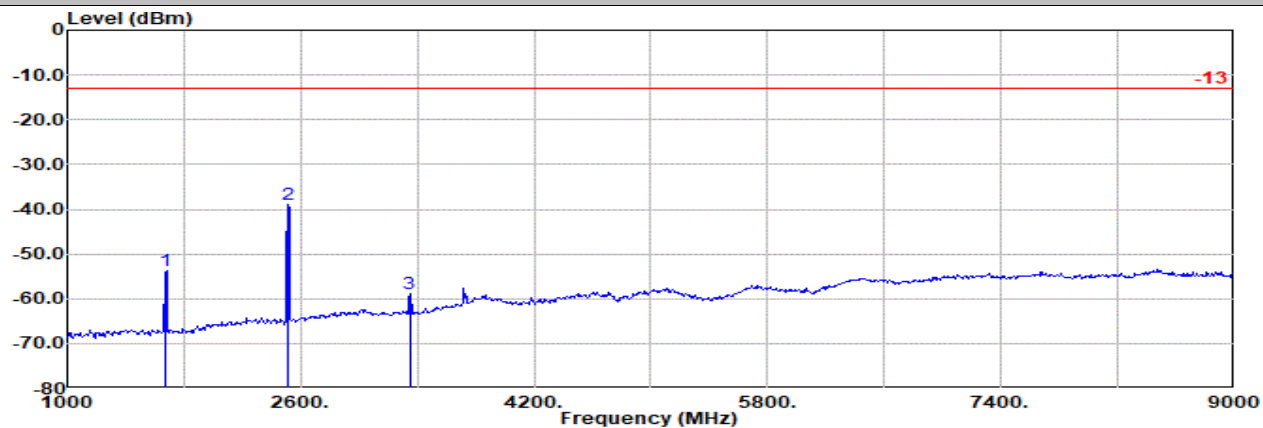


Site : 03CH23-HY

Condition: -13 3m DRH18-E_LE2C05A18EN_240620 Horizontal

: WCDMA Ch4182

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	1673.00	-53.84	RMS	24.86	-25.27	1.29	-95.23	40.51	-13.00	-40.84	Horizontal
2	2509.00	-38.88	RMS	26.90	-24.67	1.34	-95.23	52.78	-13.00	-25.88	Horizontal
3	3346.00	-58.80	RMS	28.29	-23.99	1.42	-95.23	30.71	-13.00	-45.80	Horizontal

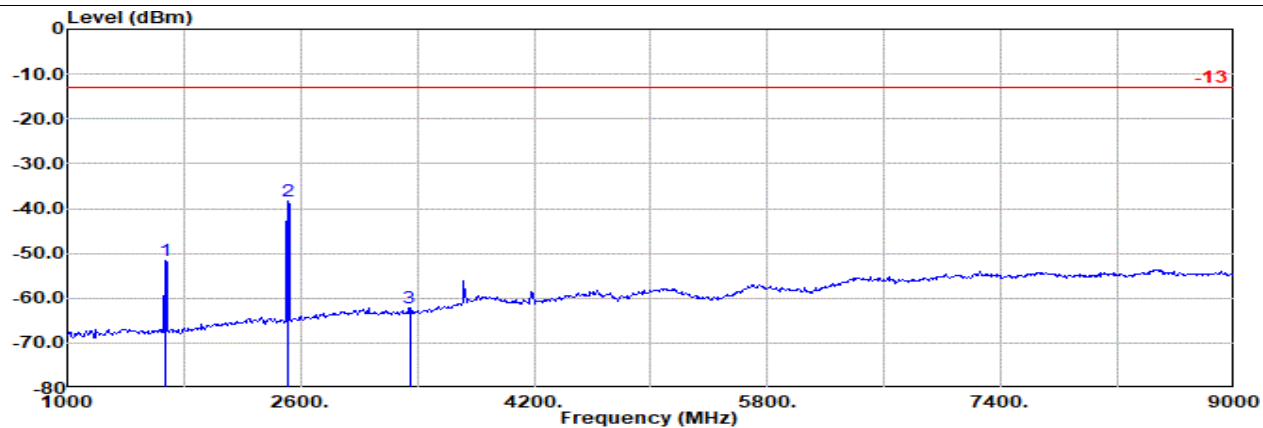

Site : 03CH23-HY

Condition: -13 3m DRH18-E_LE2C05A18EN_240620 Vertical

: WCDMA Ch4182

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	1673.00	-51.70	RMS	24.86	-25.27	1.29	-95.23	42.65	-13.00	-38.70	Vertical
2	2509.00	-38.46	RMS	26.90	-24.67	1.34	-95.23	53.20	-13.00	-25.46	Vertical
3	3346.00	-62.13	RMS	28.29	-23.99	1.42	-95.23	27.38	-13.00	-49.13	Vertical




Main

Part 22H Mode 13

WCDMA B5 Ch4233

H

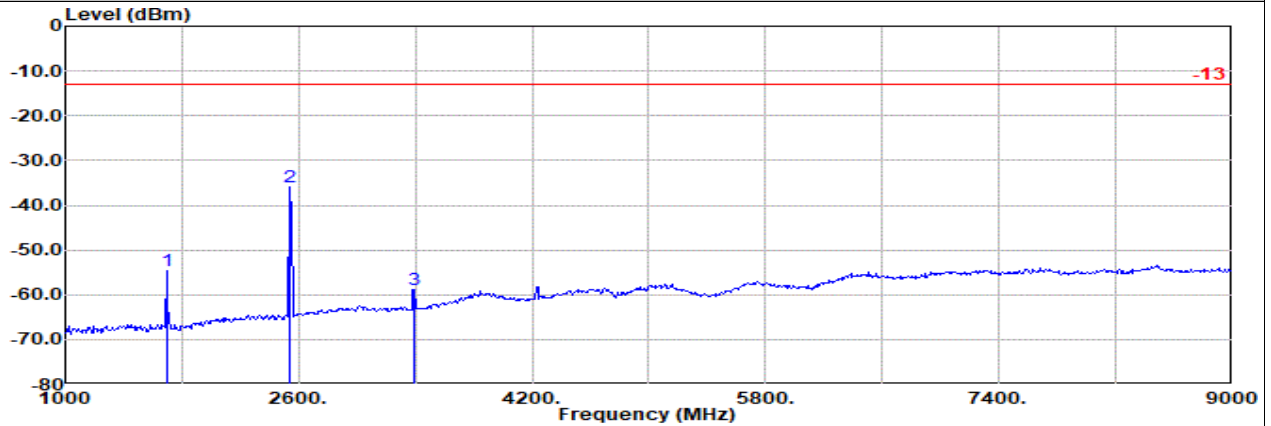


Site : 03CH23-HY

Condition: -13 3m DRH18-E_LE2C05A18EN_240620 Horizontal

: WCDMA Ch4233

	Freq MHz	Level dBm	Detector	Ant Amp\Cb		Filter dB	EIRPCF dB	Readin dBuV	Limit dBm	Margin dB	Pol
				Factor dB/m	1 dB						
1	1693.00	-54.72	RMS	24.94	-25.26	1.29	-95.23	39.54	-13.00	-41.72	Horizontal
2	2540.00	-35.90	RMS	27.00	-24.63	1.35	-95.23	55.61	-13.00	-22.90	Horizontal
3	3386.00	-58.72	RMS	28.44	-24.00	1.41	-95.23	30.66	-13.00	-45.72	Horizontal

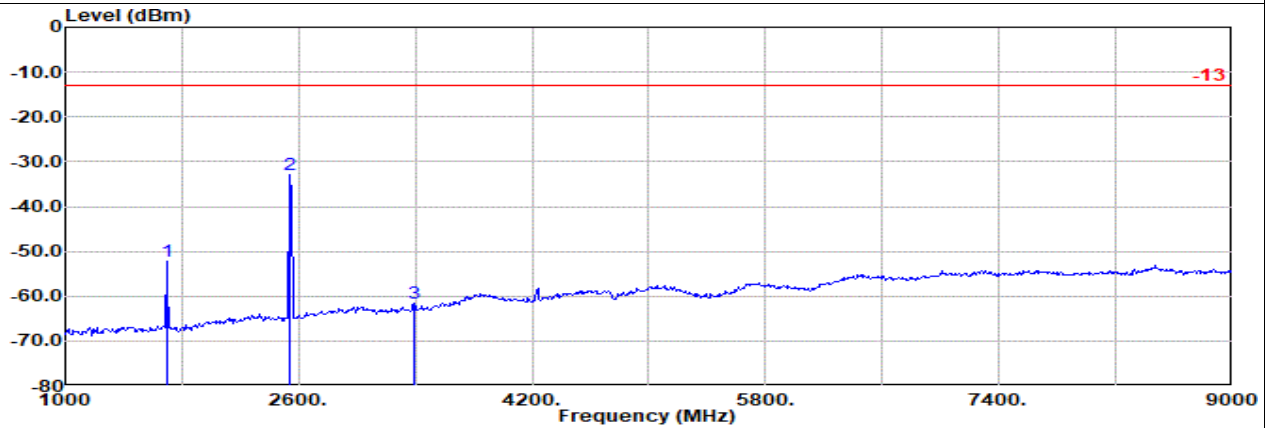

Site : 03CH23-HY

Condition: -13 3m DRH18-E_LE2C05A18EN_240620 Vertical

: WCDMA Ch4233

	Freq MHz	Level dBm	Detector	Ant Amp\Cb		Filter dB	EIRPCF dB	Readin dBuV	Limit dBm	Margin dB	Pol
				Factor dB/m	1 dB						
1	1693.00	-52.10	RMS	24.94	-25.26	1.29	-95.23	42.16	-13.00	-39.10	Vertical
2	2540.00	-33.05	RMS	27.00	-24.63	1.35	-95.23	58.46	-13.00	-20.05	Vertical
3	3386.00	-61.60	RMS	28.44	-24.00	1.41	-95.23	27.78	-13.00	-48.60	Vertical




Main

Part 24E Mode 16

WCDMA B2 Ch9262

L

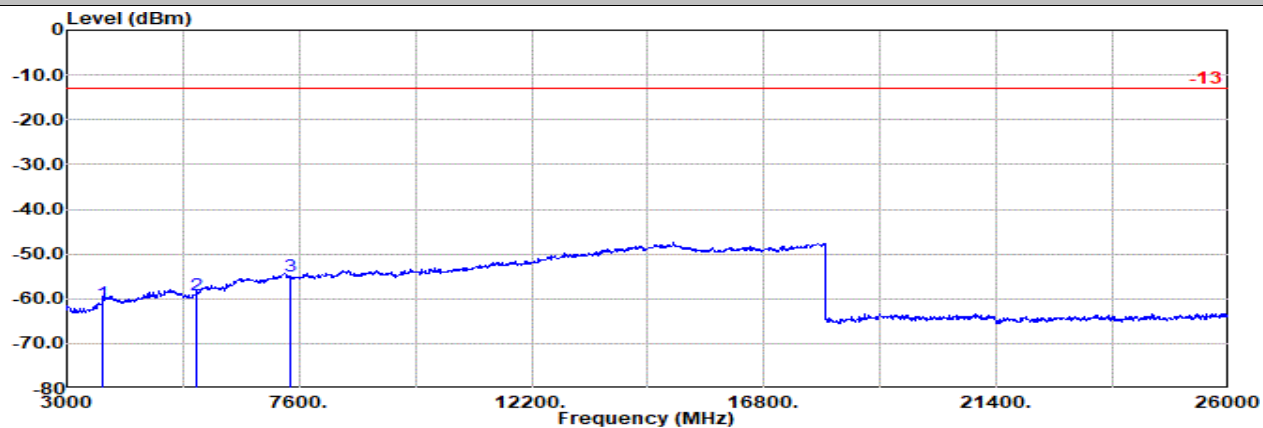


Site : 03CH23-HY

Condition: -13 3m DRH18-E_LE2C05A18EN_240620 Horizontal

: WCDMA II 9262

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3704.00	-60.94	RMS	29.94	-23.79	1.68	-95.23	0.00	-13.00	-47.94	Horizontal
2	5557.00	-59.25	RMS	33.03	-23.36	1.98	-95.23	24.33	-13.00	-46.25	Horizontal
3	7409.00	-55.07	RMS	37.20	-23.50	1.98	-95.23	24.48	-13.00	-42.07	Horizontal

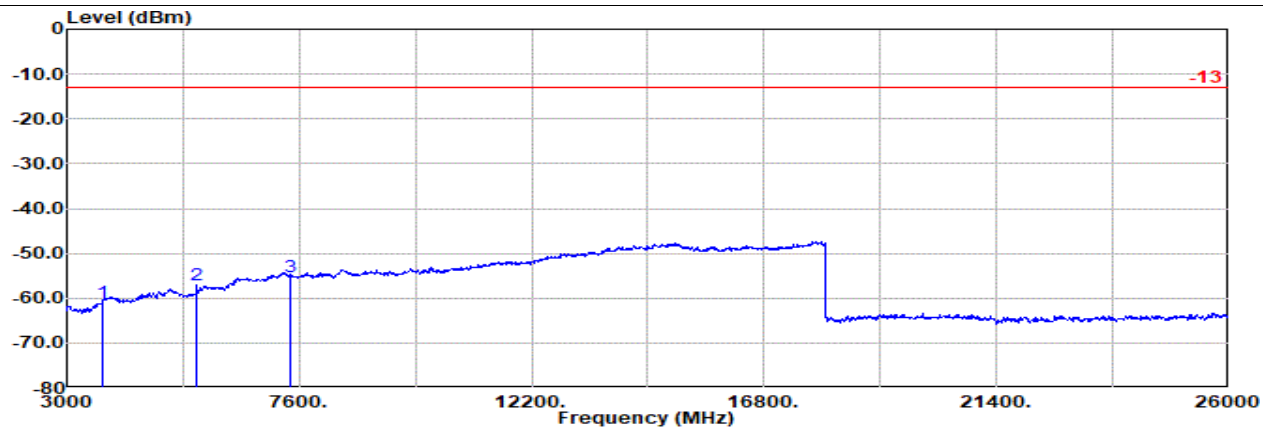

Site : 03CH23-HY

Condition: -13 3m DRH18-E_LE2C05A18EN_240620 Vertical

: WCDMA II 9262

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3704.00	-60.92	RMS	29.94	-23.79	1.68	-95.23	26.48	-13.00	-47.92	Vertical
2	5557.00	-57.20	RMS	33.03	-23.36	1.98	-95.23	26.38	-13.00	-44.20	Vertical
3	7409.00	-55.33	RMS	37.20	-23.50	1.98	-95.23	24.22	-13.00	-42.33	Vertical




Main

Part 24E Mode 16

WCDMA B2 Ch9400

M

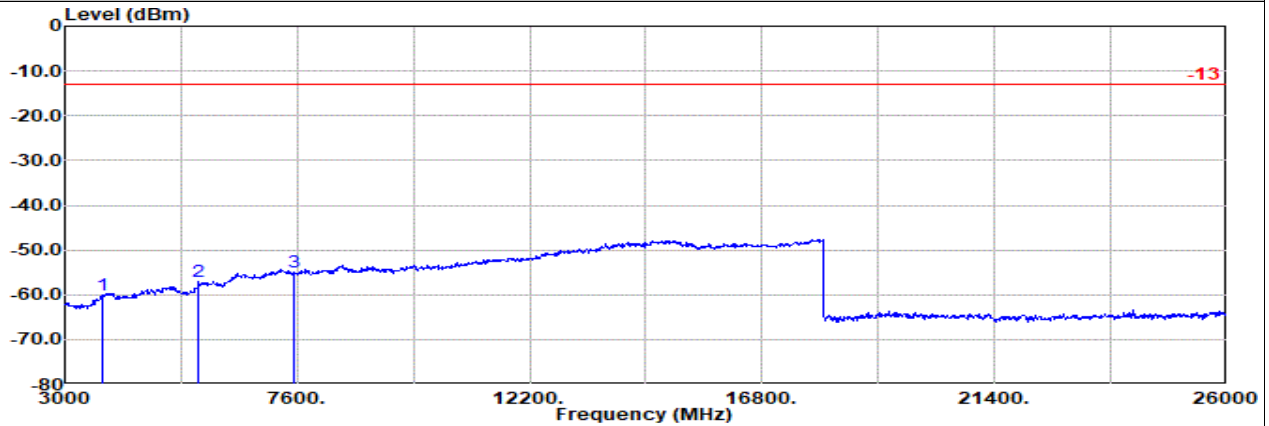


Site : 03CH23-HY

Condition: -13 3m DRH18-E_LE2C05A18EN_240620 Horizontal

: WCDMA II 9400

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3760.00	-60.00	RMS	30.42	-23.73	1.67	-95.23	26.87	-13.00	-47.00	Horizontal
2	5640.00	-57.12	RMS	33.44	-23.27	2.04	-95.23	25.90	-13.00	-44.12	Horizontal
3	7520.00	-55.01	RMS	36.96	-23.41	1.99	-95.23	24.68	-13.00	-42.01	Horizontal

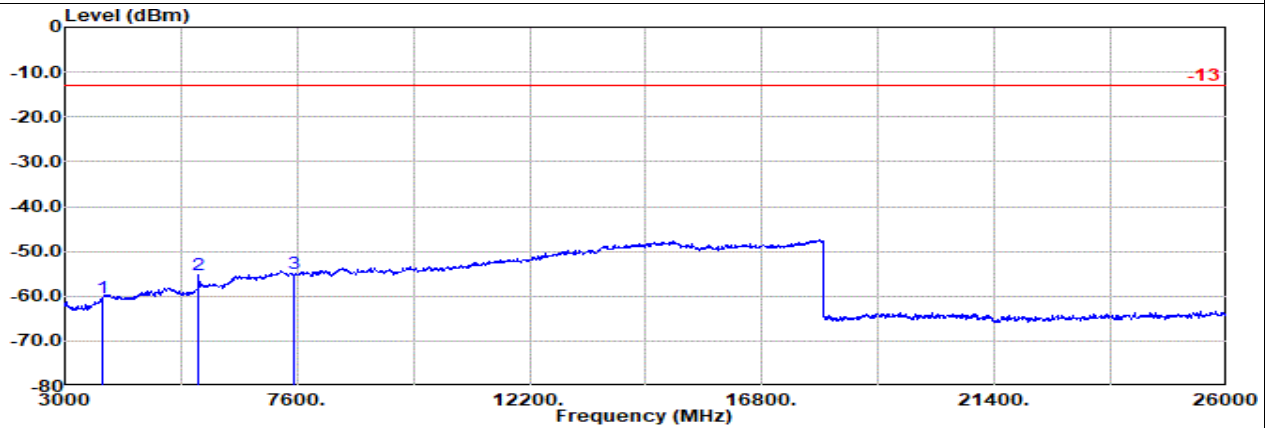

Site : 03CH23-HY

Condition: -13 3m DRH18-E_LE2C05A18EN_240620 Vertical

: WCDMA II 9400

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3760.00	-60.40	RMS	30.42	-23.73	1.67	-95.23	26.47	-13.00	-47.40	Vertical
2	5640.00	-55.24	RMS	33.44	-23.27	2.04	-95.23	27.78	-13.00	-42.24	Vertical
3	7520.00	-55.09	RMS	36.96	-23.41	1.99	-95.23	24.60	-13.00	-42.09	Vertical




Main

Part 24E Mode 16

WCDMA B2 Ch9538

H

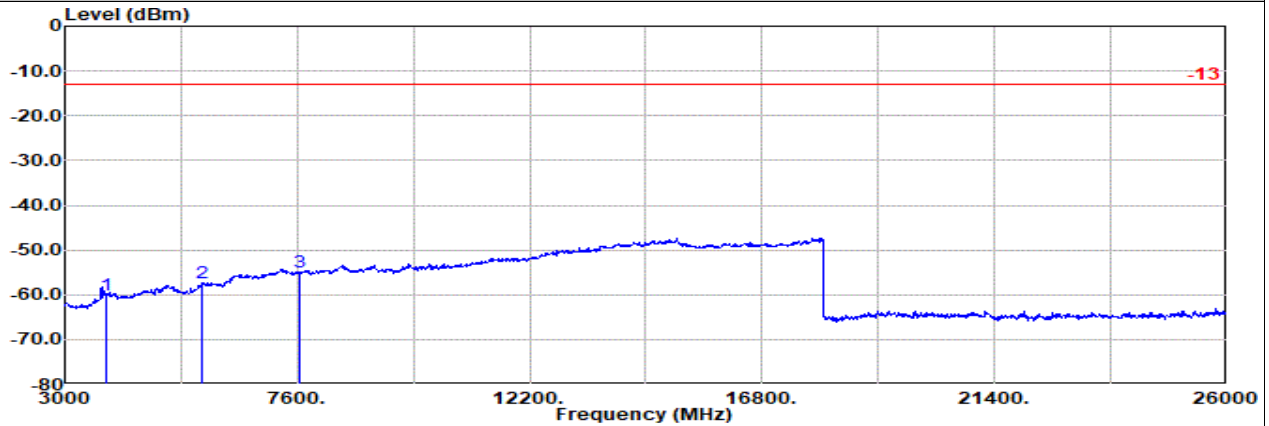


Site : 03CH23-HY

Condition: -13 3m DRH18-E_LE2C05A18EN_240620 Horizontal

: WCDMA II 9538

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1			g			
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3815.00	-60.04	RMS	30.62	-23.67	1.67	-95.23	26.57	-13.00	-47.04	Horizontal
2	5722.00	-57.31	RMS	33.84	-23.25	2.17	-95.23	25.16	-13.00	-44.31	Horizontal
3	7630.00	-54.96	RMS	36.90	-23.40	2.00	-95.23	24.77	-13.00	-41.96	Horizontal

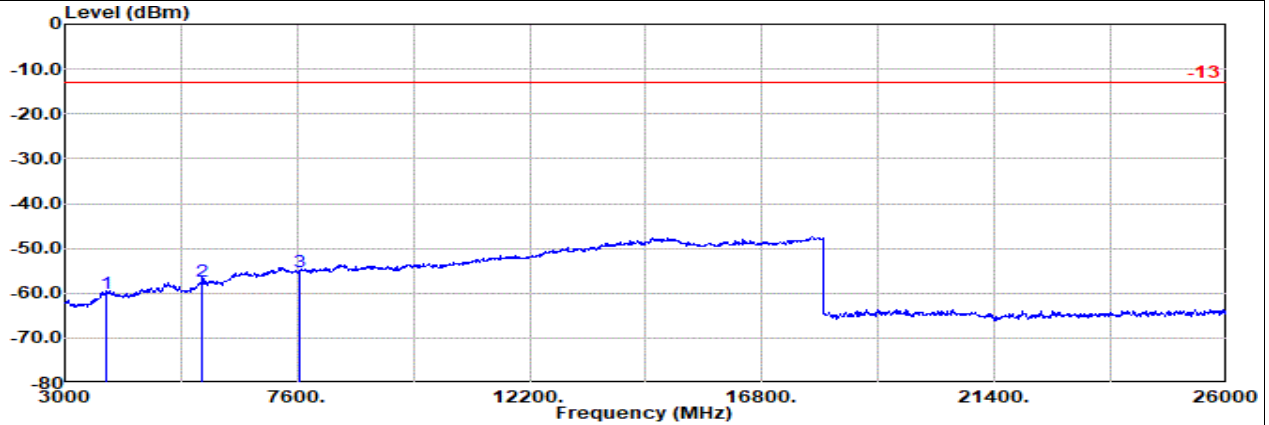

Site : 03CH23-HY

Condition: -13 3m DRH18-E_LE2C05A18EN_240620 Vertical

: WCDMA II 9538

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1			g			
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3815.00	-60.19	RMS	30.62	-23.67	1.67	-95.23	26.42	-13.00	-47.19	Vertical
2	5722.00	-57.49	RMS	33.84	-23.25	2.17	-95.23	24.98	-13.00	-44.49	Vertical
3	7630.00	-55.38	RMS	36.90	-23.40	2.00	-95.23	24.35	-13.00	-42.38	Vertical




Main

Part 27L Mode 3

WCDMA B4 Ch1312

L

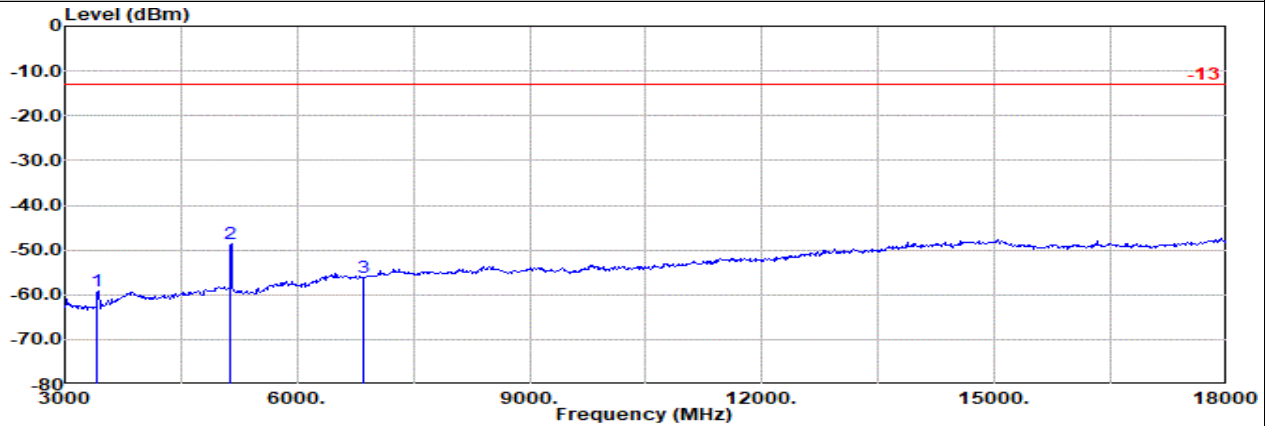


Site : 03CH23-HY

Condition: -13 3m DRH18-E_LE2C05A18EN_240620 Horizontal

: WCDMA Ch1312

	Freq MHz	Level dBm	Detector	Ant Amp\Cb		Filter dB	EIRPCF dB	Readin dBuV	Limit dBm	Margin dB	Pol
				Factor dB/m	1 dB						
1	3424.00	-59.07	RMS	28.60	-24.01	1.89	-95.23	29.68	-13.00	-46.07	Horizontal
2	5137.00	-48.66	RMS	32.80	-22.98	1.69	-95.23	35.06	-13.00	-35.66	Horizontal
3	6849.00	-56.27	RMS	36.50	-23.25	1.90	-95.23	23.81	-13.00	-43.27	Horizontal

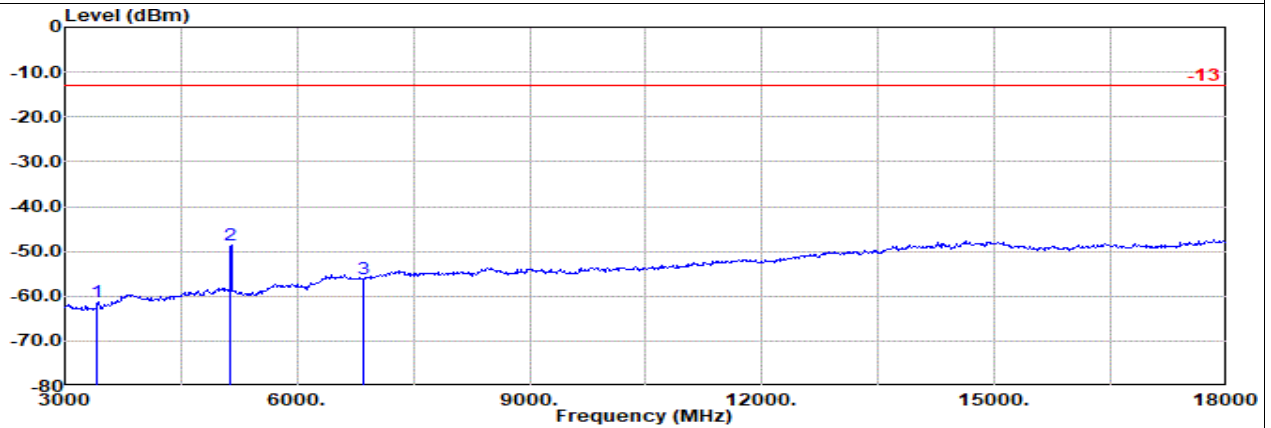

Site : 03CH23-HY

Condition: -13 3m DRH18-E_LE2C05A18EN_240620 Vertical

: WCDMA Ch1312

	Freq MHz	Level dBm	Detector	Ant Amp\Cb		Filter dB	EIRPCF dB	Readin dBuV	Limit dBm	Margin dB	Pol
				Factor dB/m	1 dB						
1	3424.00	-61.16	RMS	28.60	-24.01	1.89	-95.23	27.59	-13.00	-48.16	Vertical
2	5137.00	-48.65	RMS	32.80	-22.98	1.69	-95.23	35.07	-13.00	-35.65	Vertical
3	6849.00	-56.12	RMS	36.50	-23.25	1.90	-95.23	23.96	-13.00	-43.12	Vertical




Main

Part 27L Mode 3

WCDMA B4 Ch1413

M

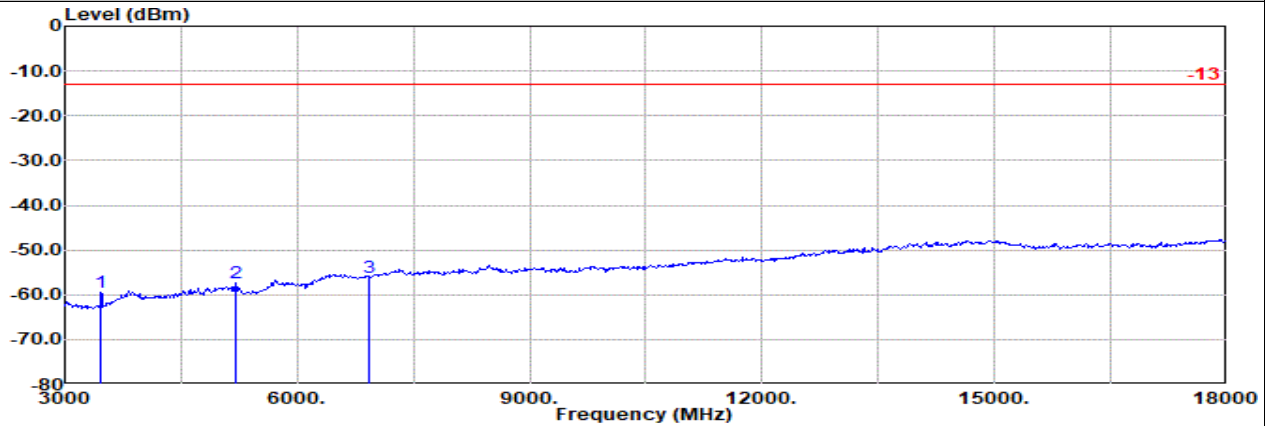


Site : 03CH23-HY

Condition: -13 3m DRH18-E_LE2C05A18EN_240620 Horizontal

: WCDMA Ch1413

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm				dB	dB	dBuV	dBm	dB	
1	3465.00	-59.56	RMS	28.76	-24.01	1.85	-95.23	29.07	-13.00	-46.56	Horizontal
2	5197.00	-57.42	RMS	32.71	-23.08	1.69	-95.23	26.49	-13.00	-44.42	Horizontal
3	6930.00	-56.08	RMS	36.56	-23.37	1.91	-95.23	24.05	-13.00	-43.08	Horizontal

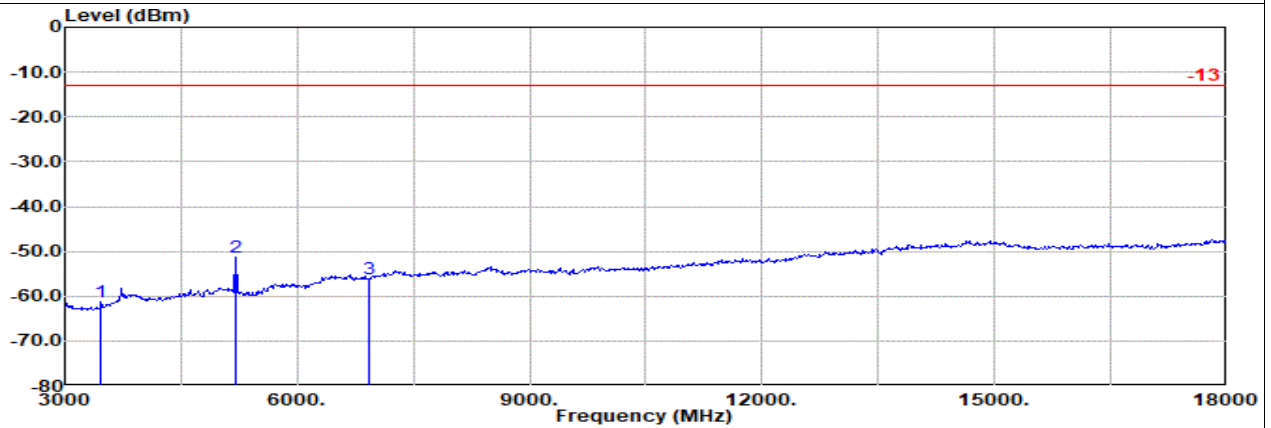

Site : 03CH23-HY

Condition: -13 3m DRH18-E_LE2C05A18EN_240620 Vertical

: WCDMA Ch1413

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm				dB	dB	dBuV	dBm	dB	
1	3465.00	-61.27	RMS	28.76	-24.01	1.85	-95.23	27.36	-13.00	-48.27	Vertical
2	5197.00	-51.20	RMS	32.71	-23.08	1.69	-95.23	32.71	-13.00	-38.20	Vertical
3	6930.00	-56.09	RMS	36.56	-23.37	1.91	-95.23	24.04	-13.00	-43.09	Vertical




Main

Part 27L Mode 3

WCDMA B4 Ch1513

H

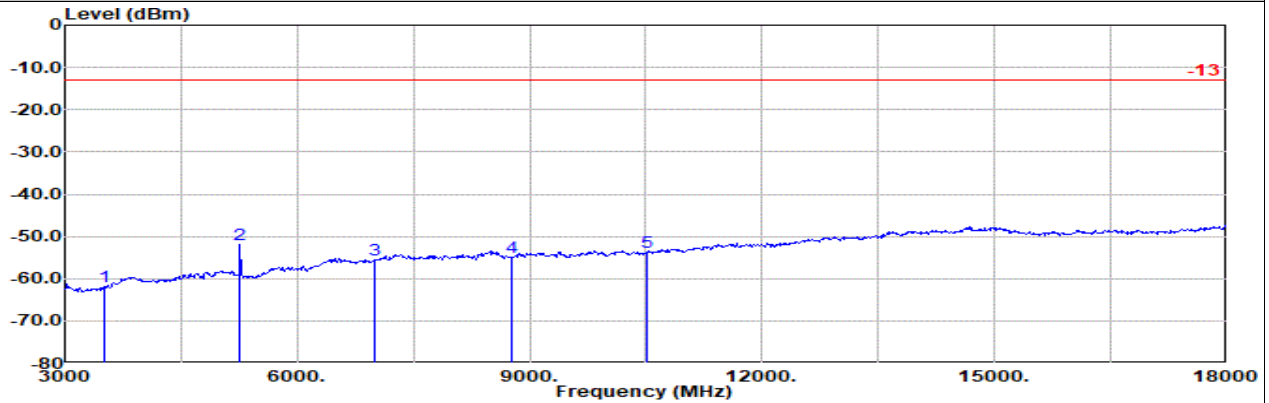


Site : 03CH23-HY

Condition: -13 3m DRH18-E_LE2C05A18EN_240620 Horizontal

: WCDMA Ch1513

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm									
1	3505.00	-61.80	RMS	28.95	-24.01	1.80	-95.23	26.69	-13.00	-48.80	Horizontal
2	5257.00	-52.01	RMS	32.69	-23.17	1.79	-95.23	31.91	-13.00	-39.01	Horizontal
3	7010.00	-55.67	RMS	36.70	-23.47	1.92	-95.23	24.41	-13.00	-42.67	Horizontal
4	8763.00	-54.95	RMS	37.20	-23.61	2.14	-95.23	24.55	-13.00	-41.95	Horizontal
5	10515.00	-53.84	RMS	37.43	-24.22	2.45	-95.23	25.73	-13.00	-40.84	Horizontal

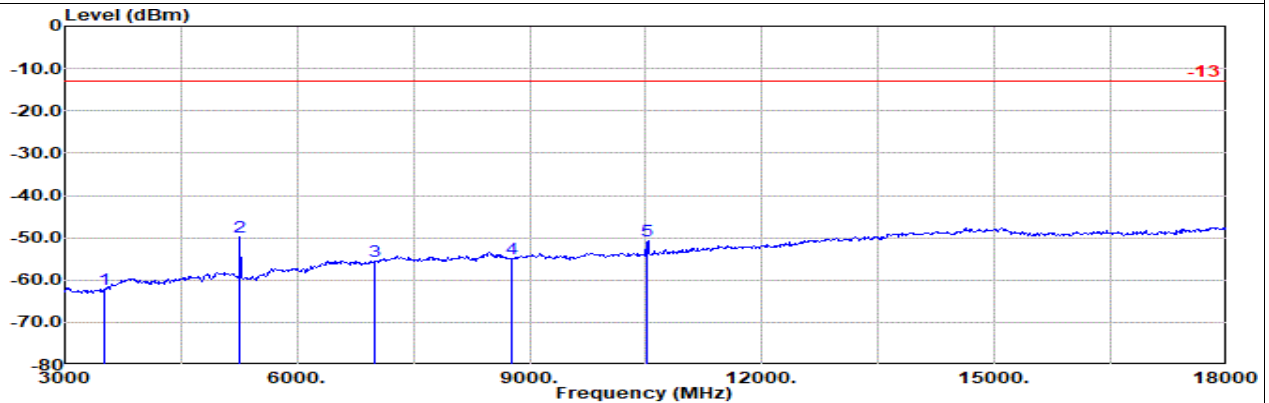

Site : 03CH23-HY

Condition: -13 3m DRH18-E_LE2C05A18EN_240620 Vertical

: WCDMA Ch1513

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm									
1	3505.00	-62.19	RMS	28.95	-24.01	1.80	-95.23	26.30	-13.00	-49.19	Vertical
2	5257.00	-49.81	RMS	32.69	-23.17	1.79	-95.23	34.11	-13.00	-36.81	Vertical
3	7010.00	-55.49	RMS	36.70	-23.47	1.92	-95.23	24.59	-13.00	-42.49	Vertical
4	8763.00	-55.00	RMS	37.20	-23.61	2.14	-95.23	24.50	-13.00	-42.00	Vertical
5	10515.00	-50.77	RMS	37.43	-24.22	2.45	-95.23	28.80	-13.00	-37.77	Vertical




Main

Part 22H Mode 1

WCDMA B5 Ch4233

H

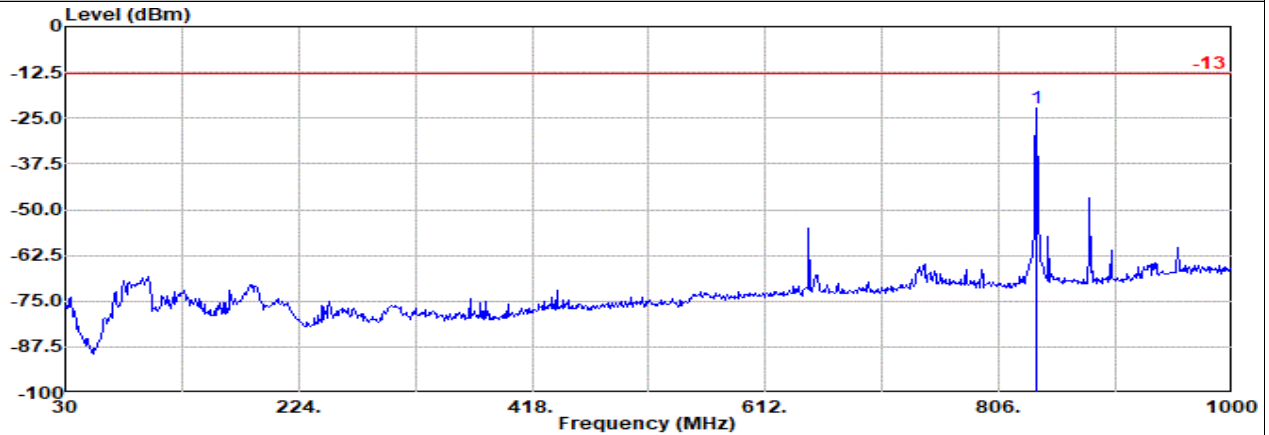


Site : 03CH23-HY

Condition: -13 3m CBL6111D_62028 & 003_231015 Horizontal

: WCDMA B5 Ch4233 H

: #1 is fundamental signal which can be ignored.

1	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF		Readin	Limit	Margin Pol	
	MHz	dBm		Factor	1	dB	dB	dBuV	dBm	dB	
1	837.04	-22.09	RMS	28.71	-27.25	0.18	-95.23	71.50	-13.00	-9.09	Horizontal

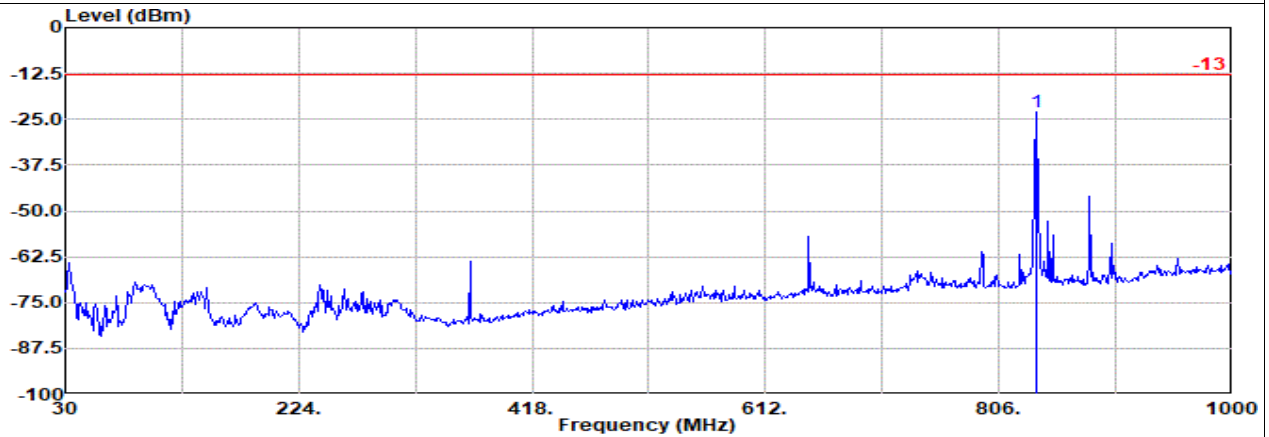

Site : 03CH23-HY

Condition: -13 3m CBL6111D_62028 & 003_231015 Vertical

: WCDMA B5 Ch4233 H

: #1 is fundamental signal which can be ignored.

1	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF		Readin	Limit	Margin Pol	
	MHz	dBm		Factor	1	dB	dB	dBuV	dBm	dB	
1	837.04	-23.17	RMS	28.71	-27.25	0.18	-95.23	70.42	-13.00	-10.17	Vertical