


FCC SAR TEST REPORT

FCC ID : PU5-TP00168A
Equipment : Notebook Computer
Brand Name : Lenovo
Model Name : TP00168A,TP00168B
Applicant : Wistron Corporation
21F, No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih Dist,
New Taipei City 221,Taiwan
Manufacturer : Lenovo PC HK Limited.
23/F, Lincoln House, Taikoo Place, 979 King's Road,
Quarry Bay, Hong Kong, P.R. China
Standard : FCC 47 CFR Part 2 (2.1093)

Equipment: Quectel EM061K-GL, Intel AX211D2W and Intel BE201D2W tested inside of Lenovo Notebook Computer.

The product was received on Feb. 15, 2025 and testing was started from Feb. 15, 2025 and completed on Mar. 03, 2025. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. Wensan Laboratory



Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	4
3. Equipment Under Test (EUT) Information.....	5
3.1 General Information	5
3.2 General LTE SAR Test and Reporting Considerations	6
4. Proximity Sensor Triggering Test.....	9
5. RF Exposure Limits.....	15
5.1 Uncontrolled Environment.....	15
5.2 Controlled Environment.....	15
5.3 RF Exposure limit for above 6GHz	16
6. Specific Absorption Rate (SAR).....	17
6.1 Introduction	17
6.2 SAR Definition.....	17
7. System Description and Setup	18
7.1 Test Site Location.....	18
7.2 E-Field Probe	20
7.3 Data Acquisition Electronics (DAE)	20
7.4 Phantom.....	21
7.5 Device Holder.....	22
8. Measurement Procedures	23
8.1 Spatial Peak SAR Evaluation.....	23
8.2 Power Reference Measurement.....	24
8.3 Area Scan	24
8.4 Zoom Scan.....	25
8.5 Volume Scan Procedures.....	25
8.6 Power Drift Monitoring.....	25
9. Test Equipment List.....	26
10. System Verification	27
10.1 Tissue Verification	27
10.2 System Performance Check Results.....	28
11. RF Exposure Positions.....	28
11.1 SAR Testing for Tablet	28
12. UMTS/LTE Output Power (Unit: dBm)	29
13. SAR Test Results	76
13.1 Body SAR	77
13.2 Repeated SAR Measurement	82
14. Simultaneous Transmission Analysis.....	83
14.1 Body Exposure Conditions	83
14.2 SPLSR Evaluation and Analysis.....	84
15. Uncertainty Assessment	85
16. References.....	88
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos and Antenna Location	



History of this test report

Report No.	Version	Description	Issued Date
FA512519	01	Initial issue of report	Apr. 22, 2025

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) for Wistron Corporation, Notebook Computer, TP00168A,TP00168B, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary	Highest Simultaneous Transmission 1g SAR (W/kg)
		Body	
		1g SAR (W/kg)	
Licensed	WCDMA B2	0.87	1.17
	WCDMA B4	1.09	
	WCDMA B5	1.13	
	LTE B7	0.81	
	LTE B12/B17	0.97	
	LTE B13	0.93	
	LTE B14	0.93	
	LTE B25/B2	1.17	
	LTE B26/B5	0.98	
	LTE B30	0.77	
	LTE B66/B4	1.08	
	LTE B71	0.90	
	LTE B41/B38	1.14	
Date of Testing:		2025/02/15 ~ 2025/03/03	

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Paula Chen

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Notebook Computer
Brand Name	Lenovo
Model Name	TP00168A,TP00168B
FCC ID	PU5-TP00168A
Integrated WWAN Module	Brand Name: Quectel Model Name: EM061K-GL
Integrated WLAN Module 1	Brand Name: Intel Model Name: AX211D2W
Integrated WLAN Module 2	Brand Name: Intel Model Name: BE201D2W
Integrated NFC Module	Brand Name: Foxconn Model Name: T77H747
Wireless Technology and Frequency Range	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 5.9 GHz Band: 5850 MHz ~ 5895 MHz WLAN 6GHz Band: 5925 MHz~6425 MHz, 6425 MHz~6525 MHz, 6525 MHz~6875MHz, 6875MHz~7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
Mode	RMC12.2Kbps HSDPA HSUPA DC-HSDPA LTE: QPSK, 16QAM WLAN: 802.11a/b/g/n/ac/ax/be HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160/EHT20/EHT40/EHT80/EHT160/EHT320 Bluetooth BR/EDR/LE NFC: ASK
Remark: 1. This device has two antenna vendors; RF exposure evaluation selects AWAN as the main test, Speed will spot check worst case found in AWAN. 2. This device is convertible type notebook PC, and there are two mode as usage way, one is laptop mode, another is tablet mode. 3. The Intel AX211D2W WLAN/BT module (FCC ID: PD9AX211D2) is integrated into this host. 4. The Intel BE201D2W WLAN/BT module (FCC ID: PD9BE201D2) is also integrated into this host. 5. The FCC ID: MCLT77H747 NFC module is integrated into this host, and NFC transmitters are considered to be operating simultaneously when there is overlapping transmission with the exception of transmission during network hand-offs with maximum hand-off duration less than 30 seconds.	

WWAN Antenna Information				
Main Antenna	Manufacturer	AWAN	Peak gain(dBi)	-2.54
	Part number	025.902IY.0001	Type	PIFA
	Manufacturer	Speed	Peak gain(dBi)	0.99
	Part number	025.902J9.0001	Type	PIFA

3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05												
FCC ID			PU5-TP00168A									
Equipment Name			Notebook Computer									
Operating Frequency Range of each LTE transmission band			LTE Band 2: 1850 MHz ~ 1910 MHz									
			LTE Band 4: 1710 MHz ~ 1755 MHz									
			LTE Band 5: 824 MHz ~ 849 MHz									
			LTE Band 7: 2500 MHz ~ 2570 MHz									
			LTE Band 12: 699 MHz ~ 716 MHz									
			LTE Band 13: 777 MHz ~ 787 MHz									
			LTE Band 14: 788 MHz ~ 798 MHz									
			LTE Band 17: 704 MHz ~ 716 MHz									
			LTE Band 25: 1850 MHz ~ 1915 MHz									
			LTE Band 26: 814 MHz ~ 849 MHz									
			LTE Band 30: 2305 MHz ~ 2315 MHz									
			LTE Band 38: 2570 MHz ~ 2620 MHz									
			LTE Band 41: 2496 MHz ~ 2690 MHz									
			LTE Band 66: 1710 MHz ~ 1780 MHz									
			LTE Band 71: 663 MHz ~ 698 MHz									
Channel Bandwidth			LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz									
			LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz									
			LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz									
			LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz									
			LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz									
			LTE Band 13: 5MHz, 10MHz									
			LTE Band 14: 5MHz, 10MHz									
			LTE Band 17: 5MHz, 10MHz									
			LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz									
			LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz									
			LTE Band 30: 5MHz, 10MHz									
			LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz									
			LTE Band 41: 5MHz, 10MHz, 15MHz, 20MH									
			LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz									
			LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz									
uplink modulations used			QPSK / 16QAM									
LTE Voice / Data requirements			Data only									
LTE MPR permanently built-in by design			Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3									
			Modulation		Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	
					1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz		
			QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1		
			16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1		
			16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2		
			64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2		
			64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3		
			256 QAM	≥ 1						≤ 5		
LTE A-MPR			In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)									
Spectrum plots for RB configuration			A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.									
Power reduction applied to satisfy SAR compliance			Yes, Proximity Sensor.									
Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	



	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	23205		779.5		23230	782						
M	23230		782									
H	23255		784.5									
LTE Band 14												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Channel #		Channel #		Freq.(MHz)					
L	23305		790.5		23330	793						
M	23330		793									
H	23355		795.5									
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)					
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					
LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 30												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	27685		2307.5		27710		2310					
M	27710		2310									
H	27735		2312.5									
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				



M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
	40620	2593	40620	2593	40620	2593	40620	2593				
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770
LTE Band 71												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	133147	665.5	133172	668	133197	670.5	133222	673				
M	133297	680.5	133297	680.5	133297	680.5	133297	680.5				
H	133447	695.5	133422	693	133397	690.5	133372	688				


4. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance (KDB 616217 D04 section 6.2)>:

For the device is fully integrated, touch sensing capacitive sensor. It uses a charge transfer capacitive acquisition method that is capable of near range proximity detection. In this device offers a state of the art capacitive sensing engine with an embedded sampling capacitor and voltage regulator allowing the overall solution cost to be reduced and improving system immunity in noisy environments.

Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed. The details are illustrated as following, and the shortest triggering distances were reported and used for SAR assessment.

In the preliminary triggering distance testing, the tissue-equivalent medium for different frequency bands were used for verification; no other frequency bands tissue-equivalent medium was found to result in shortest triggering distance than that for 1900MHz, and the tissue-equivalent medium for 1900MHz was used for formal proximity sensor triggering testing.

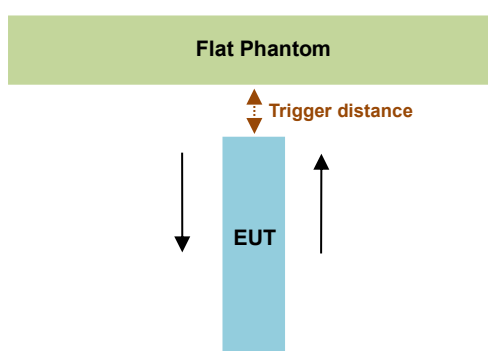

	Laptop Mode		Tablet Mode			
	Proximity Sensor Trigger Distance (mm)		Proximity Sensor Trigger Distance (mm)			
Position	Bottom Side		Back		Right Edge	
	moving toward	moving away	moving toward	moving away	moving toward	moving away
Minimum	12	12	20	20	44	44


<Proximity Sensor Triggering Coverage (KDB 616217 D04 section 6.3)>:

Since the antenna and sensor are collocated and all of the peak SAR location is overlapping with the sensor pad for this device, therefore, According to KDB 616217 section 6.3, these procedures do not apply and are not required for this device. due to the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor on this device.

<Tablet Tilt angle influences to proximity sensor triggering (KDB 616217 D04 section 6.4)>:

The influence of table tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at above separation distance.

Rotating the tablet around the edge next to the phantom in $\leq 10^\circ$ increments until the tablet is $\pm 45^\circ$ from the vertical position at 0° , and the maximum output power remains in the reduced mode.

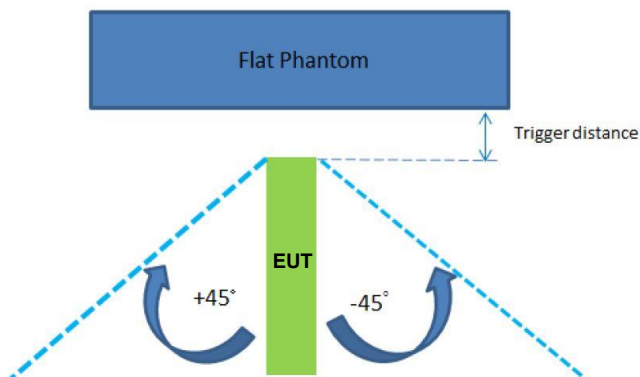

Laptop Mode		
Proximity Sensor Trigger Distance (mm)		
Position	Right Edge	
	+45	-45
Minimum	21	45



Tablet Mode		
Proximity Sensor Trigger Distance (mm)		
Position	Right Edge	
	+45	-45
Minimum	21	45



Proximity sensor power reduction



Exposure Position / wireless mode	Bottom Side/ Back/ Right Edge ⁽¹⁾
WCDMA II	11 dB
WCDMA IV	10.5 dB
WCDMA V	7.5 dB
LTE Band 7	12.5 dB
LTE Band 12/17	5.5 dB
LTE Band 13	6.5 dB
LTE Band 14	6.5 dB
LTE Band 2/25	10.5 dB
LTE Band 5/26	7 dB
LTE Band 30	10.5 dB
LTE Band 38/41	8.5 dB
LTE Band 4/66	10.5 dB
LTE Band 71	5 dB

Remark:

- ⁽¹⁾: Reduced maximum limit applied by activation of proximity sensor.
- Tests were performed in accordance with IEC_ IEEE_ 62209-1528-2020 section 7.7 and compliant results are shown below.
- For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed:
 - Bottom Side: [11 mm](#)
 - Back: [19 mm](#)
 - Right Edge: [20 mm](#)

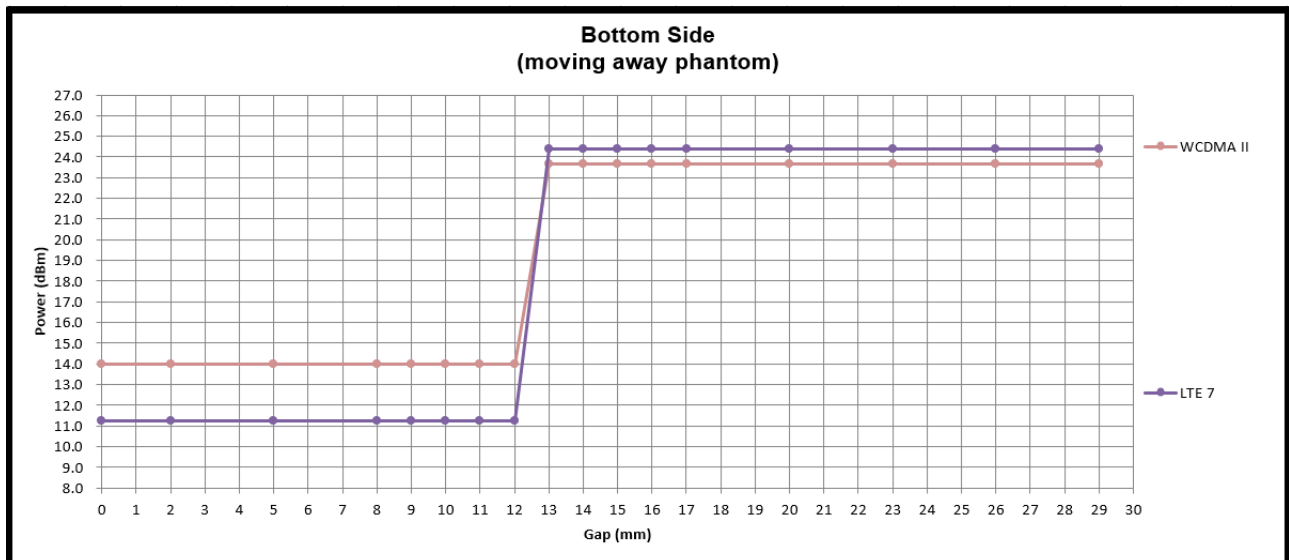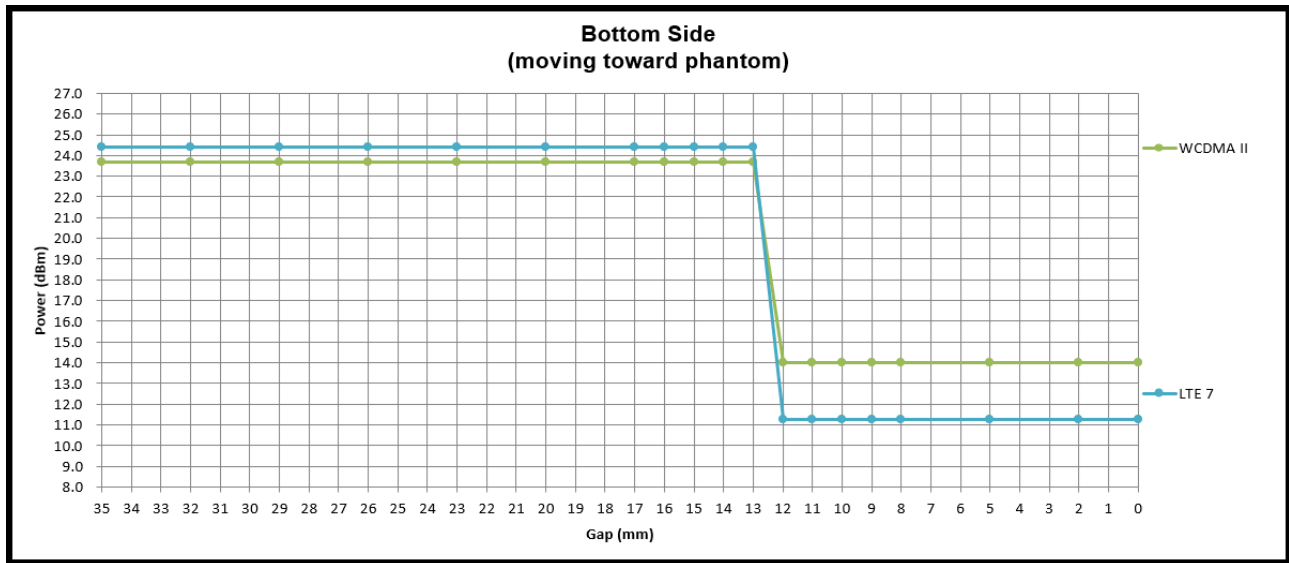Power Measurement during Sensor Trigger distance testing

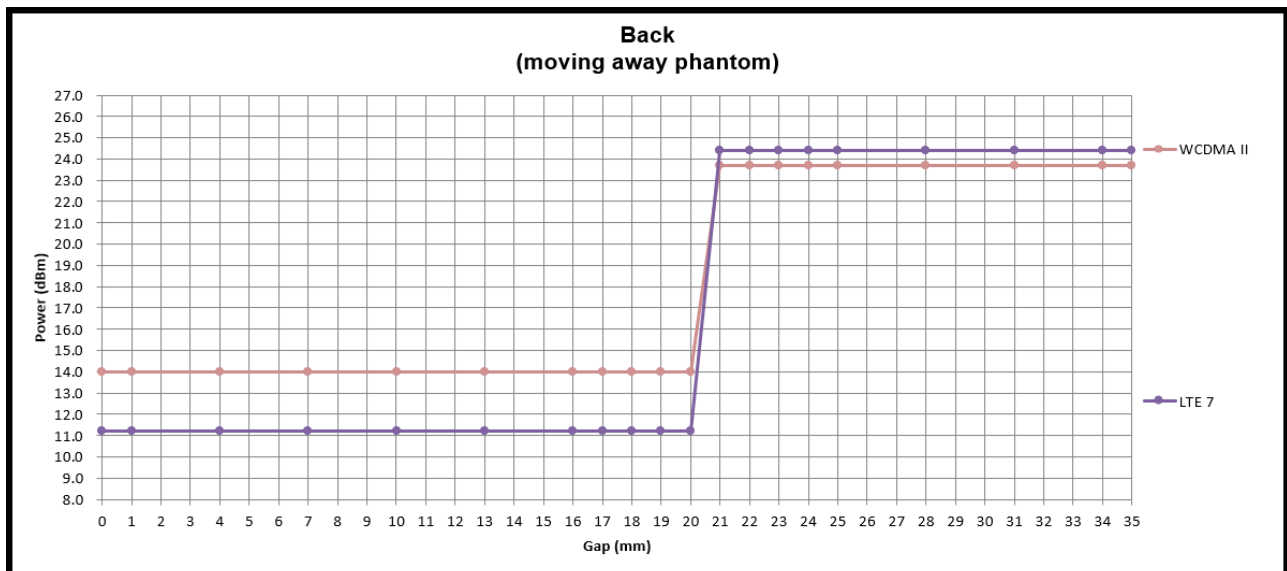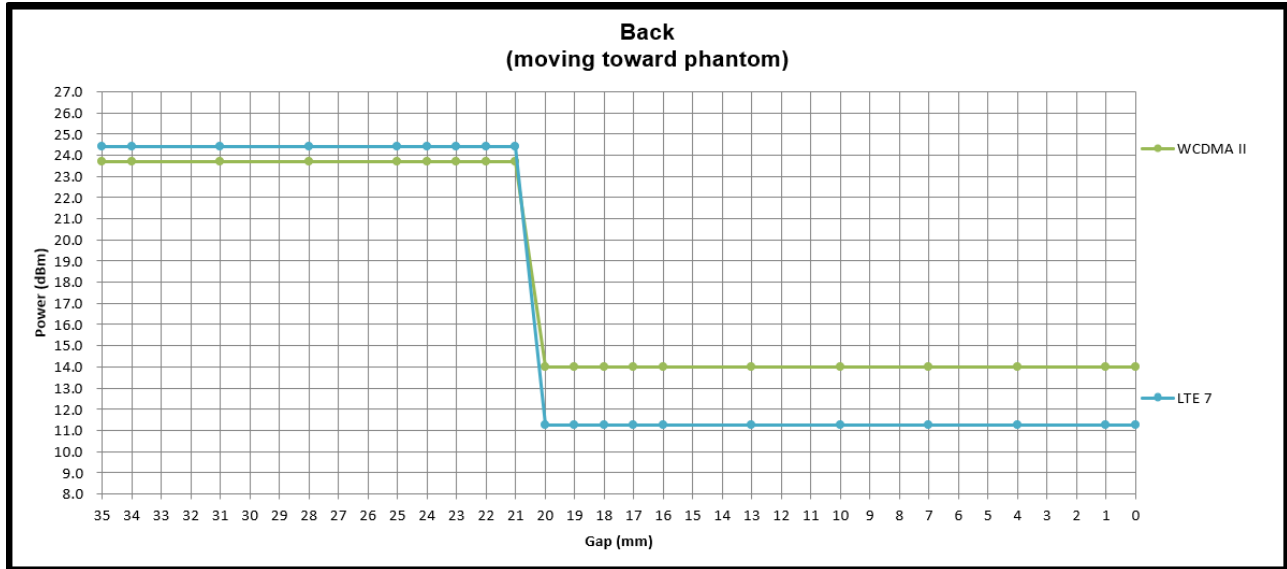

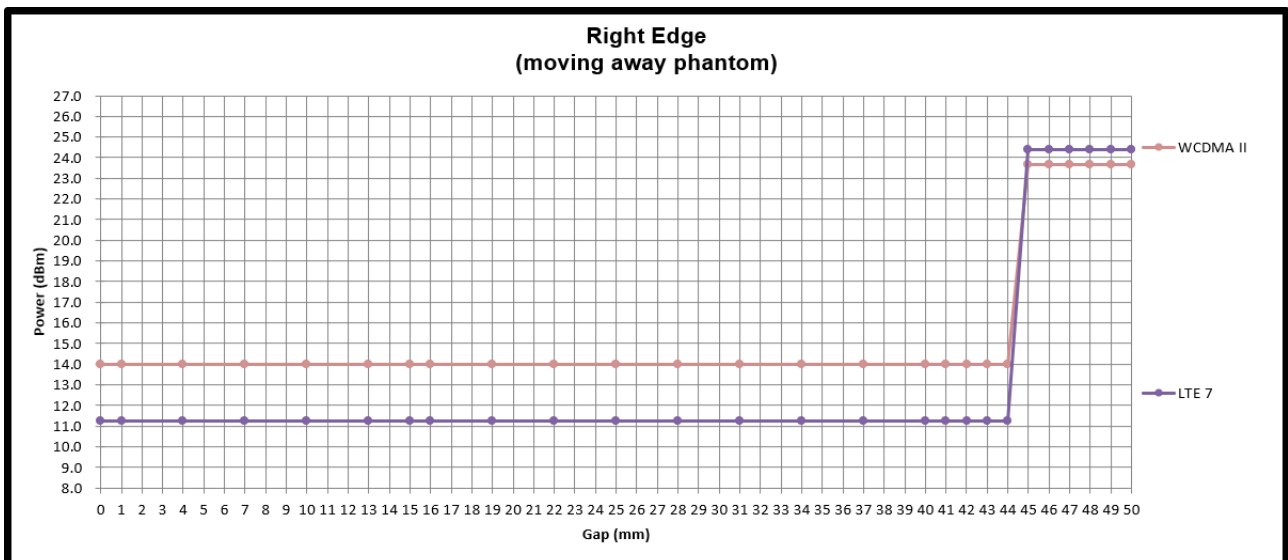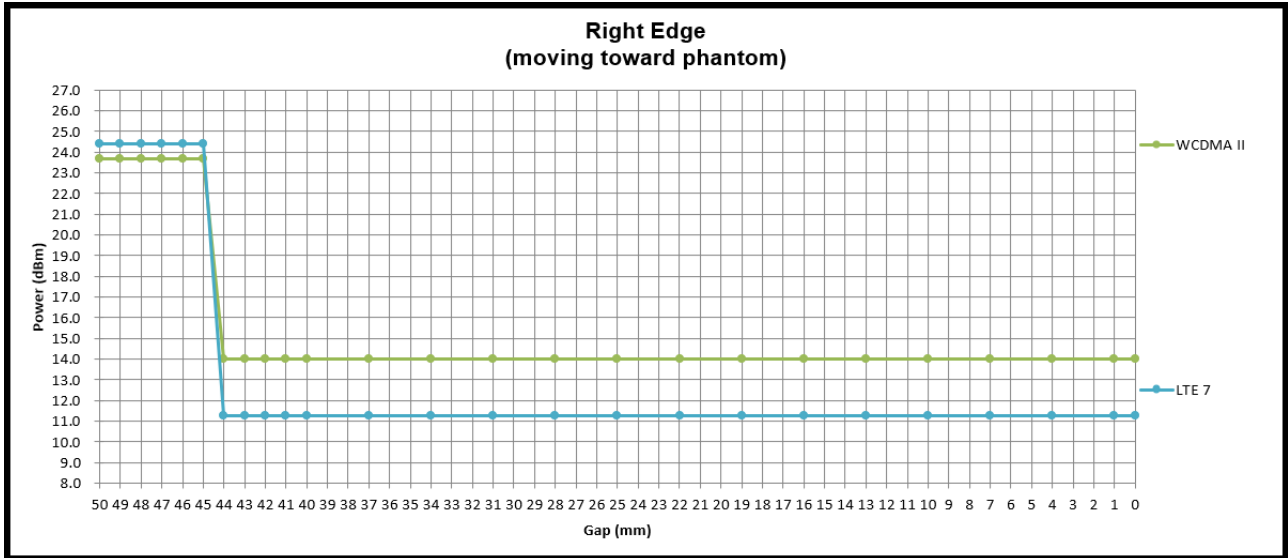


5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5.3 RF Exposure limit for above 6GHz

According to ANSI/IEEE C95.1-1992, the criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm² per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

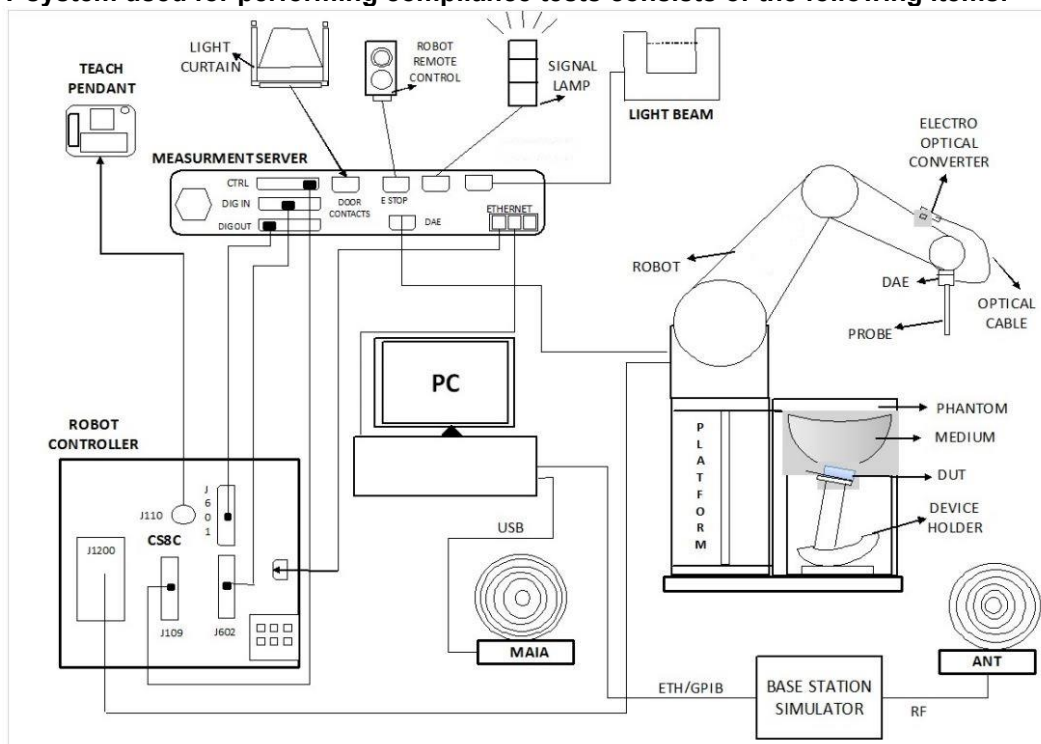

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Laboratory	EMC & Wireless Communications Laboratory			Wensan Laboratory				
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333			TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010				
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY	SAR18-HY	SAR21-HY	
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	SAR16-HY	SAR19-HY	SAR22-HY	
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	SAR17-HY	SAR20-HY		

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation. The ISED CABID is TW1190 / TW3786, Company Number is 4086B / 4086H.

Laboratory	EMC & Wireless Communications Laboratory		Wensan Laboratory				
Test Site Location	CABID: TW1190 Company Number: 4086B No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333		CABID: TW3786 Company Number: 4086H No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010				
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY	SAR18-HY	SAR21-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	SAR16-HY	SAR19-HY	SAR22-HY
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	SAR17-HY	SAR20-HY	

7.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

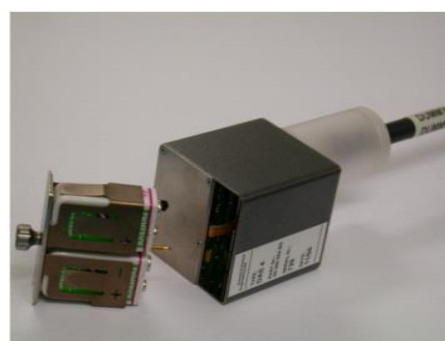


Fig 5.1 Photo of DAE

7.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4$ GHz: ≤ 3 mm $4 - 5$ GHz: ≤ 2.5 mm $5 - 6$ GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit ⁽²⁾	D750V3	1107	Jun. 22, 2022	Jun. 19, 2025
SPEAG	835MHz System Validation Kit	D835V2	499	Aug. 22, 2024	Aug. 21, 2025
SPEAG	1750MHz System Validation Kit ⁽²⁾	D1750V2	1112	Jun. 22, 2022	Jun. 19, 2025
SPEAG	1900MHz System Validation Kit ⁽²⁾	D1900V2	5d093	Mar. 25, 2022	Mar. 22, 2025
SPEAG	1900MHz System Validation Kit ⁽²⁾	D1900V2	5d185	Jun. 17, 2022	Jun. 14, 2025
SPEAG	2300MHz System Validation Kit	D2300V2	1088	Jul. 10, 2024	Jul. 09, 2025
SPEAG	2600MHz System Validation Kit	D2600V2	1008	Aug. 15, 2024	Aug. 14, 2025
SPEAG	2600MHz System Validation Kit ⁽²⁾	D2600V2	1078	Jun. 23, 2022	Jun. 20, 2025
SPEAG	Data Acquisition Electronics	DAE4	703	Apr. 22, 2024	Apr. 21, 2025
SPEAG	Data Acquisition Electronics	DAE4	1697	Nov. 14, 2024	Nov. 13, 2025
SPEAG	Data Acquisition Electronics	DAE4	1805	May. 22, 2024	May. 21, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Nov. 19, 2024	Nov. 18, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	3976	Jan. 23, 2025	Jan. 22, 2026
SPEAG	Dosimetric E-Field Probe	EX3DV4	7694	Nov. 18, 2024	Nov. 17, 2025
Testo	Hygro meter	608-H1	45196600	Oct. 28, 2024	Oct. 27, 2025
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Nov. 12, 2024	Nov. 11, 2025
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Sep. 24, 2024	Sep. 23, 2025
Keysight	ENA Network Analyzer	E5071C	MY46104758	Oct. 20, 2024	Oct. 19, 2025
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 17, 2024	Sep. 16, 2025
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3690	Aug. 07, 2024	Aug. 06, 2025
Anritsu	Power Meter	ML2495A	1419002	Aug. 13, 2024	Aug. 12, 2025
Anritsu	Power Sensor	MA2411B	1911176	Aug. 13, 2024	Aug. 12, 2025
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jul. 09, 2024	Jul. 08, 2025
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 23, 2024	Oct. 22, 2025
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

10. System Verification

10.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing.

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	22.6	0.893	41.500	0.89	41.90	0.34	-0.95	± 5	2025/2/16
750	22.2	0.893	41.800	0.89	41.90	0.34	-0.24	± 5	2025/2/19
835	22.6	0.927	41.200	0.90	41.50	3.00	-0.72	± 5	2025/2/16
835	22.2	0.927	41.500	0.90	41.50	3.00	0.00	± 5	2025/2/19
1750	22.3	1.370	40.900	1.37	40.10	0.00	2.00	± 5	2025/2/15
1750	22.8	1.360	40.500	1.37	40.10	-0.73	1.00	± 5	2025/2/18
1900	22.3	1.450	39.300	1.40	40.00	3.57	-1.75	± 5	2025/2/15
1900	22.8	1.440	39.000	1.40	40.00	2.86	-2.50	± 5	2025/2/18
1900	22.8	1.400	40.100	1.40	40.00	0.00	0.25	± 5	2025/2/20
2300	22.7	1.670	39.400	1.67	39.50	0.00	-0.25	± 5	2025/2/17
2300	22	1.640	40.600	1.67	39.50	-1.80	2.78	± 5	2025/2/21
2600	22.7	2.000	38.300	1.96	39.00	2.04	-1.79	± 5	2025/2/17
2600	22	1.970	39.400	1.96	39.00	0.51	1.03	± 5	2025/2/21
2600	22.5	2.010	38.500	1.96	39.00	2.55	-1.28	± 5	2025/3/3

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test Site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
SAR-13	2025/2/16	750	50	D750V3-1107	EX3DV4 - SN7694	DAE4 Sn1697	0.414	8.540	8.28	-3.04
SAR-13	2025/2/19	750	50	D750V3-1107	EX3DV4 - SN7694	DAE4 Sn1697	0.415	8.540	8.3	-2.81
SAR-13	2025/2/16	835	50	D835V2-499	EX3DV4 - SN7694	DAE4 Sn1697	0.484	9.440	9.68	2.54
SAR-13	2025/2/19	835	50	D835V2-499	EX3DV4 - SN7694	DAE4 Sn1697	0.500	9.440	10	5.93
SAR-13	2025/2/15	1750	50	D1750V2-1112	EX3DV4 - SN7694	DAE4 Sn1697	1.830	36.900	36.6	-0.81
SAR-13	2025/2/18	1750	50	D1750V2-1112	EX3DV4 - SN7694	DAE4 Sn1697	1.810	36.900	36.2	-1.90
SAR-13	2025/2/15	1900	50	D1900V2-5d185	EX3DV4 - SN7694	DAE4 Sn1697	1.910	39.000	38.2	-2.05
SAR-13	2025/2/18	1900	50	D1900V2-5d185	EX3DV4 - SN7694	DAE4 Sn1697	1.890	39.000	37.8	-3.08
SAR-14	2025/2/20	1900	50	D1900V2-5d093	EX3DV4 - SN3931	DAE4 Sn703	1.940	39.900	38.8	-2.76
SAR-13	2025/2/17	2300	50	D2300V2-1088	EX3DV4 - SN7694	DAE4 Sn1697	2.280	48.200	45.6	-5.39
SAR-13	2025/2/21	2300	50	D2300V2-1088	EX3DV4 - SN7694	DAE4 Sn1697	2.250	48.200	45	-6.64
SAR-13	2025/2/17	2600	50	D2600V2-1078	EX3DV4 - SN7694	DAE4 Sn1697	2.750	55.400	55	-0.72
SAR-13	2025/2/21	2600	50	D2600V2-1078	EX3DV4 - SN7694	DAE4 Sn1697	2.710	55.400	54.2	-2.17
SAR-15	2025/3/3	2600	50	D2600V2-1008	EX3DV4 - SN3976	DAE4 Sn1805	2.740	55.700	54.8	-1.62

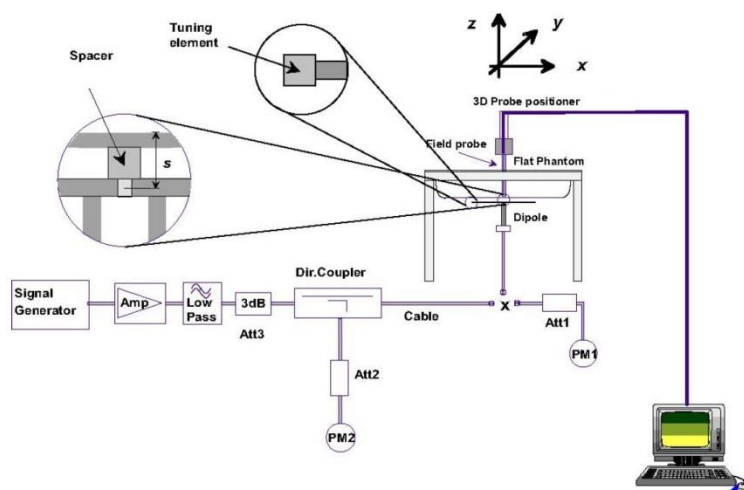


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

12. UMTS/LTE Output Power (Unit: dBm)

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_d/\beta_c = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

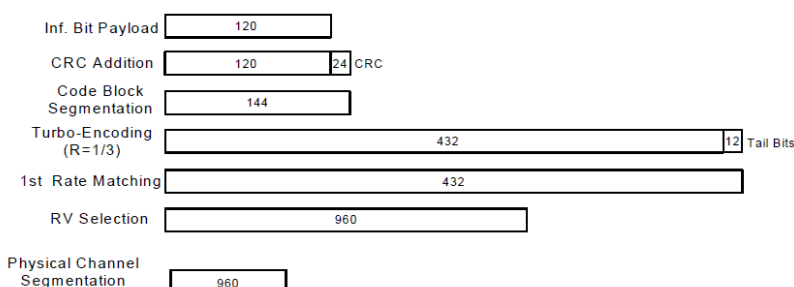
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Band		WCDMA II_Sensor OFF			Tune-up Limit (dBm)	WCDMA IV_Sensor OFF			Tune-up Limit (dBm)	WCDMA V_Sensor OFF			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	23.60	23.63	23.62	25.00	23.76	23.80	23.63	25.00	23.75	23.81	23.73	25.00
3GPP Rel 6	HSDPA Subtest-1	22.63	22.80	22.96	24.00	22.67	22.73	22.69	24.00	22.74	22.79	22.76	24.00
3GPP Rel 6	HSDPA Subtest-2	22.62	22.74	23.00	24.00	22.70	22.70	22.65	24.00	22.72	22.53	22.78	24.00
3GPP Rel 6	HSDPA Subtest-3	22.14	22.26	22.43	23.50	22.21	22.20	22.14	23.50	22.24	22.24	22.24	23.50
3GPP Rel 6	HSDPA Subtest-4	22.13	22.24	22.44	23.50	22.16	22.16	22.12	23.50	22.26	22.28	22.22	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.61	22.72	22.95	24.00	22.72	22.75	22.71	24.00	22.72	22.71	22.72	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.65	22.66	22.97	24.00	22.74	22.79	22.72	24.00	22.70	22.49	22.73	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.20	22.17	22.42	23.50	22.28	22.20	22.12	23.50	22.16	22.20	22.18	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.20	22.15	22.35	23.50	22.22	22.16	22.17	23.50	22.21	22.26	22.18	23.50
3GPP Rel 6	HSUPA Subtest-1	22.65	22.77	22.93	24.00	22.67	22.70	22.64	24.00	22.74	22.72	22.69	24.00
3GPP Rel 6	HSUPA Subtest-2	20.74	20.75	20.88	22.00	20.64	20.74	20.68	22.00	20.76	20.79	20.68	22.00
3GPP Rel 6	HSUPA Subtest-3	21.62	21.82	21.90	23.00	21.69	21.67	21.75	23.00	21.69	21.71	21.70	23.00
3GPP Rel 6	HSUPA Subtest-4	20.67	20.69	20.94	22.00	20.73	20.68	20.69	22.00	20.78	20.82	20.77	22.00
3GPP Rel 6	HSUPA Subtest-5	22.61	22.71	22.81	24.00	22.62	22.62	22.62	24.00	22.72	22.62	22.62	24.00

Band		WCDMA II_Sensor ON			Tune-up Limit (dBm)	WCDMA IV_Sensor ON			Tune-up Limit (dBm)	WCDMA V_Sensor ON			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	13.59	13.89	13.73	14.00	14.3	14.31	14.13	14.50	17.22	17.3	17.29	17.50
3GPP Rel 6	HSDPA Subtest-1	12.50	12.59	12.74	13.00	13.27	13.26	13.17	13.50	16.41	16.49	16.44	16.50
3GPP Rel 6	HSDPA Subtest-2	12.51	12.60	12.74	13.00	13.21	13.22	13.10	13.50	16.45	16.48	16.45	16.50
3GPP Rel 6	HSDPA Subtest-3	12.09	12.08	12.24	12.50	12.83	12.72	12.58	13.00	15.97	15.99	16.00	16.00
3GPP Rel 6	HSDPA Subtest-4	12.00	12.15	12.19	12.50	12.69	12.75	12.53	13.00	15.98	16.00	15.89	16.00
3GPP Rel 8	DC-HSDPA Subtest-1	12.40	12.42	12.59	13.00	13.12	13.10	13.04	13.50	16.25	16.39	16.30	16.50
3GPP Rel 8	DC-HSDPA Subtest-2	12.39	12.42	12.64	13.00	13.01	13.11	12.92	13.50	16.31	16.31	16.25	16.50
3GPP Rel 8	DC-HSDPA Subtest-3	11.97	11.88	12.04	12.50	12.70	12.61	12.46	13.00	15.87	15.84	15.82	16.00
3GPP Rel 8	DC-HSDPA Subtest-4	11.82	12.02	12.09	12.50	12.58	12.59	12.35	13.00	15.82	15.83	15.77	16.00
3GPP Rel 6	HSUPA Subtest-1	12.49	12.61	12.76	13.00	13.25	13.11	13.19	13.50	16.42	16.49	16.43	16.50
3GPP Rel 6	HSUPA Subtest-2	10.51	10.50	10.79	11.00	11.25	11.26	11.15	11.50	14.39	14.46	14.48	14.50
3GPP Rel 6	HSUPA Subtest-3	11.50	11.37	11.83	12.00	12.35	12.44	12.30	12.50	14.77	14.91	15.23	15.50
3GPP Rel 6	HSUPA Subtest-4	10.62	10.55	10.73	11.00	11.22	11.27	11.10	11.50	14.27	14.45	14.44	14.50
3GPP Rel 6	HSUPA Subtest-5	12.50	12.50	12.50	13.00	13.10	13.10	13.10	13.50	16.30	16.40	16.20	16.50

<LTE Conducted Power>**General Note:**

1. A Base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B5/B12/B17/B26/B38/B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 2/4/5/17/38 SAR test was covered by Band 25/66/26/12/41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



<LTE Band 2_Sensor OFF>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				18700	18900	19100	
Frequency (MHz)				1860	1880	1900	
20	QPSK	1	0	23.04	23.08	23.00	24.5
20	QPSK	1	49	23.04	23.02	23.00	
20	QPSK	1	99	22.90	22.94	23.04	
20	QPSK	50	0	22.18	22.19	22.15	23.5
20	QPSK	50	24	22.17	22.08	22.14	
20	QPSK	50	50	22.01	22.06	22.17	
20	QPSK	100	0	22.05	22.06	22.11	
20	16QAM	1	0	22.34	22.35	22.31	23.5
20	16QAM	1	49	22.36	22.30	22.39	
20	16QAM	1	99	22.26	22.25	22.31	
20	16QAM	50	0	21.18	21.13	21.14	22.5
20	16QAM	50	24	21.18	21.14	21.20	
20	16QAM	50	50	21.06	21.08	21.17	
20	16QAM	100	0	21.05	21.11	21.15	
Channel				18675	18900	19125	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1902.5	
15	QPSK	1	0	22.94	23.00	22.98	24.5
15	QPSK	1	37	23.01	23.00	22.90	
15	QPSK	1	74	22.88	22.92	23.00	
15	QPSK	36	0	22.16	22.09	22.09	23.5
15	QPSK	36	20	22.09	22.03	22.13	
15	QPSK	36	39	21.94	22.02	22.09	
15	QPSK	75	0	22.01	22.01	22.07	
15	16QAM	1	0	22.31	22.29	22.21	23.5
15	16QAM	1	37	22.26	22.29	22.35	
15	16QAM	1	74	22.20	22.19	22.30	
15	16QAM	36	0	21.16	21.08	21.06	22.5
15	16QAM	36	20	21.08	21.09	21.14	
15	16QAM	36	39	20.96	20.98	21.16	
15	16QAM	75	0	21.03	21.02	21.09	
Channel				18650	18900	19150	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1905	
10	QPSK	1	0	23.00	22.99	22.98	24.5
10	QPSK	1	25	22.97	23.00	22.95	
10	QPSK	1	49	22.80	22.93	22.98	
10	QPSK	25	0	22.12	22.12	22.14	23.5
10	QPSK	25	12	22.08	21.98	22.07	
10	QPSK	25	25	21.99	22.03	22.15	
10	QPSK	50	0	22.01	22.03	22.03	
10	16QAM	1	0	22.28	22.25	22.24	23.5
10	16QAM	1	25	22.26	22.28	22.34	
10	16QAM	1	49	22.24	22.24	22.24	
10	16QAM	25	0	21.10	21.07	21.13	
10	16QAM	25	12	21.17	21.05	21.10	22.5
10	16QAM	25	25	21.00	21.06	21.16	
10	16QAM	50	0	20.95	21.05	21.14	
Channel				18625	18900	19175	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1880	1907.5	
5	QPSK	1	0	22.97	23.06	22.98	24.5
5	QPSK	1	12	23.00	22.98	22.91	
5	QPSK	1	24	22.82	22.88	23.00	
5	QPSK	12	0	22.14	22.15	22.10	23.5
5	QPSK	12	7	22.16	22.05	22.07	
5	QPSK	12	13	21.92	21.98	22.11	
5	QPSK	25	0	21.95	22.00	22.02	
5	16QAM	1	0	22.29	22.25	22.23	23.5



FCC SAR TEST REPORT

Report No. : FA512519

5	16QAM	1	12	22.30	22.24	22.35	22.5
5	16QAM	1	24	22.25	22.20	22.25	
5	16QAM	12	0	21.10	21.09	21.08	
5	16QAM	12	7	21.16	21.13	21.13	
5	16QAM	12	13	21.03	21.02	21.15	
5	16QAM	25	0	21.02	21.10	21.12	Tune-up limit (dBm)
Channel				18615	18900	19185	
Frequency (MHz)				1851.5	1880	1908.5	
3	QPSK	1	0	22.94	23.07	22.93	24.5
3	QPSK	1	8	23.00	22.96	22.97	
3	QPSK	1	14	22.81	22.84	22.96	
3	QPSK	8	0	22.17	22.11	22.14	23.5
3	QPSK	8	4	22.10	22.06	22.10	
3	QPSK	8	7	21.91	21.97	22.09	
3	QPSK	15	0	21.97	22.03	22.02	
3	16QAM	1	0	22.31	22.33	22.29	23.5
3	16QAM	1	8	22.34	22.25	22.36	
3	16QAM	1	14	22.16	22.19	22.29	
3	16QAM	8	0	21.09	21.08	21.06	22.5
3	16QAM	8	4	21.16	21.11	21.12	
3	16QAM	8	7	21.03	21.03	21.11	
3	16QAM	15	0	21.04	21.06	21.12	
Channel				18607	18900	19193	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1909.3	
1.4	QPSK	1	0	23.00	23.04	22.93	24.5
1.4	QPSK	1	3	22.98	22.92	22.91	
1.4	QPSK	1	5	22.86	22.86	22.97	
1.4	QPSK	3	0	22.95	22.90	22.92	
1.4	QPSK	3	1	22.95	22.82	22.87	
1.4	QPSK	3	3	22.73	22.76	22.94	
1.4	QPSK	6	0	21.98	21.98	22.01	23.5
1.4	16QAM	1	0	22.29	22.32	22.27	23.5
1.4	16QAM	1	3	22.27	22.22	22.37	
1.4	16QAM	1	5	22.16	22.22	22.23	
1.4	16QAM	3	0	22.16	22.12	22.11	
1.4	16QAM	3	1	22.15	22.04	22.11	
1.4	16QAM	3	3	22.02	22.00	22.07	
1.4	16QAM	6	0	20.99	21.03	21.05	22.5



<LTE Band 2_Sensor ON>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				18700	18900	19100	14
Frequency (MHz)				1860	1880	1900	
20	QPSK	1	0	13.10	13.45	13.24	
20	QPSK	1	49	13.17	13.21	13.35	13
20	QPSK	1	99	13.03	13.20	13.19	
20	QPSK	50	0	12.17	12.44	12.34	
20	QPSK	50	24	12.24	12.26	12.40	13
20	QPSK	50	50	12.12	12.25	12.24	
20	QPSK	100	0	12.11	12.26	12.37	
20	16QAM	1	0	12.52	12.55	12.61	13
20	16QAM	1	49	12.53	12.63	12.73	
20	16QAM	1	99	12.43	12.54	12.75	
20	16QAM	50	0	11.27	11.31	11.39	12
20	16QAM	50	24	11.30	11.34	11.48	
20	16QAM	50	50	11.18	11.28	11.51	
20	16QAM	100	0	11.20	11.31	11.43	14
Channel				18675	18900	19125	
Frequency (MHz)				1857.5	1880	1902.5	
15	QPSK	1	0	12.92	13.23	13.10	14
15	QPSK	1	37	12.97	13.03	13.16	
15	QPSK	1	74	12.89	13.03	12.99	
15	QPSK	36	0	12.00	12.31	12.23	13
15	QPSK	36	20	12.05	12.08	12.20	
15	QPSK	36	39	12.02	12.06	12.10	
15	QPSK	75	0	11.93	12.10	12.26	13
15	16QAM	1	0	12.36	12.35	12.49	
15	16QAM	1	37	12.33	12.52	12.60	
15	16QAM	1	74	12.28	12.39	12.56	12
15	16QAM	36	0	11.17	11.15	11.24	
15	16QAM	36	20	11.18	11.23	11.31	
15	16QAM	36	39	11.02	11.08	11.41	14
15	16QAM	75	0	11.07	11.18	11.27	
Channel				18650	18900	19150	
Frequency (MHz)				1855	1880	1905	
10	QPSK	1	0	12.92	13.20	13.14	14
10	QPSK	1	25	13.04	13.11	13.16	
10	QPSK	1	49	12.90	13.06	13.06	
10	QPSK	25	0	12.01	12.25	12.18	13
10	QPSK	25	12	12.04	12.11	12.21	
10	QPSK	25	25	11.92	12.15	12.08	
10	QPSK	50	0	12.00	12.07	12.17	13
10	16QAM	1	0	12.40	12.36	12.51	
10	16QAM	1	25	12.40	12.47	12.59	
10	16QAM	1	49	12.29	12.34	12.59	12
10	16QAM	25	0	11.13	11.20	11.24	
10	16QAM	25	12	11.12	11.15	11.30	
10	16QAM	25	25	11.00	11.09	11.34	14
10	16QAM	50	0	11.02	11.17	11.29	
Channel				18625	18900	19175	
Frequency (MHz)				1852.5	1880	1907.5	
5	QPSK	1	0	12.91	13.19	13.05	14
5	QPSK	1	12	13.03	13.10	13.24	
5	QPSK	1	24	12.83	13.07	13.06	
5	QPSK	12	0	12.00	12.34	12.14	13
5	QPSK	12	7	12.13	12.15	12.20	
5	QPSK	12	13	11.96	12.07	12.04	
5	QPSK	25	0	12.00	12.14	12.17	13
5	16QAM	1	0	12.41	12.35	12.42	



FCC SAR TEST REPORT

Report No. : FA512519

5	16QAM	1	12	12.38	12.44	12.59	12
5	16QAM	1	24	12.30	12.38	12.63	
5	16QAM	12	0	11.17	11.15	11.19	
5	16QAM	12	7	11.16	11.21	11.28	
5	16QAM	12	13	11.06	11.09	11.41	
5	16QAM	25	0	11.08	11.17	11.24	Tune-up limit (dBm)
Channel				18615	18900	19185	
Frequency (MHz)				1851.5	1880	1908.5	14
3	QPSK	1	0	12.96	13.28	13.04	
3	QPSK	1	8	13.06	13.11	13.16	
3	QPSK	1	14	12.87	13.04	13.09	
3	QPSK	8	0	12.03	12.33	12.19	
3	QPSK	8	4	12.14	12.09	12.27	13
3	QPSK	8	7	11.94	12.11	12.06	
3	QPSK	15	0	11.97	12.07	12.23	
3	16QAM	1	0	12.38	12.42	12.45	13
3	16QAM	1	8	12.39	12.53	12.54	
3	16QAM	1	14	12.27	12.41	12.58	
3	16QAM	8	0	11.13	11.17	11.22	12
3	16QAM	8	4	11.14	11.22	11.31	
3	16QAM	8	7	11.02	11.12	11.41	
3	16QAM	15	0	11.00	11.20	11.30	
Channel				18607	18900	19193	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1909.3	
1.4	QPSK	1	0	13.09	13.11	13.38	14
1.4	QPSK	1	3	13.18	13.20	13.36	
1.4	QPSK	1	5	13.11	13.13	13.39	
1.4	QPSK	3	0	13.14	13.17	13.44	
1.4	QPSK	3	1	13.20	13.20	13.35	
1.4	QPSK	3	3	13.15	13.18	13.44	
1.4	QPSK	6	0	12.15	12.15	12.45	13
1.4	16QAM	1	0	12.47	12.51	12.66	13
1.4	16QAM	1	3	12.58	12.62	12.76	
1.4	16QAM	1	5	12.51	12.51	12.68	
1.4	16QAM	3	0	12.24	12.27	12.49	
1.4	16QAM	3	1	12.31	12.32	12.49	
1.4	16QAM	3	3	12.23	12.28	12.46	
1.4	16QAM	6	0	11.27	11.28	11.53	12

<LTE Band 4_Sensor OFF>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20050	20175	20300	Tune-up limit (dBm)
Frequency (MHz)				1720	1732.5	1745	
20	QPSK	1	0	23.01	23.05	22.98	24.5
20	QPSK	1	49	23.02	22.95	23.04	
20	QPSK	1	99	22.88	22.88	23.01	
20	QPSK	50	0	22.13	22.14	22.11	23.5
20	QPSK	50	24	22.05	22.10	22.11	
20	QPSK	50	50	22.07	22.06	22.13	
20	QPSK	100	0	22.05	22.03	22.09	23.5
20	16QAM	1	0	22.30	22.22	22.19	
20	16QAM	1	49	22.38	22.17	22.31	
20	16QAM	1	99	22.17	22.11	22.34	22.5
20	16QAM	50	0	21.14	21.10	21.07	
20	16QAM	50	24	21.07	21.06	21.08	
20	16QAM	50	50	21.03	21.02	21.14	
20	16QAM	100	0	21.05	21.06	21.06	
Channel				20025	20175	20325	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1732.5	1747.5	
15	QPSK	1	0	22.94	22.98	22.93	24.5



FCC SAR TEST REPORT

Report No. : FA512519

15	QPSK	1	37	23.00	22.90	22.95	23.5
15	QPSK	1	74	22.87	22.82	22.93	
15	QPSK	36	0	22.11	22.06	22.06	
15	QPSK	36	20	21.96	22.07	22.01	
15	QPSK	36	39	22.02	21.97	22.03	
15	QPSK	75	0	21.99	21.98	22.03	23.5
15	16QAM	1	0	22.22	22.13	22.09	
15	16QAM	1	37	22.29	22.16	22.24	
15	16QAM	1	74	22.10	22.06	22.33	
15	16QAM	36	0	21.05	21.04	21.03	
15	16QAM	36	20	21.05	20.98	20.99	22.5
15	16QAM	36	39	21.01	20.97	21.09	
15	16QAM	75	0	21.02	21.02	20.99	
Channel				20000	20175	20350	Tune-up limit (dBm)
Frequency (MHz)				1715	1732.5	1750	
10	QPSK	1	0	22.99	23.01	22.93	24.5
10	QPSK	1	25	23.01	22.90	23.01	
10	QPSK	1	49	22.80	22.85	22.92	
10	QPSK	25	0	22.05	22.10	22.06	23.5
10	QPSK	25	12	21.97	22.09	22.03	
10	QPSK	25	25	21.99	22.01	22.04	
10	QPSK	50	0	22.00	21.93	22.02	
10	16QAM	1	0	22.20	22.18	22.13	
10	16QAM	1	25	22.37	22.11	22.23	23.5
10	16QAM	1	49	22.12	22.06	22.24	
10	16QAM	25	0	21.10	21.00	20.99	
10	16QAM	25	12	21.05	20.97	21.04	22.5
10	16QAM	25	25	20.97	20.93	21.13	
10	16QAM	50	0	21.01	21.01	21.02	
Channel				19975	20175	20375	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1732.5	1752.5	
5	QPSK	1	0	22.93	23.00	22.88	24.5
5	QPSK	1	12	22.95	22.89	23.02	
5	QPSK	1	24	22.80	22.82	22.96	
5	QPSK	12	0	22.07	22.06	22.02	23.5
5	QPSK	12	7	22.01	22.02	22.02	
5	QPSK	12	13	21.97	22.04	22.11	
5	QPSK	25	0	21.99	21.99	22.00	
5	16QAM	1	0	22.28	22.21	22.09	
5	16QAM	1	12	22.28	22.14	22.30	23.5
5	16QAM	1	24	22.07	22.04	22.26	
5	16QAM	12	0	21.09	21.07	20.99	
5	16QAM	12	7	21.00	20.96	21.07	22.5
5	16QAM	12	13	20.95	20.99	21.11	
5	16QAM	25	0	20.95	20.98	20.98	
Channel				19965	20175	20385	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1732.5	1753.5	
3	QPSK	1	0	22.91	22.97	22.90	24.5
3	QPSK	1	8	23.01	22.86	22.99	
3	QPSK	1	14	22.78	22.84	22.95	
3	QPSK	8	0	22.09	22.11	22.01	23.5
3	QPSK	8	4	21.97	22.00	22.01	
3	QPSK	8	7	22.01	22.01	22.08	
3	QPSK	15	0	22.04	22.01	21.99	
3	16QAM	1	0	22.20	22.17	22.11	
3	16QAM	1	8	22.33	22.11	22.26	23.5
3	16QAM	1	14	22.09	22.08	22.29	
3	16QAM	8	0	21.09	21.03	20.97	
3	16QAM	8	4	20.99	21.01	21.00	22.5
3	16QAM	8	7	20.94	20.97	21.09	
3	16QAM	15	0	20.96	21.03	21.03	
Channel				19957	20175	20393	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1732.5	1754.3	



FCC SAR TEST REPORT

Report No. : FA512519

1.4	QPSK	1	0	22.98	22.97	22.93	24.5
1.4	QPSK	1	3	22.95	22.92	23.02	
1.4	QPSK	1	5	22.79	22.80	22.91	
1.4	QPSK	3	0	22.76	22.78	22.77	
1.4	QPSK	3	1	22.74	22.73	22.73	
1.4	QPSK	3	3	22.68	22.70	22.74	23.5
1.4	QPSK	6	0	22.03	22.01	22.04	
1.4	16QAM	1	0	22.23	22.21	22.16	23.5
1.4	16QAM	1	3	22.36	22.16	22.21	
1.4	16QAM	1	5	22.12	22.09	22.27	
1.4	16QAM	3	0	21.83	21.77	21.67	
1.4	16QAM	3	1	21.70	21.68	21.75	
1.4	16QAM	3	3	21.70	21.71	21.78	22.5
1.4	16QAM	6	0	21.02	20.96	20.98	

<LTE Band 4_Sensor ON>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20050	20175	20300	
Frequency (MHz)				1720	1732.5	1745	
20	QPSK	1	0	13.50	13.51	13.42	14
20	QPSK	1	49	13.47	13.44	13.41	
20	QPSK	1	99	13.38	13.28	13.30	
20	QPSK	50	0	12.44	12.53	12.38	13
20	QPSK	50	24	12.47	12.45	12.36	
20	QPSK	50	50	12.38	12.35	12.39	
20	QPSK	100	0	12.44	12.41	12.34	13
20	16QAM	1	0	12.89	12.81	12.78	
20	16QAM	1	49	12.99	12.79	12.77	
20	16QAM	1	99	12.78	12.62	12.69	12
20	16QAM	50	0	11.60	11.54	11.44	
20	16QAM	50	24	11.52	11.50	11.43	
20	16QAM	50	50	11.54	11.41	11.44	
20	16QAM	100	0	11.49	11.45	11.40	
Channel				20025	20175	20325	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1732.5	1747.5	
15	QPSK	1	0	13.30	13.40	13.22	14
15	QPSK	1	37	13.37	13.33	13.21	
15	QPSK	1	74	13.18	13.14	13.20	
15	QPSK	36	0	12.29	12.39	12.21	13
15	QPSK	36	20	12.29	12.25	12.16	
15	QPSK	36	39	12.25	12.25	12.23	
15	QPSK	75	0	12.33	12.21	12.20	13
15	16QAM	1	0	12.72	12.62	12.63	
15	16QAM	1	37	12.87	12.62	12.58	
15	16QAM	1	74	12.67	12.45	12.56	12
15	16QAM	36	0	11.50	11.35	11.34	
15	16QAM	36	20	11.35	11.38	11.30	
15	16QAM	36	39	11.37	11.31	11.34	
15	16QAM	75	0	11.29	11.26	11.22	
Channel				20000	20175	20350	Tune-up limit (dBm)
Frequency (MHz)				1715	1732.5	1750	
10	QPSK	1	0	13.37	13.31	13.28	14
10	QPSK	1	25	13.27	13.25	13.26	
10	QPSK	1	49	13.20	13.18	13.12	
10	QPSK	25	0	12.30	12.36	12.20	13
10	QPSK	25	12	12.27	12.29	12.21	
10	QPSK	25	25	12.25	12.24	12.21	
10	QPSK	50	0	12.30	12.27	12.21	13
10	16QAM	1	0	12.71	12.69	12.66	
10	16QAM	1	25	12.87	12.67	12.57	



FCC SAR TEST REPORT

Report No. : FA512519

10	16QAM	1	49	12.63	12.43	12.54	12
10	16QAM	25	0	11.49	11.40	11.27	
10	16QAM	25	12	11.35	11.38	11.24	
10	16QAM	25	25	11.36	11.31	11.26	
10	16QAM	50	0	11.32	11.26	11.25	
Channel				19975	20175	20375	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1732.5	1752.5	
5	QPSK	1	0	13.33	13.31	13.26	14
5	QPSK	1	12	13.29	13.32	13.23	
5	QPSK	1	24	13.21	13.13	13.10	
5	QPSK	12	0	12.30	12.39	12.19	13
5	QPSK	12	7	12.31	12.27	12.25	
5	QPSK	12	13	12.22	12.17	12.23	
5	QPSK	25	0	12.32	12.30	12.24	
5	16QAM	1	0	12.70	12.65	12.68	13
5	16QAM	1	12	12.88	12.61	12.59	
5	16QAM	1	24	12.66	12.45	12.58	
5	16QAM	12	0	11.47	11.41	11.27	12
5	16QAM	12	7	11.42	11.38	11.23	
5	16QAM	12	13	11.39	11.30	11.31	
5	16QAM	25	0	11.37	11.33	11.23	
Channel				19965	20175	20385	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1732.5	1753.5	
3	QPSK	1	0	13.36	13.33	13.25	14
3	QPSK	1	8	13.33	13.27	13.27	
3	QPSK	1	14	13.18	13.10	13.16	
3	QPSK	8	0	12.25	12.37	12.24	13
3	QPSK	8	4	12.34	12.33	12.19	
3	QPSK	8	7	12.21	12.19	12.27	
3	QPSK	15	0	12.31	12.29	12.21	
3	16QAM	1	0	12.69	12.63	12.68	13
3	16QAM	1	8	12.89	12.59	12.58	
3	16QAM	1	14	12.64	12.45	12.54	
3	16QAM	8	0	11.41	11.35	11.28	12
3	16QAM	8	4	11.32	11.30	11.23	
3	16QAM	8	7	11.40	11.22	11.30	
3	16QAM	15	0	11.31	11.27	11.23	
Channel				19957	20175	20393	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1732.5	1754.3	
1.4	QPSK	1	0	13.42	13.32	13.26	14
1.4	QPSK	1	3	13.50	13.42	13.33	
1.4	QPSK	1	5	13.40	13.32	13.25	
1.4	QPSK	3	0	13.49	13.39	13.34	
1.4	QPSK	3	1	13.50	13.40	13.37	
1.4	QPSK	3	3	13.49	13.37	13.34	13
1.4	QPSK	6	0	12.46	12.33	12.32	
1.4	16QAM	1	0	12.80	12.72	12.70	13
1.4	16QAM	1	3	12.87	12.79	12.75	
1.4	16QAM	1	5	12.76	12.70	12.65	
1.4	16QAM	3	0	12.56	12.46	12.41	
1.4	16QAM	3	1	12.59	12.53	12.46	
1.4	16QAM	3	3	12.55	12.45	12.43	12
1.4	16QAM	6	0	11.59	11.51	11.46	



<LTE Band 5_Sensor OFF>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20450	20525	20600	24.5
Frequency (MHz)				829	836.5	844	
10	QPSK	1	0	22.66	22.86	22.78	
10	QPSK	1	25	22.75	22.85	22.76	23.5
10	QPSK	1	49	22.79	22.75	22.66	
10	QPSK	25	0	21.89	21.95	21.89	
10	QPSK	25	12	21.89	21.94	21.88	23.5
10	QPSK	25	25	21.93	21.87	21.82	
10	QPSK	50	0	21.88	21.94	21.90	
10	16QAM	1	0	21.97	22.09	22.10	23.5
10	16QAM	1	25	22.12	22.13	22.09	
10	16QAM	1	49	22.15	22.06	21.98	
10	16QAM	25	0	20.93	20.99	20.93	22.5
10	16QAM	25	12	20.95	21.00	20.92	
10	16QAM	25	25	20.99	20.93	20.90	
10	16QAM	50	0	20.91	20.94	20.91	24.5
Channel				20425	20525	20625	
Frequency (MHz)				826.5	836.5	846.5	
5	QPSK	1	0	22.59	22.81	22.72	24.5
5	QPSK	1	12	22.73	22.79	22.67	
5	QPSK	1	24	22.78	22.67	22.61	
5	QPSK	12	0	21.80	21.94	21.80	23.5
5	QPSK	12	7	21.80	21.88	21.85	
5	QPSK	12	13	21.91	21.84	21.80	
5	QPSK	25	0	21.84	21.90	21.83	23.5
5	16QAM	1	0	21.91	22.04	22.06	
5	16QAM	1	12	22.07	22.12	22.03	
5	16QAM	1	24	22.06	22.01	21.92	22.5
5	16QAM	12	0	20.88	20.95	20.91	
5	16QAM	12	7	20.91	20.96	20.83	
5	16QAM	12	13	20.89	20.90	20.80	24.5
5	16QAM	25	0	20.83	20.86	20.88	
Channel				20415	20525	20635	
Frequency (MHz)				825.5	836.5	847.5	
3	QPSK	1	0	22.59	22.85	22.72	24.5
3	QPSK	1	8	22.68	22.79	22.70	
3	QPSK	1	14	22.76	22.70	22.62	
3	QPSK	8	0	21.88	21.88	21.79	23.5
3	QPSK	8	4	21.79	21.84	21.81	
3	QPSK	8	7	21.88	21.82	21.76	
3	QPSK	15	0	21.80	21.91	21.83	23.5
3	16QAM	1	0	21.92	22.08	22.08	
3	16QAM	1	8	22.03	22.09	22.04	
3	16QAM	1	14	22.12	22.05	21.96	22.5
3	16QAM	8	0	20.86	20.92	20.84	
3	16QAM	8	4	20.85	20.96	20.89	
3	16QAM	8	7	20.93	20.85	20.86	24.5
3	16QAM	15	0	20.85	20.84	20.83	
Channel				20407	20525	20643	
Frequency (MHz)				824.7	836.5	848.3	
1.4	QPSK	1	0	22.62	22.81	22.68	24.5
1.4	QPSK	1	3	22.69	22.83	22.67	
1.4	QPSK	1	5	22.76	22.68	22.62	
1.4	QPSK	3	0	22.59	22.65	22.59	23.5
1.4	QPSK	3	1	22.60	22.59	22.58	
1.4	QPSK	3	3	22.65	22.60	22.55	
1.4	QPSK	6	0	21.80	21.90	21.83	23.5
1.4	16QAM	1	0	21.92	22.02	22.09	23.5



FCC SAR TEST REPORT

Report No. : FA512519

1.4	16QAM	1	3	22.11	22.04	22.06	
1.4	16QAM	1	5	22.11	22.00	21.97	
1.4	16QAM	3	0	21.67	21.70	21.59	
1.4	16QAM	3	1	21.69	21.74	21.57	
1.4	16QAM	3	3	21.69	21.61	21.61	
1.4	16QAM	6	0	20.82	20.93	20.88	22.5

<LTE Band 5_Sensor ON>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20450	20525	20600	
Frequency (MHz)				829	836.5	844	
10	QPSK	1	0	17.11	17.34	17.18	17.5
10	QPSK	1	25	17.21	17.24	17.31	
10	QPSK	1	49	17.25	17.17	17.24	
10	QPSK	25	0	16.24	16.37	16.36	16.5
10	QPSK	25	12	16.26	16.35	16.31	
10	QPSK	25	25	16.32	16.30	16.36	
10	QPSK	50	0	16.26	16.31	16.38	16.5
10	16QAM	1	0	16.46	16.43	16.48	
10	16QAM	1	25	16.36	16.42	16.46	
10	16QAM	1	49	16.42	16.35	16.40	15.5
10	16QAM	25	0	15.31	15.37	15.41	
10	16QAM	25	12	15.33	15.35	15.40	
10	16QAM	25	25	15.37	15.31	15.38	15.5
10	16QAM	50	0	15.29	15.33	15.41	
Channel				20425	20525	20625	Tune-up limit (dBm)
Frequency (MHz)				826.5	836.5	846.5	
5	QPSK	1	0	17.00	17.16	17.05	17.5
5	QPSK	1	12	17.05	17.05	17.15	
5	QPSK	1	24	17.08	16.97	17.11	
5	QPSK	12	0	16.12	16.23	16.21	16.5
5	QPSK	12	7	16.06	16.24	16.19	
5	QPSK	12	13	16.12	16.19	16.25	
5	QPSK	25	0	16.08	16.18	16.25	16.5
5	16QAM	1	0	16.26	16.30	16.38	
5	16QAM	1	12	16.16	16.23	16.34	
5	16QAM	1	24	16.23	16.21	16.21	15.5
5	16QAM	12	0	15.15	15.24	15.21	
5	16QAM	12	7	15.22	15.23	15.23	
5	16QAM	12	13	15.21	15.16	15.28	15.5
5	16QAM	25	0	15.16	15.13	15.27	
Channel				20415	20525	20635	Tune-up limit (dBm)
Frequency (MHz)				825.5	836.5	847.5	
3	QPSK	1	0	16.98	17.22	17.07	17.5
3	QPSK	1	8	17.11	17.12	17.21	
3	QPSK	1	14	17.15	16.98	17.07	
3	QPSK	8	0	16.08	16.17	16.24	16.5
3	QPSK	8	4	16.07	16.21	16.20	
3	QPSK	8	7	16.20	16.14	16.25	
3	QPSK	15	0	16.16	16.14	16.25	16.5
3	16QAM	1	0	16.29	16.24	16.31	
3	16QAM	1	8	16.18	16.30	16.32	
3	16QAM	1	14	16.22	16.24	16.25	15.5
3	16QAM	8	0	15.21	15.18	15.27	
3	16QAM	8	4	15.13	15.25	15.24	
3	16QAM	8	7	15.27	15.12	15.24	15.5
3	16QAM	15	0	15.14	15.20	15.22	
Channel				20407	20525	20643	Tune-up limit (dBm)
Frequency (MHz)				824.7	836.5	848.3	
1.4	QPSK	1	0	17.06	17.20	17.21	17.5



FCC SAR TEST REPORT

Report No. : FA512519

1.4	QPSK	1	3	17.13	17.24	17.26	
1.4	QPSK	1	5	17.06	17.19	17.18	
1.4	QPSK	3	0	17.12	17.24	17.28	
1.4	QPSK	3	1	17.16	17.28	17.30	
1.4	QPSK	3	3	17.12	17.23	17.25	
1.4	QPSK	6	0	16.10	16.23	16.24	16.5
1.4	16QAM	1	0	16.39	16.43	16.40	16.5
1.4	16QAM	1	3	16.48	16.22	16.32	
1.4	16QAM	1	5	16.35	16.33	16.32	
1.4	16QAM	3	0	16.14	16.29	16.33	
1.4	16QAM	3	1	16.19	16.33	16.33	
1.4	16QAM	3	3	16.12	16.27	16.27	15.5
1.4	16QAM	6	0	15.23	15.35	15.40	

<LTE Band 7_Sensor OFF>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20850	21100	21350	
Frequency (MHz)				2510	2535	2560	
20	QPSK	1	0	23.52	23.65	23.27	24.5
20	QPSK	1	49	23.51	23.24	23.16	
20	QPSK	1	99	23.43	23.33	23.11	
20	QPSK	50	0	23.05	23.21	22.59	23.5
20	QPSK	50	24	22.59	23.16	22.54	
20	QPSK	50	50	22.60	23.20	22.53	
20	QPSK	100	0	23.12	23.16	22.51	23.5
20	16QAM	1	0	23.20	23.23	22.62	
20	16QAM	1	49	23.17	23.24	22.69	
20	16QAM	1	99	23.24	23.36	22.67	22.5
20	16QAM	50	0	22.49	22.13	21.45	
20	16QAM	50	24	22.13	22.17	21.52	
20	16QAM	50	50	22.16	22.21	21.59	22.5
20	16QAM	100	0	22.50	22.14	21.53	
Channel				20825	21100	21375	Tune-up limit (dBm)
Frequency (MHz)				2507.5	2535	2562.5	
15	QPSK	1	0	23.42	23.55	23.07	24.5
15	QPSK	1	37	23.48	23.13	23.23	
15	QPSK	1	74	23.53	23.19	23.25	
15	QPSK	36	0	23.39	23.01	22.28	23.5
15	QPSK	36	20	22.43	23.06	22.37	
15	QPSK	36	39	22.41	23.01	22.40	
15	QPSK	75	0	22.97	23.03	22.33	23.5
15	16QAM	1	0	23.02	23.05	22.51	
15	16QAM	1	37	23.03	23.11	22.51	
15	16QAM	1	74	23.09	23.16	22.47	22.5
15	16QAM	36	0	22.38	22.02	21.34	
15	16QAM	36	20	21.99	22.02	21.37	
15	16QAM	36	39	22.06	22.09	21.43	22.5
15	16QAM	75	0	22.30	22.00	21.41	
Channel				20800	21100	21400	Tune-up limit (dBm)
Frequency (MHz)				2505	2535	2565	
10	QPSK	1	0	23.46	23.65	23.10	24.5
10	QPSK	1	25	23.44	23.12	23.17	
10	QPSK	1	49	23.52	23.13	23.28	
10	QPSK	25	0	23.39	22.98	22.32	23.5
10	QPSK	25	12	22.41	23.00	22.39	
10	QPSK	25	25	22.44	23.01	22.43	
10	QPSK	50	0	22.99	23.02	22.36	23.5
10	16QAM	1	0	23.01	23.05	22.52	
10	16QAM	1	25	22.99	23.14	22.49	
10	16QAM	1	49	23.12	23.24	22.57	



FCC SAR TEST REPORT

Report No. : FA512519

10	16QAM	25	0	22.34	21.96	21.26	22.5
10	16QAM	25	12	22.02	21.99	21.41	
10	16QAM	25	25	22.02	22.05	21.42	
10	16QAM	50	0	22.33	21.96	21.38	
Channel				20775	21100	21425	Tune-up limit (dBm)
Frequency (MHz)				2502.5	2535	2567.5	
5	QPSK	1	0	23.50	23.57	23.17	24.5
5	QPSK	1	12	23.45	23.05	23.16	
5	QPSK	1	24	23.45	23.20	23.26	
5	QPSK	12	0	23.32	22.98	22.28	23.5
5	QPSK	12	7	22.46	23.02	22.40	
5	QPSK	12	13	22.42	23.00	22.46	
5	QPSK	25	0	22.99	23.06	22.41	
5	16QAM	1	0	23.05	23.09	22.43	23.5
5	16QAM	1	12	22.98	23.13	22.58	
5	16QAM	1	24	23.11	23.24	22.49	
5	16QAM	12	0	22.38	22.00	21.32	22.5
5	16QAM	12	7	22.00	21.97	21.39	
5	16QAM	12	13	22.01	22.09	21.47	
5	16QAM	25	0	22.30	21.97	21.37	

<LTE Band 7_Sensor ON>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20850	21100	21350	
Frequency (MHz)				2510	2535	2560	
20	QPSK	1	0	10.87	11.24	10.93	12
20	QPSK	1	49	10.85	10.87	11.07	
20	QPSK	1	99	10.96	11.01	10.87	
20	QPSK	50	0	10.07	10.28	10.20	11
20	QPSK	50	24	10.02	10.01	10.19	
20	QPSK	50	50	10.05	10.07	9.98	
20	QPSK	100	0	10.00	10.19	10.00	
20	16QAM	1	0	10.16	10.14	10.20	11
20	16QAM	1	49	10.13	10.16	10.31	
20	16QAM	1	99	10.23	10.29	10.51	
20	16QAM	50	0	8.93	8.94	9.10	10
20	16QAM	50	24	9.03	8.99	9.18	
20	16QAM	50	50	9.06	9.06	9.26	
20	16QAM	100	0	8.97	8.98	9.15	
Channel				20825	21100	21375	Tune-up limit (dBm)
Frequency (MHz)				2507.5	2535	2562.5	
15	QPSK	1	0	10.72	11.12	10.74	12
15	QPSK	1	37	10.68	10.71	10.90	
15	QPSK	1	74	10.77	10.85	10.73	
15	QPSK	36	0	9.78	10.18	10.01	11
15	QPSK	36	20	9.86	9.85	10.09	
15	QPSK	36	39	9.94	9.93	9.86	
15	QPSK	75	0	9.82	9.90	10.09	
15	16QAM	1	0	10.02	9.96	10.05	11
15	16QAM	1	37	10.02	10.05	10.15	
15	16QAM	1	74	10.12	10.19	10.36	
15	16QAM	36	0	8.80	8.78	8.98	10
15	16QAM	36	20	8.88	8.87	9.04	
15	16QAM	36	39	8.95	8.90	9.08	
15	16QAM	75	0	8.78	8.83	9.03	
Channel				20800	21100	21400	Tune-up limit (dBm)
Frequency (MHz)				2505	2535	2565	
10	QPSK	1	0	10.67	11.05	10.78	12
10	QPSK	1	25	10.71	10.70	10.91	
10	QPSK	1	49	10.81	10.91	10.69	



FCC SAR TEST REPORT

Report No. : FA512519

10	QPSK	25	0	9.88	10.08	9.99	11
10	QPSK	25	12	9.90	9.89	9.99	
10	QPSK	25	25	9.94	9.92	9.78	
10	QPSK	50	0	9.84	9.80	9.99	
10	16QAM	1	0	10.03	9.94	10.04	11
10	16QAM	1	25	9.95	9.98	10.18	
10	16QAM	1	49	10.06	10.19	10.36	
10	16QAM	25	0	8.81	8.78	8.99	10
10	16QAM	25	12	8.87	8.86	8.99	
10	16QAM	25	25	8.89	8.86	9.12	
10	16QAM	50	0	8.80	8.84	9.02	
Channel				20775	21100	21425	Tune-up limit (dBm)
Frequency (MHz)				2502.5	2535	2567.5	
5	QPSK	1	0	10.77	11.09	10.82	12
5	QPSK	1	12	10.67	10.73	10.91	
5	QPSK	1	24	10.77	10.91	10.67	
5	QPSK	12	0	9.79	10.18	10.03	11
5	QPSK	12	7	9.88	9.85	10.03	
5	QPSK	12	13	9.85	9.97	9.84	
5	QPSK	25	0	9.82	9.86	10.04	
5	16QAM	1	0	9.98	9.99	10.05	11
5	16QAM	1	12	10.01	9.96	10.18	
5	16QAM	1	24	10.04	10.18	10.34	
5	16QAM	12	0	8.83	8.74	9.00	10
5	16QAM	12	7	8.85	8.81	9.01	
5	16QAM	12	13	8.86	8.91	9.16	
5	16QAM	25	0	8.77	8.81	9.05	

<LTE Band 12_Sensor OFF>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23060	23095	23130	
Frequency (MHz)				704	707.5	711	
10	QPSK	1	0	22.87	23.05	22.80	24.5
10	QPSK	1	25	22.82	22.90	22.91	
10	QPSK	1	49	22.90	22.91	22.85	
10	QPSK	25	0	22.00	22.60	21.98	23.5
10	QPSK	25	12	22.05	22.03	21.96	
10	QPSK	25	25	22.02	21.99	21.97	
10	QPSK	50	0	22.02	22.05	21.95	
10	16QAM	1	0	22.20	22.10	22.09	23.5
10	16QAM	1	25	22.17	22.25	22.25	
10	16QAM	1	49	22.27	22.28	22.15	
10	16QAM	25	0	20.99	20.98	20.98	22.5
10	16QAM	25	12	21.04	21.02	21.01	
10	16QAM	25	25	21.02	21.04	20.99	
10	16QAM	50	0	21.02	21.02	20.99	
Channel				23035	23095	23155	Tune-up limit (dBm)
Frequency (MHz)				701.5	707.5	713.5	
5	QPSK	1	0	22.85	22.91	22.77	24.5
5	QPSK	1	12	22.81	22.89	22.81	
5	QPSK	1	24	22.84	22.83	22.76	
5	QPSK	12	0	21.93	21.96	21.95	23.5
5	QPSK	12	7	21.96	21.98	21.94	
5	QPSK	12	13	22.01	21.90	21.87	
5	QPSK	25	0	22.01	21.90	21.85	
5	16QAM	1	0	22.15	22.04	22.03	23.5
5	16QAM	1	12	22.13	22.16	22.18	
5	16QAM	1	24	22.25	22.19	22.10	
5	16QAM	12	0	20.95	20.94	20.92	22.5
5	16QAM	12	7	20.94	20.95	20.91	



FCC SAR TEST REPORT

Report No. : FA512519

5	16QAM	12	13	20.96	21.03	20.97	
5	16QAM	25	0	20.95	21.00	20.89	
Channel				23025	23095	23165	Tune-up limit (dBm)
Frequency (MHz)				700.5	707.5	714.5	
3	QPSK	1	0	22.83	22.86	22.78	24.5
3	QPSK	1	8	22.78	22.84	22.90	
3	QPSK	1	14	22.86	22.84	22.84	
3	QPSK	8	0	21.94	21.95	21.89	23.5
3	QPSK	8	4	22.04	21.99	21.90	
3	QPSK	8	7	21.99	21.91	21.87	
3	QPSK	15	0	21.96	21.92	21.93	
3	16QAM	1	0	22.15	22.04	21.99	23.5
3	16QAM	1	8	22.12	22.15	22.19	
3	16QAM	1	14	22.17	22.22	22.09	
3	16QAM	8	0	20.89	20.96	20.95	22.5
3	16QAM	8	4	21.02	20.97	20.94	
3	16QAM	8	7	21.01	21.01	20.95	
3	16QAM	15	0	21.01	20.95	20.90	
Channel				23017	23095	23173	Tune-up limit (dBm)
Frequency (MHz)				699.7	707.5	715.3	
1.4	QPSK	1	0	22.80	22.88	22.70	24.5
1.4	QPSK	1	3	22.78	22.82	22.81	
1.4	QPSK	1	5	22.88	22.83	22.75	
1.4	QPSK	3	0	22.79	22.80	22.75	
1.4	QPSK	3	1	22.81	22.79	22.80	
1.4	QPSK	3	3	22.82	22.83	22.73	
1.4	QPSK	6	0	22.00	21.96	21.85	23.5
1.4	16QAM	1	0	22.17	22.07	22.07	23.5
1.4	16QAM	1	3	22.12	22.20	22.23	
1.4	16QAM	1	5	22.18	22.27	22.06	
1.4	16QAM	3	0	21.80	21.74	21.81	
1.4	16QAM	3	1	21.80	21.81	21.77	
1.4	16QAM	3	3	21.85	21.86	21.74	
1.4	16QAM	6	0	20.98	20.96	20.91	22.5



<LTE Band 12_Sensor ON>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23060	23095	23130	19
Frequency (MHz)				704	707.5	711	
10	QPSK	1	0	18.69	18.75	18.62	
10	QPSK	1	25	18.68	18.66	18.63	18
10	QPSK	1	49	18.69	18.65	18.62	
10	QPSK	25	0	17.74	17.77	17.69	
10	QPSK	25	12	17.74	17.76	17.74	18
10	QPSK	25	25	17.75	17.72	17.72	
10	QPSK	50	0	17.75	17.78	17.71	
10	16QAM	1	0	17.87	17.91	17.99	18
10	16QAM	1	25	17.88	17.87	17.98	
10	16QAM	1	49	17.85	17.88	18.00	
10	16QAM	25	0	16.80	16.74	16.73	17
10	16QAM	25	12	16.81	16.80	16.78	
10	16QAM	25	25	16.79	16.78	16.74	
10	16QAM	50	0	16.77	16.78	16.72	19
Channel				23035	23095	23155	
Frequency (MHz)				701.5	707.5	713.5	
5	QPSK	1	0	18.50	18.61	18.45	19
5	QPSK	1	12	18.51	18.46	18.53	
5	QPSK	1	24	18.58	18.48	18.48	
5	QPSK	12	0	17.63	17.63	17.59	18
5	QPSK	12	7	17.60	17.60	17.62	
5	QPSK	12	13	17.58	17.55	17.53	
5	QPSK	25	0	17.58	17.65	17.61	18
5	16QAM	1	0	17.73	17.78	17.88	
5	16QAM	1	12	17.71	17.70	17.88	
5	16QAM	1	24	17.75	17.74	17.83	17
5	16QAM	12	0	16.70	16.62	16.58	
5	16QAM	12	7	16.64	16.62	16.60	
5	16QAM	12	13	16.61	16.58	16.59	19
5	16QAM	25	0	16.57	16.67	16.52	
Channel				23025	23095	23165	
Frequency (MHz)				700.5	707.5	714.5	
3	QPSK	1	0	18.59	18.59	18.42	19
3	QPSK	1	8	18.56	18.56	18.48	
3	QPSK	1	14	18.50	18.53	18.49	
3	QPSK	8	0	17.63	17.60	17.49	18
3	QPSK	8	4	17.61	17.63	17.54	
3	QPSK	8	7	17.59	17.55	17.56	
3	QPSK	15	0	17.62	17.64	17.58	18
3	16QAM	1	0	17.74	17.80	17.79	
3	16QAM	1	8	17.70	17.71	17.88	
3	16QAM	1	14	17.67	17.74	17.85	17
3	16QAM	8	0	16.62	16.59	16.62	
3	16QAM	8	4	16.70	16.63	16.63	
3	16QAM	8	7	16.60	16.61	16.59	19
3	16QAM	15	0	16.63	16.59	16.57	
Channel				23017	23095	23173	
Frequency (MHz)				699.7	707.5	715.3	
1.4	QPSK	1	0	18.67	18.60	18.53	19
1.4	QPSK	1	3	18.71	18.69	18.61	
1.4	QPSK	1	5	18.63	18.59	18.54	
1.4	QPSK	3	0	18.73	18.65	18.61	18
1.4	QPSK	3	1	18.74	18.68	18.62	
1.4	QPSK	3	3	18.71	18.66	18.61	
1.4	QPSK	6	0	17.75	17.68	17.61	18
1.4	16QAM	1	0	18.00	17.97	17.89	18



FCC SAR TEST REPORT

Report No. : FA512519

1.4	16QAM	1	3	17.92	17.95	17.97	
1.4	16QAM	1	5	17.91	17.95	17.88	
1.4	16QAM	3	0	17.81	17.69	17.66	
1.4	16QAM	3	1	17.83	17.76	17.68	
1.4	16QAM	3	3	17.77	17.69	17.66	
1.4	16QAM	6	0	16.83	16.76	16.72	17

<LTE Band 13_Sensor OFF>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23230			
Frequency (MHz)				782			
10	QPSK	1	0		22.85		24.5
10	QPSK	1	25		22.80		
10	QPSK	1	49		22.67		
10	QPSK	25	0		21.97		23.5
10	QPSK	25	12		21.96		
10	QPSK	25	25		21.93		
10	QPSK	50	0		21.94		23.5
10	16QAM	1	0		21.88		
10	16QAM	1	25		22.05		
10	16QAM	1	49		21.98		22.5
10	16QAM	25	0		20.93		
10	16QAM	25	12		20.95		
10	16QAM	25	25		20.94		22.5
10	16QAM	50	0		20.92		
Channel				23205	23230	23255	Tune-up limit (dBm)
Frequency (MHz)				779.5	782	784.5	
5	QPSK	1	0	22.79	22.76	22.76	24.5
5	QPSK	1	12	22.70	22.71	22.77	
5	QPSK	1	24	22.62	22.60	22.62	
5	QPSK	12	0	21.94	21.89	21.92	23.5
5	QPSK	12	7	21.91	21.89	21.94	
5	QPSK	12	13	21.92	21.83	21.90	
5	QPSK	25	0	21.85	21.89	21.93	23.5
5	16QAM	1	0	21.80	21.86	21.86	
5	16QAM	1	12	22.00	21.98	21.99	
5	16QAM	1	24	21.93	21.97	21.93	22.5
5	16QAM	12	0	20.89	20.84	20.90	
5	16QAM	12	7	20.91	20.85	20.91	
5	16QAM	12	13	20.89	20.92	20.89	22.5
5	16QAM	25	0	20.89	20.83	20.87	



<LTE Band 13_Sensor ON>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23230			
Frequency (MHz)				782			
10	QPSK	1	0		17.70		18
10	QPSK	1	25		17.64		
10	QPSK	1	49		17.58		
10	QPSK	25	0		16.81		
10	QPSK	25	12		16.80		17
10	QPSK	25	25		16.77		
10	QPSK	50	0		16.80		
10	16QAM	1	0		16.99		
10	16QAM	1	25		16.95		17
10	16QAM	1	49		16.93		
10	16QAM	25	0		15.85		
10	16QAM	25	12		15.85		16
10	16QAM	25	25		15.79		
10	16QAM	50	0		15.83		
Channel				23205	23230	23255	
Frequency (MHz)				779.5	782	784.5	
5	QPSK	1	0	17.60	17.54	17.54	18
5	QPSK	1	12	17.46	17.51	17.45	
5	QPSK	1	24	17.43	17.48	17.46	
5	QPSK	12	0	16.68	16.66	16.61	
5	QPSK	12	7	16.67	16.60	16.64	17
5	QPSK	12	13	16.61	16.58	16.65	
5	QPSK	25	0	16.68	16.67	16.65	
5	16QAM	1	0	16.79	16.80	16.83	
5	16QAM	1	12	16.78	16.79	16.76	17
5	16QAM	1	24	16.83	16.77	16.76	
5	16QAM	12	0	15.65	15.75	15.73	
5	16QAM	12	7	15.71	15.74	15.69	16
5	16QAM	12	13	15.67	15.66	15.67	
5	16QAM	25	0	15.72	15.72	15.63	

<LTE Band 14_Sensor OFF>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23330			
Frequency (MHz)				793			
10	QPSK	1	0		22.78		24.5
10	QPSK	1	25		22.76		
10	QPSK	1	49		22.70		
10	QPSK	25	0		21.92		23.5
10	QPSK	25	12		21.91		
10	QPSK	25	25		21.85		
10	QPSK	50	0		21.87		23.5
10	16QAM	1	0		22.10		
10	16QAM	1	25		22.04		
10	16QAM	1	49		21.96		22.5
10	16QAM	25	0		20.88		
10	16QAM	25	12		20.91		
10	16QAM	25	25		20.83		22.5
10	16QAM	50	0		20.90		
Channel				23305	23330	23355	Tune-up limit (dBm)
Frequency (MHz)				790.5	793	795.5	
5	QPSK	1	0	22.73	22.75	22.73	24.5
5	QPSK	1	12	22.69	22.67	22.74	
5	QPSK	1	24	22.68	22.63	22.65	



FCC SAR TEST REPORT

Report No. : FA512519

5	QPSK	12	0	21.86	21.82	21.91	23.5
5	QPSK	12	7	21.88	21.84	21.81	
5	QPSK	12	13	21.76	21.83	21.84	
5	QPSK	25	0	21.81	21.85	21.78	
5	16QAM	1	0	22.00	22.05	22.06	23.5
5	16QAM	1	12	21.95	22.01	22.00	
5	16QAM	1	24	21.86	21.90	21.90	
5	16QAM	12	0	20.78	20.82	20.85	22.5
5	16QAM	12	7	20.83	20.82	20.89	
5	16QAM	12	13	20.78	20.81	20.77	
5	16QAM	25	0	20.82	20.89	20.81	

<LTE Band 14_Sensor ON>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23330			
Frequency (MHz)				793			
10	QPSK	1	0		17.68		18
10	QPSK	1	25		17.66		
10	QPSK	1	49		17.61		
10	QPSK	25	0		16.77		17
10	QPSK	25	12		16.76		
10	QPSK	25	25		16.70		
10	QPSK	50	0		16.74		17
10	16QAM	1	0		16.97		
10	16QAM	1	25		16.95		
10	16QAM	1	49		16.98		16
10	16QAM	25	0		15.78		
10	16QAM	25	12		15.81		
10	16QAM	25	25		15.77		16
10	16QAM	50	0		15.78		
Channel				23305	23330	23355	Tune-up limit (dBm)
Frequency (MHz)				790.5	793	795.5	
5	QPSK	1	0	17.53	17.57	17.54	18
5	QPSK	1	12	17.47	17.46	17.47	
5	QPSK	1	24	17.42	17.49	17.49	
5	QPSK	12	0	16.59	16.57	16.65	17
5	QPSK	12	7	16.58	16.59	16.59	
5	QPSK	12	13	16.60	16.53	16.59	
5	QPSK	25	0	16.56	16.59	16.58	17
5	16QAM	1	0	16.85	16.82	16.79	
5	16QAM	1	12	16.78	16.83	16.75	
5	16QAM	1	24	16.83	16.82	16.88	16
5	16QAM	12	0	15.68	15.61	15.59	
5	16QAM	12	7	15.61	15.63	15.63	
5	16QAM	12	13	15.59	15.63	15.59	16
5	16QAM	25	0	15.68	15.58	15.66	



<LTE Band 17_Sensor OFF>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23780	23790	23800	
Frequency (MHz)				709	710	711	
10	QPSK	1	0	22.99	23.02	22.87	
10	QPSK	1	25	22.98	22.94	22.95	24.5
10	QPSK	1	49	22.92	22.91	22.90	
10	QPSK	25	0	22.02	22.11	21.99	
10	QPSK	25	12	22.00	22.02	22.00	23.5
10	QPSK	25	25	22.10	22.01	21.98	
10	QPSK	50	0	22.12	22.13	22.08	
10	16QAM	1	0	22.27	22.19	22.14	23.5
10	16QAM	1	25	22.25	22.28	22.33	
10	16QAM	1	49	22.26	22.22	22.17	
10	16QAM	25	0	21.02	21.03	21.00	22.5
10	16QAM	25	12	21.07	21.06	21.06	
10	16QAM	25	25	21.02	21.04	21.01	
10	16QAM	50	0	21.05	21.01	21.01	
Channel				23755	23790	23825	Tune-up limit (dBm)
Frequency (MHz)				706.5	710	713.5	
5	QPSK	1	0	22.93	22.99	22.86	
5	QPSK	1	12	22.91	22.86	22.85	24.5
5	QPSK	1	24	22.85	22.90	22.89	
5	QPSK	12	0	21.95	21.97	21.92	
5	QPSK	12	7	21.92	21.94	21.94	23.5
5	QPSK	12	13	22.09	21.93	21.92	
5	QPSK	25	0	22.03	22.10	21.98	
5	16QAM	1	0	22.21	22.13	22.11	23.5
5	16QAM	1	12	22.16	22.24	22.31	
5	16QAM	1	24	22.19	22.13	22.07	
5	16QAM	12	0	20.98	21.00	20.98	22.5
5	16QAM	12	7	20.99	21.04	21.00	
5	16QAM	12	13	20.96	20.99	20.94	
5	16QAM	25	0	20.96	21.00	20.99	



<LTE Band 17_Sensor ON>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23780	23790	23800	
Frequency (MHz)				709	710	711	
10	QPSK	1	0	18.66	18.72	18.62	
10	QPSK	1	25	18.68	18.68	18.68	19
10	QPSK	1	49	18.66	18.64	18.66	
10	QPSK	25	0	17.75	17.79	17.75	
10	QPSK	25	12	17.78	17.76	17.78	18
10	QPSK	25	25	17.78	17.78	17.74	
10	QPSK	50	0	17.77	17.76	17.75	
10	16QAM	1	0	17.81	18.00	17.99	18
10	16QAM	1	25	17.86	17.84	17.84	
10	16QAM	1	49	17.84	17.85	17.83	
10	16QAM	25	0	16.76	16.76	16.78	17
10	16QAM	25	12	16.82	16.80	16.79	
10	16QAM	25	25	16.78	16.79	16.77	
10	16QAM	50	0	16.78	16.78	16.76	
Channel				23755	23790	23825	
Frequency (MHz)				706.5	710	713.5	
5	QPSK	1	0	18.47	18.60	18.47	19
5	QPSK	1	12	18.56	18.52	18.49	
5	QPSK	1	24	18.46	18.51	18.47	
5	QPSK	12	0	17.60	17.61	17.63	18
5	QPSK	12	7	17.59	17.66	17.58	
5	QPSK	12	13	17.62	17.65	17.56	
5	QPSK	25	0	17.62	17.64	17.60	18
5	16QAM	1	0	17.65	17.88	17.87	
5	16QAM	1	12	17.75	17.67	17.65	
5	16QAM	1	24	17.72	17.67	17.65	17
5	16QAM	12	0	16.56	16.66	16.62	
5	16QAM	12	7	16.70	16.65	16.67	
5	16QAM	12	13	16.58	16.60	16.57	17
5	16QAM	25	0	16.62	16.58	16.61	



<LTE Band 25_Sensor OFF>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26140	26340	26590	
Frequency (MHz)				1860	1880	1905	
20	QPSK	1	0	23.15	23.18	23.16	
20	QPSK	1	49	23.14	23.17	23.14	24.5
20	QPSK	1	99	23.02	23.14	23.10	
20	QPSK	50	0	22.31	22.35	22.32	
20	QPSK	50	24	22.21	22.29	22.28	23.5
20	QPSK	50	50	22.16	22.27	22.28	
20	QPSK	100	0	22.17	22.36	22.34	
20	16QAM	1	0	22.46	22.53	22.54	23.5
20	16QAM	1	49	22.46	22.48	22.44	
20	16QAM	1	99	22.32	22.42	22.37	
20	16QAM	50	0	21.30	21.35	21.37	22.5
20	16QAM	50	24	21.34	21.34	21.29	
20	16QAM	50	50	21.18	21.30	21.29	
20	16QAM	100	0	21.19	21.30	21.37	
Channel				26115	26340	26615	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1907.5	
15	QPSK	1	0	23.05	23.09	23.06	
15	QPSK	1	37	23.13	23.13	23.12	24.5
15	QPSK	1	74	22.92	23.09	23.09	
15	QPSK	36	0	22.24	22.32	22.23	
15	QPSK	36	20	22.23	22.21	22.27	23.5
15	QPSK	36	39	22.14	22.24	22.25	
15	QPSK	75	0	22.11	22.23	22.32	
15	16QAM	1	0	22.45	22.52	22.51	23.5
15	16QAM	1	37	22.41	22.38	22.34	
15	16QAM	1	74	22.30	22.37	22.34	
15	16QAM	36	0	21.29	21.30	21.27	22.5
15	16QAM	36	20	21.30	21.30	21.28	
15	16QAM	36	39	21.11	21.21	21.25	
15	16QAM	75	0	21.14	21.22	21.36	
Channel				26090	26340	26640	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1910	
10	QPSK	1	0	23.12	23.11	23.11	
10	QPSK	1	25	23.09	23.12	23.11	24.5
10	QPSK	1	49	22.94	23.11	23.03	
10	QPSK	25	0	22.28	22.26	22.27	
10	QPSK	25	12	22.30	22.27	22.27	23.5
10	QPSK	25	25	22.13	22.24	22.22	
10	QPSK	50	0	22.15	22.21	22.24	
10	16QAM	1	0	22.36	22.44	22.47	23.5
10	16QAM	1	25	22.40	22.43	22.38	
10	16QAM	1	49	22.30	22.40	22.30	
10	16QAM	25	0	21.22	21.32	21.32	22.5
10	16QAM	25	12	21.33	21.30	21.22	
10	16QAM	25	25	21.15	21.29	21.19	
10	16QAM	50	0	21.10	21.29	21.32	
Channel				26065	26340	26665	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1880	1912.5	
5	QPSK	1	0	23.08	23.10	23.12	
5	QPSK	1	12	23.05	23.15	23.11	24.5
5	QPSK	1	24	22.92	23.12	23.02	
5	QPSK	12	0	22.24	22.33	22.29	
5	QPSK	12	7	22.27	22.23	22.19	23.5
5	QPSK	12	13	22.15	22.22	22.26	
5	QPSK	25	0	22.07	22.27	22.33	
5	16QAM	1	0	22.38	22.48	22.48	23.5



FCC SAR TEST REPORT

Report No. : FA512519

5	16QAM	1	12	22.40	22.42	22.43	22.5
5	16QAM	1	24	22.26	22.34	22.35	
5	16QAM	12	0	21.22	21.33	21.27	
5	16QAM	12	7	21.29	21.30	21.27	
5	16QAM	12	13	21.16	21.22	21.21	
5	16QAM	25	0	21.10	21.28	21.27	Tune-up limit (dBm)
Channel				26055	26340	26675	
Frequency (MHz)				1851.5	1880	1913.5	24.5
3	QPSK	1	0	23.09	23.13	23.08	
3	QPSK	1	8	23.04	23.12	23.06	
3	QPSK	1	14	22.96	23.06	23.01	
3	QPSK	8	0	22.23	22.33	22.29	23.5
3	QPSK	8	4	22.22	22.27	22.20	
3	QPSK	8	7	22.06	22.21	22.24	
3	QPSK	15	0	22.11	22.23	22.32	
3	16QAM	1	0	22.44	22.43	22.51	23.5
3	16QAM	1	8	22.39	22.43	22.38	
3	16QAM	1	14	22.25	22.34	22.34	
3	16QAM	8	0	21.27	21.32	21.29	22.5
3	16QAM	8	4	21.32	21.28	21.20	
3	16QAM	8	7	21.16	21.29	21.23	
3	16QAM	15	0	21.15	21.29	21.29	
Channel				26047	26340	26683	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1914.3	
1.4	QPSK	1	0	23.07	23.16	23.12	24.5
1.4	QPSK	1	3	23.07	23.09	23.05	
1.4	QPSK	1	5	22.98	23.11	23.01	
1.4	QPSK	3	0	23.09	23.17	23.05	
1.4	QPSK	3	1	23.13	23.08	23.02	
1.4	QPSK	3	3	22.95	23.03	23.07	
1.4	QPSK	6	0	22.07	22.27	22.32	23.5
1.4	16QAM	1	0	22.36	22.47	22.53	23.5
1.4	16QAM	1	3	22.41	22.40	22.34	
1.4	16QAM	1	5	22.29	22.36	22.29	
1.4	16QAM	3	0	22.07	22.08	22.18	
1.4	16QAM	3	1	22.14	22.14	22.03	
1.4	16QAM	3	3	21.96	22.07	22.09	
1.4	16QAM	6	0	21.11	21.20	21.30	22.5



<LTE Band 25_Sensor ON>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26140	26340	26590	14
Frequency (MHz)				1860	1880	1905	
20	QPSK	1	0	13.19	13.56	13.47	
20	QPSK	1	49	13.26	13.37	13.47	13
20	QPSK	1	99	13.13	13.37	13.35	
20	QPSK	50	0	12.30	12.55	12.52	
20	QPSK	50	24	12.29	12.42	12.51	13
20	QPSK	50	50	12.16	12.38	12.51	
20	QPSK	100	0	12.15	12.59	12.37	
20	16QAM	1	0	12.59	12.74	12.86	13
20	16QAM	1	49	12.64	12.80	12.87	
20	16QAM	1	99	12.50	12.72	12.86	
20	16QAM	50	0	11.34	11.46	11.60	12
20	16QAM	50	24	11.35	11.47	11.59	
20	16QAM	50	50	11.21	11.45	11.57	
20	16QAM	100	0	11.23	11.46	11.63	14
Channel				26115	26340	26615	
Frequency (MHz)				1857.5	1880	1907.5	
15	QPSK	1	0	13.05	13.37	13.36	14
15	QPSK	1	37	13.10	13.18	13.33	
15	QPSK	1	74	13.01	13.19	13.24	
15	QPSK	36	0	12.15	12.42	12.33	13
15	QPSK	36	20	12.10	12.24	12.32	
15	QPSK	36	39	12.02	12.24	12.37	
15	QPSK	75	0	11.97	12.25	12.49	13
15	16QAM	1	0	12.41	12.59	12.76	
15	16QAM	1	37	12.45	12.68	12.70	
15	16QAM	1	74	12.35	12.60	12.72	12
15	16QAM	36	0	11.16	11.36	11.45	
15	16QAM	36	20	11.24	11.31	11.42	
15	16QAM	36	39	11.08	11.28	11.37	14
15	16QAM	75	0	11.08	11.34	11.46	
Channel				26090	26340	26640	
Frequency (MHz)				1855	1880	1910	14
10	QPSK	1	0	13.02	13.30	13.32	
10	QPSK	1	25	13.16	13.19	13.37	
10	QPSK	1	49	13.00	13.25	13.16	13
10	QPSK	25	0	12.13	12.41	12.32	
10	QPSK	25	12	12.09	12.31	12.33	
10	QPSK	25	25	12.02	12.26	12.35	13
10	QPSK	50	0	12.02	12.27	12.47	
10	16QAM	1	0	12.44	12.55	12.73	
10	16QAM	1	25	12.46	12.70	12.68	12
10	16QAM	1	49	12.40	12.57	12.70	
10	16QAM	25	0	11.15	11.32	11.45	
10	16QAM	25	12	11.15	11.33	11.44	14
10	16QAM	25	25	11.11	11.33	11.42	
10	16QAM	50	0	11.04	11.30	11.48	
Channel				26065	26340	26665	14
Frequency (MHz)				1852.5	1880	1912.5	
5	QPSK	1	0	13.01	13.38	13.34	
5	QPSK	1	12	13.10	13.19	13.33	13
5	QPSK	1	24	12.94	13.24	13.17	
5	QPSK	12	0	12.06	12.39	12.32	
5	QPSK	12	7	12.14	12.25	12.34	13
5	QPSK	12	13	12.05	12.24	12.32	
5	QPSK	25	0	11.96	12.27	12.39	
5	16QAM	1	0	12.41	12.56	12.76	13



FCC SAR TEST REPORT

Report No. : FA512519

5	16QAM	1	12	12.54	12.67	12.69	12
5	16QAM	1	24	12.35	12.55	12.75	
5	16QAM	12	0	11.17	11.32	11.50	
5	16QAM	12	7	11.18	11.30	11.46	
5	16QAM	12	13	11.05	11.26	11.41	
5	16QAM	25	0	11.08	11.30	11.46	Tune-up limit (dBm)
Channel				26055	26340	26675	
Frequency (MHz)				1851.5	1880	1913.5	14
3	QPSK	1	0	13.07	13.31	13.30	
3	QPSK	1	8	13.13	13.21	13.31	
3	QPSK	1	14	12.95	13.21	13.18	
3	QPSK	8	0	12.13	12.36	12.40	
3	QPSK	8	4	12.12	12.25	12.35	13
3	QPSK	8	7	11.97	12.24	12.40	
3	QPSK	15	0	12.02	12.17	12.42	
3	16QAM	1	0	12.41	12.62	12.68	13
3	16QAM	1	8	12.53	12.64	12.67	
3	16QAM	1	14	12.34	12.60	12.68	
3	16QAM	8	0	11.23	11.27	11.48	12
3	16QAM	8	4	11.16	11.34	11.45	
3	16QAM	8	7	11.02	11.34	11.42	
3	16QAM	15	0	11.06	11.36	11.50	
Channel				26047	26340	26683	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1914.3	
1.4	QPSK	1	0	13.04	13.24	13.43	14
1.4	QPSK	1	3	13.13	13.34	13.53	
1.4	QPSK	1	5	13.05	13.26	13.44	
1.4	QPSK	3	0	13.10	13.32	13.50	
1.4	QPSK	3	1	13.14	13.35	13.53	
1.4	QPSK	3	3	13.09	13.32	13.49	
1.4	QPSK	6	0	12.06	12.27	12.45	13
1.4	16QAM	1	0	12.43	12.68	12.79	13
1.4	16QAM	1	3	12.54	12.74	12.90	
1.4	16QAM	1	5	12.43	12.63	12.81	
1.4	16QAM	3	0	12.19	12.37	12.56	
1.4	16QAM	3	1	12.23	12.44	12.62	
1.4	16QAM	3	3	12.15	12.38	12.56	
1.4	16QAM	6	0	11.21	11.41	11.56	12

<LTE Band 26_Sensor OFF>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26765	26865	26965	Tune-up limit (dBm)
Frequency (MHz)				821.5	831.5	841.5	
15	QPSK	1	0	22.81	22.85	22.74	24.5
15	QPSK	1	37	22.78	22.75	22.75	
15	QPSK	1	74	22.83	22.70	22.70	
15	QPSK	36	0	22.03	22.06	21.91	23.5
15	QPSK	36	20	22.02	21.87	21.81	
15	QPSK	36	39	21.98	21.81	21.84	
15	QPSK	75	0	22.02	22.05	21.75	23.5
15	16QAM	1	0	22.18	22.10	22.08	
15	16QAM	1	37	22.08	22.11	22.07	
15	16QAM	1	74	22.15	22.03	21.98	22.5
15	16QAM	36	0	20.93	20.91	20.81	
15	16QAM	36	20	21.07	20.91	20.84	
15	16QAM	36	39	21.00	20.84	20.91	
15	16QAM	75	0	21.06	20.88	20.82	Tune-up limit (dBm)
Channel				26740	26865	26990	
Frequency (MHz)				819	831.5	844	Tune-up limit (dBm)
10	QPSK	1	0	22.66	22.71	22.63	



FCC SAR TEST REPORT

Report No. : FA512519

10	QPSK	1	25	22.60	22.56	22.57	23.5
10	QPSK	1	49	22.71	22.59	22.58	
10	QPSK	25	0	21.72	21.66	21.66	
10	QPSK	25	12	21.86	21.75	21.68	
10	QPSK	25	25	21.79	21.68	21.69	
10	QPSK	50	0	21.86	21.69	21.63	23.5
10	16QAM	1	0	22.00	21.94	21.92	
10	16QAM	1	25	21.96	21.94	21.95	
10	16QAM	1	49	21.97	21.93	21.82	22.5
10	16QAM	25	0	20.82	20.78	20.69	
10	16QAM	25	12	20.89	20.79	20.69	
10	16QAM	25	25	20.82	20.71	20.71	
10	16QAM	50	0	20.93	20.68	20.64	
Channel				26715	26865	27015	Tune-up limit (dBm)
Frequency (MHz)				816.5	831.5	846.5	
5	QPSK	1	0	22.63	22.71	22.63	24.5
5	QPSK	1	12	22.65	22.63	22.56	
5	QPSK	1	24	22.68	22.55	22.52	
5	QPSK	12	0	21.77	21.75	21.70	23.5
5	QPSK	12	7	21.85	21.68	21.67	
5	QPSK	12	13	21.80	21.68	21.74	
5	QPSK	25	0	21.87	21.64	21.57	
5	16QAM	1	0	22.04	21.96	21.91	23.5
5	16QAM	1	12	21.91	21.98	21.92	
5	16QAM	1	24	21.98	21.89	21.79	
5	16QAM	12	0	20.77	20.75	20.66	22.5
5	16QAM	12	7	20.93	20.75	20.73	
5	16QAM	12	13	20.82	20.68	20.74	
5	16QAM	25	0	20.91	20.76	20.72	
Channel				26705	26865	27025	Tune-up limit (dBm)
Frequency (MHz)				815.5	831.5	847.5	
3	QPSK	1	0	22.64	22.70	22.62	24.5
3	QPSK	1	8	22.58	22.61	22.57	
3	QPSK	1	14	22.64	22.55	22.50	
3	QPSK	8	0	21.78	21.71	21.63	23.5
3	QPSK	8	4	21.82	21.76	21.68	
3	QPSK	8	7	21.79	21.62	21.72	
3	QPSK	15	0	21.87	21.65	21.58	
3	16QAM	1	0	22.06	21.96	21.90	23.5
3	16QAM	1	8	21.98	21.91	21.93	
3	16QAM	1	14	21.96	21.93	21.81	
3	16QAM	8	0	20.80	20.72	20.68	22.5
3	16QAM	8	4	20.96	20.71	20.74	
3	16QAM	8	7	20.85	20.67	20.81	
3	16QAM	15	0	20.90	20.78	20.70	
Channel				26697	26865	27033	Tune-up limit (dBm)
Frequency (MHz)				814.7	831.5	848.3	
1.4	QPSK	1	0	22.66	22.68	22.58	24.5
1.4	QPSK	1	3	22.60	22.62	22.61	
1.4	QPSK	1	5	22.69	22.60	22.56	
1.4	QPSK	3	0	22.53	22.54	22.64	
1.4	QPSK	3	1	22.68	22.56	22.67	
1.4	QPSK	3	3	22.66	22.51	22.67	23.5
1.4	QPSK	6	0	21.92	21.64	21.55	
1.4	16QAM	1	0	22.03	21.92	21.90	23.5
1.4	16QAM	1	3	21.88	21.99	21.91	
1.4	16QAM	1	5	22.03	21.87	21.88	
1.4	16QAM	3	0	21.58	21.55	21.66	
1.4	16QAM	3	1	21.70	21.53	21.55	
1.4	16QAM	3	3	21.61	21.67	21.57	
1.4	16QAM	6	0	20.86	20.72	20.69	22.5



<LTE Band 26_Sensor ON>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26765	26865	26965	17.5
Frequency (MHz)				821.5	831.5	841.5	
15	QPSK	1	0	17.21	17.36	17.23	
15	QPSK	1	37	17.15	17.23	17.25	16.5
15	QPSK	1	74	17.12	17.20	17.19	
15	QPSK	36	0	16.21	16.29	16.25	
15	QPSK	36	20	16.19	16.27	16.24	16.5
15	QPSK	36	39	16.13	16.21	16.23	
15	QPSK	75	0	16.19	16.27	16.22	
15	16QAM	1	0	16.26	16.34	16.29	16.5
15	16QAM	1	37	16.41	16.49	16.40	
15	16QAM	1	74	16.34	16.42	16.45	
15	16QAM	36	0	15.26	15.33	15.25	15.5
15	16QAM	36	20	15.26	15.33	15.22	
15	16QAM	36	39	15.17	15.24	15.28	
15	16QAM	75	0	15.21	15.28	15.20	17.5
Channel				26740	26865	26990	
Frequency (MHz)				819	831.5	844	
10	QPSK	1	0	17.02	17.16	17.12	16.5
10	QPSK	1	25	17.04	17.11	17.10	
10	QPSK	1	49	17.00	17.06	17.08	
10	QPSK	25	0	16.03	16.14	16.01	16.5
10	QPSK	25	12	16.05	16.16	16.07	
10	QPSK	25	25	15.99	16.01	16.12	
10	QPSK	50	0	16.03	16.09	16.06	16.5
10	16QAM	1	0	16.11	16.14	16.16	
10	16QAM	1	25	16.29	16.32	16.29	
10	16QAM	1	49	16.17	16.23	16.34	15.5
10	16QAM	25	0	15.07	15.23	15.08	
10	16QAM	25	12	15.09	15.23	15.12	
10	16QAM	25	25	15.01	15.09	15.08	17.5
10	16QAM	50	0	15.11	15.10	15.02	
Channel				26715	26865	27015	
Frequency (MHz)				816.5	831.5	846.5	17.5
5	QPSK	1	0	17.02	17.09	17.06	
5	QPSK	1	12	17.02	17.11	17.08	
5	QPSK	1	24	16.98	17.00	17.07	16.5
5	QPSK	12	0	16.05	16.09	16.05	
5	QPSK	12	7	16.04	16.17	16.13	
5	QPSK	12	13	16.02	16.07	16.16	16.5
5	QPSK	25	0	16.00	16.09	16.03	
5	16QAM	1	0	16.07	16.18	16.19	
5	16QAM	1	12	16.29	16.39	16.23	15.5
5	16QAM	1	24	16.22	16.25	16.28	
5	16QAM	12	0	15.11	15.21	15.14	
5	16QAM	12	7	15.10	15.19	15.05	17.5
5	16QAM	12	13	14.99	15.12	15.14	
5	16QAM	25	0	15.04	15.10	15.04	
Channel				26705	26865	27025	17.5
Frequency (MHz)				815.5	831.5	847.5	
3	QPSK	1	0	17.11	17.19	17.11	
3	QPSK	1	8	16.99	17.04	17.13	16.5
3	QPSK	1	14	16.95	17.10	17.02	
3	QPSK	8	0	16.11	16.10	16.09	
3	QPSK	8	4	16.06	16.17	16.06	16.5
3	QPSK	8	7	16.01	16.10	16.16	
3	QPSK	15	0	16.04	16.15	16.06	
3	16QAM	1	0	16.14	16.24	16.18	16.5



FCC SAR TEST REPORT

Report No. : FA512519

3	16QAM	1	8	16.27	16.35	16.27	15.5
3	16QAM	1	14	16.14	16.25	16.28	
3	16QAM	8	0	15.10	15.13	15.08	
3	16QAM	8	4	15.08	15.21	15.04	
3	16QAM	8	7	15.02	15.07	15.09	
3	16QAM	15	0	15.01	15.11	15.05	
Channel				26697	26865	27033	Tune-up limit (dBm)
Frequency (MHz)				814.7	831.5	848.3	
1.4	QPSK	1	0	17.26	17.15	17.14	17.5
1.4	QPSK	1	3	17.32	17.25	17.18	
1.4	QPSK	1	5	17.25	17.14	17.11	
1.4	QPSK	3	0	17.33	17.23	17.22	
1.4	QPSK	3	1	17.35	17.24	17.22	
1.4	QPSK	3	3	17.34	17.22	17.18	
1.4	QPSK	6	0	16.29	16.16	16.19	16.5
1.4	16QAM	1	0	16.48	16.50	16.47	16.5
1.4	16QAM	1	3	16.32	16.48	16.34	
1.4	16QAM	1	5	16.39	16.48	16.43	
1.4	16QAM	3	0	16.36	16.26	16.27	
1.4	16QAM	3	1	16.40	16.32	16.27	
1.4	16QAM	3	3	16.35	16.26	16.21	
1.4	16QAM	6	0	15.42	15.32	15.27	15.5

<LTE Band 30_Sensor OFF>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				27710			
Frequency (MHz)				2310			
10	QPSK	1	0		21.12		23
10	QPSK	1	25		21.08		
10	QPSK	1	49		21.09		
10	QPSK	25	0		20.28		22
10	QPSK	25	12		20.22		
10	QPSK	25	25		20.16		
10	QPSK	50	0		20.19		
10	16QAM	1	0		20.23		22
10	16QAM	1	25		20.37		
10	16QAM	1	49		20.39		
10	16QAM	25	0		19.20		21
10	16QAM	25	12		19.22		
10	16QAM	25	25		19.18		
10	16QAM	50	0		19.18		
Channel				27685	27710	27735	Tune-up limit (dBm)
Frequency (MHz)				2307.5	2310	2312.5	
5	QPSK	1	0	21.03	21.07	21.02	23
5	QPSK	1	12	21.01	21.07	21.04	
5	QPSK	1	24	21.05	21.03	21.04	
5	QPSK	12	0	20.19	20.26	20.22	22
5	QPSK	12	7	20.14	20.13	20.17	
5	QPSK	12	13	20.08	20.08	20.08	
5	QPSK	25	0	20.15	20.10	20.18	
5	16QAM	1	0	20.21	20.18	20.19	22
5	16QAM	1	12	20.34	20.35	20.31	
5	16QAM	1	24	20.35	20.30	20.37	
5	16QAM	12	0	19.18	19.19	19.11	21
5	16QAM	12	7	19.20	19.20	19.13	
5	16QAM	12	13	19.17	19.08	19.08	
5	16QAM	25	0	19.09	19.09	19.08	



<LTE Band 30_Sensor ON>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				27710			
Frequency (MHz)				2310			
10	QPSK	1	0		11.85		12.5
10	QPSK	1	25		11.79		
10	QPSK	1	49		11.84		
10	QPSK	25	0		10.92		11.5
10	QPSK	25	12		10.90		
10	QPSK	25	25		10.90		
10	QPSK	50	0		10.91		
10	16QAM	1	0		11.05		11.5
10	16QAM	1	25		11.09		
10	16QAM	1	49		11.12		
10	16QAM	25	0		9.84		10.5
10	16QAM	25	12		9.88		
10	16QAM	25	25		9.86		
10	16QAM	50	0		9.87		
Channel				27685	27710	27735	Tune-up limit (dBm)
Frequency (MHz)				2307.5	2310	2312.5	
5	QPSK	1	0	11.73	11.73	11.74	12.5
5	QPSK	1	12	11.61	11.62	11.59	
5	QPSK	1	24	11.73	11.73	11.72	
5	QPSK	12	0	10.75	10.74	10.82	11.5
5	QPSK	12	7	10.71	10.72	10.71	
5	QPSK	12	13	10.71	10.74	10.76	
5	QPSK	25	0	10.75	10.75	10.78	
5	16QAM	1	0	10.92	10.85	10.89	11.5
5	16QAM	1	12	10.95	10.90	10.98	
5	16QAM	1	24	11.02	10.92	10.95	
5	16QAM	12	0	9.69	9.70	9.73	10.5
5	16QAM	12	7	9.71	9.68	9.77	
5	16QAM	12	13	9.74	9.72	9.68	
5	16QAM	25	0	9.76	9.68	9.67	

<LTE Band 66_Sensor OFF>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				132072	132322	132572	
Frequency (MHz)				1720	1745	1770	
20	QPSK	1	0	22.89	23.06	22.57	24.5
20	QPSK	1	49	22.58	23.02	22.55	
20	QPSK	1	99	22.54	22.97	22.52	
20	QPSK	50	0	21.60	22.18	21.61	23.5
20	QPSK	50	24	21.57	22.17	21.55	
20	QPSK	50	50	21.59	22.11	21.59	
20	QPSK	100	0	21.57	22.11	21.54	23.5
20	16QAM	1	0	21.77	22.27	21.76	
20	16QAM	1	49	21.80	22.29	21.65	
20	16QAM	1	99	21.76	22.24	21.63	22.5
20	16QAM	50	0	20.56	21.13	20.58	
20	16QAM	50	24	20.59	21.13	20.59	
20	16QAM	50	50	20.62	21.10	20.55	
20	16QAM	100	0	20.58	21.09	20.58	Tune-up limit (dBm)
Channel				132047	132322	132597	
Frequency (MHz)				1717.5	1745	1772.5	24.5
15	QPSK	1	0	22.85	23.05	22.56	
15	QPSK	1	37	22.59	22.98	22.55	
15	QPSK	1	74	22.57	23.00	22.51	



FCC SAR TEST REPORT

Report No. : FA512519

15	QPSK	36	0	21.63	22.18	21.60	23.5
15	QPSK	36	20	21.54	22.15	21.51	
15	QPSK	36	39	21.62	22.13	21.62	
15	QPSK	75	0	21.56	22.09	21.52	
15	16QAM	1	0	21.82	22.29	21.73	23.5
15	16QAM	1	37	21.79	22.32	21.68	
15	16QAM	1	74	21.73	22.29	21.64	
15	16QAM	36	0	20.57	21.16	20.54	22.5
15	16QAM	36	20	20.55	21.14	20.56	
15	16QAM	36	39	20.64	21.10	20.57	
15	16QAM	75	0	20.62	21.06	20.59	
Channel				132022	132322	132622	Tune-up limit (dBm)
Frequency (MHz)				1715	1745	1775	
10	QPSK	1	0	22.89	23.05	22.59	24.5
10	QPSK	1	25	22.54	23.05	22.57	
10	QPSK	1	49	22.50	22.99	22.52	
10	QPSK	25	0	21.56	22.18	21.66	23.5
10	QPSK	25	12	21.61	22.15	21.60	
10	QPSK	25	25	21.57	22.10	21.58	
10	QPSK	50	0	21.55	22.14	21.59	
10	16QAM	1	0	21.73	22.29	21.73	23.5
10	16QAM	1	25	21.84	22.33	21.63	
10	16QAM	1	49	21.72	22.26	21.62	
10	16QAM	25	0	20.58	21.18	20.56	22.5
10	16QAM	25	12	20.60	21.16	20.61	
10	16QAM	25	25	20.66	21.14	20.59	
10	16QAM	50	0	20.63	21.10	20.55	
Channel				131997	132322	132647	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1745	1777.5	
5	QPSK	1	0	22.85	23.05	22.60	24.5
5	QPSK	1	12	22.54	22.98	22.54	
5	QPSK	1	24	22.51	22.99	22.53	
5	QPSK	12	0	21.56	22.17	21.62	23.5
5	QPSK	12	7	21.54	22.19	21.59	
5	QPSK	12	13	21.61	22.14	21.61	
5	QPSK	25	0	21.60	22.08	21.56	
5	16QAM	1	0	21.76	22.28	21.72	23.5
5	16QAM	1	12	21.85	22.34	21.61	
5	16QAM	1	24	21.77	22.20	21.67	
5	16QAM	12	0	20.53	21.13	20.62	22.5
5	16QAM	12	7	20.59	21.12	20.60	
5	16QAM	12	13	20.64	21.10	20.51	
5	16QAM	25	0	20.56	21.13	20.58	
Channel				131987	132322	132657	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1745	1778.5	
3	QPSK	1	0	22.90	23.02	22.62	24.5
3	QPSK	1	8	22.61	23.00	22.53	
3	QPSK	1	14	22.50	22.97	22.50	
3	QPSK	8	0	21.63	22.17	21.60	23.5
3	QPSK	8	4	21.56	22.14	21.53	
3	QPSK	8	7	21.56	22.09	21.59	
3	QPSK	15	0	21.56	22.13	21.50	
3	16QAM	1	0	21.78	22.23	21.79	23.5
3	16QAM	1	8	21.85	22.26	21.66	
3	16QAM	1	14	21.72	22.28	21.59	
3	16QAM	8	0	20.53	21.09	20.56	22.5
3	16QAM	8	4	20.55	21.14	20.56	
3	16QAM	8	7	20.64	21.09	20.55	
3	16QAM	15	0	20.59	21.06	20.62	
Channel				131979	132322	132665	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1745	1779.3	
1.4	QPSK	1	0	22.89	22.95	22.55	24.5
1.4	QPSK	1	3	22.56	22.91	22.51	



FCC SAR TEST REPORT

Report No. : FA512519

1.4	QPSK	1	5	22.54	22.98	22.59	
1.4	QPSK	3	0	22.63	22.95	22.60	
1.4	QPSK	3	1	22.58	22.99	22.58	
1.4	QPSK	3	3	22.52	22.89	22.59	
1.4	QPSK	6	0	21.51	22.05	22.29	23.5
1.4	16QAM	1	0	21.74	22.14	21.69	23.5
1.4	16QAM	1	3	21.76	22.23	21.62	
1.4	16QAM	1	5	21.64	22.19	22.35	
1.4	16QAM	3	0	21.54	21.92	21.59	
1.4	16QAM	3	1	21.53	21.92	21.52	
1.4	16QAM	3	3	21.63	21.87	21.59	22.5
1.4	16QAM	6	0	21.35	21.01	20.60	

<LTE Band 66_Sensor ON>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				132072	132322	132572	
Frequency (MHz)				1720	1745	1770	
20	QPSK	1	0	13.63	13.68	13.40	14
20	QPSK	1	49	13.51	13.44	13.35	
20	QPSK	1	99	13.57	13.34	13.29	
20	QPSK	50	0	12.67	12.69	12.42	13
20	QPSK	50	24	12.66	12.47	12.41	
20	QPSK	50	50	12.62	12.39	12.37	
20	QPSK	100	0	12.47	12.64	12.40	
20	16QAM	1	0	12.94	12.91	12.78	13
20	16QAM	1	49	12.90	12.82	12.74	
20	16QAM	1	99	12.95	12.78	12.71	
20	16QAM	50	0	11.73	11.56	11.42	12
20	16QAM	50	24	11.77	11.55	11.45	
20	16QAM	50	50	11.67	11.46	11.42	
20	16QAM	100	0	11.68	11.48	11.43	
Channel				132047	132322	132597	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1745	1772.5	
15	QPSK	1	0	13.53	13.57	13.29	14
15	QPSK	1	37	13.41	13.26	13.16	
15	QPSK	1	74	13.43	13.14	13.19	
15	QPSK	36	0	12.35	12.55	12.21	13
15	QPSK	36	20	12.48	12.30	12.23	
15	QPSK	36	39	12.43	12.22	12.25	
15	QPSK	75	0	12.54	12.37	12.29	
15	16QAM	1	0	12.84	12.73	12.66	13
15	16QAM	1	37	12.76	12.69	12.58	
15	16QAM	1	74	12.80	12.66	12.54	
15	16QAM	36	0	11.60	11.42	11.30	12
15	16QAM	36	20	11.58	11.45	11.27	
15	16QAM	36	39	11.52	11.35	11.24	
15	16QAM	75	0	11.55	11.31	11.32	
Channel				132022	132322	132622	Tune-up limit (dBm)
Frequency (MHz)				1715	1745	1775	
10	QPSK	1	0	13.47	13.50	13.24	14
10	QPSK	1	25	13.38	13.34	13.23	
10	QPSK	1	49	13.43	13.19	13.14	
10	QPSK	25	0	12.40	12.55	12.23	13
10	QPSK	25	12	12.55	12.30	12.27	
10	QPSK	25	25	12.42	12.26	12.25	
10	QPSK	50	0	12.51	12.30	12.20	
10	16QAM	1	0	12.81	12.77	12.68	13
10	16QAM	1	25	12.77	12.67	12.59	
10	16QAM	1	49	12.84	12.62	12.60	
10	16QAM	25	0	11.63	11.44	11.27	12



FCC SAR TEST REPORT

Report No. : FA512519

10	16QAM	25	12	11.63	11.36	11.25	
10	16QAM	25	25	11.56	11.33	11.23	
10	16QAM	50	0	11.52	11.38	11.32	
Channel				131997	132322	132647	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1745	1777.5	
5	QPSK	1	0	13.53	13.53	13.24	14
5	QPSK	1	12	13.39	13.25	13.16	
5	QPSK	1	24	13.47	13.16	13.14	
5	QPSK	12	0	12.38	12.51	12.23	13
5	QPSK	12	7	12.53	12.36	12.29	
5	QPSK	12	13	12.44	12.22	12.18	
5	QPSK	25	0	12.51	12.30	12.23	13
5	16QAM	1	0	12.84	12.77	12.63	
5	16QAM	1	12	12.80	12.70	12.59	
5	16QAM	1	24	12.84	12.66	12.51	12
5	16QAM	12	0	11.63	11.36	11.22	
5	16QAM	12	7	11.63	11.39	11.32	
5	16QAM	12	13	11.47	11.30	11.31	12
5	16QAM	25	0	11.57	11.29	11.31	
Channel				131987	132322	132657	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1745	1778.5	
3	QPSK	1	0	13.45	13.55	13.26	14
3	QPSK	1	8	13.33	13.30	13.17	
3	QPSK	1	14	13.43	13.21	13.16	
3	QPSK	8	0	12.38	12.52	12.25	13
3	QPSK	8	4	12.54	12.30	12.27	
3	QPSK	8	7	12.44	12.29	12.22	
3	QPSK	15	0	12.52	12.29	12.24	13
3	16QAM	1	0	12.74	12.81	12.68	
3	16QAM	1	8	12.74	12.69	12.64	
3	16QAM	1	14	12.84	12.68	12.53	12
3	16QAM	8	0	11.53	11.45	11.30	
3	16QAM	8	4	11.57	11.35	11.27	
3	16QAM	8	7	11.56	11.32	11.27	12
3	16QAM	15	0	11.55	11.30	11.24	
Channel				131979	132322	132665	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1745	1779.3	
1.4	QPSK	1	0	13.49	13.32	13.18	14
1.4	QPSK	1	3	13.62	13.30	13.25	
1.4	QPSK	1	5	13.51	13.32	13.17	
1.4	QPSK	3	0	13.57	13.33	13.24	13
1.4	QPSK	3	1	13.59	13.41	13.25	
1.4	QPSK	3	3	13.57	13.27	13.24	
1.4	QPSK	6	0	12.55	12.33	12.21	13
1.4	16QAM	1	0	12.89	12.60	12.54	
1.4	16QAM	1	3	12.96	12.67	12.64	
1.4	16QAM	1	5	12.85	12.55	12.65	13
1.4	16QAM	3	0	12.64	12.43	12.32	
1.4	16QAM	3	1	12.69	12.39	12.34	
1.4	16QAM	3	3	12.64	12.34	12.31	12
1.4	16QAM	6	0	11.70	11.39	11.35	



<LTE Band 71_Sensor OFF>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				133222	133297	133372	24.5
Frequency (MHz)				673	680.5	688	
20	QPSK	1	0	23.01	23.15	23.07	
20	QPSK	1	49	23.05	23.09	23.08	23.5
20	QPSK	1	99	23.07	23.13	23.12	
20	QPSK	50	0	22.21	22.25	22.23	
20	QPSK	50	24	22.18	22.19	22.11	23.5
20	QPSK	50	50	22.20	22.17	22.17	
20	QPSK	100	0	22.12	22.20	22.17	
20	16QAM	1	0	22.30	22.20	22.39	23.5
20	16QAM	1	49	22.32	22.38	22.32	
20	16QAM	1	99	22.36	22.40	22.43	
20	16QAM	50	0	21.15	21.23	21.10	22.5
20	16QAM	50	24	21.15	21.16	21.18	
20	16QAM	50	50	21.25	21.15	21.17	
20	16QAM	100	0	21.18	21.14	21.13	24.5
Channel				133197	133297	133397	
Frequency (MHz)				670.5	680.5	690.5	
15	QPSK	1	0	22.84	23.03	22.96	24.5
15	QPSK	1	37	22.85	22.89	22.98	
15	QPSK	1	74	22.92	23.00	22.97	
15	QPSK	36	0	22.03	22.13	21.98	23.5
15	QPSK	36	20	22.08	22.01	22.11	
15	QPSK	36	39	22.04	22.06	21.98	
15	QPSK	75	0	22.07	22.06	21.97	23.5
15	16QAM	1	0	22.19	22.09	22.28	
15	16QAM	1	37	22.19	22.25	22.16	
15	16QAM	1	74	22.26	22.30	22.33	22.5
15	16QAM	36	0	21.02	21.11	20.99	
15	16QAM	36	20	20.98	20.96	20.99	
15	16QAM	36	39	21.10	21.04	20.99	24.5
15	16QAM	75	0	21.02	20.94	20.97	
Channel				133172	133297	133422	
Frequency (MHz)				668	680.5	693	
10	QPSK	1	0	22.85	23.02	22.94	24.5
10	QPSK	1	25	22.92	22.90	22.97	
10	QPSK	1	49	22.95	23.03	22.98	
10	QPSK	25	0	22.05	22.10	21.93	23.5
10	QPSK	25	12	22.04	22.08	22.09	
10	QPSK	25	25	22.04	22.04	21.99	
10	QPSK	50	0	22.04	22.02	22.00	23.5
10	16QAM	1	0	22.13	22.06	22.21	
10	16QAM	1	25	22.21	22.24	22.14	
10	16QAM	1	49	22.25	22.26	22.25	22.5
10	16QAM	25	0	21.04	21.10	20.93	
10	16QAM	25	12	20.96	21.02	21.06	
10	16QAM	25	25	21.12	20.97	21.00	24.5
10	16QAM	50	0	21.05	21.04	21.01	
Channel				133147	133297	133447	
Frequency (MHz)				665.5	680.5	695.5	
5	QPSK	1	0	22.91	22.97	22.88	24.5
5	QPSK	1	12	22.95	22.91	22.88	
5	QPSK	1	24	22.90	22.97	22.99	
5	QPSK	12	0	21.98	22.12	21.99	23.5
5	QPSK	12	7	22.01	22.08	22.03	
5	QPSK	12	13	22.05	22.05	22.05	
5	QPSK	25	0	22.04	22.03	22.05	23.5
5	16QAM	1	0	22.18	22.06	22.27	



FCC SAR TEST REPORT

Report No. : FA512519

5	16QAM	1	12	22.13	22.21	22.20	22.5
5	16QAM	1	24	22.22	22.23	22.24	
5	16QAM	12	0	21.00	21.04	21.00	
5	16QAM	12	7	21.02	20.98	21.00	
5	16QAM	12	13	21.07	20.98	21.03	
5	16QAM	25	0	21.03	20.99	21.02	

<LTE Band 71_Sensor ON>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				133222	133297	133372	
Frequency (MHz)				673	680.5	688	
20	QPSK	1	0	19.27	19.41	19.31	19.5
20	QPSK	1	49	19.26	19.37	19.31	
20	QPSK	1	99	19.31	19.36	19.26	
20	QPSK	50	0	18.35	18.37	18.35	18.5
20	QPSK	50	24	18.33	18.36	18.20	
20	QPSK	50	50	18.30	18.32	18.26	
20	QPSK	100	0	18.36	18.44	18.36	18.5
20	16QAM	1	0	18.42	18.48	18.49	
20	16QAM	1	49	18.44	18.41	18.42	
20	16QAM	1	99	18.31	18.46	18.43	17.5
20	16QAM	50	0	17.39	17.41	17.30	
20	16QAM	50	24	17.39	17.41	17.41	
20	16QAM	50	50	17.42	17.36	17.39	17.5
20	16QAM	100	0	17.49	17.39	17.38	
Channel				133197	133297	133397	Tune-up limit (dBm)
Frequency (MHz)				670.5	680.5	690.5	
15	QPSK	1	0	19.13	19.28	19.17	19.5
15	QPSK	1	37	19.13	19.20	19.17	
15	QPSK	1	74	19.18	19.17	19.12	
15	QPSK	36	0	18.17	18.24	18.13	18.5
15	QPSK	36	20	18.16	18.20	18.03	
15	QPSK	36	39	18.17	18.17	18.16	
15	QPSK	75	0	18.30	18.21	18.23	18.5
15	16QAM	1	0	18.26	18.37	18.34	
15	16QAM	1	37	18.34	18.25	18.30	
15	16QAM	1	74	18.17	18.31	18.30	17.5
15	16QAM	36	0	17.22	17.29	17.10	
15	16QAM	36	20	17.25	17.27	17.26	
15	16QAM	36	39	17.31	17.21	17.20	17.5
15	16QAM	75	0	17.34	17.20	17.25	
Channel				133172	133297	133422	Tune-up limit (dBm)
Frequency (MHz)				668	680.5	693	
10	QPSK	1	0	19.12	19.28	19.21	19.5
10	QPSK	1	25	19.06	19.23	19.13	
10	QPSK	1	49	19.19	19.18	19.16	
10	QPSK	25	0	18.16	18.20	18.08	18.5
10	QPSK	25	12	18.17	18.26	18.00	
10	QPSK	25	25	18.20	18.14	18.25	
10	QPSK	50	0	18.27	18.22	18.21	18.5
10	16QAM	1	0	18.29	18.33	18.34	
10	16QAM	1	25	18.30	18.31	18.27	
10	16QAM	1	49	18.18	18.32	18.32	17.5
10	16QAM	25	0	17.20	17.25	17.11	
10	16QAM	25	12	17.26	17.22	17.31	
10	16QAM	25	25	17.32	17.21	17.21	17.5
10	16QAM	50	0	17.31	17.27	17.28	
Channel				133147	133297	133447	Tune-up limit (dBm)
Frequency (MHz)				665.5	680.5	695.5	
5	QPSK	1	0	19.12	19.22	19.21	19.5



FCC SAR TEST REPORT

Report No. : FA512519

5	QPSK	1	12	19.09	19.21	19.18	18.5
5	QPSK	1	24	19.17	19.21	19.11	
5	QPSK	12	0	18.16	18.23	18.08	
5	QPSK	12	7	18.13	18.16	18.05	
5	QPSK	12	13	18.13	18.17	18.20	
5	QPSK	25	0	18.27	18.16	18.19	18.5
5	16QAM	1	0	18.22	18.29	18.32	
5	16QAM	1	12	18.25	18.27	18.27	
5	16QAM	1	24	18.17	18.36	18.31	17.5
5	16QAM	12	0	17.28	17.24	17.17	
5	16QAM	12	7	17.23	17.26	17.28	
5	16QAM	12	13	17.30	17.18	17.29	
5	16QAM	25	0	17.38	17.20	17.25	

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Base station simulator was used for LTE output power measurements and SAR testing.

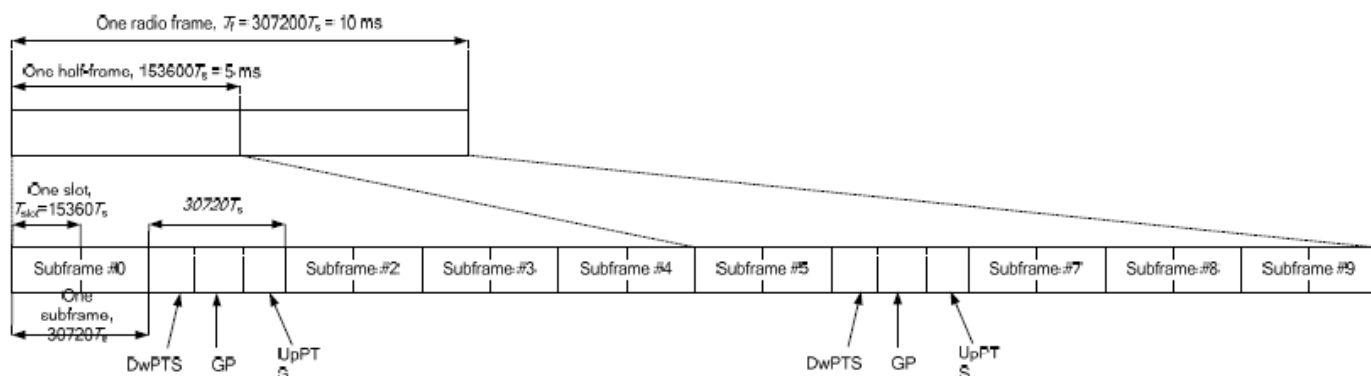


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<LTE Band 38_Sensor OFF>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				37850	38000	38150	
Frequency (MHz)				2580	2595	2610	
20	QPSK	1	0	22.27	22.30	22.19	24
20	QPSK	1	49	22.21	22.23	22.10	
20	QPSK	1	99	22.25	22.29	22.16	
20	QPSK	50	0	21.38	21.40	21.39	23
20	QPSK	50	24	21.36	21.36	21.32	
20	QPSK	50	50	21.37	21.37	21.19	
20	QPSK	100	0	21.39	21.41	21.30	23
20	16QAM	1	0	21.25	21.29	21.23	
20	16QAM	1	49	21.28	21.31	21.15	
20	16QAM	1	99	21.43	21.35	21.21	22
20	16QAM	50	0	20.32	20.34	20.30	
20	16QAM	50	24	20.42	20.35	20.32	
20	16QAM	50	50	20.46	20.36	20.22	22
20	16QAM	100	0	20.41	20.32	20.30	
Channel				37825	38000	38175	Tune-up limit (dBm)
Frequency (MHz)				2577.5	2595	2612.5	
15	QPSK	1	0	22.17	22.27	22.13	24
15	QPSK	1	37	22.13	22.20	22.03	
15	QPSK	1	74	22.22	22.21	22.11	
15	QPSK	36	0	21.29	21.33	21.38	23
15	QPSK	36	20	21.27	21.29	21.31	
15	QPSK	36	39	21.31	21.33	21.14	
15	QPSK	75	0	21.33	21.35	21.21	23
15	16QAM	1	0	21.21	21.22	21.18	
15	16QAM	1	37	21.22	21.29	21.11	
15	16QAM	1	74	21.42	21.33	21.15	22
15	16QAM	36	0	20.26	20.32	20.21	
15	16QAM	36	20	20.32	20.31	20.24	
15	16QAM	36	39	20.45	20.27	20.21	22
15	16QAM	75	0	20.32	20.23	20.22	
Channel				37800	38000	38200	Tune-up limit (dBm)
Frequency (MHz)				2575	2595	2615	
10	QPSK	1	0	22.18	22.25	22.11	24
10	QPSK	1	25	22.12	22.17	22.00	
10	QPSK	1	49	22.24	22.28	22.13	
10	QPSK	25	0	21.28	21.33	21.37	23
10	QPSK	25	12	21.35	21.27	21.26	
10	QPSK	25	25	21.33	21.34	21.15	
10	QPSK	50	0	21.36	21.33	21.28	23
10	16QAM	1	0	21.22	21.22	21.16	
10	16QAM	1	25	21.23	21.29	21.10	
10	16QAM	1	49	21.41	21.29	21.19	22
10	16QAM	25	0	20.22	20.28	20.22	
10	16QAM	25	12	20.39	20.31	20.31	
10	16QAM	25	25	20.41	20.28	20.16	22
10	16QAM	50	0	20.39	20.30	20.21	
Channel				37775	38000	38225	Tune-up limit (dBm)
Frequency (MHz)				2572.5	2595	2617.5	
5	QPSK	1	0	22.26	22.23	22.17	24
5	QPSK	1	12	22.15	22.13	22.00	
5	QPSK	1	24	22.15	22.27	22.08	
5	QPSK	12	0	21.34	21.33	21.32	23
5	QPSK	12	7	21.28	21.33	21.31	
5	QPSK	12	13	21.29	21.28	21.17	
5	QPSK	25	0	21.30	21.38	21.29	23
5	16QAM	1	0	21.21	21.27	21.22	



FCC SAR TEST REPORT

Report No. : FA512519

5	16QAM	1	12	21.25	21.29	21.09	22
5	16QAM	1	24	21.37	21.32	21.16	
5	16QAM	12	0	20.25	20.30	20.20	
5	16QAM	12	7	20.38	20.32	20.30	
5	16QAM	12	13	20.43	20.35	20.19	
5	16QAM	25	0	20.33	20.31	20.25	

<LTE Band 38_Sensor ON>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				37850	38000	38150	
Frequency (MHz)				2580	2595	2610	
20	QPSK	1	0	14.48	14.94	14.79	15.5
20	QPSK	1	49	14.58	14.81	14.75	
20	QPSK	1	99	14.82	14.68	14.86	
20	QPSK	50	0	13.66	13.99	13.94	14.5
20	QPSK	50	24	13.84	13.95	13.94	
20	QPSK	50	50	13.86	13.92	13.91	
20	QPSK	100	0	13.82	13.93	13.97	
20	16QAM	1	0	13.58	13.78	13.87	14.5
20	16QAM	1	49	13.64	13.85	13.84	
20	16QAM	1	99	13.91	13.99	13.94	
20	16QAM	50	0	12.65	12.89	12.96	13.5
20	16QAM	50	24	12.82	12.93	13.01	
20	16QAM	50	50	12.89	13.01	12.93	
20	16QAM	100	0	12.81	12.91	12.98	
Channel				37825	38000	38175	Tune-up limit (dBm)
Frequency (MHz)				2577.5	2595	2612.5	
15	QPSK	1	0	14.34	14.74	14.69	15.5
15	QPSK	1	37	14.41	14.61	14.56	
15	QPSK	1	74	14.65	14.58	14.75	
15	QPSK	36	0	13.51	13.86	13.77	14.5
15	QPSK	36	20	13.64	13.78	13.77	
15	QPSK	36	39	13.70	13.79	13.75	
15	QPSK	75	0	13.72	13.74	13.82	
15	16QAM	1	0	13.39	13.66	13.69	14.5
15	16QAM	1	37	13.49	13.75	13.73	
15	16QAM	1	74	13.77	13.86	13.81	
15	16QAM	36	0	12.48	12.69	12.86	13.5
15	16QAM	36	20	12.72	12.75	12.81	
15	16QAM	36	39	12.73	12.89	12.79	
15	16QAM	75	0	12.67	12.73	12.82	
Channel				37800	38000	38200	Tune-up limit (dBm)
Frequency (MHz)				2575	2595	2615	
10	QPSK	1	0	14.37	14.78	14.59	15.5
10	QPSK	1	25	14.38	14.61	14.63	
10	QPSK	1	49	14.62	14.52	14.68	
10	QPSK	25	0	13.49	13.87	13.83	14.5
10	QPSK	25	12	13.66	13.78	13.83	
10	QPSK	25	25	13.68	13.75	13.75	
10	QPSK	50	0	13.72	13.82	13.78	
10	16QAM	1	0	13.40	13.62	13.77	14.5
10	16QAM	1	25	13.46	13.71	13.73	
10	16QAM	1	49	13.81	13.82	13.78	
10	16QAM	25	0	12.53	12.78	12.82	13.5
10	16QAM	25	12	12.62	12.73	12.88	
10	16QAM	25	25	12.78	12.89	12.73	
10	16QAM	50	0	12.61	12.81	12.85	
Channel				37775	38000	38225	Tune-up limit (dBm)
Frequency (MHz)				2572.5	2595	2617.5	
5	QPSK	1	0	14.31	14.74	14.61	15.5



FCC SAR TEST REPORT

Report No. : FA512519

5	QPSK	1	12	14.41	14.67	14.56	14.5
5	QPSK	1	24	14.72	14.52	14.73	
5	QPSK	12	0	13.48	13.79	13.75	
5	QPSK	12	7	13.68	13.78	13.84	
5	QPSK	12	13	13.68	13.79	13.81	
5	QPSK	25	0	13.64	13.73	13.81	14.5
5	16QAM	1	0	13.48	13.63	13.71	
5	16QAM	1	12	13.45	13.68	13.65	
5	16QAM	1	24	13.81	13.80	13.77	
5	16QAM	12	0	12.46	12.79	12.86	13.5
5	16QAM	12	7	12.70	12.75	12.91	
5	16QAM	12	13	12.79	12.83	12.80	
5	16QAM	25	0	12.62	12.77	12.87	

<LTE Band 41_Sensor OFF>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				39750	40185	40620	41055	41490	
Frequency (MHz)				2506	2549.5	2593	2636.5	2680	
20	QPSK	1	0	22.78	22.86	22.90	22.80	22.75	24
20	QPSK	1	49	22.75	22.86	22.72	22.73	22.68	
20	QPSK	1	99	22.73	22.86	22.82	22.71	22.63	
20	QPSK	50	0	21.91	21.87	21.96	21.93	21.85	23
20	QPSK	50	24	21.90	21.89	21.84	21.89	21.83	
20	QPSK	50	50	21.90	21.87	21.88	21.91	21.80	
20	QPSK	100	0	21.89	21.90	21.82	21.82	21.79	
20	16QAM	1	0	21.75	21.90	21.77	21.83	21.74	23
20	16QAM	1	49	21.77	21.96	21.83	21.85	21.79	
20	16QAM	1	99	21.87	21.91	21.89	21.80	21.84	
20	16QAM	50	0	20.88	20.95	20.80	20.87	20.78	22
20	16QAM	50	24	20.88	20.89	20.83	20.89	20.83	
20	16QAM	50	50	20.91	20.92	20.88	20.90	20.82	
20	16QAM	100	0	20.87	20.86	20.87	20.90	20.75	
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5	
15	QPSK	1	0	22.73	22.84	22.81	22.71	22.63	24.00
15	QPSK	1	37	22.70	22.81	22.68	22.64	22.65	
15	QPSK	1	74	22.69	22.82	22.81	22.64	22.59	
15	QPSK	36	0	21.85	21.87	21.83	21.86	21.83	23
15	QPSK	36	20	21.86	21.88	21.78	21.87	21.76	
15	QPSK	36	39	21.83	21.78	21.80	21.83	21.72	
15	QPSK	75	0	21.85	21.82	21.78	21.75	21.74	
15	16QAM	1	0	21.66	21.89	21.75	21.81	21.69	23
15	16QAM	1	37	21.75	21.90	21.77	21.81	21.70	
15	16QAM	1	74	21.79	21.85	21.79	21.76	21.82	
15	16QAM	36	0	20.81	20.92	20.75	20.85	20.74	22
15	16QAM	36	20	20.83	20.85	20.81	20.86	20.74	
15	16QAM	36	39	20.88	20.89	20.84	20.81	20.78	
15	16QAM	75	0	20.82	20.85	20.77	20.83	20.71	
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)
Frequency (MHz)				2501	2547	2593	2639	2685	
10	QPSK	1	0	22.75	22.89	22.82	22.78	22.61	24.00
10	QPSK	1	25	22.73	22.78	22.70	22.72	22.67	
10	QPSK	1	49	22.71	22.83	22.81	22.65	22.53	
10	QPSK	25	0	21.86	21.90	21.82	21.84	21.78	23
10	QPSK	25	12	21.83	21.80	21.78	21.81	21.76	
10	QPSK	25	25	21.85	21.79	21.78	21.90	21.74	
10	QPSK	50	0	21.86	21.84	21.79	21.73	21.76	
10	16QAM	1	0	21.70	21.87	21.75	21.82	21.64	23
10	16QAM	1	25	21.68	21.86	21.73	21.78	21.75	
10	16QAM	1	49	21.78	21.87	21.87	21.70	21.74	



FCC SAR TEST REPORT

Report No. : FA512519

10	16QAM	25	0	20.82	20.90	20.71	20.78	20.73	22
10	16QAM	25	12	20.84	20.83	20.80	20.82	20.73	
10	16QAM	25	25	20.82	20.82	20.85	20.84	20.77	
10	16QAM	50	0	20.78	20.80	20.86	20.86	20.70	
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5	
5	QPSK	1	0	22.74	22.80	22.77	22.75	22.62	24.00
5	QPSK	1	12	22.74	22.80	22.65	22.69	22.58	
5	QPSK	1	24	22.63	22.81	22.76	22.70	22.60	
5	QPSK	12	0	21.90	21.95	21.88	21.90	21.80	23
5	QPSK	12	7	21.86	21.79	21.78	21.84	21.78	
5	QPSK	12	13	21.80	21.79	21.87	21.89	21.70	
5	QPSK	25	0	21.79	21.80	21.80	21.81	21.74	
5	16QAM	1	0	21.73	21.83	21.70	21.81	21.64	23
5	16QAM	1	12	21.74	21.92	21.81	21.75	21.73	
5	16QAM	1	24	21.78	21.88	21.84	21.71	21.83	
5	16QAM	12	0	20.79	20.92	20.70	20.80	20.74	22
5	16QAM	12	7	20.84	20.82	20.79	20.86	20.80	
5	16QAM	12	13	20.83	20.84	20.86	20.84	20.78	
5	16QAM	25	0	20.77	20.85	20.77	20.88	20.74	

<LTE Band 41_Sensor ON>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				39750	40185	40620	41055	41490	Tune-up limit (dBm)
Frequency (MHz)				2506	2549.5	2593	2636.5	2680	
20	QPSK	1	0	14.37	14.60	14.99	14.84	14.69	15.5
20	QPSK	1	49	14.35	14.59	14.77	14.82	14.63	
20	QPSK	1	99	14.36	14.56	14.67	14.78	14.64	
20	QPSK	50	0	13.52	13.68	13.99	13.91	13.79	14.5
20	QPSK	50	24	13.46	13.66	13.89	13.90	13.78	
20	QPSK	50	50	13.50	13.67	13.91	13.80	13.75	
20	QPSK	100	0	13.52	13.62	13.95	13.85	13.75	
20	16QAM	1	0	13.45	13.69	13.76	13.93	13.78	14.5
20	16QAM	1	49	13.50	13.73	13.85	13.94	13.74	
20	16QAM	1	99	13.59	13.78	13.96	13.89	13.76	
20	16QAM	50	0	12.54	12.71	12.84	12.95	12.77	13.5
20	16QAM	50	24	12.55	12.68	12.86	12.97	12.77	
20	16QAM	50	50	12.63	12.73	12.95	12.99	12.79	
20	16QAM	100	0	12.55	12.64	12.88	12.96	12.76	
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5	
15	QPSK	1	0	14.19	14.49	14.84	14.69	14.51	15.50
15	QPSK	1	37	14.26	14.44	14.67	14.69	14.49	
15	QPSK	1	74	14.40	14.51	14.47	14.65	14.55	
15	QPSK	36	0	13.42	13.56	13.84	13.78	13.65	14.5
15	QPSK	36	20	13.40	13.55	13.71	13.81	13.66	
15	QPSK	36	39	13.48	13.56	13.71	13.66	13.64	
15	QPSK	75	0	13.35	13.48	13.68	13.75	13.62	
15	16QAM	1	0	13.28	13.59	13.65	13.80	13.68	14.5
15	16QAM	1	37	13.39	13.60	13.71	13.83	13.62	
15	16QAM	1	74	13.45	13.60	13.79	13.73	13.56	
15	16QAM	36	0	12.37	12.55	12.66	12.80	12.66	13.5
15	16QAM	36	20	12.39	12.51	12.74	12.86	12.64	
15	16QAM	36	39	12.48	12.55	12.75	12.87	12.62	
15	16QAM	75	0	12.42	12.53	12.77	12.85	12.57	
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)
Frequency (MHz)				2501	2547	2593	2639	2685	
10	QPSK	1	0	14.27	14.49	14.87	14.65	14.59	15.50
10	QPSK	1	25	14.28	14.53	14.64	14.69	14.54	
10	QPSK	1	49	14.31	14.57	14.48	14.58	14.58	



FCC SAR TEST REPORT

Report No. : FA512519

10	QPSK	25	0	13.39	13.52	13.88	13.71	13.59	14.5
10	QPSK	25	12	13.38	13.55	13.79	13.85	13.71	
10	QPSK	25	25	13.49	13.49	13.80	13.60	13.63	
10	QPSK	50	0	13.37	13.49	13.75	13.76	13.62	
10	16QAM	1	0	13.33	13.54	13.66	13.82	13.60	14.5
10	16QAM	1	25	13.33	13.61	13.66	13.81	13.64	
10	16QAM	1	49	13.47	13.59	13.84	13.71	13.63	
10	16QAM	25	0	12.34	12.57	12.70	12.82	12.63	13.5
10	16QAM	25	12	12.45	12.49	12.70	12.80	12.62	
10	16QAM	25	25	12.43	12.56	12.75	12.79	12.69	
10	16QAM	50	0	12.44	12.44	12.78	12.86	12.59	
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5	
5	QPSK	1	0	14.17	14.43	14.83	14.65	14.58	15.50
5	QPSK	1	12	14.27	14.49	14.66	14.72	14.51	
5	QPSK	1	24	14.33	14.56	14.55	14.61	14.61	
5	QPSK	12	0	13.42	13.50	13.88	13.78	13.66	14.5
5	QPSK	12	7	13.41	13.53	13.69	13.82	13.64	
5	QPSK	12	13	13.42	13.57	13.79	13.67	13.61	
5	QPSK	25	0	13.36	13.50	13.73	13.81	13.64	
5	16QAM	1	0	13.34	13.59	13.58	13.81	13.61	14.5
5	16QAM	1	12	13.33	13.61	13.66	13.77	13.61	
5	16QAM	1	24	13.41	13.64	13.85	13.79	13.57	
5	16QAM	12	0	12.36	12.53	12.71	12.84	12.63	13.5
5	16QAM	12	7	12.38	12.52	12.76	12.82	12.59	
5	16QAM	12	13	12.53	12.55	12.77	12.89	12.63	
5	16QAM	25	0	12.41	12.53	12.70	12.84	12.65	



<SAR test exclusion table>

General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

Exposure Position	Wireless Interface	WCDMA Band V	WCDMA Band IV	WCDMA Band II	LTE Band 71	LTE Band 12	LTE Band 13	LTE Band 14	LTE Band 17	LTE Band 5	LTE Band 26	LTE Band 4	LTE Band 66	LTE Band 2	LTE Band 25	LTE Band 30	LTE Band 7	LTE Band 38	LTE Band 41
	Calculated Frequency (MHz)	846	1750	1907	695	715	784	795	713	848	848	1754	1779	1909	1914	2312	2567	2617	2687
	Maximum power (dBm)	25.0	25.0	25.0	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23.0	24.5	24.0	24.0
	Maximum rated power(mW)	316.23	316.23	316.23	281.84	281.84	281.84	281.84	281.84	281.84	281.84	281.84	281.84	281.84	281.84	199.53	281.84	251.19	251.19
Bottom Side	Separation distance(mm)	5.0																	
	exclusion threshold	58.2	83.7	87.3	47.0	47.7	49.9	50.3	47.6	51.9	51.9	74.7	75.2	77.9	78.0	60.7	90.3	81.3	82.4
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes



Exposure Position	Wireless Interface	WCDMA Band V	WCDMA Band IV	WCDMA Band II	LTE Band 71	LTE Band 12	LTE Band 13	LTE Band 14	LTE Band 17	LTE Band 5	LTE Band 26	LTE Band 4	LTE Band 66	LTE Band 2	LTE Band 25	LTE Band 30	LTE Band 7	LTE Band 38	LTE Band 41
	Calculated Frequency (MHz)	846	1750	1907	695	715	784	795	713	848	848	1754	1779	1909	1914	2312	2567	2617	2687
	Maximum power (dBm)	25.0	25.0	25.0	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23.0	24.5	24.0	24.0
	Maximum rated power(mW)	316.23	316.23	316.23	281.84	281.84	281.84	281.84	281.84	281.84	281.84	281.84	281.84	281.84	281.84	199.53	281.84	251.19	251.19
Back	Separation distance(mm)	5.0																	
	exclusion threshold	58.2	83.7	87.3	47.0	47.7	49.9	50.3	47.6	51.9	51.9	74.7	75.2	77.9	78.0	60.7	90.3	81.3	82.4
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Right Edge	Separation distance(mm)	5.0																	
	exclusion threshold	58.2	83.7	87.3	47.0	47.7	49.9	50.3	47.6	51.9	51.9	74.7	75.2	77.9	78.0	60.7	90.3	81.3	82.4
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Top Edge	Separation distance(mm)	17.5																	
	exclusion threshold	16.6	23.9	25.0	13.4	13.6	14.3	14.4	13.6	14.8	14.8	21.3	21.5	22.3	22.3	17.3	25.8	23.2	23.5
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Bottom Edge	Separation distance(mm)	116.8																	
	exclusion threshold	540.0	781.0	776.0	489.0	496.0	518.0	522.0	495.0	540.0	540.0	781.0	780.0	776.0	776.0	766.0	761.0	760.0	759.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Left Edge	Separation distance(mm)	275.5																	
	exclusion threshold	1435.0	2368.0	2364.0	1225.0	1252.0	1348.0	1363.0	1250.0	1438.0	1438.0	2368.0	2367.0	2364.0	2363.0	2354.0	2349.0	2348.0	2347.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No

13. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - c. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B5/B12/B17/B26/B38/B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 2/4/5/17/38 SAR test was covered by Band 25/66/26/12/41; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

13.1 Body SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	User Scenario	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	Laptop	On	9400	1880	AWAN	13.89	14.00	1.026	0.08	0.271	0.278
	WCDMA II	RMC 12.2Kbps	Back	0mm	Tablet	On	9400	1880	AWAN	13.89	14.00	1.026	0.01	0.798	0.818
	WCDMA II	RMC 12.2Kbps	Back	0mm	Tablet	On	9262	1852.4	AWAN	13.59	14.00	1.099	0.03	0.745	0.819
	WCDMA II	RMC 12.2Kbps	Back	0mm	Tablet	On	9538	1907.6	AWAN	13.73	14.00	1.064	-0.08	0.753	0.801
	WCDMA II	RMC 12.2Kbps	Right Edge	0mm	Tablet	On	9400	1880	AWAN	13.89	14.00	1.026	-0.08	0.300	0.308
	WCDMA II	RMC 12.2Kbps	Top Edge	0mm	Tablet	On	9400	1880	AWAN	13.89	14.00	1.026	0.1	0.001	0.001
	WCDMA II	RMC 12.2Kbps	Bottom Side	11mm	Laptop	Off	9400	1880	AWAN	23.63	25.00	1.371	-0.18	0.605	0.829
	WCDMA II	RMC 12.2Kbps	Bottom Side	11mm	Laptop	Off	9262	1852.4	AWAN	23.60	25.00	1.380	0.1	0.574	0.792
	WCDMA II	RMC 12.2Kbps	Bottom Side	11mm	Laptop	Off	9538	1907.6	AWAN	23.62	25.00	1.374	0.12	0.564	0.775
	WCDMA II	RMC 12.2Kbps	Back	19mm	Tablet	Off	9400	1880	AWAN	23.63	25.00	1.371	0.08	0.596	0.817
	WCDMA II	RMC 12.2Kbps	Back	19mm	Tablet	Off	9262	1852.4	AWAN	23.60	25.00	1.380	-0.17	0.559	0.772
	WCDMA II	RMC 12.2Kbps	Back	19mm	Tablet	Off	9538	1907.6	AWAN	23.62	25.00	1.374	-0.03	0.536	0.736
	WCDMA II	RMC 12.2Kbps	Right Edge	20mm	Tablet	Off	9400	1880	AWAN	23.63	25.00	1.371	0.14	0.591	0.810
1	WCDMA II	RMC 12.2Kbps	Right Edge	20mm	Tablet	Off	9262	1852.4	AWAN	23.60	25.00	1.380	0.05	0.630	0.870
	WCDMA II	RMC 12.2Kbps	Right Edge	20mm	Tablet	Off	9538	1907.6	AWAN	23.62	25.00	1.374	0.11	0.511	0.702
	WCDMA II	RMC 12.2Kbps	Right Edge	20mm	Tablet	Off	9262	1852.4	Speed	23.60	25.00	1.380	-0.05	0.511	0.705
	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	Laptop	On	1413	1732.6	AWAN	14.31	14.50	1.045	0.18	0.243	0.254
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Tablet	On	1413	1732.6	AWAN	14.31	14.50	1.045	0.14	0.778	0.813
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Tablet	On	1312	1712.4	AWAN	14.30	14.50	1.047	-0.17	0.702	0.735
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Tablet	On	1513	1752.6	AWAN	14.13	14.50	1.089	0.17	0.752	0.819
	WCDMA IV	RMC 12.2Kbps	Right Edge	0mm	Tablet	On	1413	1732.6	AWAN	14.31	14.50	1.045	-0.05	0.337	0.352
	WCDMA IV	RMC 12.2Kbps	Top Edge	0mm	Tablet	On	1413	1732.6	AWAN	14.31	14.50	1.045	0.01	0.037	0.039
2	WCDMA IV	RMC 12.2Kbps	Bottom Side	11mm	Laptop	Off	1413	1732.6	AWAN	23.80	25.00	1.318	0	0.829	1.093
	WCDMA IV	RMC 12.2Kbps	Bottom Side	11mm	Laptop	Off	1312	1712.4	AWAN	23.76	25.00	1.330	0.1	0.711	0.946
	WCDMA IV	RMC 12.2Kbps	Bottom Side	11mm	Laptop	Off	1513	1752.6	AWAN	23.63	25.00	1.371	-0.17	0.745	1.021
	WCDMA IV	RMC 12.2Kbps	Back	19mm	Tablet	Off	1413	1732.6	AWAN	23.80	25.00	1.318	0.04	0.374	0.493
	WCDMA IV	RMC 12.2Kbps	Right Edge	20mm	Tablet	Off	1413	1732.6	AWAN	23.80	25.00	1.318	-0.01	0.811	1.069
	WCDMA IV	RMC 12.2Kbps	Right Edge	20mm	Tablet	Off	1312	1712.4	AWAN	23.76	25.00	1.330	-0.08	0.789	1.050
	WCDMA IV	RMC 12.2Kbps	Right Edge	20mm	Tablet	Off	1513	1752.6	AWAN	23.63	25.00	1.371	0.05	0.794	1.088
	WCDMA IV	RMC 12.2Kbps	Bottom Side	11mm	Laptop	Off	1413	1732.6	Speed	23.80	25.00	1.318	0.06	0.580	0.765
	WCDMA V	RMC 12.2Kbps	Bottom Side	0mm	Laptop	On	4182	836.4	AWAN	17.30	17.50	1.047	-0.09	0.381	0.399
	WCDMA V	RMC 12.2Kbps	Back	0mm	Tablet	On	4182	836.4	AWAN	17.30	17.50	1.047	-0.08	0.831	0.870
	WCDMA V	RMC 12.2Kbps	Right Edge	0mm	Tablet	On	4182	836.4	AWAN	17.30	17.50	1.047	0.13	0.618	0.647
	WCDMA V	RMC 12.2Kbps	Top Edge	0mm	Tablet	On	4182	836.4	AWAN	17.30	17.50	1.047	0.12	0.001	0.001
	WCDMA V	RMC 12.2Kbps	Bottom Side	11mm	Laptop	Off	4182	836.4	AWAN	23.81	25.00	1.315	0.03	0.827	1.088
	WCDMA V	RMC 12.2Kbps	Bottom Side	11mm	Laptop	Off	4132	826.4	AWAN	23.75	25.00	1.334	0.18	0.779	1.039
3	WCDMA V	RMC 12.2Kbps	Bottom Side	11mm	Laptop	Off	4233	846.6	AWAN	23.73	25.00	1.340	0.01	0.844	1.131
	WCDMA V	RMC 12.2Kbps	Back	19mm	Tablet	Off	4182	836.4	AWAN	23.81	25.00	1.315	0.16	0.335	0.441
	WCDMA V	RMC 12.2Kbps	Right Edge	20mm	Tablet	Off	4182	836.4	AWAN	23.81	25.00	1.315	-0.1	0.571	0.751
	WCDMA V	RMC 12.2Kbps	Bottom Side	11mm	Laptop	Off	4233	846.6	Speed	23.73	25.00	1.340	0.07	0.477	0.639



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	User Scenario	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Bottom Side	0mm	Laptop	On	21100	2535	AWAN	11.24	12.00	1.191	0.18	0.138	0.164
	LTE Band 7	20M	QPSK	50	0	Bottom Side	0mm	Laptop	On	21100	2535	AWAN	10.28	11.00	1.180	-0.1	0.107	0.126
	LTE Band 7	20M	QPSK	1	0	Back	0mm	Tablet	On	21100	2535	AWAN	11.24	12.00	1.191	0.01	0.533	0.635
	LTE Band 7	20M	QPSK	50	0	Back	0mm	Tablet	On	21100	2535	AWAN	10.28	11.00	1.180	0.07	0.402	0.474
	LTE Band 7	20M	QPSK	1	0	Right Edge	0mm	Tablet	On	21100	2535	AWAN	11.24	12.00	1.191	0.03	0.148	0.176
	LTE Band 7	20M	QPSK	50	0	Right Edge	0mm	Tablet	On	21100	2535	AWAN	10.28	11.00	1.180	-0.15	0.138	0.163
	LTE Band 7	20M	QPSK	1	0	Top Edge	0mm	Tablet	On	21100	2535	AWAN	11.24	12.00	1.191	-0.15	0.001	0.001
	LTE Band 7	20M	QPSK	50	0	Top Edge	0mm	Tablet	On	21100	2535	AWAN	10.28	11.00	1.180	0.11	0.001	0.001
	LTE Band 7	20M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	21100	2535	AWAN	23.65	24.50	1.216	-0.08	0.661	0.804
	LTE Band 7	20M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	20850	2510	AWAN	23.52	24.50	1.253	-0.17	0.611	0.766
4	LTE Band 7	20M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	21350	2560	AWAN	23.27	24.50	1.327	0	0.608	0.807
	LTE Band 7	20M	QPSK	50	0	Bottom Side	11mm	Laptop	Off	21100	2535	AWAN	23.21	23.50	1.069	-0.08	0.545	0.583
	LTE Band 7	20M	QPSK	100	0	Bottom Side	11mm	Laptop	Off	21100	2535	AWAN	23.16	23.50	1.081	-0.04	0.698	0.755
	LTE Band 7	20M	QPSK	1	0	Back	19mm	Tablet	Off	21100	2535	AWAN	23.65	24.50	1.216	-0.08	0.632	0.769
	LTE Band 7	20M	QPSK	50	0	Back	19mm	Tablet	Off	21100	2535	AWAN	23.21	23.50	1.069	-0.04	0.486	0.520
	LTE Band 7	20M	QPSK	1	0	Right Edge	20mm	Tablet	Off	21100	2535	AWAN	23.65	24.50	1.216	-0.13	0.410	0.499
	LTE Band 7	20M	QPSK	50	0	Right Edge	20mm	Tablet	Off	21100	2535	AWAN	23.21	23.50	1.069	-0.13	0.339	0.362
	LTE Band 7	20M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	21350	2560	Speed	23.27	24.50	1.327	0.06	0.412	0.547
	LTE Band 12	10M	QPSK	1	0	Bottom Side	0mm	Laptop	On	23095	707.5	AWAN	18.75	19.00	1.059	-0.03	0.337	0.357
	LTE Band 12	10M	QPSK	25	0	Bottom Side	0mm	Laptop	On	23095	707.5	AWAN	17.77	18.00	1.054	-0.03	0.287	0.303
5	LTE Band 12	10M	QPSK	1	0	Back	0mm	Tablet	On	23095	707.5	AWAN	18.75	19.00	1.059	0	0.913	0.967
	LTE Band 12	10M	QPSK	25	0	Back	0mm	Tablet	On	23095	707.5	AWAN	17.77	18.00	1.054	-0.07	0.705	0.743
	LTE Band 12	10M	QPSK	50	0	Back	0mm	Tablet	On	23095	707.5	AWAN	17.78	18.00	1.052	0.18	0.691	0.727
	LTE Band 12	10M	QPSK	1	0	Right Edge	0mm	Tablet	On	23095	707.5	AWAN	18.75	19.00	1.059	0.05	0.717	0.759
	LTE Band 12	10M	QPSK	25	0	Right Edge	0mm	Tablet	On	23095	707.5	AWAN	17.77	18.00	1.054	-0.11	0.545	0.575
	LTE Band 12	10M	QPSK	1	0	Top Edge	0mm	Tablet	On	23095	707.5	AWAN	18.75	19.00	1.059	-0.12	0.001	0.001
	LTE Band 12	10M	QPSK	25	0	Top Edge	0mm	Tablet	On	23095	707.5	AWAN	17.77	18.00	1.054	0.03	0.001	0.001
	LTE Band 12	10M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	23095	707.5	AWAN	23.05	24.50	1.396	-0.16	0.577	0.806
	LTE Band 12	10M	QPSK	25	0	Bottom Side	11mm	Laptop	Off	23095	707.5	AWAN	22.60	23.50	1.230	-0.02	0.495	0.609
	LTE Band 12	10M	QPSK	50	0	Bottom Side	11mm	Laptop	Off	23095	707.5	AWAN	22.05	23.50	1.396	0.13	0.458	0.640
	LTE Band 12	10M	QPSK	1	0	Back	19mm	Tablet	Off	23095	707.5	AWAN	23.05	24.50	1.396	0.15	0.283	0.395
	LTE Band 12	10M	QPSK	25	0	Back	19mm	Tablet	Off	23095	707.5	AWAN	22.60	23.50	1.230	-0.09	0.233	0.287
	LTE Band 12	10M	QPSK	1	0	Right Edge	20mm	Tablet	Off	23095	707.5	AWAN	23.05	24.50	1.396	0.11	0.298	0.416
	LTE Band 12	10M	QPSK	25	0	Right Edge	20mm	Tablet	Off	23095	707.5	AWAN	22.60	23.50	1.230	-0.05	0.248	0.305
	LTE Band 12	10M	QPSK	1	0	Back	0mm	Tablet	On	23095	707.5	Speed	18.75	19.00	1.059	-0.08	0.910	0.964
	LTE Band 13	10M	QPSK	1	0	Bottom Side	0mm	Laptop	On	23230	782	AWAN	17.70	18.00	1.072	0.16	0.324	0.347
	LTE Band 13	10M	QPSK	25	0	Bottom Side	0mm	Laptop	On	23230	782	AWAN	16.81	17.00	1.045	0.05	0.268	0.280
	LTE Band 13	10M	QPSK	1	0	Back	0mm	Tablet	On	23230	782	AWAN	17.70	18.00	1.072	0.05	0.700	0.750
	LTE Band 13	10M	QPSK	25	0	Back	0mm	Tablet	On	23230	782	AWAN	16.81	17.00	1.045	-0.03	0.544	0.568
	LTE Band 13	10M	QPSK	1	0	Right Edge	0mm	Tablet	On	23230	782	AWAN	17.70	18.00	1.072	-0.15	0.394	0.422
	LTE Band 13	10M	QPSK	25	0	Right Edge	0mm	Tablet	On	23230	782	AWAN	16.81	17.00	1.045	0.02	0.345	0.360
	LTE Band 13	10M	QPSK	1	0	Top Edge	0mm	Tablet	On	23230	782	AWAN	17.70	18.00	1.072	0.07	0.001	0.001
	LTE Band 13	10M	QPSK	25	0	Top Edge	0mm	Tablet	On	23230	782	AWAN	16.81	17.00	1.045	0.16	0.001	0.001
6	LTE Band 13	10M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	23230	782	AWAN	22.85	24.50	1.462	0	0.639	0.934
	LTE Band 13	10M	QPSK	25	0	Bottom Side	11mm	Laptop	Off	23230	782	AWAN	21.97	23.50	1.422	0.13	0.531	0.755
	LTE Band 13	10M	QPSK	50	0	Bottom Side	11mm	Laptop	Off	23230	782	AWAN	21.94	23.50	1.432	-0.18	0.430	0.616
	LTE Band 13	10M	QPSK	1	0	Back	19mm	Tablet	Off	23230	782	AWAN	22.85	24.50	1.462	0.02	0.233	0.341
	LTE Band 13	10M	QPSK	25	0	Back	19mm	Tablet	Off	23230	782	AWAN	21.97	23.50	1.422	0.16	0.193	0.275
	LTE Band 13	10M	QPSK	1	0	Right Edge	20mm	Tablet	Off	23230	782	AWAN	22.85	24.50	1.462	-0.03	0.482	0.705
	LTE Band 13	10M	QPSK	25	0	Right Edge	20mm	Tablet	Off	23230	782	AWAN	21.97	23.50	1.422	0.07	0.393	0.559
	LTE Band 13	10M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	23230	782	Speed	22.85	24.50	1.462	0	0.379	0.554
	LTE Band 14	10M	QPSK	1	0	Bottom Side	0mm	Laptop	On	23330	793	AWAN	17.68	18.00	1.076	0.01	0.321	0.346



FCC SAR TEST REPORT

Report No. : FA512519

	LTE Band 14	10M	QPSK	25	0	Bottom Side	0mm	Laptop	On	23330	793	AWAN	16.77	17.00	1.054	-0.01	0.249	0.263
	LTE Band 14	10M	QPSK	1	0	Back	0mm	Tablet	On	23330	793	AWAN	17.68	18.00	1.076	-0.06	0.650	0.700
	LTE Band 14	10M	QPSK	25	0	Back	0mm	Tablet	On	23330	793	AWAN	16.77	17.00	1.054	-0.04	0.526	0.555
	LTE Band 14	10M	QPSK	1	0	Right Edge	0mm	Tablet	On	23330	793	AWAN	17.68	18.00	1.076	-0.09	0.404	0.435
	LTE Band 14	10M	QPSK	25	0	Right Edge	0mm	Tablet	On	23330	793	AWAN	16.77	17.00	1.054	-0.17	0.405	0.427
	LTE Band 14	10M	QPSK	1	0	Top Edge	0mm	Tablet	On	23330	793	AWAN	17.68	18.00	1.076	-0.1	0.001	0.001
	LTE Band 14	10M	QPSK	25	0	Top Edge	0mm	Tablet	On	23330	793	AWAN	16.77	17.00	1.054	0.18	0.001	0.001
7	LTE Band 14	10M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	23330	793	AWAN	22.78	24.50	1.486	0	0.624	0.927
	LTE Band 14	10M	QPSK	25	0	Bottom Side	11mm	Laptop	Off	23330	793	AWAN	21.92	23.50	1.439	-0.17	0.506	0.728
	LTE Band 14	10M	QPSK	50	0	Bottom Side	11mm	Laptop	Off	23330	793	AWAN	21.87	23.50	1.455	-0.04	0.446	0.649
	LTE Band 14	10M	QPSK	1	0	Back	19mm	Tablet	Off	23330	793	AWAN	22.78	24.50	1.486	-0.05	0.232	0.345
	LTE Band 14	10M	QPSK	25	0	Back	19mm	Tablet	Off	23330	793	AWAN	21.92	23.50	1.439	0	0.183	0.263
	LTE Band 14	10M	QPSK	1	0	Right Edge	20mm	Tablet	Off	23330	793	AWAN	22.78	24.50	1.486	-0.13	0.445	0.661
	LTE Band 14	10M	QPSK	25	0	Right Edge	20mm	Tablet	Off	23330	793	AWAN	21.92	23.50	1.439	-0.01	0.353	0.508
	LTE Band 14	10M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	23330	793	Speed	22.78	24.50	1.486	-0.09	0.381	0.566
	LTE Band 25	20M	QPSK	1	0	Bottom Side	0mm	Laptop	On	26340	1880	AWAN	13.56	14.00	1.107	0.05	0.200	0.221
	LTE Band 25	20M	QPSK	50	0	Bottom Side	0mm	Laptop	On	26340	1880	AWAN	12.55	13.00	1.109	0.02	0.163	0.181
	LTE Band 25	20M	QPSK	1	0	Back	0mm	Tablet	On	26340	1880	AWAN	13.56	14.00	1.107	-0.13	0.600	0.664
	LTE Band 25	20M	QPSK	50	0	Back	0mm	Tablet	On	26340	1880	AWAN	12.55	13.00	1.109	0	0.466	0.517
	LTE Band 25	20M	QPSK	1	0	Right Edge	0mm	Tablet	On	26340	1880	AWAN	13.56	14.00	1.107	-0.15	0.222	0.246
	LTE Band 25	20M	QPSK	50	0	Right Edge	0mm	Tablet	On	26340	1880	AWAN	12.55	13.00	1.109	0.11	0.184	0.204
	LTE Band 25	20M	QPSK	1	0	Top Edge	0mm	Tablet	On	26340	1880	AWAN	13.56	14.00	1.107	-0.02	0.001	0.001
	LTE Band 25	20M	QPSK	50	0	Top Edge	0mm	Tablet	On	26340	1880	AWAN	12.55	13.00	1.109	0.1	0.001	0.001
	LTE Band 25	20M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	26340	1880	AWAN	23.18	24.50	1.355	0.04	0.842	1.141
	LTE Band 25	20M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	26140	1860	AWAN	23.15	24.50	1.365	0.13	0.850	1.160
8	LTE Band 25	20M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	26590	1905	AWAN	23.16	24.50	1.361	0.01	0.858	1.168
	LTE Band 25	20M	QPSK	50	0	Bottom Side	11mm	Laptop	Off	26340	1880	AWAN	22.35	23.50	1.303	-0.18	0.706	0.920
	LTE Band 25	20M	QPSK	50	0	Bottom Side	11mm	Laptop	Off	26140	1860	AWAN	22.31	23.50	1.315	-0.11	0.701	0.922
	LTE Band 25	20M	QPSK	50	0	Bottom Side	11mm	Laptop	Off	26590	1905	AWAN	22.32	23.50	1.312	-0.16	0.721	0.946
	LTE Band 25	20M	QPSK	100	0	Bottom Side	11mm	Laptop	Off	26340	1880	AWAN	22.36	23.50	1.300	-0.15	0.700	0.910
	LTE Band 25	20M	QPSK	1	0	Back	19mm	Tablet	Off	26340	1880	AWAN	23.18	24.50	1.355	-0.06	0.406	0.550
	LTE Band 25	20M	QPSK	50	0	Back	19mm	Tablet	Off	26340	1880	AWAN	22.35	23.50	1.303	-0.14	0.332	0.433
	LTE Band 25	20M	QPSK	1	0	Right Edge	20mm	Tablet	Off	26340	1880	AWAN	23.18	24.50	1.355	-0.03	0.810	1.098
	LTE Band 25	20M	QPSK	50	0	Right Edge	20mm	Tablet	Off	26340	1880	AWAN	22.35	23.50	1.303	0.01	0.615	0.801
	LTE Band 25	20M	QPSK	100	0	Right Edge	20mm	Tablet	Off	26340	1880	AWAN	22.36	23.50	1.300	0.05	0.589	0.766
	LTE Band 25	20M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	26590	1905	Speed	23.16	24.50	1.361	0.06	0.563	0.766
	LTE Band 26	15M	QPSK	1	0	Bottom Side	0mm	Laptop	On	26865	831.5	AWAN	17.36	17.50	1.033	0.02	0.346	0.357
	LTE Band 26	15M	QPSK	36	0	Bottom Side	0mm	Laptop	On	26865	831.5	AWAN	16.29	16.50	1.050	0.12	0.262	0.275
	LTE Band 26	15M	QPSK	1	0	Back	0mm	Tablet	On	26865	831.5	AWAN	17.36	17.50	1.033	-0.16	0.772	0.797
	LTE Band 26	15M	QPSK	36	0	Back	0mm	Tablet	On	26865	831.5	AWAN	16.29	16.50	1.050	-0.12	0.593	0.622
	LTE Band 26	15M	QPSK	1	0	Right Edge	0mm	Tablet	On	26865	831.5	AWAN	17.36	17.50	1.033	0.07	0.528	0.545
	LTE Band 26	15M	QPSK	36	0	Right Edge	0mm	Tablet	On	26865	831.5	AWAN	16.29	16.50	1.050	-0.02	0.414	0.435
	LTE Band 26	15M	QPSK	1	0	Top Edge	0mm	Tablet	On	26865	831.5	AWAN	17.36	17.50	1.033	-0.05	0.001	0.001
	LTE Band 26	15M	QPSK	36	0	Top Edge	0mm	Tablet	On	26865	831.5	AWAN	16.29	16.50	1.050	-0.13	0.001	0.001
9	LTE Band 26	15M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	26865	831.5	AWAN	22.85	24.50	1.462	0.01	0.671	0.981
	LTE Band 26	15M	QPSK	36	0	Bottom Side	11mm	Laptop	Off	26865	831.5	AWAN	22.06	23.50	1.393	0.08	0.561	0.782
	LTE Band 26	15M	QPSK	75	0	Bottom Side	11mm	Laptop	Off	26865	831.5	AWAN	22.05	23.50	1.396	0.16	0.452	0.631
	LTE Band 26	15M	QPSK	1	0	Back	19mm	Tablet	Off	26865	831.5	AWAN	22.85	24.50	1.462	0.01	0.224	0.328
	LTE Band 26	15M	QPSK	36	0	Back	19mm	Tablet	Off	26865	831.5	AWAN	22.06	23.50	1.393	-0.16	0.184	0.256
	LTE Band 26	15M	QPSK	1	0	Right Edge	20mm	Tablet	Off	26865	831.5	AWAN	22.85	24.50	1.462	0.1	0.485	0.709
	LTE Band 26	15M	QPSK	36	0	Right Edge	20mm	Tablet	Off	26865	831.5	AWAN	22.06	23.50	1.393	-0.04	0.392	0.546
	LTE Band 26	15M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	26865	831.5	Speed	22.85	24.50	1.462	-0.01	0.492	0.719
	LTE Band 30	10M	QPSK	1	0	Bottom Side	0mm	Laptop	On	27710	2310	AWAN	11.85	12.50	1.161	0	0.130	0.151
	LTE Band 30	10M	QPSK	25	0	Bottom Side	0mm	Laptop	On	27710	2310	AWAN	10.92	11.50	1.143	-0.11	0.107	0.122
	LTE Band 30	10M	QPSK	1	0	Back	0mm	Tablet	On	27710	2310	AWAN	11.85	12.50	1.161	-0.06	0.648	0.753
	LTE Band 30	10M	QPSK	25	0	Back	0mm	Tablet	On	27710	2310	AWAN	10.92	11.50	1.143	-0.15	0.486	0.555



FCC SAR TEST REPORT

Report No. : FA512519

	LTE Band 30	10M	QPSK	50	0	Back	0mm	Tablet	On	27710	2310	AWAN	10.91	11.50	1.146	0.03	0.443	0.507
	LTE Band 30	10M	QPSK	1	0	Right Edge	0mm	Tablet	On	27710	2310	AWAN	11.85	12.50	1.161	-0.13	0.232	0.269
	LTE Band 30	10M	QPSK	25	0	Right Edge	0mm	Tablet	On	27710	2310	AWAN	10.92	11.50	1.143	0.16	0.193	0.221
	LTE Band 30	10M	QPSK	1	0	Top Edge	0mm	Tablet	On	27710	2310	AWAN	11.85	12.50	1.161	-0.15	0.001	0.001
	LTE Band 30	10M	QPSK	25	0	Top Edge	0mm	Tablet	On	27710	2310	AWAN	10.92	11.50	1.143	-0.02	0.001	0.001
10	LTE Band 30	10M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	27710	2310	AWAN	21.12	23.00	1.542	0	0.497	0.766
	LTE Band 30	10M	QPSK	25	0	Bottom Side	11mm	Laptop	Off	27710	2310	AWAN	20.28	22.00	1.486	-0.09	0.506	0.752
	LTE Band 30	10M	QPSK	50	0	Bottom Side	11mm	Laptop	Off	27710	2310	AWAN	20.19	22.00	1.517	0.14	0.495	0.751
	LTE Band 30	10M	QPSK	1	0	Back	19mm	Tablet	Off	27710	2310	AWAN	21.12	23.00	1.542	0.1	0.470	0.725
	LTE Band 30	10M	QPSK	25	0	Back	19mm	Tablet	Off	27710	2310	AWAN	20.28	22.00	1.486	-0.09	0.476	0.707
	LTE Band 30	10M	QPSK	50	0	Back	19mm	Tablet	Off	27710	2310	AWAN	20.19	22.00	1.517	0.07	0.457	0.693
	LTE Band 30	10M	QPSK	1	0	Right Edge	20mm	Tablet	Off	27710	2310	AWAN	21.12	23.00	1.542	-0.09	0.376	0.580
	LTE Band 30	10M	QPSK	25	0	Right Edge	20mm	Tablet	Off	27710	2310	AWAN	20.28	22.00	1.486	-0.16	0.369	0.548
	LTE Band 30	10M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	27710	2310	Speed	21.12	23.00	1.542	-0.18	0.334	0.515
	LTE Band 66	20M	QPSK	1	0	Bottom Side	0mm	Laptop	On	132322	1745	AWAN	13.68	14.00	1.076	-0.07	0.169	0.182
	LTE Band 66	20M	QPSK	50	0	Bottom Side	0mm	Laptop	On	132322	1745	AWAN	12.69	13.00	1.074	0.11	0.135	0.145
	LTE Band 66	20M	QPSK	1	0	Back	0mm	Tablet	On	132322	1745	AWAN	13.68	14.00	1.076	-0.08	0.483	0.520
	LTE Band 66	20M	QPSK	50	0	Back	0mm	Tablet	On	132322	1745	AWAN	12.69	13.00	1.074	-0.1	0.372	0.400
	LTE Band 66	20M	QPSK	1	0	Right Edge	0mm	Tablet	On	132322	1745	AWAN	13.68	14.00	1.076	-0.01	0.311	0.335
	LTE Band 66	20M	QPSK	50	0	Right Edge	0mm	Tablet	On	132322	1745	AWAN	12.69	13.00	1.074	-0.09	0.246	0.264
	LTE Band 66	20M	QPSK	1	0	Top Edge	0mm	Tablet	On	132322	1745	AWAN	13.68	14.00	1.076	-0.06	0.001	0.001
	LTE Band 66	20M	QPSK	50	0	Top Edge	0mm	Tablet	On	132322	1745	AWAN	12.69	13.00	1.074	-0.17	0.001	0.001
	LTE Band 66	20M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	132322	1745	AWAN	23.06	24.50	1.393	-0.01	0.666	0.928
	LTE Band 66	20M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	132072	1720	AWAN	22.89	24.50	1.449	-0.11	0.587	0.850
11	LTE Band 66	20M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	132572	1770	AWAN	22.57	24.50	1.560	0.09	0.692	1.079
	LTE Band 66	20M	QPSK	50	0	Bottom Side	11mm	Laptop	Off	132322	1745	AWAN	22.18	23.50	1.355	0.14	0.600	0.813
	LTE Band 66	20M	QPSK	50	0	Bottom Side	11mm	Laptop	Off	132072	1720	AWAN	21.60	23.50	1.549	0.03	0.516	0.799
	LTE Band 66	20M	QPSK	50	0	Bottom Side	11mm	Laptop	Off	132572	1770	AWAN	21.61	23.50	1.545	0.1	0.543	0.839
	LTE Band 66	20M	QPSK	100	0	Bottom Side	11mm	Laptop	Off	132322	1745	AWAN	22.11	23.50	1.377	0.16	0.570	0.785
	LTE Band 66	20M	QPSK	1	0	Back	19mm	Tablet	Off	132322	1745	AWAN	23.06	24.50	1.393	-0.06	0.282	0.393
	LTE Band 66	20M	QPSK	50	0	Back	19mm	Tablet	Off	132322	1745	AWAN	22.18	23.50	1.355	0.02	0.239	0.324
	LTE Band 66	20M	QPSK	1	0	Right Edge	20mm	Tablet	Off	132322	1745	AWAN	23.06	24.50	1.393	-0.16	0.624	0.869
	LTE Band 66	20M	QPSK	1	0	Right Edge	20mm	Tablet	Off	132072	1720	AWAN	22.89	24.50	1.449	0.05	0.626	0.907
	LTE Band 66	20M	QPSK	1	0	Right Edge	20mm	Tablet	Off	132572	1770	AWAN	22.57	24.50	1.560	-0.03	0.579	0.903
	LTE Band 66	20M	QPSK	50	0	Right Edge	20mm	Tablet	Off	132322	1745	AWAN	22.18	23.50	1.355	0.17	0.532	0.721
	LTE Band 66	20M	QPSK	100	0	Right Edge	20mm	Tablet	Off	132322	1745	AWAN	22.11	23.50	1.377	0.05	0.509	0.701
	LTE Band 66	20M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	132572	1770	Speed	22.57	24.50	1.560	-0.06	0.429	0.669
	LTE Band 71	20M	QPSK	1	0	Bottom Side	0mm	Laptop	On	133297	680.5	AWAN	19.41	19.50	1.021	-0.13	0.382	0.390
	LTE Band 71	20M	QPSK	50	0	Bottom Side	0mm	Laptop	On	133297	680.5	AWAN	18.37	18.50	1.030	-0.01	0.290	0.299
12	LTE Band 71	20M	QPSK	1	0	Back	0mm	Tablet	On	133297	680.5	AWAN	19.41	19.50	1.021	0.01	0.880	0.898
	LTE Band 71	20M	QPSK	50	0	Back	0mm	Tablet	On	133297	680.5	AWAN	18.37	18.50	1.030	0.19	0.726	0.748
	LTE Band 71	20M	QPSK	100	0	Back	0mm	Tablet	On	133297	680.5	AWAN	18.44	18.50	1.014	-0.12	0.708	0.718
	LTE Band 71	20M	QPSK	1	0	Right Edge	0mm	Tablet	On	133297	680.5	AWAN	19.41	19.50	1.021	-0.14	0.353	0.360
	LTE Band 71	20M	QPSK	50	0	Right Edge	0mm	Tablet	On	133297	680.5	AWAN	18.37	18.50	1.030	-0.18	0.308	0.317
	LTE Band 71	20M	QPSK	1	0	Top Edge	0mm	Tablet	On	133297	680.5	AWAN	19.41	19.50	1.021	-0.06	0.001	0.001
	LTE Band 71	20M	QPSK	50	0	Top Edge	0mm	Tablet	On	133297	680.5	AWAN	18.37	18.50	1.030	0.02	0.001	0.001
	LTE Band 71	20M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	133297	680.5	AWAN	23.15	24.50	1.365	0.16	0.542	0.740
	LTE Band 71	20M	QPSK	50	0	Bottom Side	11mm	Laptop	Off	133297	680.5	AWAN	22.25	23.50	1.334	0.01	0.510	0.680
	LTE Band 71	20M	QPSK	1	0	Back	19mm	Tablet	Off	133297	680.5	AWAN	23.15	24.50	1.365	-0.04	0.276	0.377
	LTE Band 71	20M	QPSK	50	0	Back	19mm	Tablet	Off	133297	680.5	AWAN	22.25	23.50	1.334	0.13	0.239	0.319
	LTE Band 71	20M	QPSK	1	0	Right Edge	20mm	Tablet	Off	133297	680.5	AWAN	23.15	24.50	1.365	0.12	0.300	0.409
	LTE Band 71	20M	QPSK	50	0	Right Edge	20mm	Tablet	Off	133297	680.5	AWAN	22.25	23.50	1.334	0.07	0.256	0.341
	LTE Band 71	20M	QPSK	1	0	Back	0mm	Tablet	On	133297	680.5	Speed	19.41	19.50	1.021	0.08	0.879	0.897



FCC SAR TEST REPORT

Report No. : FA512519

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	User Scenario	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Bottom Side	0mm	Laptop	On	40620	2593	AWAN	14.99	15.50	1.125	62.9	1.006	0.19	0.219	0.248
	LTE Band 41	20M	QPSK	50	0	Bottom Side	0mm	Laptop	On	40620	2593	AWAN	13.99	14.50	1.125	62.9	1.006	-0.06	0.177	0.200
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Tablet	On	40620	2593	AWAN	14.99	15.50	1.125	62.9	1.006	0	0.886	1.002
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Tablet	On	39750	2506	AWAN	14.37	15.50	1.297	62.9	1.006	-0.03	0.860	1.122
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Tablet	On	40185	2549.5	AWAN	14.60	15.50	1.230	62.9	1.006	0.07	0.910	1.126
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Tablet	On	41055	2636.5	AWAN	14.84	15.50	1.164	62.9	1.006	-0.12	0.933	1.093
13	LTE Band 41	20M	QPSK	1	0	Back	0mm	Tablet	On	41490	2680	AWAN	14.69	15.50	1.205	62.9	1.006	-0.01	0.943	1.143
	LTE Band 41	20M	QPSK	50	0	Back	0mm	Tablet	On	40620	2593	AWAN	13.99	14.50	1.125	62.9	1.006	0.02	0.629	0.712
	LTE Band 41	20M	QPSK	50	0	Back	0mm	Tablet	On	39750	2506	AWAN	13.52	14.50	1.253	62.9	1.006	-0.03	0.601	0.758
	LTE Band 41	20M	QPSK	50	0	Back	0mm	Tablet	On	40185	2549.5	AWAN	13.68	14.50	1.208	62.9	1.006	0.07	0.627	0.762
	LTE Band 41	20M	QPSK	50	0	Back	0mm	Tablet	On	41055	2636.5	AWAN	13.91	14.50	1.146	62.9	1.006	-0.12	0.649	0.748
	LTE Band 41	20M	QPSK	50	0	Back	0mm	Tablet	On	41490	2680	AWAN	13.79	14.50	1.178	62.9	1.006	-0.03	0.650	0.770
	LTE Band 41	20M	QPSK	100	0	Back	0mm	Tablet	On	40620	2593	AWAN	13.95	14.50	1.135	62.9	1.006	0.12	0.729	0.832
	LTE Band 41	20M	QPSK	1	0	Right Edge	0mm	Tablet	On	40620	2593	AWAN	14.99	15.50	1.125	62.9	1.006	0.02	0.203	0.230
	LTE Band 41	20M	QPSK	50	0	Right Edge	0mm	Tablet	On	40620	2593	AWAN	13.99	14.50	1.125	62.9	1.006	-0.03	0.160	0.181
	LTE Band 41	20M	QPSK	1	0	Top Edge	0mm	Tablet	On	40620	2593	AWAN	14.99	15.50	1.125	62.9	1.006	0	0.001	0.001
	LTE Band 41	20M	QPSK	50	0	Top Edge	0mm	Tablet	On	40620	2593	AWAN	13.99	14.50	1.125	62.9	1.006	-0.1	0.001	0.001
	LTE Band 41	20M	QPSK	1	0	Bottom Side	11mm	Laptop	Off	40620	2593	AWAN	22.90	24.00	1.288	62.9	1.006	0.05	0.441	0.572
	LTE Band 41	20M	QPSK	50	0	Bottom Side	11mm	Laptop	Off	40620	2593	AWAN	21.96	23.00	1.271	62.9	1.006	0	0.366	0.468
	LTE Band 41	20M	QPSK	1	0	Back	19mm	Tablet	Off	40620	2593	AWAN	22.90	24.00	1.288	62.9	1.006	0.07	0.367	0.476
	LTE Band 41	20M	QPSK	50	0	Back	19mm	Tablet	Off	40620	2593	AWAN	21.96	23.00	1.271	62.9	1.006	0.15	0.300	0.383
	LTE Band 41	20M	QPSK	1	0	Right Edge	20mm	Tablet	Off	40620	2593	AWAN	22.90	24.00	1.288	62.9	1.006	-0.05	0.569	0.737
	LTE Band 41	20M	QPSK	1	0	Right Edge	20mm	Tablet	Off	39750	2506	AWAN	22.78	24.00	1.324	62.9	1.006	-0.08	0.480	0.639
	LTE Band 41	20M	QPSK	1	0	Right Edge	20mm	Tablet	Off	40185	2549.5	AWAN	22.86	24.00	1.300	62.9	1.006	-0.08	0.547	0.715
	LTE Band 41	20M	QPSK	1	0	Right Edge	20mm	Tablet	Off	41055	2636.5	AWAN	22.80	24.00	1.318	62.9	1.006	-0.13	0.685	0.908
	LTE Band 41	20M	QPSK	1	0	Right Edge	20mm	Tablet	Off	41490	2680	AWAN	22.75	24.00	1.334	62.9	1.006	0.04	0.811	1.088
	LTE Band 41	20M	QPSK	50	0	Right Edge	20mm	Tablet	Off	40620	2593	AWAN	21.96	23.00	1.271	62.9	1.006	0.01	0.480	0.614
	LTE Band 41	20M	QPSK	100	0	Right Edge	20mm	Tablet	Off	40620	2593	AWAN	21.82	23.00	1.312	62.9	1.006	-0.11	0.479	0.632
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Tablet	On	41490	2680	Speed	14.69	15.50	1.205	62.9	1.006	0.03	0.817	0.990
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Tablet	On	40620	2593	Speed	14.99	15.50	1.125	62.9	1.006	0.02	0.801	0.906
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Tablet	On	39750	2506	Speed	14.37	15.50	1.297	62.9	1.006	0.15	0.799	1.043
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Tablet	On	40185	2549.5	Speed	14.60	15.50	1.230	62.9	1.006	0.04	0.781	0.967
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Tablet	On	41055	2636.5	Speed	14.84	15.50	1.164	62.9	1.006	-0.16	0.815	0.954

13.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	User Scenario	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA IV	RMC 12.2Kbps	Bottom Side	11mm	Laptop	Off	1413	1732.6	AWAN	23.80	25.00	1.318			0	0.829	-	1.093
2nd	WCDMA IV	RMC 12.2Kbps	Bottom Side	11mm	Laptop	Off	1413	1732.6	AWAN	23.80	25.00	1.318			0	0.816	1.02	1.076
1st	WCDMA V	RMC 12.2Kbps	Bottom Side	11mm	Laptop	Off	4233	846.6	AWAN	23.73	25.00	1.340			0.01	0.844	-	1.131
2nd	WCDMA V	RMC 12.2Kbps	Bottom Side	11mm	Laptop	Off	4233	846.6	AWAN	23.73	25.00	1.340			-0.08	0.811	1.04	1.086
1st	LTE Band 12	10M_QPSK_1_0	Back	0mm	Tablet	On	23095	707.5	AWAN	18.75	19.00	1.059			0	0.913	-	0.967
2nd	LTE Band 12	10M_QPSK_1_0	Back	0mm	Tablet	On	23095	707.5	AWAN	18.75	19.00	1.059			0	0.900	1.01	0.953
1st	LTE Band 25	20M_QPSK_1_0	Bottom Side	11mm	Laptop	Off	26590	1905	AWAN	23.16	24.50	1.361			0.01	0.858	-	1.168
2nd	LTE Band 25	20M_QPSK_1_0	Bottom Side	11mm	Laptop	Off	26590	1905	AWAN	23.16	24.50	1.361			0.01	0.842	1.02	1.146
1st	LTE Band 41	20M_QPSK_1_0	Back	0mm	Tablet	On	41490	2680	AWAN	14.69	15.50	1.205	62.9	1.006	-0.01	0.943	-	1.143
2nd	LTE Band 41	20M_QPSK_1_0	Back	0mm	Tablet	On	41490	2680	AWAN	14.69	15.50	1.205	62.9	1.006	-0.01	0.937	1.01	1.136

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

14. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body
1.	WWAN + WLAN Ant Main	Yes
2.	WWAN + WLAN Ant Aux	Yes
3.	WWAN + Bluetooth Ant Aux	Yes

General Note:

1. The Intel AX211D2W WLAN/BT module (FCC ID: PD9AX211D2) is integrated into this host.
2. The Intel BE201D2W WLAN/BT module (FCC ID: PD9BE201D2) is also integrated into this host.
3. The WiFi/BT SAR of 1.59 W/kg was used conservatively for the purpose of simultaneous transmission analysis. For the WLAN main and WLAN Aux Sim-Tx analysis include in WLAN modular SAR report. In this report only assessment WWAN to each WLAN/BT antenna.
4. The Scaled SAR summation is calculated based on the same configuration and test position.
5. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 14.2.

14.1 Body Exposure Conditions

Exposure Position	0	1	2	5	0+1 Summed 1g SAR (W/kg)	0+2 Summed 1g SAR (W/kg)	0+5 Summed 1g SAR (W/kg)	SPLSR	Case No.
	WWAN	WLAN Main	WLAN Aux	Bluetooth Aux					
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
Bottom Side at 0mm	0.399	1.590	1.590	1.590	1.989	1.989	1.989	0.020	Case1
Back at 0mm	1.143	1.590	1.590	1.590	2.733	2.733	2.733	0.030	Case 2
Right Edge at 0mm	0.759	1.590	1.590	1.590	2.349	2.349	2.349	0.020	Case 3
Top Edge at 0mm	0.039	1.590	1.590	1.590	1.629	1.629	1.629	0.010	Case 4

14.2 SPLSR Evaluation and Analysis

General Note:

- According to antenna location, Appendix D, the minimum distance between each transmit antenna is using for SPLSR analysis.
- $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 1	WWAN_Main	Bottom Side	0.399	0	280.0	1.99	0.01	Not required
	WLAN_Main		1.59	0				
	WWAN_Main	Bottom Side	0.399	0	150.0	1.99	0.02	Not required
	WLAN_Aux		1.59	0				
	WWAN_Main	Bottom Side	0.399	0	150.0	1.99	0.02	Not required
	Bluetooth Aux		1.59	0				
Case 2	WWAN_Main	Back	1.143	0	280.0	2.73	0.02	Not required
	WLAN_Main		1.59	0				
	WWAN_Main	Back	1.143	0	150.0	2.73	0.03	Not required
	WLAN_Aux		1.59	0				
	WWAN_Main	Back	1.143	0	150.0	2.73	0.03	Not required
	Bluetooth Aux		1.59	0				
Case 3	WWAN_Main	Right Edge	0.759	0	280.0	2.35	0.01	Not required
	WLAN_Main		1.59	0				
	WWAN_Main	Right Edge	0.759	0	150.0	2.35	0.02	Not required
	WLAN_Aux		1.59	0				
	WWAN_Main	Right Edge	0.759	0	150.0	2.35	0.02	Not required
	Bluetooth Aux		1.59	0				
Case 4	WWAN_Main	Top Edge	0.039	0	280.0	1.63	0.01	Not required
	WLAN_Main		1.59	0				
	WWAN_Main	Top Edge	0.039	0	150.0	1.63	0.01	Not required
	WLAN_Aux		1.59	0				
	WWAN_Main	Top Edge	0.039	0	150.0	1.63	0.01	Not required
	Bluetooth Aux		1.59	0				

Test Engineer : James Peng and Chris Yang

15. Uncertainty Assessment

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Applicable for SAR Measurements:

Uncertainty Budget (4 MHz - 10 GHz range)							
Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	18.60	N	2	1	1	9.3	9.3
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Linearity	4.70	R	1.732	1	1	2.7	2.7
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Boundary Effects	2.00	R	1.732	1	1	1.2	1.2
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	6.70	R	1.732	1	1	3.9	3.9
Post-processing	4.00	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Holder	3.60	N	1	1	1	3.6	3.6
Test sample Positioning	3.03	N	1	1	1	3.0	3.0
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Phantom and Setup							
Phantom Uncertainty	7.60	R	1.732	1	1	4.4	4.4
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.77	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.77	2.3	2.2
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.77	1.1	1.1
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.77	1.7	1.6
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						14.5%	14.2%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						29.0%	28.4%

Applicable for Power Density Measurements:

Error Description	Uncertainty Value (±dB)	Probability	Divisor	(Ci)	Standard Uncertainty (±dB)
Probe Calibration	0.49	N	1	1	0.49
Probe correction	0.00	R	1.732	1	0.00
Frequency response (BW ≤ 1 GHz)	0.20	R	1.732	1	0.12
Sensor cross coupling	0.00	R	1.732	1	0.00
Isotropy	0.50	R	1.732	1	0.29
Linearity	0.20	R	1.732	1	0.12
Probe scattering	0.00	R	1.732	1	0.00
Probe positioning offset	0.30	R	1.732	1	0.17
Probe positioning repeatability	0.04	R	1.732	1	0.02
Sensor mechanical offset	0.00	R	1.732	1	0.00
Probe spatial resolution	0.00	R	1.732	1	0.00
Field impedance dependance	0.00	R	1.732	1	0.00
Amplitude and phase drift	0.00	R	1.732	1	0.00
Amplitude and phase noise	0.04	R	1.732	1	0.02
Measurement area truncation	0.00	R	1.732	1	0.00
Data acquisition	0.03	N	1	1	0.03
Sampling	0.00	R	1.732	1	0.00
Field reconstruction	2.00	R	1.732	1	1.15
Forward transformation	0.00	R	1.732	1	0.00
Power density scaling	0.00	R	1.732	1	0.00
Spatial averaging	0.10	R	1.732	1	0.06
System detection limit	0.04	R	1.732	1	0.02
Uncertainty terms dependent on the DUT and environmental factors					
Probe coupling with DUT	0.00	R	1.732	1	0.0
Modulation response	0.40	R	1.732	1	0.2
Integration time	0.00	R	1.732	1	0.0
Response time	0.00	R	1.732	1	0.0
Device holder influence	0.10	R	1.732	1	0.1
DUT alignment	0.00	R	1.732	1	0.0
RF ambient conditions	0.04	R	1.732	1	0.0
Ambient reflections	0.04	R	1.732	1	0.0
Immunity / secondary reception	0.00	R	1.732	1	0.0
Drift of the DUT		R	1.732	1	
Combined Std. Uncertainty					1.34
Expanded STD Uncertainty (95%)					2.68

16. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [6] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [7] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [8] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [9] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [10] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.