



## Test Report

Test Report No.:	KTI06EF08006		
Registration No.:	99058		
Applicant:	STORMBLUE CO., LTD.		
Applicant Address:	#1308, World Meridian Venture Center, Gasan-dong 60-24, Geumcheon-gu, Seoul, Korea 153-801		
Product:	Bluetooth Multimedia Player		
FCC ID:	PU9A9PLUS	Model No.	A9+
Receipt No.:	06-0726	Date of receipt:	July 30, 2006
Date of Issue:	August 28, 2006		
Testing location	Korea Technology Institute Co., Ltd. 51-19, Sanglim3-Ri, Docheok-Myeun, Gwangju-Shi, Gyeungki-Do, Korea		
Test Standards:	FCC/ANSI. C63.4: 2003		
Rule Parts: FCC	Part 15, Class B		
Equipment Class:	Computing Device Peripheral		
Test Result:	The above-mentioned product has been tested with compliance.		

Tested by: T. W. Lee  
/ Engineer

Approved by: G. C. Min  
/President

Signature

Date

Signature

Date

Other Aspects:	
Abbreviations:	* OK, Pass=passed * Fail=failed * N/A=not applicable

- This test report is not permitted to copy partly without our permission.

- This test result is dependent on only equipment to be used.

- This test result is based on a single evaluation of one sample of the above mentioned.

- This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S Government.

- We certify this test report has been based on the measurement standards that is traceable to the national or international standards.

**»»» Contents «««**

<b>Contents</b>	<b>2</b>
<b>List of Tables</b>	<b>2</b>
<b>List of Figures</b>	<b>2</b>
<b>List of Photographs</b>	<b>2</b>
<b>1. General</b>	<b>3</b>
<b>2. Test Site</b>	<b>3</b>
<b>2.1 Location</b>	<b>4</b>
<b>2.2 List of Test and Measurement Instruments</b>	<b>4</b>
<b>2.3 Test Data</b>	<b>4</b>
<b>2.4 Test Environment</b>	<b>5</b>
<b>3. Description of the tested samples</b>	<b>5</b>
<b>3.1 Rating and Physical characteristics</b>	<b>5</b>
<b>3.2 Submitted documents</b>	<b>6</b>
<b>4. Measurement conditions</b>	<b>6</b>
<b>4.1 Modes of operation</b>	<b>6</b>
<b>4.2 List of peripherals</b>	<b>6</b>
<b>4.3 Uncertainty</b>	<b>7</b>
<b>4.4 Test Setup</b>	<b>8</b>
<b>5. Emission Test</b>	<b>8</b>
<b>5.1 Conducted Emissions</b>	<b>12</b>
<b>5.2 Radiated Emissions</b>	<b>17</b>
<b>6. Information about test item</b>	<b>18</b>
<b>7. Test Report</b>	<b>16</b>



## 1. General

This equipment has been shown to be capable of compliance with the applicable technical standards and was tested in accordance with the measurement procedures as indicated in this report.

We attest to the accuracy of data. Korea Technology Institute Co., Ltd. performed all measurements reported herein. And were made under Chief Engineer's supervisor.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

## 2. Test Site

Korea Technology Institute Co., Ltd.

### 2.1 Location

51-19, Sanglim3-Ri, Docheok-Myeon, Gwangju-Shi, Gyeungki-Do, Korea

The Test Site is in compliance with ANSI C63.4/2001 for measurement of radio Interference.



## 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

### - Conducted Emissions

Kind of Equipment	Type	S/N	Calibrated until
Spectrum Analyzer	R3261C	61720417	02.2007
Field Strength Meter	ESIB40	100093	05.2007
LISN	KNW407	8-1157-2	01.2007
LISN	EM-7823	115019	05.2007
Conducted Cable	N/A	N/A	11.2006

### - Radiated Emissions

Kind of Equipment	Type	S/N	Calibrated until
Field Strength Meter	ESIB40	100093	05.2007
Spectrum Analyzer	R3261C	61720417	02.2007
Pre Amplifier	8447D	2944A06874	11.2006
Biconical Antenna	VHA9103	1111	01.2007
LogPeriodic Antenna	UHALP9107	1568	01.2007
Horn Antenna	3115	6443	06.2006
Open Site Cable	N/A	N/A	11.2006
Antenna Mast	DETT-03	N/A	N/A
Antenna & Turntable controller	DETT-04	91X519	N/A

## 2.3 Test Date

Date of Application: July 30, 2006

Date of Test: August 01, 2006

## 2.4 Test Environment

See each test item's description.



### 3. Description of the tested samples

The EUT is a MP3 Player.

#### 3.1. Rating and Physical Characteristics

Audio Format	MPEG1,2,2.5 Layer3(8~320Kbps, VBR), WMA Version 9 (32~320Kbps) Ogg Vorbis (Q1 ~Q10) ID3 Tag Ver1.0/1.1/2.0 Support
Video Format	Support MPEG4 Simple Profile Support AVI file format with mp4 extension Support 220 x 176, 20 frames Support Windows Tool program, which is released transcoder
Image	Text View JPEG (ISO/IEC 10918-1, Annex F – Sequential DCT-based mode of operation.)
Display	2.0" TFT LCD (220 x 176)
Sound	23mW + 23mW sound output / S/ N ratio : 90dB
File System	FAT12, FAT16, FAT32
Capacity	1GB ~ 4GB
Extendable	For SD card
PC Interface	USB 2.0 : Mass Storage Class Speed : UP Load 5 Mbps / Down Load 4Mbps
Support OS	Windows98 / 98SE / ME / 2000 / XP / 2003
Audio	Headphone Out, Line-In, Bluetooth TX (Option)
EQ	POP, Rock, Classic, Vocal, Live, D-bass, Flat, 5 Band User EQ
FM Radio	FM Tuner (20Preset) / World wide channel support
Audio post processing	Equalizer (Normal, Pop, Rock, Live, Classic, Vocal, Dbass, User)
Dimension	84 x 43 x 19mm (70g)

#### 3.2 Submitted Documents

- User's Guide
- Block Diagram



## 4. Measurement Conditions

Testing Input Voltage: AC 220V

### 4.1 Modes of Operation

The EUT was in the following operation mode during all testing;

- 1) File transfer each disk.

### 4.2 Additional Equipment

DEVICE TYPE	Manufacturer	M/N	S/N	FCC ID
PC	JOYONTECH	JT4334	N / A	DOC
Monitor	HEWLETT PACKARD	Pavilion vf17	CNC5040351	DOC
Keyboard	COMPAQ COMPUTER CORPORATION	SDM4700P	B58A20CLPNLOLZ	DOC
Mouse	logitech	M-S69	3892D101	DOC
Mouse	SEJIN ELECTRON INC.	SMB-400	0CIM004047	GJJS965M3
Printer	HEWLETT PACKARD	C4569A	SG6A7160PJ	DOC

### 4.3 Uncertainty

#### 1) Radiated disturbance

$U_c$  (Combined standard Uncertainty) =  $\pm 1.8\text{dB}$

Expanded uncertainty  $U=KU_c$

$K = 2$

$\therefore U = \pm 3.6\text{dB}$


#### 2) Conducted disturbance

$U_c = \pm 0.88\text{dB}$

$U = KU_c = 2 \times U_c = \pm 1.8\text{dB}$



#### 4.4 Test Setup

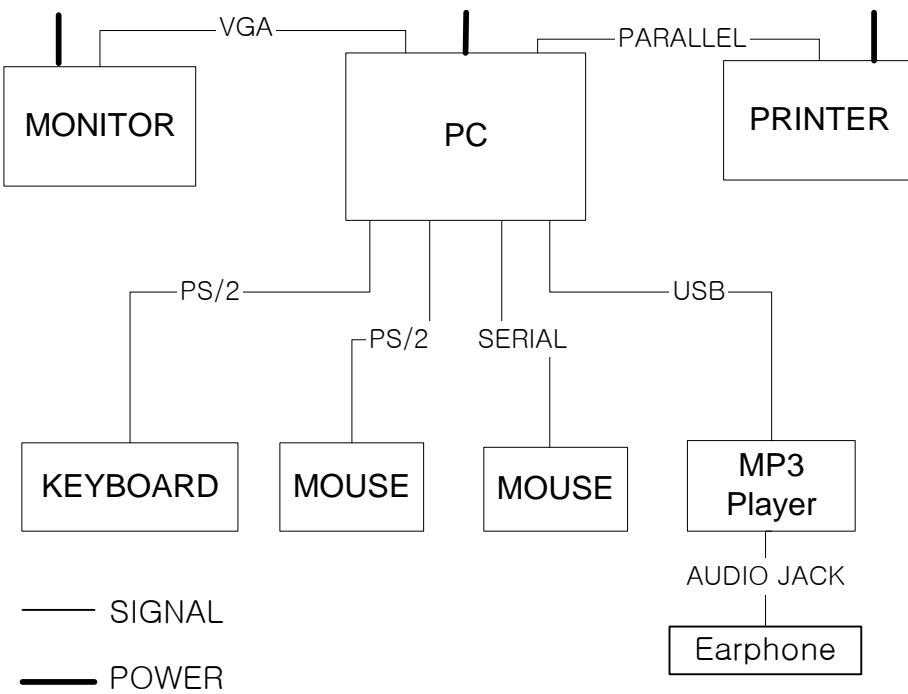



## 5. EMISSION Test

### 5.1. Conducted Emissions

**Result:****Pass**

The line-conducted facility is located inside a 2.3M x 3.5M x 5.5M shielded closure.

The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 605-05. A 1m x 1.5m wooden table 80cm high is placed 80cm away from the conducting ground plane and 40cm away from the sidewall of the shielded room. Electro-Metroics Model EM-7823 (9kHz-30MHz)50ohm/50 uH Line-Impedance Stabilization Networks (LISN) are bonded to the shielded room.

The EUT is powered from the Electro-Metroics LISN and the support equipment is powered from the Kyoritsu LISN. Power to the LISN are filtered by a high-current high-insertion loss shield enclosures power line filters (100dB 14kHz-1GHz).

The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure.

All electrical cables are shielded by copper pipe with inner diameter of 1".

If the EUT is a DC-Powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the Rohde & Schwarz LISN.

All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length.

Sufficient time for the EUT, Support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The frequency producing the maximum level was reexamined using EMI field Intensity meter (ESPC). The detector function was set to CISPR quasi-peak mode.

The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; if applicable; whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of conducted test.

Each EME reported was calibrated using self-calibrating mode.



Figure 1: Spectral Diagram, LINE-PE

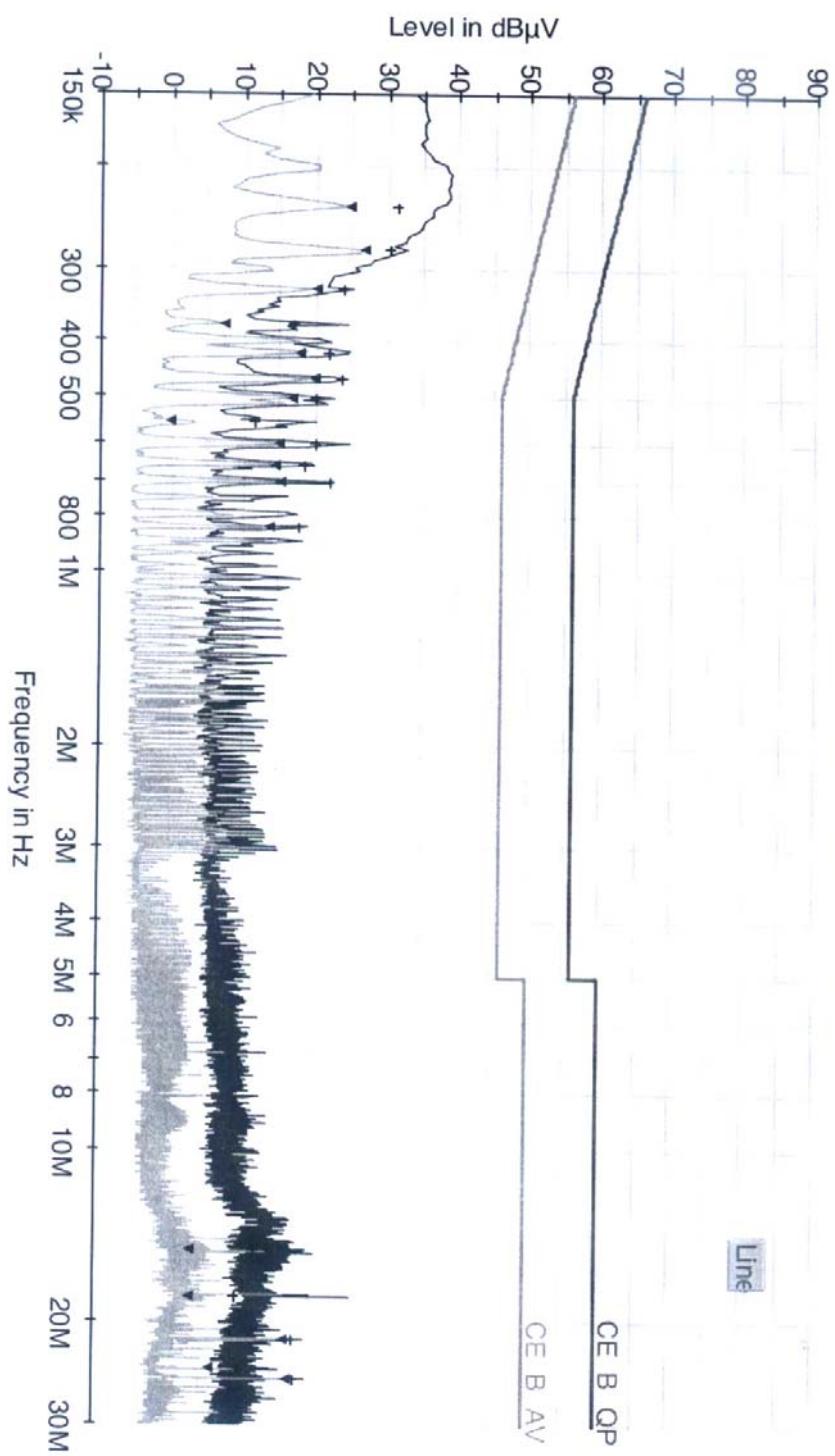
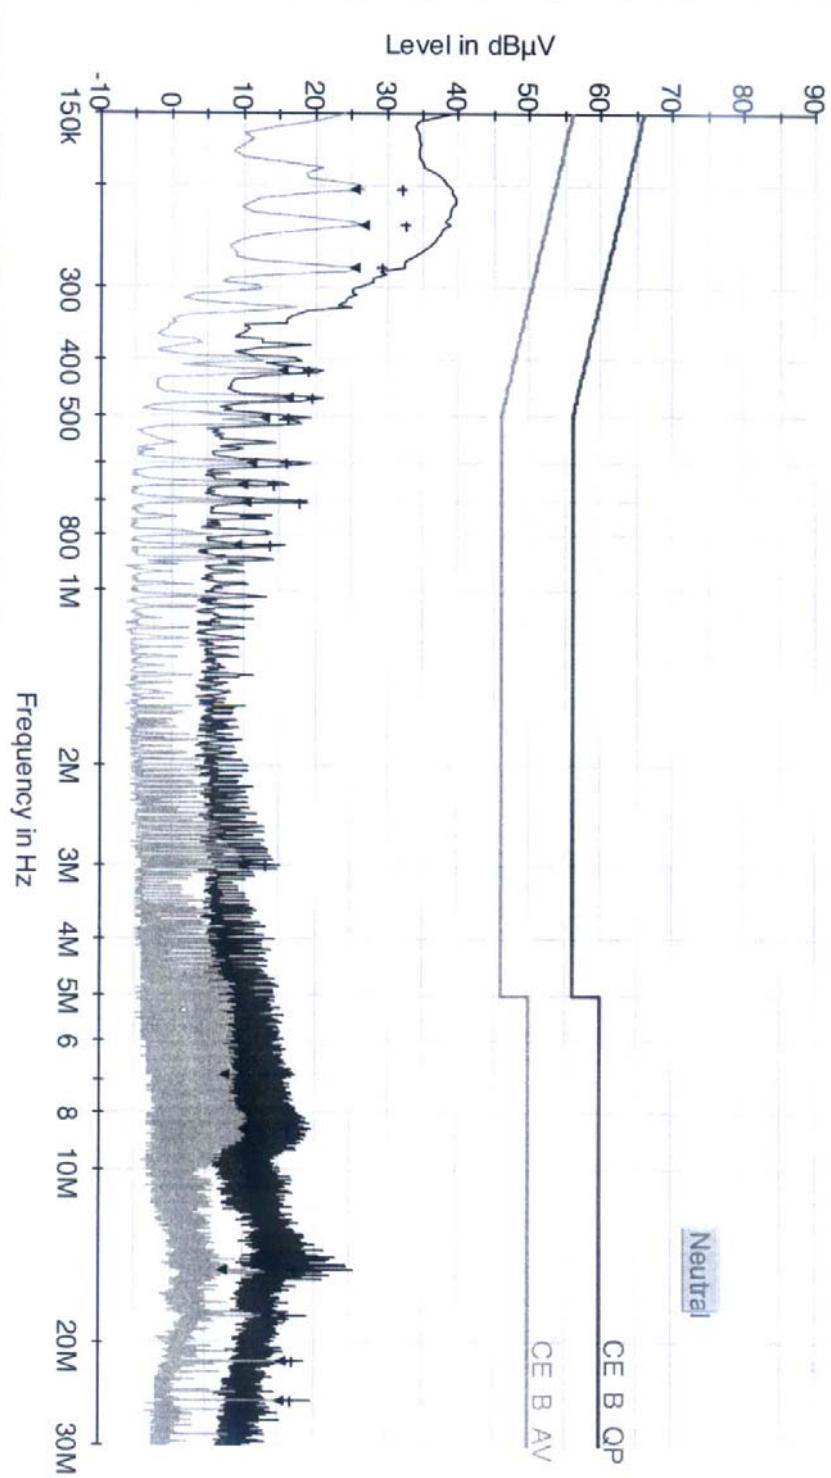




Figure 2: Spectral Diagram, NEUTRAL-PE



**Table 2: Test Data, Conducted Emissions**

Frequency (MHz)	(1) Reading (dB $\mu$ V)	Line	(2)C/F (dB)	(3)Actual (dB $\mu$ V)	(4) Limit (dB $\mu$ V)	(5) Margin (dB)
0.19	30.70	L2	0.21	30.91	64.49	33.58
0.20	34.10	L1	0.22	34.32	63.61	29.29
0.23	31.60	L1	0.22	31.82	62.45	30.63
0.28	30.10	L1	0.22	30.32	60.82	30.50
16.34	31.00	L2	0.85	31.85	50.00	18.15
20.43	30.50	L2	0.88	31.38	50.00	18.52

**NOTES:**

1. All modes of operation were investigated  
And the worst-case emissions are reported.
2. All other emissions are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR Quasi-peak mode.
5. L1 = LINE-PE, L2 = NEUTRAL-PE
6. C/F = Correction Factor(LISN factor + Cable loss)
7. The limit for Class B digital device is 66dB $\mu$ V to 56dB $\mu$ V from 150KHz to 500KHz, 56dB $\mu$ V from 500KHz to 5MHz, 60dB $\mu$ V Above 5MHz.

**♦ Margin Calculation**

$$(5) \text{ Margin} = (4) \text{ Limit} - (3) \text{ Actual}$$

$$[(3) \text{ Actual} = (1) \text{ Reading} + (2) \text{ C/F}]$$



## 5.2 Radiated Emissions

**Result:** Pass

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband Amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and Investigated. The system configurations, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30MHz to 1GHz using Biconical Antenna and LogPeriodic Antenna. Above 1GHz, Double ridged horn Antenna was used.

Final measurements were made outdoors at 3-meter test range using Schwarzbeck antennas. The test equipment was placed on a wooden table situated on a 4x4 meter area adjacent to the measurement area. Turntable was to protect from weather in the dome that made with Polyethylene film. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter (ESIB40). The detector function was set to CISPR quasi-peak or peak mode as appropriate and the bandwidth of the receiver was set to 120kHz or 1 MHz depending on the frequency or type or signal.

The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8meter high non-metallic 1 x 1.5 meter table.

The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed, and/or support equipment, if applicable; and changing the polarity of the antenna and rotating the EUT in turns with three orthogonal axes for portable devices, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of radiated emission test. Each EME reported was calibrated using self-calibrating mode.



Table 3: Test Data, Radiated Emissions

Frequency (MHz)	Pol.	Height [m]	Angle [°]	(1) Reading (dB $\mu$ V)	(2) AFCL (dB/m)	(3) Actual (dB $\mu$ V/m)	(4) Limit (dB $\mu$ V/m)	(5) Margin (dB)
132.30	V	1.11	181	17.6	16.74	34.34	43.50	9.16
159.95	H	3.89	207	15.2	17.64	32.84	43.50	10.66
192.00	V	1.34	170	13.8	19.36	33.16	43.50	10.34
207.90	H	3.68	34	11.9	19.36	31.26	43.50	12.24
245.15	H	3.29	32	17.6	20.91	38.51	46.00	7.49
536.89	H	2.61	175	11.9	25.74	37.64	46.00	8.36

Table. Radiated Measurements at 3-meters

**Notes:** 1. All modes of operation were investigated.

And the worst-case emission are reported.

2. All other emission is non-significant.

3. All readings are calibrated by self-mode in receiver.

4. Measurements using CISPR quasi-peak mode.

5. AFCL = Antenna factor and cable loss

6. H = Horizontal, V = Vertical Polarization

7. The limit for Class B digital device is 100uV(40dB $\mu$ V) from 30MHz to 88MHz,

150 uV (43.5dB $\mu$ V) from 88MHz to 216MHz, 200uV(46dB $\mu$ V) from 216MHz to 960MHz

and 500 uV (54dB $\mu$ V) from above 960MHz.

#### ♠ Margin Calculation

(5) Margin = (4) Limit – (3) Actual

$$[(3) \text{ Actual} = (1) \text{ Reading} + (2) \text{ AFCL}]$$



## 6. Information about test item

A9<sup>+</sup>BS

### 6.1 Equipment information

Equipment model name	A9 <sup>+</sup> BS
Type of equipment	Bluetooth Interface
Frequency band	2402 ~ 2480 MHz
Type of Modulation	GFSK
Channel Spacing	1.0 MHz
Type of antenna	Chip Antenna
Power	1. USB mode : DC 3.7 V (By USB port of PC)

### 6.2 Tested frequency

Frequency	TX	RX
Low frequency	2402MHz	2402MHz
Middle frequency	2441MHz	2441MHz
High frequency	2480MHz	2480MHz

### 6.3 Tested environment

Temperature	: 15 ~ 35 (°C)
Relative humidity content	: 20 ~ 75 %
Air pressure	: 86 ~ 103 kPa
Details of power supply:	N/A

### 6.4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
Notebook : COMPAQ type EvoD5M	SV20	-	SAMSUNG

### 6.5 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing

- ➔ 1. USB Cable : added the Core



## 7. Test Report

### 7.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
<b>I. Transmit mode(Tx)</b>				
15.247(a)	Carrier Frequency Separation	>25 kHz	Conducted	C
	Number of Hopping Frequencies	>75 hops		C
	20 dB Bandwidth	< 1MHz		C
	Dwell Time	0.4 seconds within a 30 second period per any frequency		C
15.247(b)	Transmitter Output Power	< 1Watt		C
15.247(c)	Band-edge (or Occupied BW for IC)	2400 < f < 2483.5 MHz		C
	Out of Band Emissions (Bandwidth at 20 dB below)	The radiated emission to any 100kHz of outband shall be at least 20dB below the highest inband spectral density.		C
15.205	General Field Strength Limits	< FCC 15.209 limits	Radiated	C
15.209	(Restricted Band and Radiated)			
15.207	AC Conducted Emissions	EN 55022	Line Conducted	C
<b>II. Receive mode(Rx)</b>				
15.107/ 15.207	AC Conducted Emissions	EN 55022	Line Conducted	C
15.109/ 15.209	Radiated Emission Out-of-Band Emissions (Band Width at 20dB below)	< FCC 15.209 limits	radiated	C
Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable				

The sample was tested according to the following specification:

FCC Parts 15.247; ANSI C-63.4-2001



## 7.2 Transmitter requirements

### 7.2.1 Carrier Frequency Separation

#### Procedure:

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 30 kHz (1% of the span or more) Sweep = auto

VBW = 30 kHz Detector function = peak

Trace = max hold

#### Measurement Data:


Frequency of marker #1 (MHz)	Frequency of marker #2 (MHz)	Test Results	
		Carrier Frequency Separation (MHz)	Results
2440.985	2441.945	1.01	Complies

- See next pages for actual measured spectrum plots.

#### Minimum Standard:

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

#### Measurement Setup

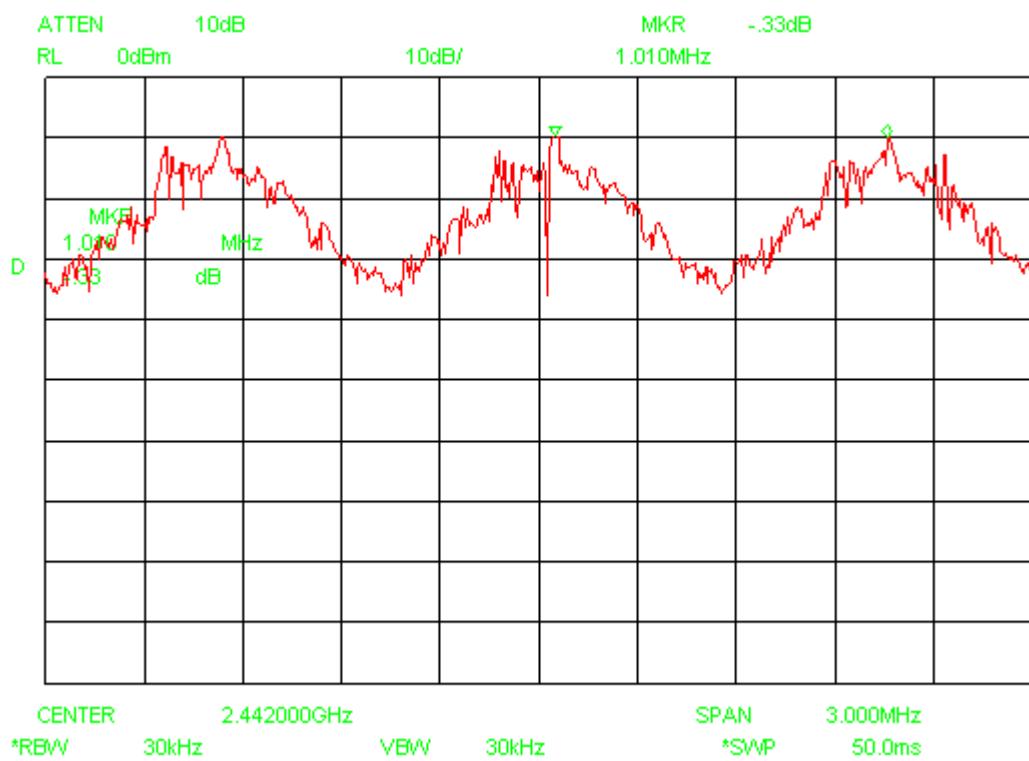



## 7.2.2 Number of Hopping Frequencies

### Procedure:

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, four frequency ranges within the 2400 ~ 2484 MHz FH band were examined.

#### The spectrum analyzer is set to:

Frequency range 1: Start = 2400MHz, Stop = 2460MHz

2: Start = 2460MHz, Stop = 2484MHz

RBW = 100 kHz (1% of the span or more) Sweep = auto

VBW = 100 kHz (VBW  $\geq$  RBW) Detector function = peak

Trace = max hold Span = 60MHz, 24MHz

### Measurement Data: Complies

Total number of Hopping Channels	79
----------------------------------	----

-See next pages of actual measured spectrum plots.

### Minimum Standard:

At least 75 hopes
-------------------


### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

TEST EQUIPMENT USED: 02, 19, 50




ATTEN 10dB MKR -54.83dBm  
RL 0dBm 10dB/ 2.40000GHz

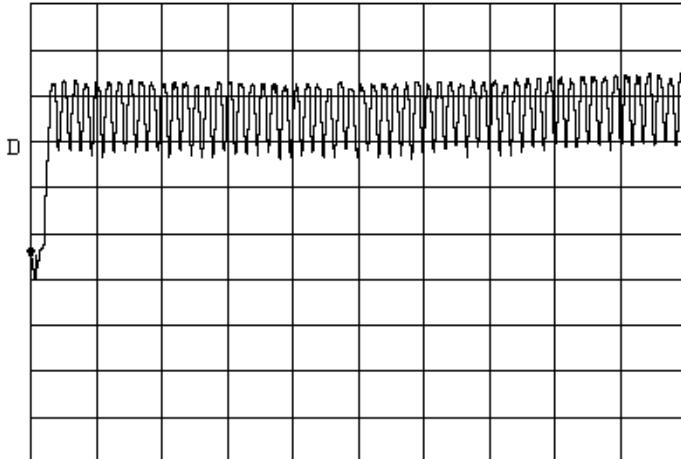

START 2.40000GHz STOP 2.46000GHz  
\*RBW 100kHz VBW 100kHz SWP 50.0ms

ATTEN 10dB MKR -15.50dBm  
RL 0dBm 10dB/ 2.46000GHz

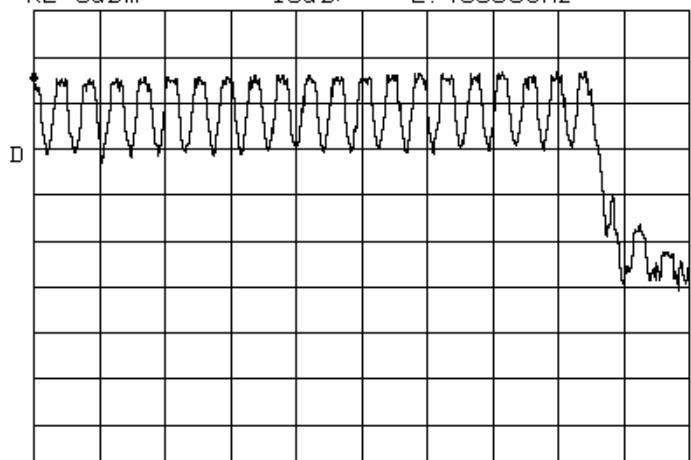

START 2.46000GHz STOP 2.48400GHz  
\*RBW 100kHz VBW 100kHz SWP 50.0ms



### 7.2.3. 20 dB Bandwidth

#### Procedure:

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is ) as close as possible to ) even with the reference marker level. The marker-delta reading at this is the 20 dB bandwidth of the emission.

#### The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 2 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 10 kHz (1% of the 20dB bandwidth or more) Sweep = auto

VBW = 30 kHz (VBW  $\geq$  RBW) Detector function = peak

Trace = max hold

#### Measurement Data:

Frequency (MHz)	Channel No.	Test Results	
		Measured Bandwidth (MHz)	Result
2402	1	0.73	Complies
2441	40	0.77	Complies
2480	79	0.73	Complies

- See next pages for actual measured spectrum plots.


#### Minimum Standard:

The transmitter shall have a maximum 20dB bandwidth of 1 MHz.


#### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


TEST EQUIPMENT USED: 01, 19, 50

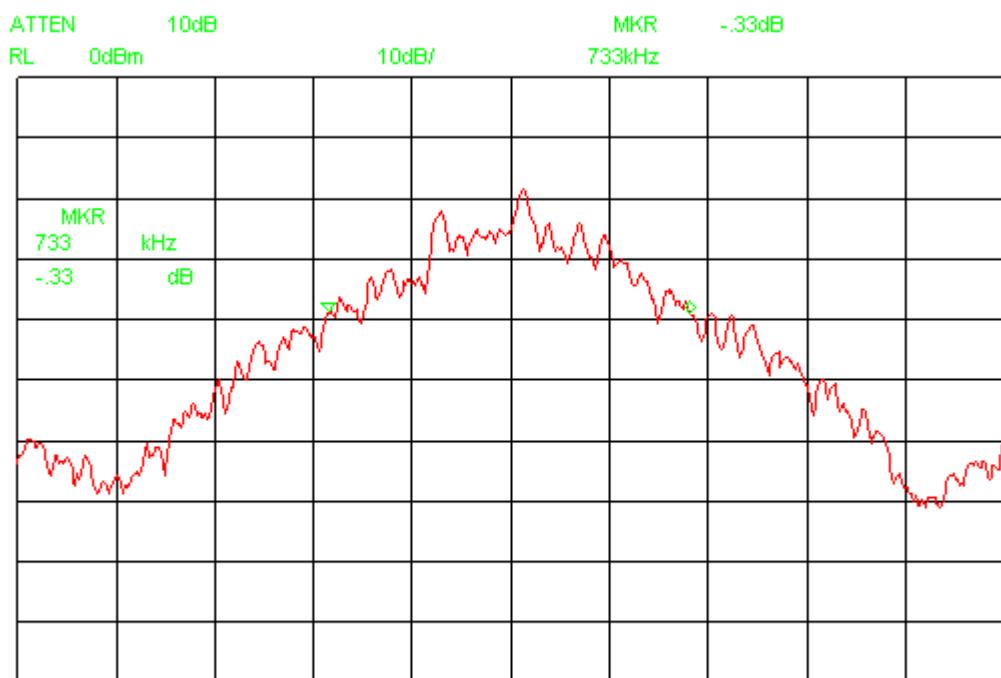

CENTER 2.402000GHz  
\*RBW 10kHz \*VBW 30kHz SPAN 2.000MHz  
SWP 50.0ms

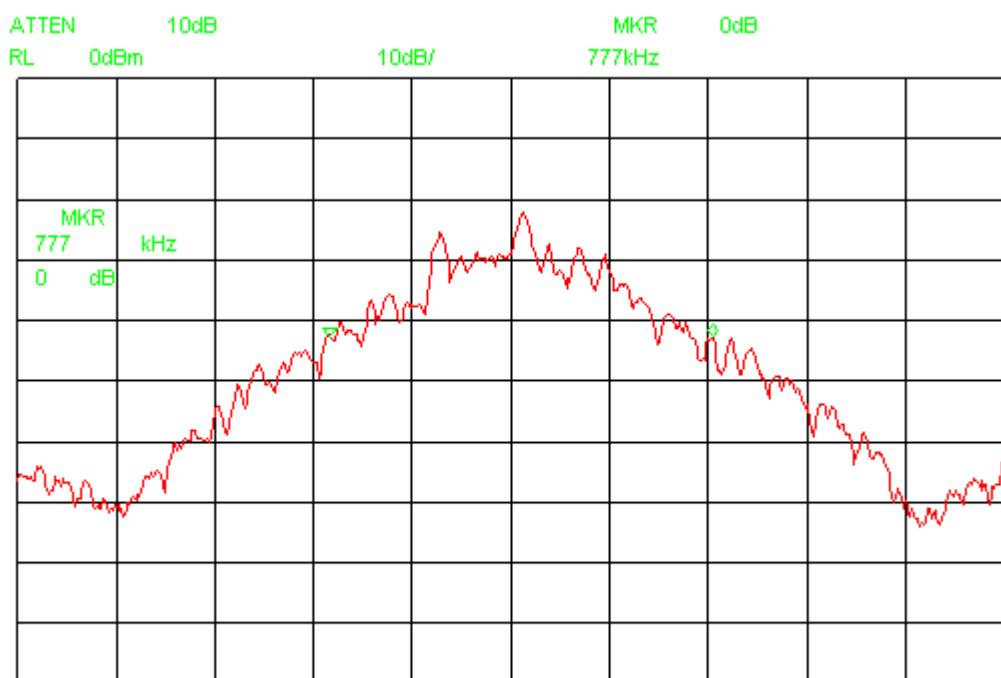

CENTER 2.441000GHz  
\*RBW 10kHz \*VBW 30kHz SPAN 2.000MHz  
SWP 50.0ms

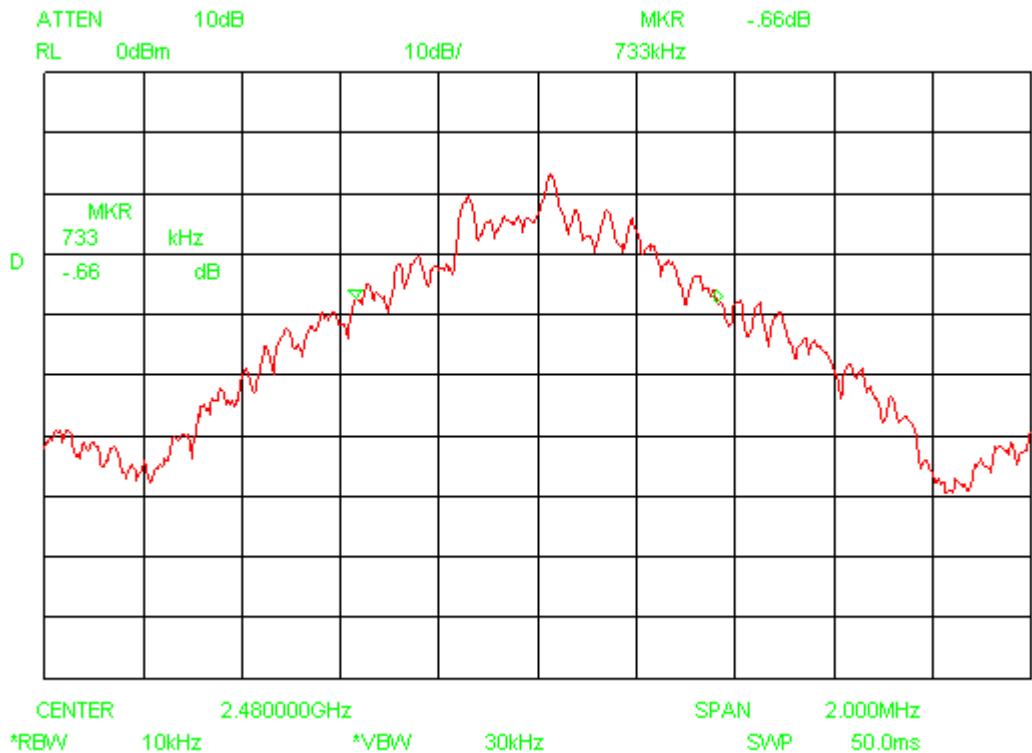



## 7.2.4 Time of Occupancy (Dwell Time)

### Procedure:

The dwell time was measured with a spectrum analyzer connected to the terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Center frequency = 2441 MHz      Span = zero

RBW = 1 MHz      VBW = 1 MHz (VBW  $\geq$  RBW)

Trace = max hold      Detector function = peak

### Measurement Data:

Packet Type	Burst duration in one hop (us)	Test Results	
		Dwell Time (ms)	Result
DH1	570	182.463	Complies

- See next pages of actual measured spectrum plots.


### Minimum Standard:

0.4 seconds within a 30 second period per any frequency

### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

TEST EQUIPMENT USED: 01, 19, 50

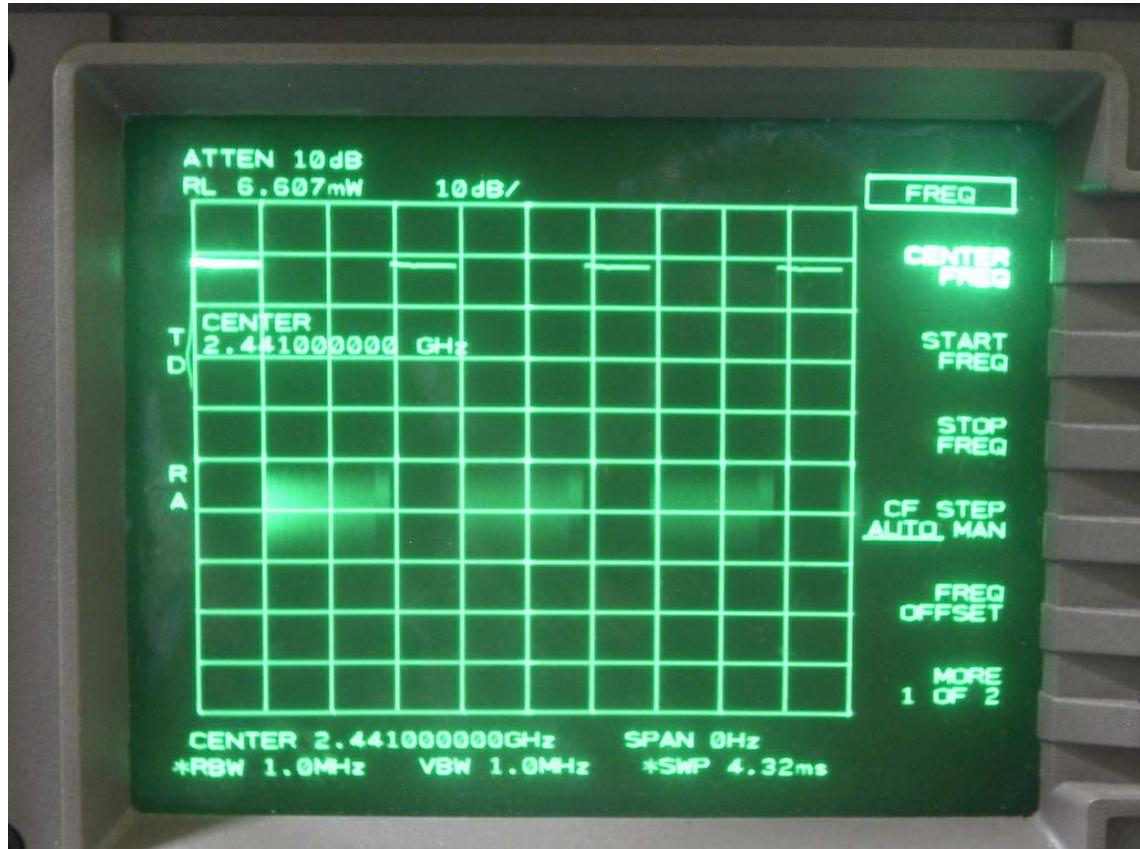



## 7.2.5 Peak Output Power

### Procedure:

The peak output power was measured with a spectrum analyzer connected to the terminal, while EUT had its hopping function disable at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

#### The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 1 MHz (greater than the 20dB bandwidth of the emission being measured)

VBW = 1 MHz (VBW  $\geq$  RBW)      Detector function = peak

Trace = max hold      Sweep = auto

### Measurement Data:

Frequency (MHz)	Ch.	Test Results		
		dBm	mW	Result
2402	1	<b>-10.91</b>	<b>0.0081</b>	Complies
2441	40	<b>-12.07</b>	<b>0.0062</b>	Complies
2480	79	<b>-12.22</b>	<b>0.0060</b>	Complies

- See next pages of actual measured spectrum plots.




**Minimum Standard:**

< 1W

### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

TEST EQUIPMENT USED: 01, 19, 50

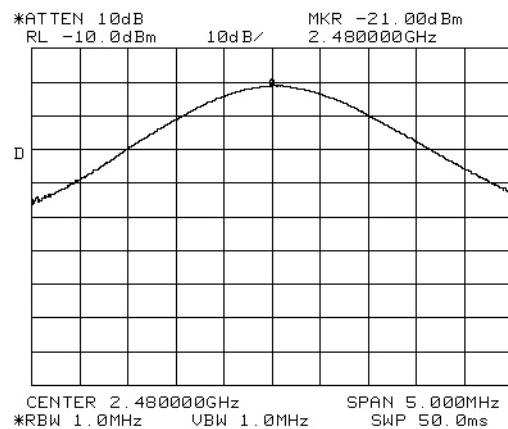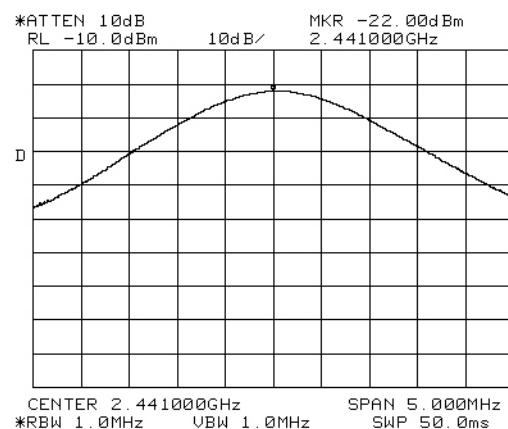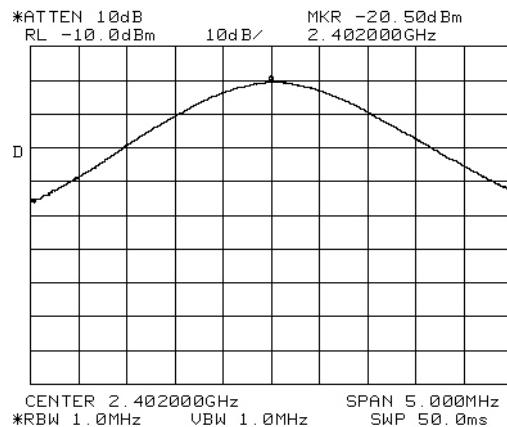



### 7.2.6 Band – edge (at 20 dB blow)

### **Procedure:**

The bandwidth at 20 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz VBW = 1 kHz

### Measurement Data: Complies


- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages of actual measured spectrum plots.

<b>Minimum Standard:</b>	> 20 dBc
--------------------------	----------


## Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


#### TEST EQUIPMENT USED: 01, 02, 19, 50

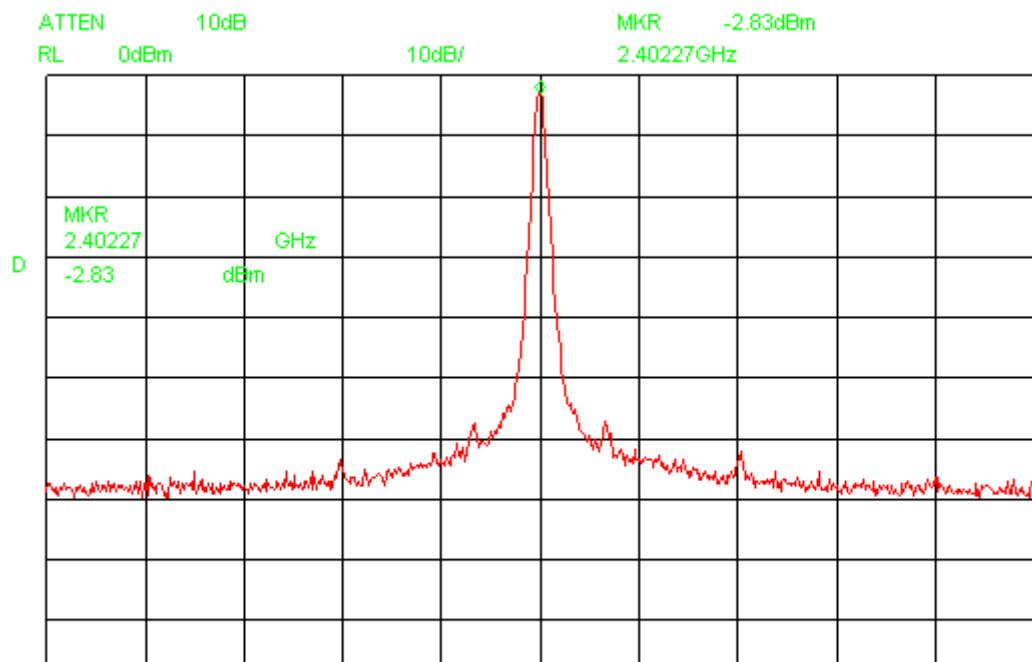

CENTER 2.40227GHz  
\*RBW 100kHz VBW 100kHz SPAN 20.00MHz  
SWP 50.0ms

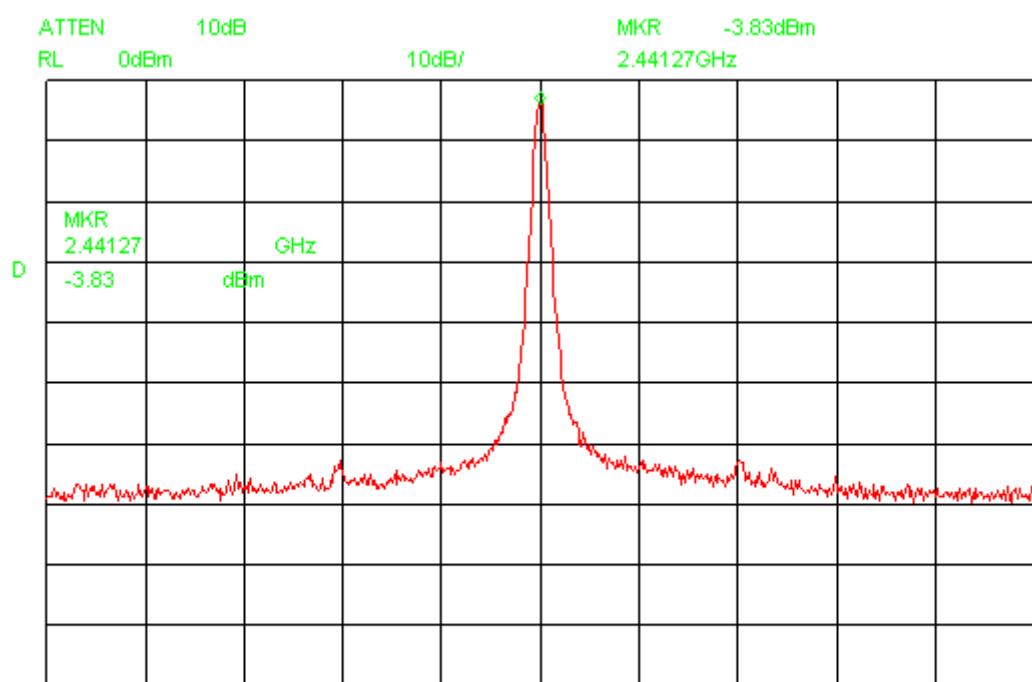

CENTER 2.44127GHz  
\*RBW 100kHz VBW 100kHz SPAN 20.00MHz  
SWP 50.0ms

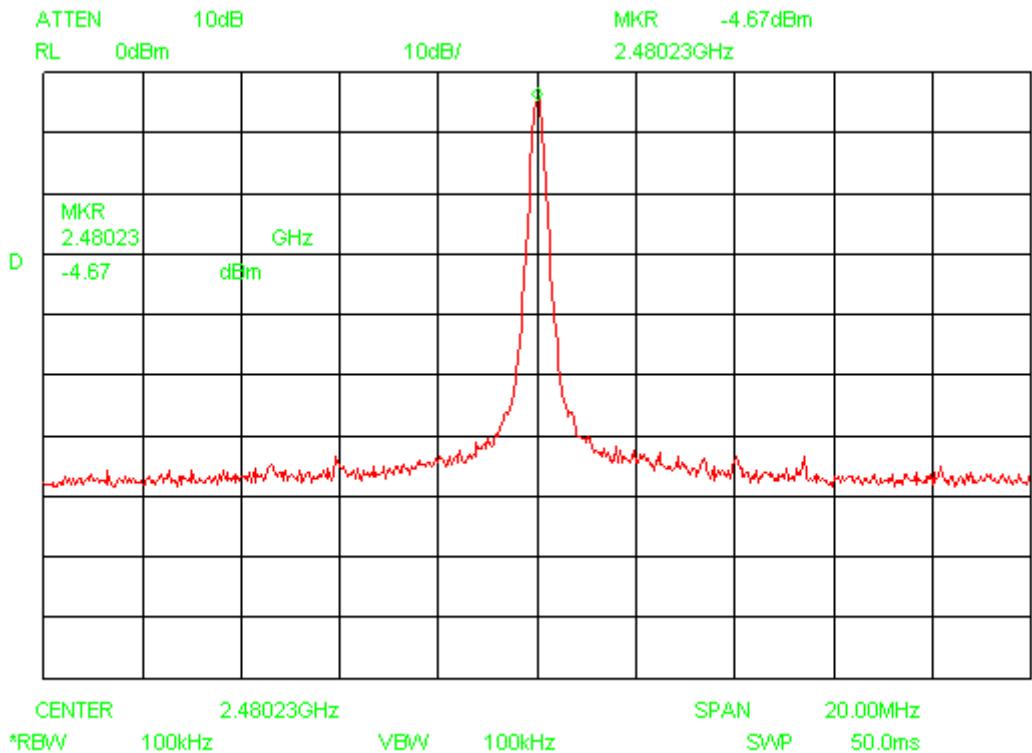



## Spurious Radiated Emission

30MHz ~ 25GHz

ATTEN

10dB

RL 0dBm


10dB/

MKR

-60.00dBm

781.8MHz

D

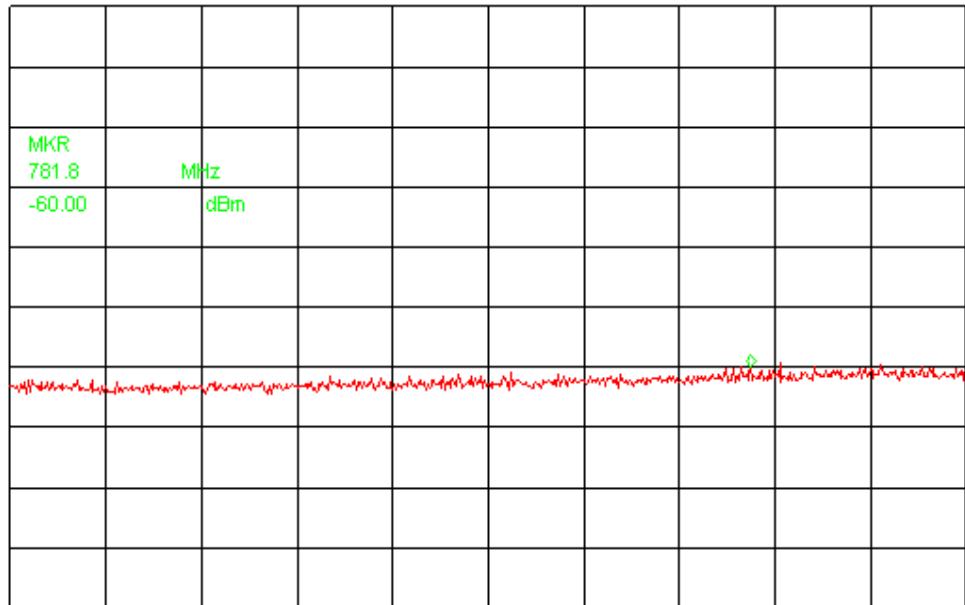

START

30.0MHz

STOP

1.0000GHz

RBW 1.0MHz

VBW

1.0MHz

SWP 50.0ms

ATTEN

10dB

RL 0dBm


10dB/

MKR

-56.17dBm

2.650GHz

D

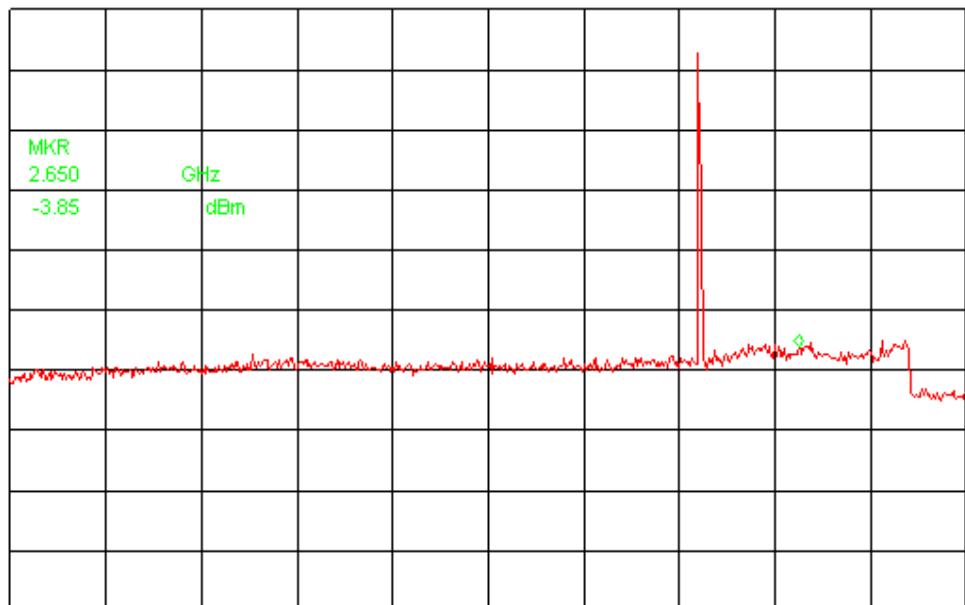

START

1.000GHz

STOP



3.000GHz



RBW 1.0MHz


VBW

1.0MHz


SWP 50.0ms

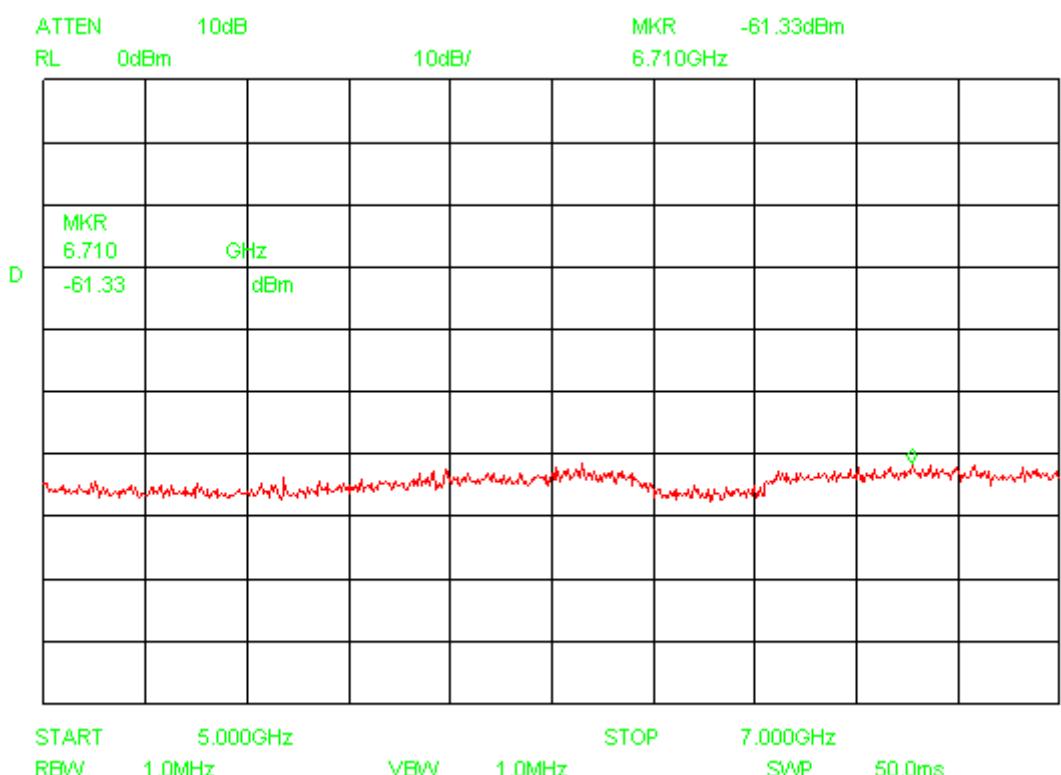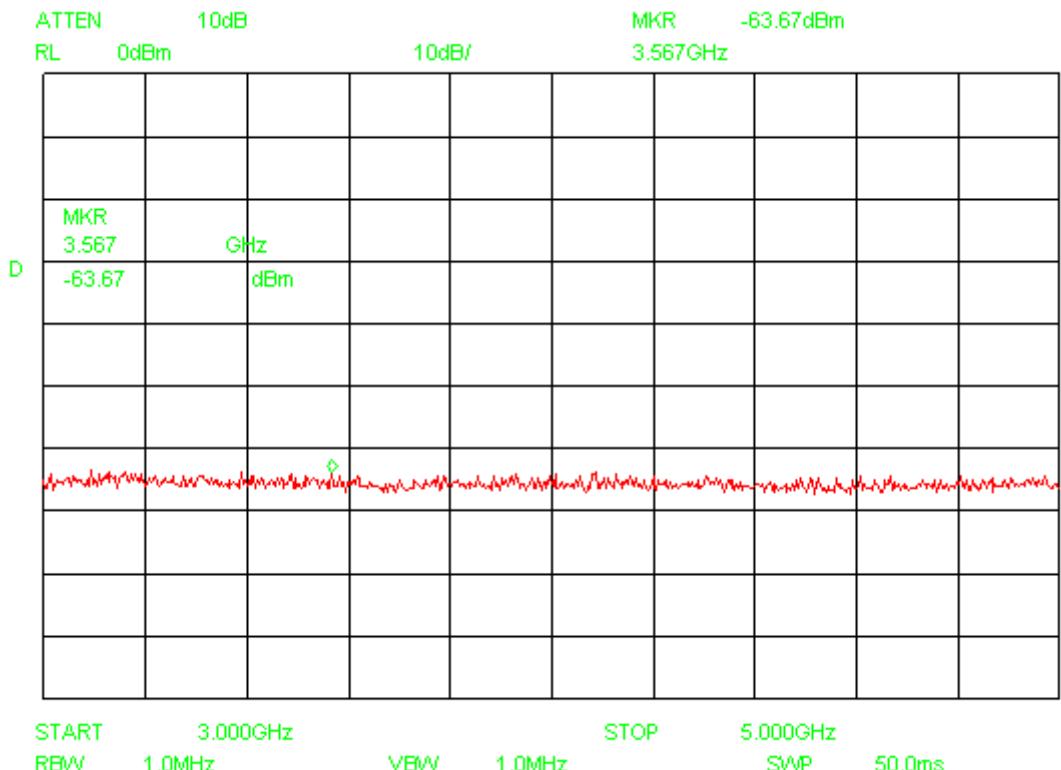

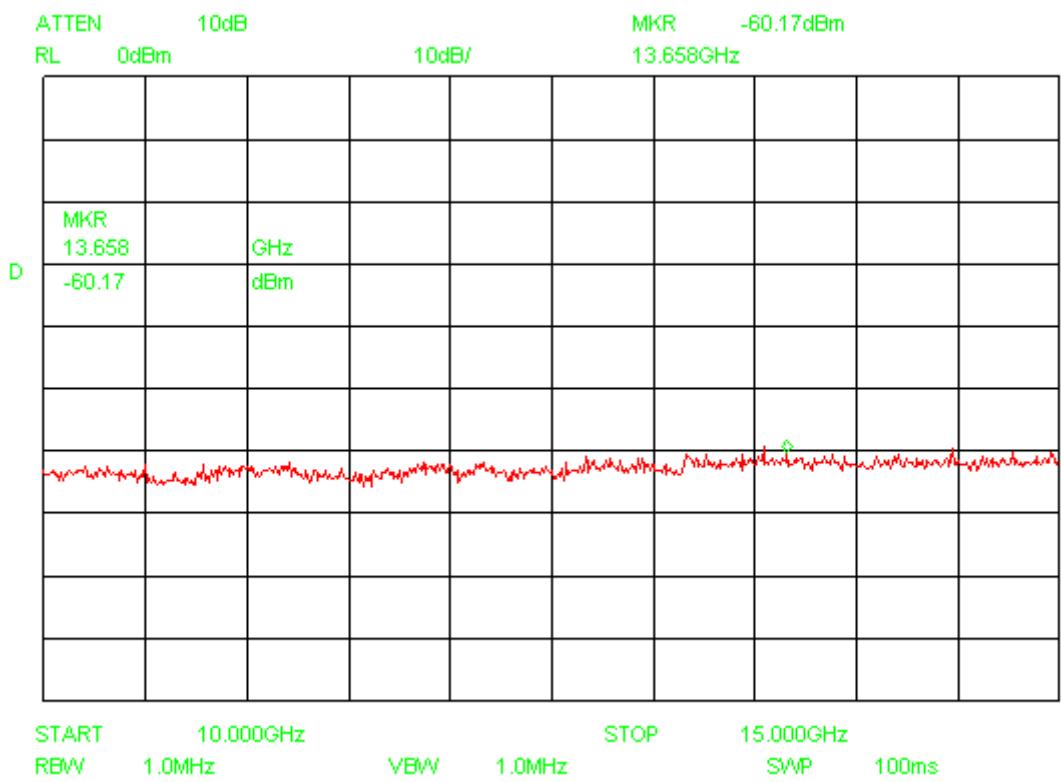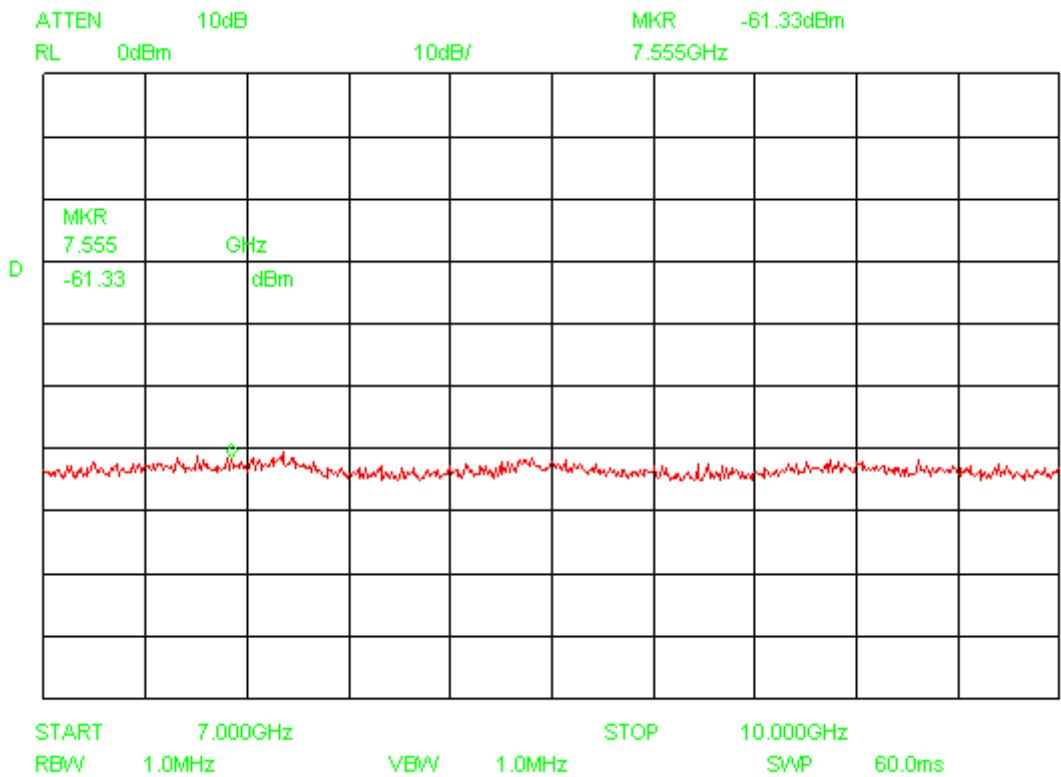

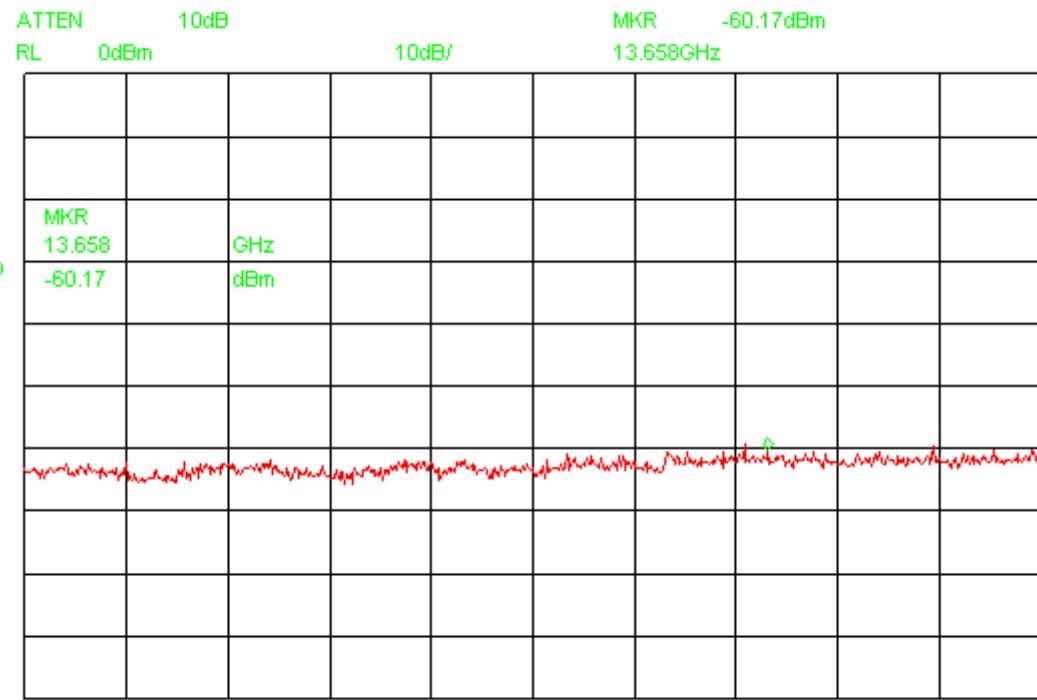

START 10.000GHz  
RBW 1.0MHz STOP 15.000GHz  
VBW 1.0MHz SWP 100ms

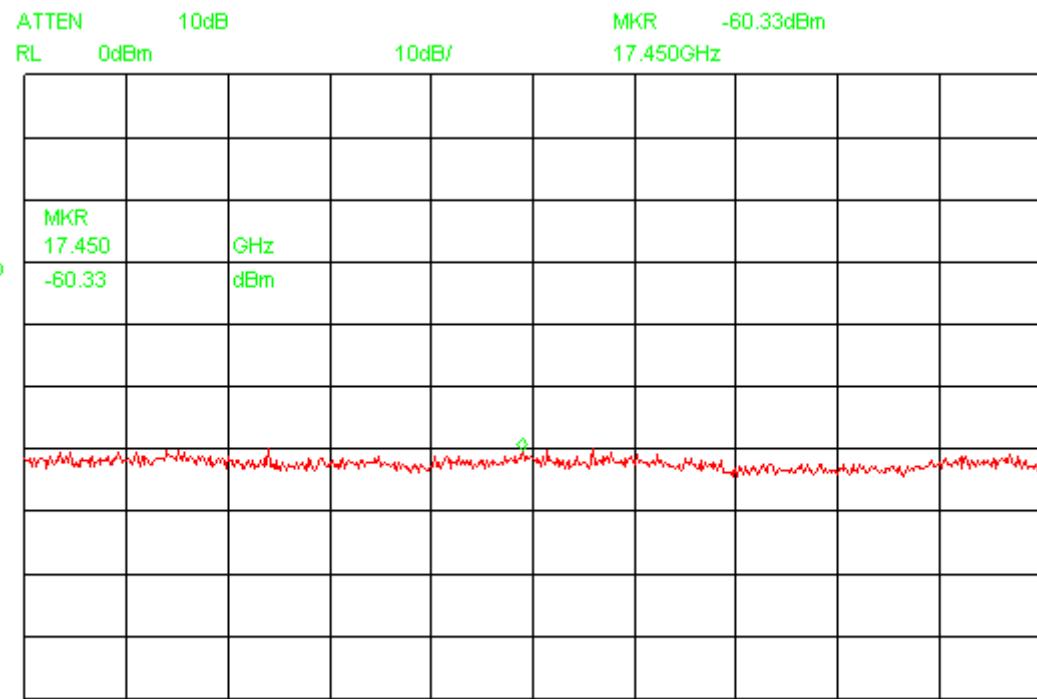

START 15.000GHz  
RBW 1.0MHz STOP 20.000GHz  
VBW 1.0MHz SWP 100ms

