



## Test Report

Test Report No.:	KTI04EF07006		
Registration No.:	99058		
Applicant:	STORMBLUE CO., LTD.		
Applicant Address:	#1308, World Meridian Venture Center, Gasan-dong 60-24, Geumcheon-gu, Seoul, Korea 153-801		
Product:	MP3 Player		
FCC ID:	PU9MP-600	Model No.	MP-600
Receipt No.:	04-0715	Date of receipt:	July 21, 2004
Date of Issue:	July 28, 2004		
Testing location	Korea Technology Institute Co., Ltd. 51-19, Sanglim3-Ri, Docheok-Myeun, Gwangju-Shi, Gyeungki-Do, Korea		
Test Standards:	FCC/ANSI. C63.4: 2001		
Rule Parts: FCC	Part 15, Class B		
Equipment Class:	Computing Device Peripheral		
Test Result:	The above-mentioned product has been tested with compliance.		

Tested by: H. Kim  
/ Engineer

Approved by: G. C. Min  
/President

Signature

Date

Signature

Date

Other Aspects:	
Abbreviations:	* OK, Pass=passed * Fail=failed * N/A=not applicable

- This test report is not permitted to copy partly without our permission.

- This test result is dependent on only equipment to be used.

- This test result is based on a single evaluation of one sample of the above mentioned.

- This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S Government.

- We certify this test report has been based on the measurement standards that is traceable to the national or international standards.



## »»» Contents «««

<b>Contents</b>	<b>2</b>
<b>List of Tables</b>	<b>2</b>
<b>List of Figures</b>	<b>2</b>
<b>List of Photographs</b>	<b>2</b>
<b>1. General</b>	<b>3</b>
<b>2. Test Site</b>	<b>3</b>
<b>2.1 Location</b>	<b>3</b>
<b>2.2 List of Test and Measurement Instruments</b>	<b>4</b>
<b>2.3 Test Data</b>	<b>4</b>
<b>2.4 Test Environment</b>	<b>4</b>
<b>3. Description of the tested samples</b>	<b>5</b>
<b>3.1 Rating and Physical characteristics</b>	<b>5</b>
<b>3.2 Submitted documents</b>	<b>5</b>
<b>4. Measurement conditions</b>	<b>6</b>
<b>4.1 Modes of operation</b>	<b>6</b>
<b>4.2 List of peripherals</b>	<b>6</b>
<b>4.3 Uncertainty</b>	<b>6</b>
<b>4.4 Test Setup</b>	<b>7</b>
<b>5. Emission Test</b>	<b>8</b>
<b>5.1 Conducted Emissions</b>	<b>8</b>
<b>5.2 Radiated Emissions</b>	<b>12</b>
<b>6. Photographs of the Test Set-up</b>	<b>14</b>
<b>Annex1 Label</b>	<b>16</b>
<b>Annex2 Photographs of EUT</b>	<b>18~29</b>

### » List of Tables

<b>Table 1</b>	<b>List of test and measurement equipment</b>	<b>4</b>
<b>Table 2</b>	<b>Test Data. Conducted Emissions</b>	<b>11</b>
<b>Table 3</b>	<b>Test Data. Radiated Emissions</b>	<b>13</b>

### » List of Figures

<b>Figure 1</b>	<b>Spectral Diagram, LINE-PE</b>	<b>9</b>
<b>Figure 2</b>	<b>Spectral Diagram, Neutral-PE</b>	<b>10</b>

### » List of Photographs

<b>Photograph 1</b>	<b>Setup for Radiated Emissions</b>	<b>14</b>
<b>Photograph 2</b>	<b>Setup for Conducted Emissions</b>	<b>15</b>



## 1. General

This equipment has been shown to be capable of compliance with the applicable technical standards and was tested in accordance with the measurement procedures as indicated in this report.

We attest to the accuracy of data. Korea Technology Institute Co., Ltd. performed all measurements reported herein. And were made under Chief Engineer's supervisor.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

## 2. Test Site

Korea Technology Institute Co., Ltd.

### 2.1 Location

51-19, Sanglim3-Ri, Docheok-Myeon, Gwangju-Shi, Gyeungki-Do, Korea

The Test Site is in compliance with ANSI C63.4/2001 for measurement of radio Interference.



## 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

**- Conducted Emissions**

Kind of Equipment	Type	S/N	Calibrated until
Spectrum Analyzer	R3261C	61720417	11.2004
Field Strength Meter	ESPC	832827/011	9.2004
LISN	KNW407	8-1157-2	10.2004
LISN	EM-7823	115019	4.2005
Conducted Cable	N/A	N/A	11.2004

**- Radiated Emissions**

Kind of Equipment	Type	S/N	Calibrated until
Field Strength Meter	ESIB40	100093	3.2005
Spectrum Analyzer	R3261C	61720417	11.2004
Pre Amplifier	8447D	2944A06874	11.2004
BiconiLog Antenna	3142B	1705	2.2005
Horn Antenna	3115	6443	6.2005
Open Site Cable	N/A	N/A	11.2004
Antenna Mast	DETT-03	N/A	N/A
Antenna & Turntable controller	DETT-04	91X519	N/A

## 2.3 Test Date

Date of Application: July 21, 2004

Date of Test: July 26, 2004

## 2.4 Test Environment

See each test item's description.



### 3. Description of the tested samples

The EUT is a MP3 Player.

#### 3.1. Rating and Physical Characteristics

Item	Detail	Specification
Mp3/Encoding	Supported Audio Format	MPEG 1/2/2.5 Layer 3, WMA
	Equalizer	POP / ROCK / CLASSIC / VOCAL/LIVE/FLAT/DBASS
FM Tuner	FM Frequency range	76 ~108 MHz
	FM Signal band noise ratio	50dB
	Frequency storage	Preset 20 units
Voice Recorder	Compression Bit Rate	32kbps ~ 224kbps
	Sampling frequency	32KHz / 44.1kHz / 48KHz
	Voice recording	TVF • MP3 Format
Operating system support	Windows	98SE/2000/Me/XP/2003
	Mac	Up V8.6
	Linux	Up Kernel 2.4.18
Power	Rechargeable battery	Li-Polymer 420mA
General	Size	16.8 * 26 * 89 ( H x W x L ) mm
	Weight	40g
	Type	Plug & Play (USB Flash Disk type)
	Operational Conditions	0°C ~ 45°C
	Basic Memory	128MB, 256MB, 512MB
	PC interface	USB 1.1
	Playing time	Upper 11 hours
	File transmission speed	MAX 500Kbyte/sec ( At device format)
Earphone Output	44mW(22mW+ 22mW)	
	LCD	Full Graphic LCD Blue EL Backlight

#### 3.2 Submitted Documents

- User's Guide
- Block Diagram



## 4. Measurement Conditions

Testing Input Voltage: AC 220V

### 4.1 Modes of Operation

The EUT was in the following operation mode during all testing;

- 1) File transfer each disk.

### 4.2 Additional Equipment

DEVICE TYPE	Manufacturer	M/N	S/N	FCC ID
PC	COMPAQ COMPUTER CORPORATION	EvoD5M	6F28KN8ZH110	-
Monitor	Samsung Electronics	750S	P223HVAR502035	-
Keyboard	COMPAQ COMPUTER CORPORATION	KB-9963	B26960GBUKKOVW	-
Mouse	logitech	M-S69	3892D101	-
Mouse	SEJIN ELECTRON INC.	SMB-400	0CIM004047	GJJS965M3
Printer	HEWLETT PACKARD	C4569A	SG6A7160PJ	-

### 4.3 Uncertainty

#### 1) Radiated disturbance

$$U_c \text{ (Combined standard Uncertainty)} = \pm 1.8 \text{dB}$$

$$\text{Expanded uncertainty } U = K U_c$$

$$K = 2$$

$$\therefore U = \pm 3.6 \text{dB}$$


#### 2) Conducted disturbance

$$U_c = \pm 0.88 \text{dB}$$

$$U = K U_c = 2 \times U_c = \pm 1.8 \text{dB}$$



#### 4.4 Test Setup

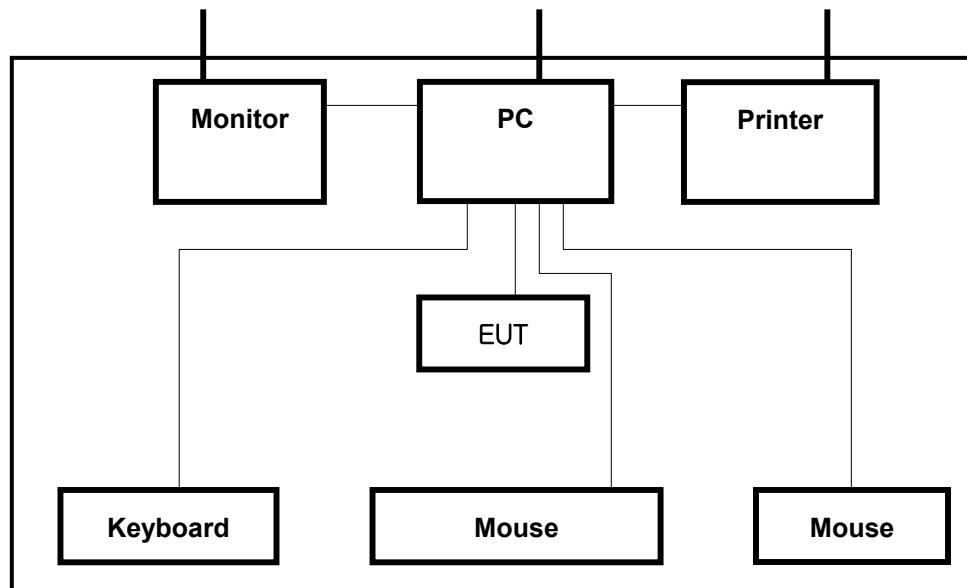

— Signal Line  
— Power Line



## 5. EMISSION Test

### 5.1. Conducted Emissions

**Result:****Pass**

The line-conducted facility is located inside a 2.3M x 3.5M x 5.5M shielded closure.

The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 605-05. A 1m x 1.5m wooden table 80cm high is placed 80cm away from the conducting ground plane and 40cm away from the sidewall of the shielded room. Electro-Metroics Model EM-7823 (9kHz-30MHz)50ohm/50 uH Line-Impedance Stabilization Networks (LISN) are bonded to the shielded room.

The EUT is powered from the Electro-Metroics LISN and the support equipment is powered from the Kyoritsu LISN. Power to the LISN are filtered by a high-current high-insertion loss shield enclosures power line filters (100dB 14kHz-1GHz).

The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure.

All electrical cables are shielded by copper pipe with inner diameter of 1".

If the EUT is a DC-Powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the Rohde & Schwarz LISN.

All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length.

Sufficient time for the EUT, Support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was reexamined using EMI field Intensity meter (ESPC). The detector function was set to CISPR quasi-peak mode.

The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; if applicable; whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of conducted test.

Each EME reported was calibrated using self-calibrating mode.



Figure 1: Spectral Diagram, LINE-PE

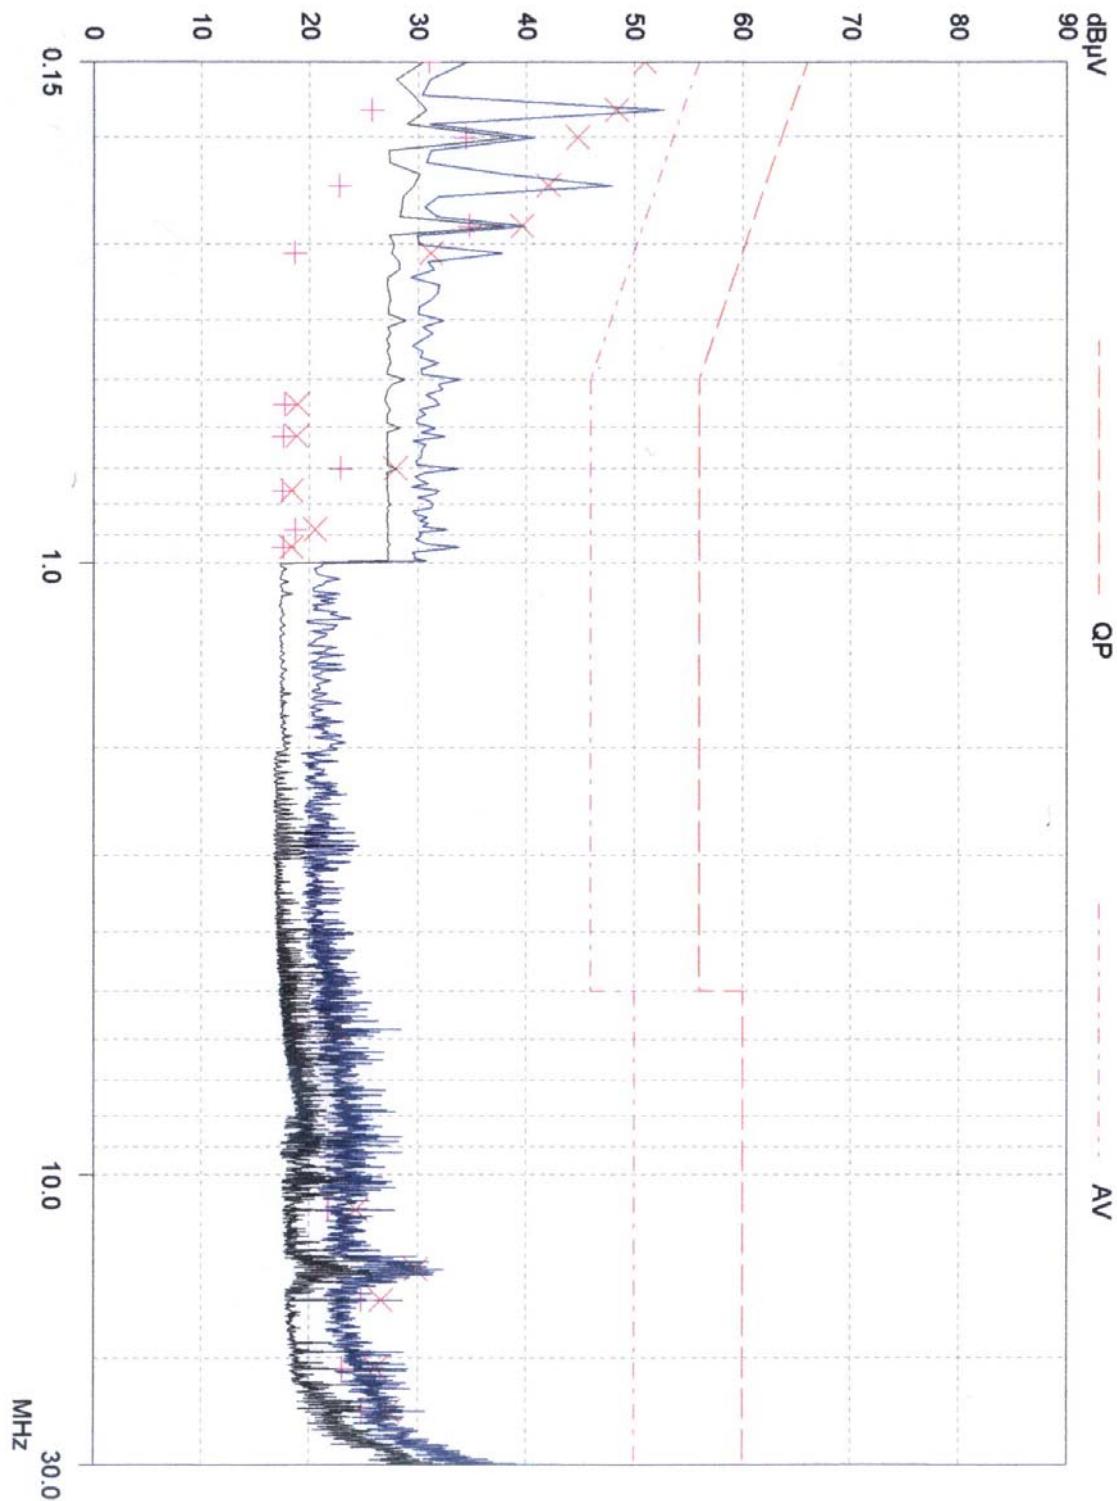




Figure 2: Spectral Diagram, NEUTRAL-PE

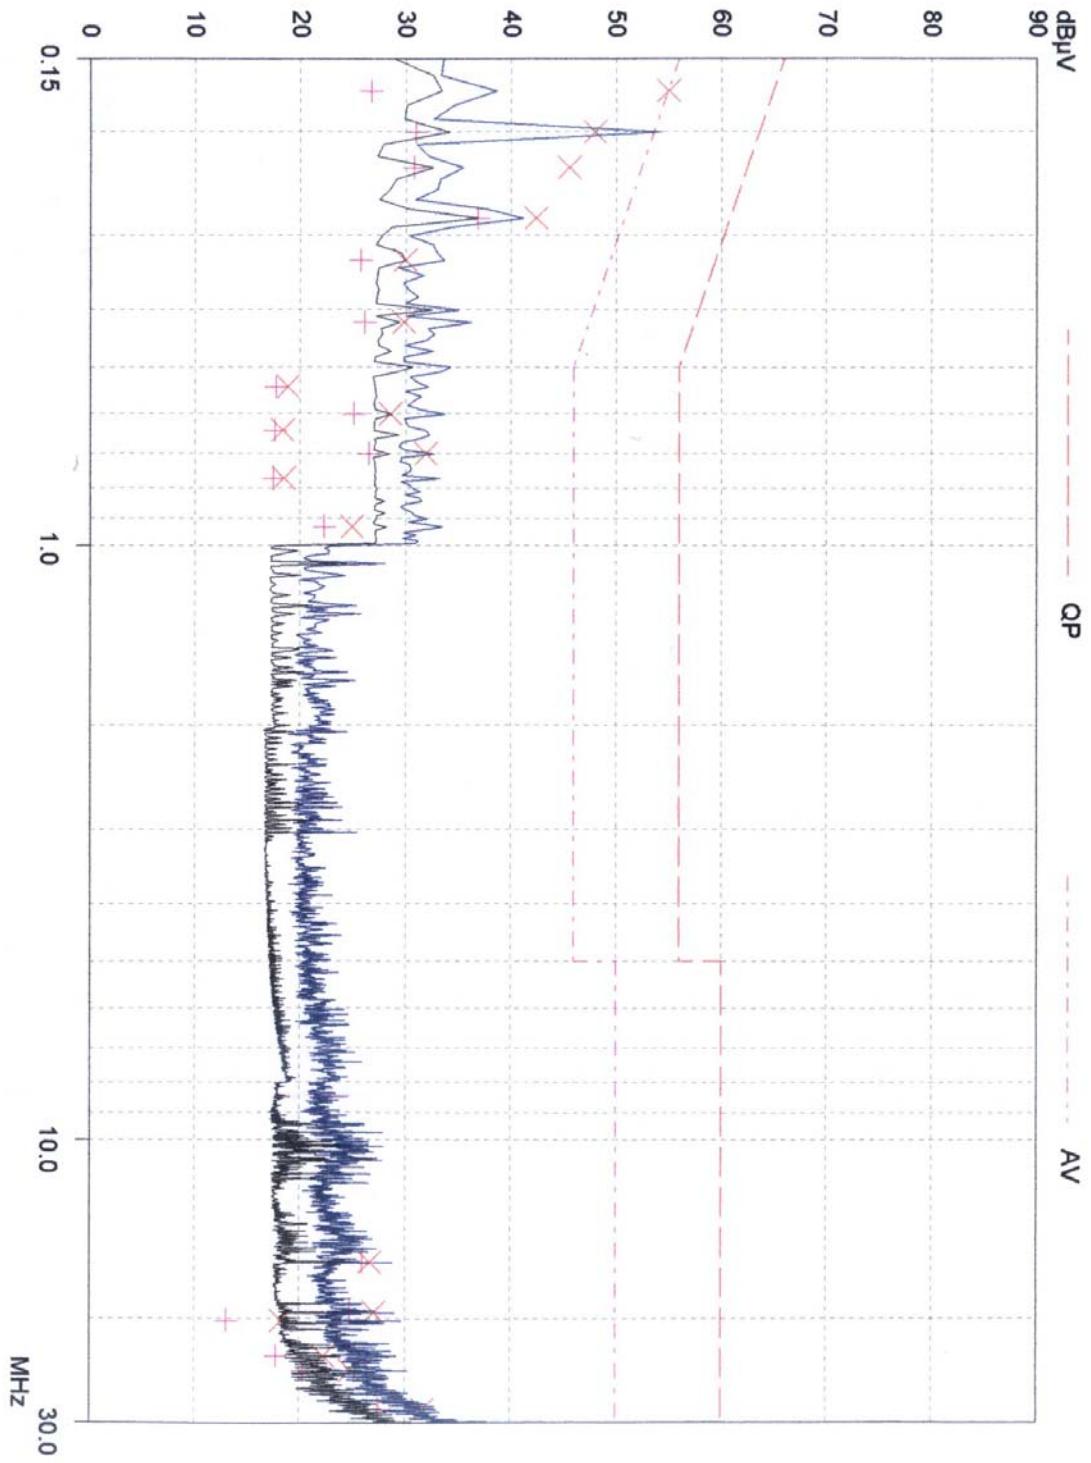




Table 2: Test Data, Conducted Emissions

Frequency (MHz)	(1) Reading (dB $\mu$ V)	Line	(2)C/F (dB)	(3)Actual (dB $\mu$ V)	(4) Limit (dB $\mu$ V)	(5) Margin (dB)
0.15	50.99	L1	0.33	51.32	66.00	14.68
0.17	55.01	L2	0.36	55.37	64.96	09.59
0.18	48.36	L1	0.33	48.69	64.49	15.80
0.20	48.01	L2	0.17	48.18	63.61	15.43
0.23	45.57	L2	0.17	45.74	62.45	16.71
0.28	42.40	L2	0.17	42.57	60.82	18.25

**NOTES:**

1. All modes of operation were investigated  
And the worst-case emissions are reported.
2. All other emissions are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR Quasi-peak mode.
5. L1 = LINE-PE, L2 = NEUTRAL-PE
6. C/F = Correction Factor(LISN factor + Cable loss)
7. The limit for Class B digital device is 66dB $\mu$ V to 56dB $\mu$ V from 150KHz to 500KHz, 56dB $\mu$ V from 500KHz to 5MHz, 60dB $\mu$ V Above 5MHz.

**♦ Margin Calculation**

$$\begin{aligned}
 (5) \text{ Margin} &= (4) \text{ Limit} - (3) \text{ Actual} \\
 [(3) \text{ Actual} &= (1) \text{ Reading} + (2) \text{ C/F}]
 \end{aligned}$$



## 5.2 Radiated Emissions

**Result:**

**Pass**

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband Amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and Investigated. The system configurations, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30MHz to 1GHz using BiconiLog Antenna. Above 1GHz, Double ridged horn Antenna was used.

Final measurements were made outdoors at 3-meter test range using EMCO antennas. The test equipment was placed on a wooden table situated on a 4x4 meter area adjacent to the measurement area. Turntable was to protect from weather in the dome that made with Polyethylene film. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter (ESIB40). The detector function was set to CISPR quasi-peak or peak mode as appropriate and the bandwidth of the receiver was set to 120kHz or 1 MHz depending on the frequency or type or signal.

The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8meter high non-metallic 1 x 1.5 meter table.

The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed, and/or support equipment, if applicable; and changing the polarity of the antenna and rotating the EUT in turns with three orthogonal axes for portable devices, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of radiated emission test. Each EME reported was calibrated using self-calibrating mode.



Table 3: Test Data, Radiated Emissions

Frequency (MHz)	Pol.	Height [m]	Angle [°]	(1) Reading (dB $\mu$ V)	(2) AFCL (dB/m)	(3) Actual (dB $\mu$ V/m)	(4) Limit (dB $\mu$ V/m)	(5) Margin (dB)
63.96	H	1.00	150	19.44	7.76	27.20	40.00	12.80
137.84	H	1.05	160	23.19	9.30	32.49	43.50	11.01
187.00	H	1.05	160	26.95	11.75	38.70	46.00	7.30
196.84	V	1.15	175	27.81	12.29	40.10	46.00	5.90
196.88	H	1.25	180	29.41	12.29	41.70	46.00	4.30
201.80	V	1.30	160	29.61	12.29	41.90	46.00	4.10

Table. Radiated Measurements at 3-meters

**Notes:** 1. All modes of operation were investigated.

And the worst-case emission are reported.

2. All other emission is non-significant.

3. All readings are calibrated by self-mode in receiver.

4. Measurements using CISPR quasi-peak mode.

5. AFCL = Antenna factor and cable loss

6. H = Horizontal, V = Vertical Polarization

7. The limit for Class B digital device is 100uV(40dB $\mu$ V) from 30MHz to 88MHz,

150 uV (43.5dB $\mu$ V) from 88MHz to 216MHz, 200uV(46dB $\mu$ V) from 216MHz to 960MHz

and 500 uV (54dB $\mu$ V) from above 960MHz.

#### ♠ Margin Calculation

(5) Margin = (4) Limit – (3) Actual

$$[(3) \text{ Actual} = (1) \text{ Reading} + (2) \text{ AFCL}]$$