


PARTS LIST

PARTS	DETAIL
XTAL1	32.768KHz (1.5x5)
CR1	4MHZ
U1	STC6F567D101000
U2	NC
U3	D355B
U4	CC2500
C1	0.1uF (0402) 25V ±20%
C2	0.1uF (0402) 25V ±20%
C3	0.1uF (0402) 25V ±20%
C4	0.1uF (0402) 25V ±20%
C5	0.1uF (0402) 25V ±20%
C6	3.3uF (0603) 6.3V ±20%
C7	0.1uF (0402) 25V ±20%
C8	0.1uF (0402) 25V ±20%
C9	20uF (0402) 25V ±5%
C10	0.1uF (0402) 25V ±20%
C11	20uF (0402) 25V ±5%
C12	0.1uF (0402) 25V ±20%
C13	30uF (0402) 25V ±5%
C14	30uF (0402) 25V ±5%
C15	1uF (0603) 25V ±20%
C16	4700uF (0402) 25V ±5%
C17	0.1uF (0402) 25V ±20%
C18	220uF (0402) 25V ±20%
C19	220uF (0402) 25V ±20%
C20	0.1uF (0402) 25V ±20%
C21	100uF (0402) ±5% NP0
C22	1.8uF (0402) ±0.25uF NP0
C23	1.8uF (0402) ±0.25uF NP0
C24	1uF (0402) ±0.25uF NP0
C25	15uF (0402) ±5% NP0
C26	15uF (0402) ±5% NP0
C27	0.1uF (0402) 25V ±20%
C28	0.1uF (0402) 25V ±20%
C29	220uF (0402) 25V ±20%
C30	0.1uF (0402) 25V ±20%
C31	100uF (0402) ±5% NP0
C32	1uF (0402) ±0.25uF NP0
L1	12uH (06-3017)
L2	1.2uH (0402) wirewound
L3	7uH (06-3017)
L4	1.2uH (0402) wirewound
L5	1.2uH (0402) wirewound
L6	1.2uH (0402) wirewound
Q1	2SC5343F (SOT-23)
Q2	2SC5343F (SOT-23)
Q3	2SC5343F (SOT-23)
Q4	2SC5343F (SOT-23)
Q5	2SC5343F (SOT-23)
Q6	2SC5343F (SOT-23)
Q7	2SC5343F (SOT-23)
R1	100K (0402) ±5%
R2	100K (0402) ±5%
R3	100K (0402) ±5%
R4	100K (0402) ±5%
R5	10K (0402) ±5%
R6	100K (0402) ±5%
R7	100K (0402) ±5%
R8	100K (0402) ±5%
R9	100K (0402) ±5%
R10	56K (0402) ±5%
R11	4.7K (0402) ±5%
R12	4.7K (0402) ±5%
V1	26MHz (3225)

DCC-DS-0216

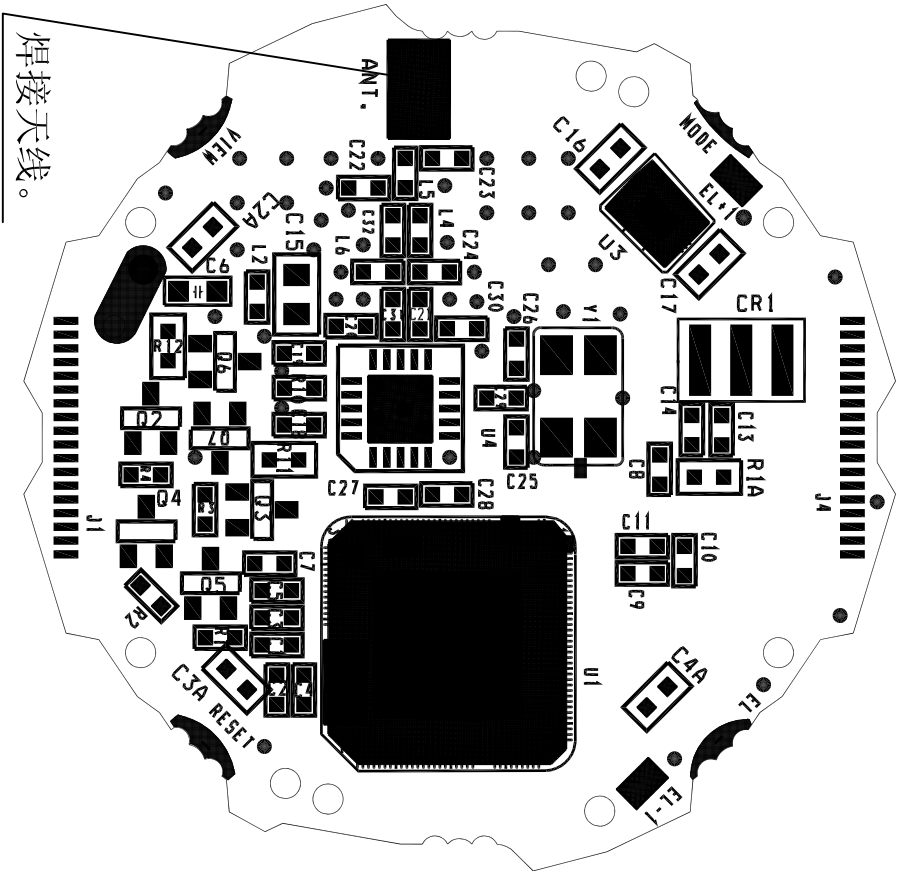

焊接天线。

SIDE A


备注：1、查看走线请登陆DCC！

2、PCB:FL-297A T9

3、J2、J6、J8、J10短路 (Close).

4、IC“CC2500”高温控制：≤260℃

A4 (210 X 297 mm)

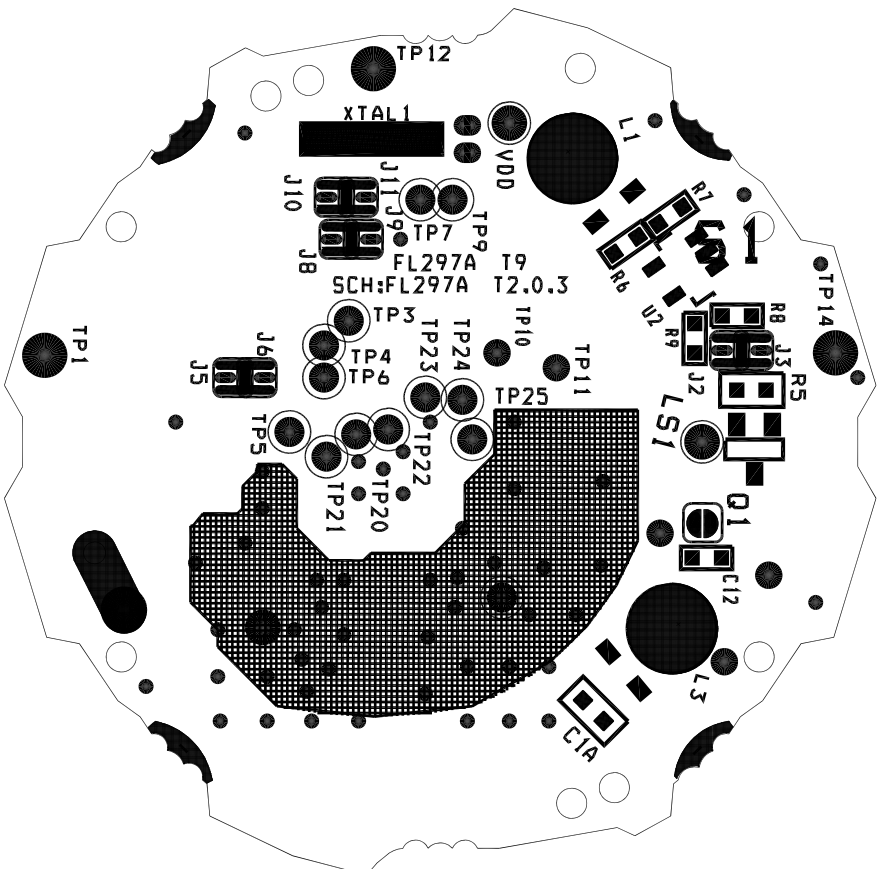

SIDE B

FAIR LEGEND ELECTRONICS LTD.

SCALE	MAT'L.	TITLE	MODEL NAME	REV.
QTY.	MODULE	PARTS CODE	PROJECT	PAGE
1	FL-297A			5
DESIGNED	DRAWN	MAR. 13, 2007	CHECKED	APPROVED
	A.T.G.			