

Intertek Testing Services NA, Inc.

Retest of Line-Conducted Emissions for BodyMedia, Inc.

Equipment Under Test: SenseWear Pro Base
Model: 909902G01RevD
Serial No.: 01320395
FCC Identifier: None assigned currently; intended FCC ID is PV8-909901G02RevD

Test Equipment:

Description	Manufacturer	Model	Serial #	Cal Due
Attenuator, 20 dB	Mini Circuits	20dB, 50 ohm	DS21	08/14/2002
LISN 50uH .01-50MHz 24A	Solar Electronics	9252-50-R-24-BNC	955107	03/26/2002
LISN 50uH .01-50MHz 24A	Solar Electronics	8012-50-R-24-BNC	865575	05/02/2002
Cable, BNC/BNC	Alpha	RG58B/U	CBL10MS3	08/24/2002
RF Filter	Hewlett Packard	85420E	3427A00177	01/22/2002
Receiver Set w/RF Filter	Hewlett Packard	85422E	3520A00188	01/22/2002

Support Equipment:

Keyboard	Manufacturer:	Digital
	Model:	RT101
	Serial Number:	1305 1171
	FCC ID:	AQ6-CYPRESS Z15
Hewlett Packard	Manufacturer:	660 Printer
	Model:	C2164A
	Serial Number:	S65BNIQ06C
	FCC ID:	B94C2164X
Monitor	Manufacturer:	Gateway 2000
	Model:	Gateway 500CS
	Serial Number:	150138097072
	FCC ID:	BEJCS587W
Mouse	Manufacturer:	Digital
	Model:	M-S35
	Serial Number:	LT50901818
	FCC ID:	DZL210472
Power Supply	Manufacturer:	CUI Stack
	Model:	DSA-0151A05A
	Serial Number:	1001
	FCC ID:	Not Labelled

Intertek Testing Services NA, Inc.

Computer	Manufacturer: Model: Serial Number: FCC ID:	SpeedWare Not Applicable 97N1156 Not Labelled
Printer Power Supply	Manufacturer: Model: Serial Number: FCC ID:	Hewlett Packard C2175A 9100-5124 Not Labelled
SenseWear Pro Armband	Manufacturer: Model: Serial Number: FCC ID:	BodyMedia 909901G01RevD 01320331 Not Labelled

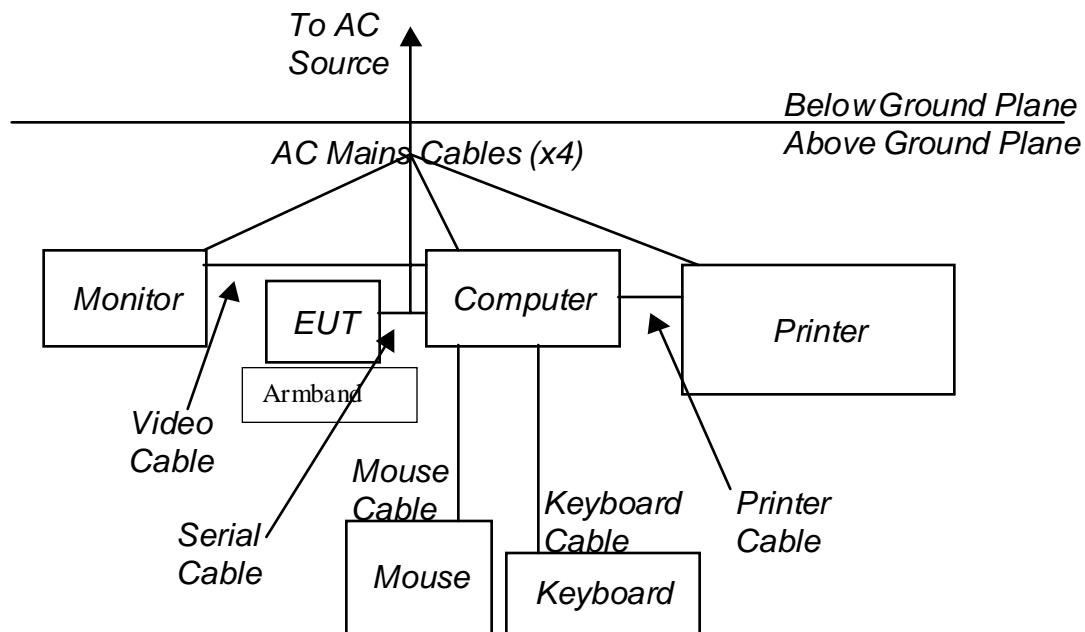
Cables:

QTY	Description	Shield Description	Hood Description	Length (m)
1	Mouse Cable*	None	Plastic	3
1	Keyboard Cable*	None	Plastic	1.5
1	Serial Cable	Braid Shield	Metal with 360° connection	2
1	Printer Cable*	Braid Shield	Metal with 360° connection	3
1	Printer P/S Cable*	None	Plastic	1
1	Computer AC Mains*	None	Plastic	2
1	Monitor AC Cable*	None	Plastic	1.5
1	Video Cable*	Braid Shield	Metal with 360° connection	2
1	EUT AC Mains	None	Plastic	2

*support equipment cables

EUT Exercise Procedure:

The EUT was activated at nominal power. Data transfer was enabled. The EUT was connected to a computer with peripherals. Charging and non-charging mode were investigated, and the worst case was used for each test.

Test Setup Block Diagram:

Test Setup Photos:

Front View



Side View



Test Procedure:

Part 15 Laboratory Measurements and ANSI C63.4-1992
Revision March 24, 2000

Report Number: 3009190C
Page 4 of 5

This document may not be reproduced except in its entirety without written permission from ITS.

Intertek Testing Services NA, Inc.

The EUT was tested to the requirements of FCC CFR 47 Part 15.207 using the procedures and guidelines of ANSI C63.4.

Test Results: Pass

Conducted Emissions / Interference

Table: 1

Company: BodyMedia, Inc.	Tested by: Nicholas Abbondante
Model: SenseWear Pro Base	Location: Site 3C
Project #: 3009190	Detector: HP 8542E
Date: 11/14/01	System Loss: LISN Calibration + 10 meter RG58
Standard: FCC15	Limiter: no
Class: B	FCC ID#: PV8-909902G01RevD
Serial #: 1320395	

System Loss: Includes the Cable and LISN loss.

Abbreviations: nb - narrow band, bb - broadband, pk - peak measurement

Frequency MHz	Reading Side A dB(µV)	Reading Side B dB(µV)	Attenuator Factor dB	System Loss dB	Quasi-Peak		
					Net dB(µV)	Limit dB(µV)	Margin dB
0.690	19.8	22.0	20.0	2.0	44.0	48.0	-4.0
1.022	18.5	19.9	20.0	2.0	41.9	48.0	-6.1
4.965	5.4	7.1	20.0	2.0	29.1	48.0	-18.9
11.815	21.4	22.3	20.0	2.0	44.3	48.0	-3.7
20.000	-1.8	-0.8	20.0	2.0	21.2	48.0	-26.8
28.030	26	-3.1	20.0	2.0	24.6	48.0	-23.4
29.620	120	11.8	20.0	2.0	34.0	48.0	-14.0