

TEST REPORT

Reference No. : WTS16S1062373E
FCC ID..... : PVB-EMJA006B
Applicant : The House of Marley.LLC
Address : 3000 Pontiac Trail, Commerce Township, MI48390 USA
Manufacturer : The same as above
Address : The same as above
Product Name : GET TOGETHER
Model No. : EM-JA006B
Standards : FCC CFR47 Part 15 Section 15.247:2015
Date of Receipt sample : Oct. 10, 2016
Date of Test : Oct. 19– 24, 2016
Date of Issue : Oct. 29, 2016
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033


Fax:+86-755-83552400

Tested by:



Zero Zhou / Test Engineer

Approved by:



Philo Zhong / Manager

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REVISION HISTORY	4
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	5
4.4 TEST MODE	6
4.5 TEST FACILITY	6
5 EQUIPMENT USED DURING TEST	7
5.1 EQUIPMENTS LIST	7
5.2 MEASUREMENT UNCERTAINTY	8
5.3 TEST EQUIPMENT CALIBRATION	8
6 TEST SUMMARY	9
7 CONDUCTED EMISSION	10
7.1 E.U.T. OPERATION	10
7.2 EUT SETUP	10
7.3 MEASUREMENT DESCRIPTION	10
7.4 CONDUCTED EMISSION TEST RESULT	11
8 RADIATED EMISSIONS.....	15
8.1 EUT OPERATION.....	15
8.2 TEST SETUP	16
8.3 SPECTRUM ANALYZER SETUP	17
8.4 TEST PROCEDURE	18
8.5 SUMMARY OF TEST RESULTS	19
9 BAND EDGE MEASUREMENT	22
9.1 TEST PROCEDURE	22
9.2 TEST RESULT:	23
10 BANDWIDTH MEASUREMENT.....	29
10.1 TEST PROCEDURE:.....	29
10.2 TEST RESULT:	29
11 MAXIMUM PEAK OUTPUT POWER	35
11.1 TEST PROCEDURE:.....	35
11.2 TEST RESULT:	35
12 HOPPING CHANNEL SEPARATION	41
12.1 TEST PROCEDURE:.....	41
12.2 TEST RESULT:	41
13 NUMBER OF HOPPING FREQUENCY.....	47
13.1 TEST PROCEDURE:.....	47
13.2 TEST RESULT:	47
14 DWELL TIME	49
14.1 TEST PROCEDURE:.....	49

14.2	TEST RESULT:	49
15	ANTENNA REQUIREMENT	56
16	RF EXPOSURE.....	57
16.1	REQUIREMENTS.....	57
16.2	THE PROCEDURES / LIMIT	57
16.3	MPE CALCULATION METHOD	58
17	PHOTOGRAPHS –EM-JA006B TEST SETUP PHOTOS.....	59
17.1	PHOTOGRAPH-CONDUCTED EMISSIONS TEST SETUP AT TEST SITE 1#.....	59
17.2	PHOTOGRAPH-RADIATED EMISSIONS.....	60
18	PHOTOGRAPHS – CONSTRUCTIONAL DETAILS	66
18.1	MODEL EM-JA006B– EXTERNAL PHOTOS.....	66
18.2	MODEL EM-JA006B – INTERNAL PHOTOS	72

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS16S1062373E	Oct. 10, 2016	Oct. 19 – 24, 2016	Oct. 25, 2016	original	-	Replaced
WTS16S1062373E	Oct. 10, 2016	Oct. 19 – 24, 2016	Oct. 29, 2016	Revision1	Updated Date of Test	Valid

4 General Information

4.1 General Description of E.U.T.

Product Name	:GET TOGETHER
Model No.	:EM-JA006B
Model Description	: N/A
Operation Frequency	: 2402-2480MHz, 79(EDR) Channels in total
The Lowest Oscillator	: 12.288MHz
Antenna Gain	: 0dBi
Type of Modulation	: GFSK, Pi/4DQPSK, 8DPSK
Antenna installation	: PCB Printed Antenna

4.2 Details of E.U.T.

Technical Data:	DC 7.4V, 2200mAh, by battery. Charging power supply: DC 15V, 1.5A by Adapter USB Output: DC 5V, 1A Model: S024AMM1500150
Adapter 1:	Input: 100-240V~50/60Hz, 600mA Output: 15.0V === 1.5A Model: DYS624-150150W-K
Adapter 2:	Input: 100-240V~50/60Hz, 0.8A Max, Output: 15.0V === 1.5A

4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Table 1 Tests Carried Out Under FCC part 15.247

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz

Table 2 Tests Carried Out Under FCC part 15.207 and 15.209

Test Item	Test Mode
Radiated Emissions	Transmitting
Conducted Emissions	Transmitting

4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration 7760A-1, October 15, 2015

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.12, 2016	Sep.11, 2017
2.	LISN	R&S	ENV216	101215	Sep.12, 2016	Sep.11, 2017
3.	Cable	Top	TYPE16(3.5M)	-	Sep.12, 2016	Sep.11, 2017
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.12, 2016	Sep.11, 2017
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.12, 2016	Sep.11, 2017
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.12, 2016	Sep.11, 2017
4.	Cable	LARGE	RF300	-	Sep.12, 2016	Sep.11, 2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	Apr.29, 2016	Apr.28, 2017
2	Amplifier	Agilent	8447D	2944A10178	Jan.13, 2016	Jan.12, 2017
3	Active Loop Antenna	Beijing Dazhi	ZN30900A	0703	Oct.17, 2016	Oct.16, 2017
4	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	33 6	Apr.09, 2016	Apr.08, 2017
5	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.12, 2016	Sep.11, 2017
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.09, 2016	Apr.08, 2017
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Apr.13, 2016	Apr.12, 2017
8	Coaxial Cable (above 1GHz)	Top	1GHz-18GHz	EW02014-7	Apr.13, 2016	Apr.12, 2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Apr.13, 2016	Apr.12, 2017
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Apr.09, 2016	Apr.08, 2017
3	Amplifier	ANRITSU	MH648A	M43381	Apr.13, 2016	Apr.12, 2017
4	Cable	HUBER+SUHNER	CBL2	525178	Apr.13, 2016	Apr.12, 2017
RF Conducted Testing						

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.12, 2016	Sep.11, 2017
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.12, 2016	Sep.11, 2017
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.12, 2016	Sep.11, 2017

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	C
Spurious Radiated Emissions	15.205(a) 15.209 15.247(d)	C
Band edge	15.247(d) 15.205(a)	C
Bandwidth	15.247(a)(1)	C
Maximum Peak Output Power	15.247(b)(1)	C
Frequency Separation	15.247(a)(1)	C
Number of Hopping Frequency	15.247(a)(1)(iii)	C
Dwell time	15.247(a)(1)(iii)	C
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	C
Antenna Requirement	15.203	C
Note: C=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable.		

7 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013;ANSI C63.4:2014
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

7.1 E.U.T. Operation

Operating Environment :


Temperature:	22.8 °C
Humidity:	52.6 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in Transmitting mode, the test data were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

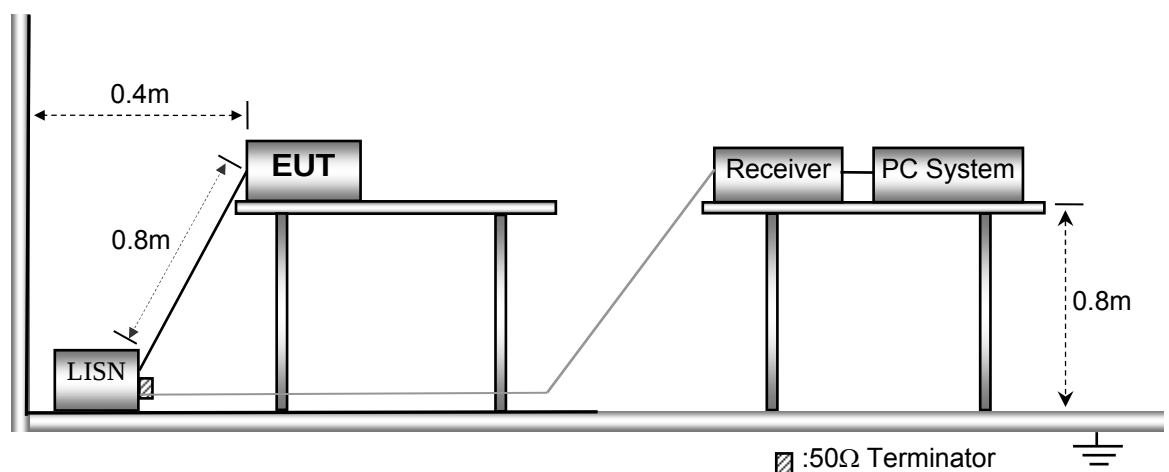

7.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

7.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Adapter 1:

Live line:

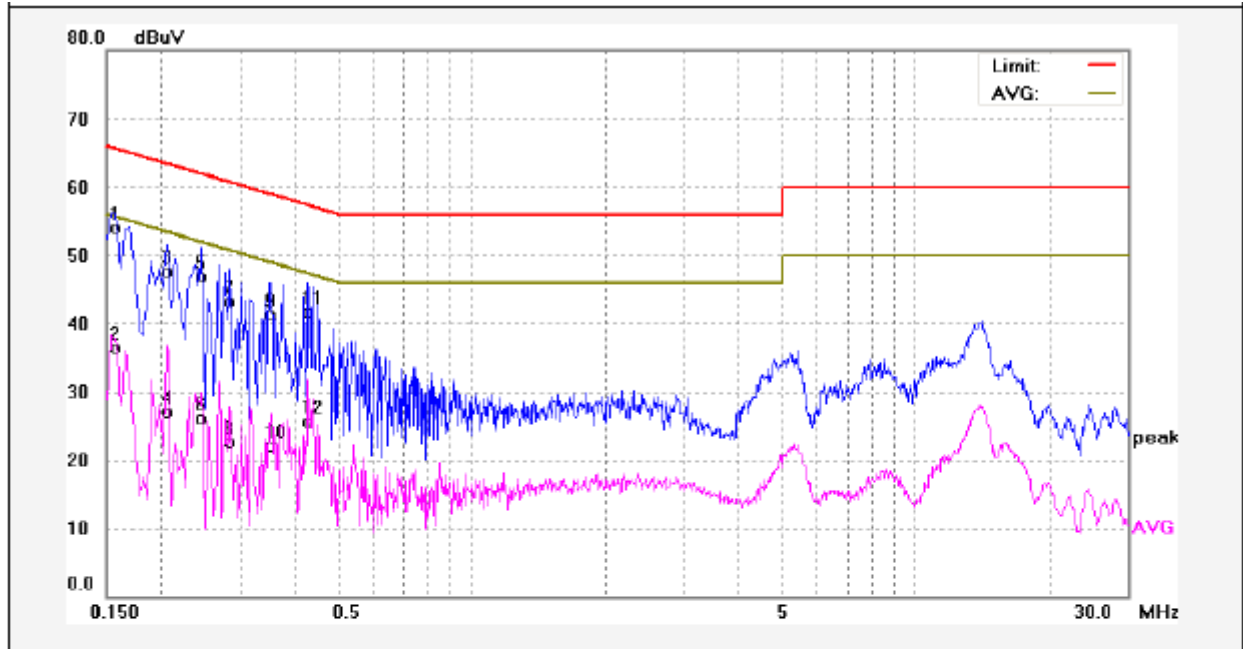

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	44.34	9.75	54.09	65.56	-11.47	QP	
2	0.1580	26.84	9.75	36.59	55.56	-18.97	AVG	
3	0.2060	37.98	9.76	47.74	63.36	-15.62	QP	
4	0.2060	17.36	9.76	27.12	53.36	-26.24	AVG	
5	0.2460	37.10	9.74	46.84	61.89	-15.05	QP	
6	0.2460	16.42	9.74	26.16	51.89	-25.73	AVG	
7	0.2860	33.61	9.75	43.36	60.64	-17.28	QP	
8	0.2860	13.01	9.75	22.76	50.64	-27.88	AVG	
9	0.3500	31.49	9.75	41.24	58.96	-17.72	QP	
10	0.3500	12.38	9.75	22.13	48.96	-26.83	AVG	
11	0.4260	32.03	9.75	41.78	57.33	-15.55	QP	
12	0.4260	16.05	9.75	25.80	47.33	-21.53	AVG	


Neutral line:

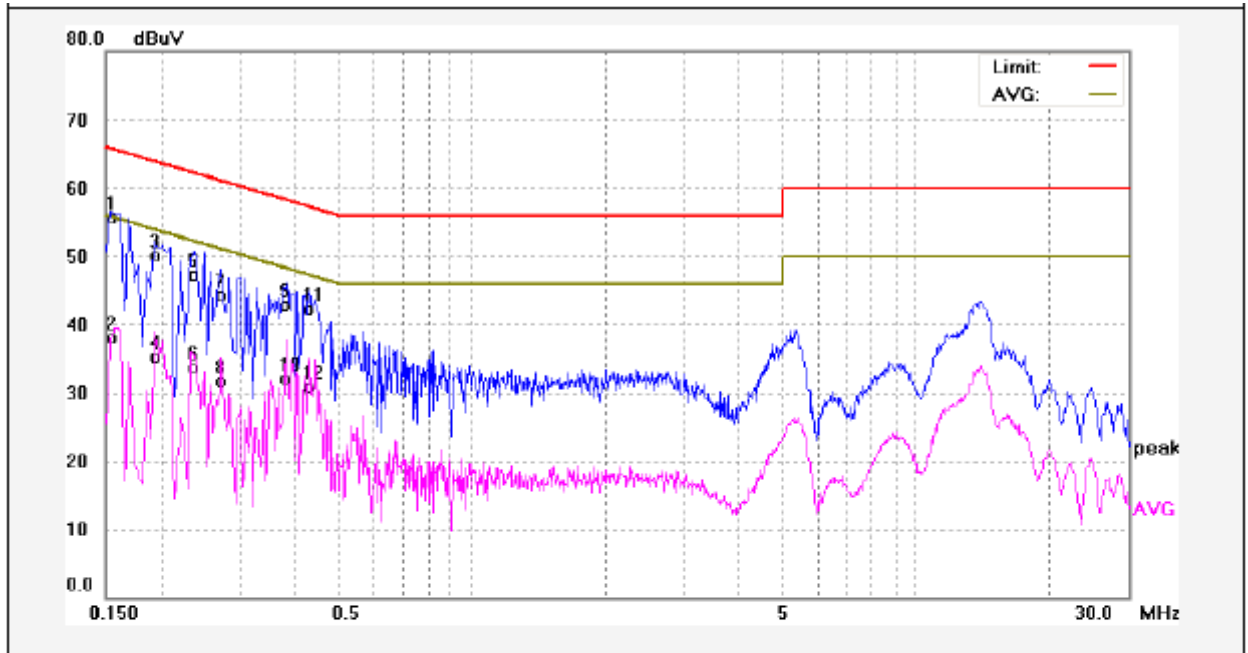

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	45.92	9.75	55.67	65.78	-10.11	QP	
2	0.1539	28.41	9.75	38.16	55.78	-17.62	AVG	
3	0.1940	40.28	9.76	50.04	63.86	-13.82	QP	
4	0.1940	25.50	9.76	35.26	53.86	-18.60	AVG	
5	0.2380	37.50	9.74	47.24	62.16	-14.92	QP	
6	0.2380	23.97	9.74	33.71	52.16	-18.45	AVG	
7	0.2740	34.54	9.74	44.28	60.99	-16.71	QP	
8	0.2740	21.88	9.74	31.62	50.99	-19.37	AVG	
9	0.3860	33.25	9.75	43.00	58.15	-15.15	QP	
10	0.3860	22.37	9.75	32.12	48.15	-16.03	AVG	
11	0.4300	32.46	9.75	42.21	57.25	-15.04	QP	
12	0.4300	21.24	9.75	30.99	47.25	-16.26	AVG	


Adapter 2:

Live line:

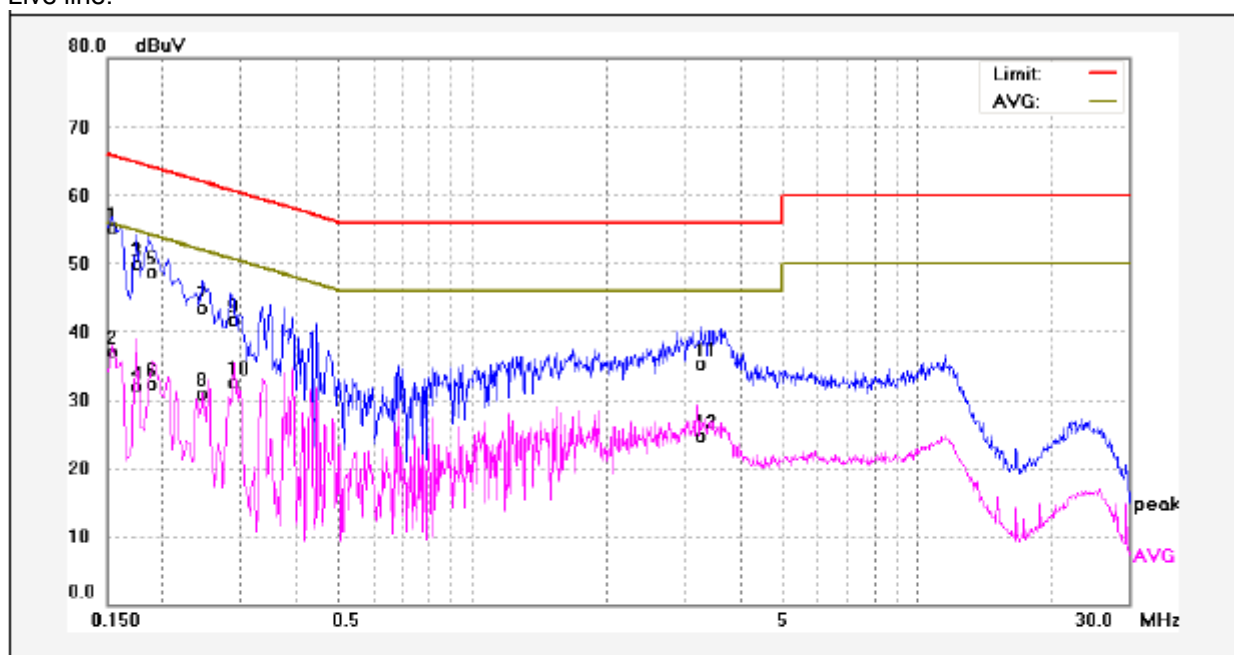

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.1539	45.43	9.75	55.18	65.78	-10.60	QP	
2	0.1539	27.27	9.75	37.02	55.78	-18.76	AVG	
3	0.1740	40.17	9.74	49.91	64.76	-14.85	QP	
4	0.1740	22.08	9.74	31.82	54.76	-22.94	AVG	
5	0.1874	38.97	9.75	48.72	64.15	-15.43	QP	
6	0.1874	22.53	9.75	32.28	54.15	-21.87	AVG	
7	0.2460	33.81	9.74	43.55	61.89	-18.34	QP	
8	0.2460	21.13	9.74	30.87	51.89	-21.02	AVG	
9	0.2860	31.90	9.75	41.65	60.64	-18.99	QP	
10	0.2860	22.77	9.75	32.52	50.64	-18.12	AVG	
11	3.2659	25.42	9.91	35.33	56.00	-20.67	QP	
12	3.2659	14.76	9.91	24.67	46.00	-21.33	AVG	

Neutral line:

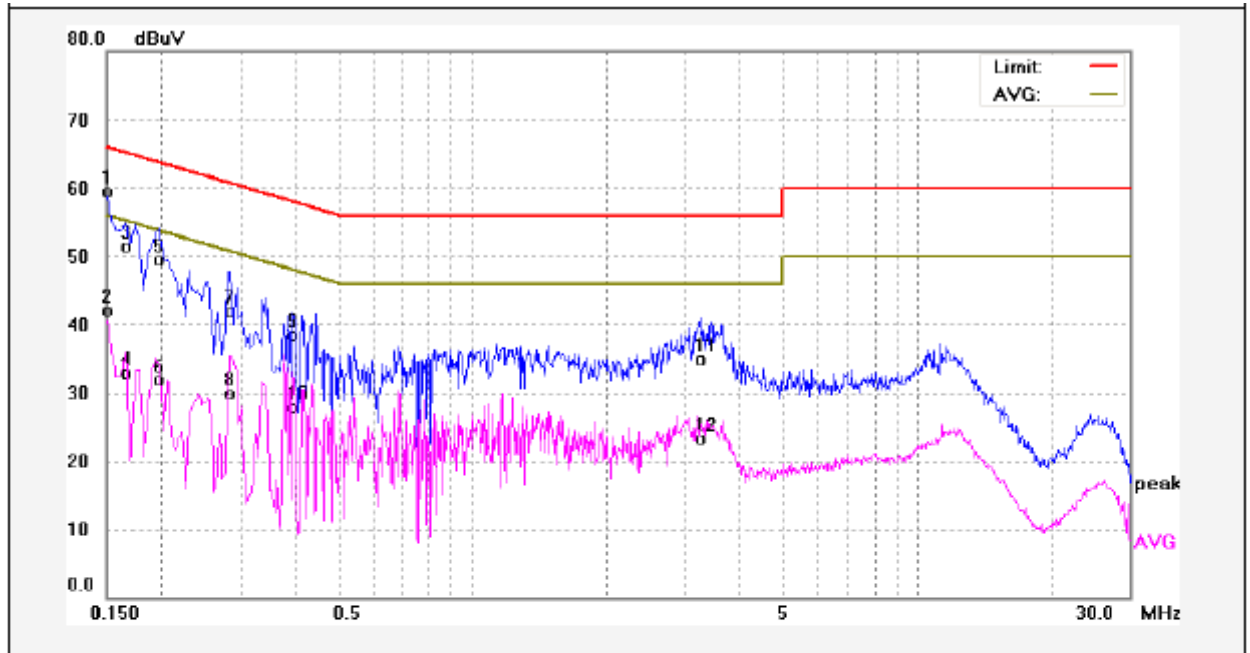

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.1500	49.83	9.75	59.58	65.99	-6.41	QP	
2	0.1500	32.43	9.75	42.18	55.99	-13.81	AVG	
3	0.1660	41.82	9.74	51.56	65.15	-13.59	QP	
4	0.1660	23.16	9.74	32.90	55.15	-22.25	AVG	
5	0.1980	39.73	9.76	49.49	63.69	-14.20	QP	
6	0.1980	22.14	9.76	31.90	53.69	-21.79	AVG	
7	0.2819	32.10	9.75	41.85	60.76	-18.91	QP	
8	0.2819	20.10	9.75	29.85	50.76	-20.91	AVG	
9	0.3940	28.72	9.75	38.47	57.98	-19.51	QP	
10	0.3940	18.16	9.75	27.91	47.98	-20.07	AVG	
11	3.2500	24.91	9.91	34.82	56.00	-21.18	QP	
12	3.2500	13.37	9.91	23.28	46.00	-22.72	AVG	

8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013;ANSI C63.4:2014

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in Transmitting mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

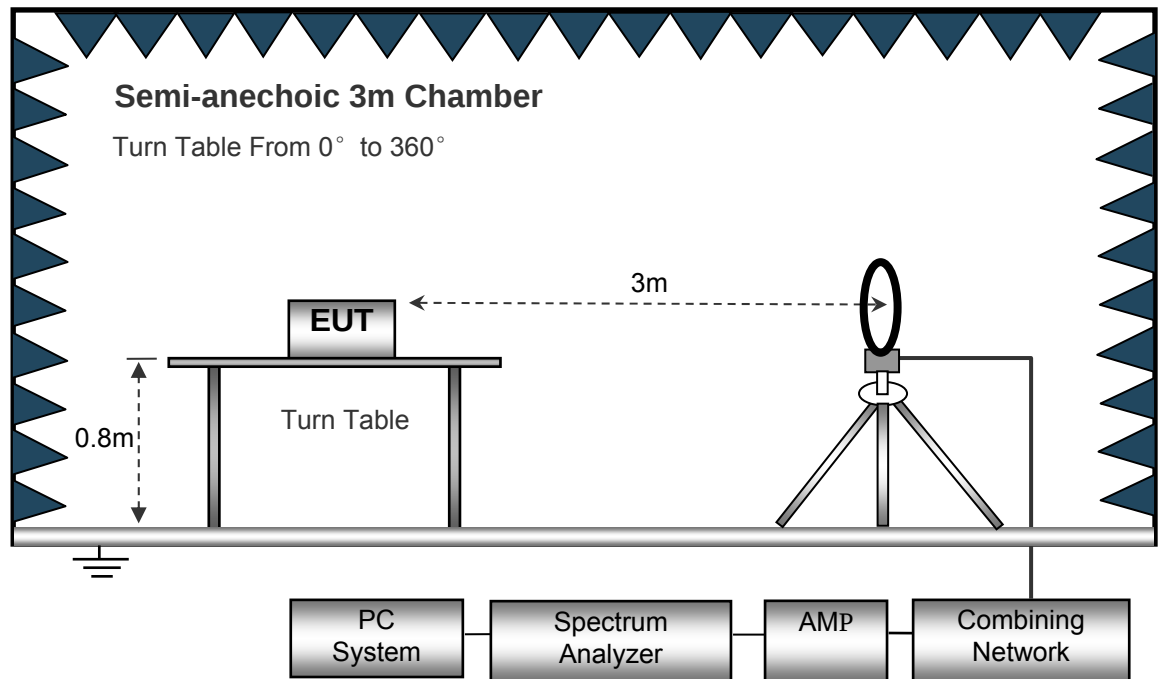

The test setup for emission measurement from 30 MHz to 1 GHz.

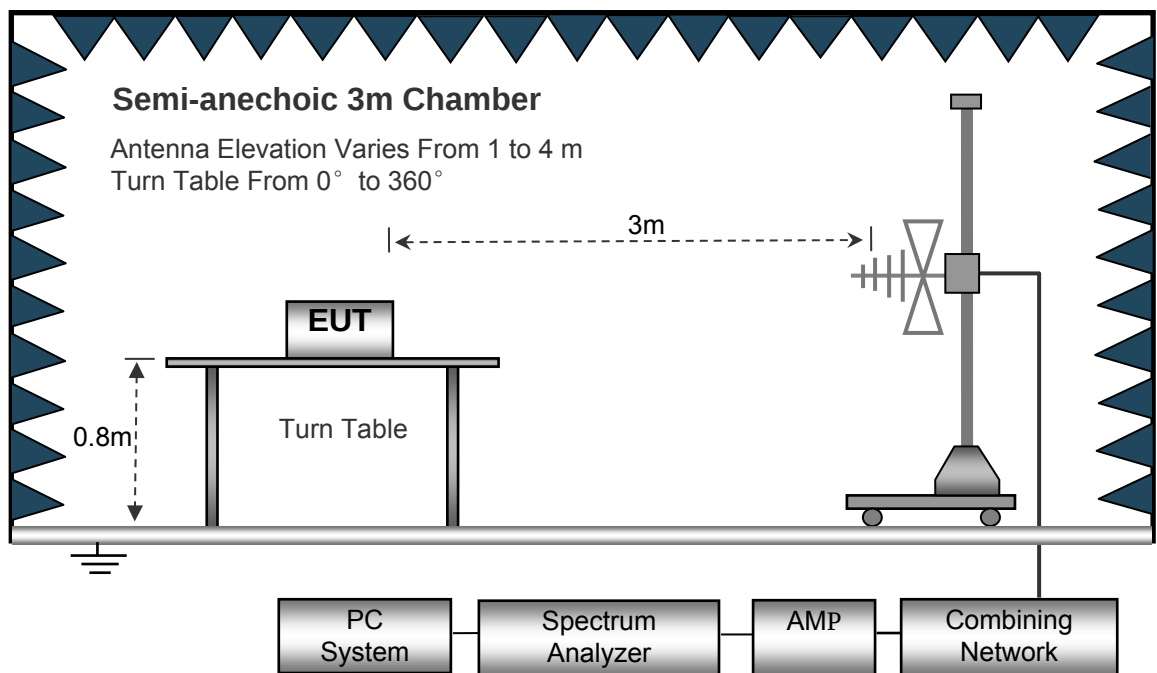

The test setup for emission measurement above 1 GHz.

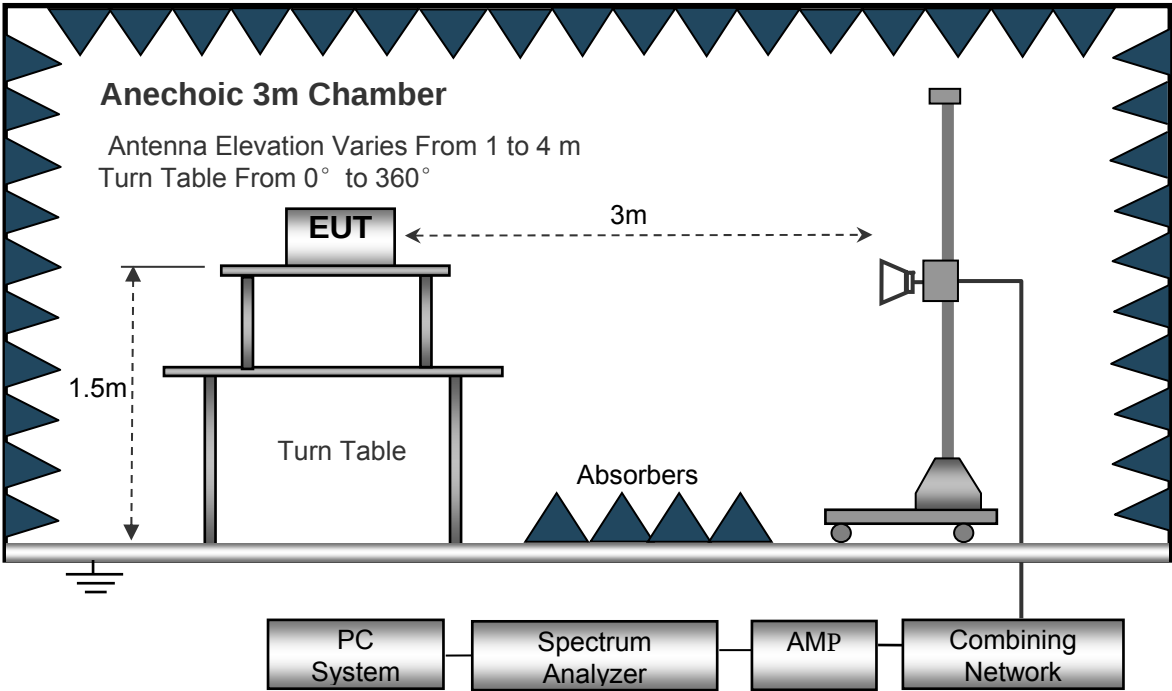

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth.....10kHz
Video Bandwidth.....10kHz
Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....100kHz
Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....1MHz
Video Bandwidth.....3MHz
DetectorAve.
Resolution Bandwidth.....1MHz
Video Bandwidth.....10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable. For below 1GHz, the EUT is 0.8m above ground plane; For above 1GHz, the EUT is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

8.5 Summary of Test Results

Test Frequency : 12.288MHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Remark: only the worst data (GFSK modulation mode) were reported.

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Low Channel 2402MHz									
271.22	30.28	QP	103	1.8	H	-13.35	16.93	46.00	-29.07
271.22	35.23	QP	181	1.4	V	-13.35	21.88	46.00	-24.12
4804.00	45.22	PK	333	1.7	V	-1.06	44.16	74.00	-29.84
4804.00	42.62	Ave	333	1.7	V	-1.06	41.56	54.00	-12.44
7206.00	40.62	PK	323	1.6	H	1.33	41.95	74.00	-32.05
7206.00	37.39	Ave	323	1.6	H	1.33	38.72	54.00	-15.28
2348.60	45.06	PK	202	1.3	V	-13.19	31.87	74.00	-42.13
2348.60	39.65	Ave	202	1.3	V	-13.19	26.46	54.00	-27.54
2372.60	43.45	PK	106	1.1	H	-13.14	30.31	74.00	-43.69
2372.60	36.64	Ave	106	1.1	H	-13.14	23.50	54.00	-30.50
2494.42	43.01	PK	270	1.2	V	-13.08	29.93	74.00	-44.07
2494.42	36.64	Ave	270	1.2	V	-13.08	23.56	54.00	-30.44

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Middle Channel 2441MHz									
271.22	31.14	QP	313	1.8	H	-13.35	17.79	46.00	-28.21
271.22	34.36	QP	92	1.9	V	-13.35	21.01	46.00	-24.99
4880.00	44.35	PK	106	1.7	V	-0.62	43.73	74.00	-30.27
4880.00	41.18	Ave	106	1.7	V	-0.62	40.56	54.00	-13.44
7320.00	41.09	PK	357	1.6	H	2.21	43.30	74.00	-30.70
7320.00	36.09	Ave	357	1.6	H	2.21	38.30	54.00	-15.70
2329.00	45.84	PK	9	1.6	V	-13.19	32.65	74.00	-41.35
2329.00	39.80	Ave	9	1.6	V	-13.19	26.61	54.00	-27.39
2354.76	42.81	PK	107	1.7	H	-13.14	29.67	74.00	-44.33
2354.76	38.68	Ave	107	1.7	H	-13.14	25.54	54.00	-28.46
2486.79	43.57	PK	205	2.0	V	-13.08	30.49	74.00	-43.51
2486.79	36.70	Ave	205	2.0	V	-13.08	23.62	54.00	-30.38

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK High Channel 2480MHz									
271.22	30.38	QP	105	1.3	H	-13.35	17.03	46.00	-28.97
271.22	33.34	QP	130	1.1	V	-13.35	19.99	46.00	-26.01
4960.00	43.36	PK	326	1.8	V	-0.24	43.12	74.00	-30.88
4960.00	42.28	Ave	326	1.8	V	-0.24	42.04	54.00	-11.96
7440.00	41.04	PK	148	1.1	H	2.84	43.88	74.00	-30.12
7440.00	34.77	Ave	148	1.1	H	2.84	37.61	54.00	-16.39
2311.18	45.66	PK	148	1.2	V	-13.19	32.47	74.00	-41.53
2311.18	38.92	Ave	148	1.2	V	-13.19	25.73	54.00	-28.27
2357.74	43.40	PK	291	1.1	H	-13.14	30.26	74.00	-43.74
2357.74	38.08	Ave	291	1.1	H	-13.14	24.94	54.00	-29.06
2497.53	42.84	PK	341	1.9	V	-13.08	29.76	74.00	-44.24
2497.53	37.70	Ave	341	1.9	V	-13.08	24.62	54.00	-29.38

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported

9 Band Edge Measurement



Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting



9.1 Test Procedure



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold



9.2 Test Result:



Test plots

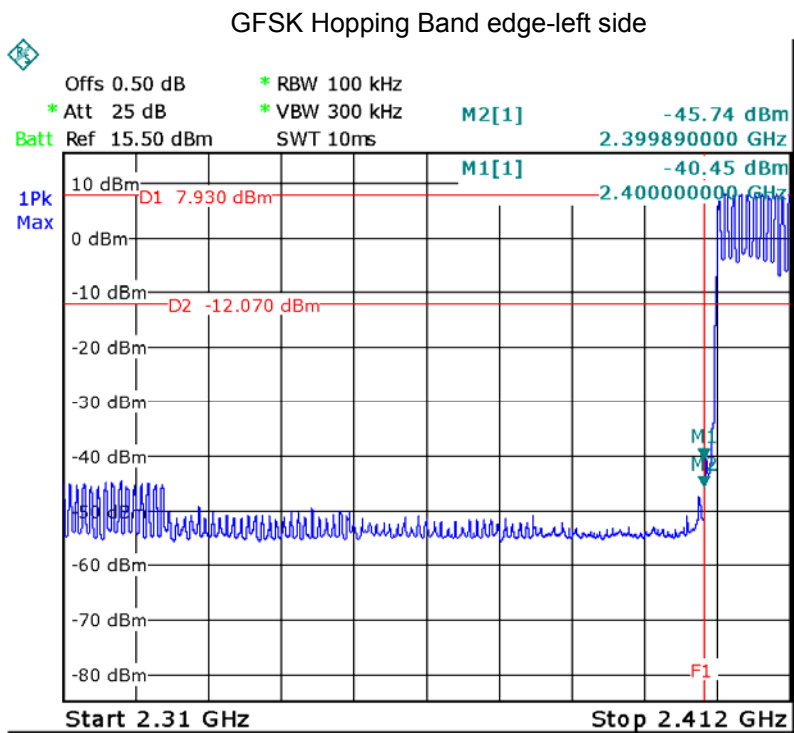
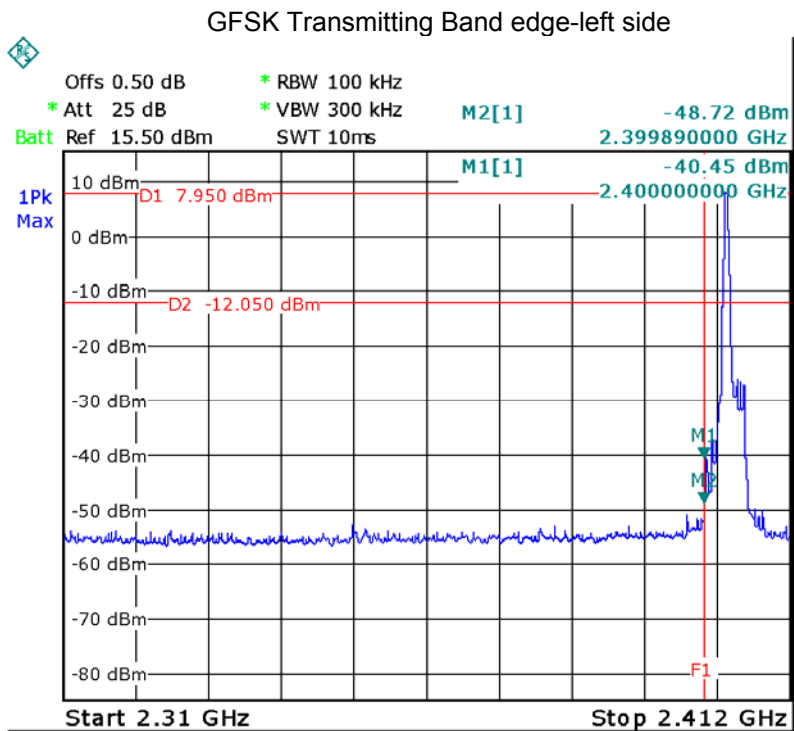


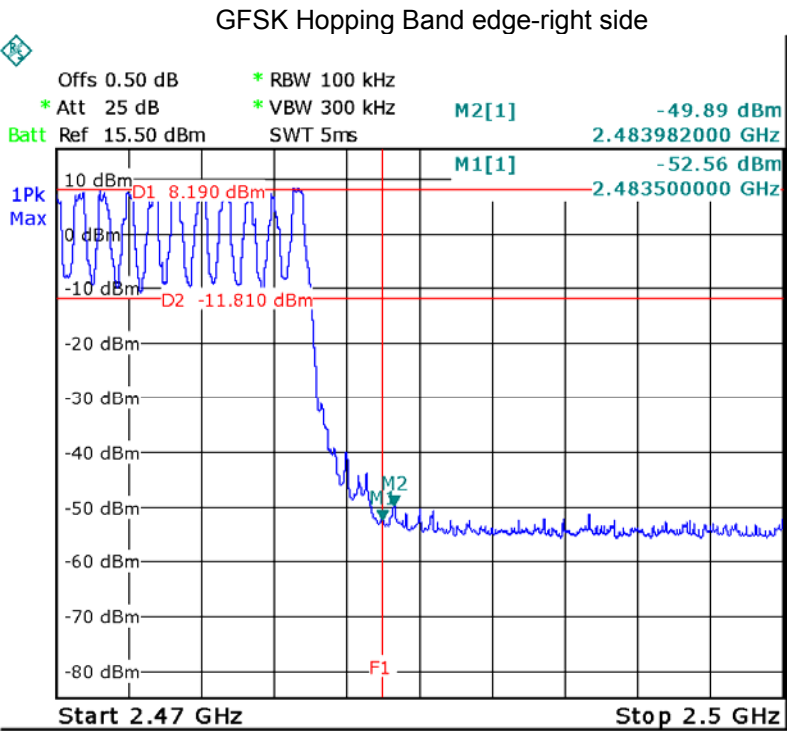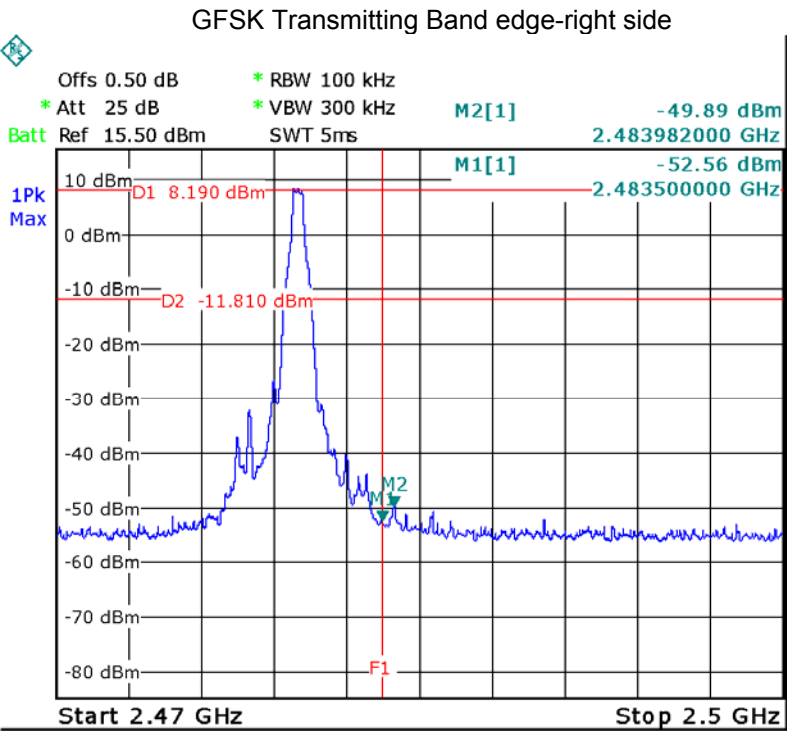

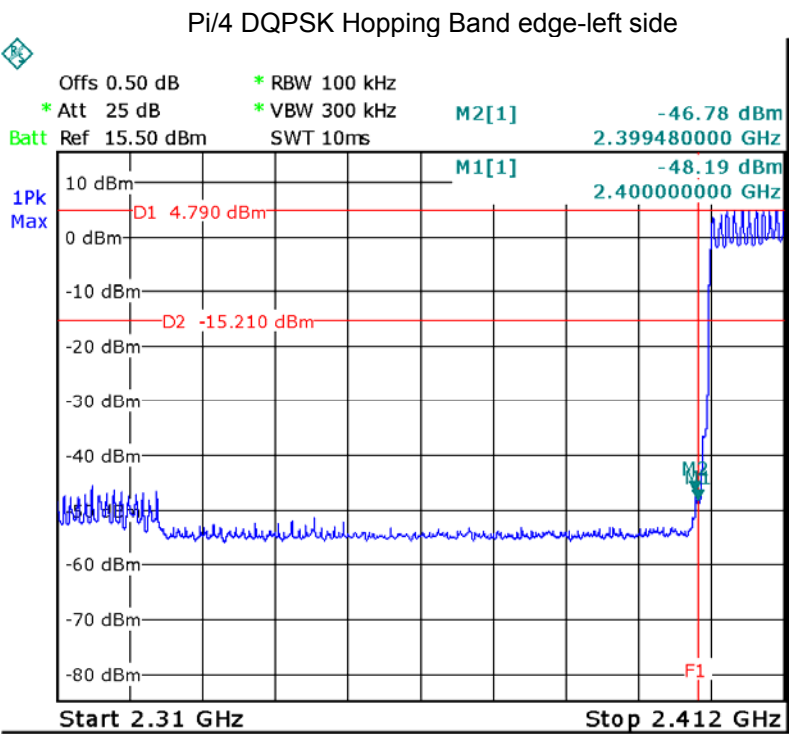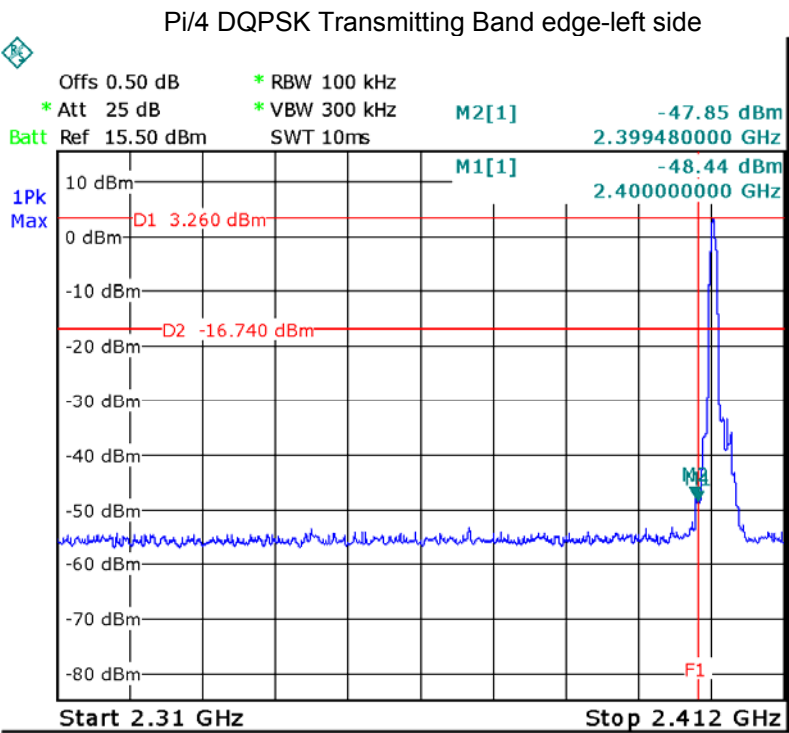

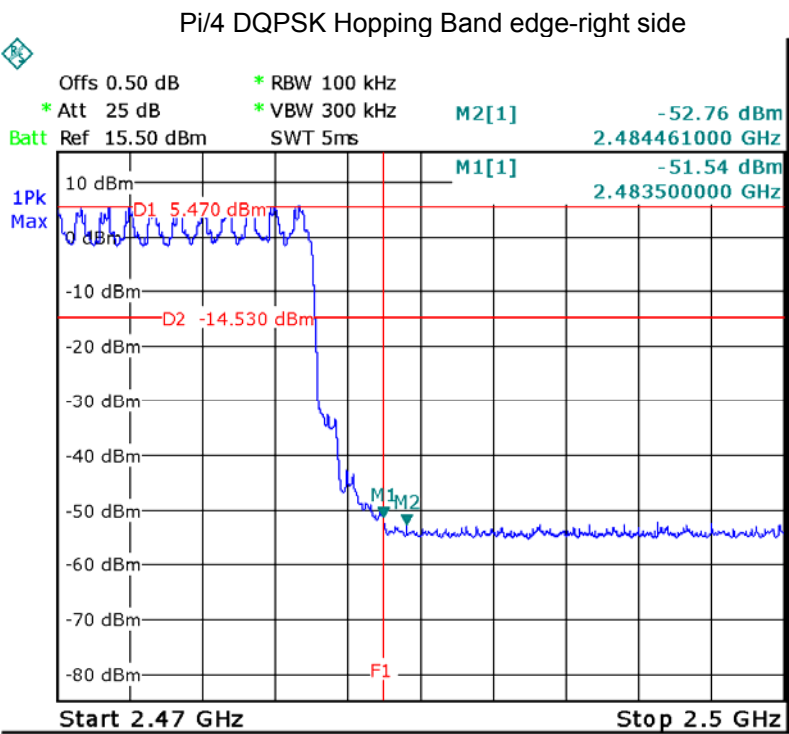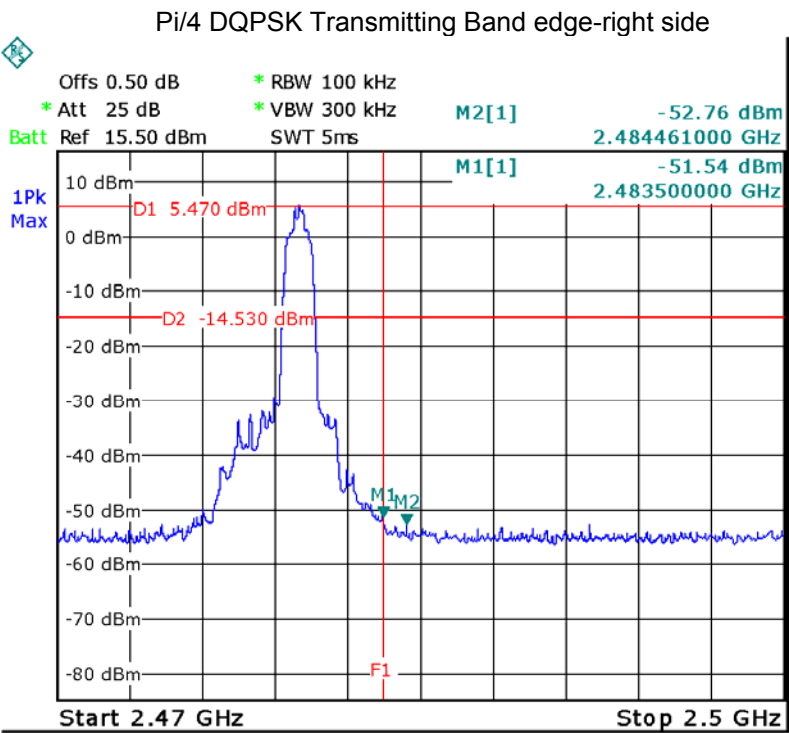

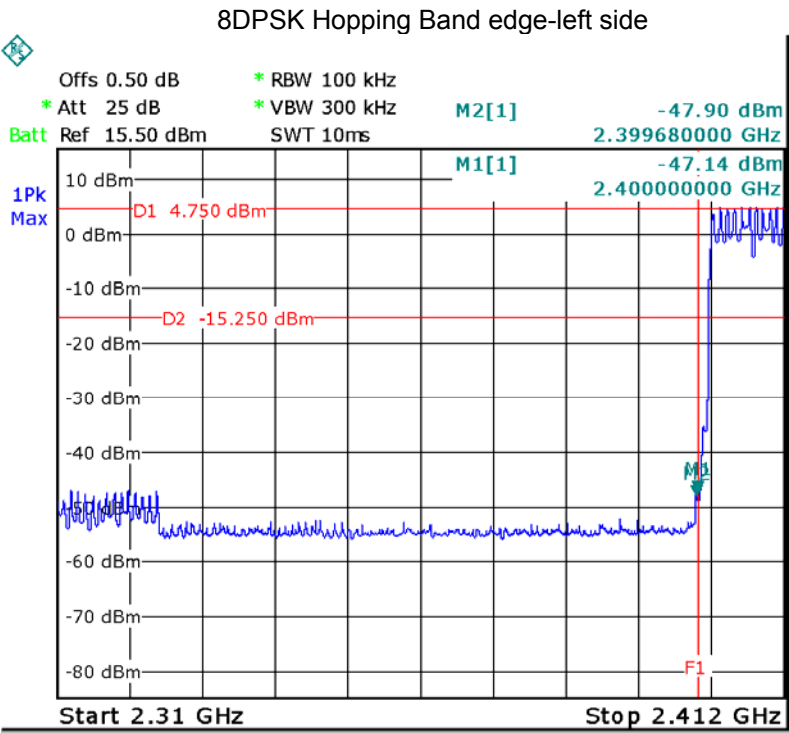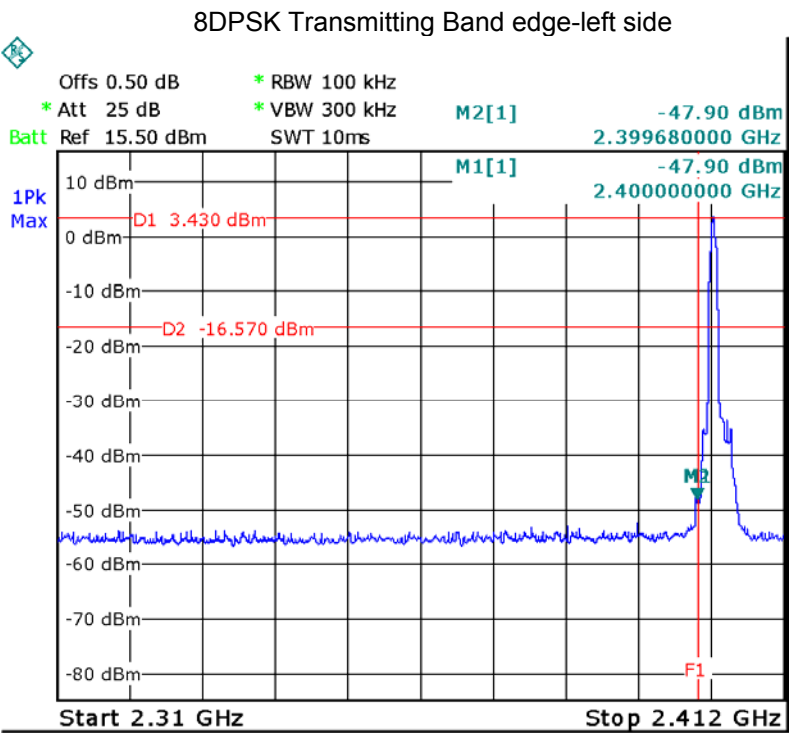

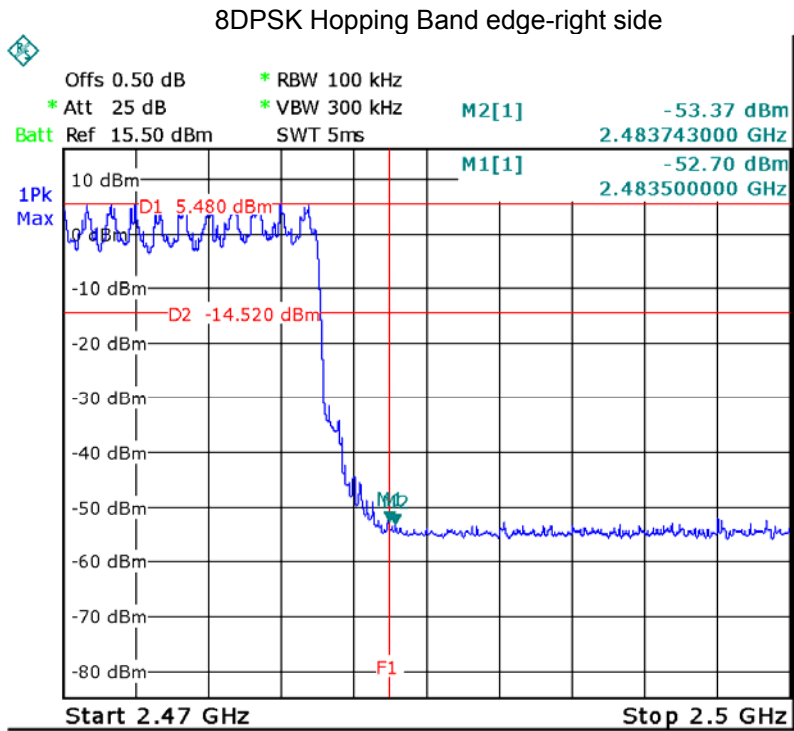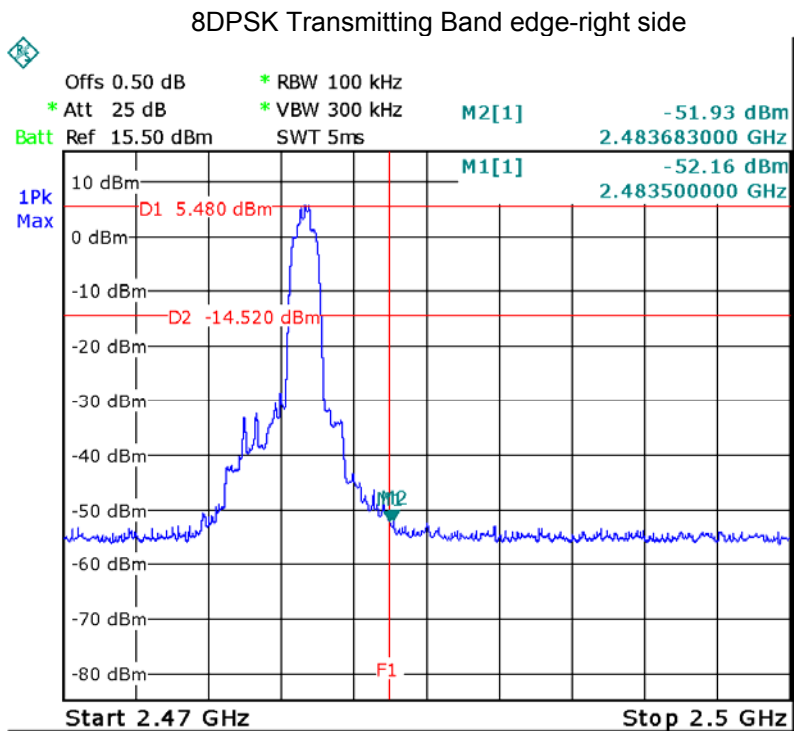

10 Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247
 Test Method: C63.10: 2013
 Test Mode: Test in fixing operating frequency at low, Middle, high channel.

10.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz


10.2 Test Result:

Modulation	Test Channel	20dBBandwidth(MHz)	99% Bandwidth(MHz)
GFSK	Low	0.922	0.844
	Middle	0.922	0.844
	High	0.922	0.838
Pi/4DQPSK	Low	1.216	1.156
	Middle	1.216	1.162
	High	1.216	1.162
8DPSK	Low	1.270	1.156
	Middle	1.270	1.162
	High	1.270	1.162


Test result plot as follows:


Modulation: GFSK

Low Channel

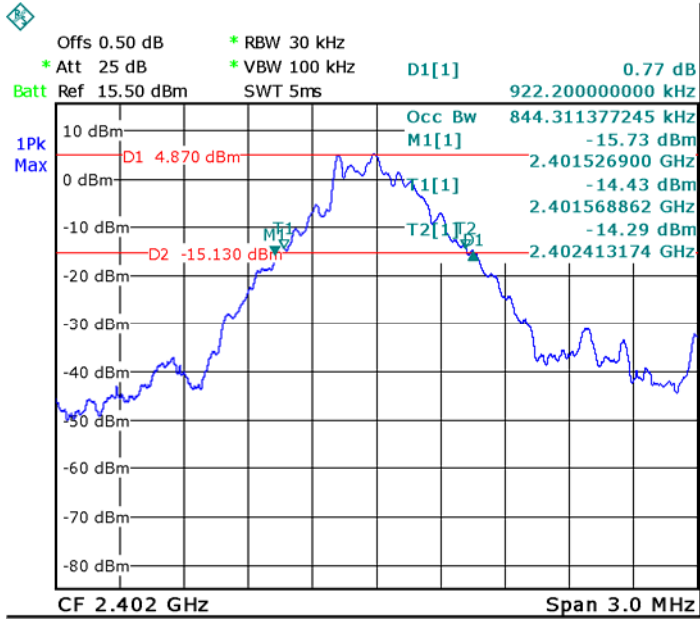




Middle Channel

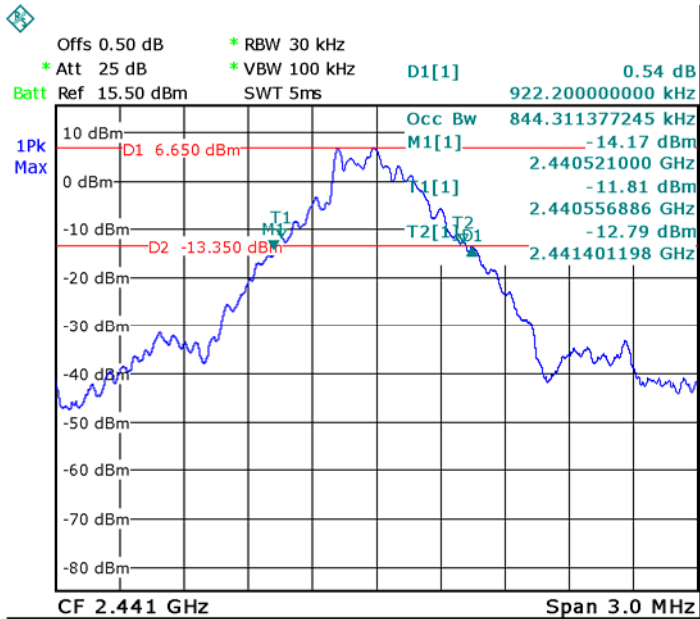

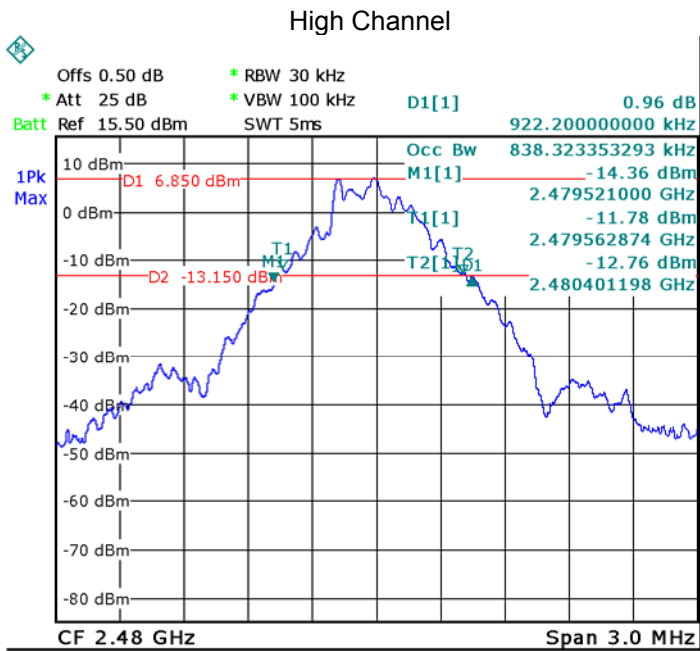


Modulation: Pi/4DQPSK

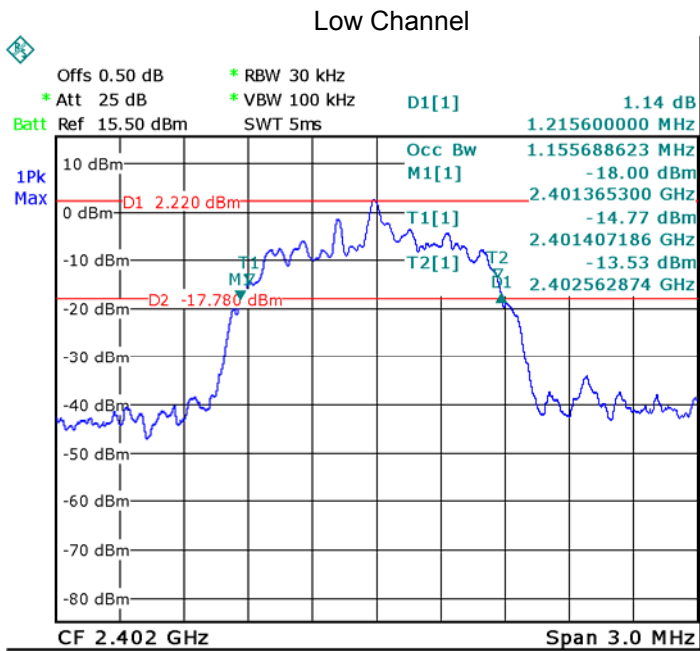

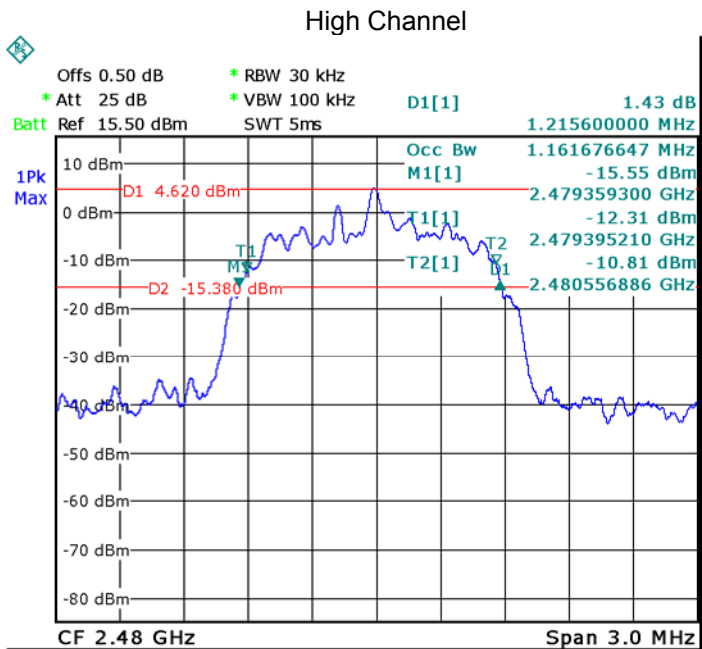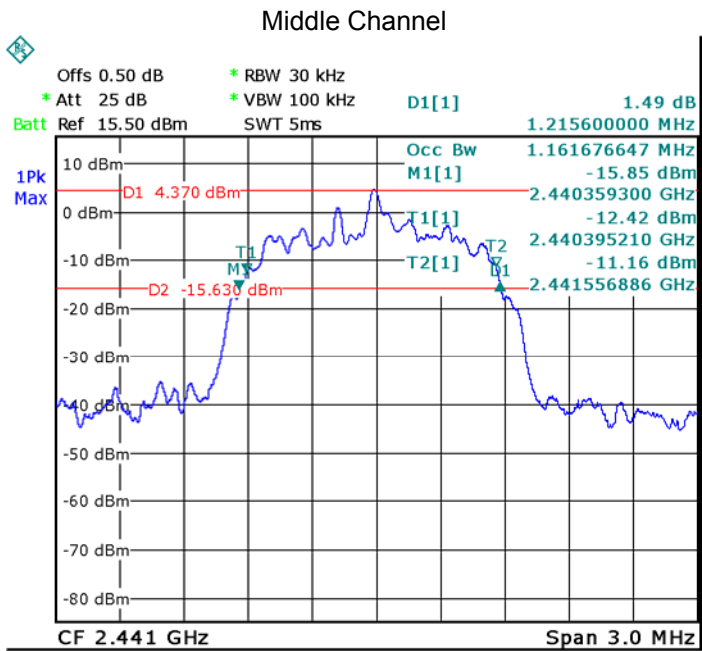



Modulation: 8DPSK

Low Channel

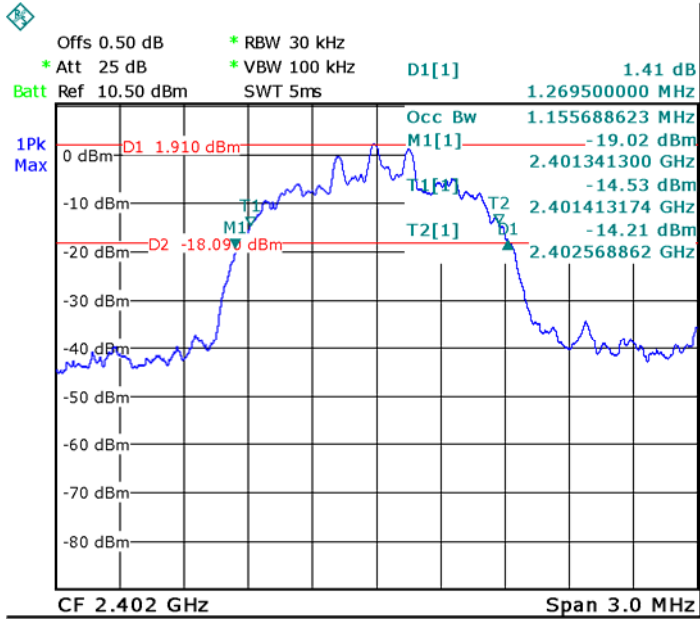

Middle Channel

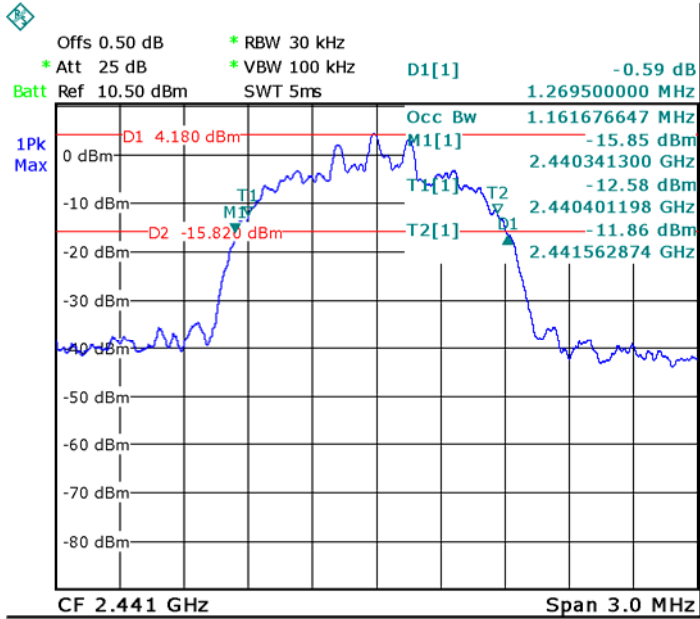

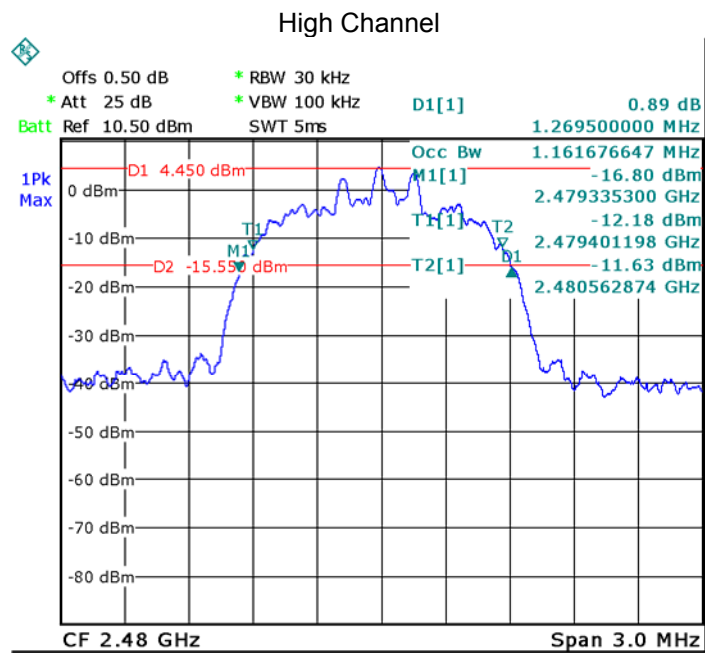

11 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 1watts (30 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.

11.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


11.2 Test Result:

Test Mode	Data Rate	Peak Power(dBm)			Limit (dBm)
		Low Channel	Middle Channel	High Channel	
GFSK	1Mbps	6.81	8.23	8.30	20.97
4* π 4DQPSK	2Mbps	4.54	6.40	6.73	20.97
8DPSK	3Mbps	5.06	7.07	7.30	20.97


Test result plot as follows:



Modulation: GFSK



Low Channel

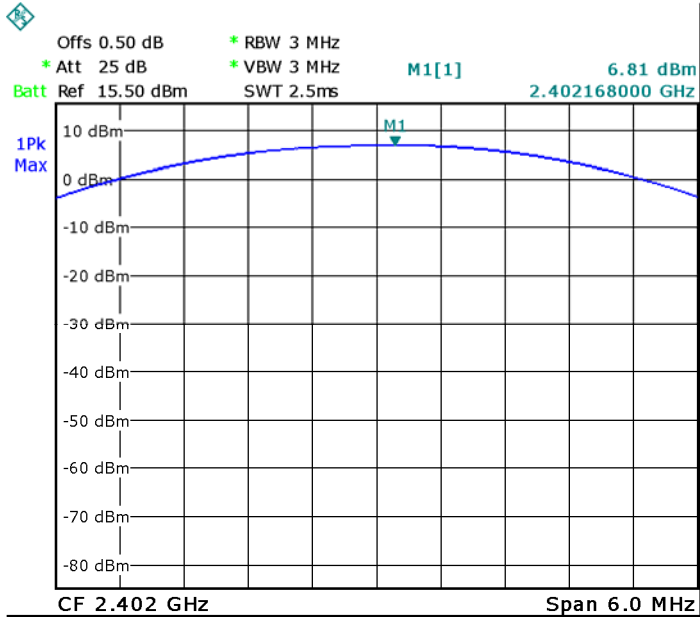

Middle Channel

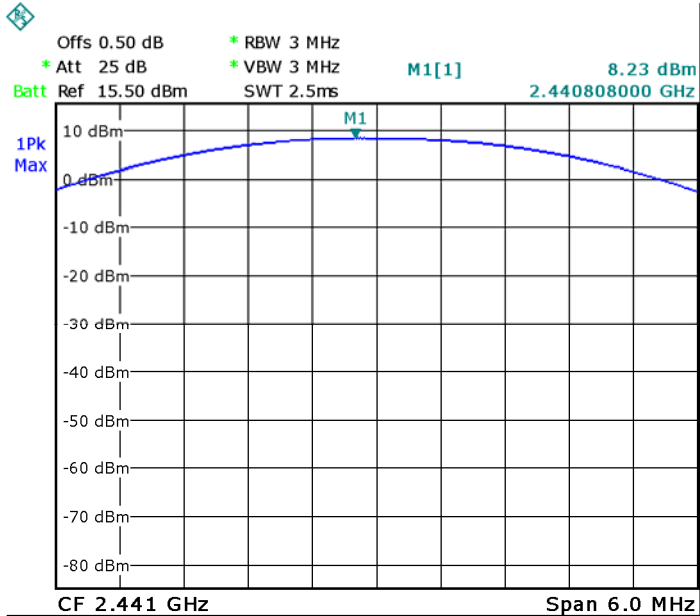


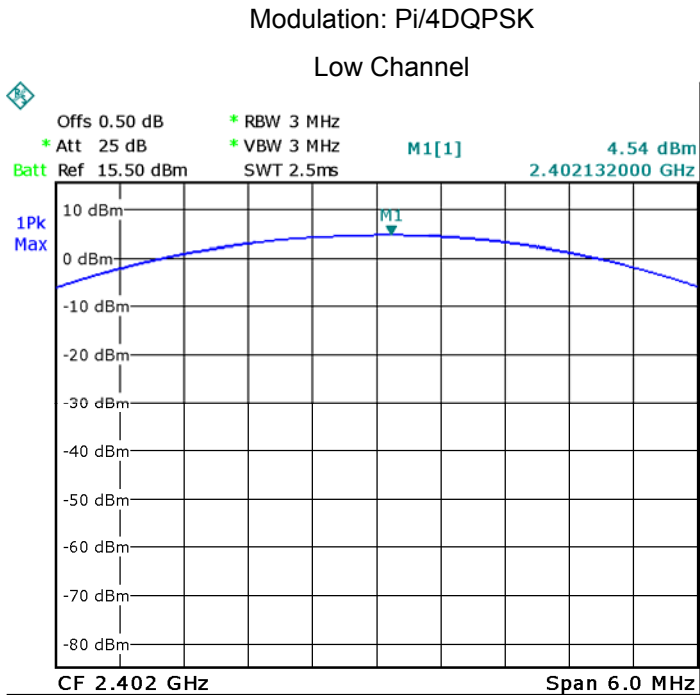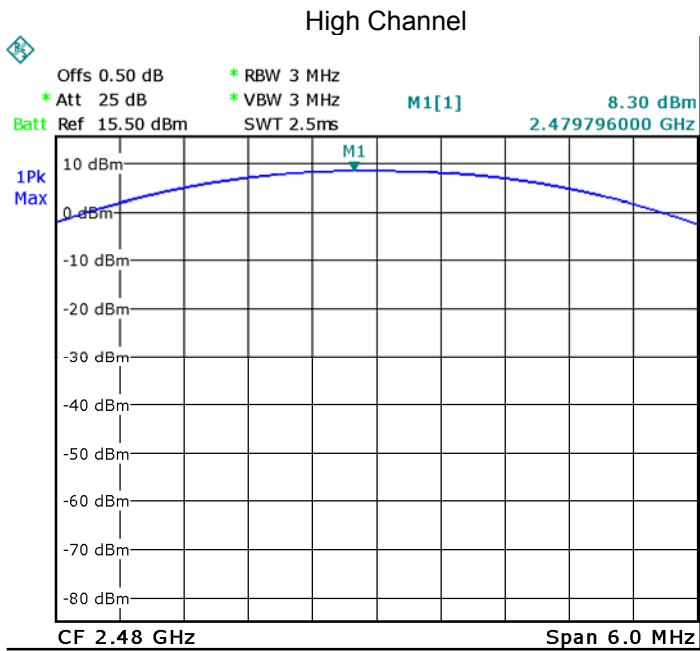

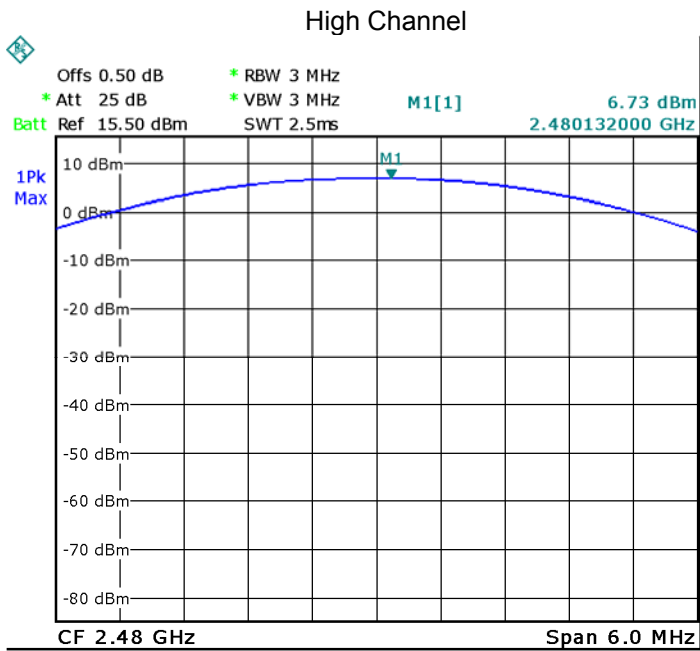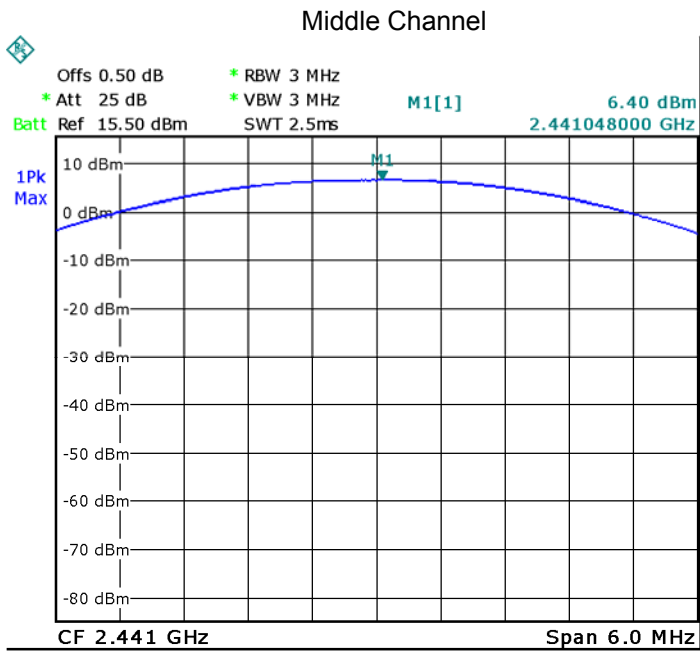



Modulation: 8DPSK

Low Channel

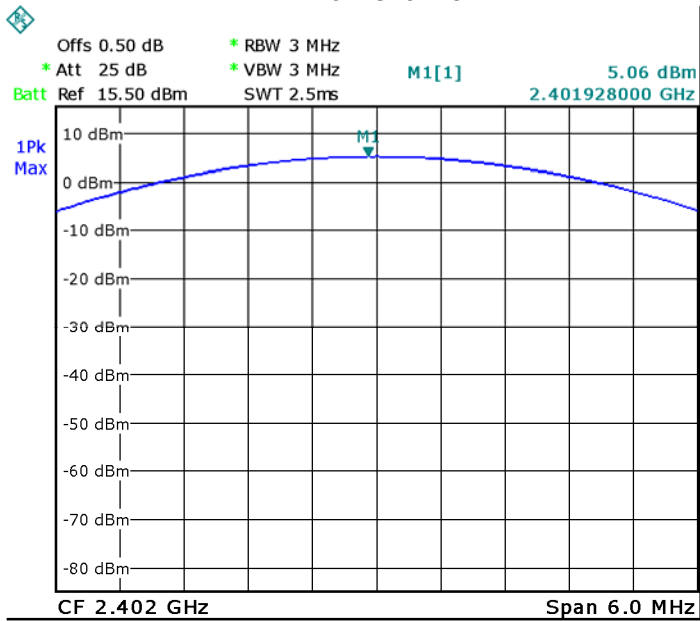

Middle Channel

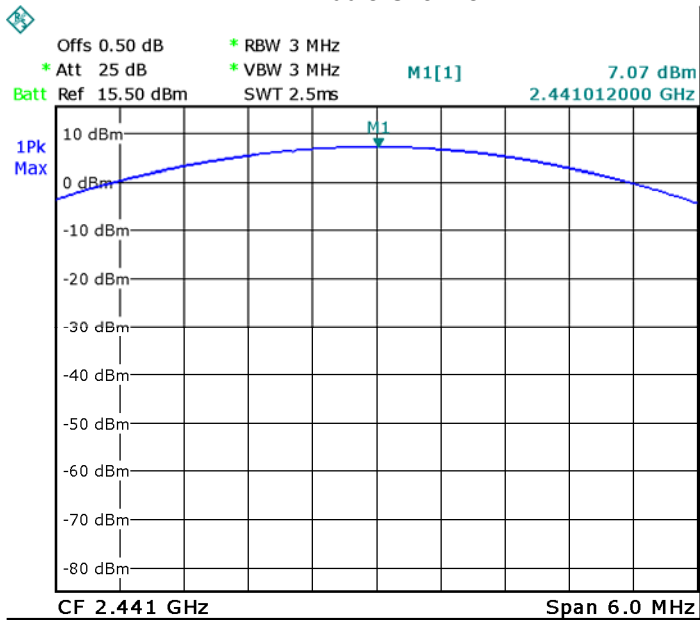

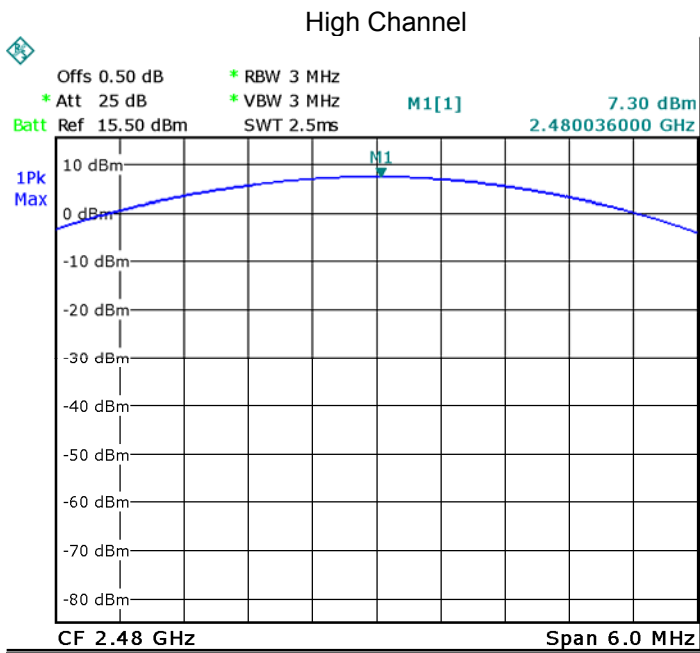

12 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode:	Test in hopping transmitting operating mode.

12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30KHz. VBW = 100KHz , Span = 6MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.


12.2 Test Result:

Modulation	Test Channel	Separation (MHz)
GFSK	Low	1.000
	Middle	1.000
	High	1.000
Pi/4DQPSK	Low	1.000
	Middle	1.000
	High	1.000
8DPSK	Low	1.000
	Middle	1.000
	High	1.000


Test result plot as follows:


Modulation: GFSK

Low Channel

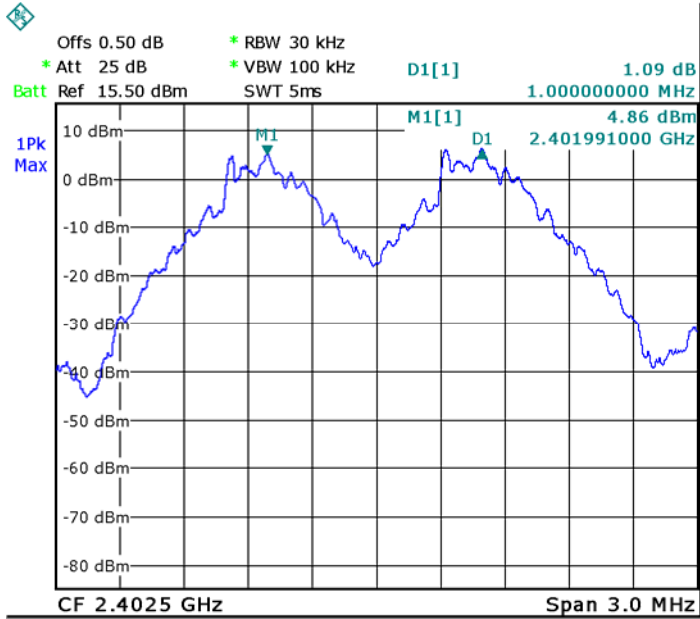




Middle Channel

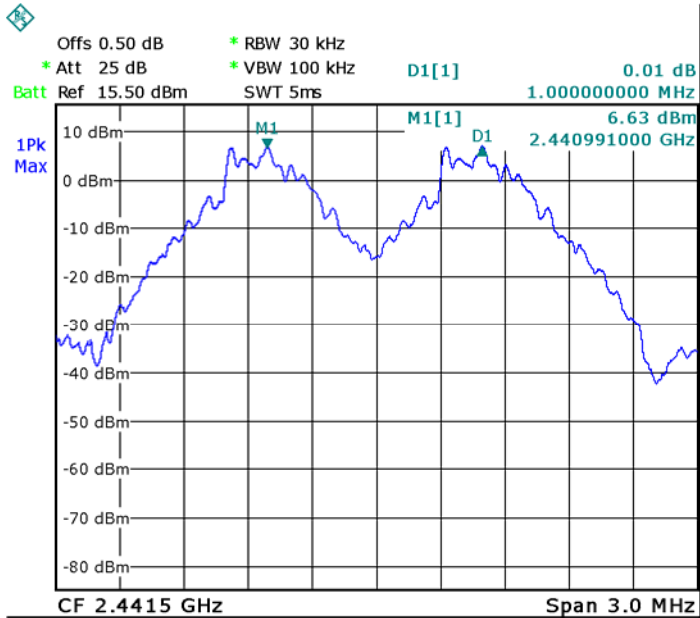

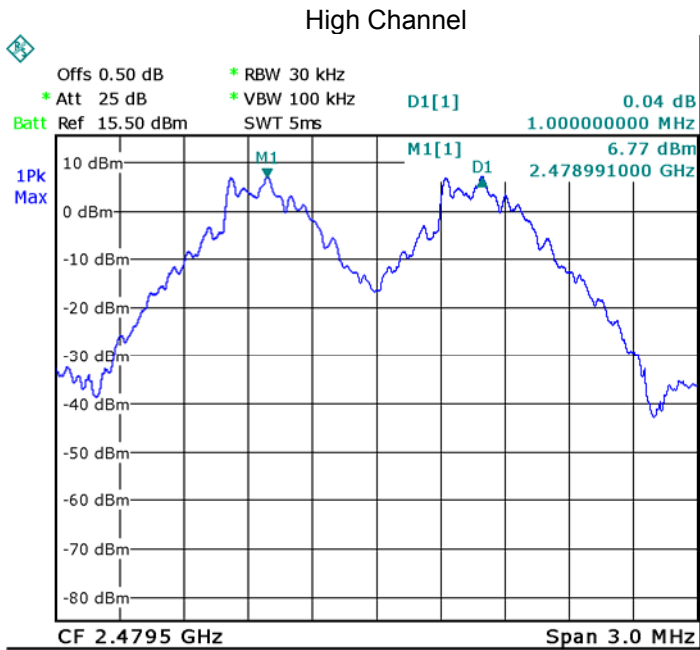


Modulation: Pi/4DQPSK

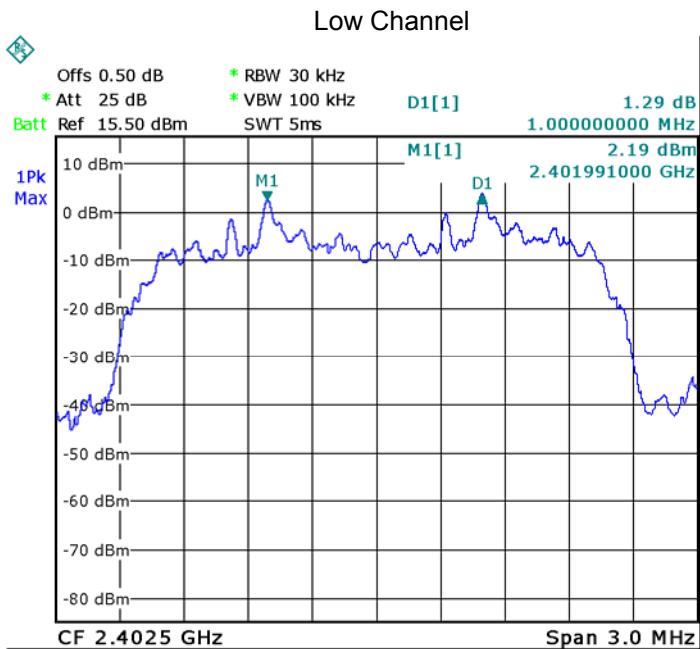

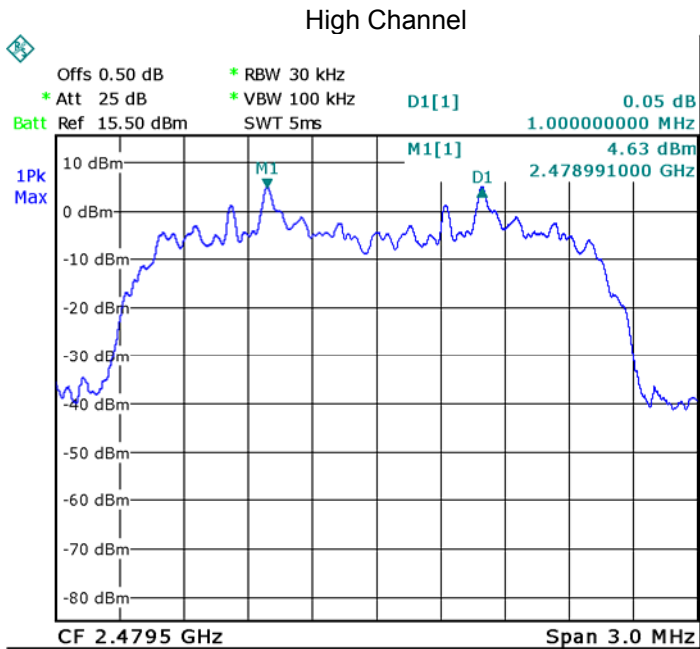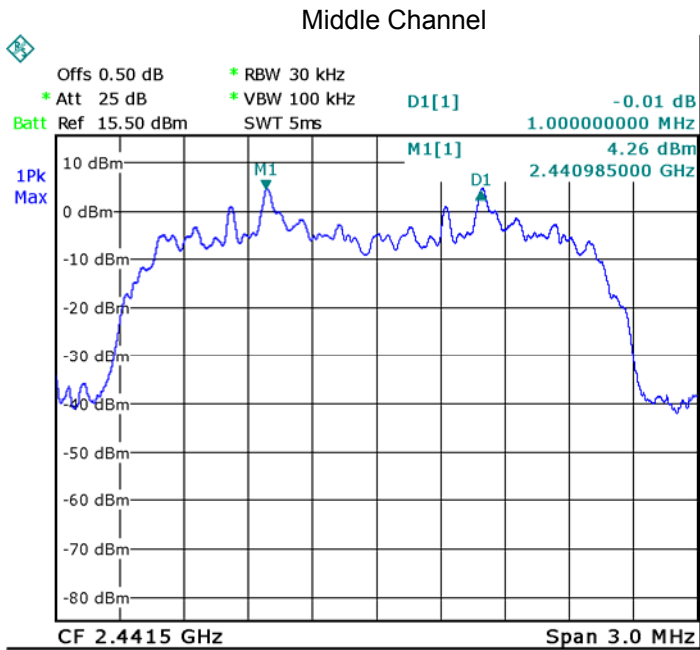



Modulation: 8DPSK

Low Channel

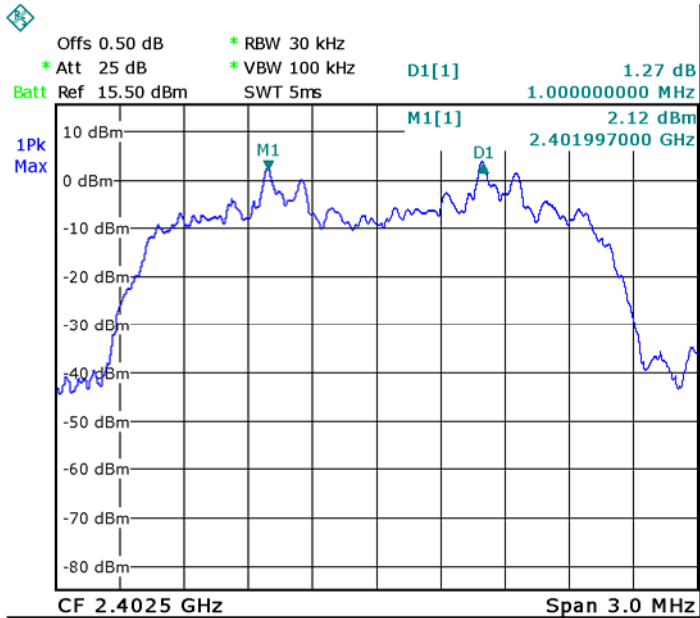

Middle Channel

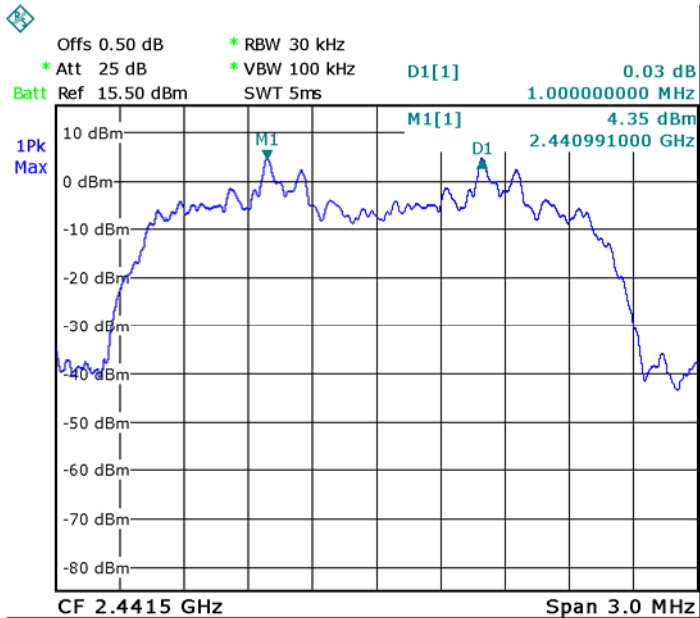

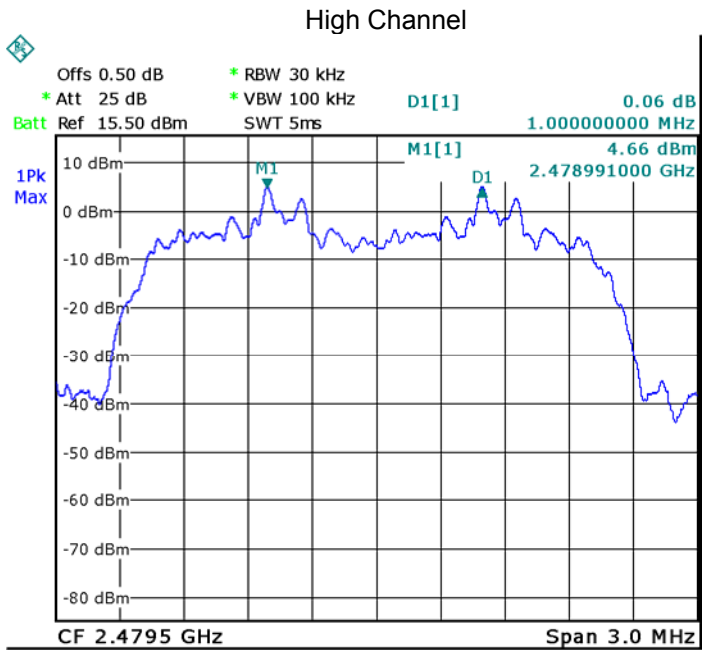

13 Number of Hopping Frequency


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.



13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

13.2 Test Result:

Total Channels are 79 Channels.

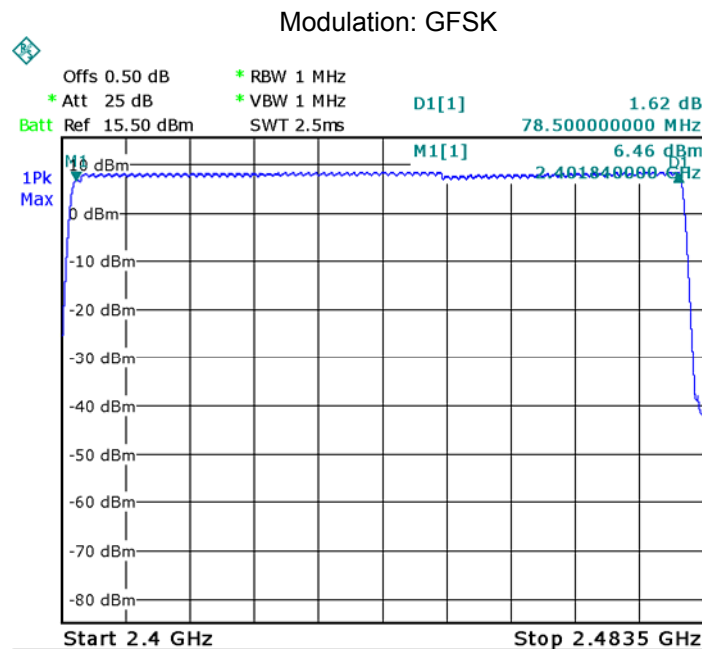

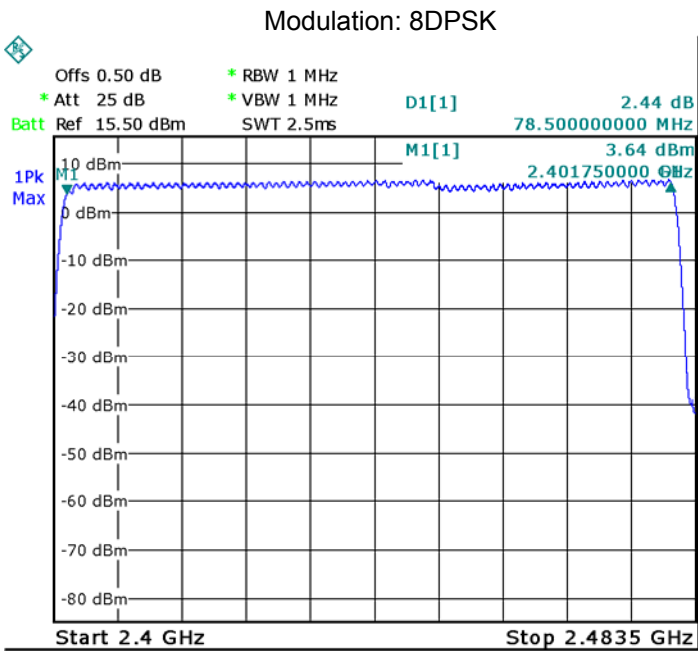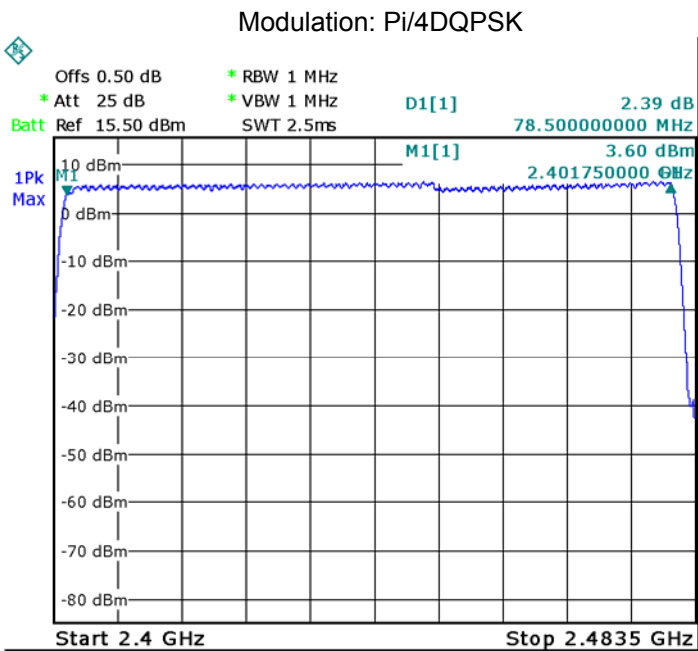

14 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

14.1 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centred on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

14.2 Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period: $T = 0.4(s) \times 79 = 31.6 (s)$

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).


DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


Data Packet	Dwell Time(s)
DH5	$1600/79/6 \times 31.6 \times (\text{MkrDelta})/1000$
DH3	$1600/79/4 \times 31.6 \times (\text{MkrDelta})/1000$
DH1	$1600/79/2 \times 31.6 \times (\text{MkrDelta})/1000$
Remark	Mkr Delta is single pulse time.

Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.888	0.308	0.4
		middle	2.888	0.308	0.4
		High	2.888	0.308	0.4
Pi/4DQPSK	DH5	Low	2.888	0.308	0.4
		middle	2.888	0.308	0.4
		High	2.888	0.308	0.4
8DPSK	DH5	Low	2.888	0.308	0.4
		middle	2.888	0.308	0.4
		High	2.888	0.308	0.4


Modulation:GFSK
Data Packet:
DH5.Low channel

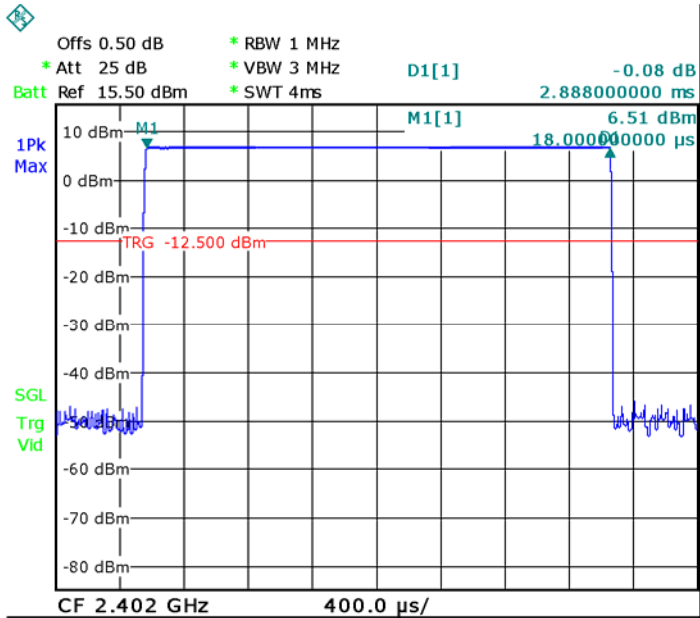


Data Packet:
DH5.Middle channel

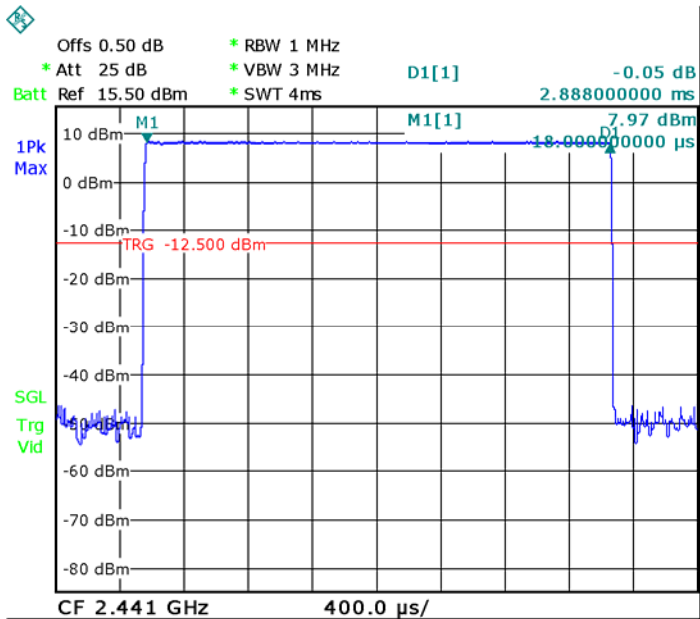


Data Packet:
DH5,High channel

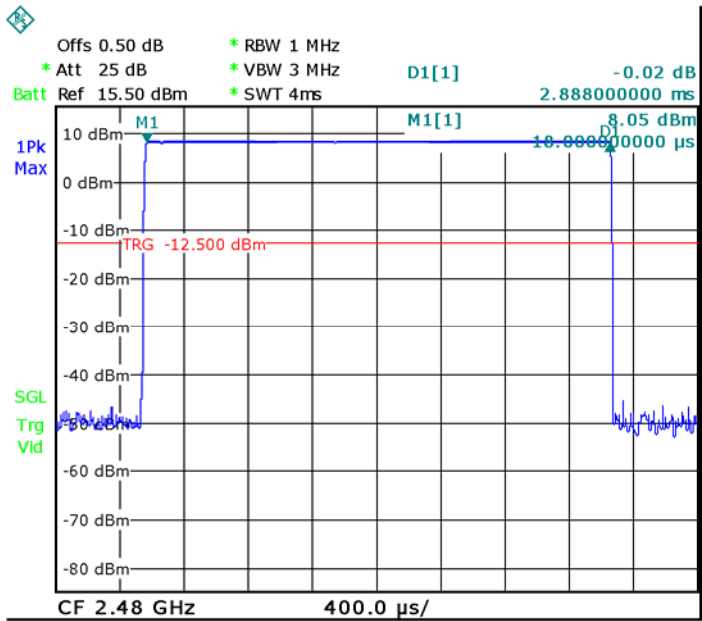


Pi/4DQPSK
Data Packet:
DH5,Low channel

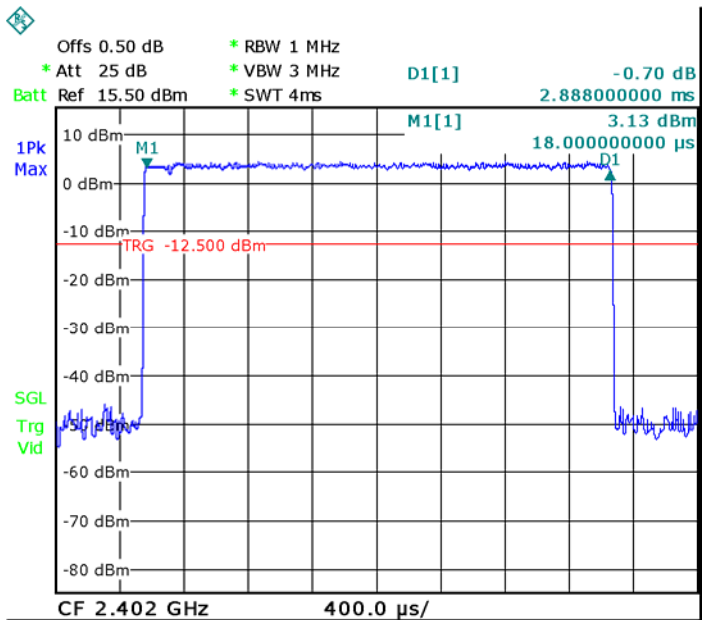


Data Packet:
DH5, Middle channel

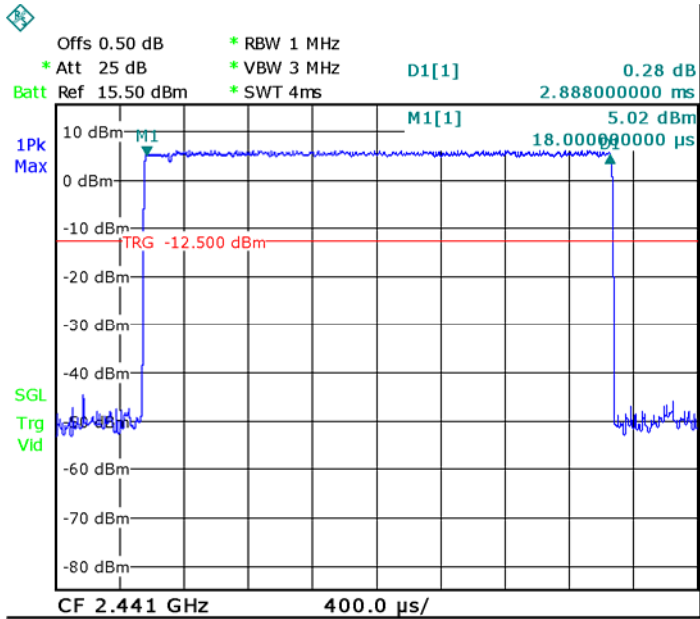


Data Packet:
DH5, High channel

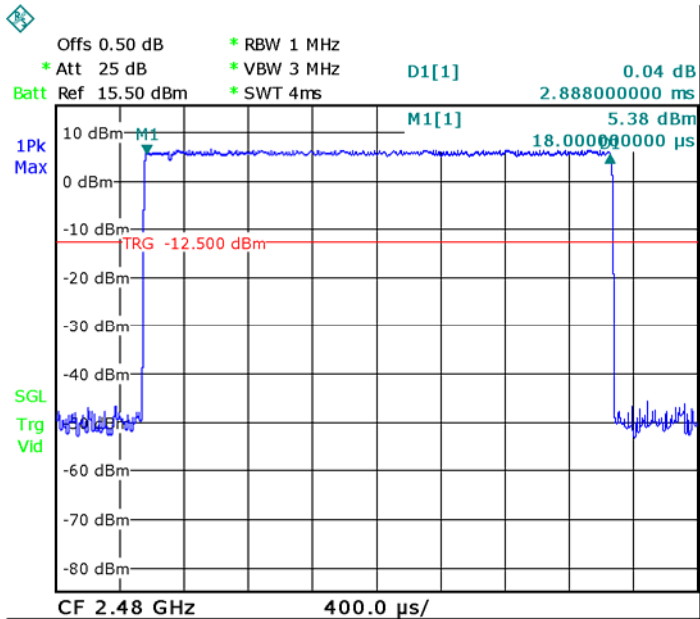


8DPSK
Data Packet:
DH5, Low channel

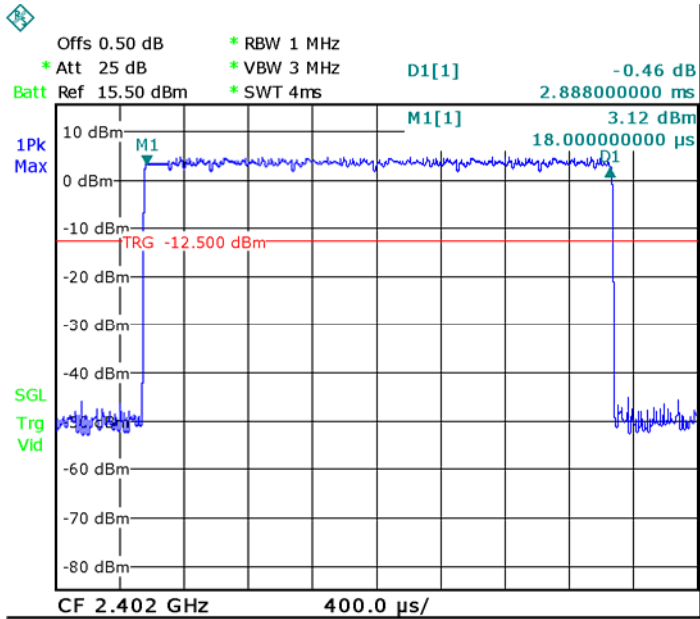

Data Packet:
DH5, Middle channel

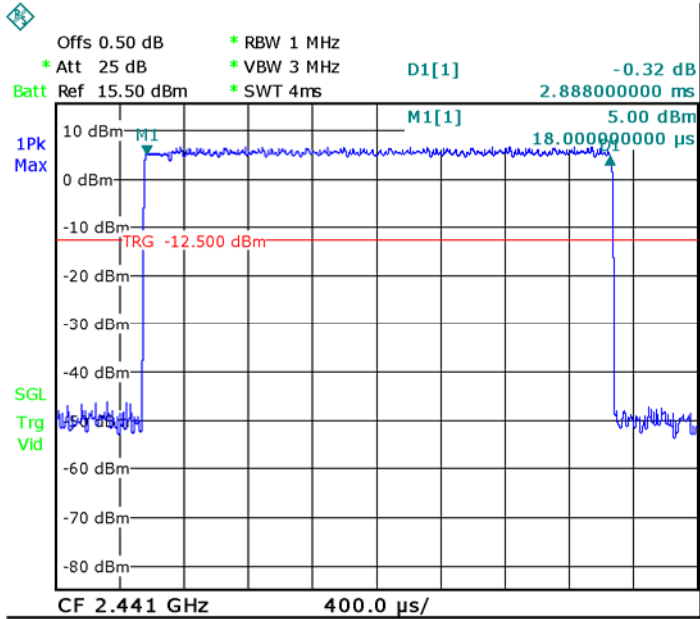

Data Packet:
DH5, High channel

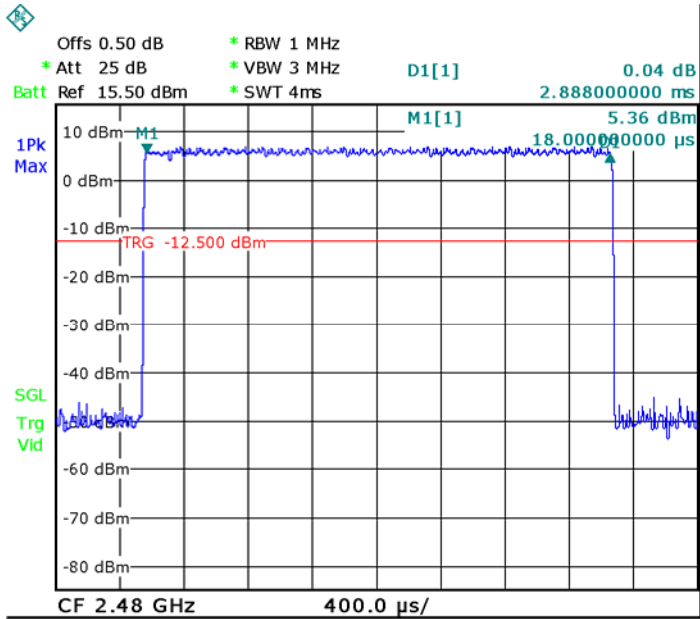


15 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has one PCB Printed Antenna, the gain is 0dBi. meets the requirements of FCC 15.203.

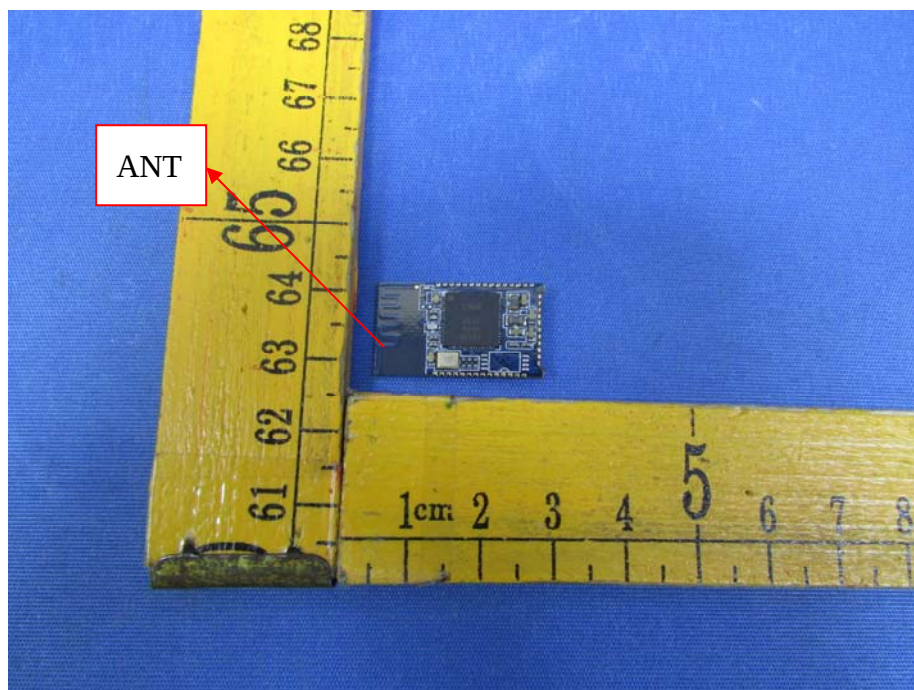

16 RF Exposure

Test Requirement: FCC Part 1.1307

Evaluation Method: FCC Part 2.1091 & KDB 447498 D01 General RF Exposure Guidance v06

16.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

16.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

16.3 MPE Calculation Method

$$S = \frac{P \times G}{4 \times \pi \times R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = output power to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator,
the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

From the peak EUT RF output power, the minimum mobile separation distance, R=20cm, as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
0.00	1.000	8.30	6.76	0.001345	1

17 Photographs –EM-JA006B Test Setup Photos

17.1 Photograph-Conducted Emissions Test Setup at Test Site 1#

Adapter 1



Adapter 2




17.2 Photograph-Radiated Emissions

Test Frequency 12.288MHz to 30MHz at Test Site 2#


Adapter 1




Adapter 2

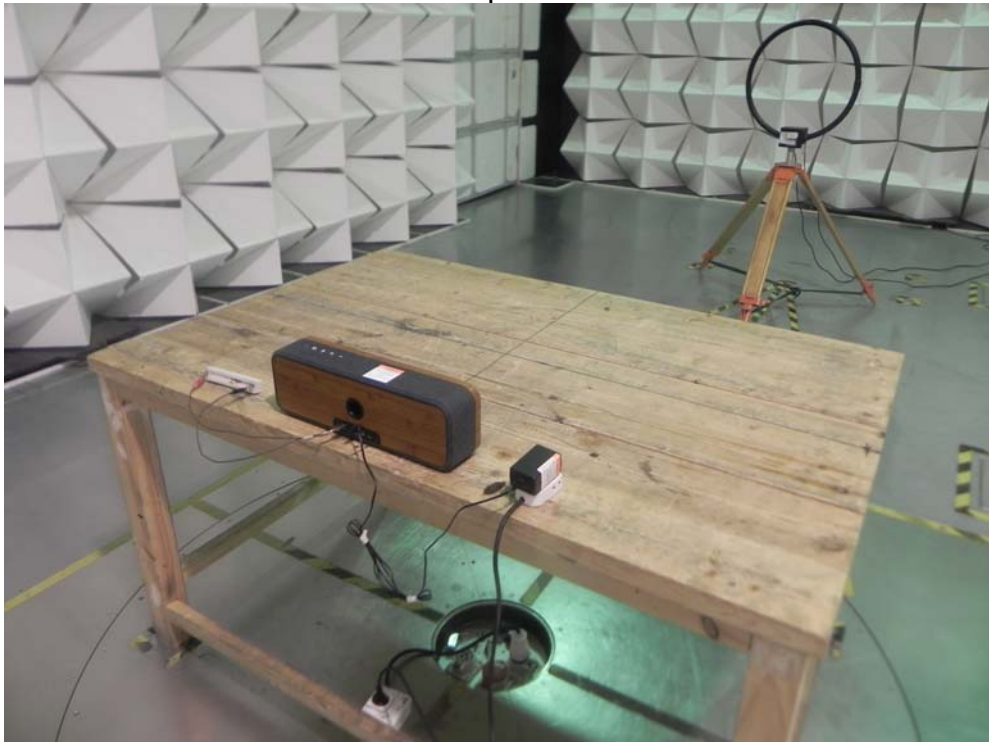



Test Frequency 30MHz to 1000MHz at Test Site 2#
Adapter 1

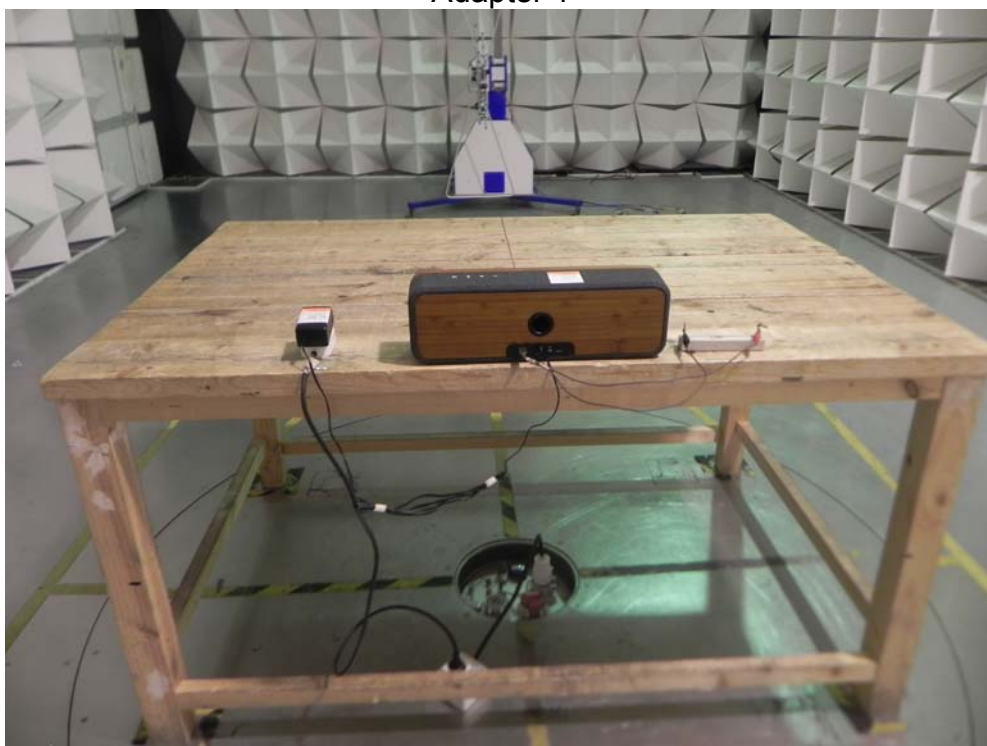

Adapter 2

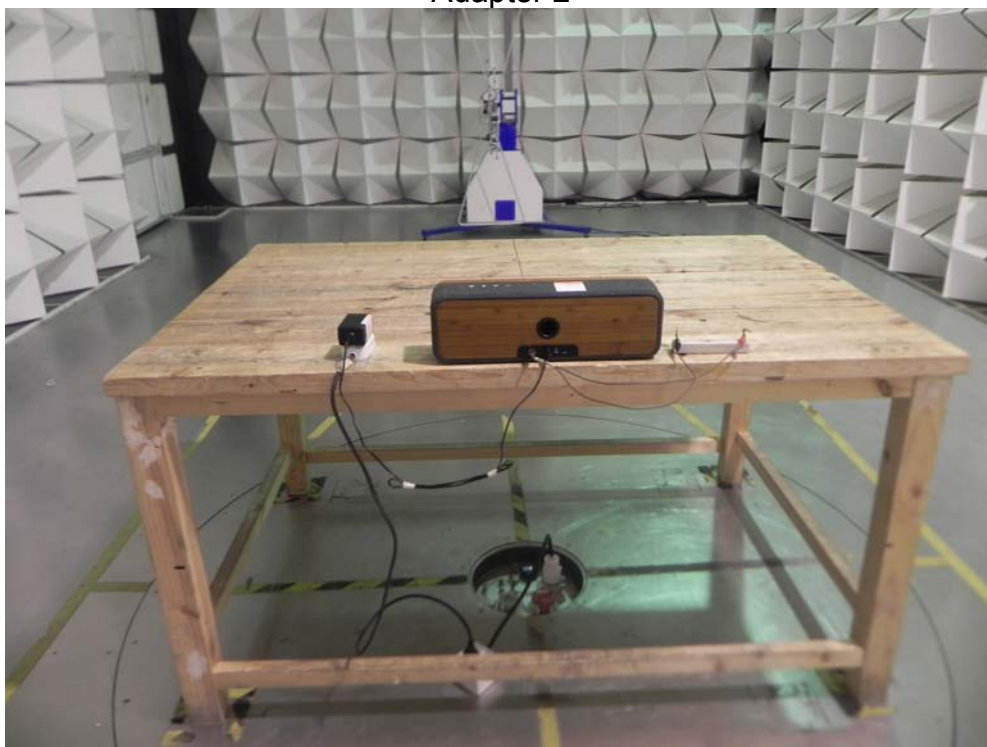



Test Frequency Above 1GHz Test Site 1#
Adapter 1

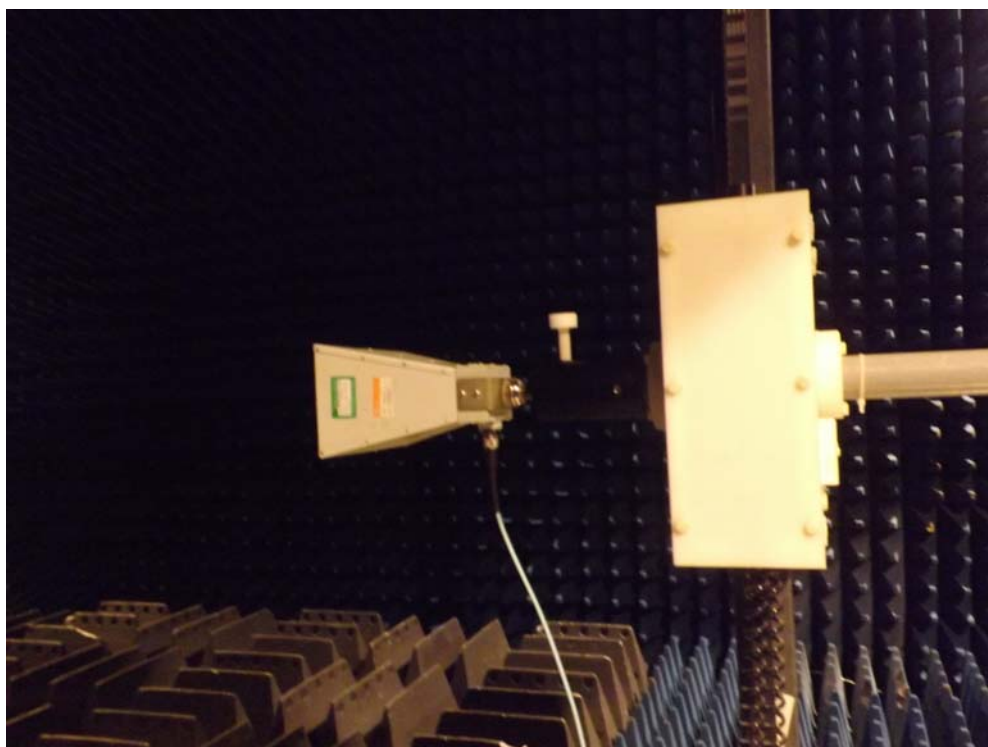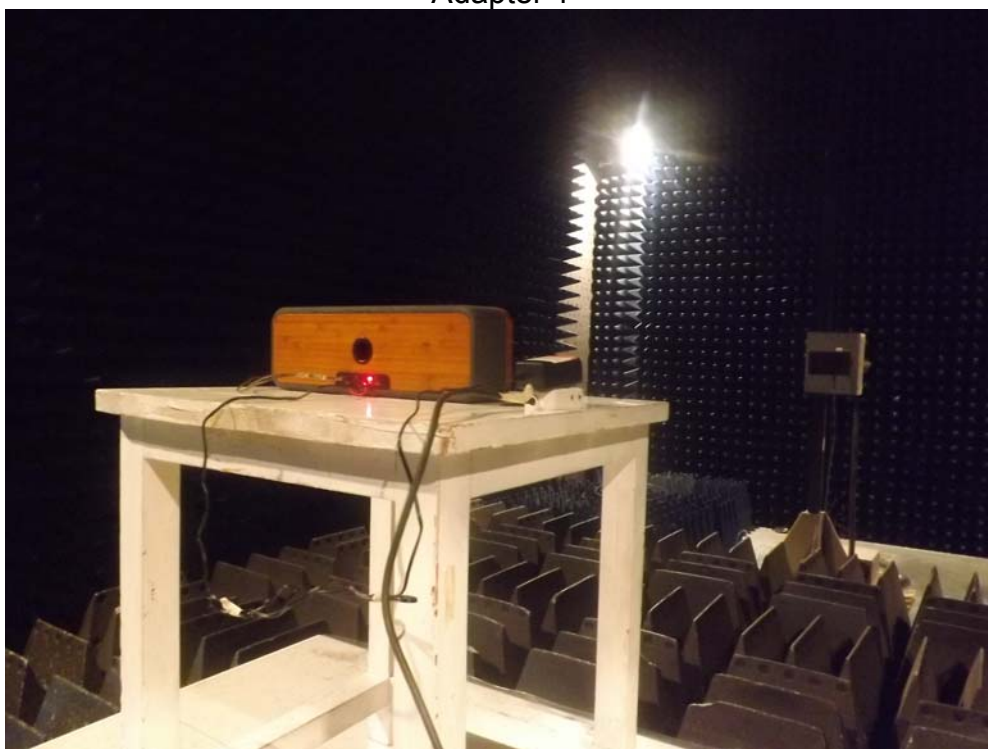



Adapter 2

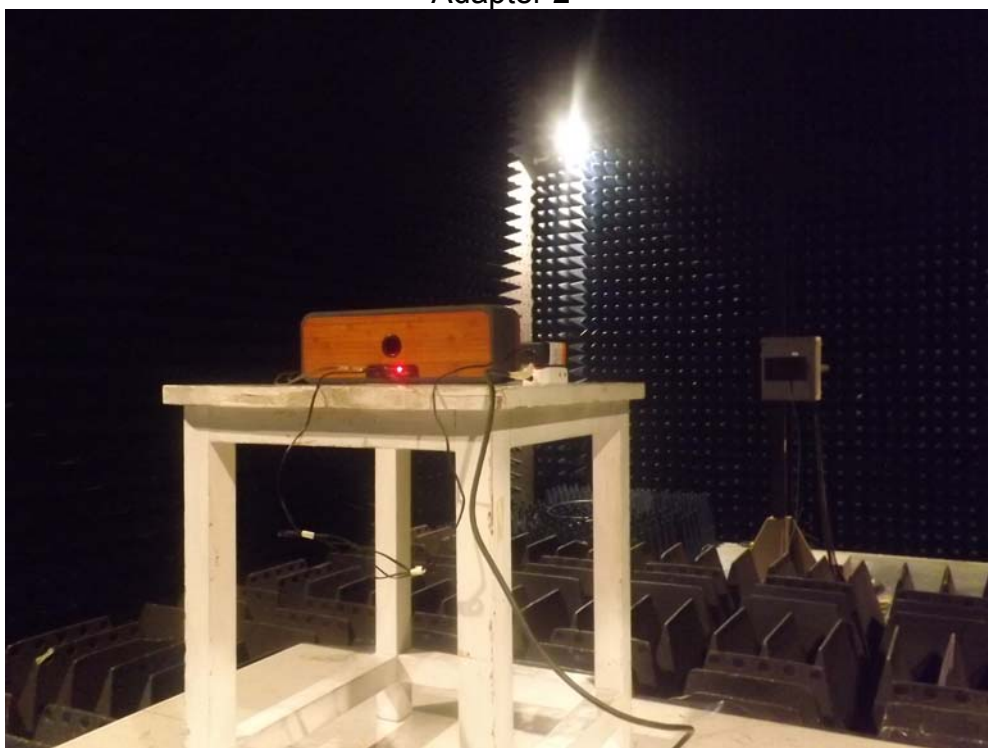

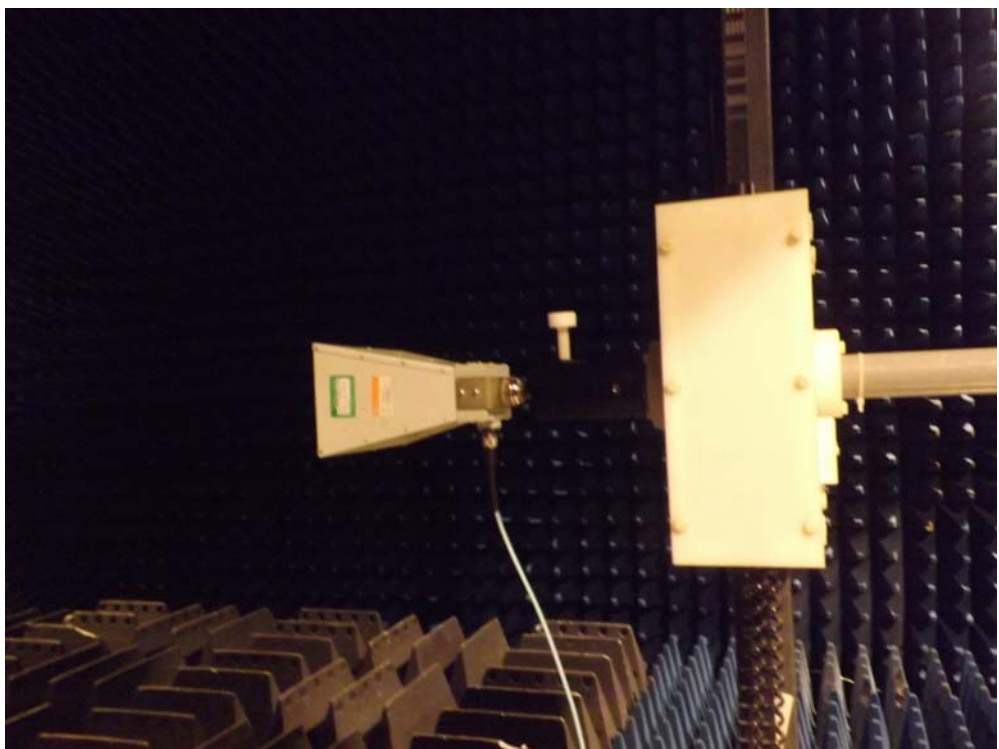

18 Photographs – Constructional Details

18.1 Model EM-JA006B– External Photos

For All with Adapter 1



For All with Adapter 2












Adapter 1



Adapter 2





18.2 Model EM-JA006B – Internal Photos

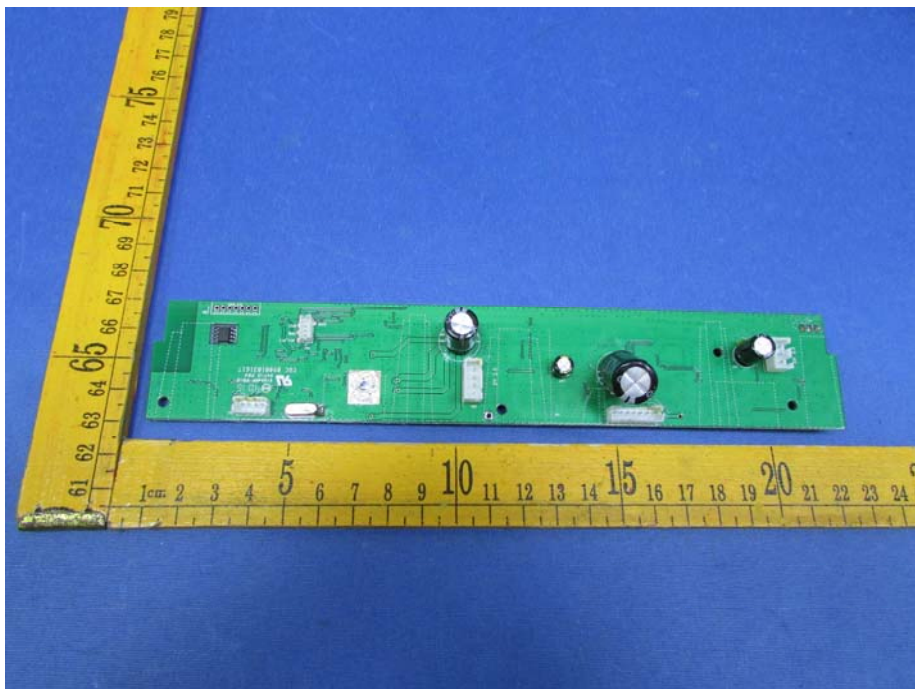


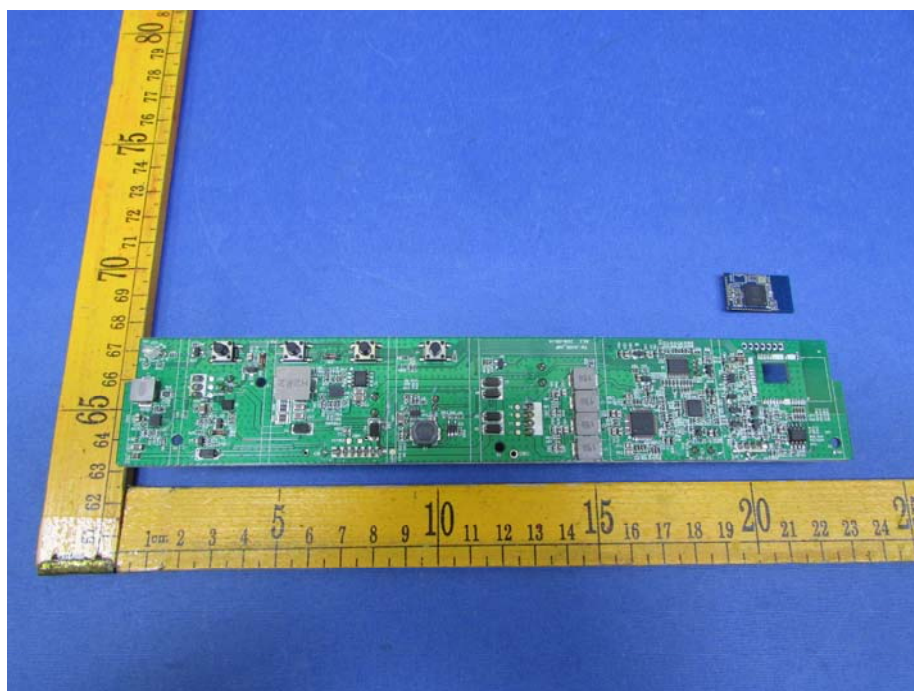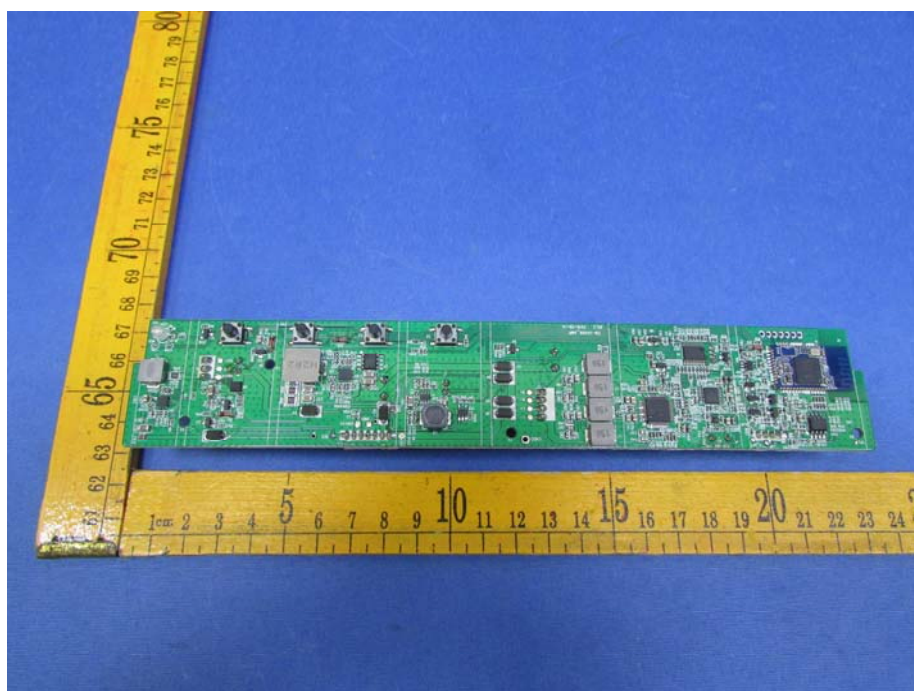

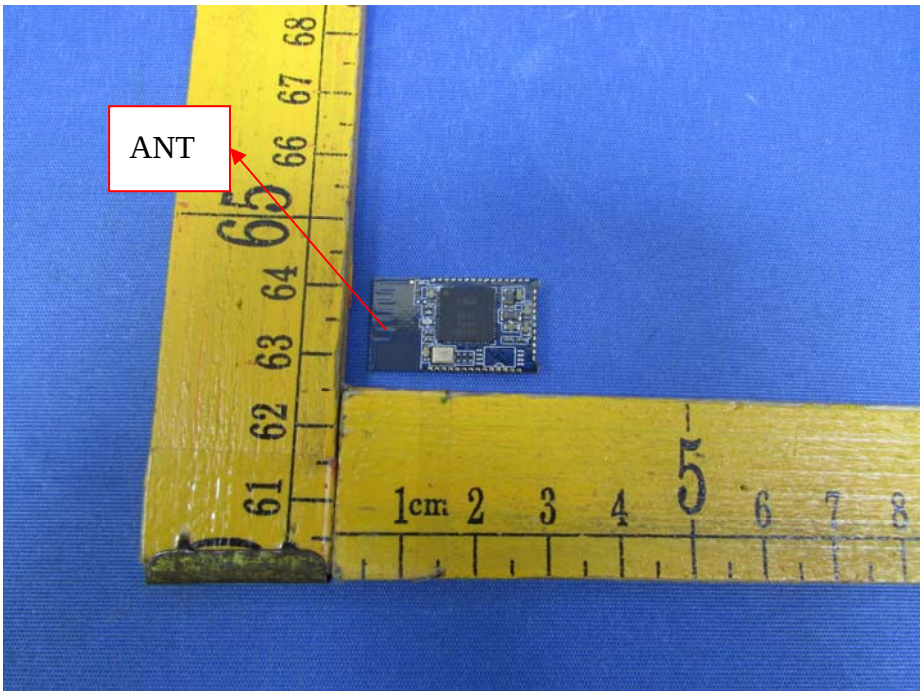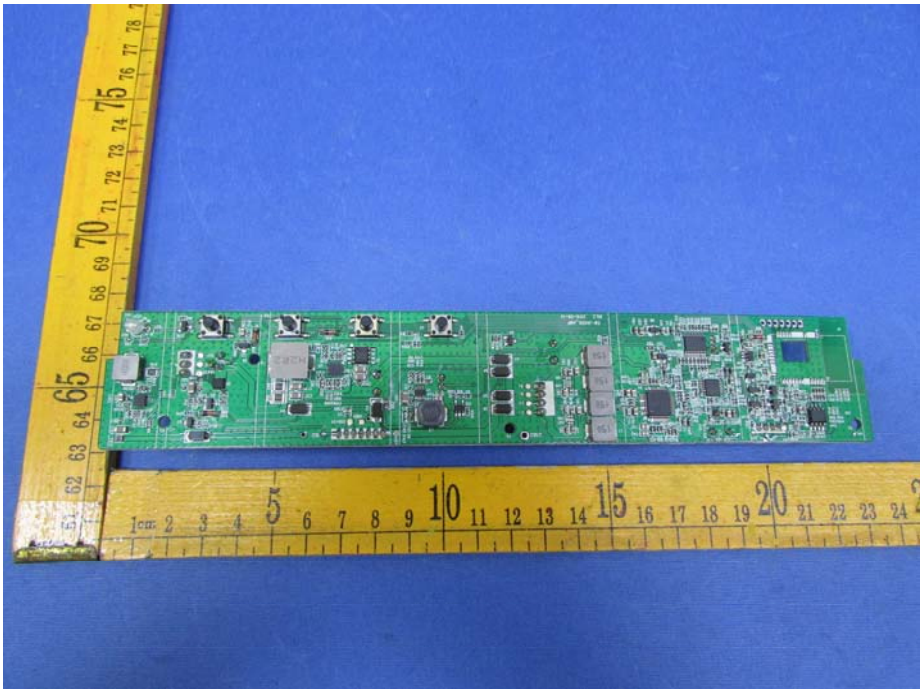

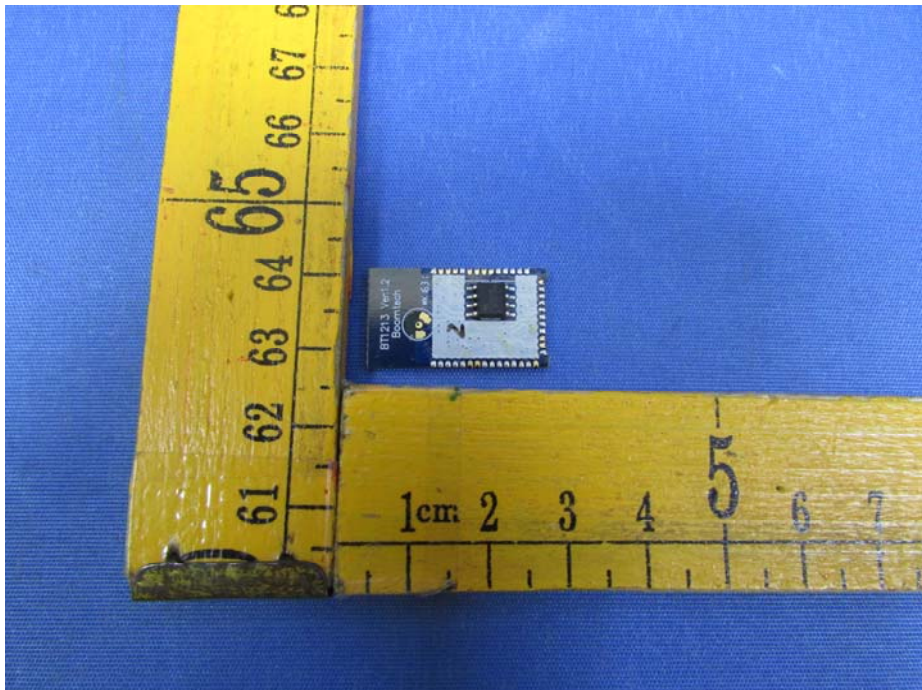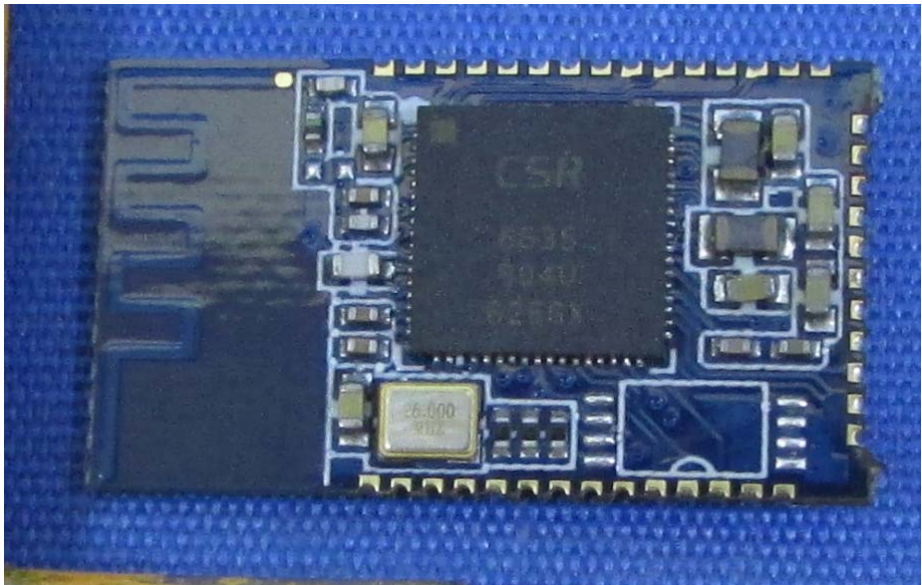



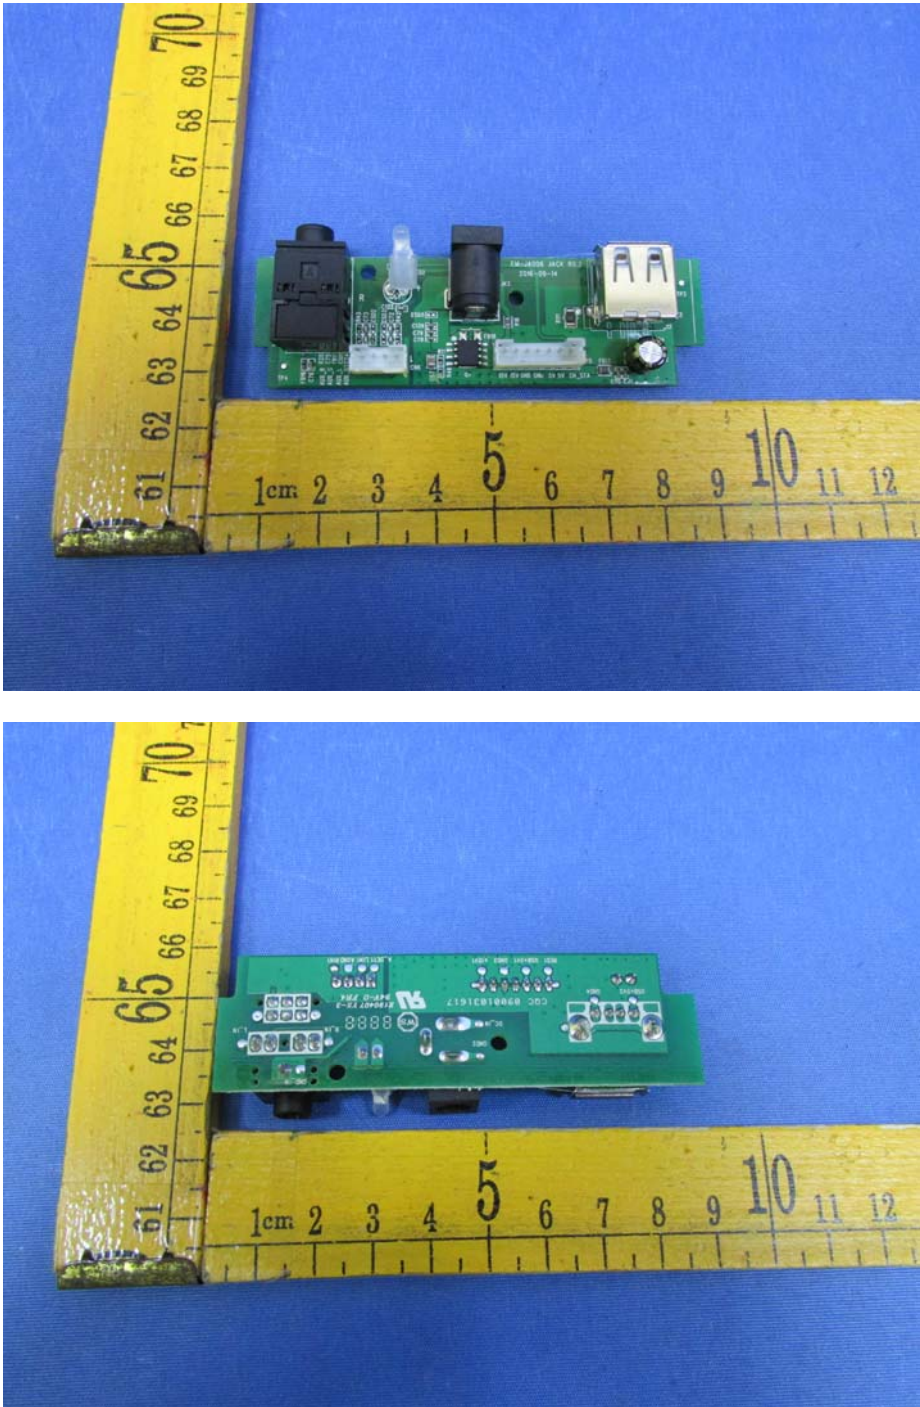

=====End of Report=====