

FCC PART 74 TEST REPORT

For

WIRELESS MICROPHONE TRANSMITTER

Model Number: VHF-30BP, BT-V20

Brand Name: GEMINI, JWL

FCC ID: PVDVHF-30BP

Report No.: AGC102008128SZ03E6

Date of Issue: Jan.14, 2009

Prepared For

Shenzhen JWL Electronics Co., Ltd.

C(3) Block, XiRong Industrial Estate, Gushu, XiXiang Avenue,

BaoAn District, Shenzhen, Guangdong, China

TEX: 86-755-2748 8680

FAX: 86-755-2960 3745

Prepared By

Shenzhen Attestation of Global Compliance Science & Technology Co., Ltd.

2F, No.2 Building, ChaXi SanWei Industrial Zone, GuShu Community,

XiXiang Street, Bao'An, ShenZhen, China

TEL: 86-755-2974 2358

FAX: 86-755-2600 8484

VERIFICATION OF COMPLIANCE

Applicant:	Shenzhen JWL Electronics Co., Ltd. C(3) Block, XiRong Industrial Estate, Gushu, XiXiang Avenue, BaoAn District, Shenzhen, Guangdong, China
Manufacturer:	Shenzhen JWL Electronics Co., Ltd. C(3) Block, XiRong Industrial Estate, Gushu, XiXiang Avenue, BaoAn District, Shenzhen, Guangdong, China
Product Description:	WIRELESS MICROPHONE TRANSMITTER
Brand Name:	GEMINI, JWL
Model Number:	VHF-30BP, BT-V20
Model Difference:	All the same except exterior appearance, model VHF-30PB is used brand GEMINI, Model BT-V20 is used brand JWL.
FCC ID:	PVDVHF-30BP
Report Number:	AGC102008128SZ03E6
Date of Test:	Jan.11, 2009~ Jan.13, 2009

We hereby certify that:

The report for the equipment was prepared by Shenzhen Attestation Of Global Compliance Science & Technology Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA 603; ANSI C 63.4:2003 and the sample tested as described in this report is in compliance with the FCC Rules Part 74 Subpart H. The test results of this report relate only to the tested sample identified in this report.

Prepared By Simple Cao
Simple Cao Jan.14, 2009

Checked By Tony Tian
Tony Tian Jan.14, 2009

Authorized By King Zhang
King Zhang Jan.14, 2009

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION.....	4
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 SPECIAL ACCESSORIE.....	5
1.6 EQUIPMENT MODIFICATIONS.....	5
1.7 DIFFERENCES BETWEEN MODELS.....	5
2. SYSTEM TEST CONFIGURATION.....	6
2.1 EUT CONFIGURATION.....	6
2.2 EUT EXERCISE.....	6
2.3 GENERAL TECHNICAL REQUIREMENTS.....	6
2.4 CONFIGURATION OF TESTED SYSTEM.....	6
3. SUMMARY OF TEST RESULTS.....	7
4. DESCRIPTION OF TEST MODES.....	7
5. MAXIMUM TRANSMITTER POWER.....	8
5.1 PROVISIONS APPLICABLE.....	8
5.2 MEASUREMENT PROCEDURE.....	8
5.3 TEST SETUP BLOCK DAIGRAM.....	9
5.4 MEASUREMENT EQUIPMENT USED.....	10
5.5 TEST RESULT.....	10
6. MODULATION CHARACTERISTICS.....	11
6.1 PROVISIONS APPLICABLE.....	11
6.2 MEASUREMENT METHOD.....	11
6.2.1 MODULATION LIMIT.....	11
6.2.2 AUDIO FREQUENCY RESPONSE.....	11
6.3 MEASUREMENT INSTRUMENTS.....	11
6.4 TEST RESULT.....	12
7. FREQUENCY TOLERANCE.....	21
7.1 PROVISIONS APPLICABLE.....	21
7.2 MEASUREMENT PROCEDURE.....	21
7.2.1 FREQUENCY STABILITY VERSUS ENVIRONMENTAL TEMPERATURE.....	21
7.2.2 FREQUENCY STABILITY VERSUS INPUT VOLTAGE.....	21
7.3 TEST SETUP BLOCK DIAGRAM.....	22
7.4 TEST EQUIPMENT USED.....	22
7.5 TEST RESULT.....	22
8. EMISSION BANDWIDTH.....	25
8.1 PROVISIONS APPLICABLE.....	25
8.2 MEASUREMENT PROCEDURE.....	25
8.3 TEST SETUP BLOCK DIAGRAM.....	25
8.4 MEASUREMENT EQUIPMENT USED.....	25
8.5 TEST RESULT.....	25
9. UNWANTED RADIATION.....	28
9.1 PROVISIONS APPLICABLE.....	28
9.2 MEASUREMENT PROCEDURE.....	28

9.3 TEST SETUP BLOCK DIAGRAM29

9.4 MEASUREMENT EQUIPMENT USED31

9.5 TEST RESULTS.....31

APPENDIX I34

PHOTOGRAPHS OF TEST SETUP34

APPENDIX II36

EXTERNAL PHOTOGRAPHS OF EUT36

APPENDIX III40

EXTERNAL PHOTOGRAPHS OF EUT40

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

The EUT is a WIRELESS MICROPHONE TRANSMITTER designed as Low Power Auxiliary Stations for transmitting voice only. It is designed by way of utilizing the FM modulation achieves the system operating.

A major technical description of EUT is described as following:

Communication Type	Voice / Tone only
Modulation	FM
Emission Type	F3E
Emission Designator	121K8F3E (2M+2DK, M=12, D=48.91, K=1, Necessary Bandwidth = 121.82 KHz)
Emission Bandwidth	187.79 KHz
Peak Frequency Deviation	48.91KHz
Audio Frequency Deviation	12 KHz
Maximum Output Power	2.88 dBm
Output Power Modification	Fixed can't be changed
Antenna Designation	Integral
Power Supply	DC 9V
Battery Endpoint	DC 7.2V
Operation Frequency Range and Channel	Frequency Range: 174 MHz-216 MHz
	Channel: Top Channel:215.6 MHz, Middle Channel: 204.6 MHz, Bottom Channel: 174.1 MHz
Frequency Tolerance	0.00193%

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: PVDVHF-30BP filing to comply with the FCC Part 74, Subpart H Rules.

1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI TIA/EIA 603 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

1.4 TEST FACILITY

The test site used to collect the radiated data is located on the address of World Standardization Certification & Testing Co., Ltd.

The test site is 3m anechoic chamber and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003.

1.5 SPECIAL ACCESSORIE

Not available for this EUT intended for grant.

1.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

1.7 DIFFERENCES BETWEEN MODELS

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 GENERAL TECHNICAL REQUIREMENTS

- a) Section 74.861 (e) - 1: Maximum transmitter power less than 50mW
- b) Section 74.861 (e) - 3: Peak Frequency Deviation less than ± 75 KHz
- c) Section 74.861 (e) - 4: Frequency Tolerance less than 0.005%
- d) Section 74.861 (e) - 5: Emission Bandwidth shall less than 200 KHz
- e). Section 74.861 (e) - 6: Unwanted radiation

According to Section 74.861 (e) – 6, the mean power of emission shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- 1). At least 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.
- 2). At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.
- 4). At least $43 + 10 \log_{10} (T)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250%

2.4 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	WIRELESS MICROPHONE TRANSMITTER	GEMINI, JWL	VHF-30BP	PVDVHF-30BP	N/A	EUT
--	--	--	--	--	--	--
--	--	--	--	--	--	--

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§74.861 (e)-1	Carrier Power	Compliant
§74.861 (e)-3	Frequency Deviation	Compliant
§74.861 (e)-4	Frequency Tolerance	Compliant
§74.861 (e)-5	Operating Bandwidth	Compliant
§74.861 (e)-6	Unwanted Radiation	Compliant

4. DESCRIPTION OF TEST MODES

The EUT (WIRELESS MICROPHONE TRANSMITTER) has been tested under normal operating condition. Three channels (the bottom channel, the middle channel and the top channel) have been chosen for testing. On each channel three axes have been evaluated for radiated emission.

5. MAXIMUM TRANSMITTER POWER

5.1 PROVISIONS APPLICABLE

According to FCC Part 74 Section 74.861(e) – 1: The power of the measured unmodulated carrier power at the output of the transmitter power amplifier may not exceed 50mW

5.2 MEASUREMENT PROCEDURE



- 1). On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- 2). The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- 3). The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- 4). The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- 5). The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- 6). The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- 7). The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- 8). The maximum signal level detected by the measuring receiver shall be noted.
- 9). Replace the antenna with a proper Antenna (substitution antenna).
- 10). The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- 11). The substitution antenna shall be connected to a calibrated signal generator.
- 12). If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- 13). The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- 14). The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- 15). The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- 16). The measurement shall be repeated with the test antenna and the substitution antenna oriented

for horizontal polarization.

- 17). The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for the gain of the substitution antenna if necessary.

5.3 TEST SETUP BLOCK DAIGRAM

TEST SETUP OF SUBSTITUTION METHOD

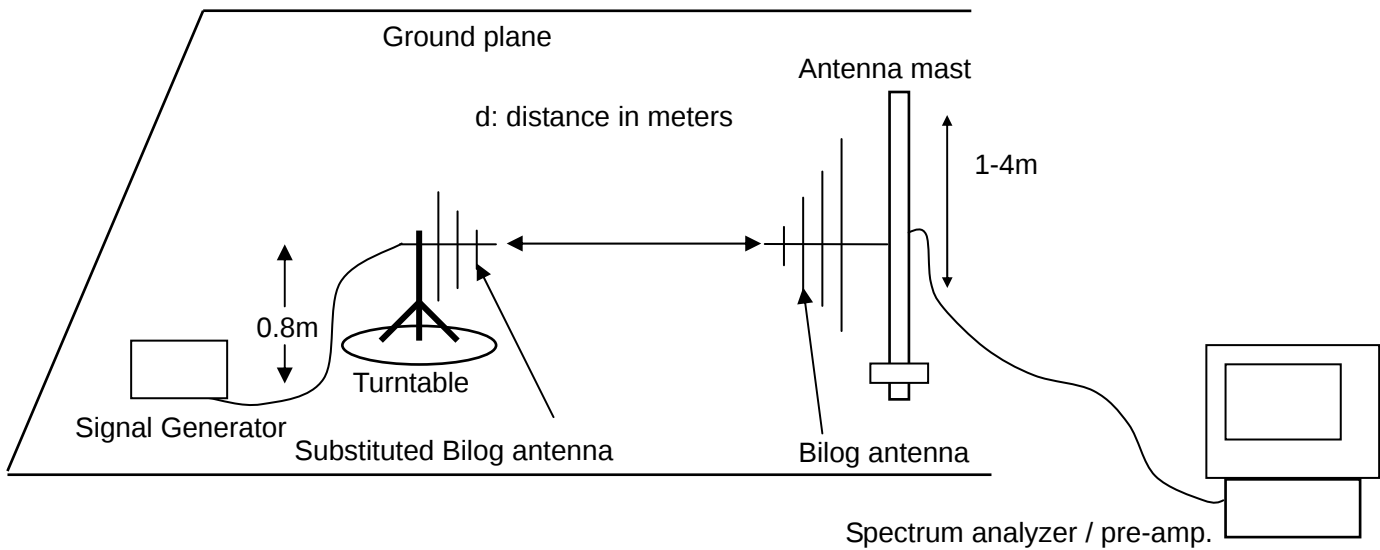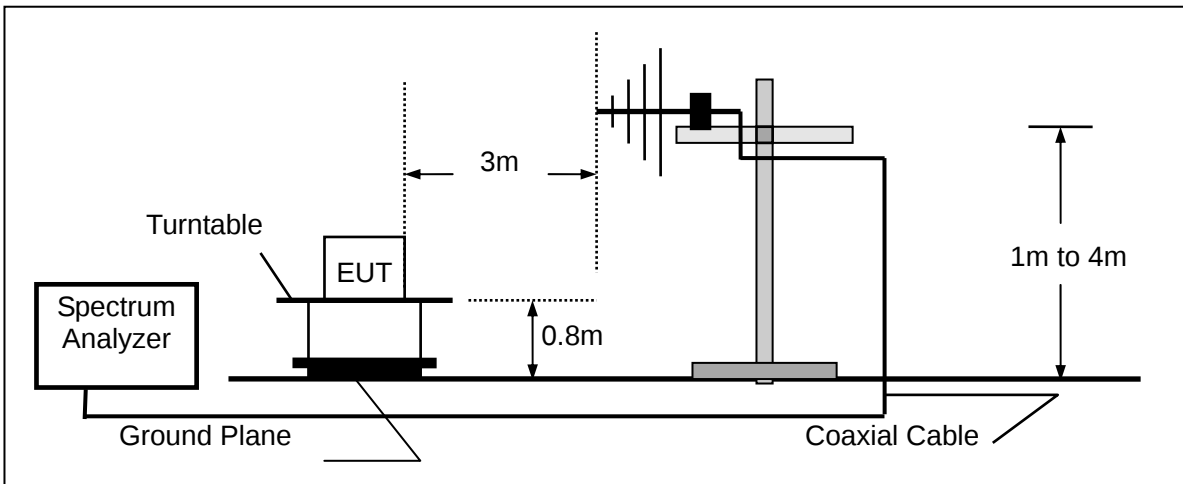

5.4 MEASUREMENT EQUIPMENT USED

EQUIPMENT TYPE	MFR	MODEL NO.	SERIAL NO.	LAST CAL.	CAL DUE.
EMI Test Receiver	R&S	ESCS30	100307	07/13/2008	07/12/2009
Pre-Amplifier	HP	8447D	2944A07999	07/13/2008	07/12/2009
Bi-Log Antenna	EMCO	3142	9910-1436	07/13/2008	07/12/2009
Bi-Log Antenna	SCHAFFNER	CBL6143	5082	07/13/2008	07/12/2009
CABLE	TIME MICROWAVE	LMR-400	N-TYPE04	07/13/2008	07/12/2009

5.5 TEST RESULT

Test Result @174.1 MHz

Freq. (MHz)	Antenna Polarity	Reading (dBm)	SG O/P (dBm)	Ant. Gain (dB)	Dipole Gain (dBi)	Cable (dB)	Corrected Power		Limit (mW)
							(dBm)	(mW)	
174.100	V	-23.48	-11.42	14.84	0	1.28	2.14	1.64	50
174.100	H	-26.18	-13.15	14.84	0	1.28	0.41	1.10	50

Test Result@204.6 MHz

Freq. (MHz)	Antenna Polarity	Reading (dBm)	SG O/P (dBm)	Ant. Gain (dB)	Dipole Gain (dBi)	Cable (dB)	Corrected Power		Limit (mW)
							(dBm)	(mW)	
204.600	V	-23.27	-10.79	15.01	0	1.34	2.88	1.94	50
204.600	H	-26.07	-13.21	15.01	0	1.34	0.46	1.11	50

Test Result@215.6 MHz

Freq. (MHz)	Antenna Polarity	Reading (dBm)	SG O/P (dBm)	Ant. Gain (dB)	Dipole Gain (dBi)	Cable (dB)	Corrected Power		Limit (mW)
							(dBm)	(mW)	
215.600	V	-23.35	-11.43	15.24	0	1.41	2.4	1.74	50
215.600	H	-25.72	-13.09	15.24	0	1.41	0.74	1.19	50

6. MODULATION CHARACTERISTICS

6.1 PROVISIONS APPLICABLE

- a).According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.
- b). According to CFR 47 section 74.861(e)-3, any form of modulation may be used. A maximum deviation of ± 75 KHz is permitted when frequency modulation is employed.

6.2 MEASUREMENT METHOD

6.2.1 MODULATION LIMIT

- 1). Configure the EUT as shown in figure 6-1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from -20 to $+20$ dB. Record the frequency deviation obtained as a function of the input level.
- 2). Repeat step 1 with input frequency changing to 300, 1000, 3000, and 12000 Hz in sequence.

6.2.2 AUDIO FREQUENCY RESPONSE

- 1). Configure the EUT as shown in figure 6-1.
- 2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).
- 3). Vary the Audio frequency from 100 Hz to 30 KHz and record the frequency deviation.
- 4). Audio Frequency Response = $20\log_{10}$ (Deviation of test frequency/Deviation of 1 KHz reference).

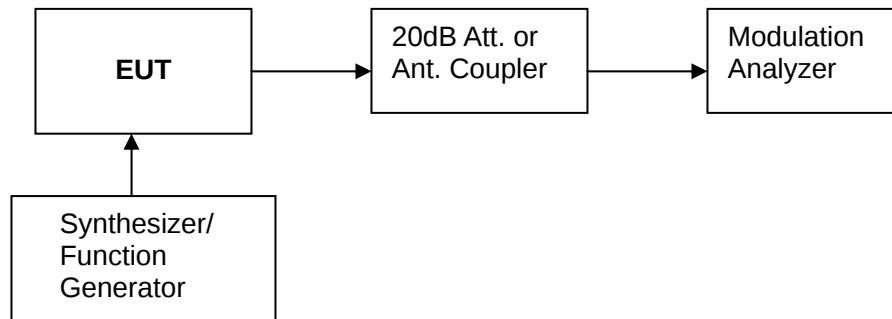


Figure 6-1: Modulation Characteristic Measurement Configuration


6.3 MEASUREMENT INSTRUMENTS

EQUIPMENT TYPE	MFR	MODEL NUMBER	LAST CAL.	CAL DUE.
Audio Signal Generator	HP	3325A	07/13/2008	07/12/2009
Modulation Analyzer	HP	8920B	07/13/2008	07/12/2009
Attenuator	MINI CIRCUITS	MCL BW-S20W2	07/13/2008	07/12/2009

6.4 TEST RESULT


a). Modulation Limit:

Test Result @ 174.1 MHz				
Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (KHz)	Peak Freq. Deviation At 1000 Hz (KHz)	Peak Freq. Deviation At 3000 Hz (KHz)	Peak Freq. Deviation At 12000 Hz (KHz)
-20	18.37	25.47	26.17	27.43
-15	29.09	32.83	33.64	34.72
-10	33.17	35.57	38.72	39.02
-5	35.44	40.16	42.53	43.16
0	36.09	44.52	44.83	45.52
+5	37.14	46.07	45.73	46.86
+10	37.63	46.37	48.24	48.43
+15	37.82	47.45	48.37	48.56
+20	38.22	48.11	48.52	48.75

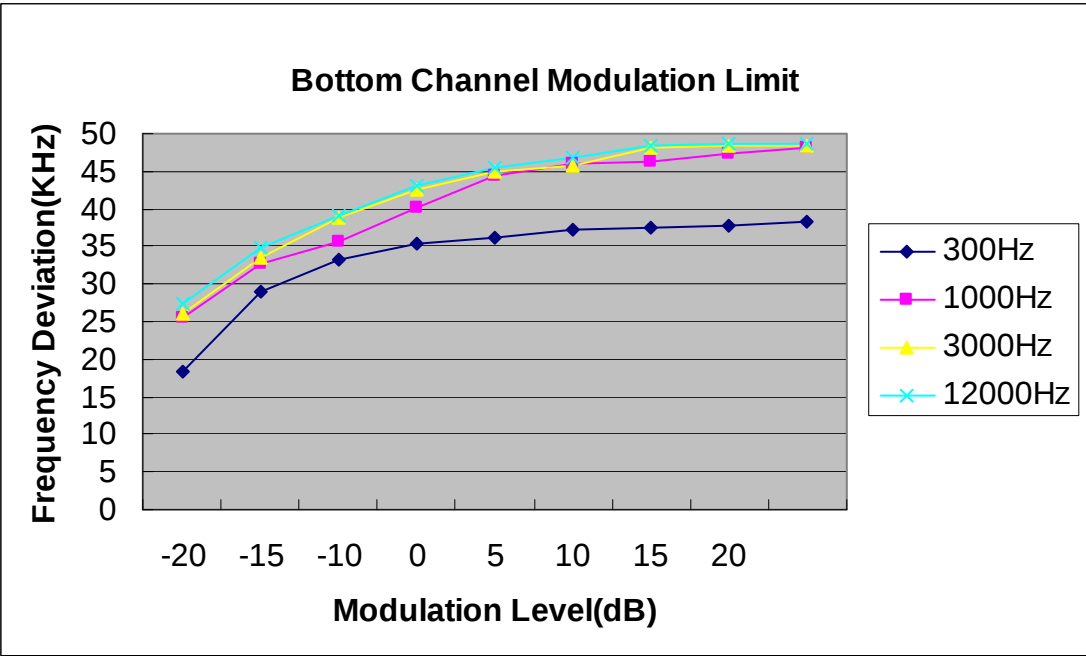


Test Result @ 204.6 MHz

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (KHz)	Peak Freq. Deviation At 1000 Hz (KHz)	Peak Freq. Deviation At 3000 Hz (KHz)	Peak Freq. Deviation At 12000 Hz (KHz)
-20	17.65	25.82	26.33	27.04
-15	30.26	31.74	32.18	33.28
-10	33.17	34.92	36.09	37.82
-5	35.46	40.32	41.18	42.17
0	36.29	44.38	45.73	46.22
+5	37.31	45.54	46.49	47.05
+10	37.53	46.51	47.11	48.33
+15	38.09	47.28	48.31	48.72
+20	38.27	48.09	48.44	48.91

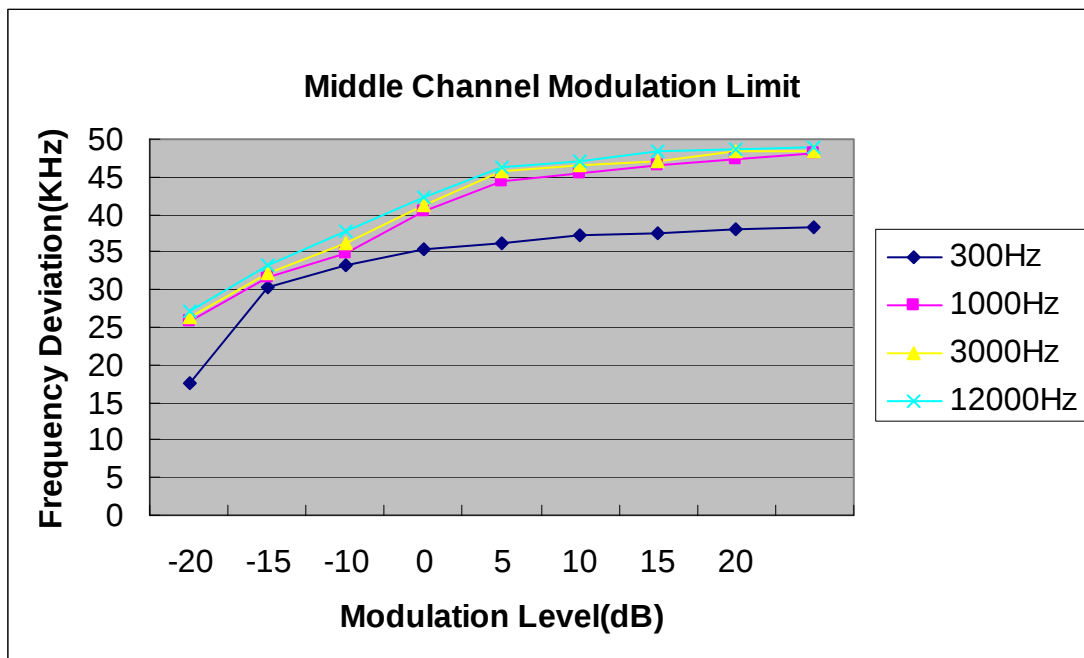

Test Result @ 215.6 MHz

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (KHz)	Peak Freq. Deviation At 1000 Hz (KHz)	Peak Freq. Deviation At 3000 Hz (KHz)	Peak Freq. Deviation At 12000 Hz (KHz)
-20	18.21	24.32	25.31	26.03
-15	29.03	30.17	32.29	34.27
-10	32.17	34.36	35.59	36.83
-5	35.28	36.39	40.93	43.41
0	36.48	45.07	45.27	46.15
+5	37.21	45.36	46.12	47.29
+10	37.87	46.29	47.33	47.55
+15	38.26	47.12	47.59	48.09
+20	38.47	47.37	48.17	48.59

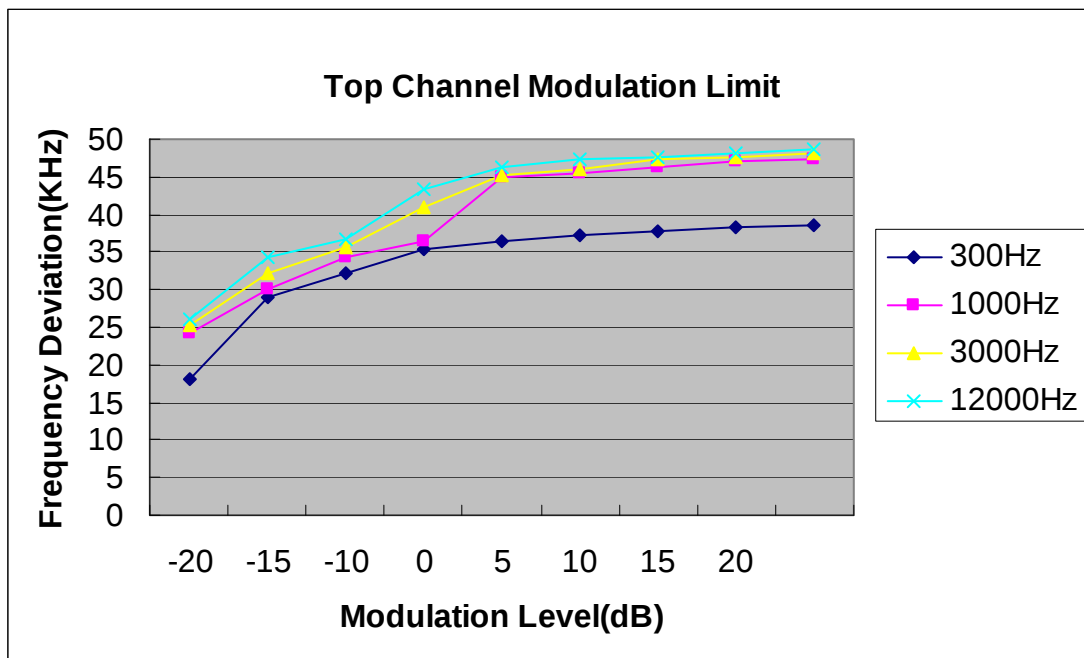


b). Audio Frequency Response:

Test Result @ 174.1 MHz

Frequency (Hz)	Deviation (KHz)
100	8.79
200	9.73
300	10.56
400	11.36
500	12.54
600	13.18
700	13.72
800	14.09
900	14.65
1000	15.13
1200	15.36
1400	15.52
1600	15.68
1800	16.07
2000	16.25
2400	16.47
2800	16.66
3200	16.89
3600	17.11
4000	17.22
4500	17.47
5000	17.59
5500	17.74
6000	17.91
6500	18.15
7000	18.26
8000	18.39
9000	18.47
10000	18.58
12000	18.74
14000	17.37
16000	16.25
18000	14.38
20000	12.17
25000	10.03
30000	8.59


Audio Frequency Response @174.1 MHz

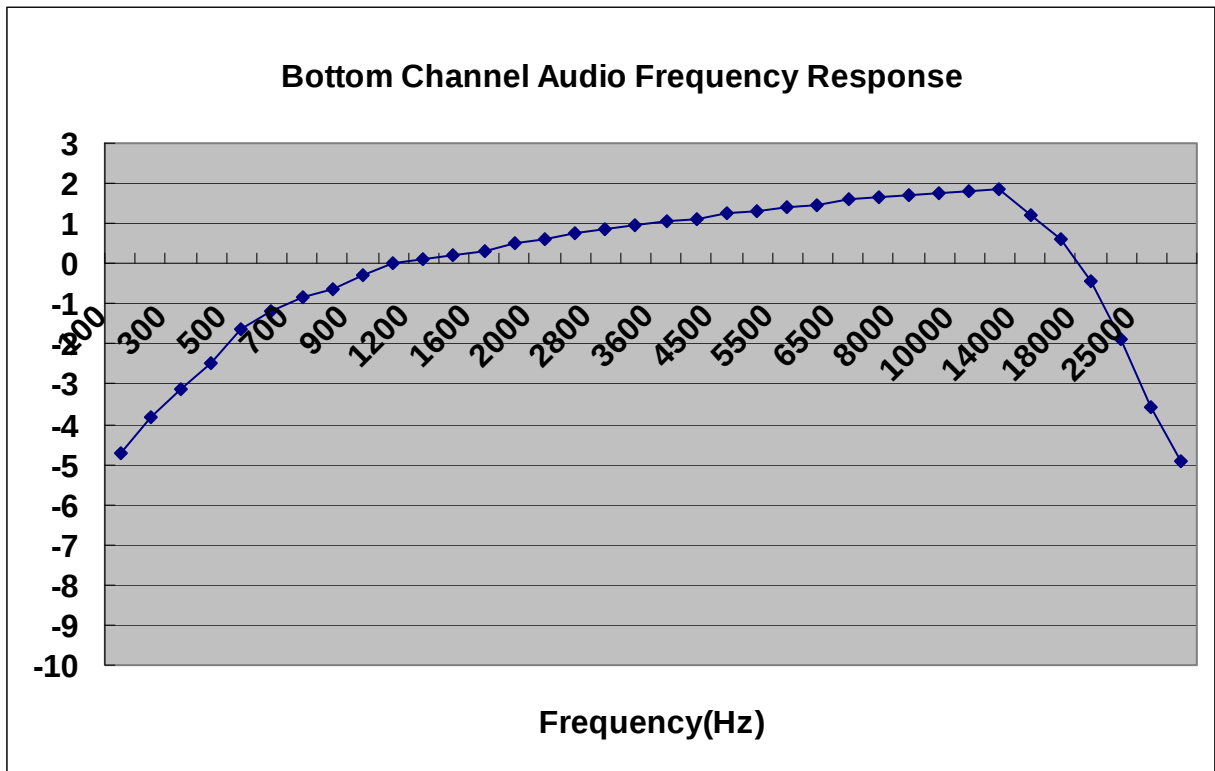

Test Result @ 204.6 MHz

Frequency (Hz)	Deviation (KHz)
100	8.17
200	9.47
300	10.27
400	11.36
500	12.71
600	13.19
700	13.48
800	14.19
900	14.72
1000	15.19
1200	15.47
1400	15.64
1600	15.78
1800	15.91
2000	16.17
2400	16.39
2800	16.52
3200	16.79
3600	17.05
4000	17.13
4500	17.34
5000	17.48
5500	17.62
6000	17.79
6500	17.92
7000	18.15
8000	18.28
9000	18.34
10000	18.49
12000	18.54
14000	17.21
16000	16.09
18000	14.26
20000	12.14
25000	10.38
30000	9.14


Audio Frequency Response @204.6 MHz

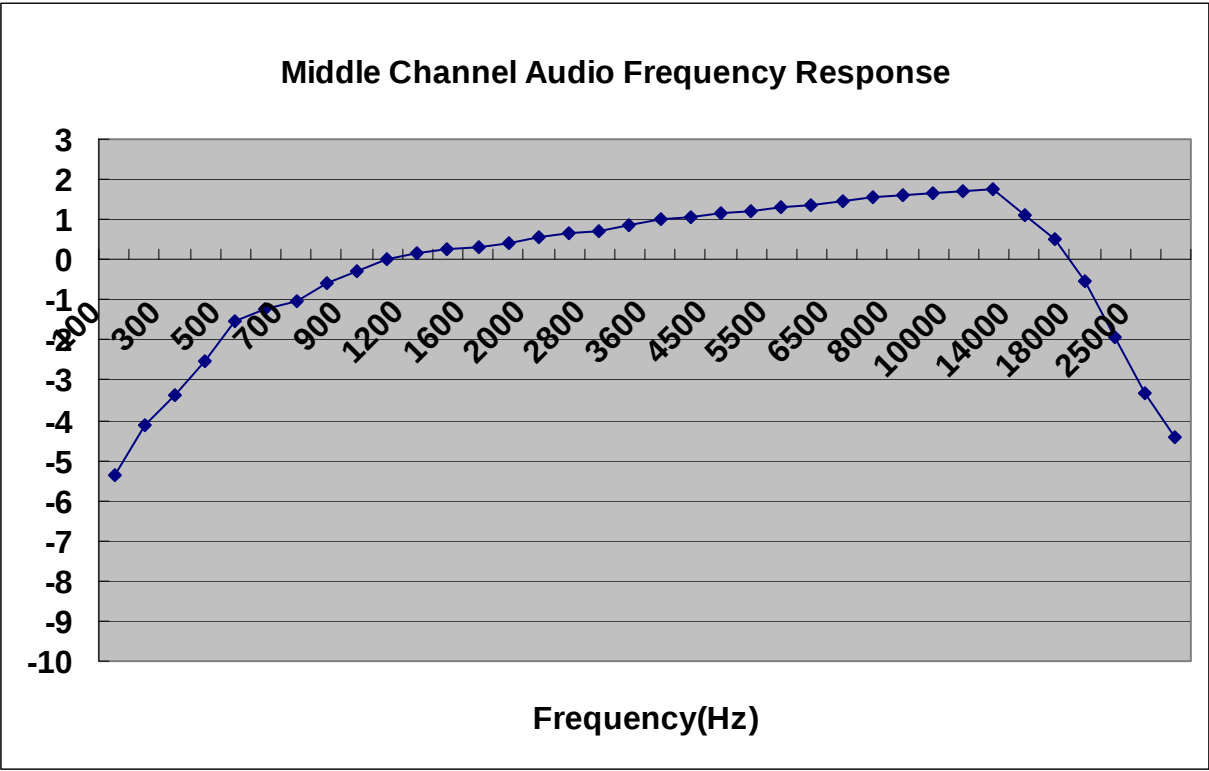

Test Result @ 215.6 MHz

Frequency (Hz)	Deviation (KHz)
100	8.79
200	9.37
300	10.57
400	11.47
500	12.36
600	13.52
700	13.84
800	14.21
900	14.83
1000	15.25
1200	15.47
1400	15.53
1600	15.71
1800	15.92
2000	16.07
2400	16.42
2800	16.64
3200	16.89
3600	17.12
4000	17.27
4500	17.53
5000	17.74
5500	17.79
6000	17.87
6500	18.12
7000	18.23
8000	18.39
9000	18.51
10000	18.62
12000	18.79
14000	17.16
16000	16.24
18000	14.36
20000	12.26
25000	10.42
30000	9.28

Audio Frequency Response@215.6 MHz

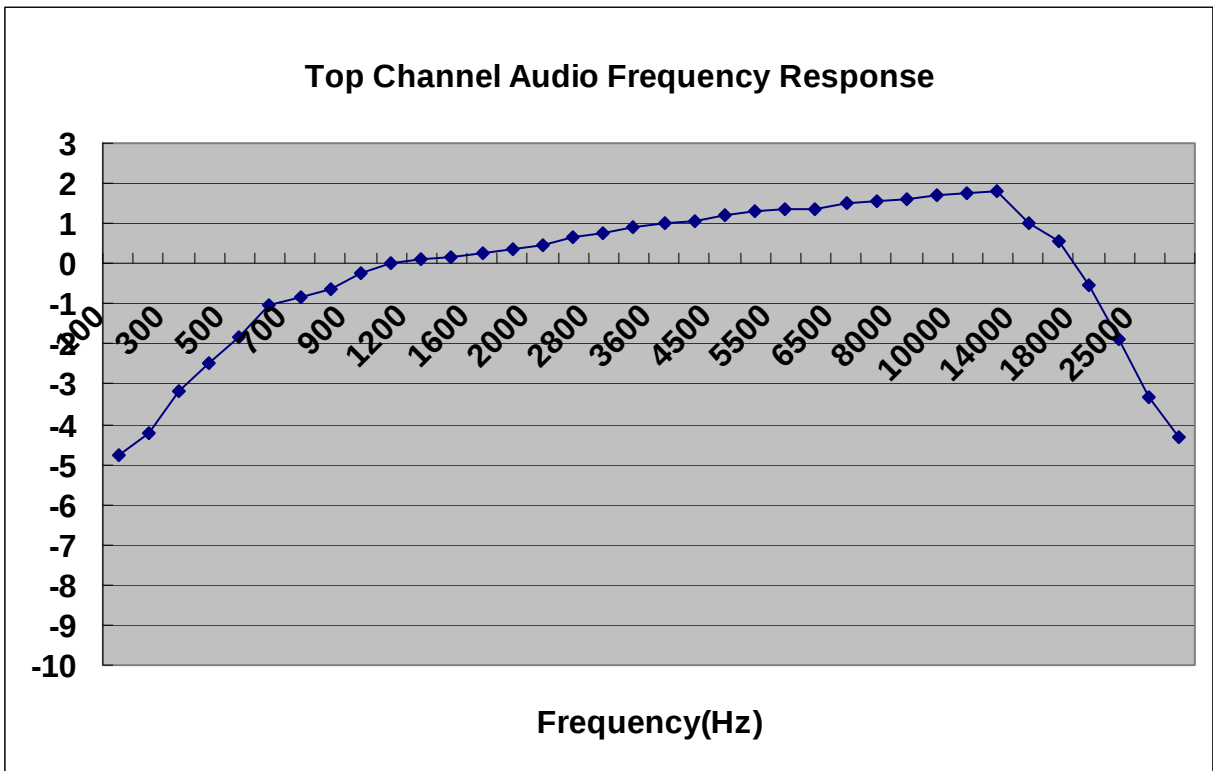

7. FREQUENCY TOLERANCE

7.1 PROVISIONS APPLICABLE

- a). According to FCC Part 2 Section 2.1055(a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to $+50^{\circ}\text{C}$ centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for hand carried battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.
- c). According to FCC Part 74 Section 74.861(e)-4, the frequency tolerance must be maintained within 0.005%.

7.2 MEASUREMENT PROCEDURE

7.2.1 FREQUENCY STABILITY VERSUS ENVIRONMENTAL TEMPERATURE

- 1) Setup the configuration per figure 7-1 for frequencies measurement inside an environment chamber, install new battery in the EUT.
- 2) Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz. Record this frequency as reference frequency.
- 3) Set the temperature of chamber to 50°C . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4) Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

7.2.2 FREQUENCY STABILITY VERSUS INPUT VOLTAGE

- 1) Setup the configuration per figure 7-1 for frequencies measured at temperature if it is within 15°C to 25°C . Otherwise, an environment chamber set for a temperature of 20°C shall be used. Install new battery in the EUT.
- 2) Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
- 3) For battery operated only device, supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

7.3 TEST SETUP BLOCK DIAGRAM

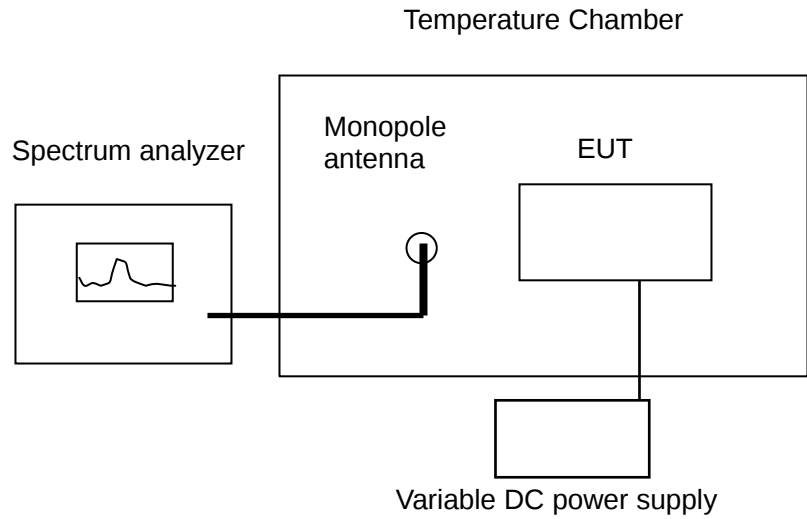


Figure 7-1

7.4 TEST EQUIPMENT USED

EQUIPMENT TYPE	MFR	MODEL NO.	SERIAL NO.	LAST CAL.	CAL DUE.
EMI Test Receiver	R&S	ESCS30	100307	07/13/2008	07/12/2009
Temperature Chamber	SHIHIN	BM50-CB	908	07/13/2008	07/12/2009
DC Power Supply	LONGWEI	WYK-605	N/A	07/13/2008	07/12/2009

7.5 TEST RESULT

a) Frequency stability versus input voltage (battery operation end point voltage is 7.2 V)

Wireless Microphone	Reference Frequency (MHz)	Frequency Measured at End Point Voltage	Frequency Error (%)	Limit (%)
Bottom channel	174.1	174.097876	0.00122	0.005
Middle Channel	204.6	204.597663	0.00114	0.005
Top channel	215.6	215.598854	0.00053	0.005

b) Frequency stability versus ambient temperature

Test Result @ Bottom Channel

Reference Frequency: 174.1 MHz		Limit: $\pm 0.005\%$	
Environment Temperature (°C)	Power Supply	Frequency deviation measured with time Elapsed (30 minutes)	
		(MHz)	%
50	DC 9V	174.097446	0.00147
40	DC 9V	174.097832	0.00125
30	DC 9V	174.097903	0.00120
20	DC 9V	174.098352	0.00095
10	DC 9V	174.098469	0.00088
0	DC 9V	174.098639	0.00078
-10	DC 9V	174.098753	0.00072
-20	DC 9V	174.098842	0.00067
-30	DC 9V	174.098911	0.00063

Test Result @ Middle Channel

Reference Frequency: 204.6 MHz			Limit: $\pm 0.005\%$
Environment Temperature (°C)	Power Supply	Frequency deviation measured with time Elapsed(30 minutes)	
		(MHz)	%
50	DC 9V	204.596739	0.00159
40	DC 9V	204.596847	0.00154
30	DC 9V	204.597234	0.00135
20	DC 9V	204.597765	0.00109
10	DC 9V	204.597975	0.00099
0	DC 9V	204.598355	0.00080
-10	DC 9V	204.598726	0.00062
-20	DC 9V	204.598903	0.00054
-30	DC 9V	204.599241	0.00037

Test Result @ Top Channel

Reference Frequency: 215.6 MHz			Limit: $\pm 0.005\%$
Environment Temperature (°C)	Power Supply	Frequency deviation measured with time Elapsed (30 minutes)	
		(MHz)	%
50	DC 9V	215.595832	0.00193
40	DC 9V	215.596142	0.00179
30	DC 9V	215.596504	0.00162
20	DC 9V	215.596914	0.00143
10	DC 9V	215.597332	0.00124
0	DC 9V	215.597925	0.00096
-10	DC 9V	215.598341	0.00077
-20	DC 9V	215.598735	0.00059
-30	DC 9V	215.598912	0.00050

8. EMISSION BANDWIDTH


8.1 PROVISIONS APPLICABLE

According to FCC Part 74 Section 74.861(e)-5: The operation bandwidth shall not exceed 200 KHz

8.2 MEASUREMENT PROCEDURE

- 1). The EUT was placed on a turntable which is 0.8m above ground plane.
- 2). Set EUT as normal operation
- 3). Set SPA Center Frequency = fundamental frequency, RBW=1 KHz, VBW=1 KHz, Span =200 KHz.
- 4). Set SPA Max hold. Mark peak, -26dB.

8.3 TEST SETUP BLOCK DIAGRAM

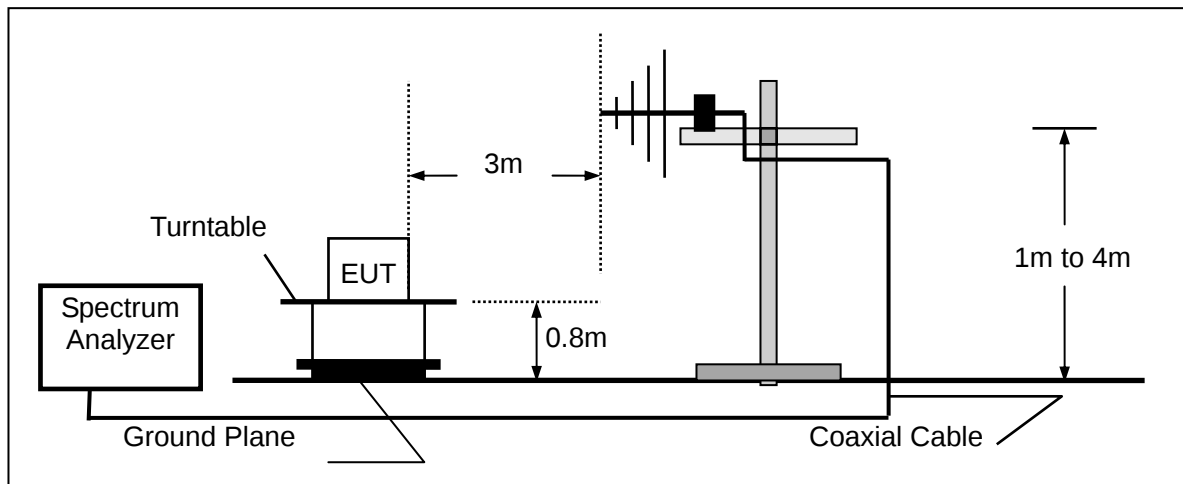


8.4 MEASUREMENT EQUIPMENT USED

EQUIPMENT TYPE	MFR	MODEL NO.	SERIAL NO.	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4440A	--	07/13/2008	07/12/2009
Pre-Amplifier	HP	8447D	2944A07999	07/13/2008	07/12/2009
Bi-Log Antenna	EMCO	3142	9910-1436	07/13/2008	07/12/2009
Bi-Log Antenna	SCHAFFNER	CBL6143	5082	07/13/2008	07/12/2009


8.5 TEST RESULT

26 dB Test Result			
Operation Channel	Test Data	Limit	Result
Bottom Channel	185.794 KHz	≤ 200 KHz	Pass
Middle Channel	186.794 KHz	≤ 200 KHz	Pass
Top Channel	187.792 KHz	≤ 200 KHz	Pass


Emission Bandwidth @ Bottom Channel

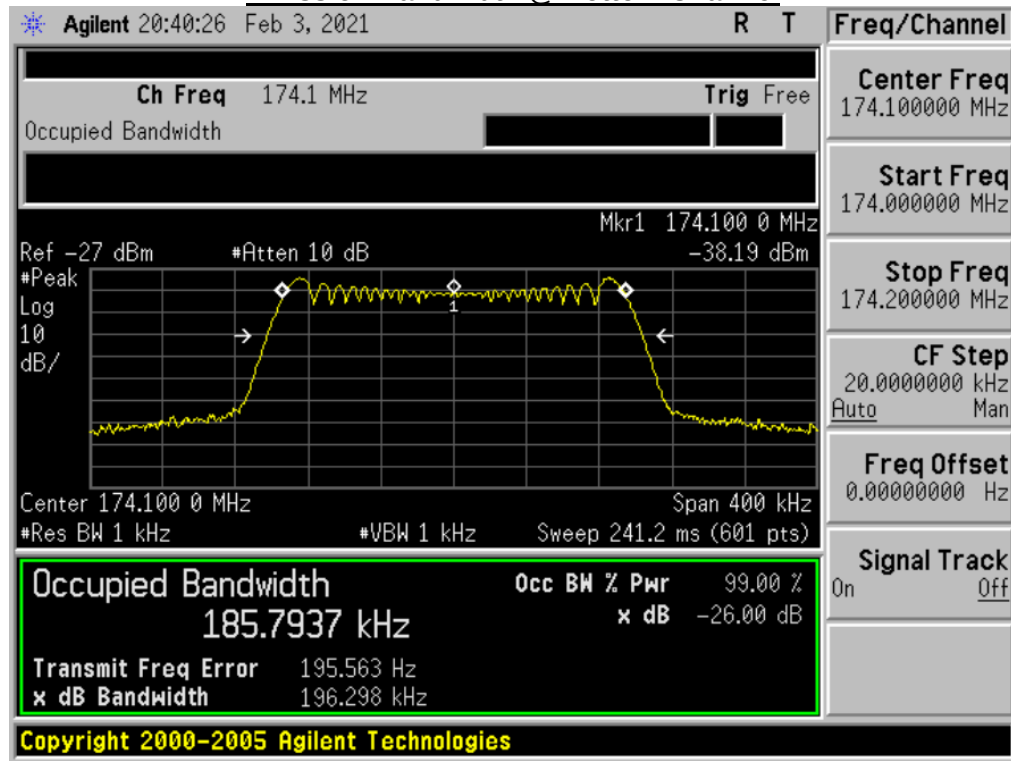

Emission Bandwidth@ Middle Channel

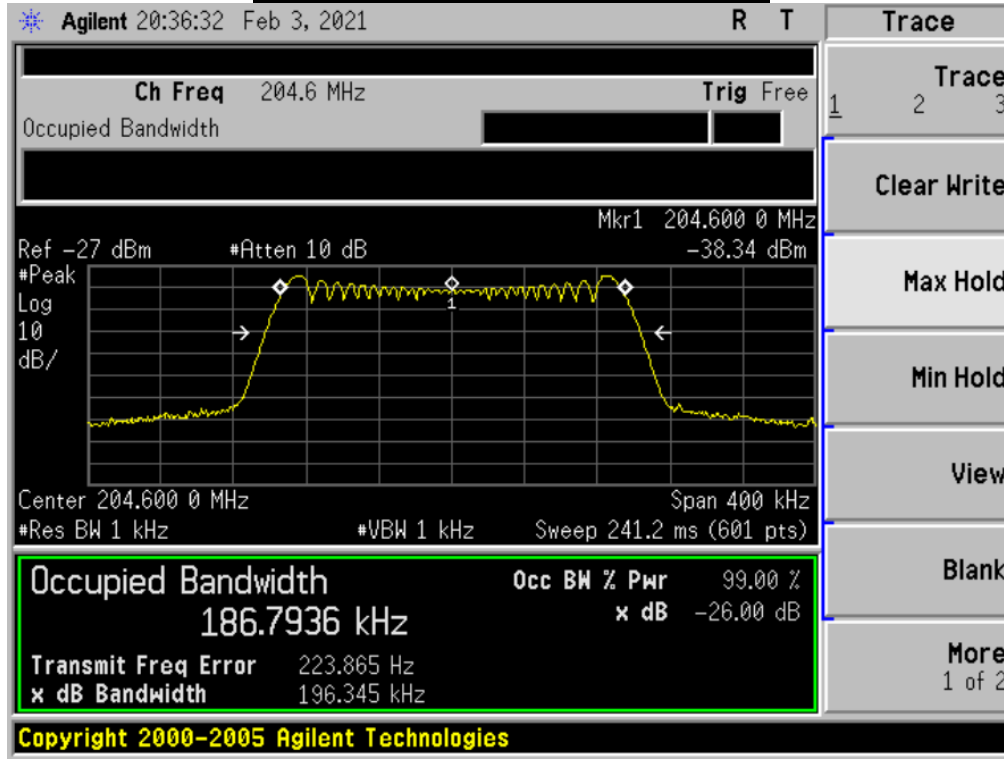

Emission Bandwidth @ Top Channel

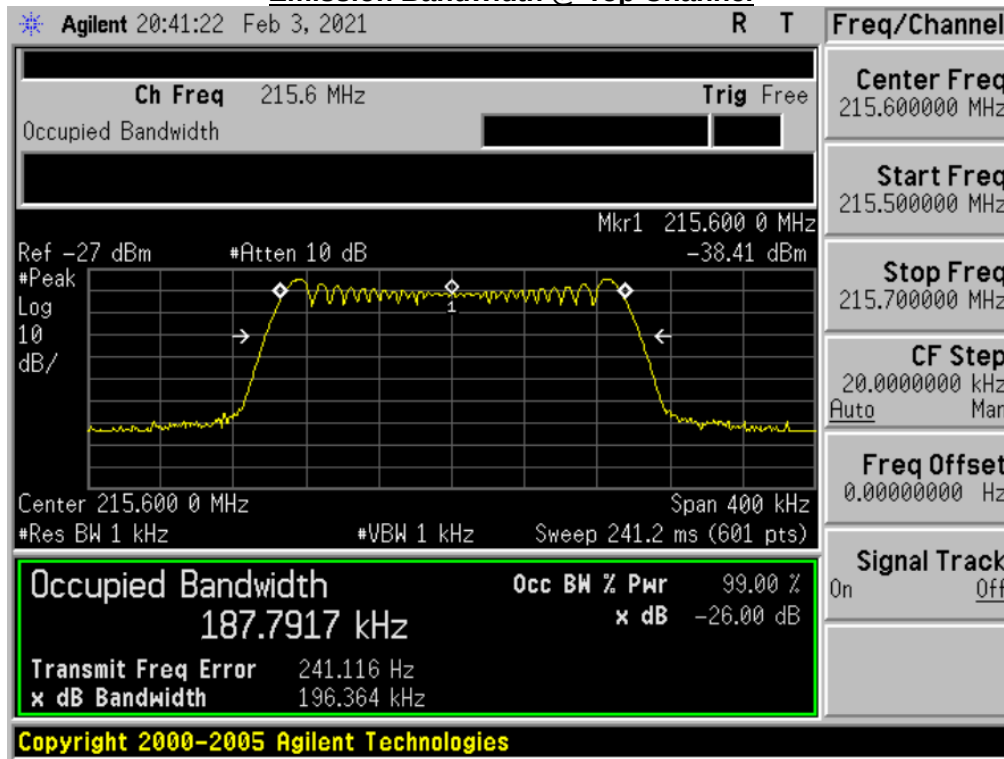

9. UNWANTED RADIATION

9.1 PROVISIONS APPLICABLE

According to Section 74.861(e)-6, the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:


- 1). On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB;
- 2). On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB;
- 3). On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least $43 + 10 \log_{10} (TP)$ dB

9.2 MEASUREMENT PROCEDURE

- 1). On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- 2). The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- 3). The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- 4). The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- 5). The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- 6). The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- 7). The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- 8). The maximum signal level detected by the measuring receiver shall be noted.
- 9). The measurement shall be repeated with the test antenna set to horizontal polarization.
- 10). Replace the antenna with a proper Antenna (substitution antenna).
- 11). The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- 12). The substitution antenna shall be connected to a calibrated signal generator.
- 13). If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- 14). The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.


- 15). The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- 16). The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- 17). The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

9.3 TEST SETUP BLOCK DIAGRAM

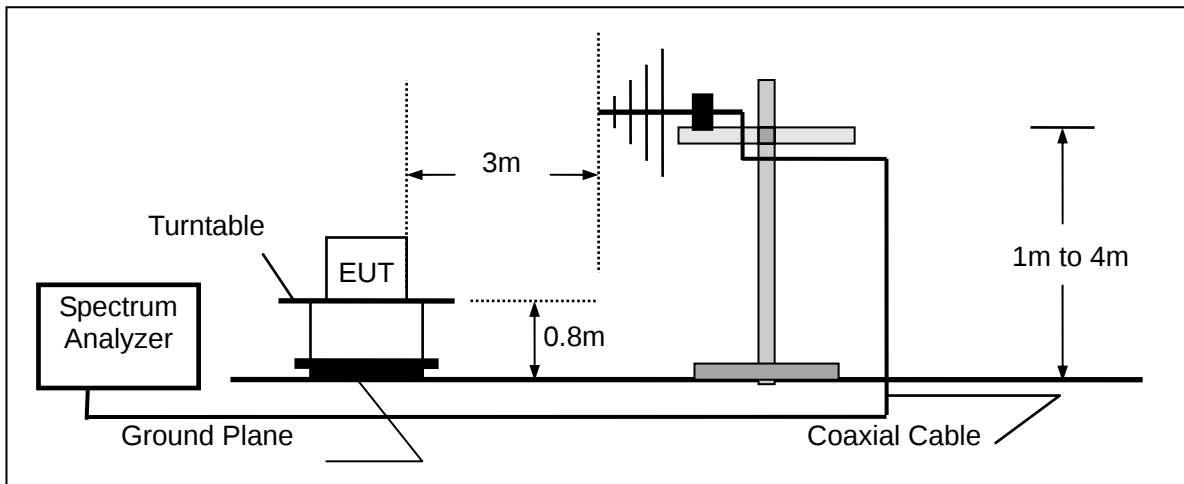


Substitution Method:

Radiation below 1GHz

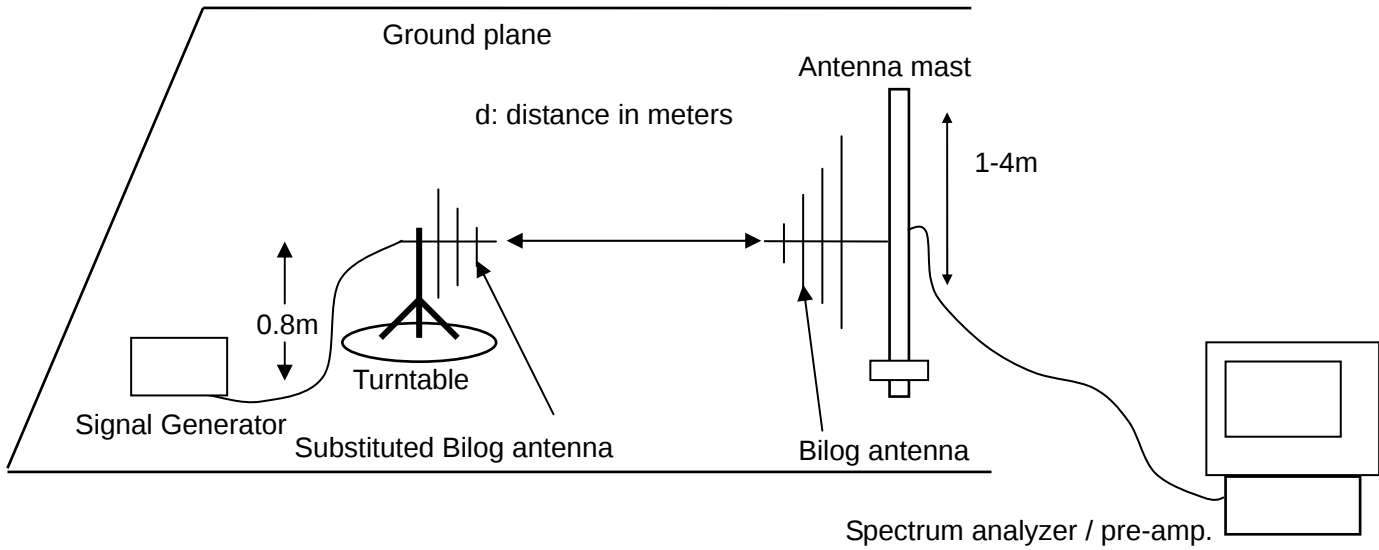

Radiation above 1GHz

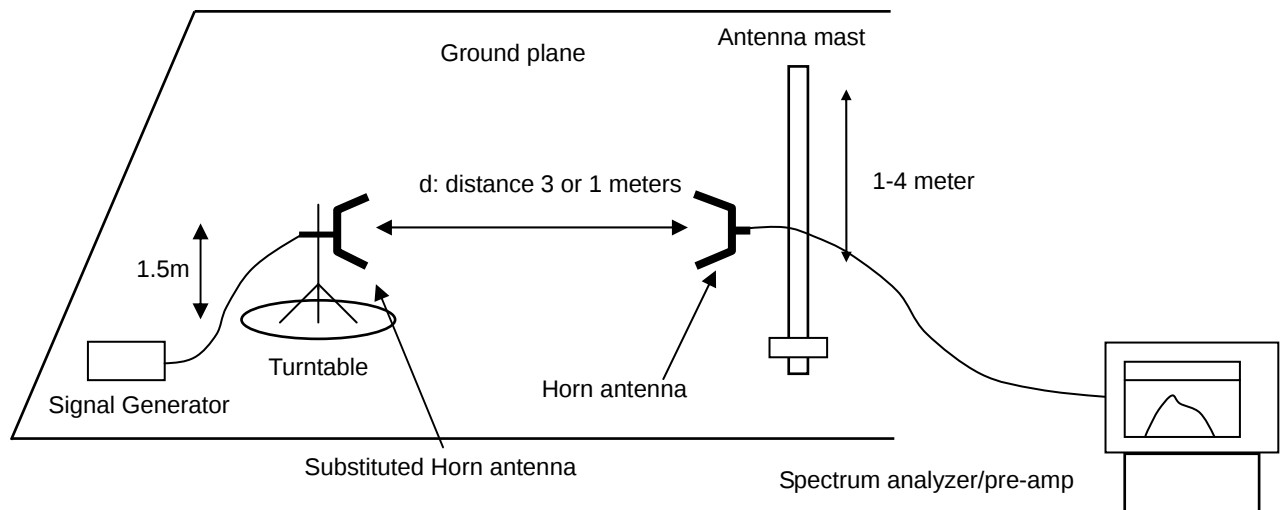

9.4 MEASUREMENT EQUIPMENT USED

EQUIPMENT TYPE	MFR	MODEL NO.	SERIAL NO.	LAST CAL.	CAL DUE.
EMI Test Receiver	R&S	ESCS30	100307	07/13/2008	07/12/2009
Pre-Amplifier	HP	8447D	2944A07999	07/13/2008	07/12/2009
Bi-Log Antenna	EMCO	3142	9910-1436	07/13/2008	07/12/2009
Bi-Log Antenna	SCHAFFNER	CBL6143	5082	07/13/2008	07/12/2009

9.5 TEST RESULTS

Calculation: Limit (dBm)= EL-43-10log10 (TP)

Notes: EL is the emission level of the Output Power expressed in dBm, in this application, the EL is 2.88 dBm.


Limit (dBm)=1.72-43-10log 10 (0.00194) = -13

Top Channel, Middle Channel & Bottom Channel


Frequency (MHz)	Reading Level (dBm)	Antenna Polarization	S.G. (dBm) (dBm)	Cabel Loss (dB)	Ant.Gain (dB)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
348.2	-66.87	H	-45.73	1.48	13.39	-33.82	-13	-20.82
348.2	-61.47	V	-40.03	1.48	13.39	-28.12	-13	-15.12
409.2	-67.19	H	-46.14	1.57	13.47	-34.24	-13	-21.24
409.2	-61.83	V	-40.23	1.57	13.47	-28.33	-13	-15.33
431.2	-67.27	H	-47.52	1.61	13.66	-35.47	-13	-22.47
431.2	-61.42	V	-42.53	1.61	13.66	-30.48	-13	-17.48
522.3	-81.92	H	-62.63	1.65	13.81	-50.47	-13	-37.47
522.3	-76.54	V	-60.81	1.65	13.81	-48.65	-13	-35.65
613.8	-82.19	H	-63.81	1.72	13.89	-51.64	-13	-38.64
613.8	-80.02	V	-60.36	1.72	13.89	-48.19	-13	-35.19
646.8	-83.25	H	-64.52	1.75	13.93	-52.34	-13	-39.34
646.8	-80.04	V	-62.14	1.75	13.93	-49.96	-13	-36.96
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Notes: -- means the output power of all the spurious frequency is at least 20dB down to the limit.


Emission Mask @ Bottom Channel

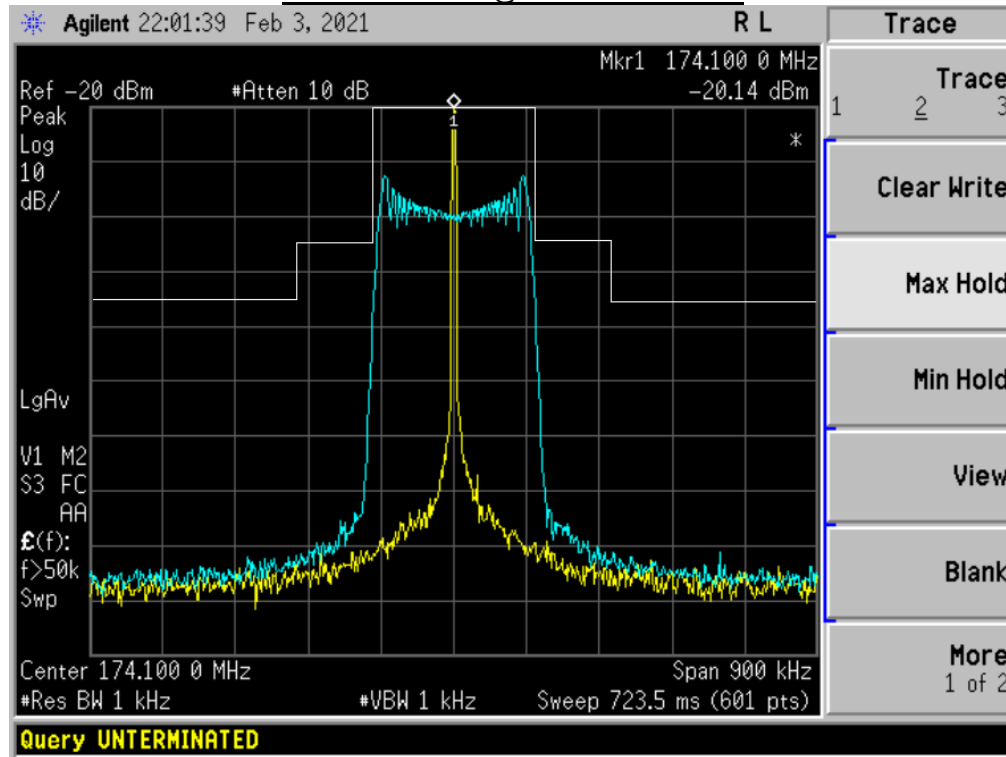

Emission Mask @ Middle Channel

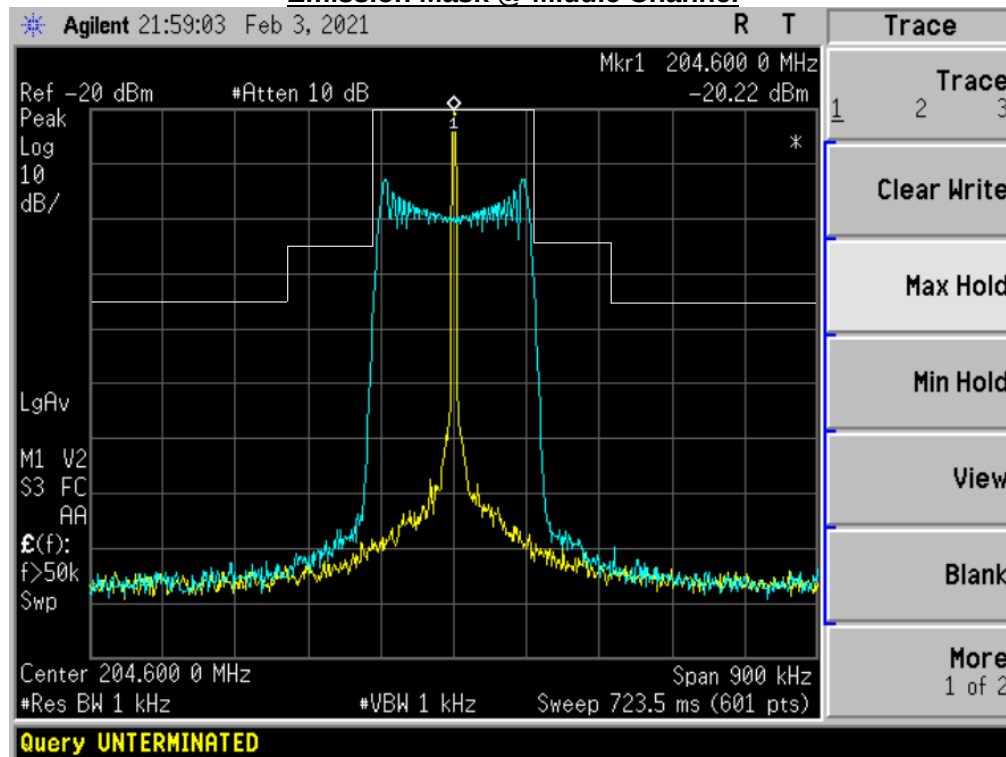

Emission Mask @ Top Channel

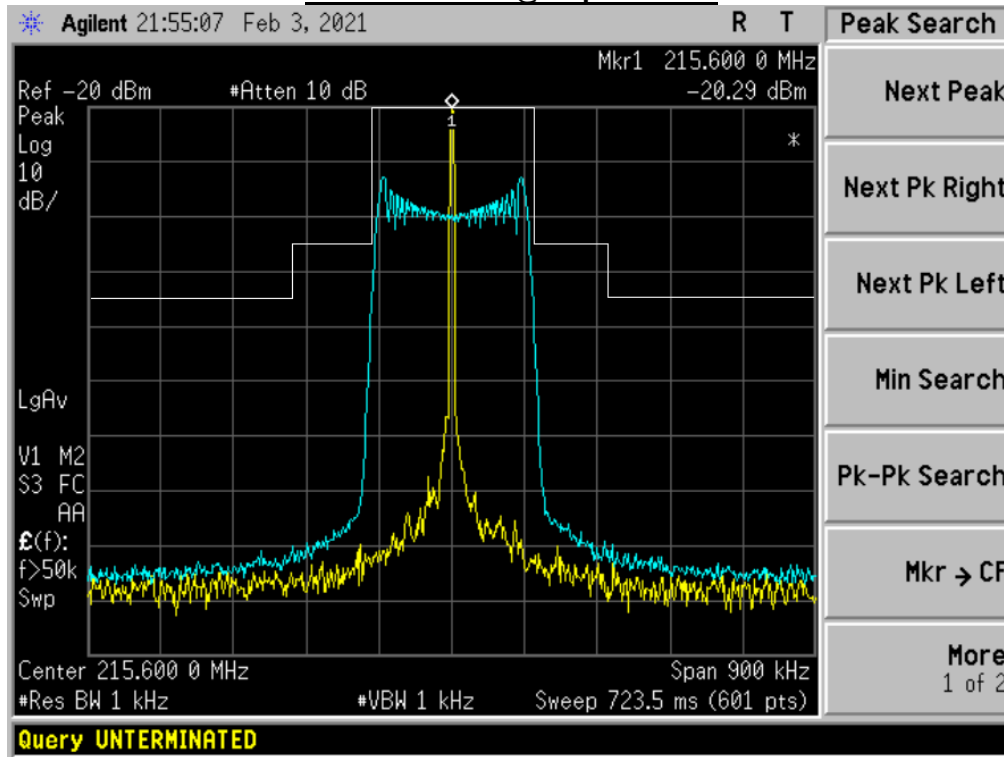

APPENDIX I

PHOTOGRAPHS OF TEST SETUP

RADIATED EMISSION TEST SETUP



APPENDIX II

EXTERNAL PHOTOGRAPHS OF EUT

FRONT VIEW OF MICROPHONE



BACK VIEW OF MICROPHONE



TOP VIEW OF MICROPHONE



BOTTOM VIEW OF MICROPHONE



LEFT VIEW OF EUT




RIGHT VIEW OF EUT




APPENDIX III

EXTERNAL PHOTOGRAPHS OF EUT

INTERNAL VIEW OF MICROPHONE-1

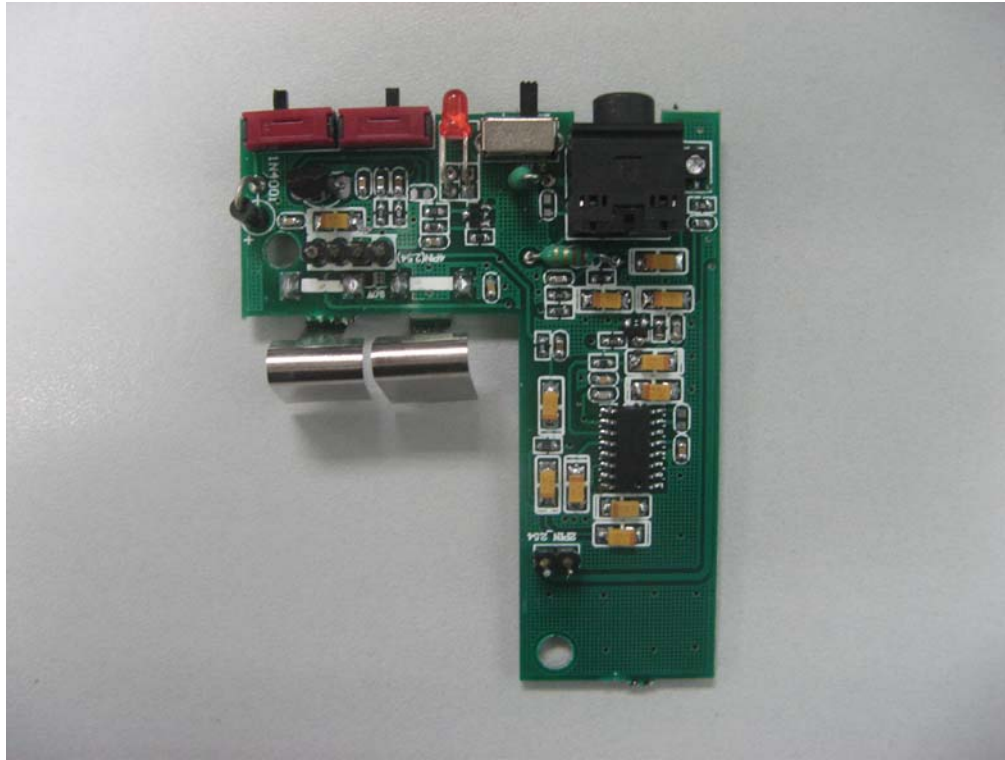

INTERNAL VIEW OF MICROPHONE-2

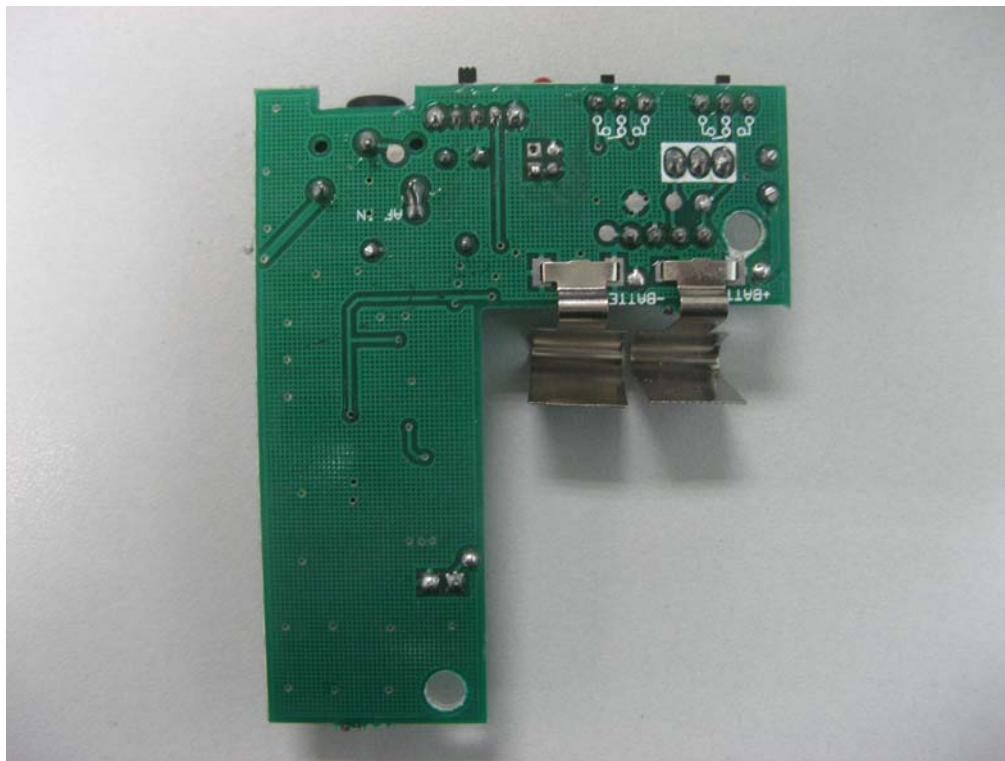

---END OF REPORT---