



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Motic China Group Co.,Ltd

Address: No.810 Fangshan Nan Road, XiangAn, Xiamen 361100, P.R. China

FCC ID: PVE-MOTICAMX6

Product Name: MoticamX6

Standard(s): 47 CFR Part 15, Subpart E(15.407)

ANSI C63.10-2020

KDB 789033 D02 General U-NII Test Procedures New
Rules v02r01

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: 2503Q19064E-RF-00B

Date Of Issue: 2025-05-29

Reviewed By: Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Title: Lab Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China

Tel: +86-769-83085888

www.ccttt.com.cn

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.1.1 General.....	6
1.1.2 Operation Frequency Detail	7
1.1.3 Antenna Information Detail▲	8
1.1.4 Accessory Information	9
1.2 DESCRIPTION OF TEST CONFIGURATION	9
1.2.1 EUT Operation Condition:.....	9
1.2.2 Support Equipment List and Details	12
1.2.3 Support Cable List and Details	12
1.2.4 Block Diagram of Test Setup.....	12
1.3 MEASUREMENT UNCERTAINTY	14
2. SUMMARY OF TEST RESULTS	15
3. REQUIREMENTS AND TEST PROCEDURES	16
3.1 AC LINE CONDUCTED EMISSIONS	16
3.1.1 Applicable Standard.....	16
3.1.2 EUT Setup.....	17
3.1.3 EMI Test Receiver Setup	17
3.1.4 Test Procedure	18
3.1.5 Corrected Amplitude & Margin Calculation.....	18
3.2 RADIATION SPURIOUS EMISSIONS	19
3.2.1 Applicable Standard.....	19
3.2.2 EUT Setup.....	20
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	21
3.2.4 Test Procedure	22
3.2.5 Corrected Amplitude & Margin Calculation.....	22
3.3 EMISSION BANDWIDTH.....	23
3.3.1 Applicable Standard.....	23
3.3.2 EUT Setup.....	23
3.3.3 Test Procedure	23
3.4 MAXIMUM CONDUCTED OUTPUT POWER.....	25
3.4.1 Applicable Standard.....	25
3.4.2 EUT Setup.....	25
3.4.3 Test Procedure	26
3.5 MAXIMUM POWER SPECTRAL DENSITY	27
3.5.1 Applicable Standard.....	27
3.5.2 EUT Setup.....	27
3.5.3 Test Procedure	28
3.6 DUTY CYCLE	29
3.6.1 EUT Setup.....	29
3.6.2 Test Procedure	29
3.7 ANTENNA REQUIREMENT.....	30
3.7.1 Applicable Standard.....	30
3.7.2 Judgment.....	30
4. Test DATA AND RESULTS	31

4.1 AC LINE CONDUCTED EMISSIONS	31
4.2 RADIATION SPURIOUS EMISSIONS	34
4.2.1 9 kHz – 1 GHz	34
4.2.2 1 GHz – 40 GHz	43
4.3 RF CONDUCTED DATA	322
5. EUT PHOTOGRAPHS	323
6. TEST SETUP PHOTOGRAPHS	324

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2503Q19064E-RF-00B	Original Report	2025-05-29

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

1.1.1 General

EUT Name:	MoticamX6
EUT Model:	MoticamX6
Operation Frequency:	Band 1: 5180-5240 MHz (802.11a/n ht20/ac vht20/ax hew20) 5190-5230 MHz (802.11n ht40/ac vht40/ax hew40) 5210 MHz (802.11ac vht80/ax hew80) Band 2: 5260-5320 MHz (802.11a/n ht20/ac vht20/ax hew20) 5270-5310 MHz (802.11n ht40/ac vht40/ax hew40) 5290 MHz (802.11ac vht80/ax hew80) Band 3: 5500-5720 MHz (802.11a/n ht20/ac vht20/ax hew20) 5510-5710 MHz (802.11n ht40/ac vht40/ax hew40) 5530-5690 MHz (802.11ac vht80/ax hew80) Band 4: 5745-5825 MHz (802.11a/n ht20/ac vht20/ax hew20) 5755-5795 MHz (802.11n ht40/ac vht40/ax hew40) 5775 MHz (802.11ac vht80/ax hew80)
Maximum Average Conducted Output Power:	19.87 dBm in 5150-5250 MHz Band 22.78 dBm in 5250-5350 MHz Band 19.51 dBm in 5470-5725 MHz Band 20.78 dBm in 5725-5850 MHz Band
Modulation Type:	802.11a/n/ac: OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM 802.11ax: OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Rated Input Voltage:	12Vdc from adapter
Sample Number:	RF: 2Y6Z-2, CE&RE: 2Y6Z-3
EUT Received Date:	2025/3/5
EUT Received Status:	Good

1.1.2 Operation Frequency Detail

For 802.11a/n ht20/ac vht20/ax hew20:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
40	5200	56	5280	104	5520	153	5765
44	5220	60	5300	108	5540	157	5785
48	5240	64	5320	112	5560	161	5805
/	/	/	/	116	5580	165	5825
/	/	/	/	120	5600	/	/
/	/	/	/	124	5620	/	/
/	/	/	/	128	5640	/	/
/	/	/	/	132	5660	/	/
/	/	/	/	136	5680	/	/
/	/	/	/	140	5700	/	/
/	/	/	/	144	5720	/	/

Per section 15.31(m), the below channels were performed the test as below:

Test Channel	Test Frequency (MHz)			
	5150-5250 MHz	5250-5350 MHz	5470-5725 MHz	5725-5850 MHz
Lowest	5180	5260	5500	5745
Middle	5200	5280	5580	5785
Highest	5240	5320	5700	5825
Additional	/	/	5720	/

For 802.11n ht40/ac vht40/ax hew40:

5150-5250MHz		5250-5350 MHz		5470-5725 MHz		5725-5850MHz	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
46	5230	62	5310	110	5550	159	5795
/	/	/	/	118	5590	/	/
/	/	/	/	126	5630	/	/
/	/	/	/	134	5670	/	/
/	/	/	/	142	5710	/	/

Per section 15.31(m), the below channels were performed the test as below:

Test Channel	Test Frequency (MHz)			
	5150-5250 MHz	5250-5350 MHz	5470-5725 MHz	5725-5850 MHz
Lowest	5190	5270	5510	5755
Middle	/	/	5550	/
Highest	5230	5310	5670	5795
Additional	/	/	5710	/

For 802.11ac vht80/ax hew80:

5150-5250MHz		5250-5350 MHz		5470-5725 MHz		5725-5850MHz	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
/	/	/	/	122	5610	/	/
/	/	/	/	138	5690	/	/

Per section 15.31(m), the below channels were performed the test as below:

Test Channel	Test Frequency (MHz)			
	5150-5250 MHz	5250-5350 MHz	5470-5725 MHz	5725-5850 MHz
Lowest	/	/	5530	/
Middle	5210	5290	/	5775
Highest	/	/	5610	/
Additional	/	/	5690	/

Note: Additional channels cross the band 5470-5725MHz and 5725-5850 MHz, Conducted output power/ Power Spectral Density/bandwidth test with the additional channel to compliance with stricter limit of the two bands(5470-5725MHz more stricter).

1.1.3 Antenna Information Detail ▲

Antenna	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain (dBi)
Chian 0 (Left)	FPC	50	5.15~5.25GHz	4.6
			5.25~5.35 GHz	4.6
			5.47~5.725 GHz	4.6
			5.725~5.85 GHz	4.6
Chian 1 (Right)	FPC	50	5.15~5.25GHz	2.0
			5.25~5.35 GHz	2.0
			5.47~5.725 GHz	1.9
			5.725~5.85 GHz	1.9

Note:

The system supports 2T2R MIMO CDD modes at 802.11n/ac/ax modes.

Per KDB 662911 D01 Multiple Transmitter Output v02r01:

For power measurements:

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4

directional gain = dBi + 0dB = 4.6dBi

For power spectral density (PSD) measurements:

Array Gain = 10 log(NANT/NSS) dB.

directional gain = 4.6dBi + 3dB = 7.6dBi

The Method of §15.203 Compliance:



Antenna was permanently attached to the unit.



Antenna uses a unique type of connector to attach to the EUT.



Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

1.1.4 Accessory Information

Accessory Description	Manufacturer	Model
Adapter	szyingyuan	ICP30A-120-2500

1.2 Description of Test Configuration**1.2.1 EUT Operation Condition:**

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.
Equipment Modifications:	No
EUT Exercise Software:	RTL8852B_USB_MP_Package_ALPHA_v1.0.54(80381)

The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲ :

5150-5250 MHz Band:

Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting	
				Chain 0	Chain 1
802.11a	Lowest	5180	6Mbps	16	16
	Middle	5200	6Mbps	16	16
	Highest	5240	6Mbps	16	16
802.11n ht20	Lowest	5180	MCS0	16	16
	Middle	5200	MCS0	16	16
	Highest	5240	MCS0	16	16
802.11n ht40	Lowest	5190	MCS0	16	16
	Highest	5230	MCS0	16	16
802.11ac vht80	Middle	5210	MCS0	16	16
802.11ax ht20	Lowest	5180	MCS0	16	16
	Middle	5200	MCS0	16	16
	Highest	5240	MCS0	16	16
802.11ax ht40	Lowest	5190	MCS0	16	16
	Highest	5230	MCS0	16	16
802.11ax ht80	Middle	5210	MCS0	16	16

5250-5350 MHz Band:					
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting	
				Chain 0	Chain 1
802.11a	Lowest	5260	6Mbps	16	16
	Middle	5280	6Mbps	16	16
	Highest	5320	6Mbps	16	16
802.11n ht20	Lowest	5260	MCS0	16	16
	Middle	5280	MCS0	16	16
	Highest	5320	MCS0	16	16
802.11n ht40	Lowest	5270	MCS0	22	22
	Highest	5310	MCS0	22	22
802.11ac vht80	Middle	5290	MCS0	22	22
802.11ax ht20	Lowest	5260	MCS0	16	16
	Middle	5280	MCS0	16	16
	Highest	5320	MCS0	16	16
802.11ax ht40	Lowest	5270	MCS0	16	16
	Highest	5310	MCS0	16	16
802.11ax ht80	Middle	5290	MCS0	16	16
5470-5725 MHz Band:					
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting	
				Chain 0	Chain 1
802.11a	Lowest	5500	6Mbps	16	16
	Middle	5580	6Mbps	16	16
	Highest	5700	6Mbps	16	16
	Cross	5720	6Mbps	16	16
802.11n ht20	Lowest	5500	MCS0	16	16
	Middle	5580	MCS0	16	16
	Highest	5700	MCS0	16	16
	Cross	5720	MCS0	16	16
802.11n ht40	Lowest	5510	MCS0	16	16
	Highest	5550	MCS0	16	16
	Lowest	5670	MCS0	16	16
	Cross	5710	MCS0	16	16
802.11ac vht80	Lowest	5530	MCS0	16	16
	Middle	5610	MCS0	16	16
	Highest	5690	MCS0	16	16
802.11ax ht20	Lowest	5500	MCS0	16	16
	Middle	5580	MCS0	16	16
	Highest	5700	MCS0	16	16
	Cross	5720	MCS0	16	16
802.11ax ht40	Lowest	5510	MCS0	16	16
	Middle	5550	MCS0	16	16
	Highest	5670	MCS0	16	16
	Cross	5710	MCS0	16	16
802.11ax ht80	Lowest	5530	MCS0	16	16
	Highest	5610	MCS0	16	16
	Cross	5690	MCS0	16	16

5725-5850 MHz Band:					
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting	
				Chain 0	Chain 1
802.11a	Lowest	5745	6Mbps	16	16
	Middle	5785	6Mbps	16	16
	Highest	5825	6Mbps	16	16
802.11n ht20	Lowest	5745	MCS0	16	16
	Middle	5785	MCS0	16	16
	Highest	5825	MCS0	16	16
802.11n ht40	Lowest	5755	MCS0	16	16
	Highest	5795	MCS0	16	16
802.11ac vht80	Middle	5775	MCS0	16	16
802.11ax ht20	Lowest	5745	MCS0	16	16
	Middle	5785	MCS0	16	16
	Highest	5825	MCS0	16	16
802.11ax ht40	Lowest	5755	MCS0	16	16
	Highest	5795	MCS0	16	16
802.11ax ht80	Middle	5775	MCS0	16	16

Note:

- 1.The system support 802.11a/n ht20/n ht40/ac vht20/vht40/vht80/ax hew20/hew40/hew80, the vht20/vht40 were reduced since the identical parameters with 802.11n ht20/ht40.
2. The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.
3. The device supports SISO in all modes and MIMO in 802.11n/ac/ax modes, per pretest, MIMO mode was the worst mode and reported for 802.11n/ac/ax modes.
4. 802.11ax mode only support full RU configuration.

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	T460S	60PDTEK8
DongFeng	Phone	P3	UP3_BSGF187E000165

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
AJ45 Cable	No	No	5	EUT	Laptop
USB Cable	No	No	1.3	EUT	Phone
DC Cable	No	No	1.9	EUT	Adapter

1.2.4 Block Diagram of Test Setup


AC line conducted emissions:

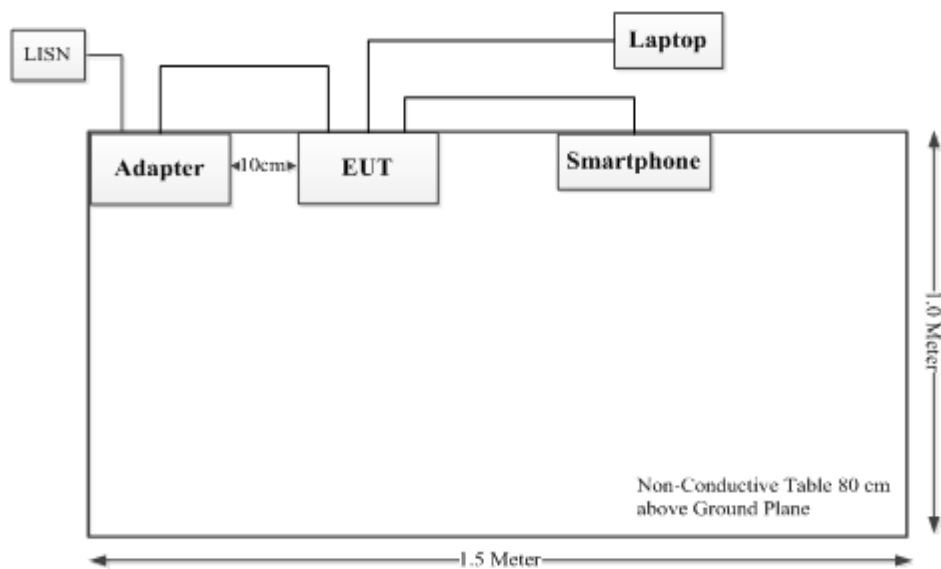

Spurious Emissions:
Below 1GHz

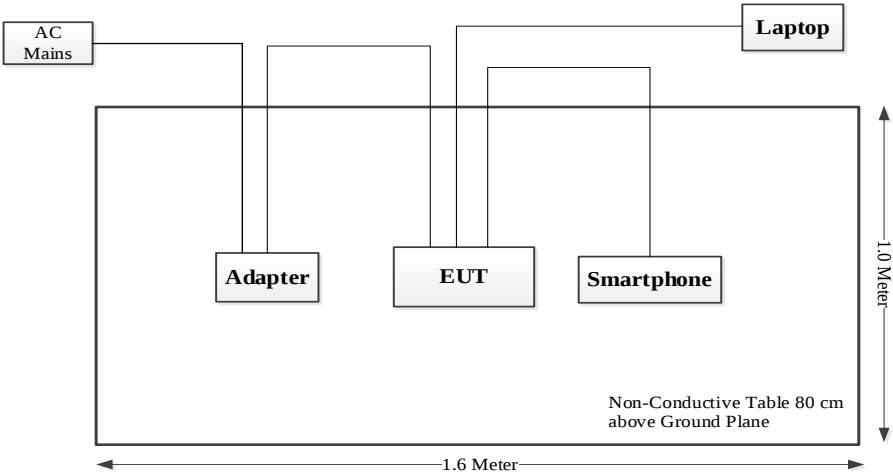

Above 1GHz

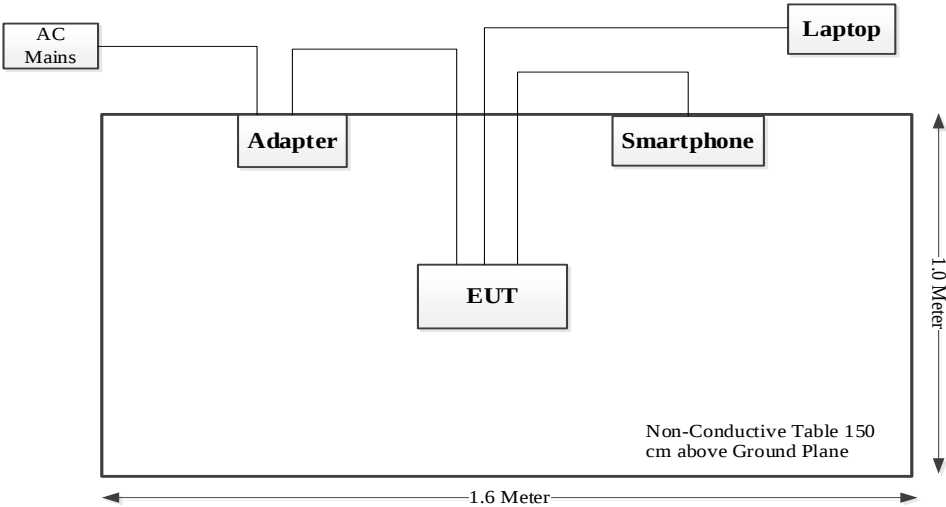

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9k~30MHz: 4.12dB, 30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.203	Antenna Requirement	Compliant
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.407(b)	Undesirable Emission& Restricted Bands	Compliant
FCC§15.407(a) (e)	Emission Bandwidth	Compliant
FCC§15.407(a) (e)	99% Occupied Bandwidth	Compliant
FCC§15.407 (a)	Maximum Conducted Output Power	Compliant
FCC§15.407 (a)	Power Spectral Density	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC §15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup

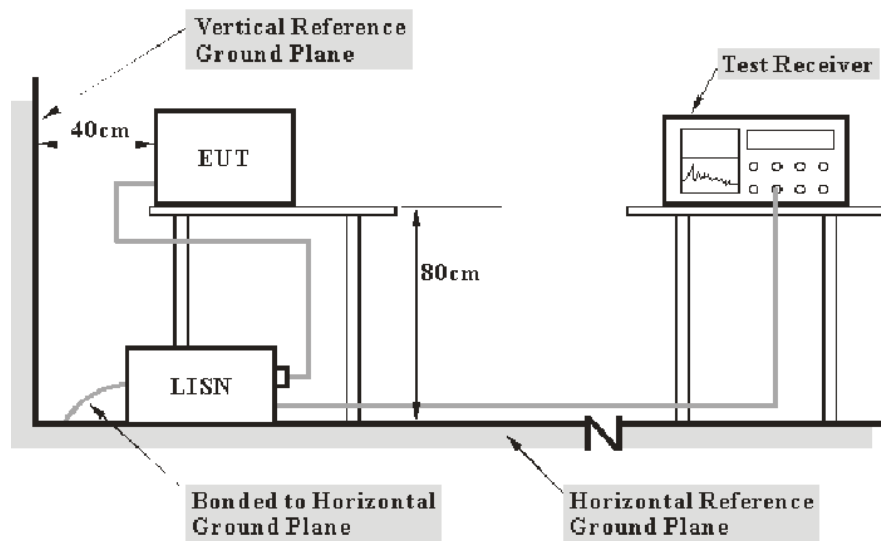

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions

3.2.1 Applicable Standard


FCC §15.407 (b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:


- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725-5.850 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
- (8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.
- (10) The provisions of § 15.205 apply to intentional radiators operating under this section.
- (11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.
- (c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

3.2.2 EUT Setup


9kHz - 30MHz:

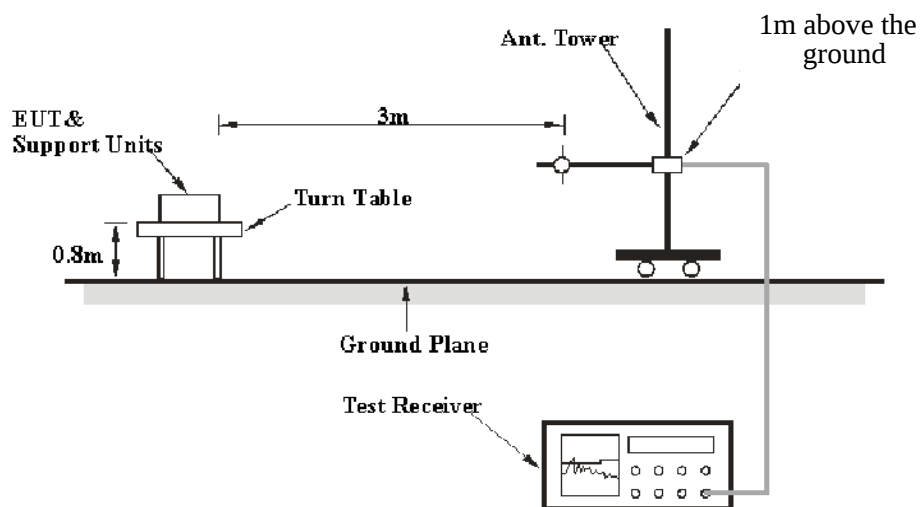


30MHz - 1GHz:

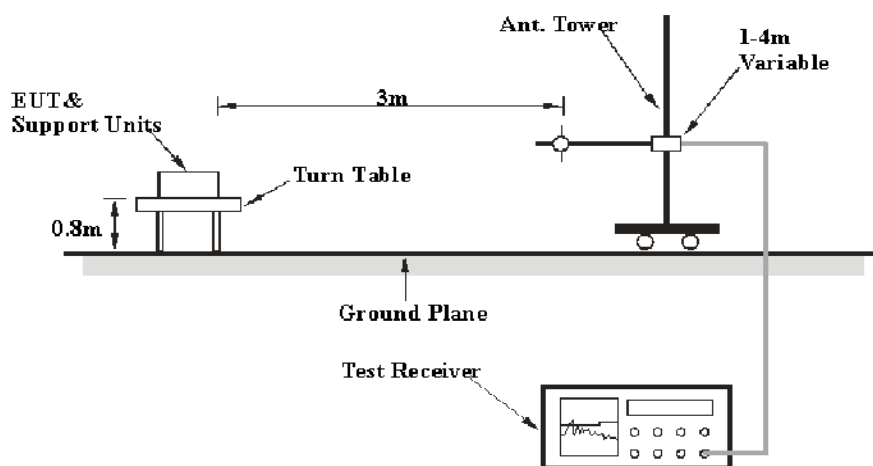

1GHz - 26.5GHz:

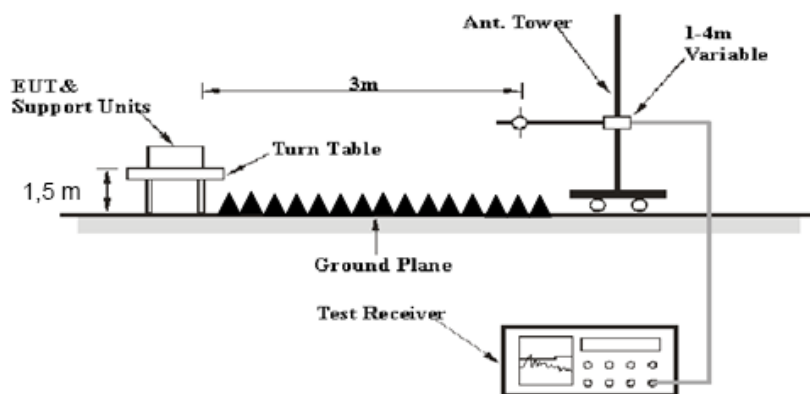

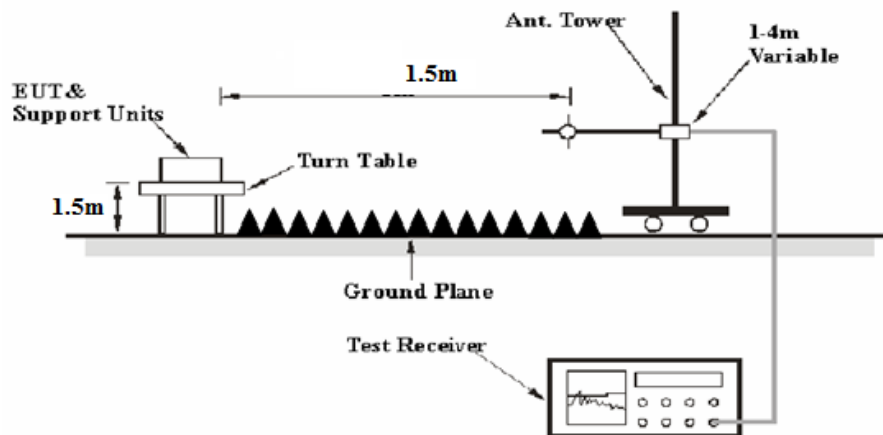26.5GHz - 40 GHz:

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2020. The specification used was FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector	Measurement
9 kHz – 150 kHz	300 Hz	1 kHz	/	Peak	PK
	/	/	200 Hz	Quasi Peak/ Average	QP/AV
150 kHz – 30 MHz	10 kHz	30 kHz	/	Peak	PK
	/	/	9 kHz	Quasi Peak/ Average	QP/AV
30MHz – 1000 MHz	100 kHz	300 kHz	/	Peak	PK
	/	/	120kHz	Quasi Peak	QP

1GHz- 40GHz:

Pre-scan:

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
Ave.	>98%	1MHz	5 kHz	Peak
	<98%	1MHz	$\geq 1/T$, not less than 5 kHz	Peak

Note: T is minimum transmission duration

Final measurement for emission identified during the pre-scan:

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
Ave.	>98%	1MHz	10 Hz	Peak
	<98%	1MHz	$\geq 1/T$	Peak

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1 GHz except 9–90 kHz, 110–490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$ dB = 6.02 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

For 9kHz-26.5GHz:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

For 26.5GHz-40GHz

Factor = Antenna Factor + Cable Loss- Amplifier Gain -Distance extrapolation Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.3 Emission Bandwidth

3.3.1 Applicable Standard


FCC §15.407 (a), (h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.3.2 EUT Setup

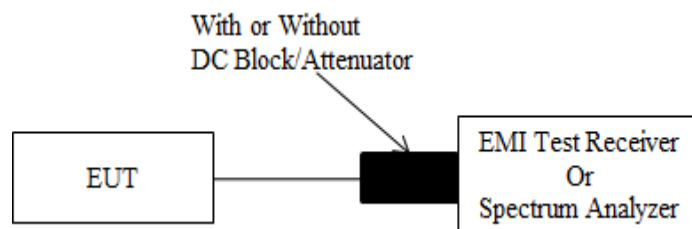

A short RF cable with low cable loss connected to the EUT antenna port, the insert loss of this RF cable/attenuator was offset into the setting of test equipment.

3.3.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2020 Section 12.5.2

- Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max-hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

6 dB emission bandwidth:

According to ANSI C63.10-2020 Section 12.5.1

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 Db relative to the maximum level measured in the fundamental emission.

99% Occupied Bandwidth:

According to ANSI C63.10-2020 Section 12.5.3&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

3.4 Maximum Conducted Output Power

3.4.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.4.2 EUT Setup

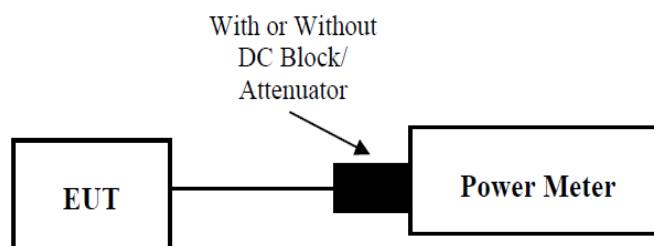

A short RF cable with low cable loss connected to the EUT antenna port, the insert loss of this RF cable/attenuator was offset into the setting of test equipment.

3.4.3 Test Procedure

According to ANSI C63.10-2020 Section 12.4.3.2

Method PM-G is measurement using a gated RF average power meter.

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.5 Maximum Power Spectral Density

3.5.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.5.2 EUT Setup

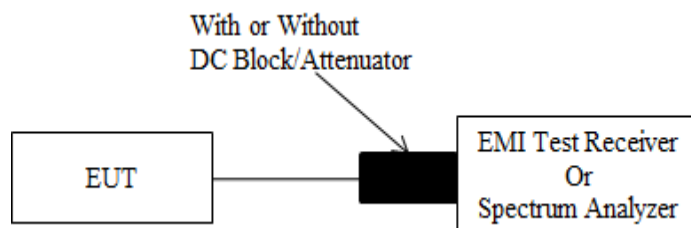

A short RF cable with low cable loss connected to the EUT antenna port, the insert loss of this RF cable/attenuator was offset into the setting of test equipment.

3.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle $\geq 98\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

3.6 Duty Cycle

3.6.1 EUT Setup

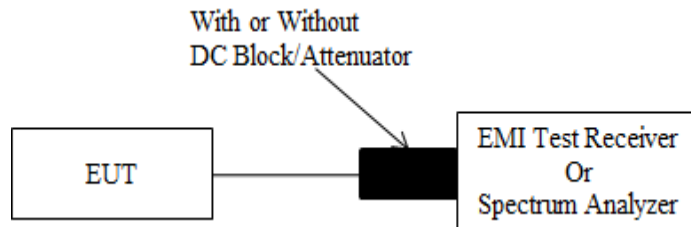

A short RF cable with low cable loss connected to the EUT antenna port, the insert loss of this RF cable/attenuator was offset into the setting of test equipment.

3.6.2 Test Procedure

According to ANSI C63.10-2020 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- i) Set the center frequency of the instrument to the center frequency of the transmission.
- ii) Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value.
- iii) Set $VBW \geq RBW$.
- iv) Set detector = peak.
- v) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in item a1) of 12.2, and the number of sweep points across duration T exceeds 100. For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7\mu s$.

3.7 Antenna Requirement

3.7.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Judgment

Result: Compliant. Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Sample Number:	2Y6Z-3	Test Date:	2025/3/11
Test Site:	CE	Test Mode:	Transmitting (maximum output power mode, 802.11n ht40 5310MHz)
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:


Temperature: (	24.3	Relative Humidity: (%)	61	ATM Pressure: (kPa)	101.2
----------------	------	------------------------	----	---------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101132	2024/4/1	2025/3/31
R&S	EMI Test Receiver	ESR3	103104	2024/5/10	2025/5/9
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2025/1/6	2026/1/5
Audix	Test Software	E3	191218 (V9)	N/A	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Project No.: 2503Q19064E-RF
 Tester: David Huang
 Condition: IFBW:9 kHz Meas Time:0.025sec
 Port: Line
 Note: Transmitting 5G WIFI

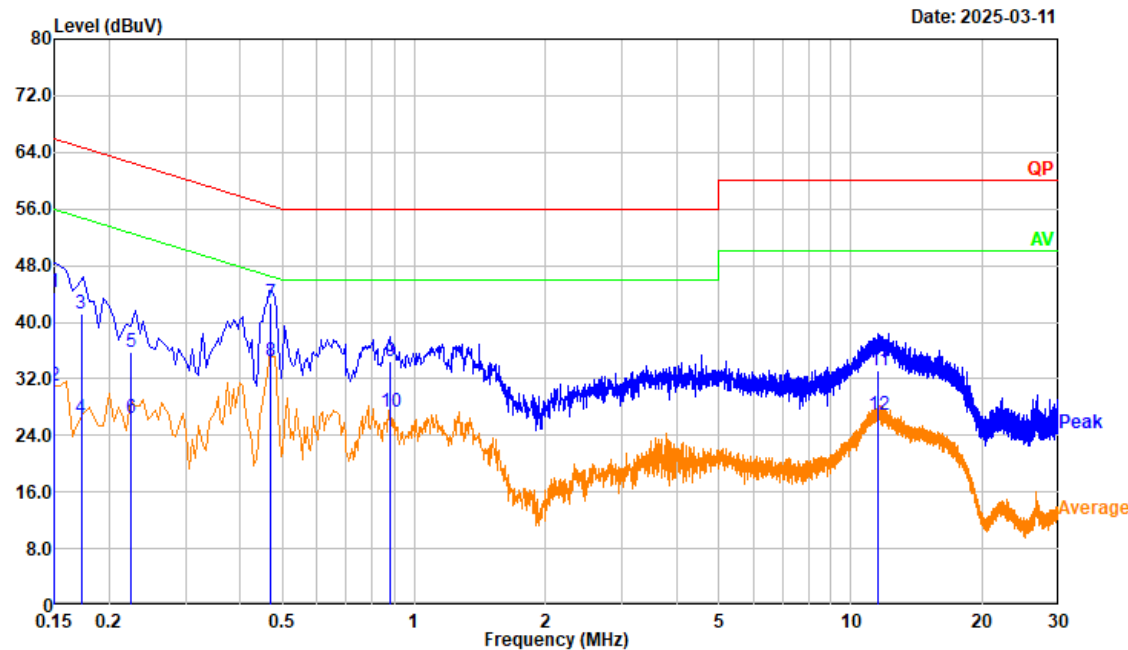

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.150	33.86	10.41	44.27	65.98	21.71	QP
2	0.150	20.49	10.41	30.90	55.98	25.08	Average
3	0.173	30.91	10.23	41.14	64.82	23.68	QP
4	0.173	16.28	10.23	26.51	54.82	28.31	Average
5	0.224	25.70	10.05	35.75	62.66	26.91	QP
6	0.224	16.47	10.05	26.52	52.66	26.14	Average
7	0.469	32.32	10.46	42.78	56.52	13.74	QP
8	0.469	24.07	10.46	34.53	46.52	11.99	Average
9	0.883	23.79	10.65	34.44	56.00	21.56	QP
10	0.883	16.61	10.65	27.26	46.00	18.74	Average
11	11.577	23.07	10.12	33.19	60.00	26.81	QP
12	11.577	16.76	10.12	26.88	50.00	23.12	Average

Project No.: 2503Q19064E-RF
 Tester: David Huang
 Condition: IFBW:9 kHz Meas Time:0.025sec
 Port: neutral
 Note: Transmitting 5G WIFI

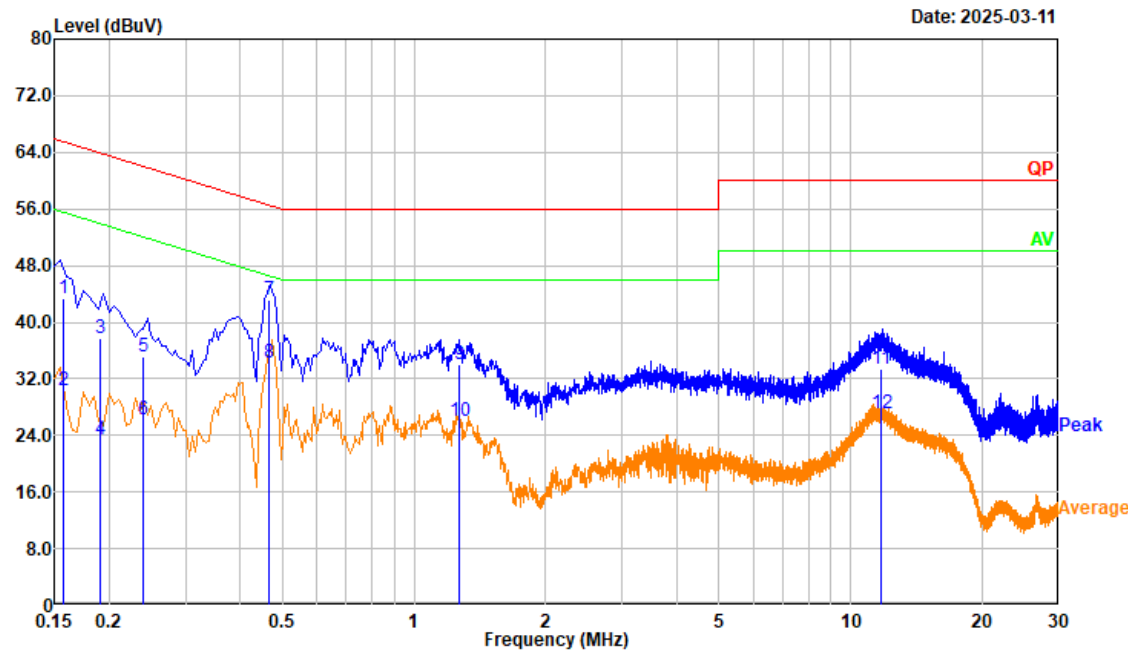

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.158	32.93	10.48	43.41	65.57	22.16	QP
2	0.158	19.91	10.48	30.39	55.57	25.18	Average
3	0.191	27.47	10.35	37.82	64.01	26.19	QP
4	0.191	13.08	10.35	23.43	54.01	30.58	Average
5	0.241	24.86	10.34	35.20	62.07	26.87	QP
6	0.241	15.96	10.34	26.30	52.07	25.77	Average
7	0.466	32.67	10.49	43.16	56.59	13.43	QP
8	0.466	23.86	10.49	34.35	46.59	12.24	Average
9	1.272	23.48	10.47	33.95	56.00	22.05	QP
10	1.272	15.53	10.47	26.00	46.00	20.00	Average
11	11.728	23.01	10.28	33.29	60.00	26.71	QP
12	11.728	16.85	10.28	27.13	50.00	22.87	Average

4.2 Radiation Spurious Emissions

4.2.1 9 kHz – 1 GHz

Sample Number:	2Y6Z-3	Test Date:	2025/3/10
Test Site:	966-2	Test Mode:	Transmitting (maximum output power mode, 802.11n ht40 5310MHz)
Tester:	Cody Dai	Test Result:	Pass

Environmental Conditions:

Temperature: ()	25.3	Relative Humidity: (%)	56	ATM Pressure: (kPa)	101.4
---------------------	------	---------------------------	----	---------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2023/12/1	2026/11/30
BACL	Loop Antenna	1313-1A	3110611	2023/12/4	2026/12/3
Daruikang	Coaxial Cable	BNC-JJ-RG58	C-0300-01	2025/1/10	2026/1/9
Daruikang	Coaxial Cable	BNC-JJ-RG58	C-0500-01	2025/1/10	2026/1/9
R&S	EMI Test Receiver	ESR3	102724	2025/2/14	2026/2/13
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0100-03	2024/12/3	2025/12/2
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0370-01	2024/12/3	2025/12/2
XQY	Coaxial Cable	XQY-CMR400UF-NJ-NJ-7M	24056379	2024/6/11	2025/6/10
Sonoma	Amplifier	310N	186165	2024/12/3	2025/12/2
Audix	Test Software	E3	191218 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Project No.: 2503Q19064E-RF
Tester: Cody Dai
Condition: RBW:0.3 kHz VBW:1 kHz SWT:0.1 sec
Polarization: Parallel
Note: Transmitting

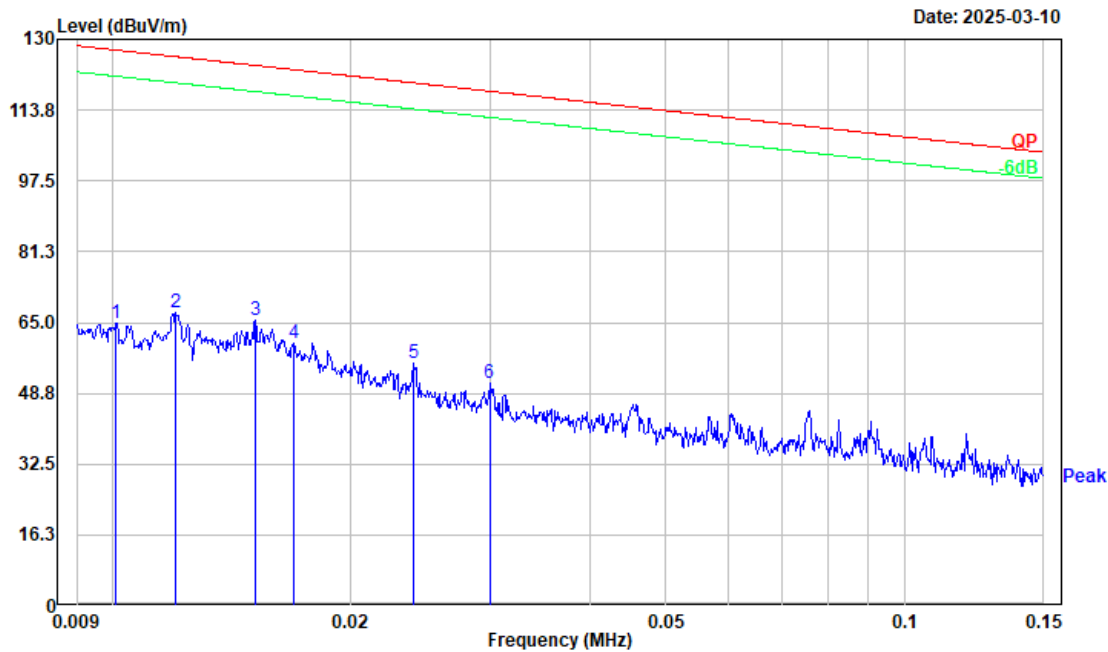


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.010	30.41	34.39	64.80	127.52	62.72	Peak
2	0.012	33.73	33.45	67.18	126.00	58.82	Peak
3	0.015	33.62	31.92	65.54	124.00	58.46	Peak
4	0.017	29.31	31.06	60.37	123.05	62.68	Peak
5	0.024	27.93	27.57	55.50	119.99	64.49	Peak
6	0.030	26.27	24.68	50.95	118.09	67.14	Peak

Project No.: 2503Q19064E-RF
Tester: Cody Dai
Condition: RBW:10 kHz VBW:30 kHz SWT:0.1 sec
Polarization: Parallel
Note: Transmitting

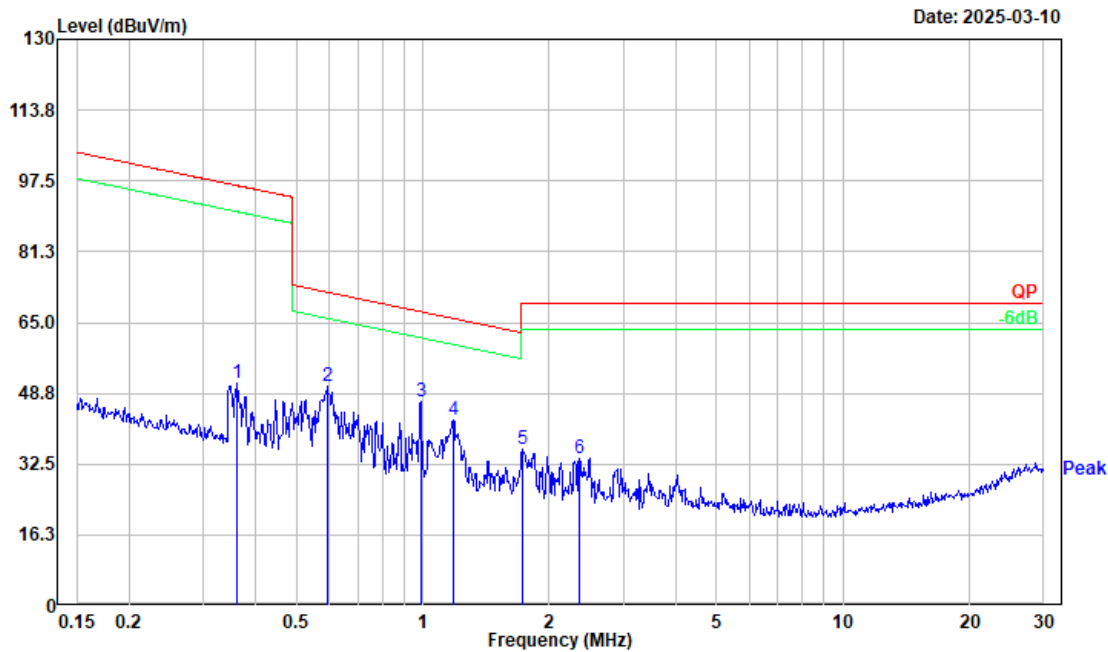


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.361	47.06	4.02	51.08	96.44	45.36	Peak
2	0.592	50.32	-0.09	50.23	72.13	21.90	Peak
3	0.989	50.94	-4.11	46.83	67.57	20.74	Peak
4	1.184	47.39	-4.85	42.54	65.97	23.43	Peak
5	1.725	42.61	-6.77	35.84	69.54	33.70	Peak
6	2.358	41.81	-7.95	33.86	69.54	35.68	Peak

Project No.: 2503Q19064E-RF
Tester: Cody Dai
Condition: RBW:0.3 kHz VBW:1 kHz SWT:0.1 sec
Polarization: Perpendicular
Note: Transmitting

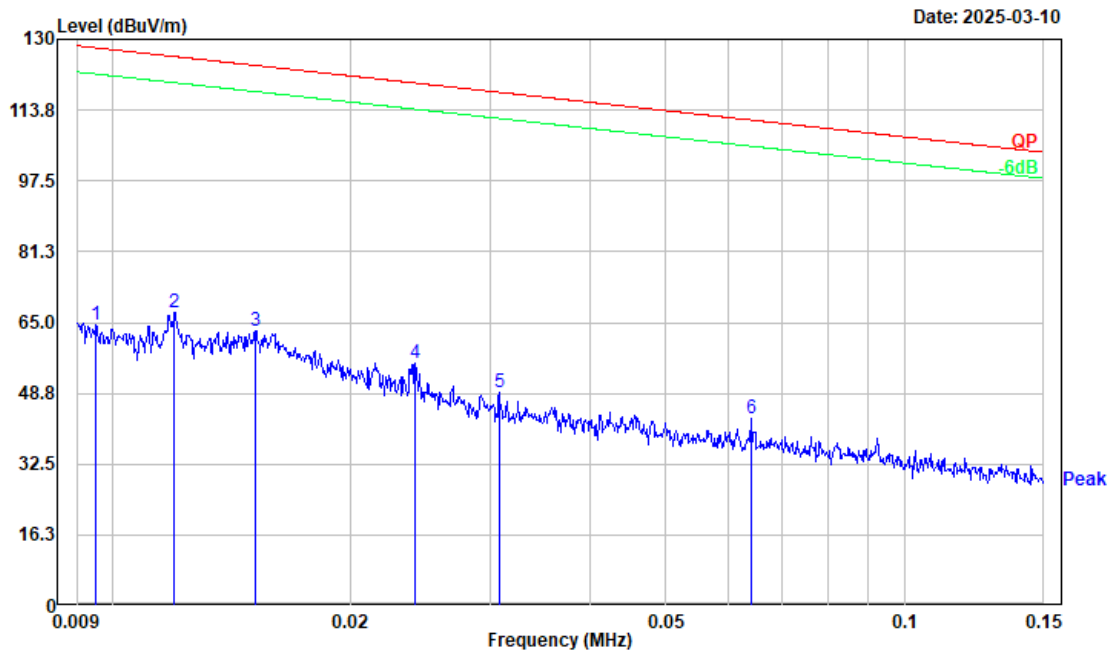


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.010	29.58	35.06	64.64	128.03	63.39	Peak
2	0.012	33.69	33.48	67.17	126.05	58.88	Peak
3	0.015	31.20	31.92	63.12	124.00	60.88	Peak
4	0.024	28.12	27.53	55.65	119.97	64.32	Peak
5	0.031	24.39	24.48	48.87	117.84	68.97	Peak
6	0.064	24.59	18.53	43.12	111.49	68.37	Peak

Project No.: 2503Q19064E-RF
Tester: Cody Dai
Condition: RBW:10 kHz VBW:30 kHz SWT:0.1 sec
Polarization: Perpendicular
Note: Transmitting

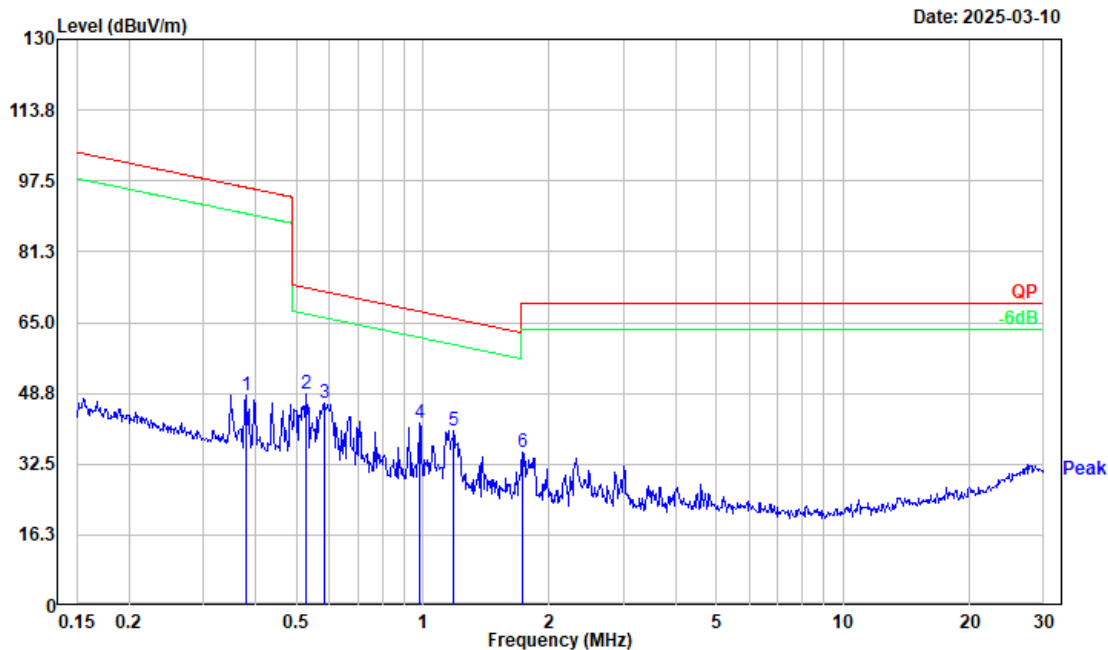


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.379	44.78	3.63	48.41	96.03	47.62	Peak
2	0.527	48.03	0.66	48.69	73.16	24.47	Peak
3	0.582	46.64	0.02	46.66	72.27	25.61	Peak
4	0.984	46.15	-4.06	42.09	67.62	25.53	Peak
5	1.184	45.15	-4.85	40.30	65.97	25.67	Peak
6	1.725	41.88	-6.77	35.11	69.54	34.43	Peak

Project No.: 2503Q19064E-RF
Tester: Cody Dai
Condition: RBW:0.3 kHz VBW:1 kHz SWT:0.1 sec
Polarization: Ground-parallel
Note: Transmitting

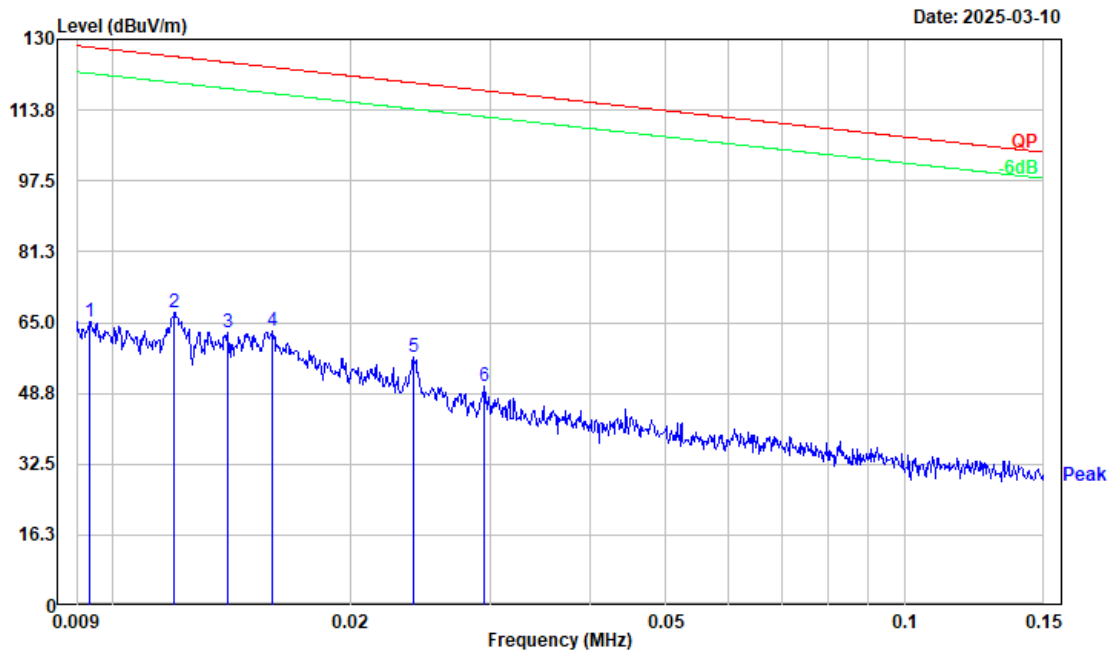


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.009	30.08	35.26	65.34	128.18	62.84	Peak
2	0.012	33.65	33.48	67.13	126.05	58.92	Peak
3	0.014	30.15	32.50	62.65	124.71	62.06	Peak
4	0.016	31.62	31.53	63.15	123.56	60.41	Peak
5	0.024	29.59	27.60	57.19	120.02	62.83	Peak
6	0.029	25.35	24.92	50.27	118.23	67.96	Peak

Project No.: 2503Q19064E-RF
Tester: Cody Dai
Condition: RBW:10 kHz VBW:30 kHz SWT:0.1 sec
Polarization: Ground-parallel
Note: Transmitting

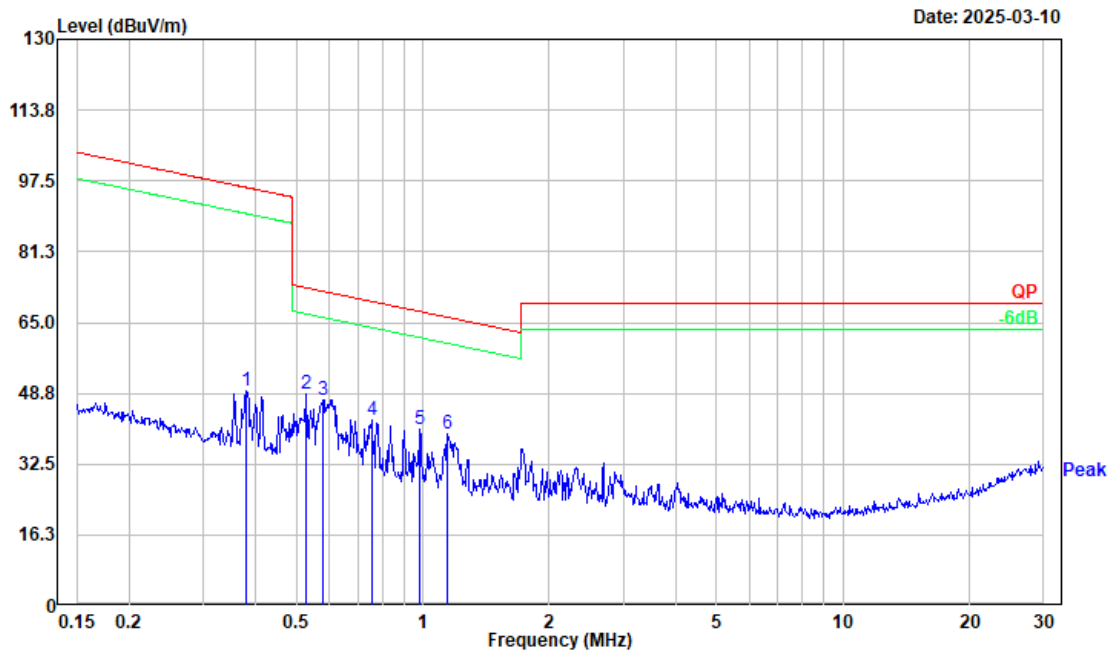


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.381	45.63	3.59	49.22	95.98	46.76	Peak
2	0.529	47.99	0.63	48.62	73.11	24.49	Peak
3	0.579	47.28	0.06	47.34	72.32	24.98	Peak
4	0.755	44.68	-1.97	42.71	69.97	27.26	Peak
5	0.984	44.67	-4.06	40.61	67.62	27.01	Peak
6	1.147	44.03	-4.72	39.31	66.25	26.94	Peak

Project No.: 2503Q19064E-RF
 Tester: Cody Dai
 Condition: RBW:100 kHz VBW:300 kHz SWT:0.1 sec
 Polarization: vertical
 Note: Transmitting

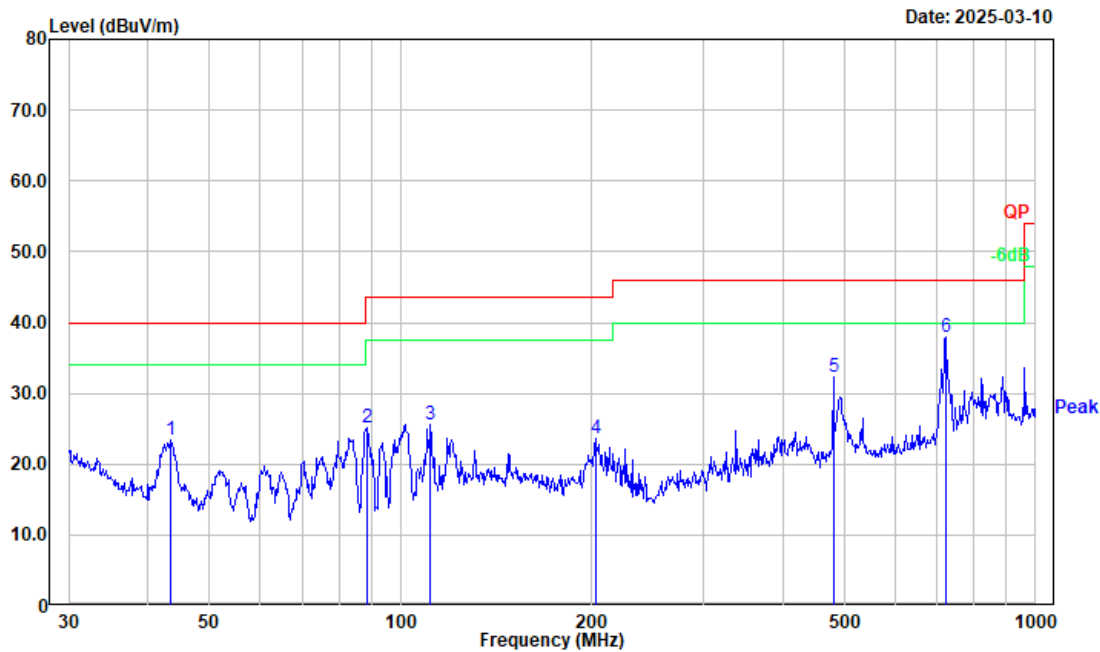

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	43.506	37.13	-13.82	23.31	40.00	16.69	Peak
2	88.342	42.23	-17.13	25.10	43.50	18.40	Peak
3	111.347	37.65	-12.11	25.54	43.50	17.96	Peak
4	202.810	36.55	-12.94	23.61	43.50	19.89	Peak
5	480.528	38.55	-6.28	32.27	46.00	13.73	Peak
6	721.726	40.74	-2.85	37.89	46.00	8.11	Peak

Project No.: 2503Q19064E-RF
Tester: Cody Dai
Condition: RBW:100 kHz VBW:300 kHz SWT:0.1 sec
Polarization: horizontal
Note: Transmitting

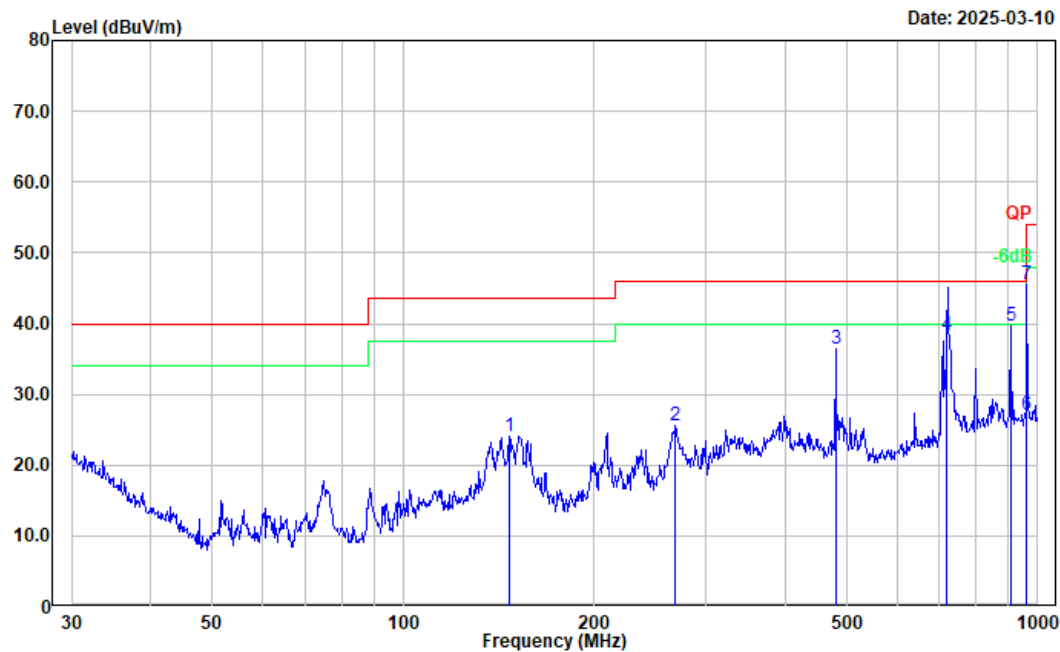

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	146.888	36.18	-12.15	24.03	43.50	19.47	Peak
2	268.485	36.57	-11.00	25.57	46.00	20.43	Peak
3	480.528	42.72	-6.28	36.44	46.00	9.56	Peak
4	719.737	41.17	-2.87	38.30	46.00	7.70	QP
5	906.482	39.60	0.17	39.77	46.00	6.23	Peak
6	960.000	26.41	0.71	27.12	46.00	18.88	Peak
7	962.162	44.75	0.78	45.53	54.00	8.47	Peak

4.2.2 1 GHz – 40 GHz

Sample Number	2Y6Z-3	Test Date:	2025/3/24-2025/5/21
Test Site:	966-1	Test Mode:	Transmitting
Tester:	Peter Rong	Test Result:	Pass

Environmental Conditions:

Temperature: ()	23.9-26.1	Relative Humidity: (%)	41-55	ATM Pressure: (kPa)	100.9-101.8
---------------------	-----------	---------------------------	-------	---------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	9912-5985	2023/12/6	2026/12/5
R&S	Spectrum Analyzer	FSV40	101591	2024/4/1	2025/3/31
R&S	Spectrum Analyzer	FSV40	101591	2025/3/31	2026/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2025/1/10	2026/1/9
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2025/1/10	2026/1/9
A.H	Preamplifier	PAM-0118P	628	2025/2/21	2026/2/20
Audix	Test Software	E3	191218 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2024/2/4	2027/2/3
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2024/2/4	2027/2/3
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2025/1/6	2026/1/5
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2025/1/6	2026/1/5
JD	Multiplex Switch Test Control Set	DT7220SCU	DQ77925	2024/8/5	2025/8/4
JD	Filter Switch Unit	DT7220FSU	DQ77928	2024/8/5	2025/8/4

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:**5150-5250MHz:****802.11a Mode Chain 0:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5180	MHz		
10360.000	44.31	PK	H	2.01	46.32	68.20	21.88
10360.000	45.94	PK	V	2.01	47.95	68.20	20.25
15540.000	43.15	PK	H	4.08	47.23	74.00	26.77
15540.000	31.27	AV	H	4.08	35.35	54.00	18.65
15540.000	43.77	PK	V	4.08	47.85	74.00	26.15
15540.000	31.03	AV	V	4.08	35.11	54.00	18.89
Middle Channel:				5200	MHz		
10400.000	44.86	PK	H	2.07	46.93	68.20	21.27
10400.000	45.04	PK	V	2.07	47.11	68.20	21.09
15600.000	43.54	PK	H	3.92	47.46	74.00	26.54
15600.000	31.29	AV	H	3.92	35.21	54.00	18.79
15600.000	43.86	PK	V	3.92	47.78	74.00	26.22
15600.000	31.26	AV	V	3.92	35.18	54.00	18.82
High Channel:				5240	MHz		
10480.000	45.27	PK	H	2.58	47.85	68.20	20.35
10480.000	44.92	PK	V	2.58	47.50	68.20	20.70
15720.000	44.57	PK	H	3.83	48.40	74.00	25.60
15720.000	32.86	AV	H	3.83	36.69	54.00	17.31
15720.000	44.10	PK	V	3.83	47.93	74.00	26.07
15720.000	32.15	AV	V	3.83	35.98	54.00	18.02

802.11a Mode Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5180	MHz		
10360.000	44.85	PK	H	2.01	46.86	68.20	21.34
10360.000	45.04	PK	V	2.01	47.05	68.20	21.15
15540.000	43.90	PK	H	4.08	47.98	74.00	26.02
15540.000	41.05	AV	H	4.08	45.13	54.00	8.87
15540.000	42.36	PK	V	4.08	46.44	74.00	27.56
15540.000	30.25	AV	V	4.08	34.33	54.00	19.67
Middle Channel:				5200	MHz		
10400.000	44.65	PK	H	2.07	46.72	68.20	21.48
10400.000	45.63	PK	V	2.07	47.70	68.20	20.50
15600.000	43.48	PK	H	3.92	47.40	74.00	26.60
15600.000	31.65	AV	H	3.92	35.57	54.00	18.43
15600.000	43.87	PK	V	3.92	47.79	74.00	26.21
15600.000	31.29	AV	V	3.92	35.21	54.00	18.79
High Channel:				5240	MHz		
10480.000	44.10	PK	H	2.58	46.68	68.20	21.52
10480.000	45.63	PK	V	2.58	48.21	68.20	19.99
15720.000	44.83	PK	H	3.83	48.66	74.00	25.34
15720.000	32.54	AV	H	3.83	36.37	54.00	17.63
15720.000	44.38	PK	V	3.83	48.21	74.00	25.79
15720.000	32.05	AV	V	3.83	35.88	54.00	18.12

802.11n ht20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5180	MHz		
10360.000	43.98	PK	H	2.01	45.99	68.20	22.21
10360.000	44.60	PK	V	2.01	46.61	68.20	21.59
15540.000	44.14	PK	H	4.08	48.22	74.00	25.78
15540.000	31.16	AV	H	4.08	35.24	54.00	18.76
15540.000	44.36	PK	V	4.08	48.44	74.00	25.56
15540.000	31.74	AV	V	4.08	35.82	54.00	18.18
Middle Channel:				5200	MHz		
10400.000	44.41	PK	H	2.07	46.48	68.20	21.72
10400.000	45.41	PK	V	2.07	47.48	68.20	20.72
15600.000	44.75	PK	H	3.92	48.67	74.00	25.33
15600.000	31.82	AV	H	3.92	35.74	54.00	18.26
15600.000	44.37	PK	V	3.92	48.29	74.00	25.71
15600.000	31.53	AV	V	3.92	35.45	54.00	18.55
High Channel:				5240	MHz		
10480.000	43.60	PK	H	2.58	46.18	68.20	22.02
10480.000	45.44	PK	V	2.58	48.02	68.20	20.18
15720.000	43.81	PK	H	3.83	47.64	74.00	26.36
15720.000	31.02	AV	H	3.83	34.85	54.00	19.15
15720.000	45.18	PK	V	3.83	49.01	74.00	24.99
15720.000	32.23	AV	V	3.83	36.06	54.00	17.94

802.11n ht40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5190	MHz		
10380.000	44.59	PK	H	2.04	46.63	68.20	21.57
10380.000	44.45	PK	V	2.04	46.49	68.20	21.71
15570.000	44.81	PK	H	4.00	48.81	74.00	25.19
15570.000	32.58	AV	H	4.00	36.58	54.00	17.42
15570.000	44.05	PK	V	4.00	48.05	74.00	25.95
15570.000	31.26	AV	V	4.00	35.26	54.00	18.74
High Channel:				5230	MHz		
10460.000	44.02	PK	H	2.46	46.48	68.20	21.72
10460.000	44.75	PK	V	2.46	47.21	68.20	20.99
15690.000	43.26	PK	H	3.80	47.06	74.00	26.94
15690.000	31.54	AV	H	3.80	35.34	54.00	18.66
15690.000	43.83	PK	V	3.80	47.63	74.00	26.37
15690.000	31.27	AV	V	3.80	35.07	54.00	18.93

802.11ac80 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Middle Channel:				5210	MHz		
10420.000	44.91	PK	H	2.20	47.11	68.20	21.09
10420.000	44.52	PK	V	2.20	46.72	68.20	21.48
15630.000	43.57	PK	H	3.88	47.45	74.00	26.55
15630.000	31.75	AV	H	3.88	35.63	54.00	18.37
15630.000	45.24	PK	V	3.88	49.12	74.00	24.88
15630.000	32.63	AV	V	3.88	36.51	54.00	17.49

802.11ax20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5180	MHz		
10360.000	44.62	PK	H	2.01	46.63	68.20	21.57
10360.000	44.83	PK	V	2.01	46.84	68.20	21.36
15540.000	45.27	PK	H	4.08	49.35	74.00	24.65
15540.000	32.86	AV	H	4.08	36.94	54.00	17.06
15540.000	44.29	PK	V	4.08	48.37	74.00	25.63
15540.000	31.73	AV	V	4.08	35.81	54.00	18.19
Middle Channel:				5200	MHz		
10400.000	44.01	PK	H	2.07	46.08	68.20	22.12
10400.000	43.63	PK	V	2.07	45.70	68.20	22.50
15600.000	44.35	PK	H	3.92	48.27	74.00	25.73
15600.000	32.47	AV	H	3.92	36.39	54.00	17.61
15600.000	44.52	PK	V	3.92	48.44	74.00	25.56
15600.000	32.68	AV	V	3.92	36.60	54.00	17.40
High Channel:				5240	MHz		
10480.000	43.99	PK	H	2.58	46.57	68.20	21.63
10480.000	43.83	PK	V	2.58	46.41	68.20	21.79
15720.000	44.40	PK	H	3.83	48.23	74.00	25.77
15720.000	31.39	AV	H	3.83	35.22	54.00	18.78
15720.000	44.11	PK	V	3.83	47.94	74.00	26.06
15720.000	32.10	AV	V	3.83	35.93	54.00	18.07

802.11ax40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5190	MHz		
10380.000	44.06	PK	H	2.04	46.10	68.20	22.10
10380.000	45.16	PK	V	2.04	47.20	68.20	21.00
15570.000	43.12	PK	H	4.00	47.12	74.00	26.88
15570.000	31.25	AV	H	4.00	35.25	54.00	18.75
15570.000	43.88	PK	V	4.00	47.88	74.00	26.12
15570.000	31.29	AV	V	4.00	35.29	54.00	18.71
High Channel:				5230	MHz		
10460.000	45.22	PK	H	2.46	47.68	68.20	20.52
10460.000	44.96	PK	V	2.46	47.42	68.20	20.78
15690.000	43.42	PK	H	3.80	47.22	74.00	26.78
15690.000	31.03	AV	H	3.80	34.83	54.00	19.17
15690.000	43.85	PK	V	3.80	47.65	74.00	26.35
15690.000	31.69	AV	V	3.80	35.49	54.00	18.51

802.11ax80 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Middle Channel:				5210	MHz		
10420.000	44.29	PK	H	2.20	46.49	68.20	21.71
10420.000	44.26	PK	V	2.20	46.46	68.20	21.74
15630.000	43.50	PK	H	3.88	47.38	74.00	26.62
15630.000	31.74	AV	H	3.88	35.62	54.00	18.38
15630.000	43.51	PK	V	3.88	47.39	74.00	26.61
15630.000	31.38	AV	V	3.88	35.26	54.00	18.74

5250-5350MHz:**802.11a Mode Chain 0:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5260	MHz		
10520.000	43.18	PK	H	2.83	46.01	68.20	22.19
10520.000	43.33	PK	V	2.83	46.16	68.20	22.04
15780.000	44.27	PK	H	3.98	48.25	74.00	25.75
15780.000	32.52	AV	H	3.98	36.50	54.00	17.50
15780.000	43.46	PK	V	3.98	47.44	74.00	26.56
15780.000	31.22	AV	V	3.98	35.20	54.00	18.80
Middle Channel:				5280	MHz		
10560.000	43.75	PK	H	3.06	46.81	68.20	21.39
10560.000	44.33	PK	V	3.06	47.39	68.20	20.81
15840.000	43.06	PK	H	4.22	47.28	74.00	26.72
15840.000	31.27	AV	H	4.22	35.49	54.00	18.51
15840.000	43.71	PK	V	4.22	47.93	74.00	26.07
15840.000	31.15	AV	V	4.22	35.37	54.00	18.63
High Channel:				5320	MHz		
10640.000	43.94	PK	H	3.46	47.40	74.00	26.60
10640.000	31.05	AV	H	3.46	34.51	54.00	19.49
10640.000	43.56	PK	V	3.46	47.02	74.00	26.98
10640.000	31.55	AV	V	3.46	35.01	54.00	18.99
15960.000	43.64	PK	H	4.44	48.08	74.00	25.92
15960.000	31.39	AV	H	4.44	35.83	54.00	18.17
15960.000	44.17	PK	V	4.44	48.61	74.00	25.39
15960.000	32.71	AV	V	4.44	37.15	54.00	16.85

802.11a Mode Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5260	MHz		
10520.000	44.41	PK	H	2.83	47.24	68.20	20.96
10520.000	45.53	PK	V	2.83	48.36	68.20	19.84
15780.000	43.42	PK	H	3.98	47.40	74.00	26.60
15780.000	31.44	AV	H	3.98	35.42	54.00	18.58
15780.000	43.79	PK	V	3.98	47.77	74.00	26.23
15780.000	31.39	AV	V	3.98	35.37	54.00	18.63
Middle Channel:				5280	MHz		
10560.000	43.44	PK	H	3.06	46.50	68.20	21.70
10560.000	44.33	PK	V	3.06	47.39	68.20	20.81
15840.000	43.01	PK	H	4.22	47.23	74.00	26.77
15840.000	31.21	AV	H	4.22	35.43	54.00	18.57
15840.000	43.61	PK	V	4.22	47.83	74.00	26.17
15840.000	31.09	AV	V	4.22	35.31	54.00	18.69
High Channel:				5320	MHz		
10640.000	44.31	PK	H	3.46	47.77	74.00	26.23
10640.000	32.87	AV	H	3.46	36.33	54.00	17.67
10640.000	44.69	PK	V	3.46	48.15	74.00	25.85
10640.000	32.28	AV	V	3.46	35.74	54.00	18.26
15960.000	43.87	PK	H	4.44	48.31	74.00	25.69
15960.000	31.54	AV	H	4.44	35.98	54.00	18.02
15960.000	43.65	PK	V	4.44	48.09	74.00	25.91
15960.000	31.22	AV	V	4.44	35.66	54.00	18.34

802.11n ht20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5260	MHz		
10520.000	44.20	PK	H	2.83	47.03	68.20	21.17
10520.000	43.53	PK	V	2.83	46.36	68.20	21.84
15780.000	43.51	PK	H	3.98	47.49	74.00	26.51
15780.000	31.22	AV	H	3.98	35.20	54.00	18.80
15780.000	44.43	PK	V	3.98	48.41	74.00	25.59
15780.000	32.64	AV	V	3.98	36.62	54.00	17.38
Middle Channel:				5280	MHz		
10560.000	44.34	PK	H	3.06	47.40	68.20	20.80
10560.000	44.48	PK	V	3.06	47.54	68.20	20.66
15840.000	43.09	PK	H	4.22	47.31	74.00	26.69
15840.000	31.23	AV	H	4.22	35.45	54.00	18.55
15840.000	43.12	PK	V	4.22	47.34	74.00	26.66
15840.000	31.26	AV	V	4.22	35.48	54.00	18.52
High Channel:				5320	MHz		
10640.000	43.46	PK	H	3.46	46.92	74.00	27.08
10640.000	31.11	AV	H	3.46	34.57	54.00	19.43
10640.000	44.11	PK	V	3.46	47.57	74.00	26.43
10640.000	32.54	AV	V	3.46	36.00	54.00	18.00
15960.000	43.10	PK	H	4.44	47.54	74.00	26.46
15960.000	31.54	AV	H	4.44	35.98	54.00	18.02
15960.000	43.22	PK	V	4.44	47.66	74.00	26.34
15960.000	31.91	AV	V	4.44	36.35	54.00	17.65

802.11n ht40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5270	MHz		
10540.000	43.60	PK	H	2.94	46.54	68.20	21.66
10540.000	43.28	PK	V	2.94	46.22	68.20	21.98
15810.000	45.31	PK	H	4.07	49.38	74.00	24.62
15810.000	31.73	AV	H	4.07	35.80	54.00	18.20
15810.000	44.72	PK	V	4.07	48.79	74.00	25.21
15810.000	31.29	AV	V	4.07	35.36	54.00	18.64
High Channel:				5310	MHz		
10620.000	44.89	PK	H	3.38	48.27	74.00	25.73
10620.000	31.06	AV	H	3.38	34.44	54.00	19.56
10620.000	45.11	PK	V	3.38	48.49	74.00	25.51
10620.000	31.75	AV	V	3.38	35.13	54.00	18.87
15930.000	45.24	PK	H	4.49	49.73	74.00	24.27
15930.000	31.78	AV	H	4.49	36.27	54.00	17.73
15930.000	44.60	PK	V	4.49	49.09	74.00	24.91
15930.000	31.69	AV	V	4.49	36.18	54.00	17.82

802.11ac80 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Middle Channel:				5290	MHz		
10580.000	45.94	PK	H	3.17	49.11	68.20	19.09
10580.000	44.32	PK	V	3.17	47.49	68.20	20.71
15870.000	44.41	PK	H	4.37	48.78	74.00	25.22
15870.000	31.21	AV	H	4.37	35.58	54.00	18.42
15870.000	45.17	PK	V	4.37	49.54	74.00	24.46
15870.000	31.66	AV	V	4.37	36.03	54.00	17.97

802.11ax20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5260	MHz		
10520.000	45.30	PK	H	2.83	48.13	68.20	20.07
10520.000	45.42	PK	V	2.83	48.25	68.20	19.95
15780.000	44.61	PK	H	3.98	48.59	74.00	25.41
15780.000	32.15	AV	H	3.98	36.13	54.00	17.87
15780.000	45.16	PK	V	3.98	49.14	74.00	24.86
15780.000	32.16	AV	V	3.98	36.14	54.00	17.86
Middle Channel:				5280	MHz		
10560.000	45.18	PK	H	3.06	48.24	68.20	19.96
10560.000	45.54	PK	V	3.06	48.60	68.20	19.60
15840.000	44.83	PK	H	4.22	49.05	74.00	24.95
15840.000	31.31	AV	H	4.22	35.53	54.00	18.47
15840.000	44.11	PK	V	4.22	48.33	74.00	25.67
15840.000	31.39	AV	V	4.22	35.61	54.00	18.39
High Channel:				5320	MHz		
10640.000	44.51	PK	H	3.46	47.97	74.00	26.03
10640.000	31.72	AV	H	3.46	35.18	54.00	18.82
10640.000	44.62	PK	V	3.46	48.08	74.00	25.92
10640.000	31.88	AV	V	3.46	35.34	54.00	18.66
15960.000	44.64	PK	H	4.44	49.08	74.00	24.92
15960.000	31.18	AV	H	4.44	35.62	54.00	18.38
15960.000	44.32	PK	V	4.44	48.76	74.00	25.24
15960.000	31.32	AV	V	4.44	35.76	54.00	18.24

802.11ax40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5270	MHz		
10540.000	44.53	PK	H	2.94	47.47	68.20	20.73
10540.000	45.21	PK	V	2.94	48.15	68.20	20.05
15810.000	44.76	PK	H	4.07	48.83	74.00	25.17
15810.000	31.33	AV	H	4.07	35.40	54.00	18.60
15810.000	44.08	PK	V	4.07	48.15	74.00	25.85
15810.000	31.61	AV	V	4.07	35.68	54.00	18.32
High Channel:				5310	MHz		
10620.000	45.11	PK	H	3.38	48.49	74.00	25.51
10620.000	31.47	AV	H	3.38	34.85	54.00	19.15
10620.000	44.03	PK	V	3.38	47.41	74.00	26.59
10620.000	31.55	AV	V	3.38	34.93	54.00	19.07
15930.000	44.80	PK	H	4.49	49.29	74.00	24.71
15930.000	31.59	AV	H	4.49	36.08	54.00	17.92
15930.000	45.23	PK	V	4.49	49.72	74.00	24.28
15930.000	31.74	AV	V	4.49	36.23	54.00	17.77

802.11ax80 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Middle Channel:				5290	MHz		
10580.000	44.43	PK	H	3.17	47.60	68.20	20.60
10580.000	44.20	PK	V	3.17	47.37	68.20	20.83
15870.000	45.71	PK	H	4.37	50.08	74.00	23.92
15870.000	31.61	AV	H	4.37	35.98	54.00	18.02
15870.000	44.28	PK	V	4.37	48.65	74.00	25.35
15870.000	31.24	AV	V	4.37	35.61	54.00	18.39

5470-5725MHz**802.11a Mode Chain 0:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel: 5500 MHz							
11000.000	45.81	PK	H	3.90	49.71	74.00	24.29
11000.000	32.36	AV	H	3.90	36.26	54.00	17.74
11000.000	44.46	PK	V	3.90	48.36	74.00	25.64
11000.000	32.61	AV	V	3.90	36.51	54.00	17.49
16500.000	44.77	PK	H	5.33	50.10	68.20	18.10
16500.000	45.30	PK	V	5.33	50.63	68.20	17.57
Middle Channel: 5580 MHz							
11160.000	45.52	PK	H	3.62	49.14	74.00	24.86
11160.000	32.38	AV	H	3.62	36.00	54.00	18.00
11160.000	45.84	PK	V	3.62	49.46	74.00	24.54
11160.000	32.53	AV	V	3.62	36.15	54.00	17.85
16740.000	44.47	PK	H	6.57	51.04	68.20	17.16
16740.000	45.07	PK	V	6.57	51.64	68.20	16.56
High Channel: 5700 MHz							
11400.000	43.99	PK	H	4.62	48.61	74.00	25.39
11400.000	31.12	AV	H	4.62	35.74	54.00	18.26
11400.000	44.08	PK	V	4.62	48.70	74.00	25.30
11400.000	31.06	AV	V	4.62	35.68	54.00	18.32
17100.000	44.84	PK	H	8.19	53.03	68.20	15.17
17100.000	44.66	PK	V	8.19	52.85	68.20	15.35

802.11a Mode Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5500	MHz		
11000.000	45.58	PK	H	3.90	49.48	74.00	24.52
11000.000	32.63	AV	H	3.90	36.53	54.00	17.47
11000.000	45.49	PK	V	3.90	49.39	74.00	24.61
11000.000	32.36	AV	V	3.90	36.26	54.00	17.74
16500.000	44.73	PK	H	5.33	50.06	68.20	18.14
16500.000	45.22	PK	V	5.33	50.55	68.20	17.65
Middle Channel:				5580	MHz		
11160.000	45.33	PK	H	3.62	48.95	74.00	25.05
11160.000	32.47	AV	H	3.62	36.09	54.00	17.91
11160.000	45.25	PK	V	3.62	48.87	74.00	25.13
11160.000	32.52	AV	V	3.62	36.14	54.00	17.86
16740.000	44.72	PK	H	6.57	51.29	68.20	16.91
16740.000	44.83	PK	V	6.57	51.40	68.20	16.80
High Channel:				5700	MHz		
11400.000	44.12	PK	H	4.62	48.74	74.00	25.26
11400.000	31.02	AV	H	4.62	35.64	54.00	18.36
11400.000	44.51	PK	V	4.62	49.13	74.00	24.87
11400.000	32.06	AV	V	4.62	36.68	54.00	17.32
17100.000	45.07	PK	H	8.19	53.26	68.20	14.94
17100.000	44.93	PK	V	8.19	53.12	68.20	15.08

802.11n ht20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5500	MHz		
11000.000	45.59	PK	H	3.90	49.49	74.00	24.51
11000.000	32.35	AV	H	3.90	36.25	54.00	17.75
11000.000	44.90	PK	V	3.90	48.80	74.00	25.20
11000.000	32.21	AV	V	3.90	36.11	54.00	17.89
16500.000	45.47	PK	H	5.33	50.80	68.20	17.40
16500.000	45.30	PK	V	5.33	50.63	68.20	17.57
Middle Channel:				5580	MHz		
11160.000	45.63	PK	H	3.62	49.25	74.00	24.75
11160.000	32.49	AV	H	3.62	36.11	54.00	17.89
11160.000	45.51	PK	V	3.62	49.13	74.00	24.87
11160.000	32.50	AV	V	3.62	36.12	54.00	17.88
16740.000	45.47	PK	H	6.57	52.04	68.20	16.16
16740.000	44.98	PK	V	6.57	51.55	68.20	16.65
High Channel:				5700	MHz		
11400.000	44.61	PK	H	4.62	49.23	74.00	24.77
11400.000	31.12	AV	H	4.62	35.74	54.00	18.26
11400.000	44.12	PK	V	4.62	48.74	74.00	25.26
11400.000	31.51	AV	V	4.62	36.13	54.00	17.87
17100.000	44.74	PK	H	8.19	52.93	68.20	15.27
17100.000	44.78	PK	V	8.19	52.97	68.20	15.23

802.11n ht40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5510	MHz		
11020.000	45.01	PK	H	3.78	48.79	74.00	25.21
11020.000	32.41	AV	H	3.78	36.19	54.00	17.81
11020.000	45.67	PK	V	3.78	49.45	74.00	24.55
11020.000	32.31	AV	V	3.78	36.09	54.00	17.91
16530.000	44.25	PK	H	5.58	49.83	68.20	18.37
16530.000	44.59	PK	V	5.58	50.17	68.20	18.03
Middle Channel:				5550	MHz		
11100.000	45.57	PK	H	3.28	48.85	74.00	25.15
11100.000	32.55	AV	H	3.28	35.83	54.00	18.17
11100.000	45.06	PK	V	3.28	48.34	74.00	25.66
11100.000	32.05	AV	V	3.28	35.33	54.00	18.67
16650.000	44.57	PK	H	6.26	50.83	68.20	17.37
16650.000	44.74	PK	V	6.26	51.00	68.20	17.20
High Channel:				5670	MHz		
11340.000	45.10	PK	H	4.49	49.59	74.00	24.41
11340.000	31.52	AV	H	4.49	36.01	54.00	17.99
11340.000	44.36	PK	V	4.49	48.85	74.00	25.15
11340.000	31.29	AV	V	4.49	35.78	54.00	18.22
17010.000	44.59	PK	H	7.85	52.44	68.20	15.76
17010.000	45.33	PK	V	7.85	53.18	68.20	15.02

802.11ac80 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5530	MHz		
11060.000	45.75	PK	H	3.53	49.28	74.00	24.72
11060.000	32.48	AV	H	3.53	36.01	54.00	17.99
11060.000	45.24	PK	V	3.53	48.77	74.00	25.23
11060.000	32.01	AV	V	3.53	35.54	54.00	18.46
16590.000	44.13	PK	H	6.08	50.21	68.20	17.99
16590.000	45.32	PK	V	6.08	51.40	68.20	16.80
High Channel:				5610	MHz		
11220.000	45.38	PK	H	3.96	49.34	74.00	24.66
11220.000	32.33	AV	H	3.96	36.29	54.00	17.71
11220.000	44.86	PK	V	3.96	48.82	74.00	25.18
11220.000	32.32	AV	V	3.96	36.28	54.00	17.72
16830.000	44.51	PK	H	7.27	51.78	68.20	16.42
16830.000	45.20	PK	V	7.27	52.47	68.20	15.73

802.11ax20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel: 5500 MHz							
11000.000	45.20	PK	H	3.90	49.10	74.00	24.90
11000.000	32.35	AV	H	3.90	36.25	54.00	17.75
11000.000	45.03	PK	V	3.90	48.93	74.00	25.07
11000.000	32.13	AV	V	3.90	36.03	54.00	17.97
16500.000	45.14	PK	H	5.33	50.47	68.20	17.73
16500.000	44.71	PK	V	5.33	50.04	68.20	18.16
Middle Channel: 5580 MHz							
11160.000	45.31	PK	H	3.62	48.93	74.00	25.07
11160.000	32.50	AV	H	3.62	36.12	54.00	17.88
11160.000	45.57	PK	V	3.62	49.19	74.00	24.81
11160.000	32.18	AV	V	3.62	35.80	54.00	18.20
16740.000	44.89	PK	H	6.57	51.46	68.20	16.74
16740.000	45.15	PK	V	6.57	51.72	68.20	16.48
High Channel: 5700 MHz							
11400.000	43.63	PK	H	4.62	48.25	74.00	25.75
11400.000	31.11	AV	H	4.62	35.73	54.00	18.27
11400.000	44.37	PK	V	4.62	48.99	74.00	25.01
11400.000	31.04	AV	V	4.62	35.66	54.00	18.34
17100.000	44.58	PK	H	8.19	52.77	68.20	15.43
17100.000	44.81	PK	V	8.19	53.00	68.20	15.20

802.11ax40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5510	MHz		
11020.000	45.25	PK	H	3.78	49.03	74.00	24.97
11020.000	32.30	AV	H	3.78	36.08	54.00	17.92
11020.000	45.31	PK	V	3.78	49.09	74.00	24.91
11020.000	32.47	AV	V	3.78	36.25	54.00	17.75
16530.000	44.20	PK	H	5.58	49.78	68.20	18.42
16530.000	44.75	PK	V	5.58	50.33	68.20	17.87
Middle Channel:				5550	MHz		
11100.000	45.42	PK	H	3.28	48.70	74.00	25.30
11100.000	32.55	AV	H	3.28	35.83	54.00	18.17
11100.000	45.92	PK	V	3.28	49.20	74.00	24.80
11100.000	32.01	AV	V	3.28	35.29	54.00	18.71
16650.000	44.58	PK	H	6.26	50.84	68.20	17.36
16650.000	44.23	PK	V	6.26	50.49	68.20	17.71
High Channel:				5670	MHz		
11340.000	44.57	PK	H	4.49	49.06	74.00	24.94
11340.000	31.59	AV	H	4.49	36.08	54.00	17.92
11340.000	45.24	PK	V	4.49	49.73	74.00	24.27
11340.000	32.65	AV	V	4.49	37.14	54.00	16.86
17010.000	44.74	PK	H	7.85	52.59	68.20	15.61
17010.000	44.86	PK	V	7.85	52.71	68.20	15.49

802.11ax80 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5530	MHz		
11060.000	45.21	PK	H	3.53	48.74	74.00	25.26
11060.000	32.65	AV	H	3.53	36.18	54.00	17.82
11060.000	45.85	PK	V	3.53	49.38	74.00	24.62
11060.000	32.36	AV	V	3.53	35.89	54.00	18.11
16590.000	44.12	PK	H	6.08	50.20	68.20	18.00
16590.000	45.37	PK	V	6.08	51.45	68.20	16.75
High Channel:				5610	MHz		
11220.000	44.87	PK	H	3.96	48.83	74.00	25.17
11220.000	31.45	AV	H	3.96	35.41	54.00	18.59
11220.000	44.56	PK	V	3.96	48.52	74.00	25.48
11220.000	31.02	AV	V	3.96	34.98	54.00	19.02
16830.000	44.52	PK	H	7.27	51.79	68.20	16.41
16830.000	45.13	PK	V	7.27	52.40	68.20	15.80

5725-5850MHz**802.11a Mode Chain 0:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5745	MHz		
11490.000	44.39	PK	H	4.77	49.16	74.00	24.84
11490.000	31.47	AV	H	4.77	36.24	54.00	17.76
11490.000	44.90	PK	V	4.77	49.67	74.00	24.33
11490.000	31.53	AV	V	4.77	36.30	54.00	17.70
17235.000	44.42	PK	H	9.20	53.62	68.20	14.58
17235.000	44.31	PK	V	9.20	53.51	68.20	14.69
Middle Channel:				5785	MHz		
11570.000	44.16	PK	H	5.25	49.41	74.00	24.59
11570.000	31.44	AV	H	5.25	36.69	54.00	17.31
11570.000	44.52	PK	V	5.25	49.77	74.00	24.23
11570.000	31.50	AV	V	5.25	36.75	54.00	17.25
17355.000	44.86	PK	H	10.13	54.99	68.20	13.21
17355.000	44.12	PK	V	10.13	54.25	68.20	13.95
High Channel:				5825	MHz		
11650.000	45.63	PK	H	5.55	51.18	74.00	22.82
11650.000	32.68	AV	H	5.55	38.23	54.00	15.77
11650.000	45.84	PK	V	5.55	51.39	74.00	22.61
11650.000	32.50	AV	V	5.55	38.05	54.00	15.95
17475.000	44.49	PK	H	10.91	55.40	68.20	12.80
17475.000	45.21	PK	V	10.91	56.12	68.20	12.08

802.11a Mode Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5745	MHz		
11490.000	44.83	PK	H	4.77	49.60	74.00	24.40
11490.000	31.52	AV	H	4.77	36.29	54.00	17.71
11490.000	44.57	PK	V	4.77	49.34	74.00	24.66
11490.000	31.75	AV	V	4.77	36.52	54.00	17.48
17235.000	44.20	PK	H	9.20	53.40	68.20	14.80
17235.000	43.83	PK	V	9.20	53.03	68.20	15.17
Middle Channel:				5785	MHz		
11570.000	44.15	PK	H	5.25	49.40	74.00	24.60
11570.000	31.59	AV	H	5.25	36.84	54.00	17.16
11570.000	44.07	PK	V	5.25	49.32	74.00	24.68
11570.000	31.56	AV	V	5.25	36.81	54.00	17.19
17355.000	44.76	PK	H	10.13	54.89	68.20	13.31
17355.000	45.26	PK	V	10.13	55.39	68.20	12.81
High Channel:				5825	MHz		
11650.000	45.76	PK	H	5.55	51.31	74.00	22.69
11650.000	32.47	AV	H	5.55	38.02	54.00	15.98
11650.000	44.98	PK	V	5.55	50.53	74.00	23.47
11650.000	31.22	AV	V	5.55	36.77	54.00	17.23
17475.000	45.45	PK	H	10.91	56.36	68.20	11.84
17475.000	44.47	PK	V	10.91	55.38	68.20	12.82

802.11n ht20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5745	MHz		
11490.000	44.14	PK	H	4.77	48.91	74.00	25.09
11490.000	31.02	AV	H	4.77	35.79	54.00	18.21
11490.000	44.28	PK	V	4.77	49.05	74.00	24.95
11490.000	31.65	AV	V	4.77	36.42	54.00	17.58
17235.000	44.46	PK	H	9.20	53.66	68.20	14.54
17235.000	45.31	PK	V	9.20	54.51	68.20	13.69
Middle Channel:				5785	MHz		
11570.000	44.27	PK	H	5.25	49.52	74.00	24.48
11570.000	31.25	AV	H	5.25	36.50	54.00	17.50
11570.000	45.89	PK	V	5.25	51.14	74.00	22.86
11570.000	32.75	AV	V	5.25	38.00	54.00	16.00
17355.000	44.42	PK	H	10.13	54.55	68.20	13.65
17355.000	45.06	PK	V	10.13	55.19	68.20	13.01
High Channel:				5825	MHz		
11650.000	45.24	PK	H	5.55	50.79	74.00	23.21
11650.000	32.04	AV	H	5.55	37.59	54.00	16.41
11650.000	45.38	PK	V	5.55	50.93	74.00	23.07
11650.000	32.59	AV	V	5.55	38.14	54.00	15.86
17475.000	45.40	PK	H	10.91	56.31	68.20	11.89
17475.000	44.37	PK	V	10.91	55.28	68.20	12.92

802.11n ht40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5755	MHz		
11510.000	45.17	PK	H	4.86	50.03	74.00	23.97
11510.000	32.55	AV	H	4.86	37.41	54.00	16.59
11510.000	44.87	PK	V	4.86	49.73	74.00	24.27
11510.000	31.53	AV	V	4.86	36.39	54.00	17.61
17265.000	45.26	PK	H	9.40	54.66	68.20	13.54
17265.000	44.37	PK	V	9.40	53.77	68.20	14.43
High Channel:				5795	MHz		
11590.000	44.64	PK	H	5.38	50.02	74.00	23.98
11590.000	31.56	AV	H	5.38	36.94	54.00	17.06
11590.000	45.03	PK	V	5.38	50.41	74.00	23.59
11590.000	32.78	AV	V	5.38	38.16	54.00	15.84
17385.000	45.65	PK	H	10.41	56.06	68.20	12.14
17385.000	44.79	PK	V	10.41	55.20	68.20	13.00

802.11ac80 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Middle Channel:				5775	MHz		
11550.000	45.20	PK	H	5.12	50.32	74.00	23.68
11550.000	32.74	AV	H	5.12	37.86	54.00	16.14
11550.000	44.92	PK	V	5.12	50.04	74.00	23.96
11550.000	31.71	AV	V	5.12	36.83	54.00	17.17
17325.000	44.53	PK	H	9.86	54.39	68.20	13.81
17325.000	45.39	PK	V	9.86	55.25	68.20	12.95

802.11ax20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5745	MHz		
11490.000	44.54	PK	H	4.77	49.31	74.00	24.69
11490.000	31.58	AV	H	4.77	36.35	54.00	17.65
11490.000	44.76	PK	V	4.77	49.53	74.00	24.47
11490.000	31.25	AV	V	4.77	36.02	54.00	17.98
17235.000	44.65	PK	H	9.20	53.85	68.20	14.35
17235.000	45.49	PK	V	9.20	54.69	68.20	13.51
Middle Channel:				5785	MHz		
11570.000	45.21	PK	H	5.25	50.46	74.00	23.54
11570.000	32.37	AV	H	5.25	37.62	54.00	16.38
11570.000	44.96	PK	V	5.25	50.21	74.00	23.79
11570.000	31.24	AV	V	5.25	36.49	54.00	17.51
17355.000	44.38	PK	H	10.13	54.51	68.20	13.69
17355.000	45.16	PK	V	10.13	55.29	68.20	12.91
High Channel:				5825	MHz		
11650.000	44.71	PK	H	5.55	50.26	74.00	23.74
11650.000	31.28	AV	H	5.55	36.83	54.00	17.17
11650.000	44.54	PK	V	5.55	50.09	74.00	23.91
11650.000	32.63	AV	V	5.55	38.18	54.00	15.82
17475.000	45.71	PK	H	10.91	56.62	68.20	11.58
17475.000	44.02	PK	V	10.91	54.93	68.20	13.27

802.11ax40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5755	MHz		
11510.000	44.59	PK	H	4.86	49.45	74.00	24.55
11510.000	31.32	AV	H	4.86	36.18	54.00	17.82
11510.000	45.08	PK	V	4.86	49.94	74.00	24.06
11510.000	31.24	AV	V	4.86	36.10	54.00	17.90
17265.000	44.41	PK	H	9.40	53.81	68.20	14.39
17265.000	45.57	PK	V	9.40	54.97	68.20	13.23
High Channel:				5795	MHz		
11590.000	43.67	PK	H	5.38	49.05	74.00	24.95
11590.000	31.58	AV	H	5.38	36.96	54.00	17.04
11590.000	44.56	PK	V	5.38	49.94	74.00	24.06
11590.000	31.74	AV	V	5.38	37.12	54.00	16.88
17385.000	45.29	PK	H	10.41	55.70	68.20	12.50
17385.000	45.81	PK	V	10.41	56.22	68.20	11.98


802.11ax80 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Middle Channel:				5775	MHz		
11550.000	44.91	PK	H	5.12	50.03	74.00	23.97
11550.000	31.58	AV	H	5.12	36.70	54.00	17.30
11550.000	44.25	PK	V	5.12	49.37	74.00	24.63
11550.000	31.76	AV	V	5.12	36.88	54.00	17.12
17325.000	45.61	PK	H	9.86	55.47	68.20	12.73
17325.000	44.16	PK	V	9.86	54.02	68.20	14.18


Worst radiation spurious emissions margin test plots for each mode

Note: for 18 – 40 GHz range, test was performed on the maximum power mode.

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: a High Channel 5240MHz Band 1 Chain 0

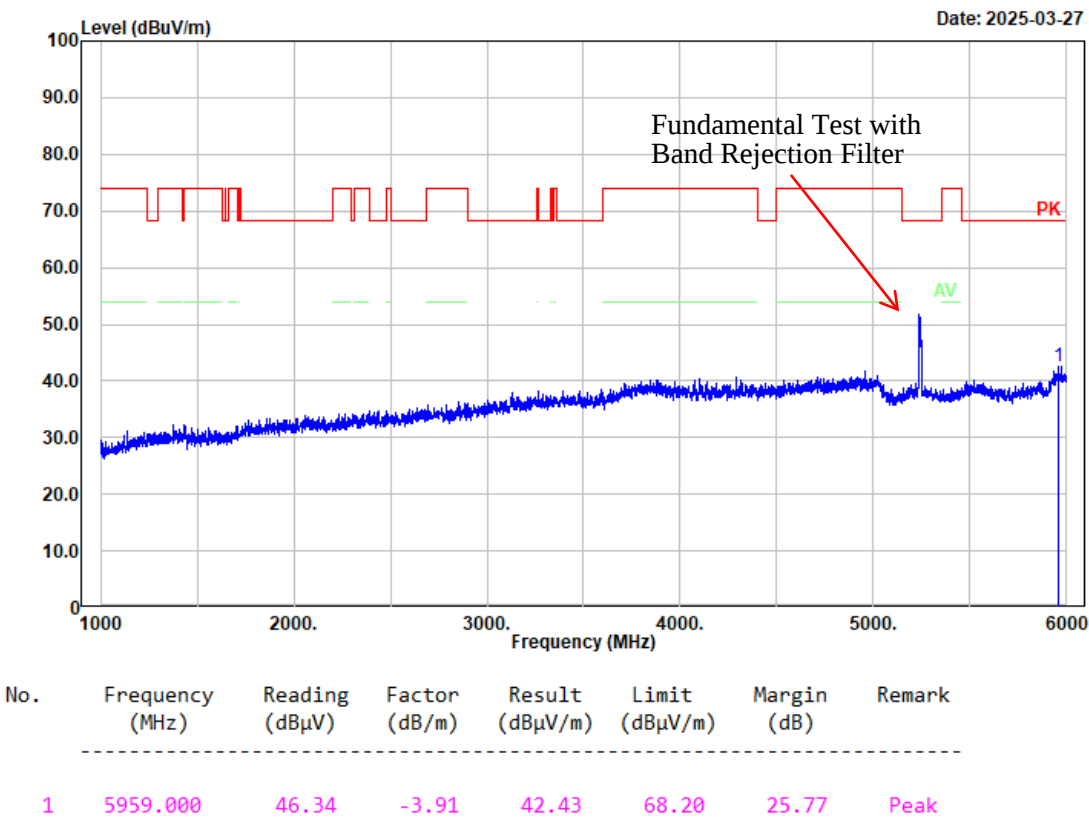


Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: a High Channel 5240MHz Band 1 Chain 0

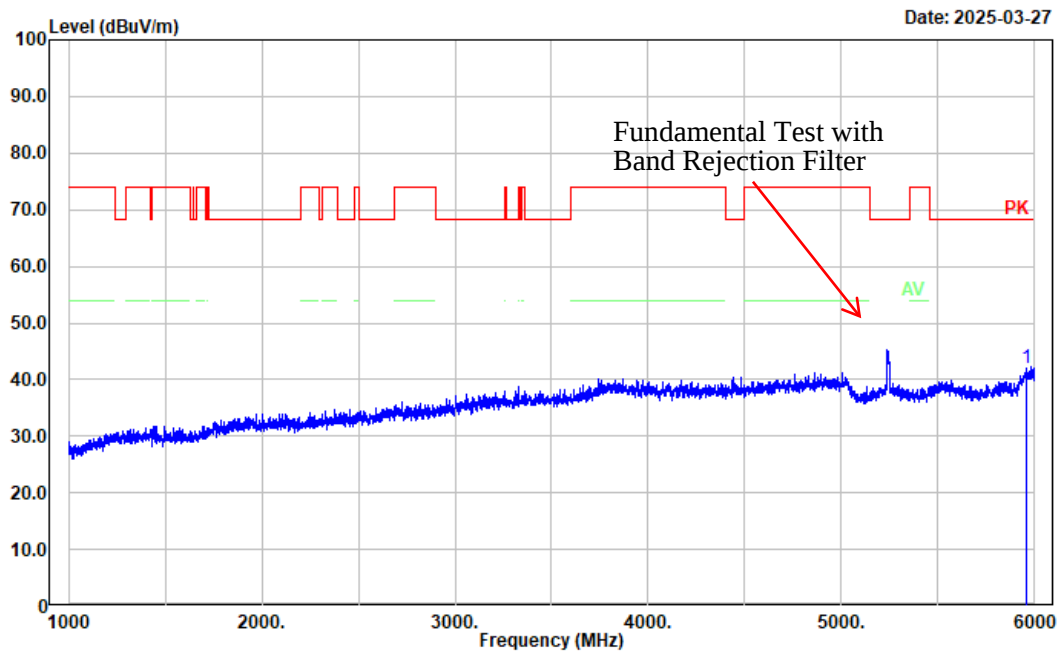


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5961.000	45.80	-3.92	41.88	68.20	26.32	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: a High Channel 5240MHz Band 1 Chain 0

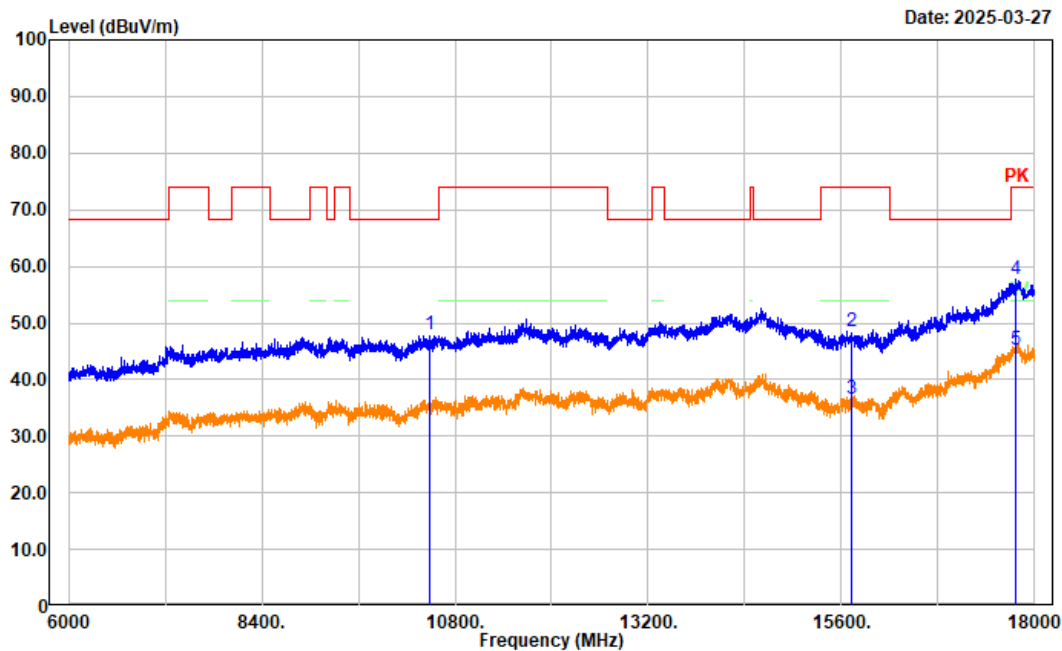


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10480.000	45.27	2.58	47.85	68.20	20.35	Peak
2	15720.000	44.57	3.83	48.40	74.00	25.60	Peak
3	15720.000	32.86	3.83	36.69	54.00	17.31	Average
4	17769.600	44.41	13.41	57.82	74.00	16.18	Peak
5	17769.600	31.80	13.41	45.21	54.00	8.79	Average

Project No.: 2503Q19064E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: vertical
 Note: a High Channel 5240MHz Band 1 Chain 0

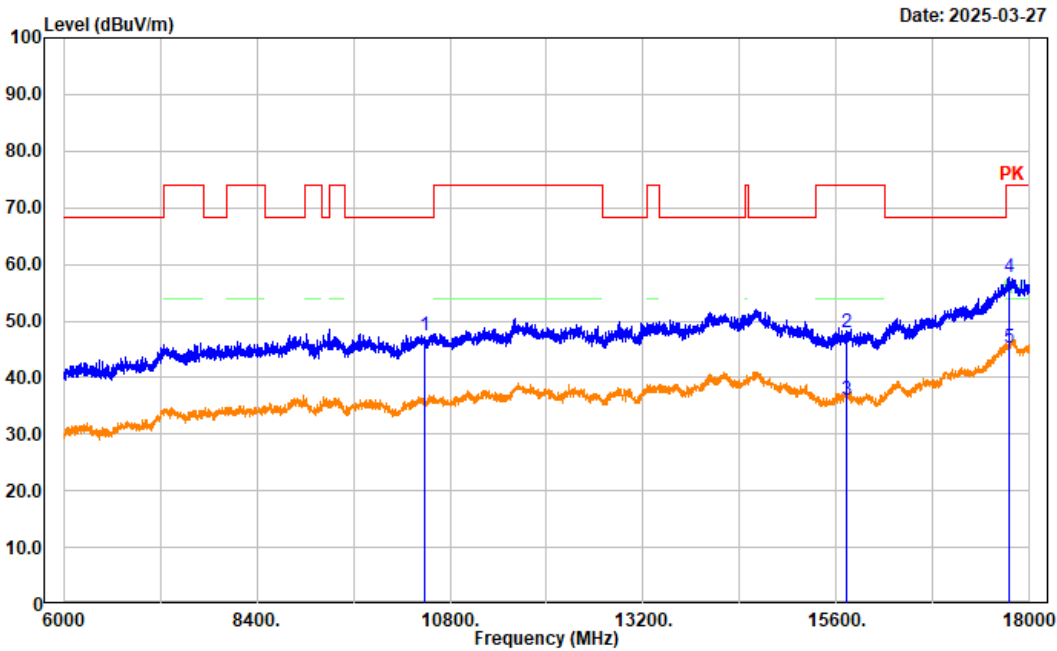


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10480.000	44.92	2.58	47.50	68.20	20.70	Peak
2	15720.000	44.10	3.83	47.93	74.00	26.07	Peak
3	15720.000	32.15	3.83	35.98	54.00	18.02	Average
4	17748.000	44.38	13.30	57.68	74.00	16.32	Peak
5	17748.000	32.06	13.30	45.36	54.00	8.64	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: a High Channel 5240MHz Band 1 Chain 1

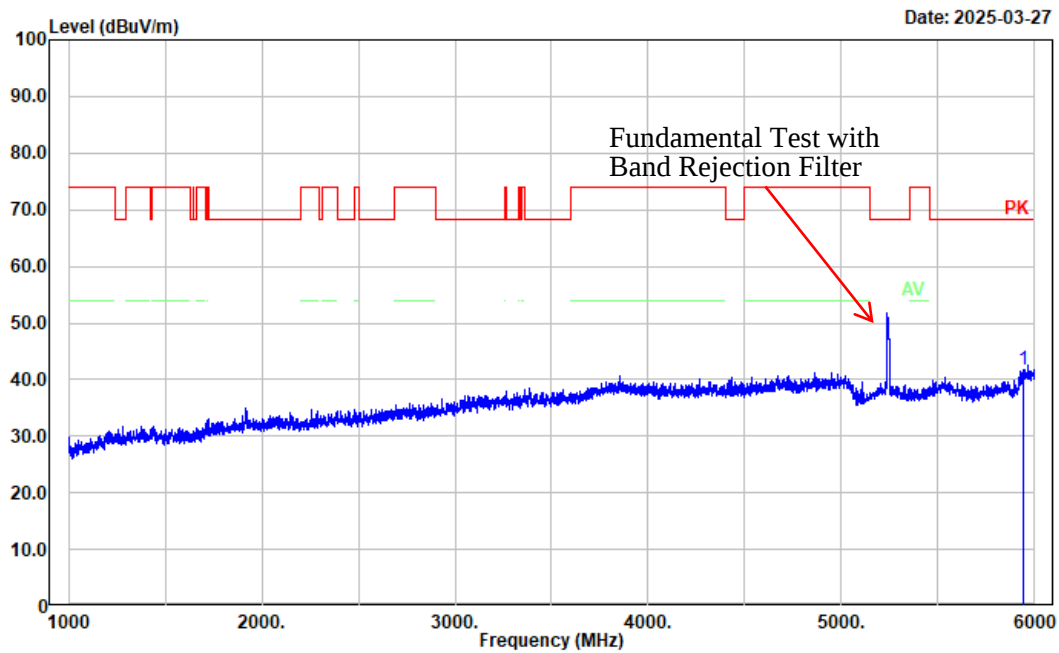


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5938.000	45.63	-3.99	41.64	68.20	26.56	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: a High Channel 5240MHz Band 1 Chain 1

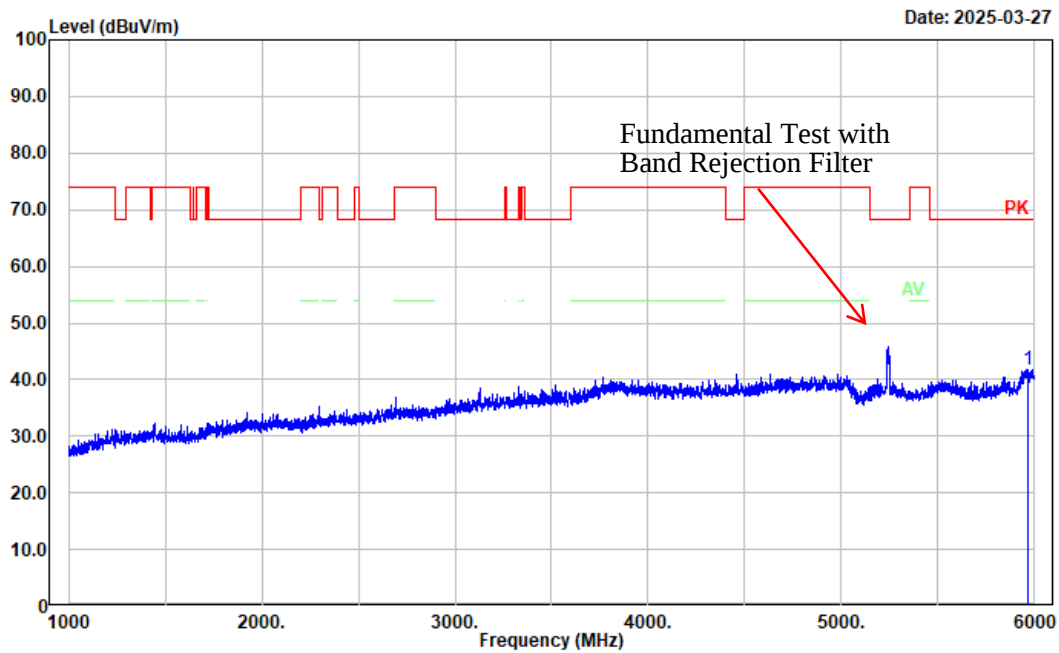


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5964.000	45.75	-3.94	41.81	68.20	26.39	Peak

Project No.: 2503Q19064E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: a High Channel 5240MHz Band 1 Chain 1

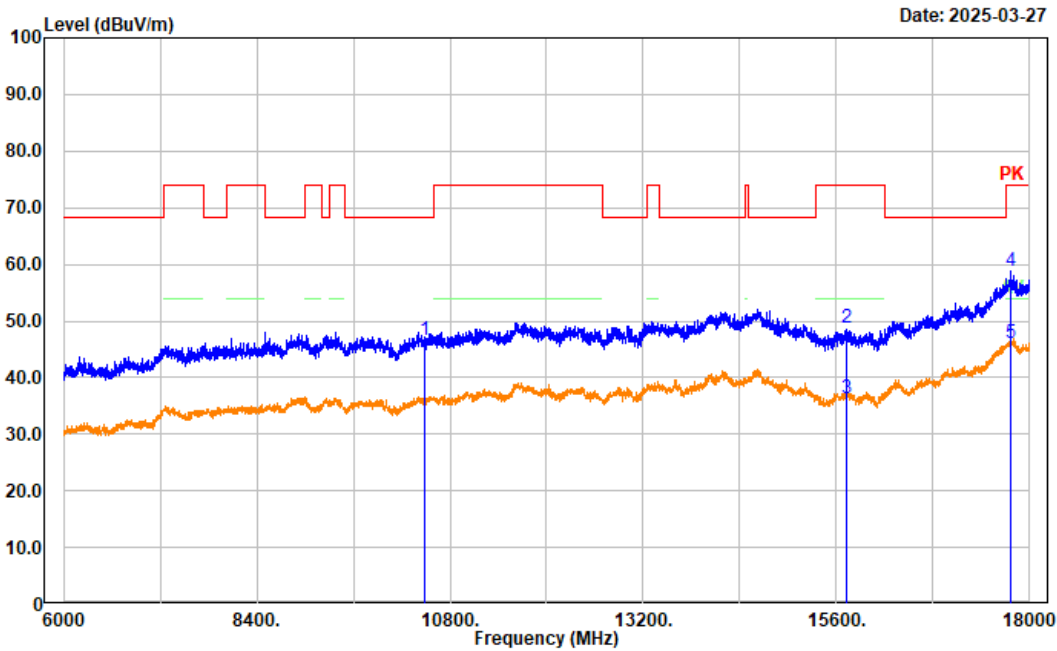


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10480.000	44.10	2.58	46.68	68.20	21.52	Peak
2	15720.000	44.83	3.83	48.66	74.00	25.34	Peak
3	15720.000	32.54	3.83	36.37	54.00	17.63	Average
4	17767.200	45.46	13.39	58.85	74.00	15.15	Peak
5	17767.200	32.68	13.39	46.07	54.00	7.93	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: a High Channel 5240MHz Band 1 Chain 1

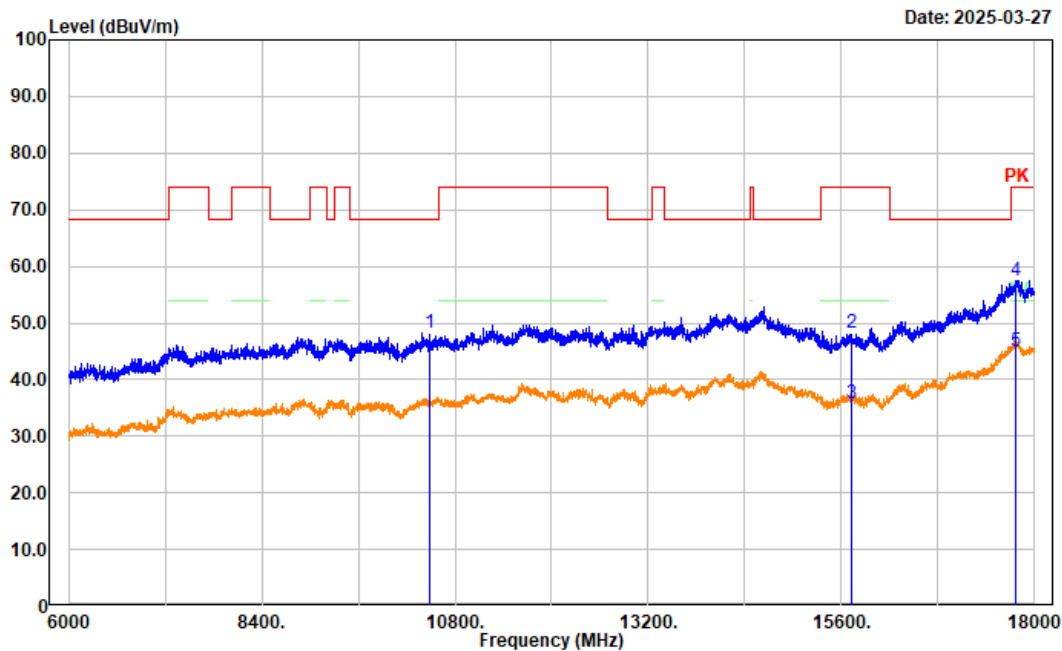


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10480.000	45.63	2.58	48.21	68.20	19.99	Peak
2	15720.000	44.38	3.83	48.21	74.00	25.79	Peak
3	15720.000	32.05	3.83	35.88	54.00	18.12	Average
4	17772.000	44.12	13.42	57.54	74.00	16.46	Peak
5	17772.000	31.67	13.42	45.09	54.00	8.91	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: n20 High Channel 5240MHz Band 1

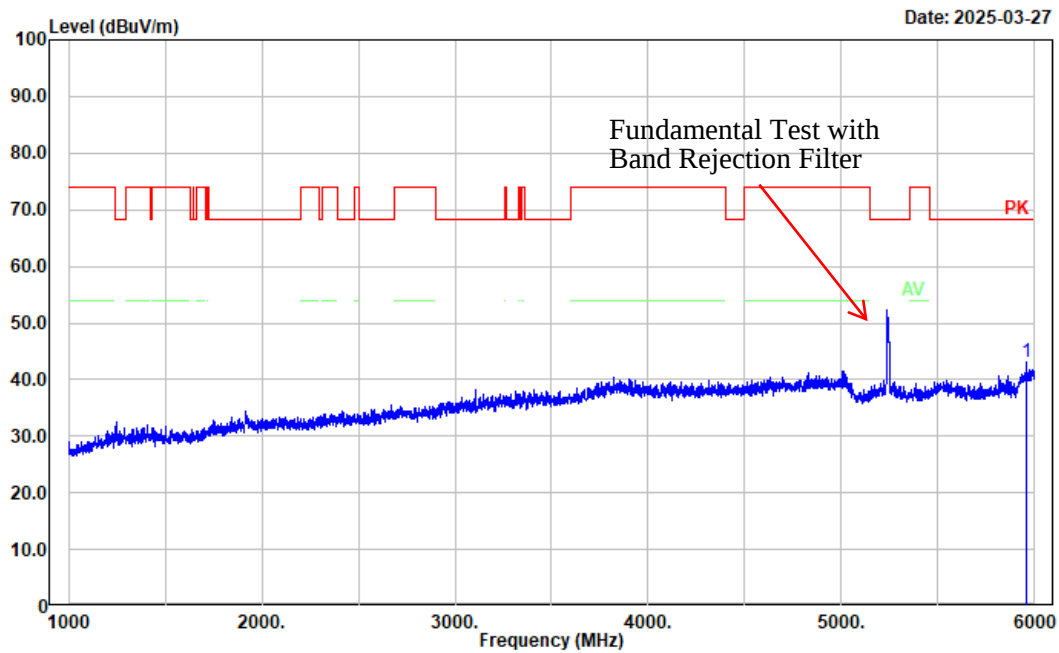


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5957.000	46.86	-3.90	42.96	68.20	25.24	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: n20 High Channel 5240MHz Band 1

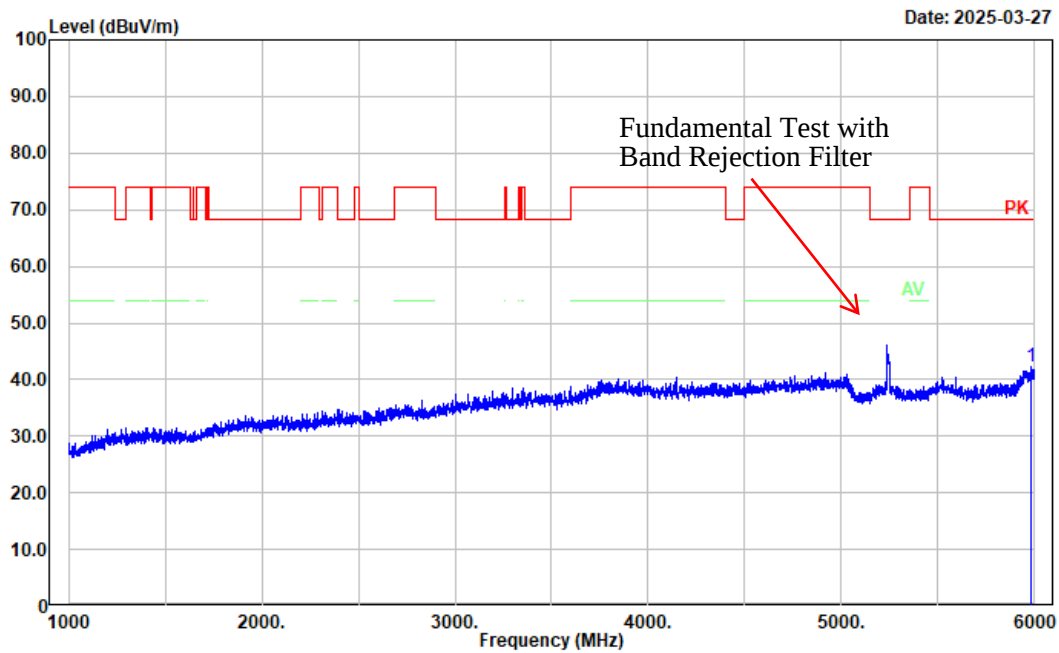


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5981.000	46.43	-4.04	42.39	68.20	25.81	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: n20 High Channel 5240MHz Band 1

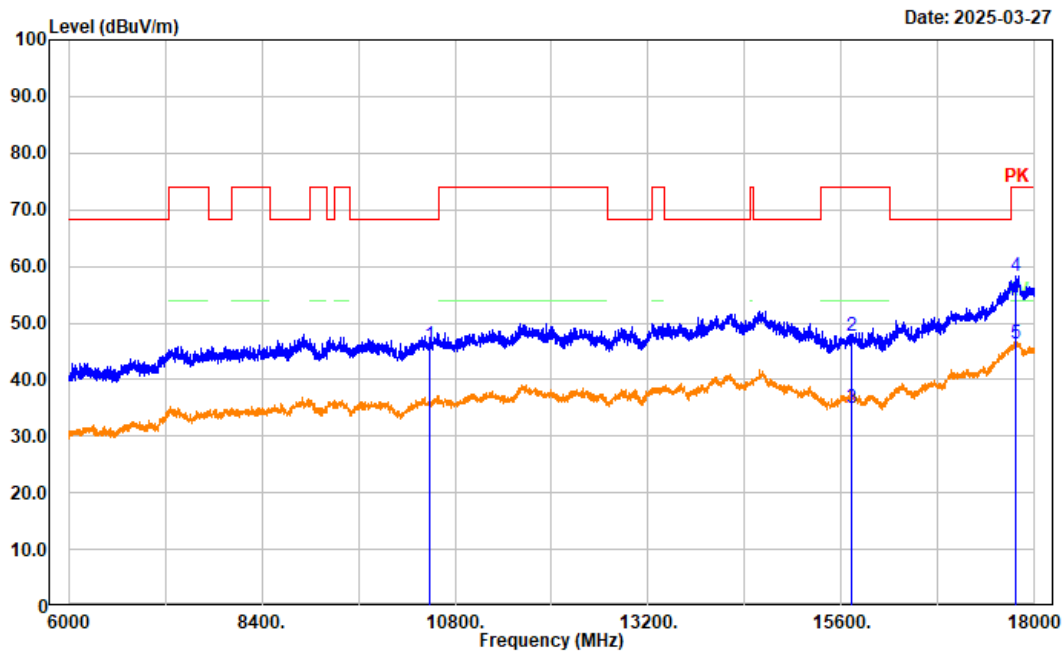


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10480.000	43.60	2.58	46.18	68.20	22.02	Peak
2	15720.000	43.81	3.83	47.64	74.00	26.36	Peak
3	15720.000	31.02	3.83	34.85	54.00	19.15	Average
4	17772.000	44.88	13.42	58.30	74.00	15.70	Peak
5	17772.000	32.85	13.42	46.27	54.00	7.73	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: n20 High Channel 5240MHz Band 1

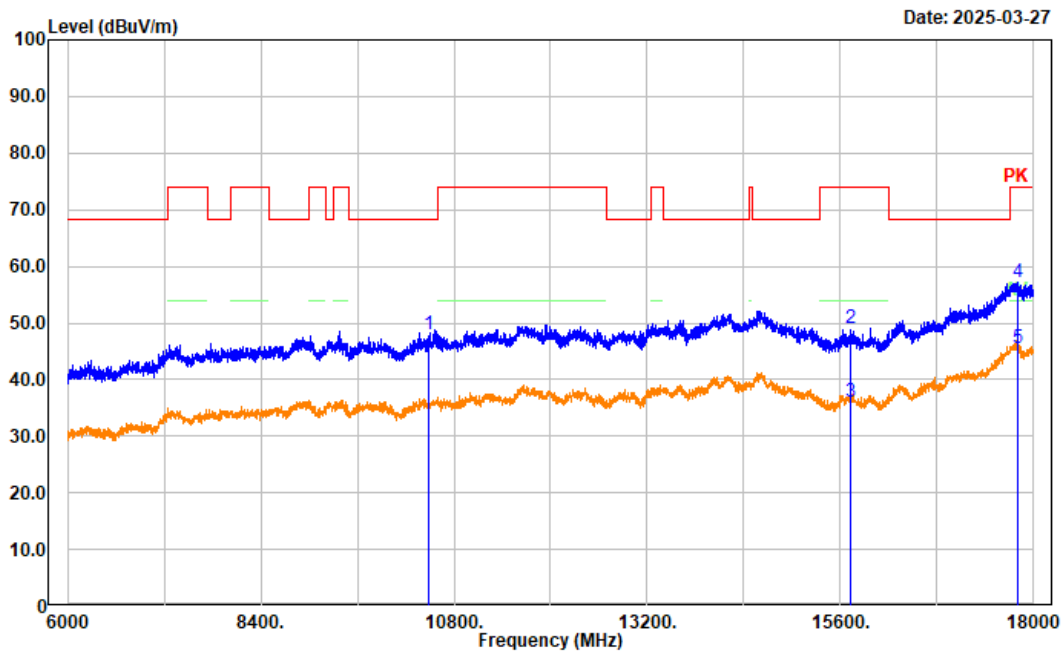


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10480.000	45.44	2.58	48.02	68.20	20.18	Peak
2	15720.000	45.18	3.83	49.01	74.00	24.99	Peak
3	15720.000	32.23	3.83	36.06	54.00	17.94	Average
4	17803.200	43.61	13.55	57.16	74.00	16.84	Peak
5	17803.200	32.02	13.55	45.57	54.00	8.43	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: n40 Low Channel 5190MHz Band 1

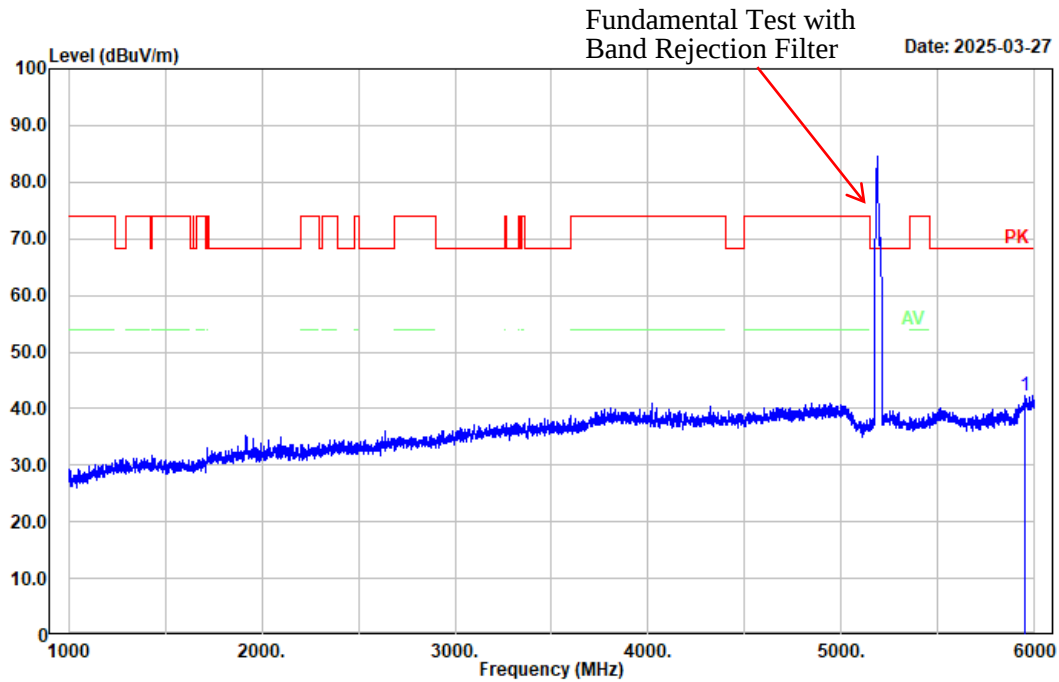


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5952.000	46.18	-3.87	42.31	68.20	25.89	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: n40 Low Channel 5190MHz Band 1

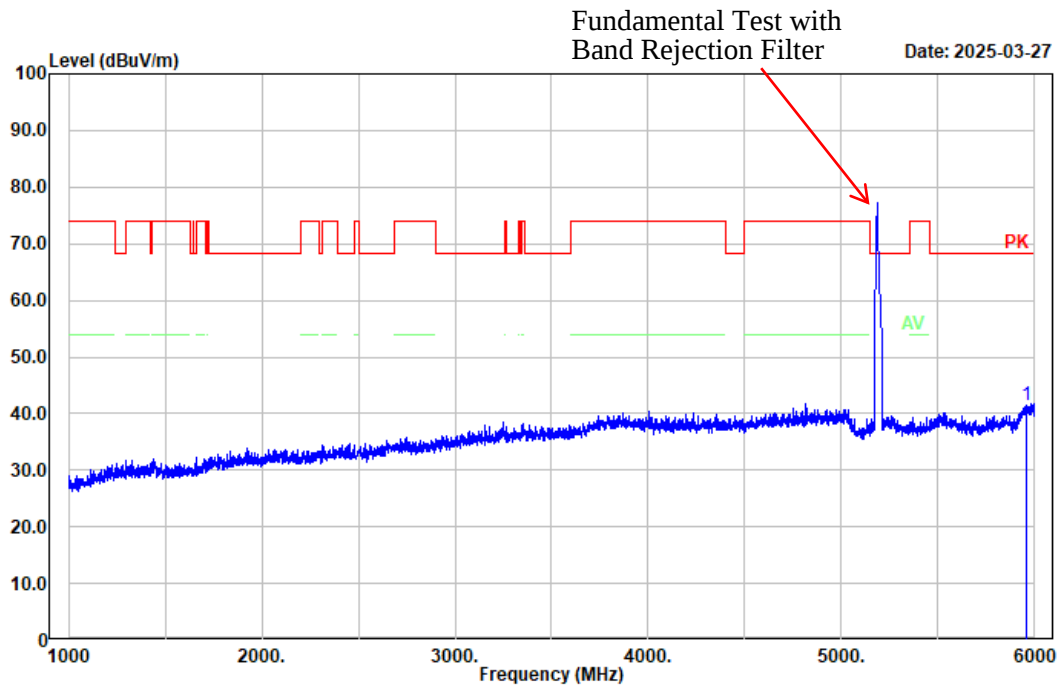


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5961.000	45.40	-3.92	41.48	68.20	26.72	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: n40 Low Channel 5190MHz Band 1

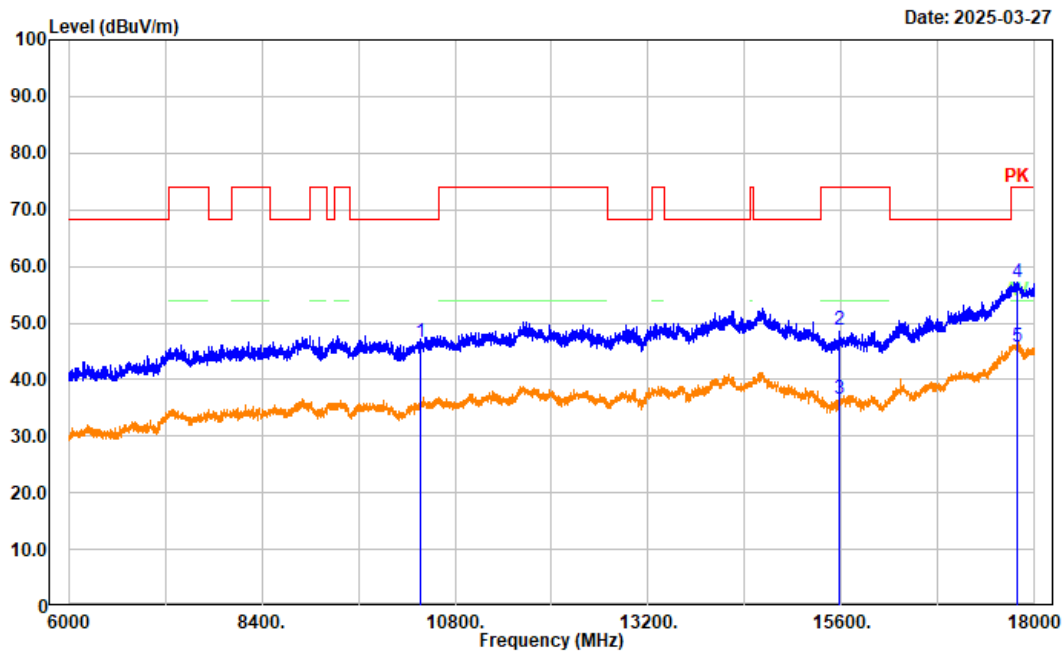


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10380.000	44.59	2.04	46.63	68.20	21.57	Peak
2	15570.000	44.81	4.00	48.81	74.00	25.19	Peak
3	15570.000	32.58	4.00	36.58	54.00	17.42	Average
4	17776.800	43.86	13.44	57.30	74.00	16.70	Peak
5	17776.800	32.38	13.44	45.82	54.00	8.18	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: n40 Low Channel 5190MHz Band 1

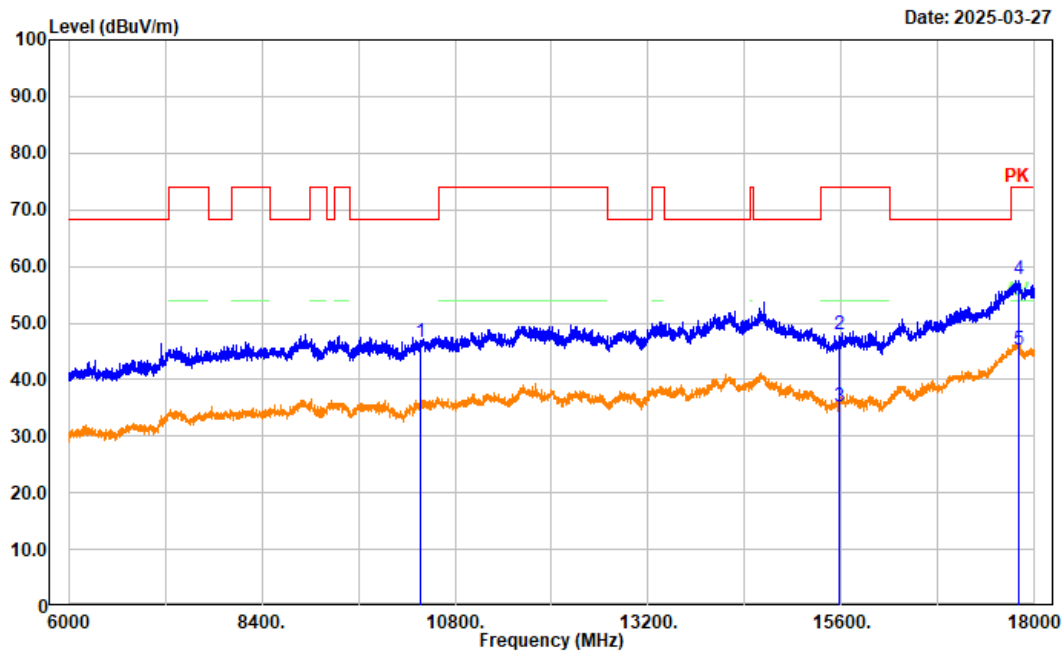

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10380.000	44.45	2.04	46.49	68.20	21.71	Peak
2	15570.000	44.05	4.00	48.05	74.00	25.95	Peak
3	15570.000	31.26	4.00	35.26	54.00	18.74	Average
4	17808.000	44.04	13.55	57.59	74.00	16.41	Peak
5	17808.000	31.72	13.55	45.27	54.00	8.73	Average


Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ac80 Middle Channel 5210MHz Band 1

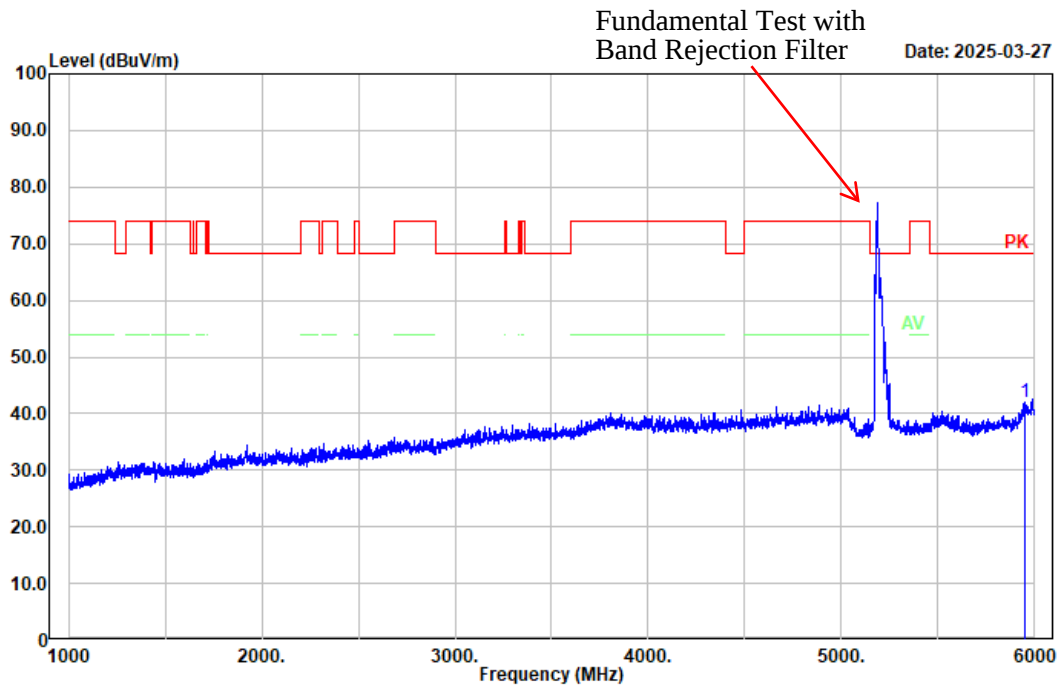

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5951.000	45.89	-3.85	42.04	68.20	26.16	Peak


Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ac80 Middle Channel 5210MHz Band 1

Fundamental Test with
Band Rejection Filter Date: 2025-03-27

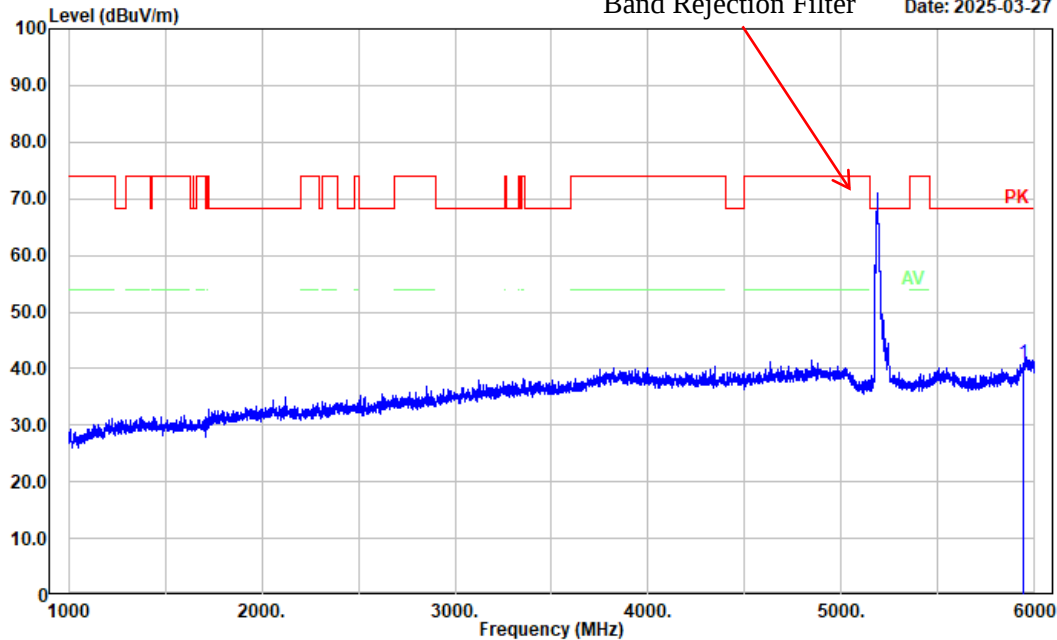


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5939.000	44.88	-3.97	40.91	68.20	27.29	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: ac80 Middle Channel 5210MHz Band 1

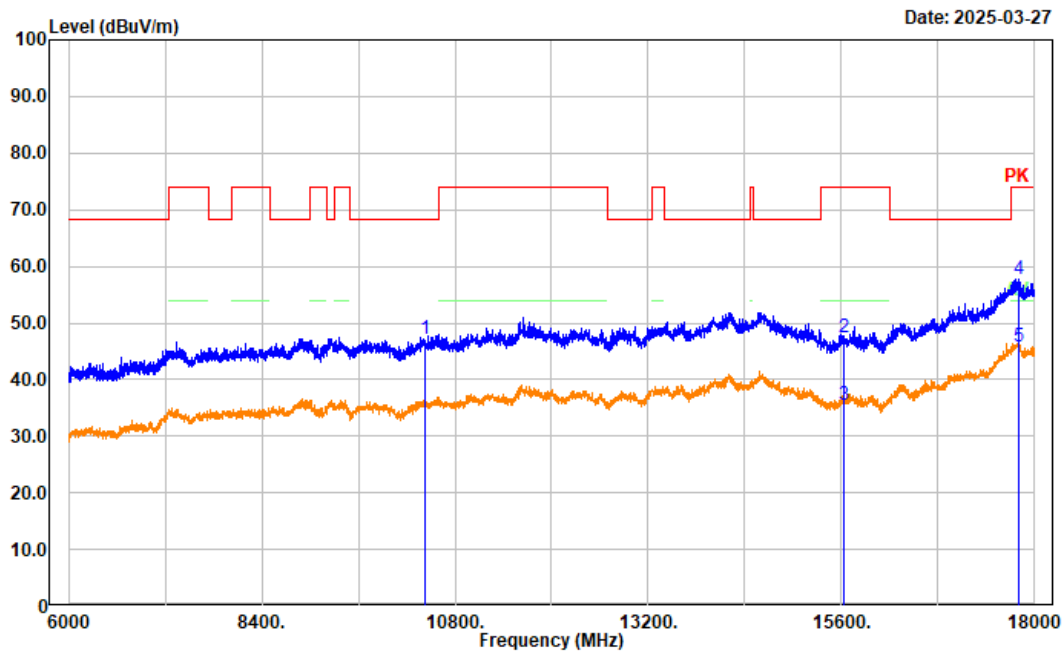

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10420.000	44.91	2.20	47.11	68.20	21.09	Peak
2	15630.000	43.57	3.88	47.45	74.00	26.55	Peak
3	15630.000	31.75	3.88	35.63	54.00	18.37	Average
4	17810.400	44.24	13.55	57.79	74.00	16.21	Peak
5	17810.400	32.13	13.55	45.68	54.00	8.32	Average


Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ac80 Middle Channel 5210MHz Band 1

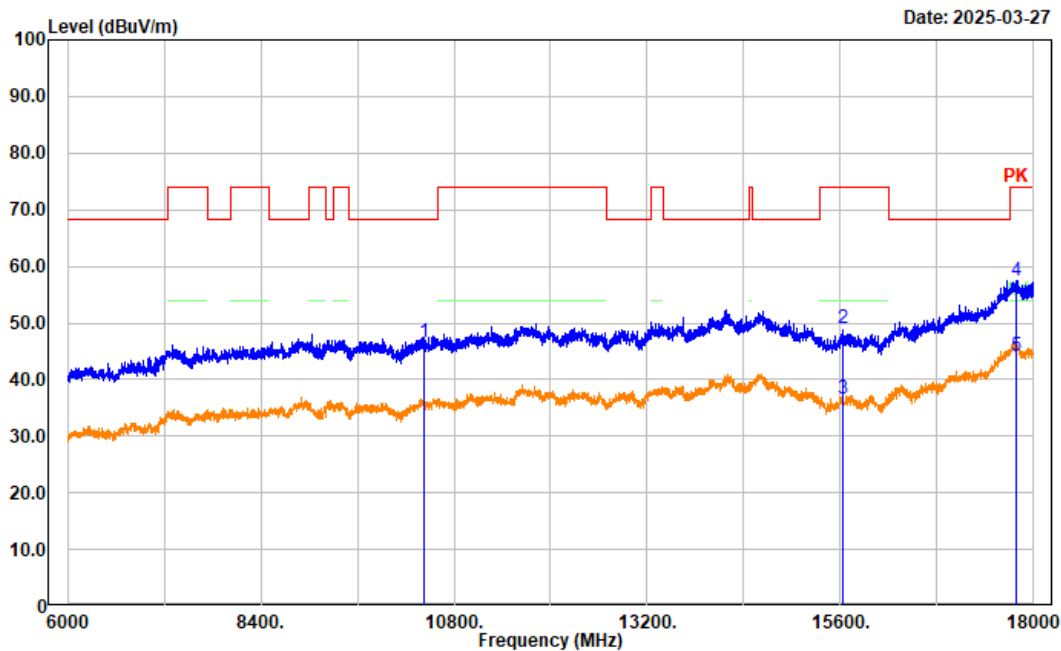

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10420.000	44.52	2.20	46.72	68.20	21.48	Peak
2	15630.000	45.24	3.88	49.12	74.00	24.88	Peak
3	15630.000	32.63	3.88	36.51	54.00	17.49	Average
4	17780.400	44.12	13.45	57.57	74.00	16.43	Peak
5	17780.400	30.76	13.45	44.21	54.00	9.79	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax20 Low Channel 5180MHz Band 1


Fundamental Test with
Band Rejection Filter Date: 2025-03-27

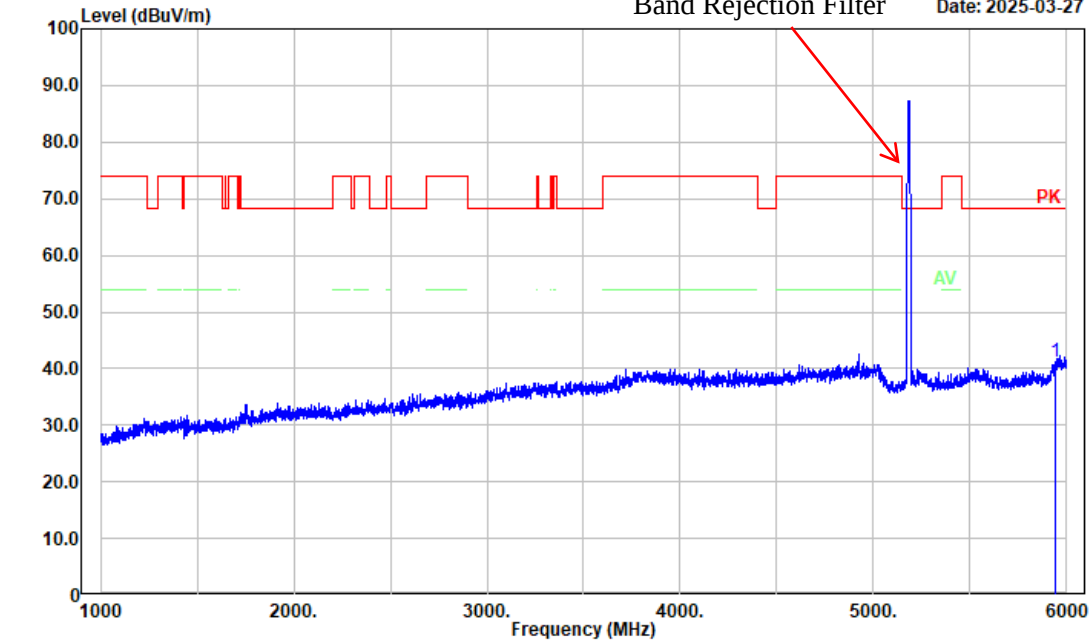

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5945.000	45.20	-3.90	41.30	68.20	26.90	Peak


Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax20 Low Channel 5180MHz Band 1

Fundamental Test with
Band Rejection Filter Date: 2025-03-27

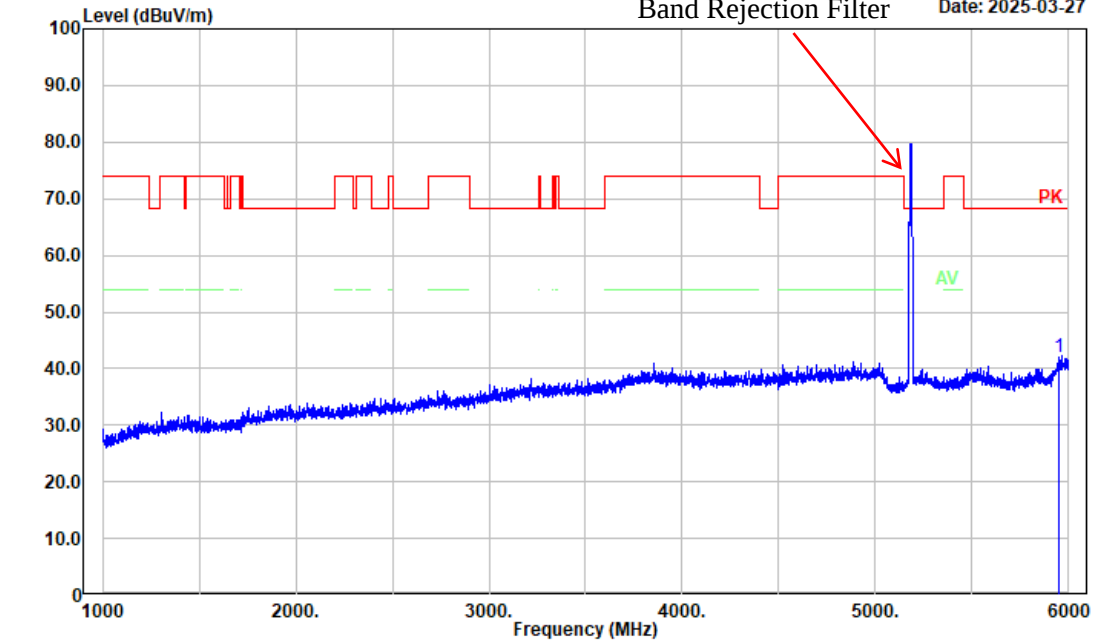


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5952.000	45.80	-3.87	41.93	68.20	26.27	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: ax20 Low Channel 5180MHz Band 1

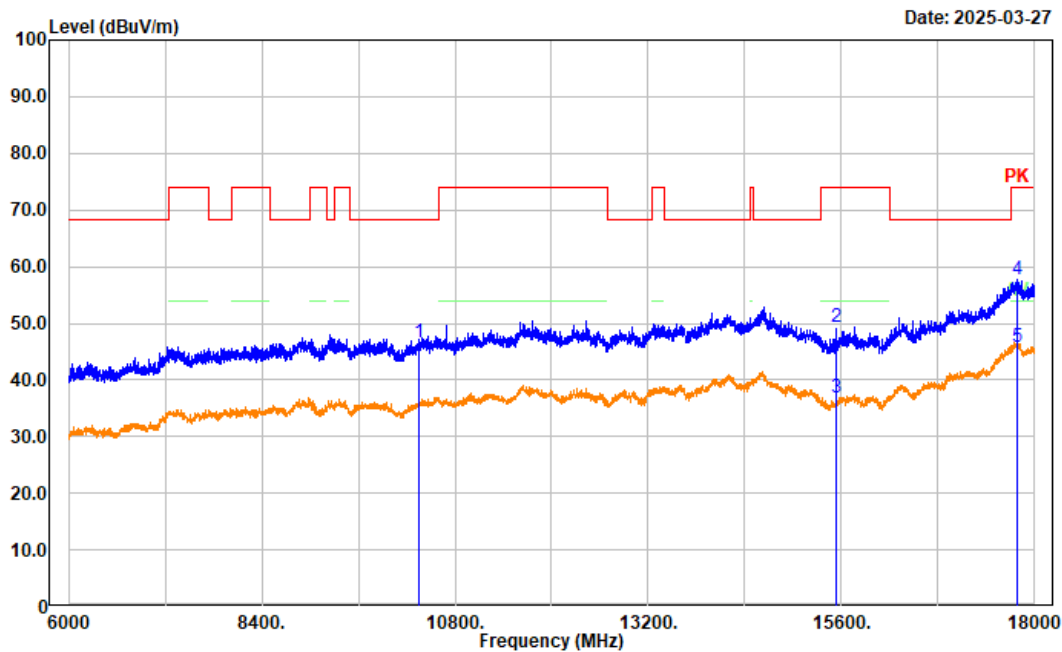


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10360.000	44.62	2.01	46.63	68.20	21.57	Peak
2	15540.000	45.27	4.08	49.35	74.00	24.65	Peak
3	15540.000	32.86	4.08	36.94	54.00	17.06	Average
4	17776.800	44.32	13.44	57.76	74.00	16.24	Peak
5	17776.800	32.23	13.44	45.67	54.00	8.33	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ax20 Low Channel 5180MHz Band 1

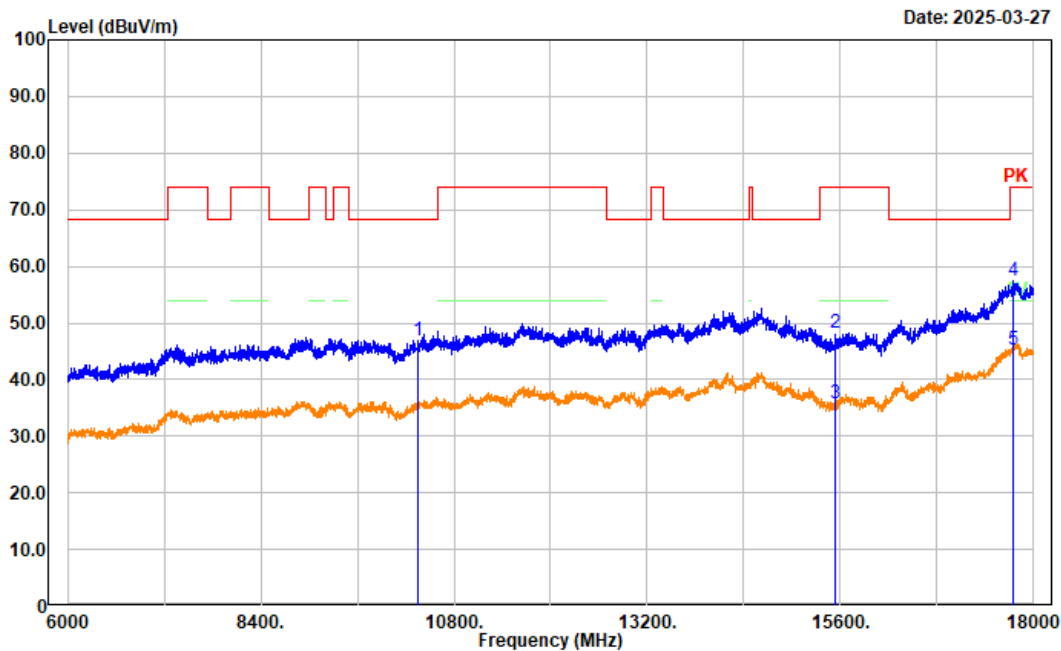


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10360.000	44.83	2.01	46.84	68.20	21.36	Peak
2	15540.000	44.29	4.08	48.37	74.00	25.63	Peak
3	15540.000	31.73	4.08	35.81	54.00	18.19	Average
4	17750.400	44.13	13.31	57.44	74.00	16.56	Peak
5	17750.400	31.98	13.31	45.29	54.00	8.71	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax40 High Channel 5230MHz Band 1

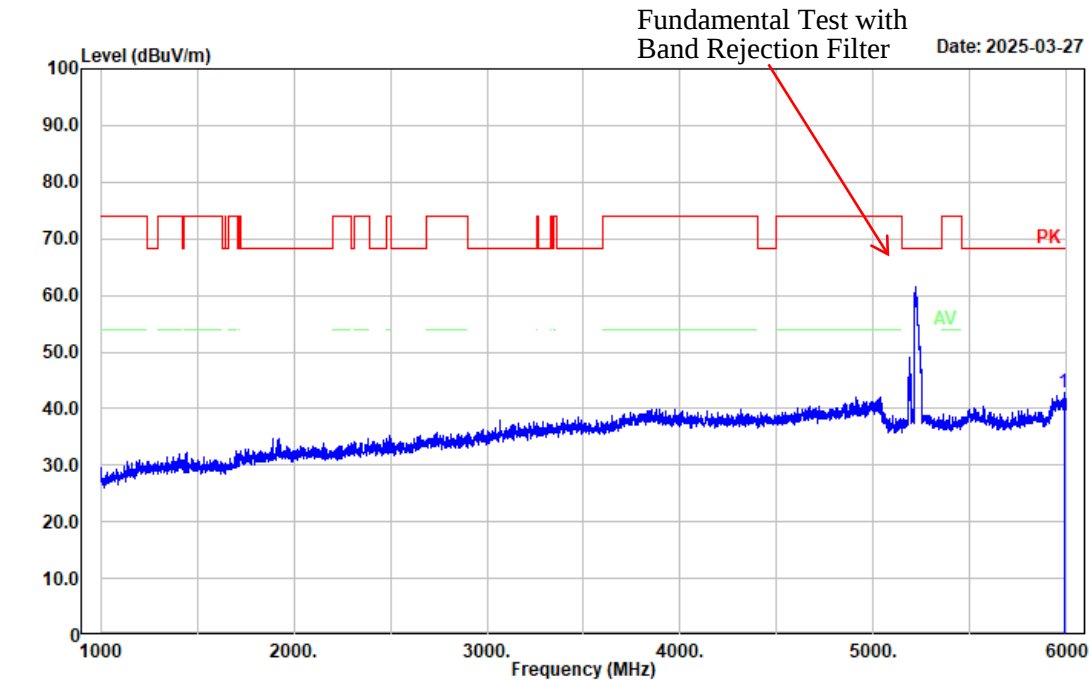


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5985.000	46.95	-4.07	42.88	68.20	25.32	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax40 High Channel 5230MHz Band 1

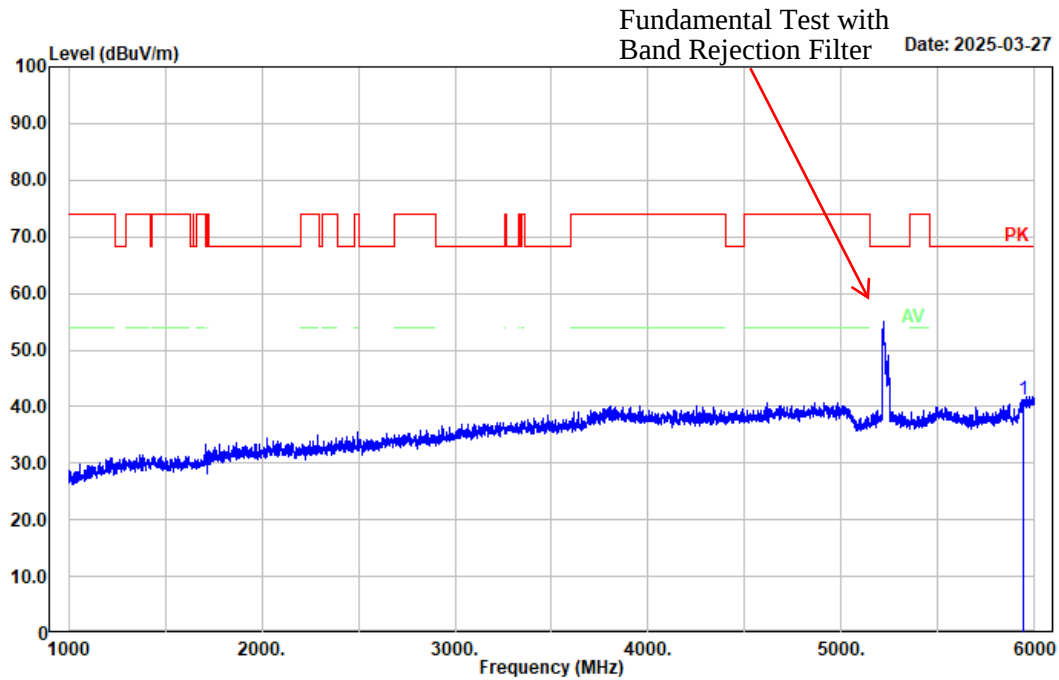


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5944.000	45.18	-3.92	41.26	68.20	26.94	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: ax40 High Channel 5230MHz Band 1

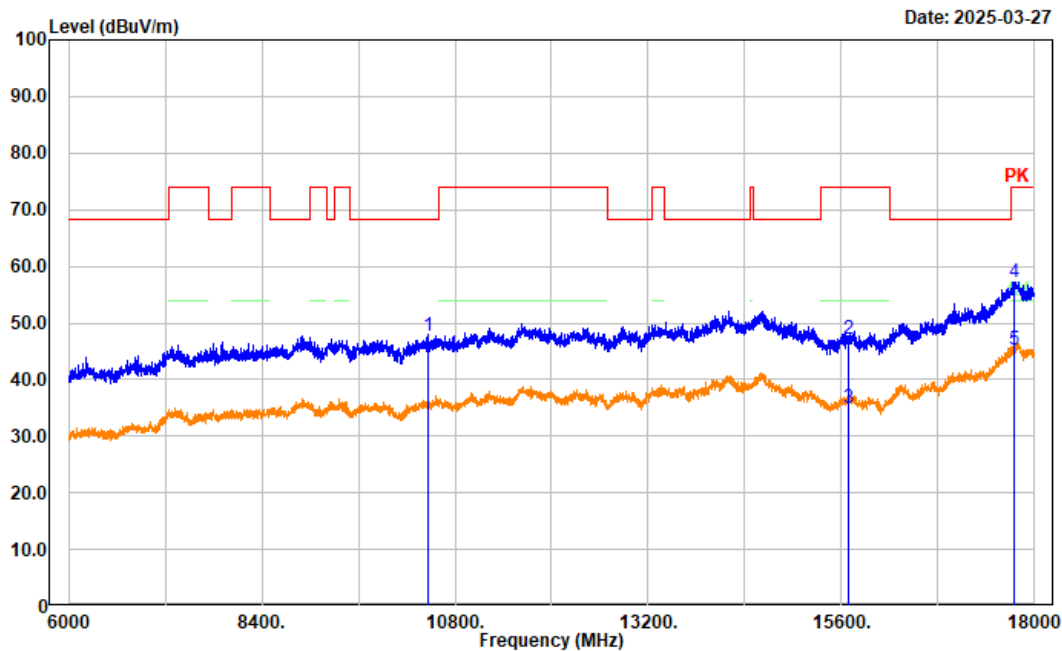


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10460.000	45.22	2.46	47.68	68.20	20.52	Peak
2	15690.000	43.42	3.80	47.22	74.00	26.78	Peak
3	15690.000	31.03	3.80	34.83	54.00	19.17	Average
4	17736.000	44.03	13.25	57.28	74.00	16.72	Peak
5	17736.000	32.11	13.25	45.36	54.00	8.64	Average

Project No.: 2503Q19064E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: vertical
 Note: ax40 High Channel 5230MHz Band 1

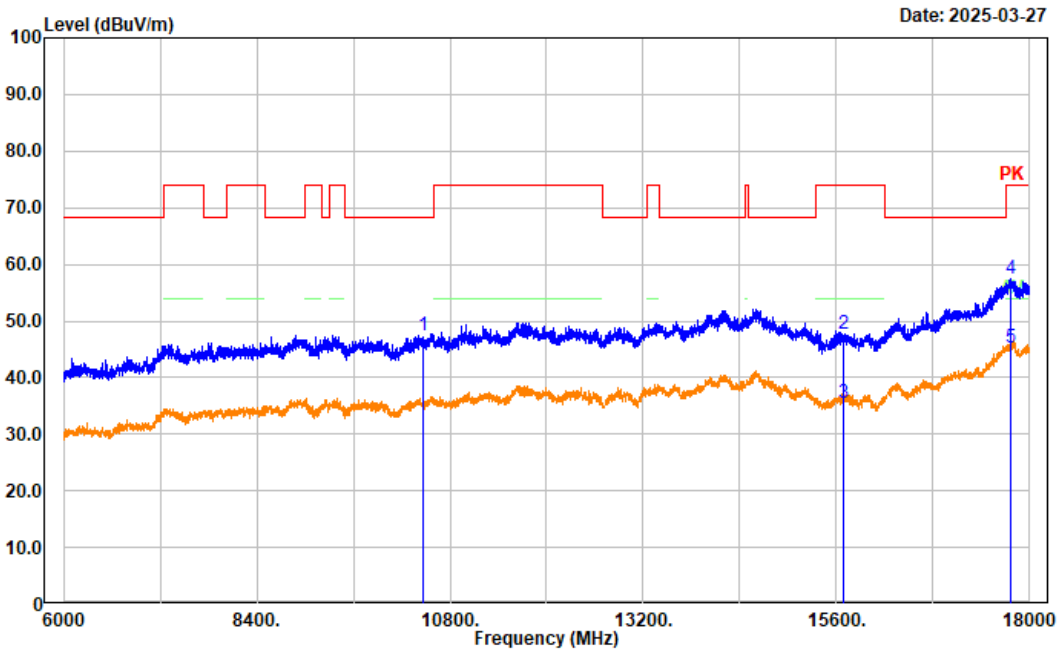


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10460.000	44.96	2.46	47.42	68.20	20.78	Peak
2	15690.000	43.85	3.80	47.65	74.00	26.35	Peak
3	15690.000	31.69	3.80	35.49	54.00	18.51	Average
4	17760.000	44.10	13.36	57.46	74.00	16.54	Peak
5	17760.000	31.92	13.36	45.28	54.00	8.72	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax80 Middle Channel 5210MHz Band 1

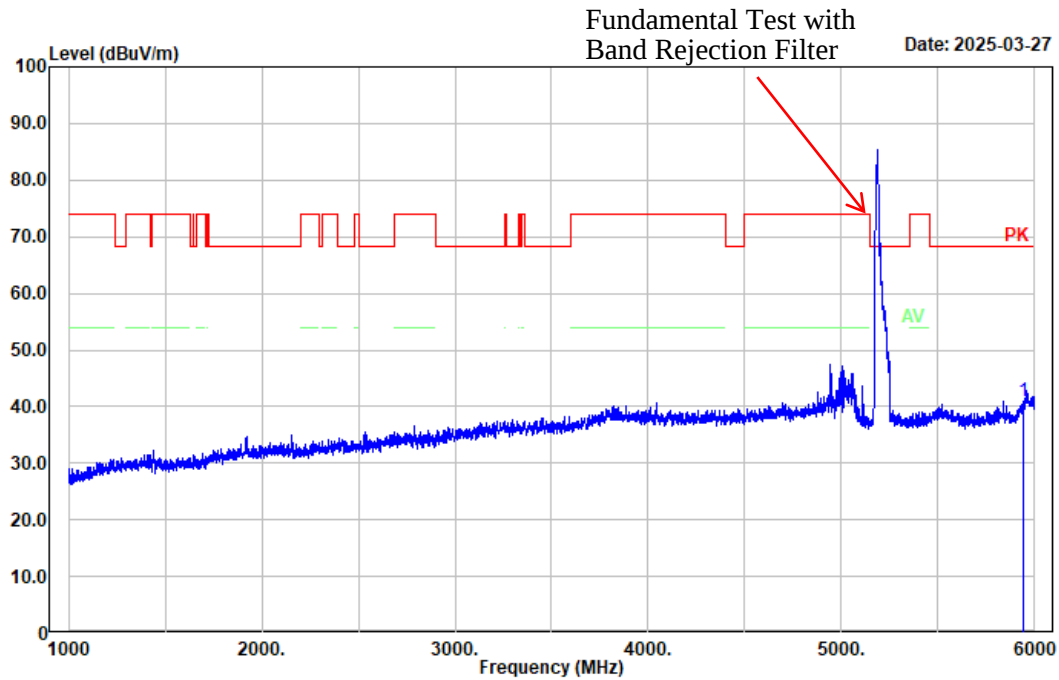


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5941.000	44.83	-3.96	40.87	68.20	27.33	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax80 Middle Channel 5210MHz Band 1

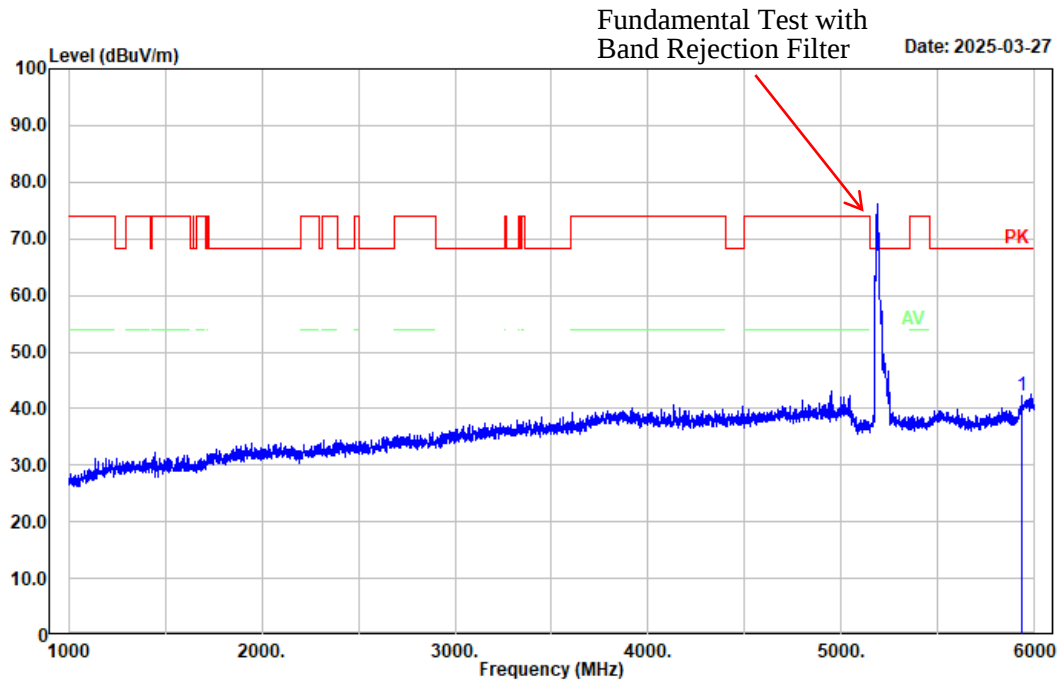


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5934.000	46.20	-4.03	42.17	68.20	26.03	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: ax80 Middle Channel 5210MHz Band 1

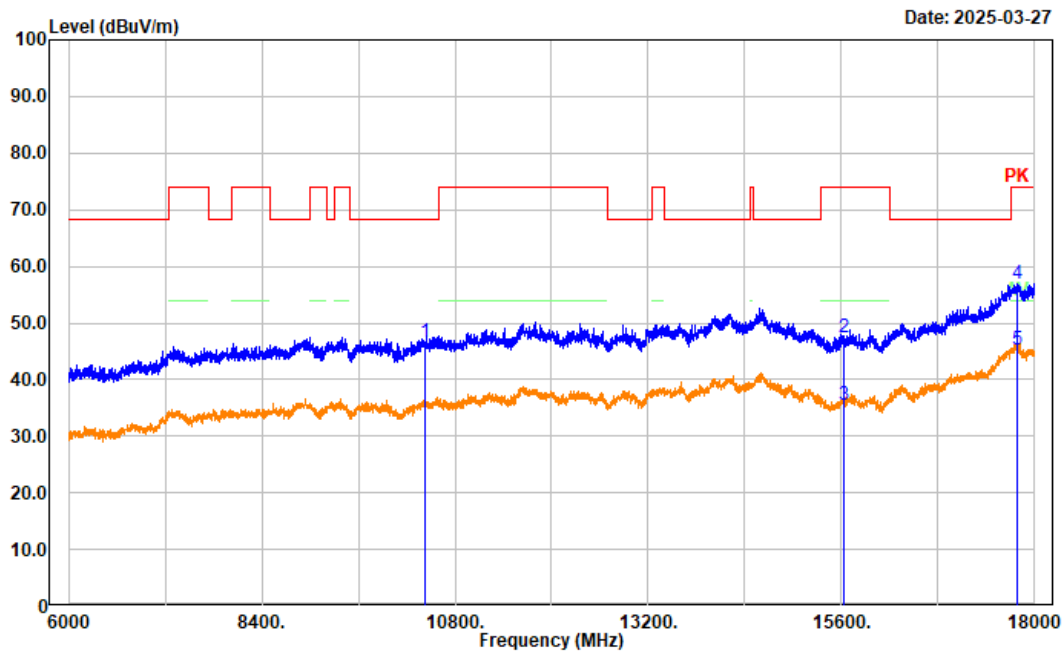


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10420.000	44.29	2.20	46.49	68.20	21.71	Peak
2	15630.000	43.50	3.88	47.38	74.00	26.62	Peak
3	15630.000	31.74	3.88	35.62	54.00	18.38	Average
4	17788.800	43.52	13.50	57.02	74.00	16.98	Peak
5	17788.800	31.72	13.50	45.22	54.00	8.78	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ax80 Middle Channel 5210MHz Band 1

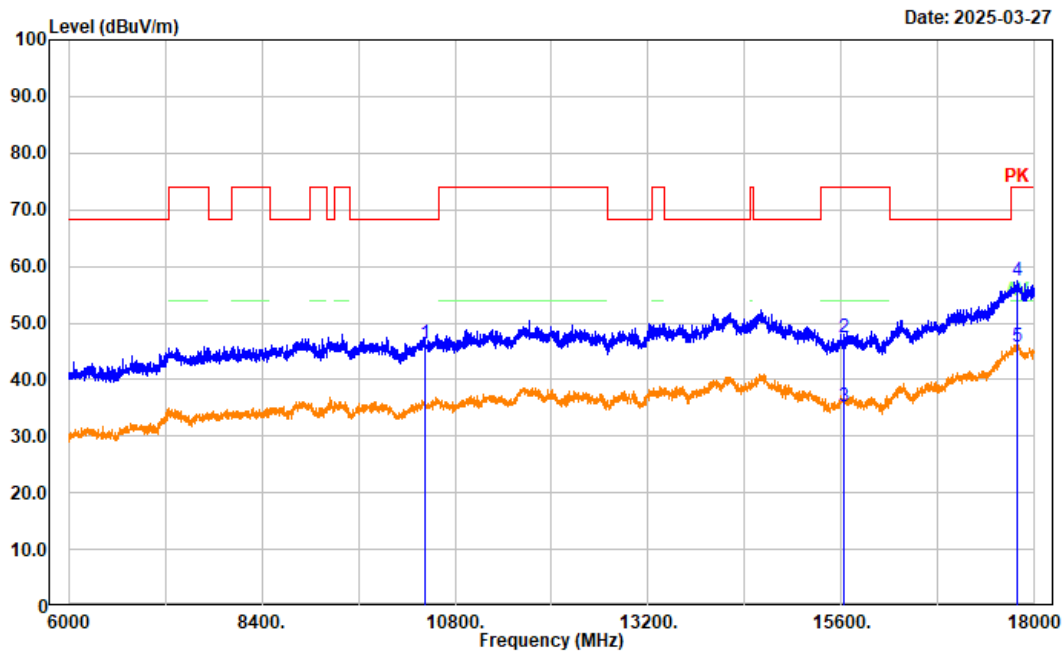


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10420.000	44.26	2.20	46.46	68.20	21.74	Peak
2	15630.000	43.51	3.88	47.39	74.00	26.61	Peak
3	15630.000	31.38	3.88	35.26	54.00	18.74	Average
4	17791.200	43.93	13.50	57.43	74.00	16.57	Peak
5	17791.200	32.21	13.50	45.71	54.00	8.29	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: a High Channel 5320MHz Band 2 Chain 0

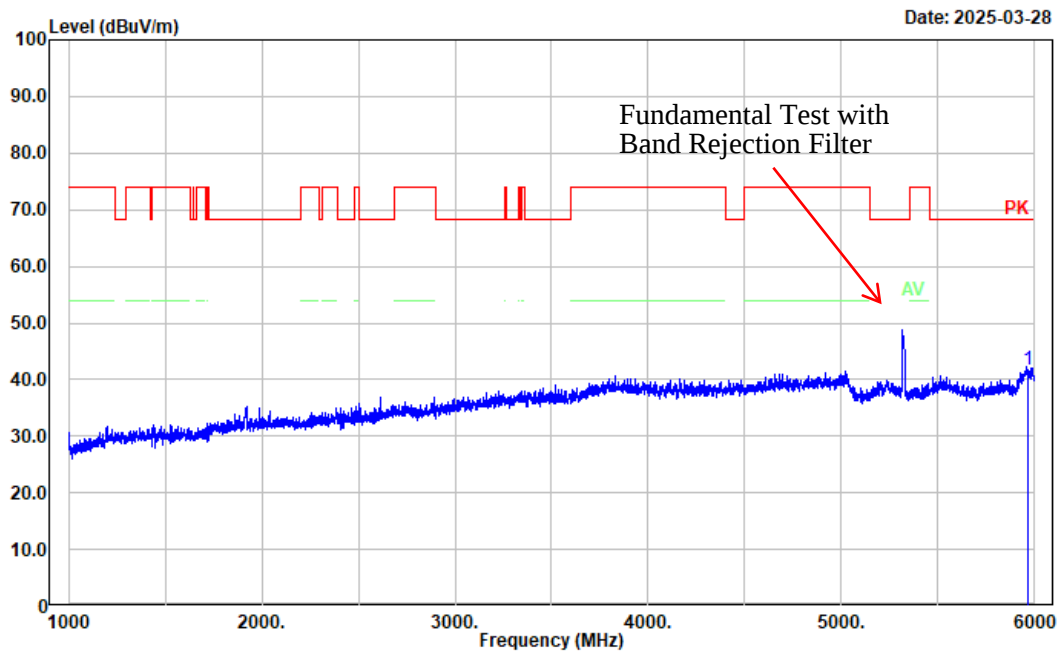


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5965.000	45.66	-3.94	41.72	68.20	26.48	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: a High Channel 5320MHz Band 2 Chain 0

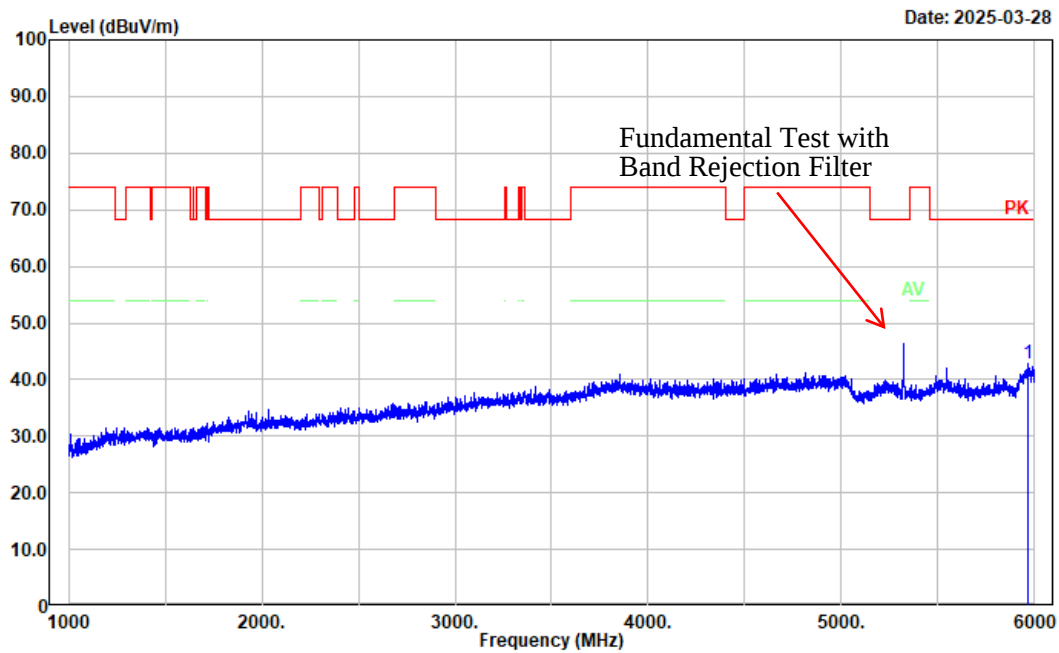


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5968.000	46.78	-3.96	42.82	68.20	25.38	Peak

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: a High Channel 5320MHz Band 2 Chain 0

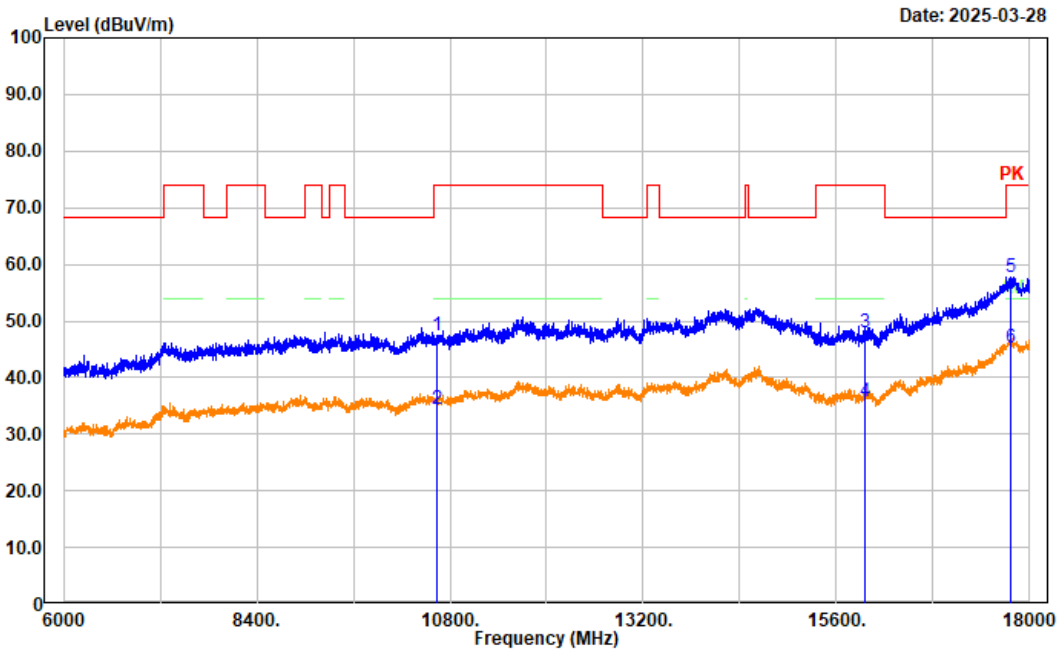


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10640.000	43.94	3.46	47.40	74.00	26.60	Peak
2	10640.000	31.05	3.46	34.51	54.00	19.49	Average
3	15960.000	43.64	4.44	48.08	74.00	25.92	Peak
4	15960.000	31.39	4.44	35.83	54.00	18.17	Average
5	17767.200	44.39	13.39	57.78	74.00	16.22	Peak
6	17767.200	31.88	13.39	45.27	54.00	8.73	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: a High Channel 5320MHz Band 2 Chain 0

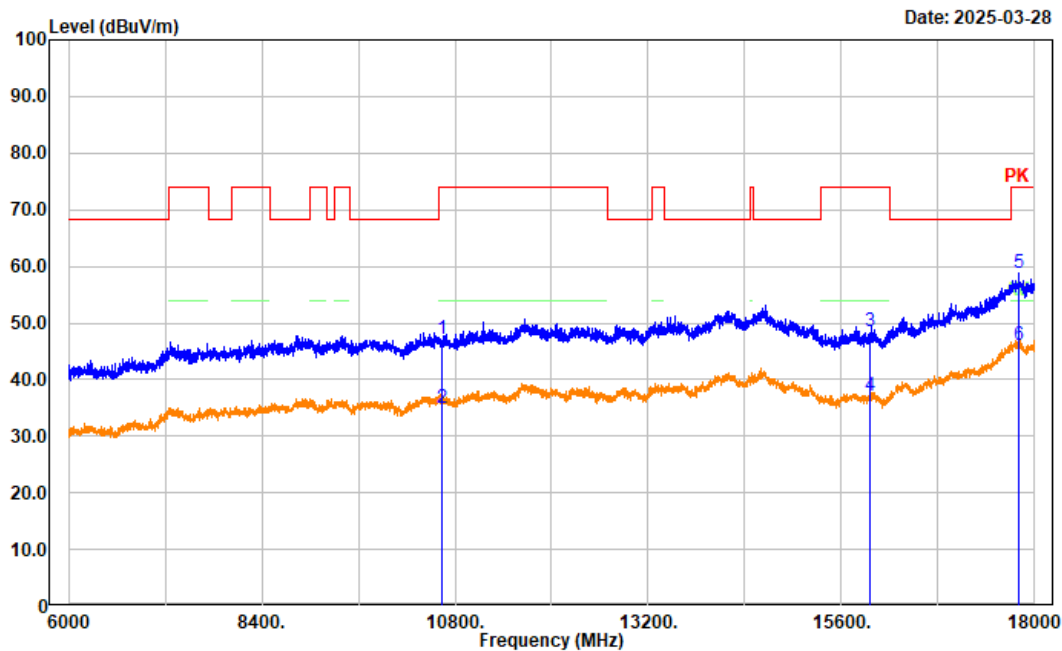


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10640.000	43.56	3.46	47.02	74.00	26.98	Peak
2	10640.000	31.55	3.46	35.01	54.00	18.99	Average
3	15960.000	44.17	4.44	48.61	74.00	25.39	Peak
4	15960.000	32.71	4.44	37.15	54.00	16.85	Average
5	17808.000	45.33	13.55	58.88	74.00	15.12	Peak
6	17808.000	32.63	13.55	46.18	54.00	7.82	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: a High Channel 5320MHz Band 2 Chain 1

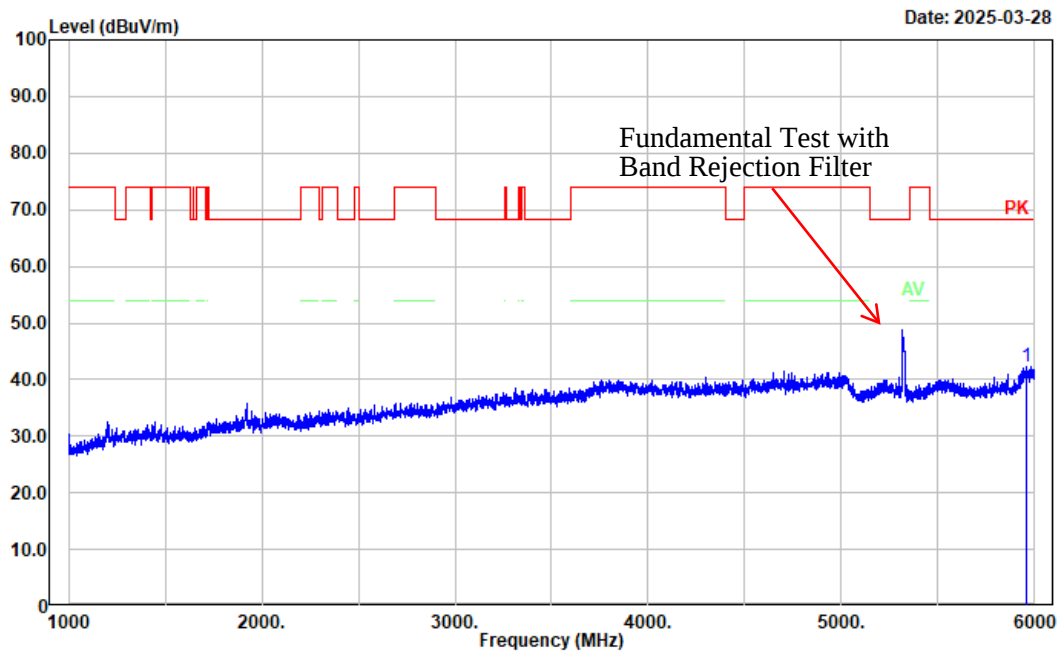


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5960.000	46.28	-3.91	42.37	68.20	25.83	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: a High Channel 5320MHz Band 2 Chain 1

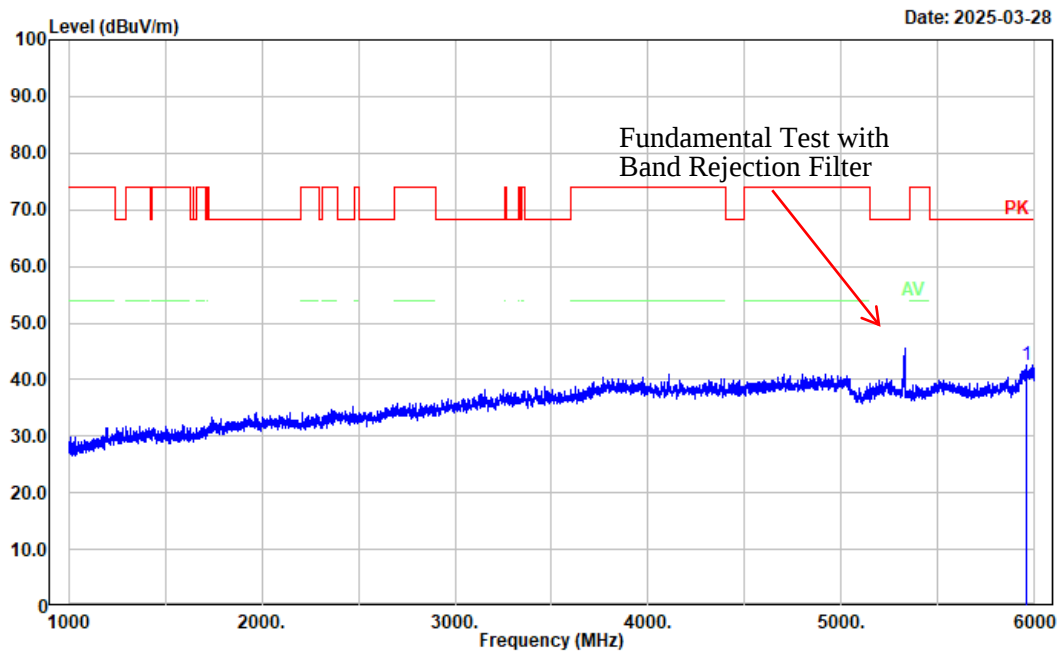


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5960.000	46.39	-3.91	42.48	68.20	25.72	Peak

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: a High Channel 5320MHz Band 2 Chain 1

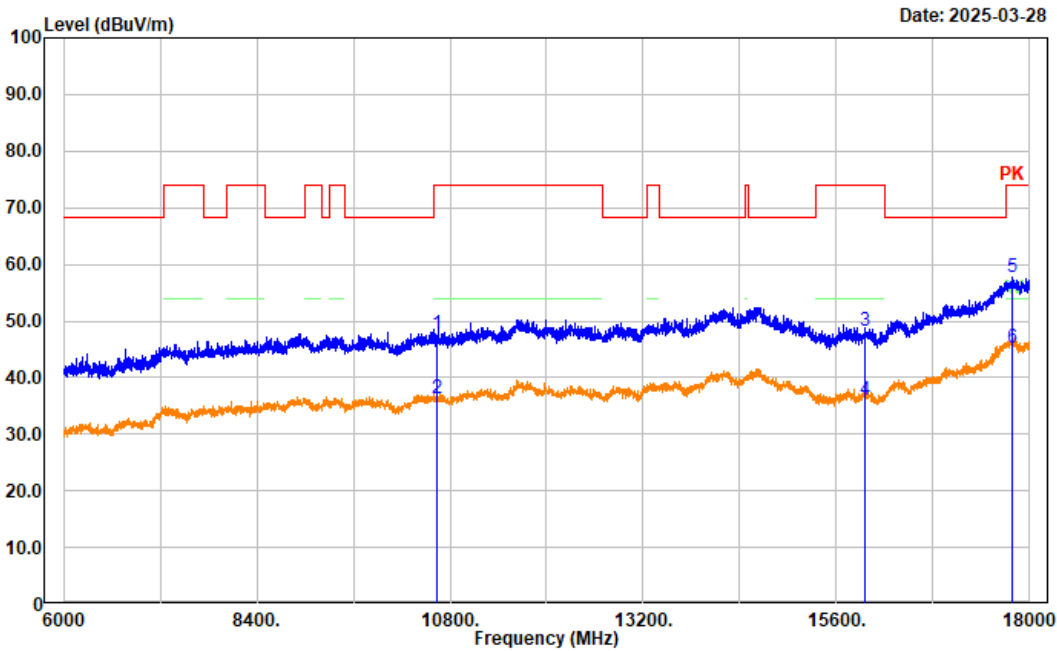


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10640.000	44.31	3.46	47.77	74.00	26.23	Peak
2	10640.000	32.87	3.46	36.33	54.00	17.67	Average
3	15960.000	43.87	4.44	48.31	74.00	25.69	Peak
4	15960.000	31.54	4.44	35.98	54.00	18.02	Average
5	17779.200	44.29	13.45	57.74	74.00	16.26	Peak
6	17779.200	31.91	13.45	45.36	54.00	8.64	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: a High Channel 5320MHz Band 2 Chain 1

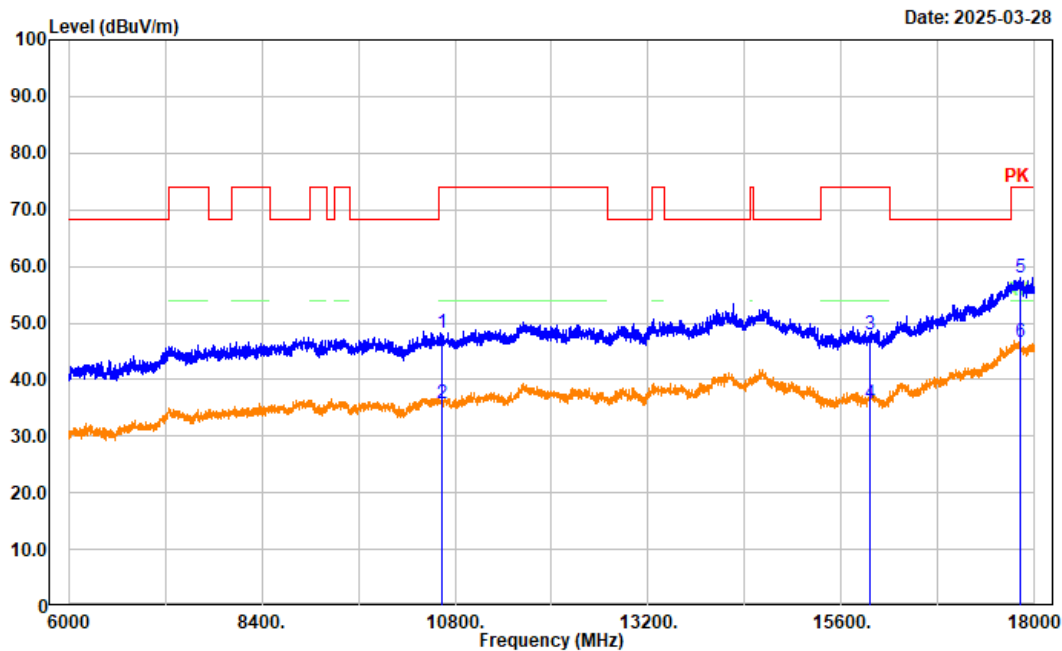


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10640.000	44.69	3.46	48.15	74.00	25.85	Peak
2	10640.000	32.28	3.46	35.74	54.00	18.26	Average
3	15960.000	43.65	4.44	48.09	74.00	25.91	Peak
4	15960.000	31.22	4.44	35.66	54.00	18.34	Average
5	17815.200	44.52	13.54	58.06	74.00	15.94	Peak
6	17815.200	33.17	13.54	46.71	54.00	7.29	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: n20 Low Channel 5260MHz Band 2

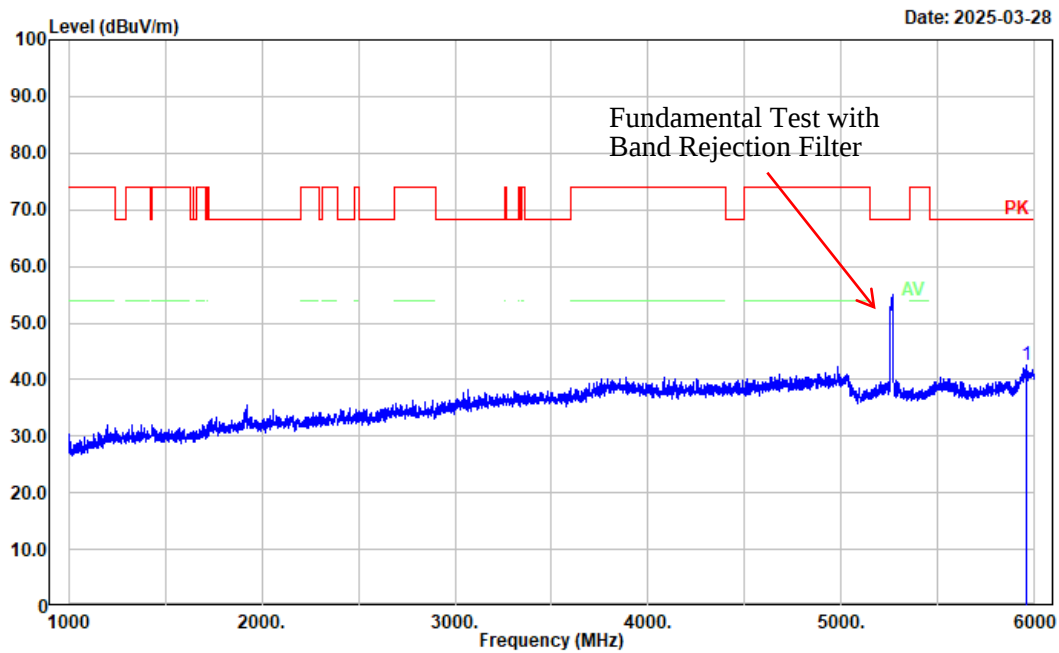


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5958.000	46.32	-3.89	42.43	68.20	25.77	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: n20 Low Channel 5260MHz Band 2

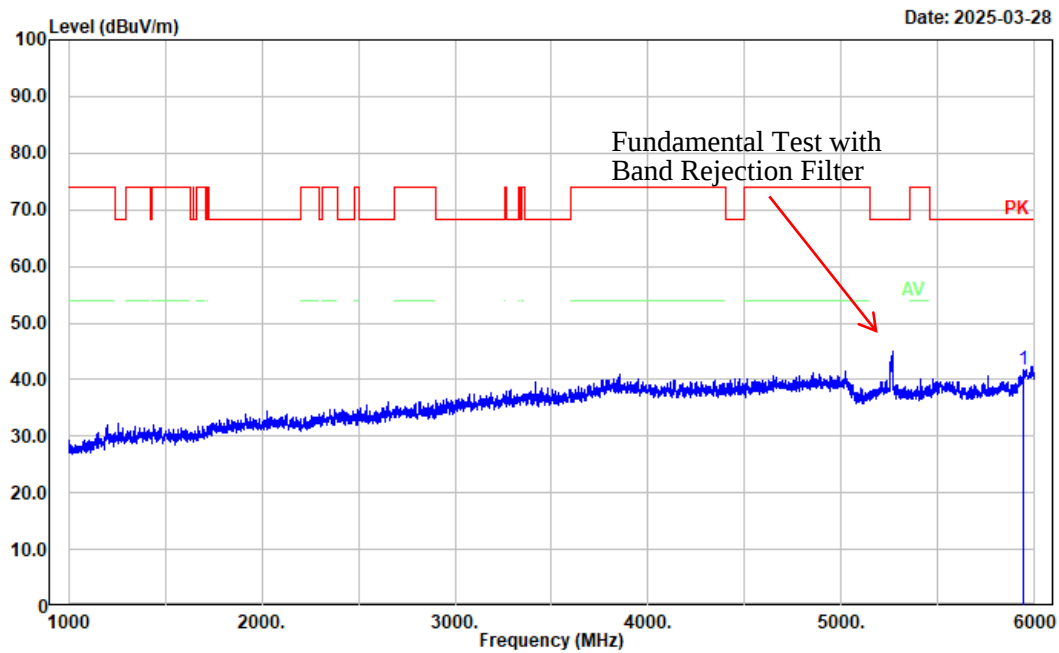


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5941.000	45.82	-3.96	41.86	68.20	26.34	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: n20 Low Channel 5260MHz Band 2

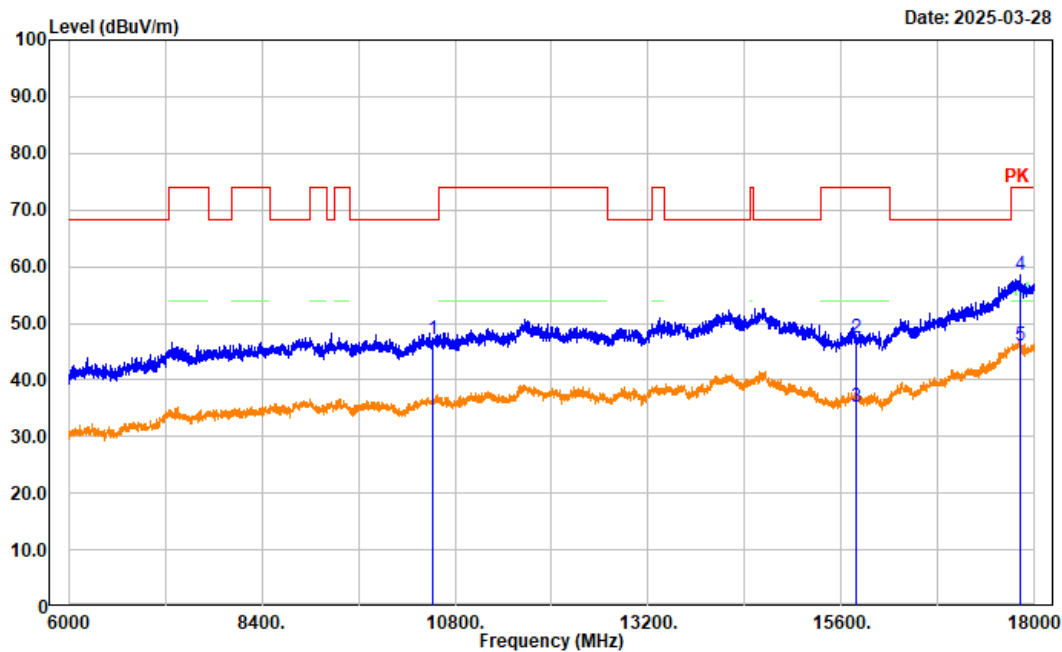


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10520.000	44.20	2.83	47.03	68.20	21.17	Peak
2	15780.000	43.51	3.98	47.49	74.00	26.51	Peak
3	15780.000	31.22	3.98	35.20	54.00	18.80	Average
4	17829.600	44.98	13.54	58.52	74.00	15.48	Peak
5	17829.600	32.48	13.54	46.02	54.00	7.98	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: n20 Low Channel 5260MHz Band 2

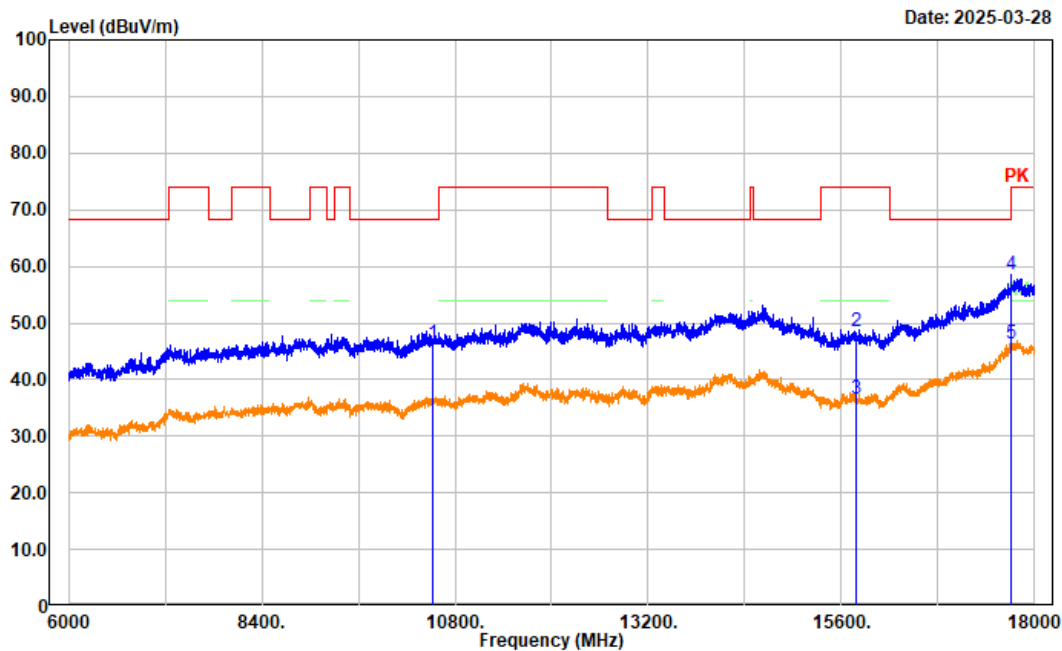


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10520.000	43.53	2.83	46.36	68.20	21.84	Peak
2	15780.000	44.43	3.98	48.41	74.00	25.59	Peak
3	15780.000	32.64	3.98	36.62	54.00	17.38	Average
4	17702.400	45.58	13.08	58.66	74.00	15.34	Peak
5	17702.400	33.27	13.08	46.35	54.00	7.65	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: n40 High Channel 5310MHz Band 2

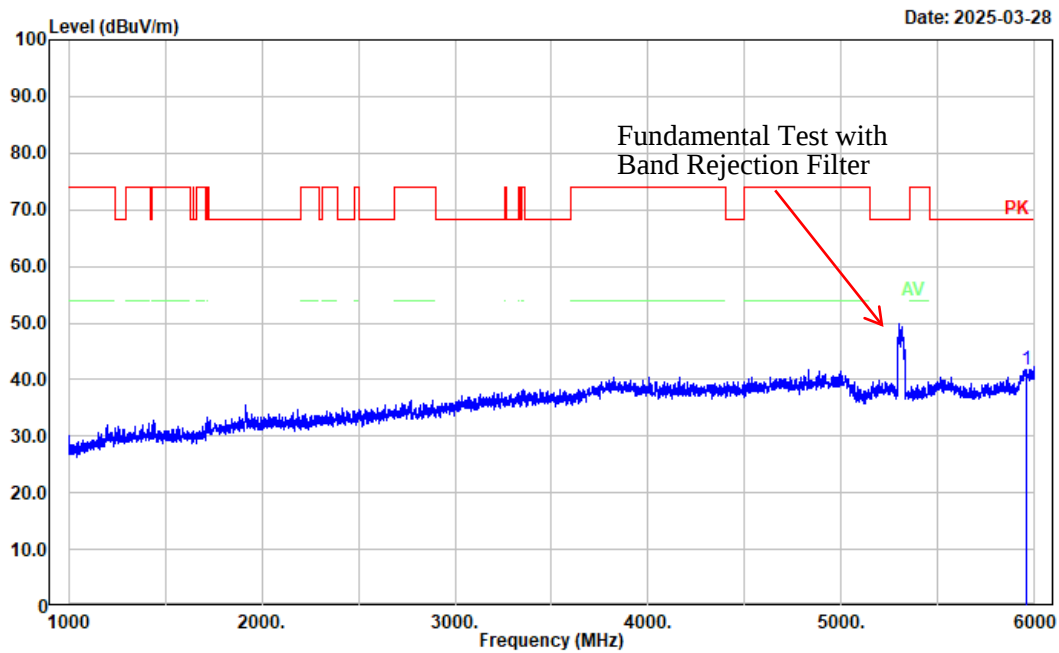


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5961.000	45.72	-3.92	41.80	68.20	26.40	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: n40 High Channel 5310MHz Band 2

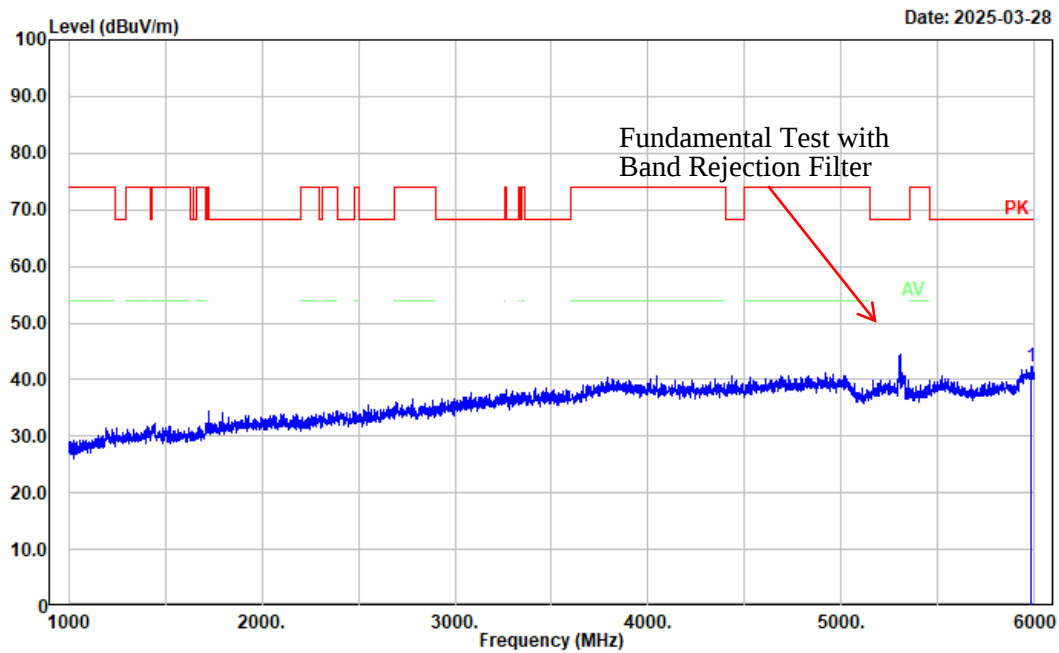


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5984.000	46.24	-4.06	42.18	68.20	26.02	Peak

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: n40 High Channel 5310MHz Band 2

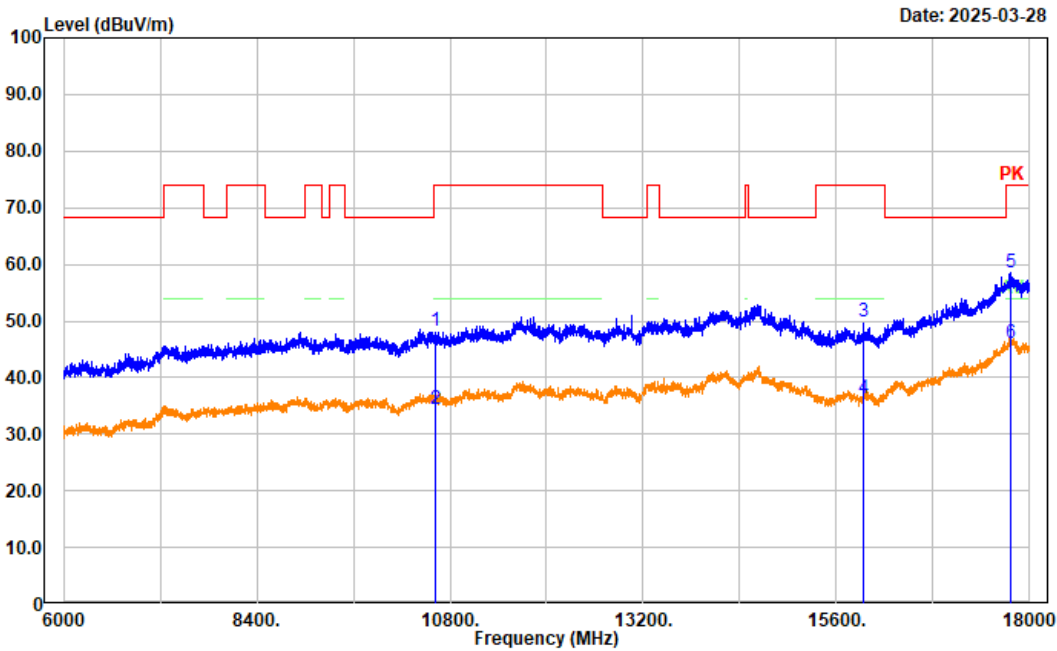


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10620.000	44.89	3.38	48.27	74.00	25.73	Peak
2	10620.000	31.06	3.38	34.44	54.00	19.56	Average
3	15930.000	45.24	4.49	49.73	74.00	24.27	Peak
4	15930.000	31.78	4.49	36.27	54.00	17.73	Average
5	17772.000	45.12	13.42	58.54	74.00	15.46	Peak
6	17772.000	32.77	13.42	46.19	54.00	7.81	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: n40 High Channel 5310MHz Band 2

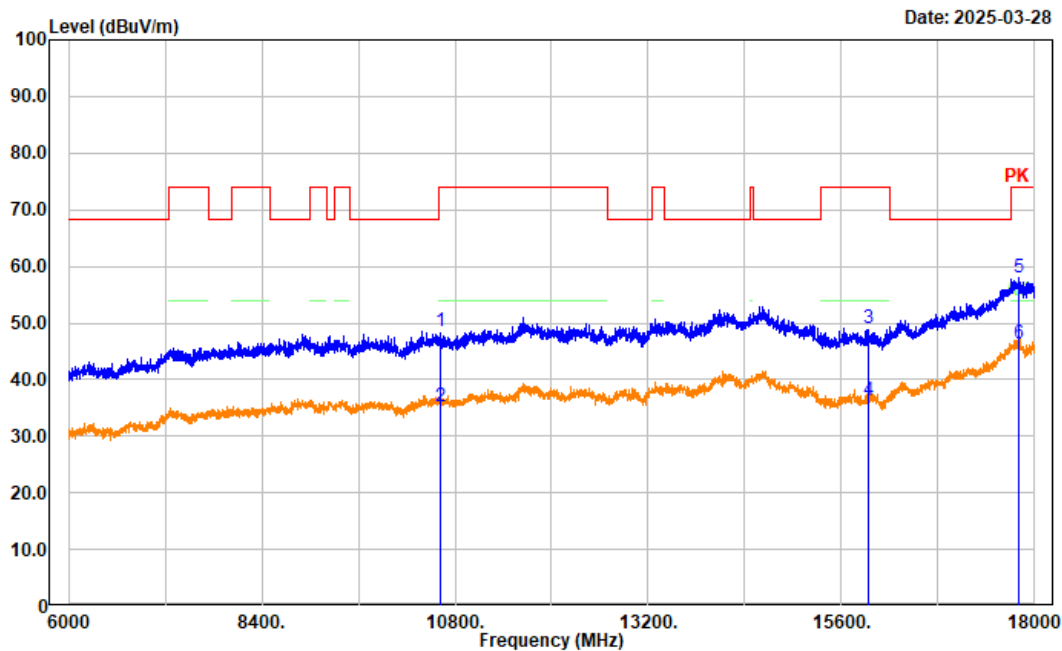


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10620.000	45.11	3.38	48.49	74.00	25.51	Peak
2	10620.000	31.75	3.38	35.13	54.00	18.87	Average
3	15930.000	44.60	4.49	49.09	74.00	24.91	Peak
4	15930.000	31.69	4.49	36.18	54.00	17.82	Average
5	17793.600	44.49	13.51	58.00	74.00	16.00	Peak
6	17793.600	32.80	13.51	46.31	54.00	7.69	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ac80 Middle Channel 5290MHz Band 2

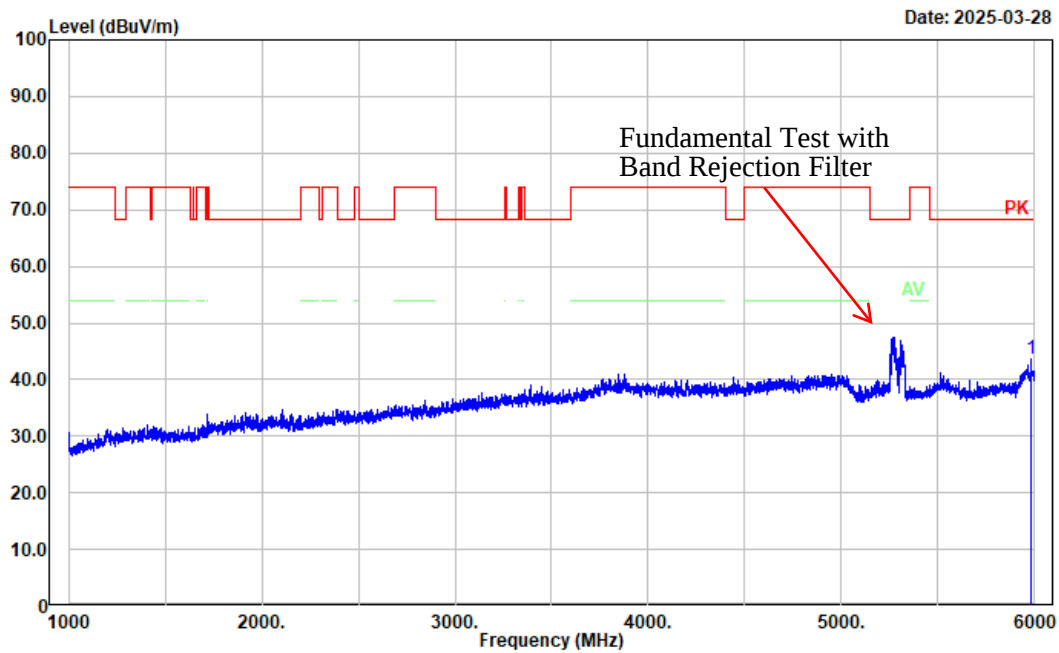


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5983.000	47.66	-4.05	43.61	68.20	24.59	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ac80 Middle Channel 5290MHz Band 2

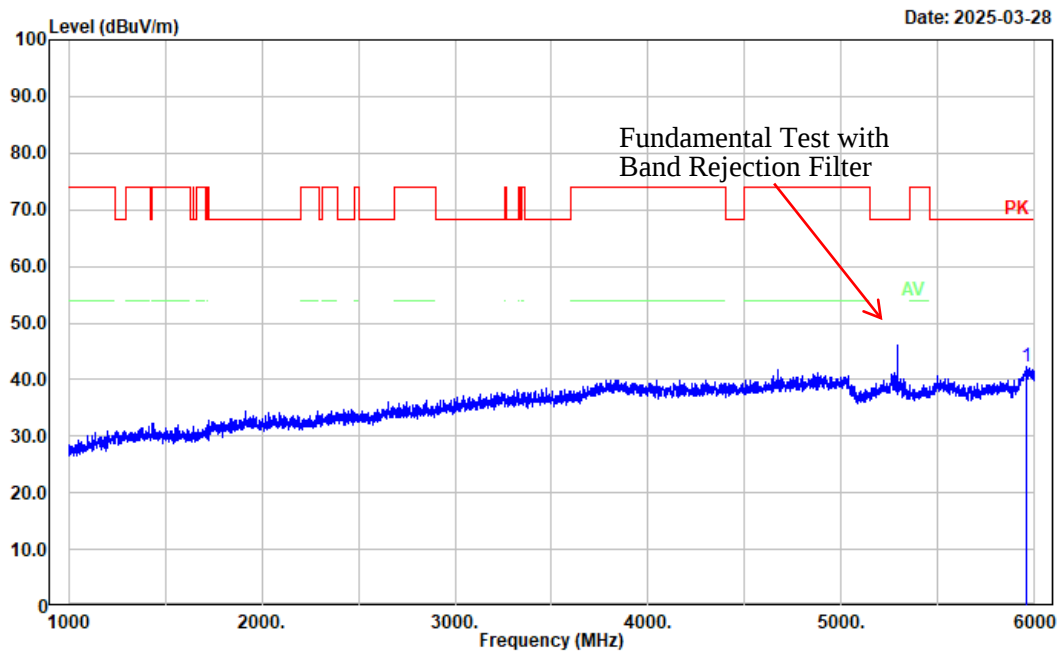


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5954.000	46.09	-3.88	42.21	68.20	25.99	Peak

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: ac80 Middle Channel 5290MHz Band 2

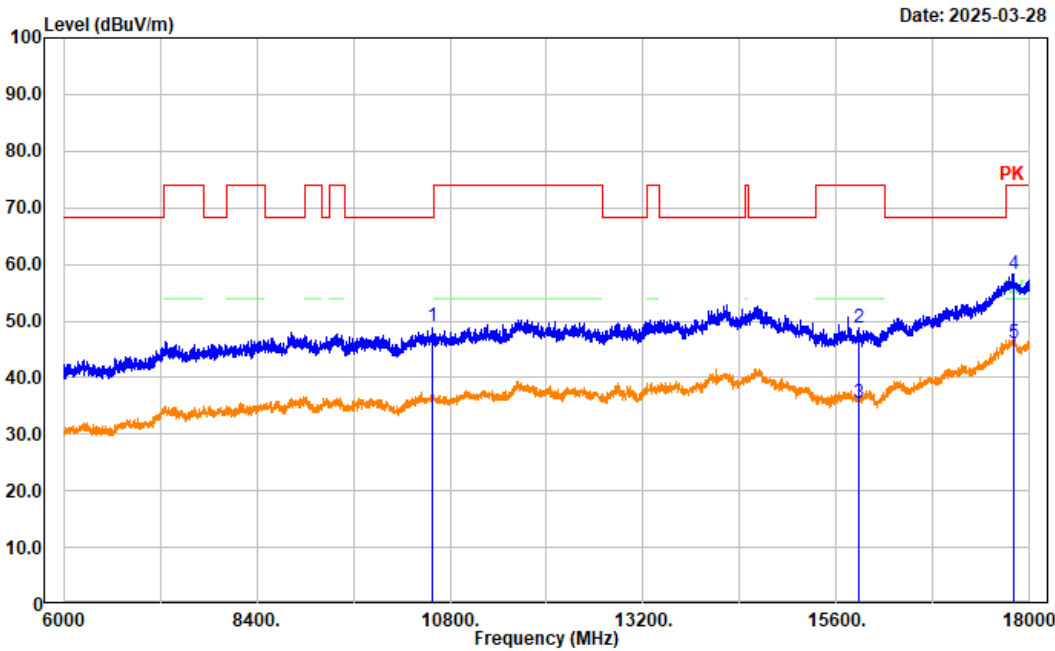


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10580.000	45.94	3.17	49.11	68.20	19.09	Peak
2	15870.000	44.41	4.37	48.78	74.00	25.22	Peak
3	15870.000	31.21	4.37	35.58	54.00	18.42	Average
4	17793.600	44.86	13.51	58.37	74.00	15.63	Peak
5	17793.600	32.62	13.51	46.13	54.00	7.87	Average

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: vertical
 Note: ac80 Middle Channel 5290MHz Band 2

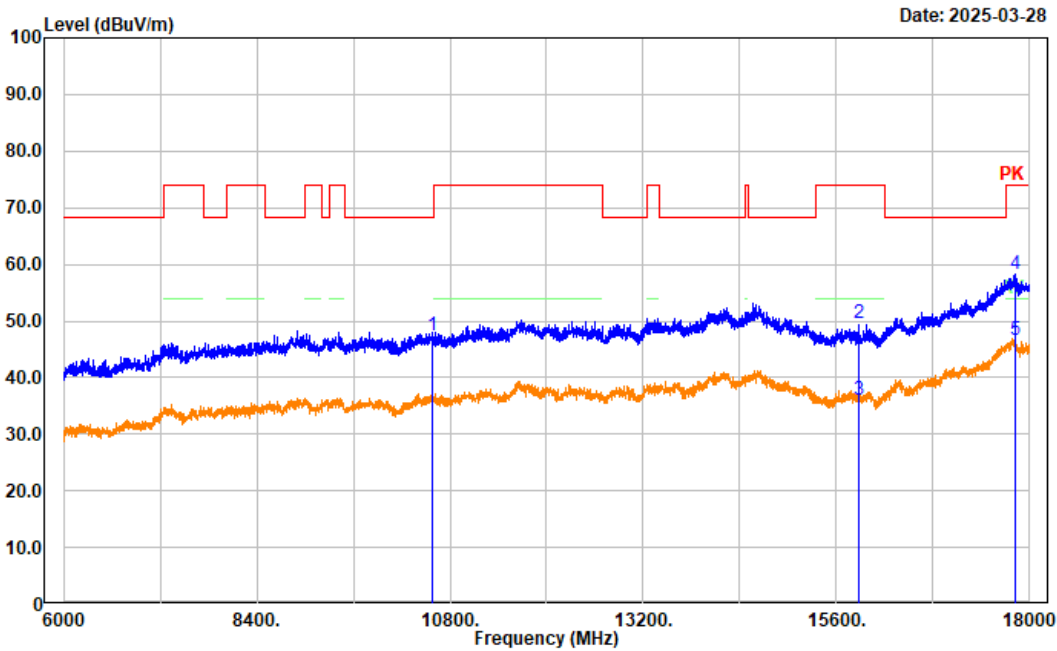


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10580.000	44.32	3.17	47.49	68.20	20.71	Peak
2	15870.000	45.17	4.37	49.54	74.00	24.46	Peak
3	15870.000	31.66	4.37	36.03	54.00	17.97	Average
4	17820.000	44.75	13.54	58.29	74.00	15.71	Peak
5	17820.000	33.17	13.54	46.71	54.00	7.29	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax20 Low Channel 5260MHz Band 2

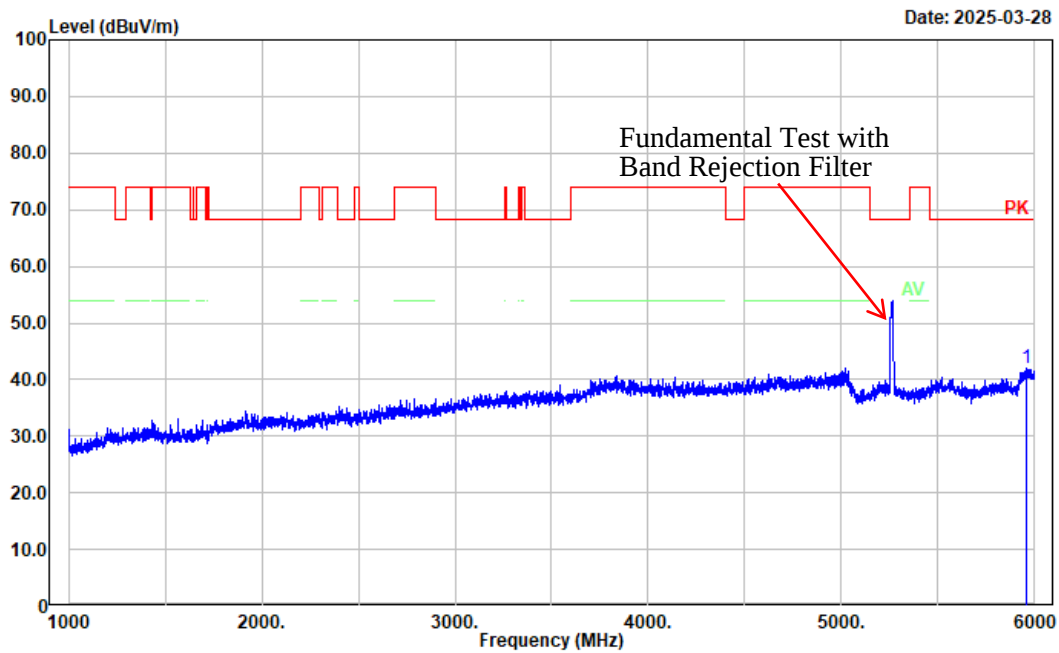


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5958.000	45.93	-3.89	42.04	68.20	26.16	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax20 Low Channel 5260MHz Band 2

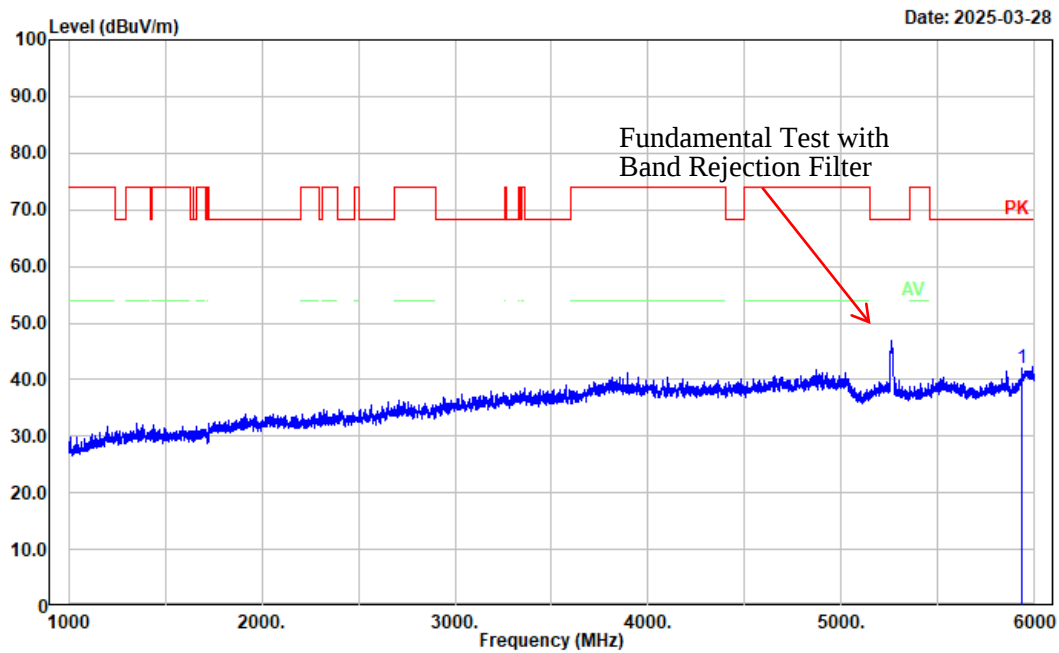


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5935.000	46.02	-4.02	42.00	68.20	26.20	Peak

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: ax20 Low Channel 5260MHz Band 2

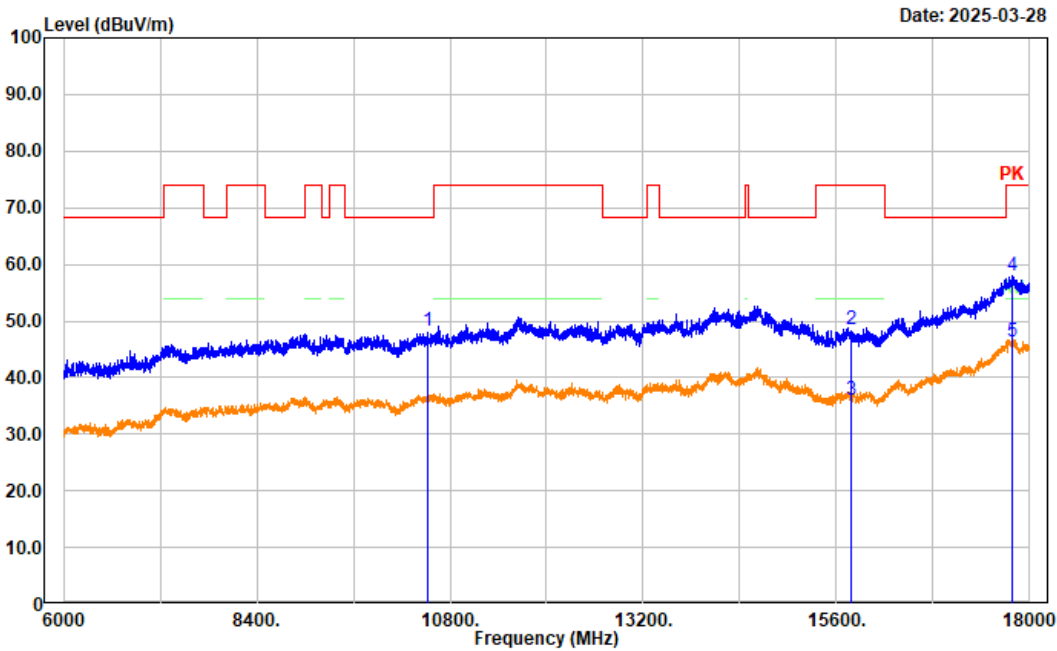


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10520.000	45.30	2.83	48.13	68.20	20.07	Peak
2	15780.000	44.61	3.98	48.59	74.00	25.41	Peak
3	15780.000	32.15	3.98	36.13	54.00	17.87	Average
4	17776.800	44.60	13.44	58.04	74.00	15.96	Peak
5	17776.800	32.81	13.44	46.25	54.00	7.75	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ax20 Low Channel 5260MHz Band 2

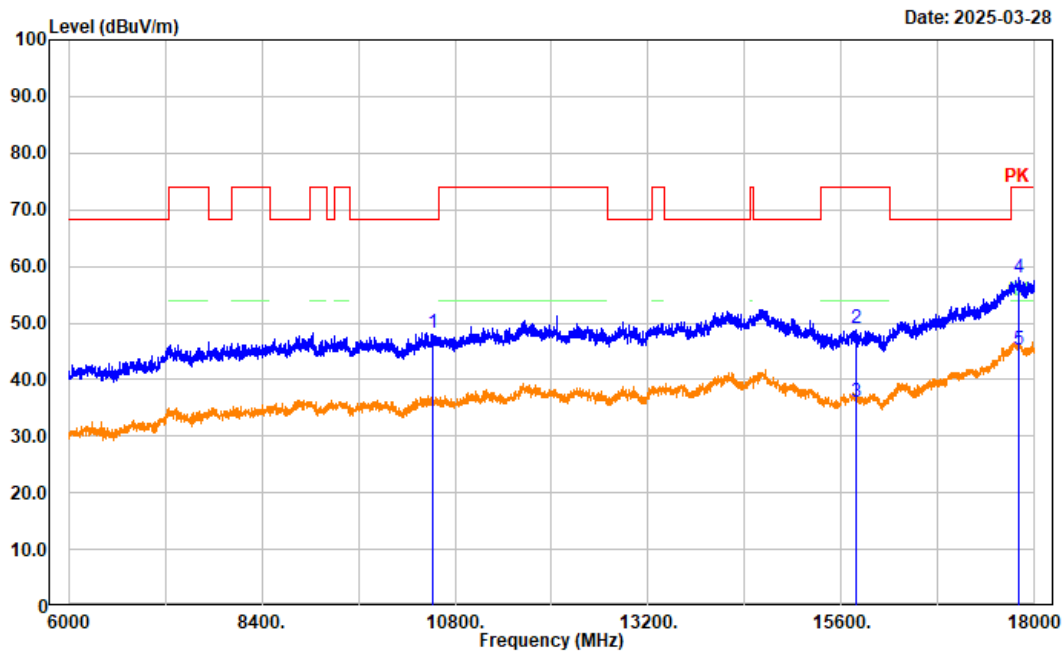


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10520.000	45.42	2.83	48.25	68.20	19.95	Peak
2	15780.000	45.16	3.98	49.14	74.00	24.86	Peak
3	15780.000	32.16	3.98	36.14	54.00	17.86	Average
4	17808.000	44.42	13.55	57.97	74.00	16.03	Peak
5	17808.000	31.74	13.55	45.29	54.00	8.71	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax40 High Channel 5310MHz Band 2

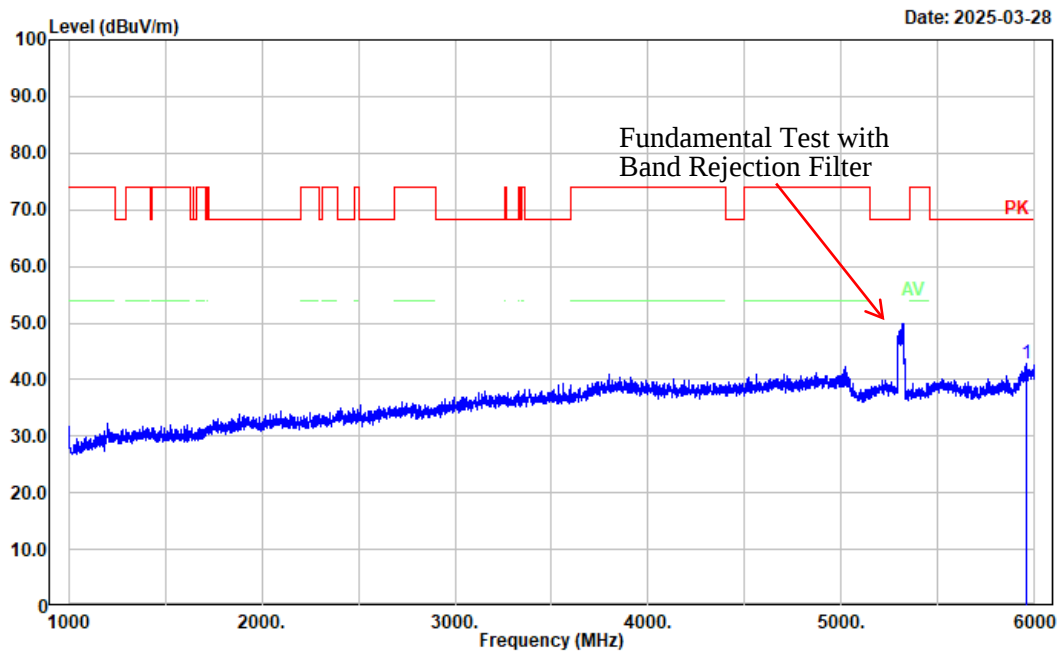


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5956.000	46.69	-3.89	42.80	68.20	25.40	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax40 High Channel 5310MHz Band 2

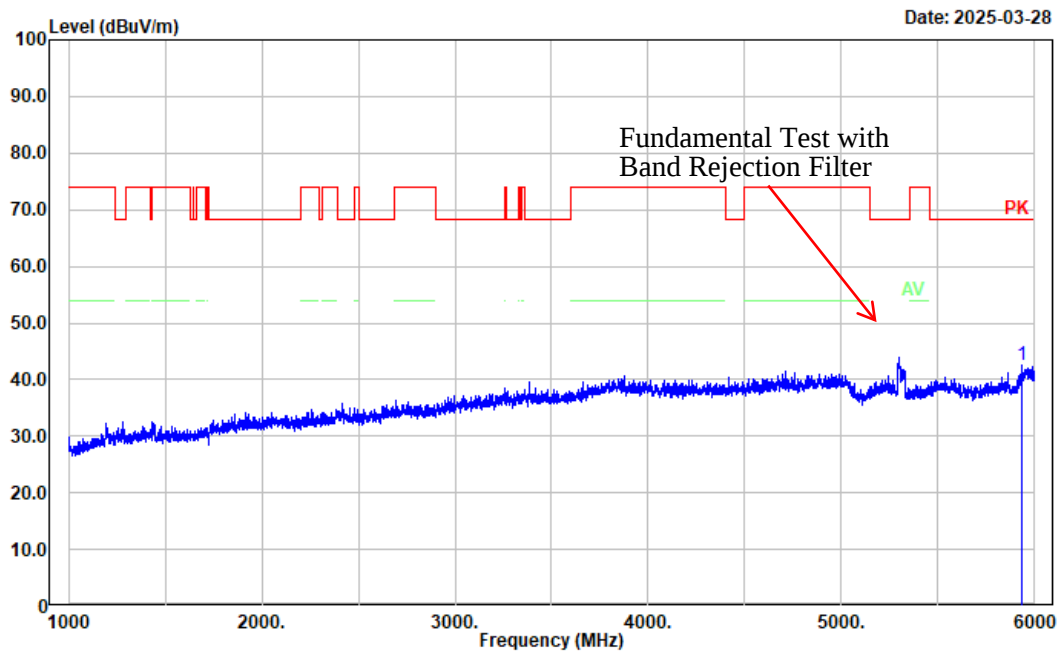


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5937.000	46.43	-4.00	42.43	68.20	25.77	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: ax40 High Channel 5310MHz Band 2

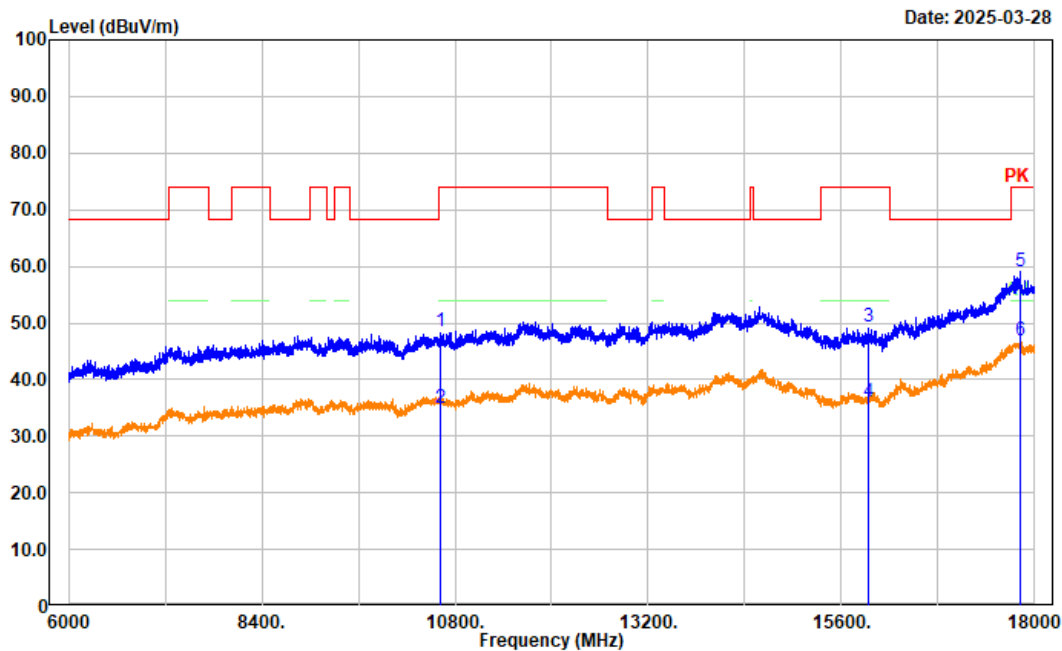


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10620.000	45.11	3.38	48.49	74.00	25.51	Peak
2	10620.000	31.47	3.38	34.85	54.00	19.15	Average
3	15930.000	44.80	4.49	49.29	74.00	24.71	Peak
4	15930.000	31.59	4.49	36.08	54.00	17.92	Average
5	17820.000	45.50	13.54	59.04	74.00	14.96	Peak
6	17820.000	33.28	13.54	46.82	54.00	7.18	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ax40 High Channel 5310MHz Band 2

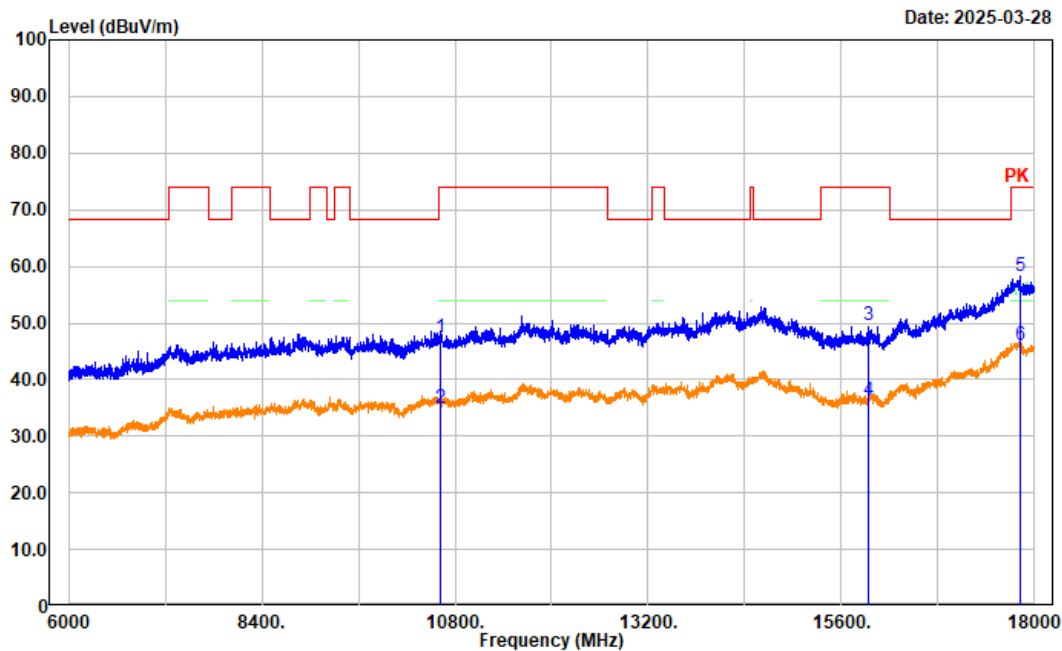


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10620.000	44.03	3.38	47.41	74.00	26.59	Peak
2	10620.000	31.55	3.38	34.93	54.00	19.07	Average
3	15930.000	45.23	4.49	49.72	74.00	24.28	Peak
4	15930.000	31.74	4.49	36.23	54.00	17.77	Average
5	17815.200	44.72	13.54	58.26	74.00	15.74	Peak
6	17815.200	32.57	13.54	46.11	54.00	7.89	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax80 Middle Channel 5290MHz Band 2

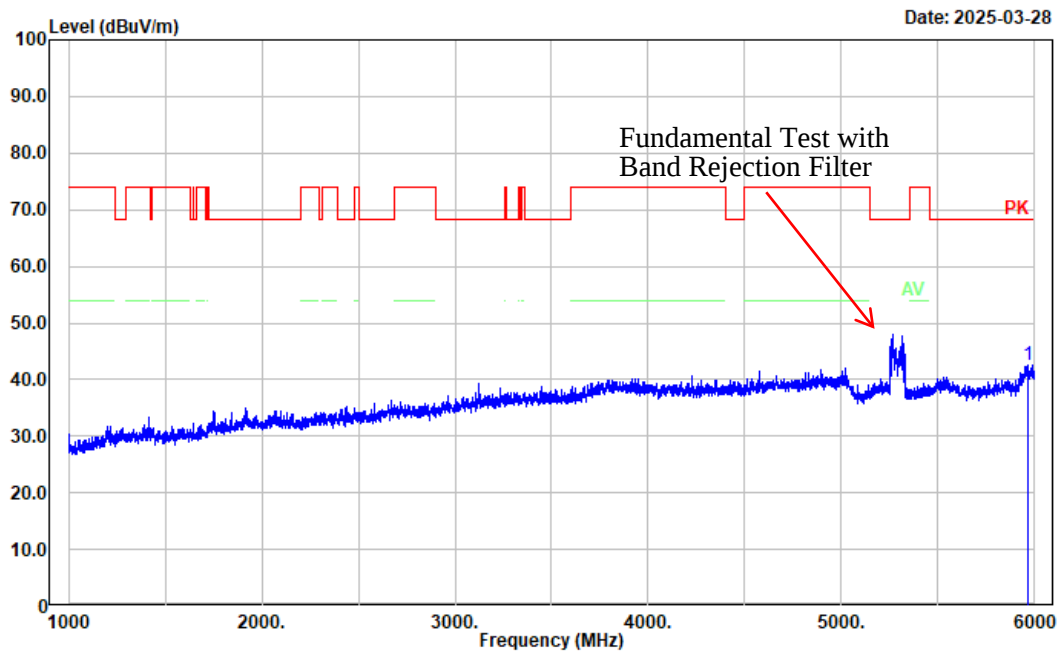


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5966.000	46.37	-3.95	42.42	68.20	25.78	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax80 Middle Channel 5290MHz Band 2

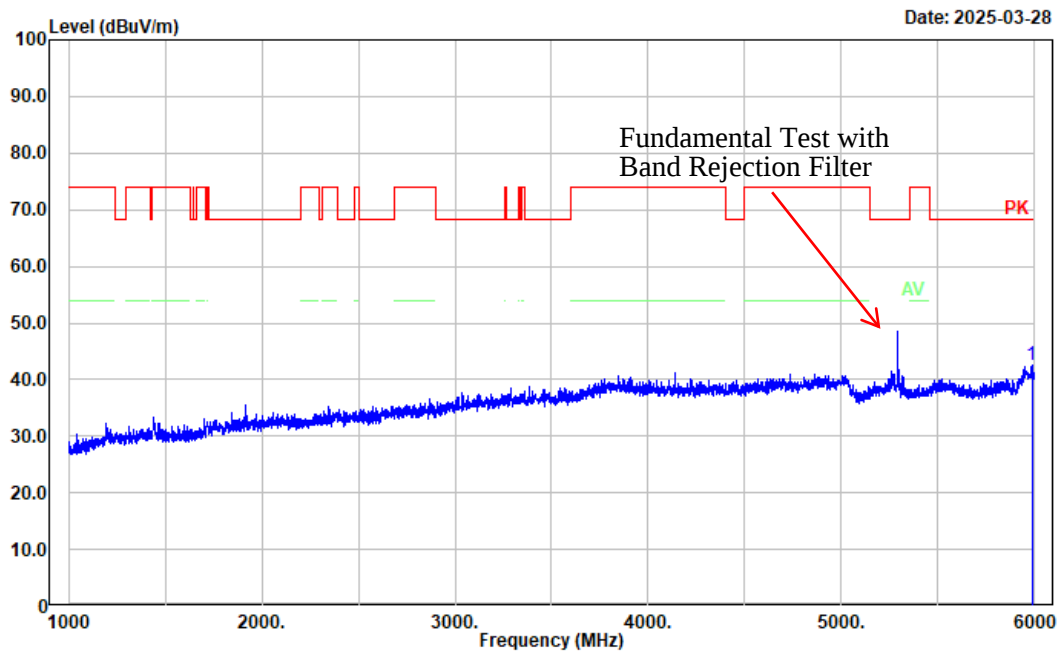


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5985.000	46.51	-4.07	42.44	68.20	25.76	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: ax80 Middle Channel 5290MHz Band 2

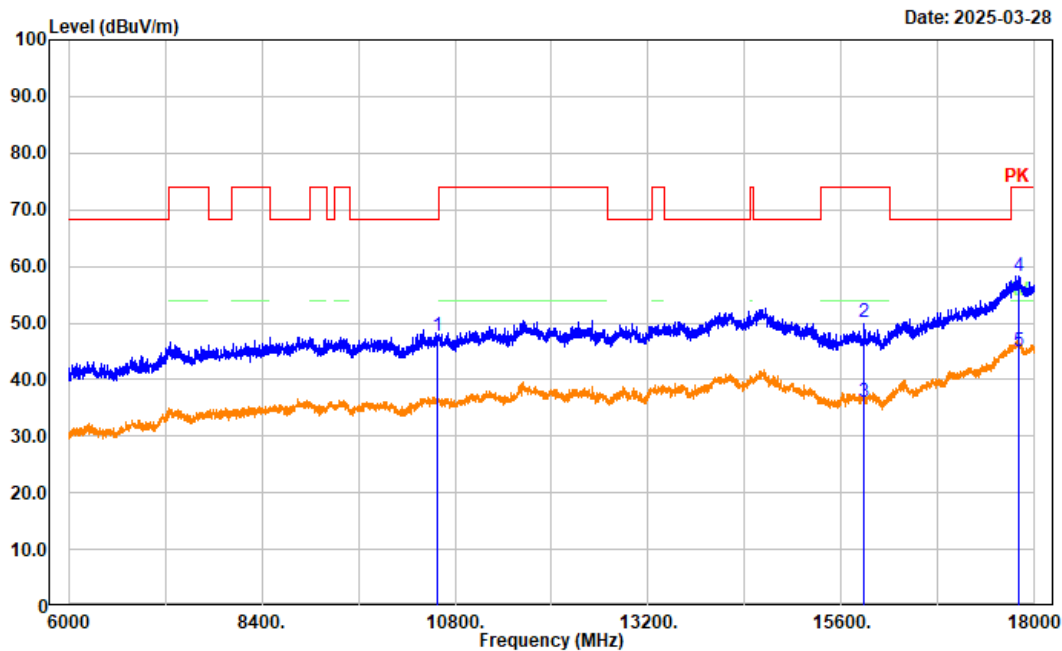


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10580.000	44.43	3.17	47.60	68.20	20.60	Peak
2	15870.000	45.71	4.37	50.08	74.00	23.92	Peak
3	15870.000	31.61	4.37	35.98	54.00	18.02	Average
4	17793.600	44.84	13.51	58.35	74.00	15.65	Peak
5	17793.600	31.61	13.51	45.12	54.00	8.88	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ax80 Middle Channel 5290MHz Band 2

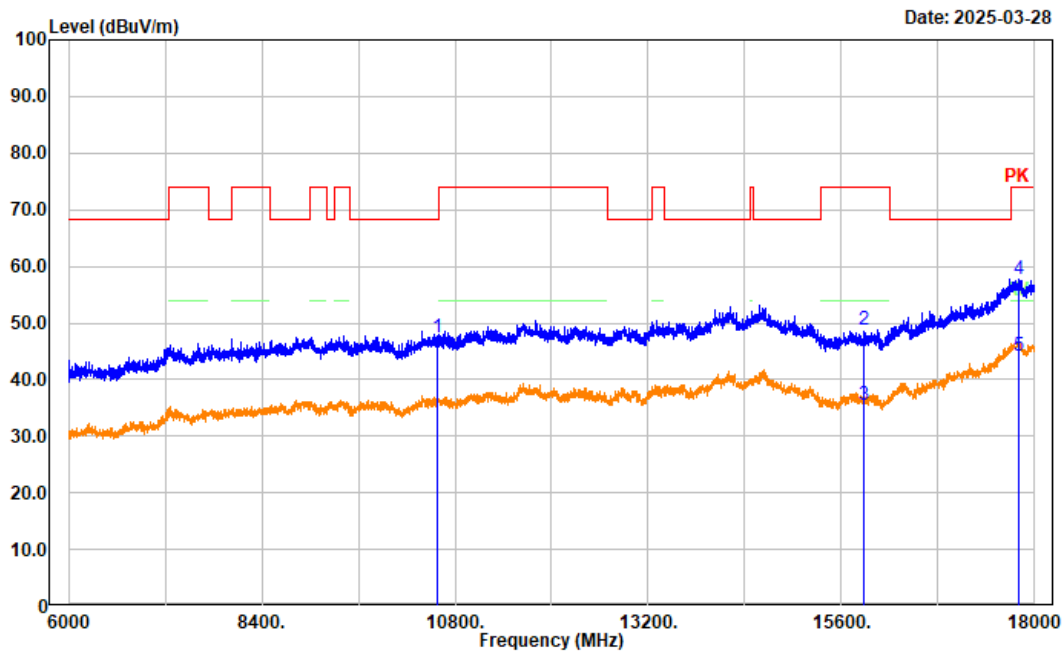


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10580.000	44.20	3.17	47.37	68.20	20.83	Peak
2	15870.000	44.28	4.37	48.65	74.00	25.35	Peak
3	15870.000	31.24	4.37	35.61	54.00	18.39	Average
4	17793.600	44.33	13.51	57.84	74.00	16.16	Peak
5	17793.600	30.77	13.51	44.28	54.00	9.72	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: a High Channel 5700MHz Band 3 Chain 0

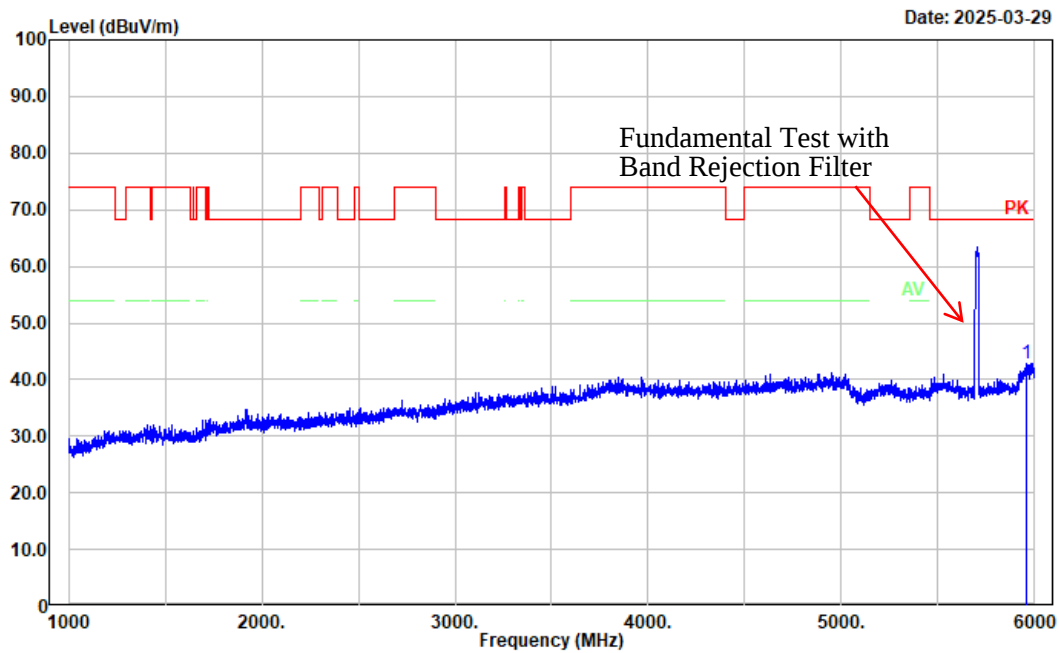


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5955.000	46.60	-3.88	42.72	68.20	25.48	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: a High Channel 5700MHz Band 3 Chain 0

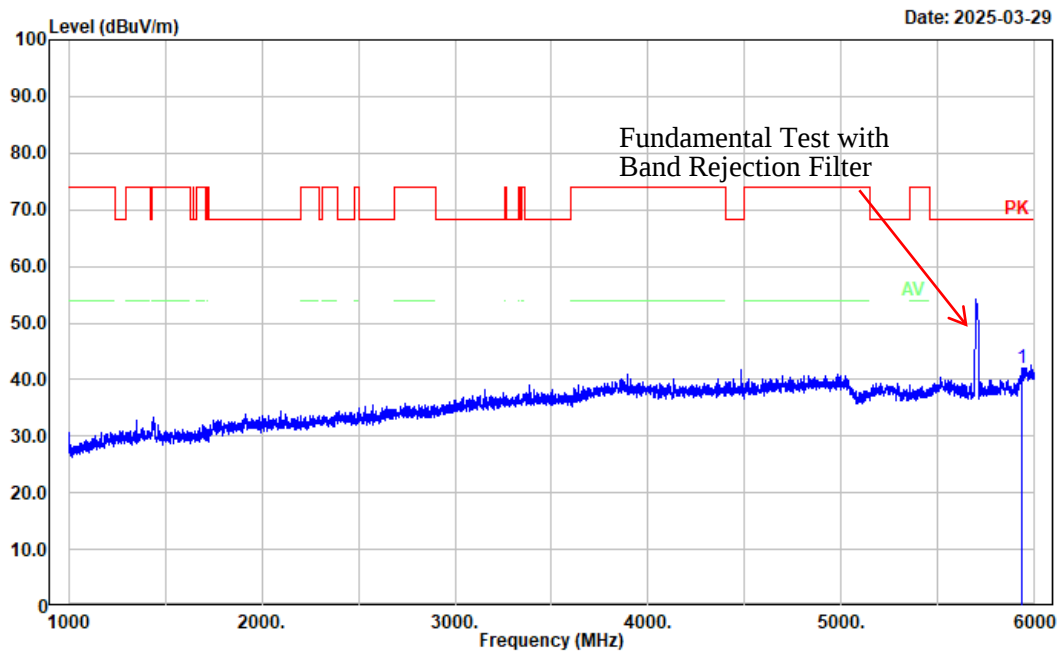


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5937.000	45.87	-4.00	41.87	68.20	26.33	Peak

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: a High Channel 5700MHz Band 3 Chain 0

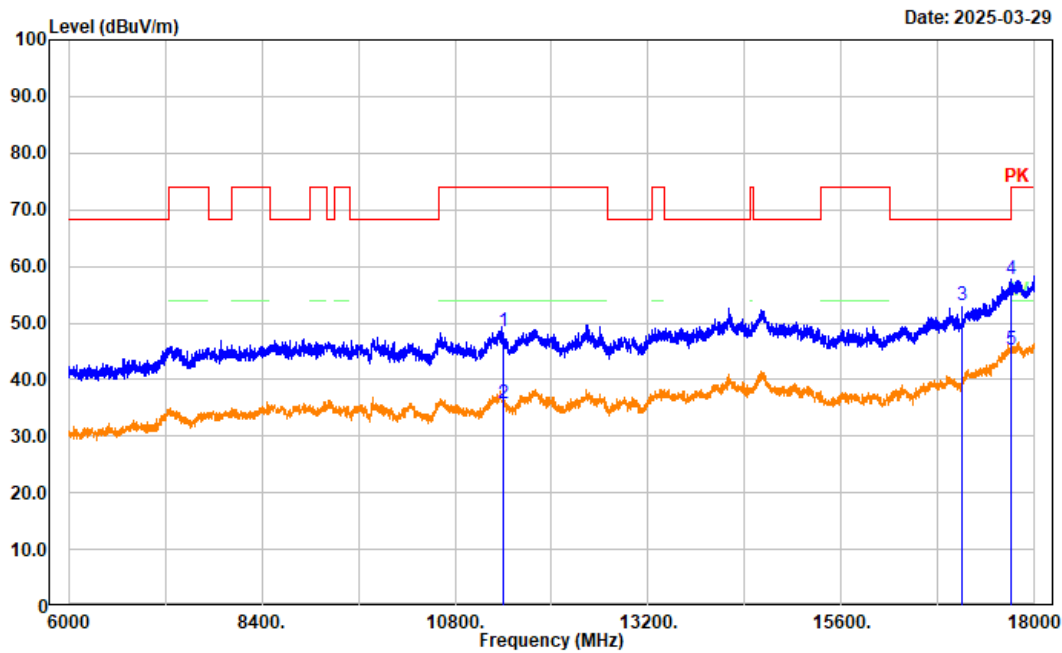


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11400.000	43.99	4.62	48.61	74.00	25.39	Peak
2	11400.000	31.12	4.62	35.74	54.00	18.26	Average
3	17100.000	44.84	8.19	53.03	68.20	15.17	Peak
4	17702.400	44.61	13.08	57.69	74.00	16.31	Peak
5	17702.400	32.28	13.08	45.36	54.00	8.64	Average

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: vertical
 Note: a High Channel 5700MHz Band 3 Chain 0

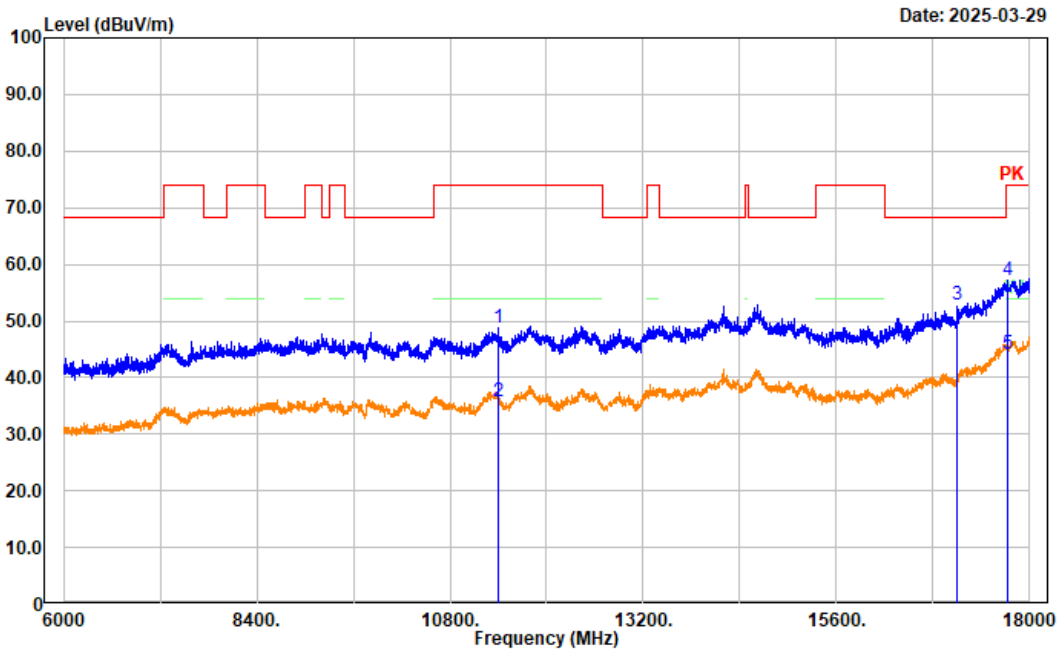


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11400.000	44.08	4.62	48.70	74.00	25.30	Peak
2	11400.000	31.06	4.62	35.68	54.00	18.32	Average
3	17100.000	44.66	8.19	52.85	68.20	15.35	Peak
4	17719.200	43.96	13.17	57.13	74.00	16.87	Peak
5	17719.200	31.11	13.17	44.28	54.00	9.72	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: a High Channel 5700MHz Band 3 Chain 1

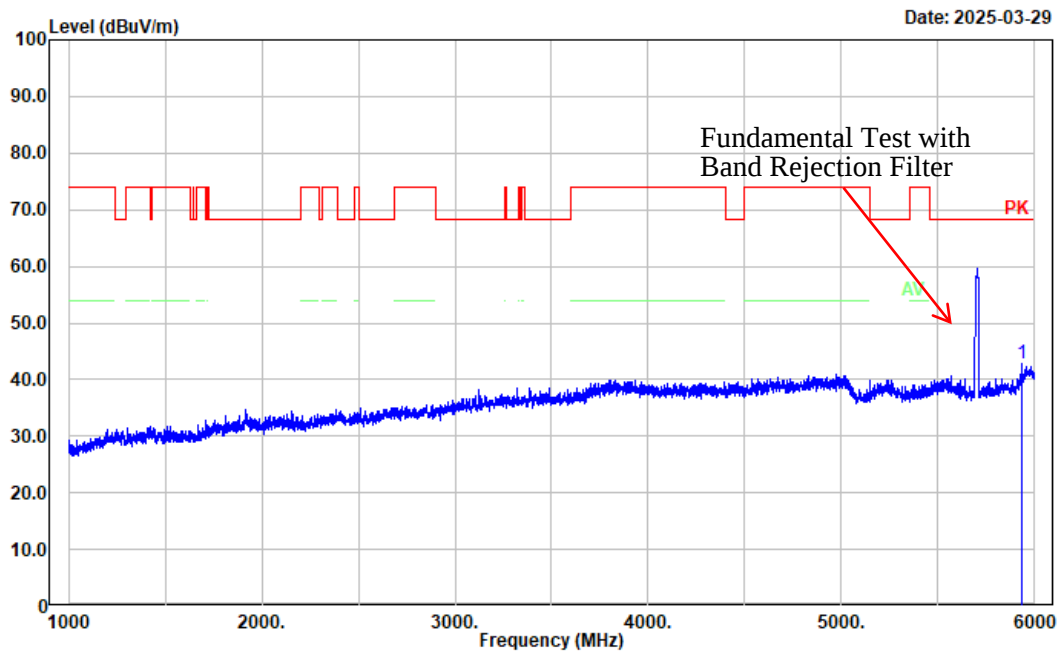


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5937.000	46.93	-4.00	42.93	68.20	25.27	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: a High Channel 5700MHz Band 3 Chain 1

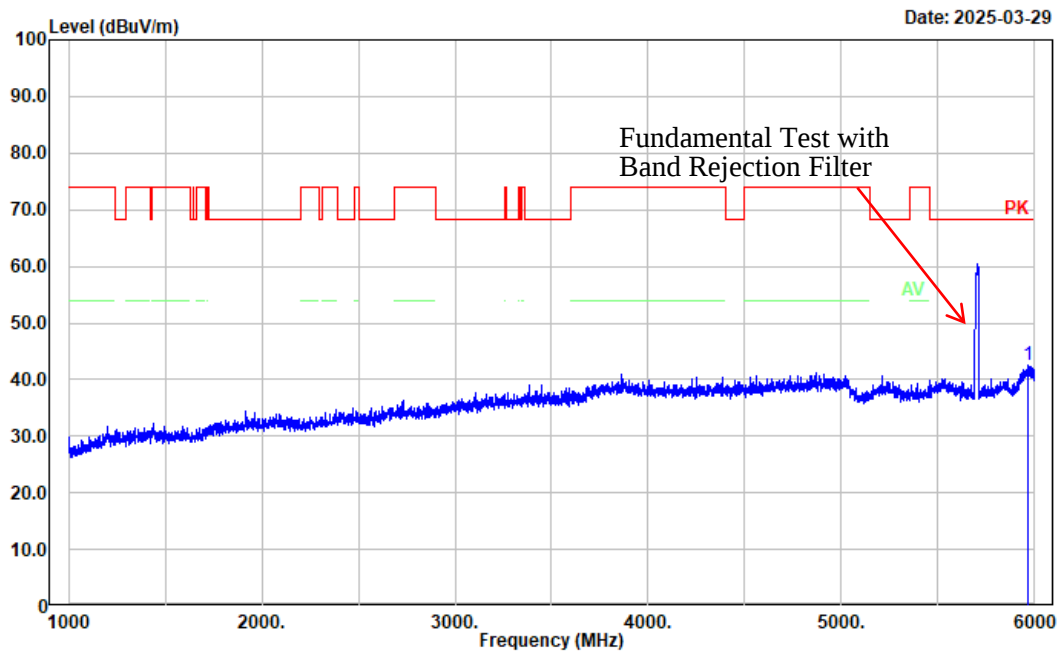


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5968.000	46.54	-3.96	42.58	68.20	25.62	Peak

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: a High Channel 5700MHz Band 3 Chain 1

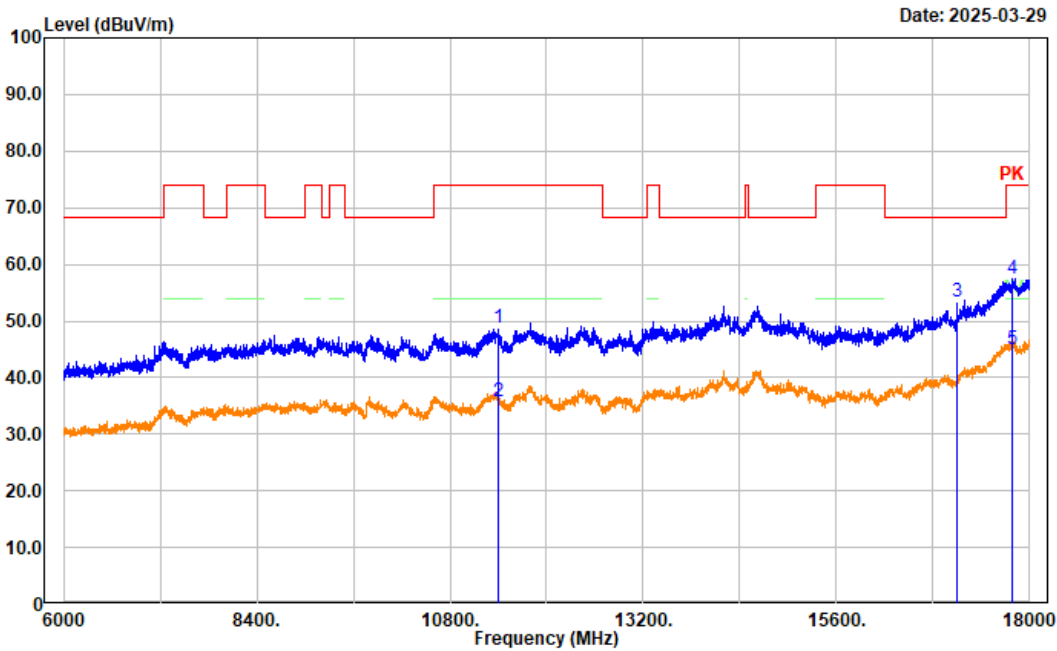


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11400.000	44.12	4.62	48.74	74.00	25.26	Peak
2	11400.000	31.02	4.62	35.64	54.00	18.36	Average
3	17100.000	45.07	8.19	53.26	68.20	14.94	Peak
4	17779.200	43.99	13.45	57.44	74.00	16.56	Peak
5	17779.200	31.56	13.45	45.01	54.00	8.99	Average

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: vertical
 Note: a High Channel 5700MHz Band 3 Chain 1

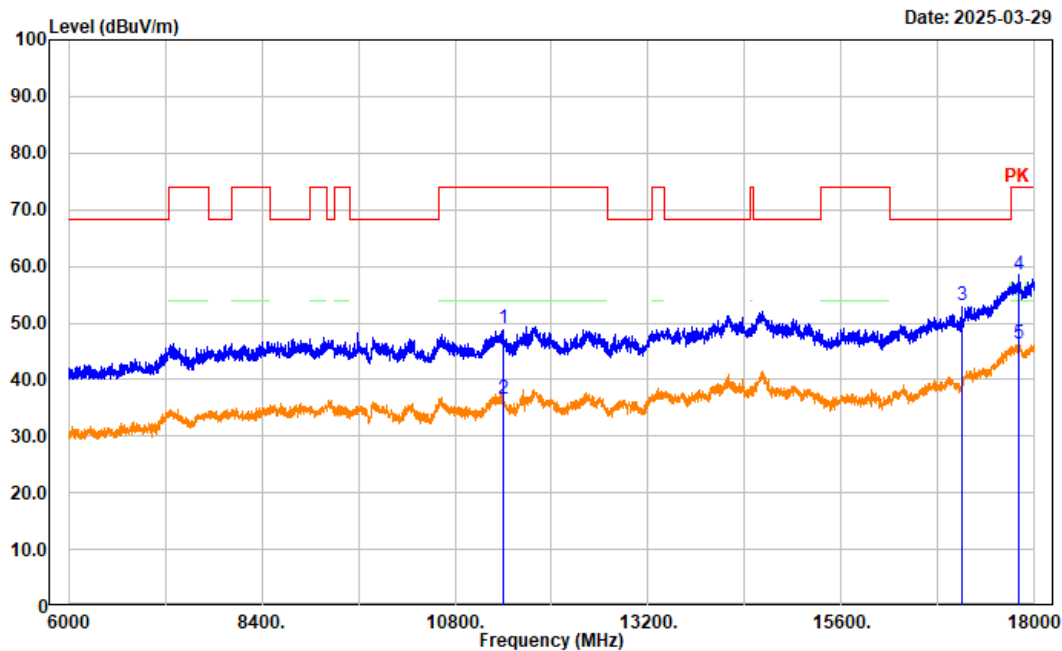


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11400.000	44.51	4.62	49.13	74.00	24.87	Peak
2	11400.000	32.06	4.62	36.68	54.00	17.32	Average
3	17100.000	44.93	8.19	53.12	68.20	15.08	Peak
4	17805.600	45.03	13.55	58.58	74.00	15.42	Peak
5	17805.600	32.78	13.55	46.33	54.00	7.67	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: n20 High Channel 5700MHz Band 3

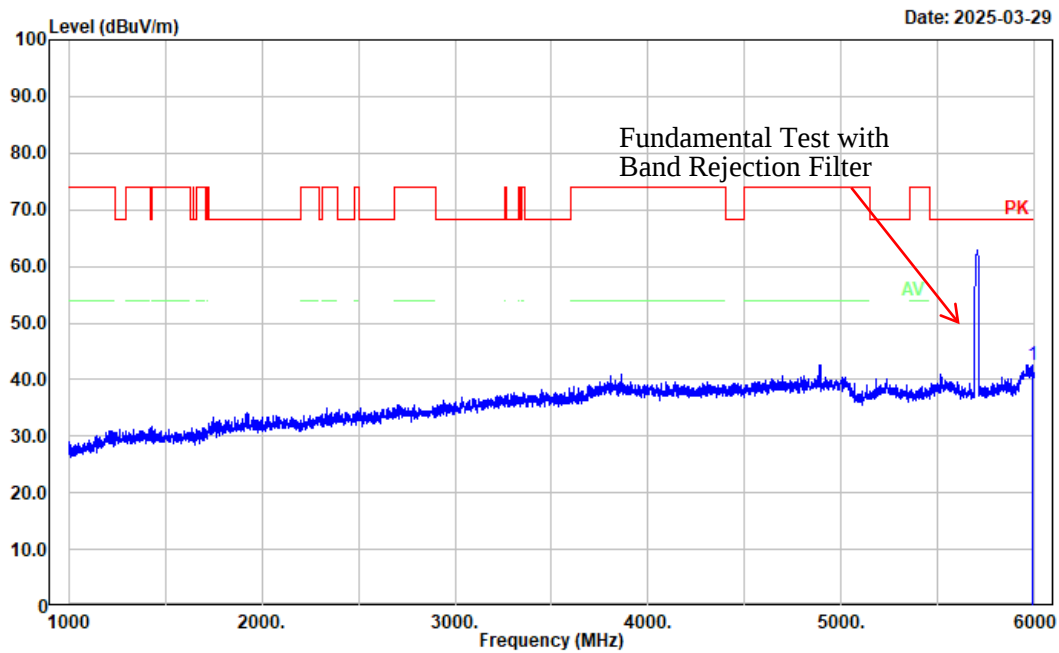


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5989.000	46.72	-4.09	42.63	68.20	25.57	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: n20 High Channel 5700MHz Band 3

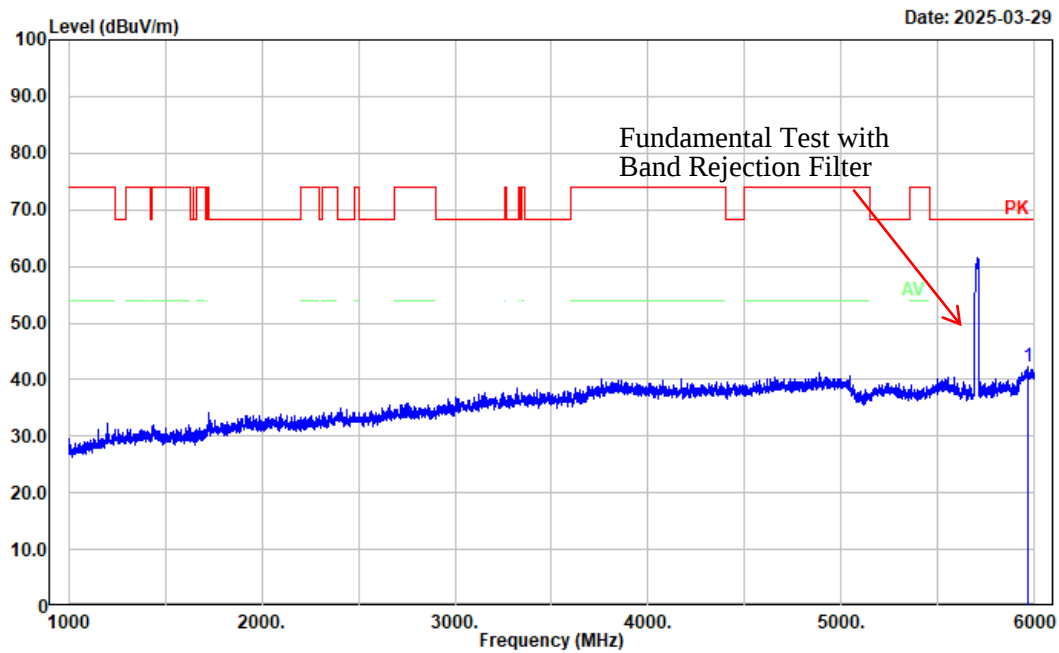


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5962.000	46.07	-3.93	42.14	68.20	26.06	Peak

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: n20 High Channel 5700MHz Band 3

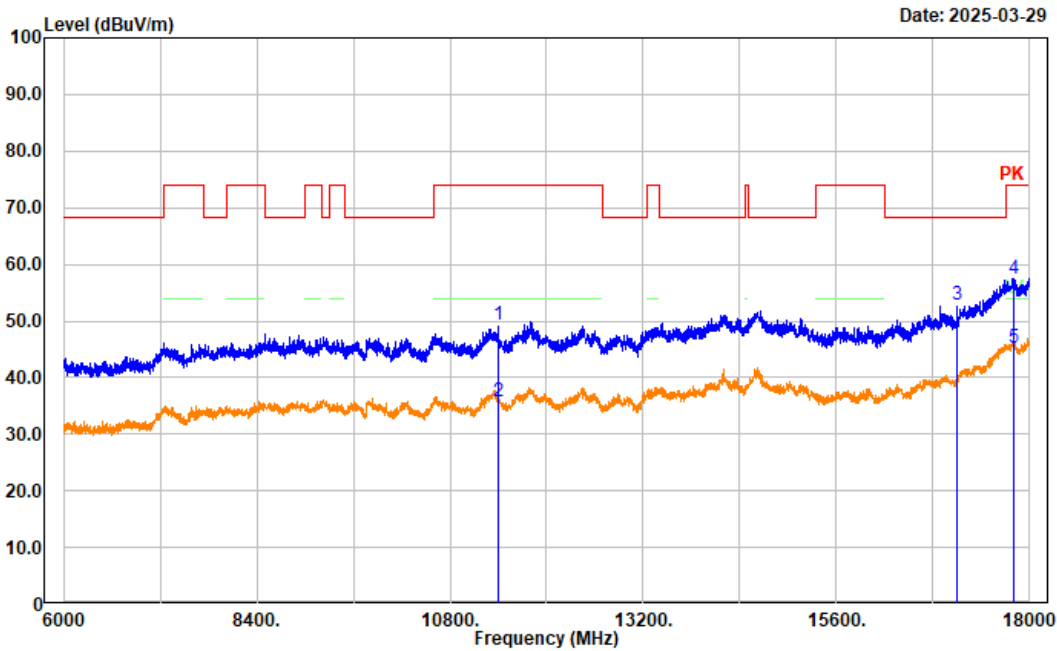


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11400.000	44.61	4.62	49.23	74.00	24.77	Peak
2	11400.000	31.12	4.62	35.74	54.00	18.26	Average
3	17100.000	44.74	8.19	52.93	68.20	15.27	Peak
4	17800.800	43.98	13.55	57.53	74.00	16.47	Peak
5	17800.800	31.67	13.55	45.22	54.00	8.78	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: n20 High Channel 5700MHz Band 3

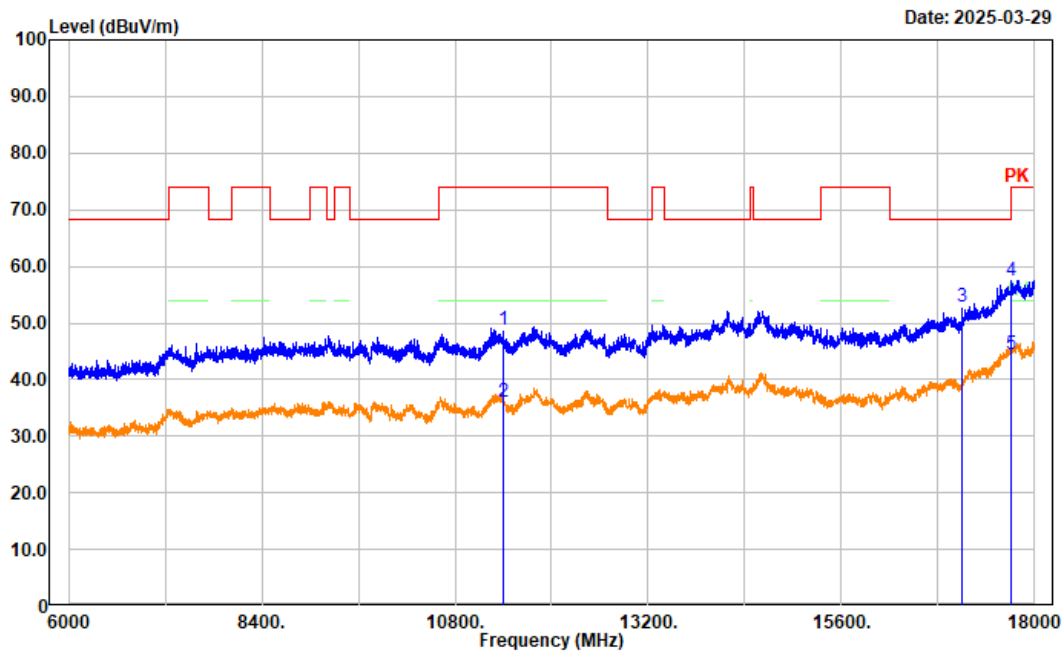


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11400.000	44.12	4.62	48.74	74.00	25.26	Peak
2	11400.000	31.51	4.62	36.13	54.00	17.87	Average
3	17100.000	44.78	8.19	52.97	68.20	15.23	Peak
4	17700.000	44.51	13.07	57.58	68.20	10.62	Peak
5	17700.000	31.50	13.07	44.57	54.00	9.43	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: n40 High Channel 5670MHz Band 3

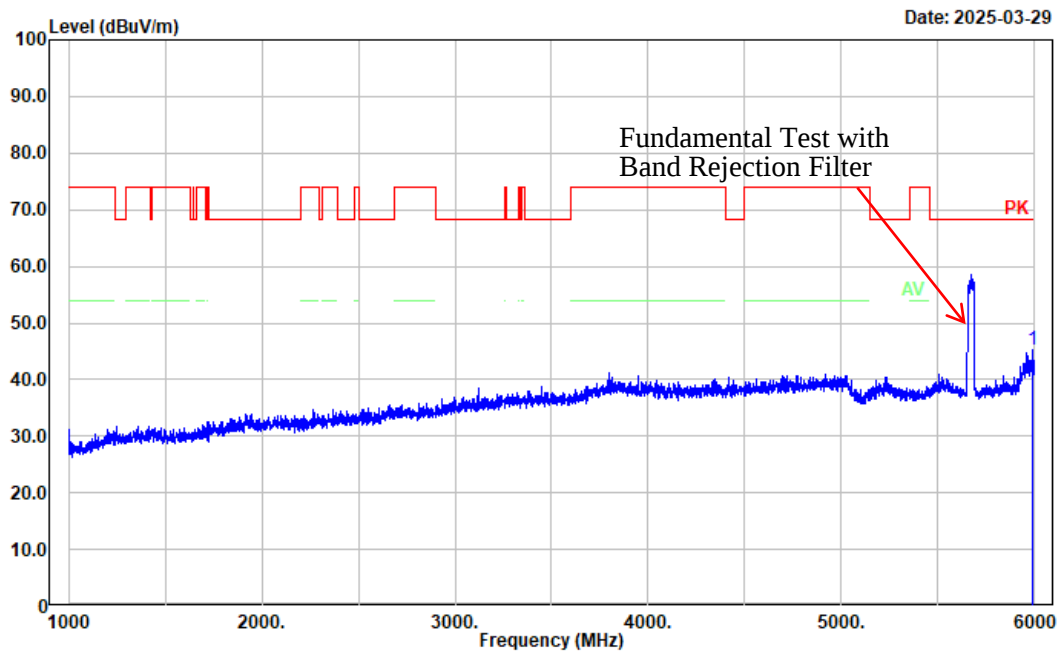


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5992.000	49.32	-4.12	45.20	68.20	23.00	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: n40 High Channel 5670MHz Band 3

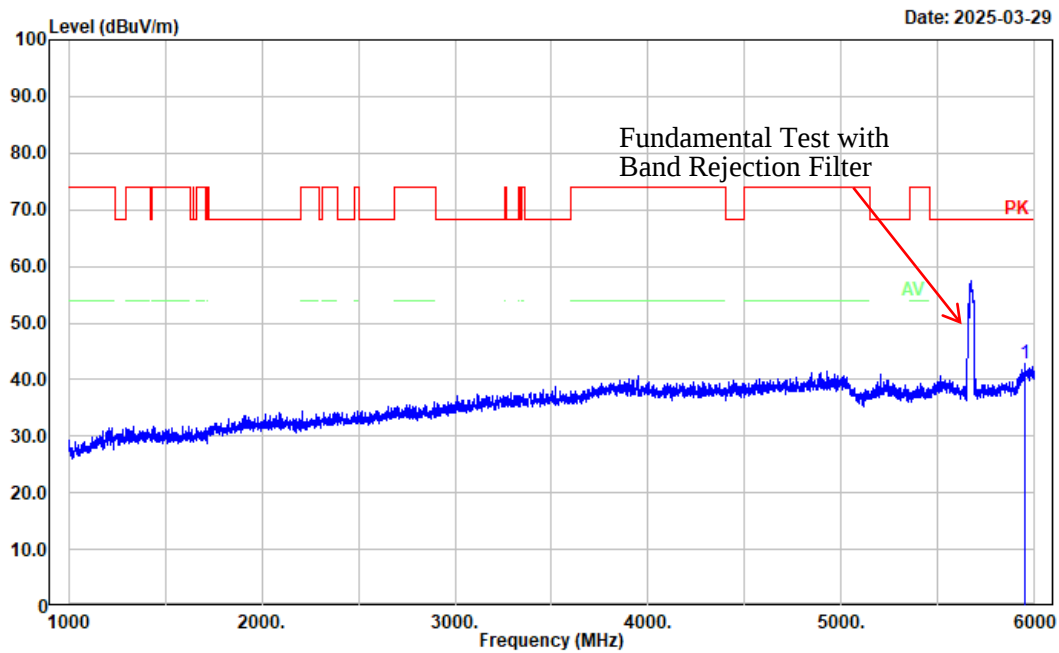


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5949.000	46.56	-3.85	42.71	68.20	25.49	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: n40 High Channel 5670MHz Band 3

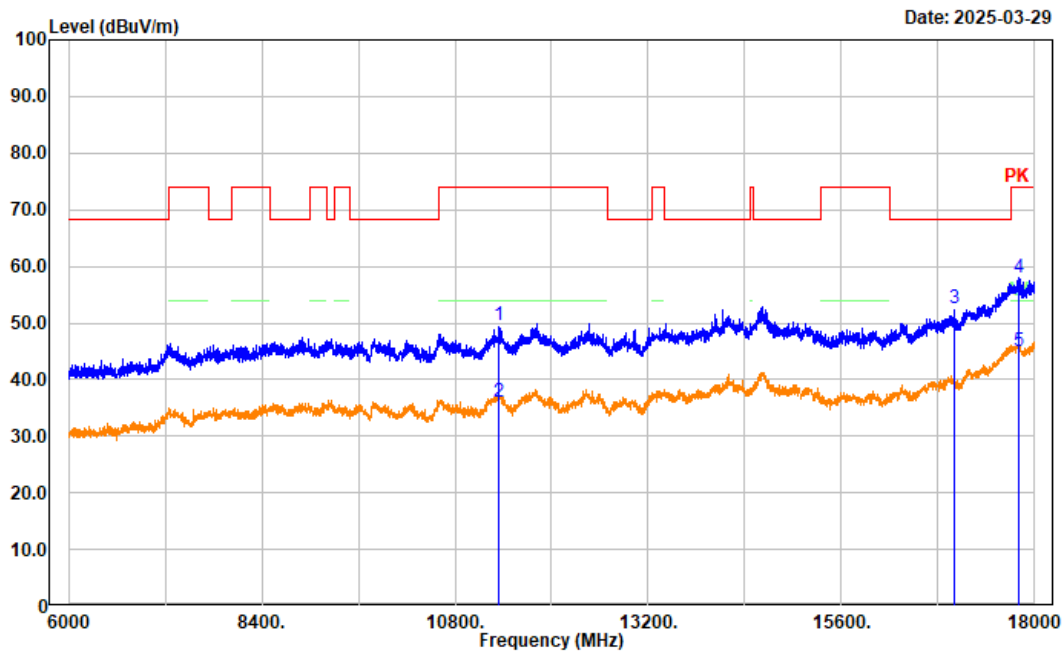


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11340.000	45.10	4.49	49.59	74.00	24.41	Peak
2	11340.000	31.52	4.49	36.01	54.00	17.99	Average
3	17010.000	44.59	7.85	52.44	68.20	15.76	Peak
4	17793.600	44.41	13.51	57.92	74.00	16.08	Peak
5	17793.600	31.45	13.51	44.96	54.00	9.04	Average

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: vertical
 Note: n40 High Channel 5670MHz Band 3

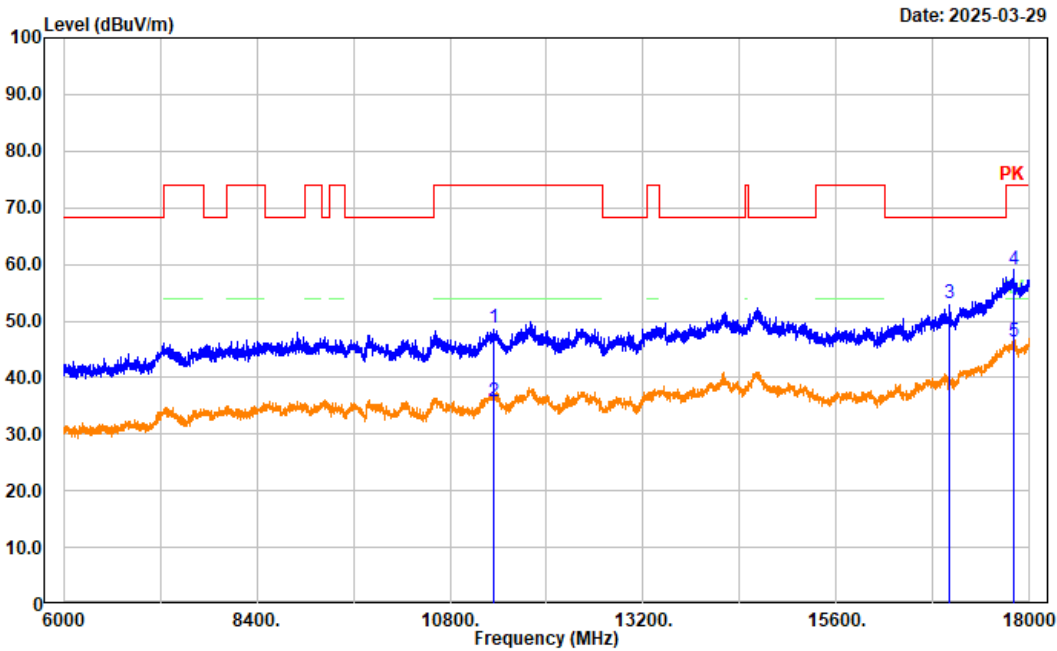


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11340.000	44.36	4.49	48.85	74.00	25.15	Peak
2	11340.000	31.29	4.49	35.78	54.00	18.22	Average
3	17010.000	45.33	7.85	53.18	68.20	15.02	Peak
4	17793.600	45.56	13.51	59.07	74.00	14.93	Peak
5	17793.600	32.74	13.51	46.25	54.00	7.75	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ac80 High Channel 5610MHz Band 3

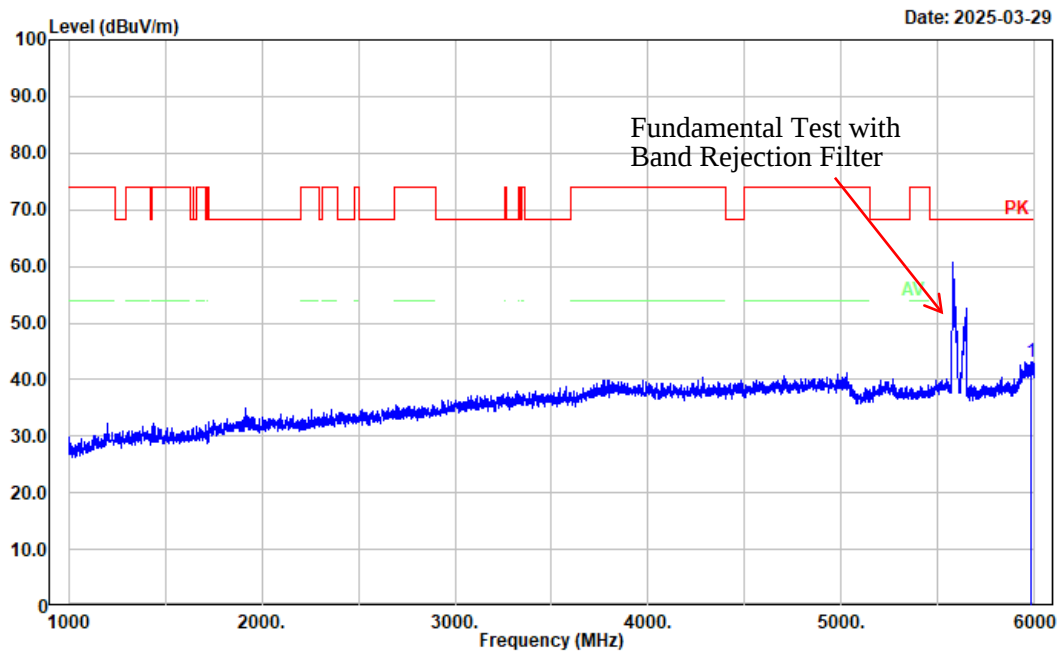


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5978.000	47.24	-4.02	43.22	68.20	24.98	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ac80 High Channel 5610MHz Band 3

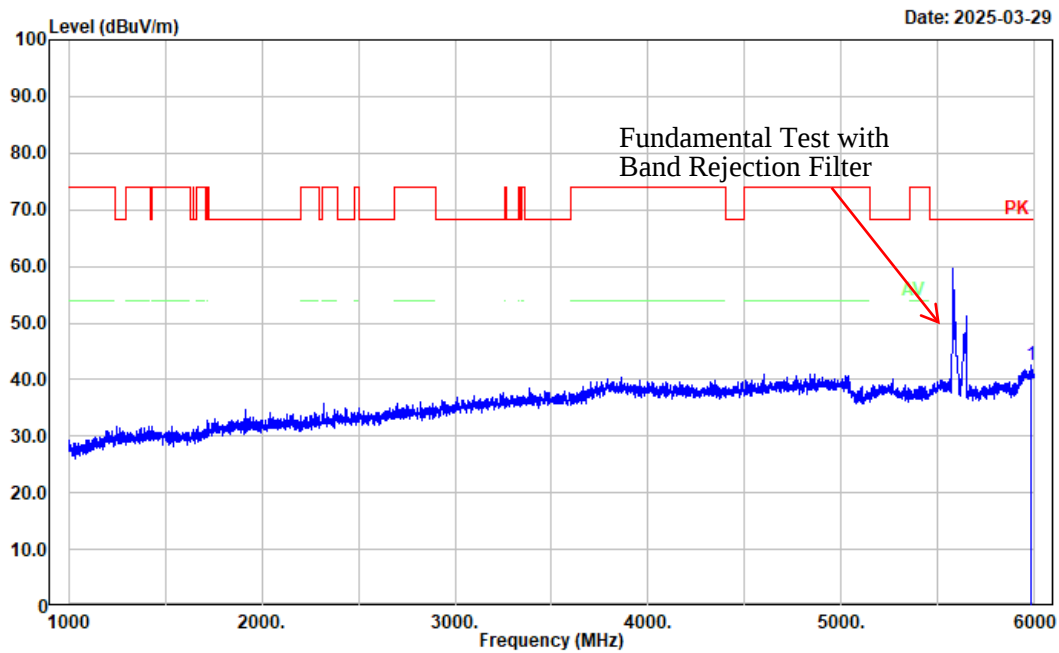


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5978.000	46.51	-4.02	42.49	68.20	25.71	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: ac80 High Channel 5610MHz Band 3

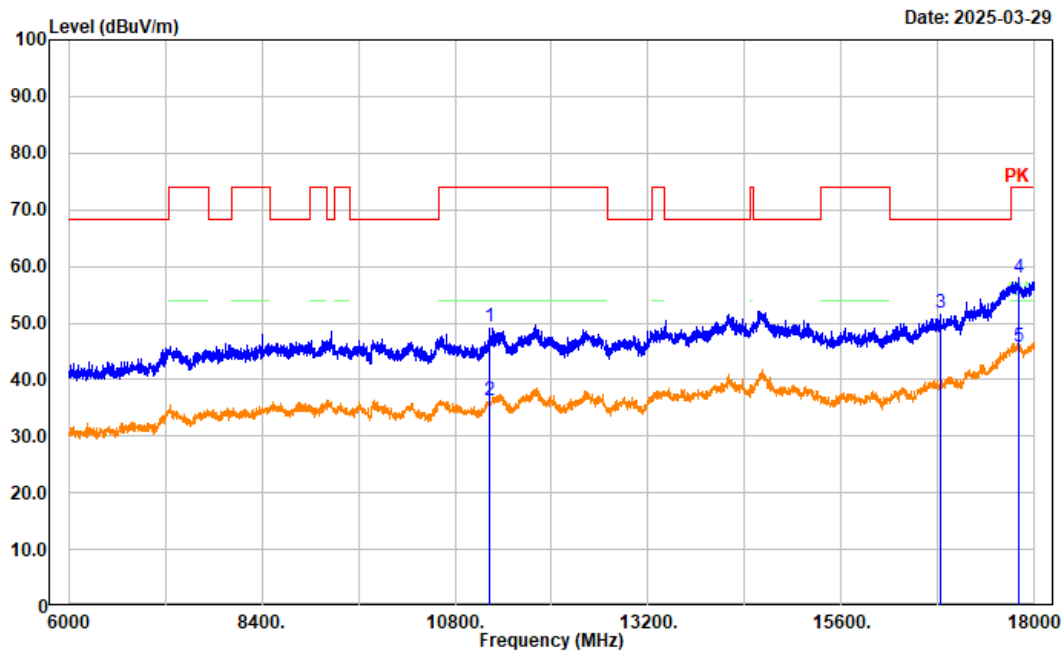


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11220.000	45.38	3.96	49.34	74.00	24.66	Peak
2	11220.000	32.33	3.96	36.29	54.00	17.71	Average
3	16830.000	44.51	7.27	51.78	68.20	16.42	Peak
4	17808.000	44.53	13.55	58.08	74.00	15.92	Peak
5	17808.000	32.16	13.55	45.71	54.00	8.29	Average

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: vertical
 Note: ac80 High Channel 5610MHz Band 3

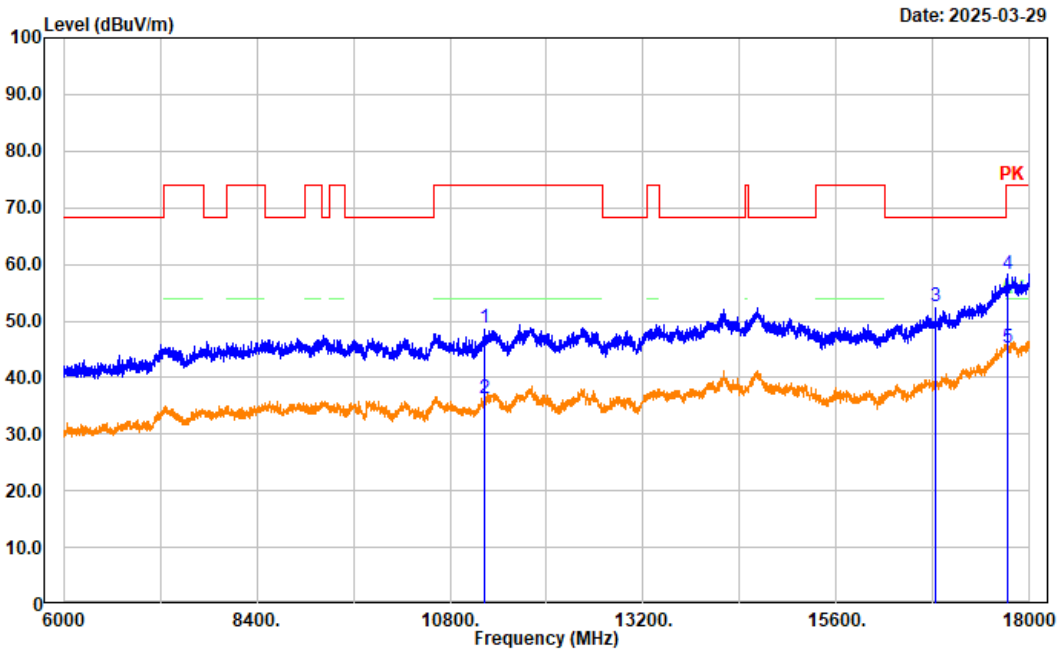


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11220.000	44.86	3.96	48.82	74.00	25.18	Peak
2	11220.000	32.32	3.96	36.28	54.00	17.72	Average
3	16830.000	45.20	7.27	52.47	68.20	15.73	Peak
4	17728.800	44.95	13.21	58.16	74.00	15.84	Peak
5	17728.800	32.08	13.21	45.29	54.00	8.71	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax20 High Channel 5700MHz Band 3

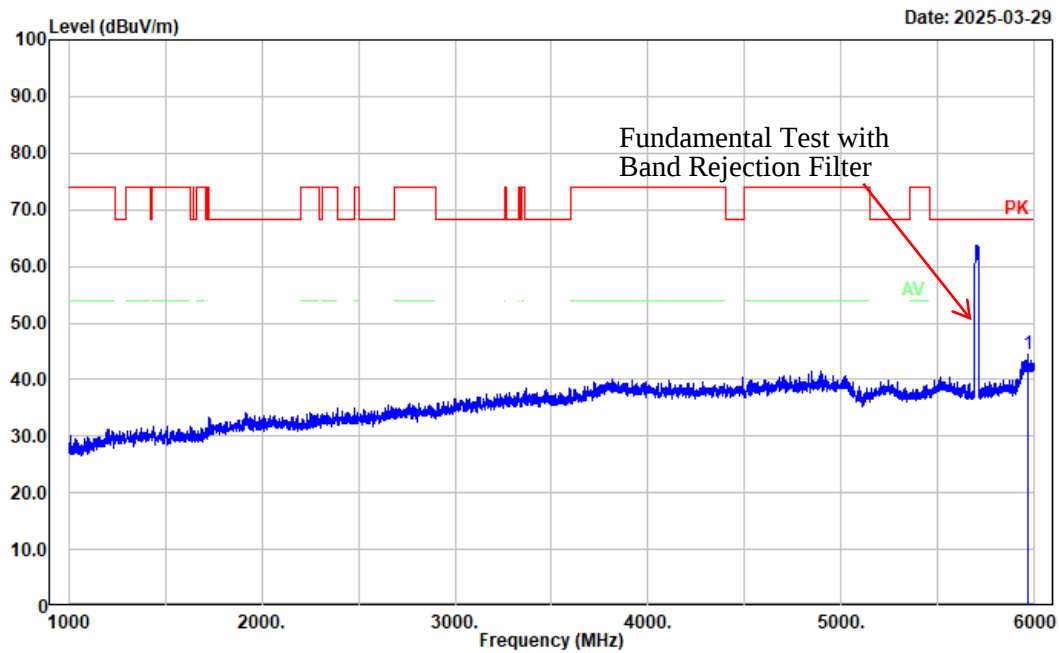


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5962.000	48.32	-3.93	44.39	68.20	23.81	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax20 High Channel 5700MHz Band 3

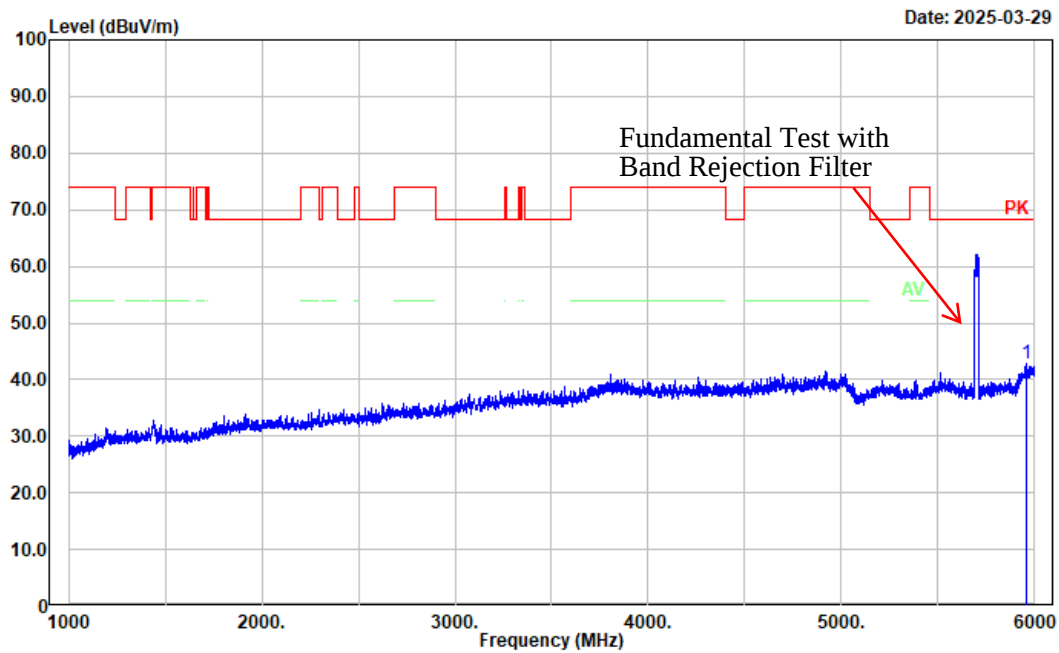


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5959.000	46.61	-3.91	42.70	68.20	25.50	Peak

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: ax20 High Channel 5700MHz Band 3

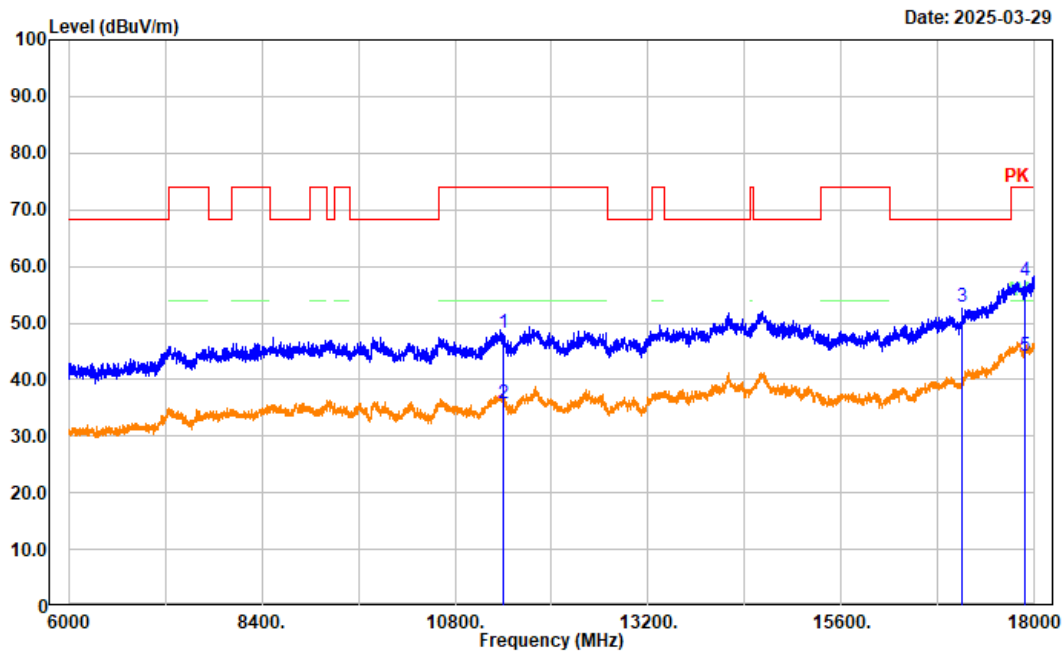


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11400.000	43.63	4.62	48.25	74.00	25.75	Peak
2	11400.000	31.11	4.62	35.73	54.00	18.27	Average
3	17100.000	44.58	8.19	52.77	68.20	15.43	Peak
4	17877.600	43.89	13.52	57.41	74.00	16.59	Peak
5	17877.600	30.75	13.52	44.27	54.00	9.73	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ax20 High Channel 5700MHz Band 3

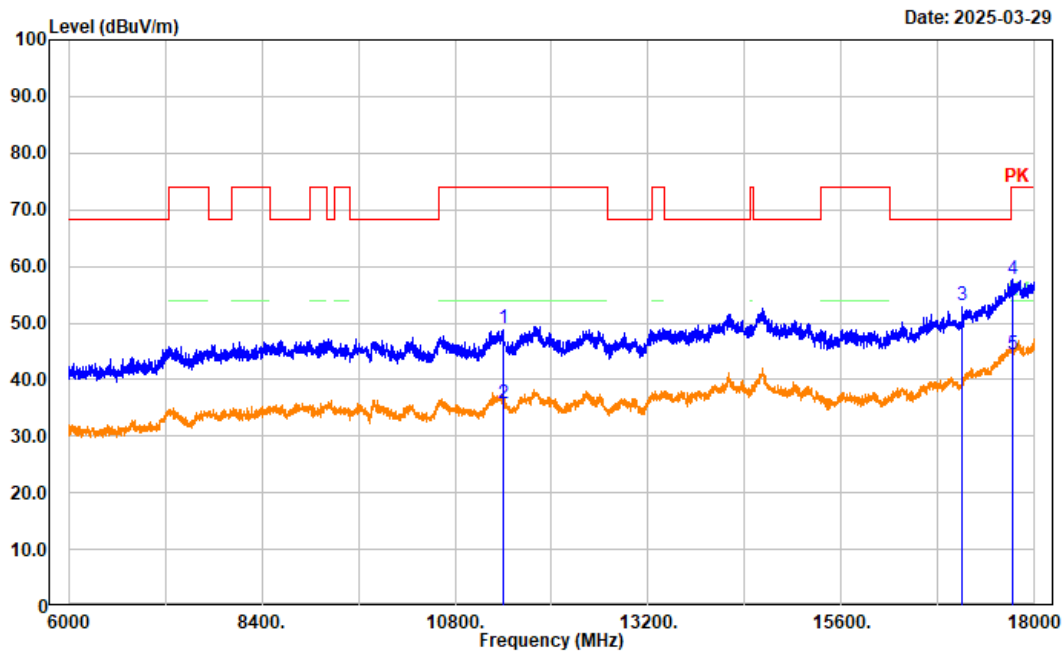


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11400.000	44.37	4.62	48.99	74.00	25.01	Peak
2	11400.000	31.04	4.62	35.66	54.00	18.34	Average
3	17100.000	44.81	8.19	53.00	68.20	15.20	Peak
4	17719.200	44.48	13.17	57.65	74.00	16.35	Peak
5	17719.200	31.37	13.17	44.54	54.00	9.46	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax40 High Channel 5670MHz Band 3

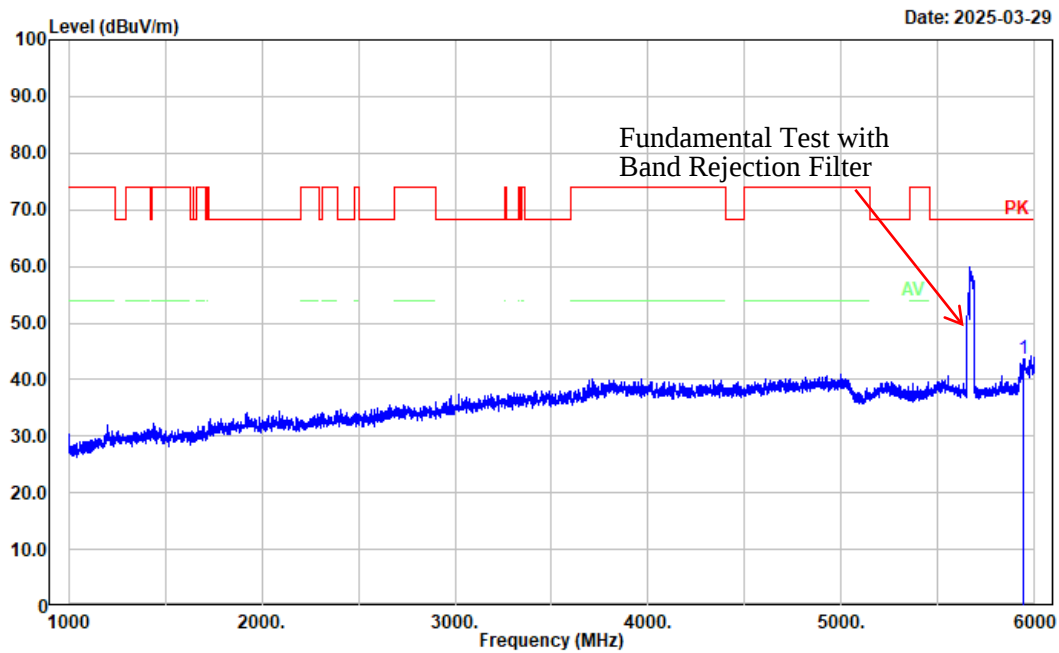


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5942.000	47.57	-3.94	43.63	68.20	24.57	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax40 High Channel 5670MHz Band 3

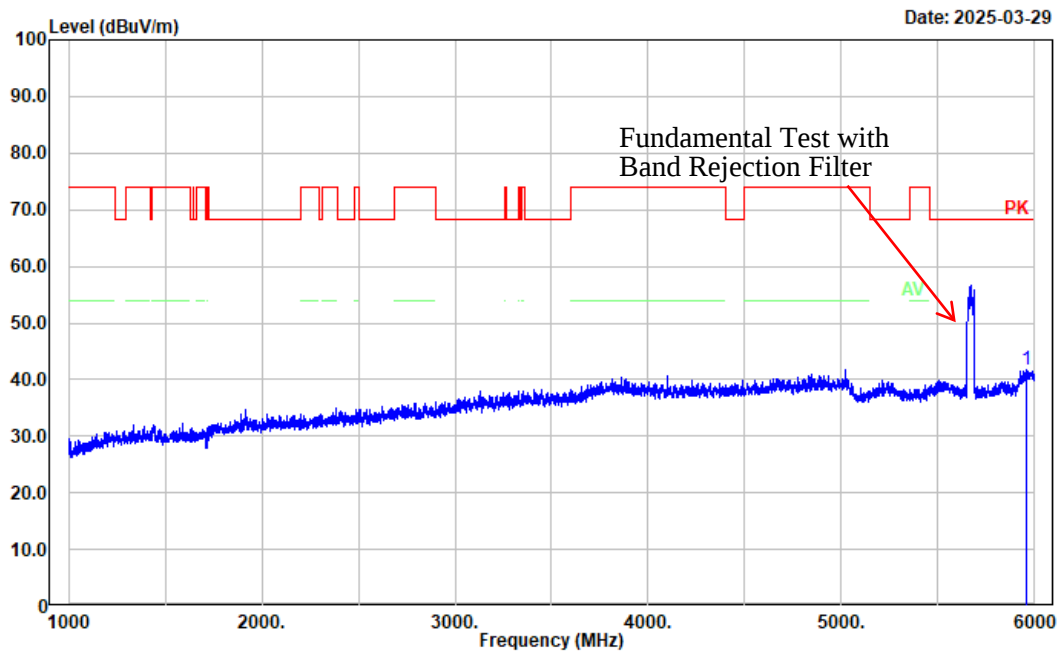


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5956.000	45.68	-3.89	41.79	68.20	26.41	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: ax40 High Channel 5670MHz Band 3

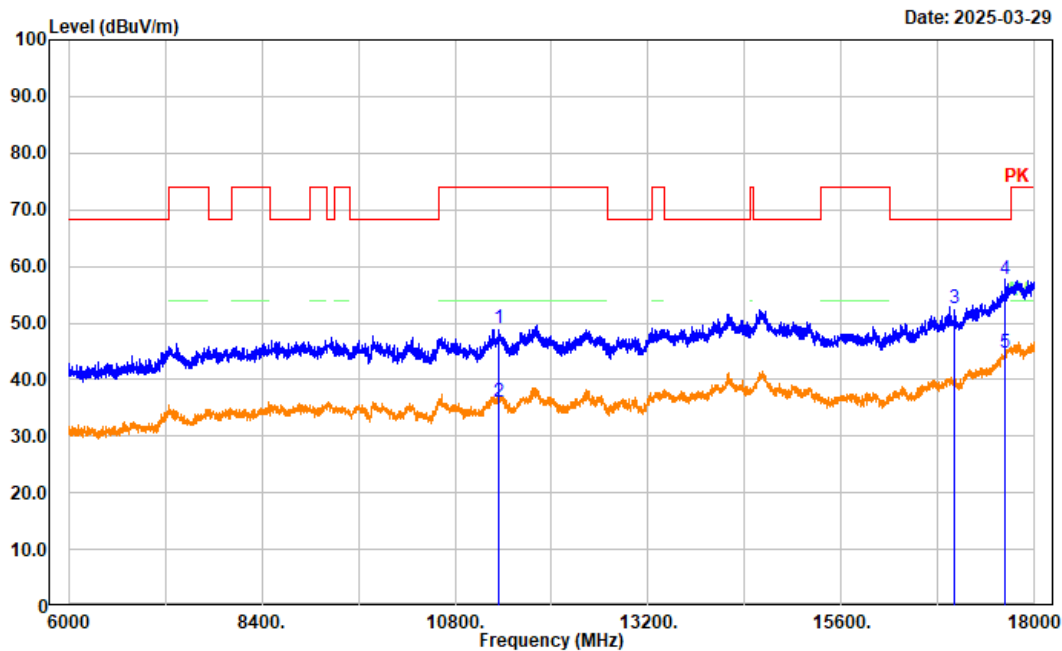


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11340.000	44.57	4.49	49.06	74.00	24.94	Peak
2	11340.000	31.59	4.49	36.08	54.00	17.92	Average
3	17010.000	44.74	7.85	52.59	68.20	15.61	Peak
4	17632.800	45.19	12.42	57.61	68.20	10.59	Peak
5	17632.800	32.26	12.42	44.68	68.20	23.52	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ax40 High Channel 5670MHz Band 3

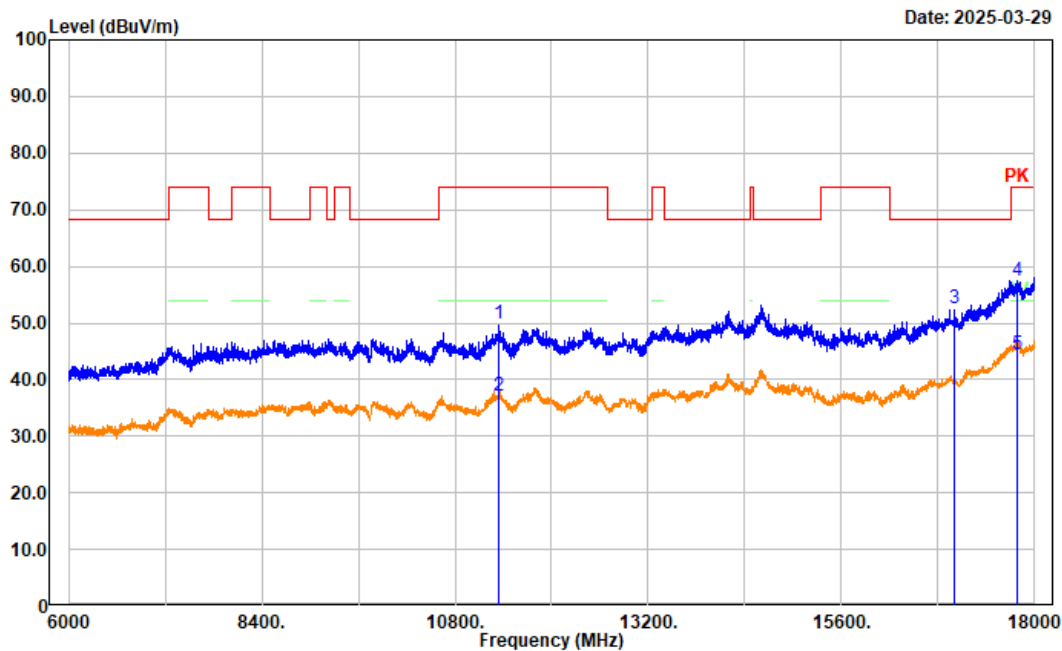


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11340.000	45.24	4.49	49.73	74.00	24.27	Peak
2	11340.000	32.65	4.49	37.14	54.00	16.86	Average
3	17010.000	44.86	7.85	52.71	68.20	15.49	Peak
4	17774.400	43.97	13.42	57.39	74.00	16.61	Peak
5	17774.400	30.96	13.42	44.38	54.00	9.62	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax80 High Channel 5610MHz Band 3

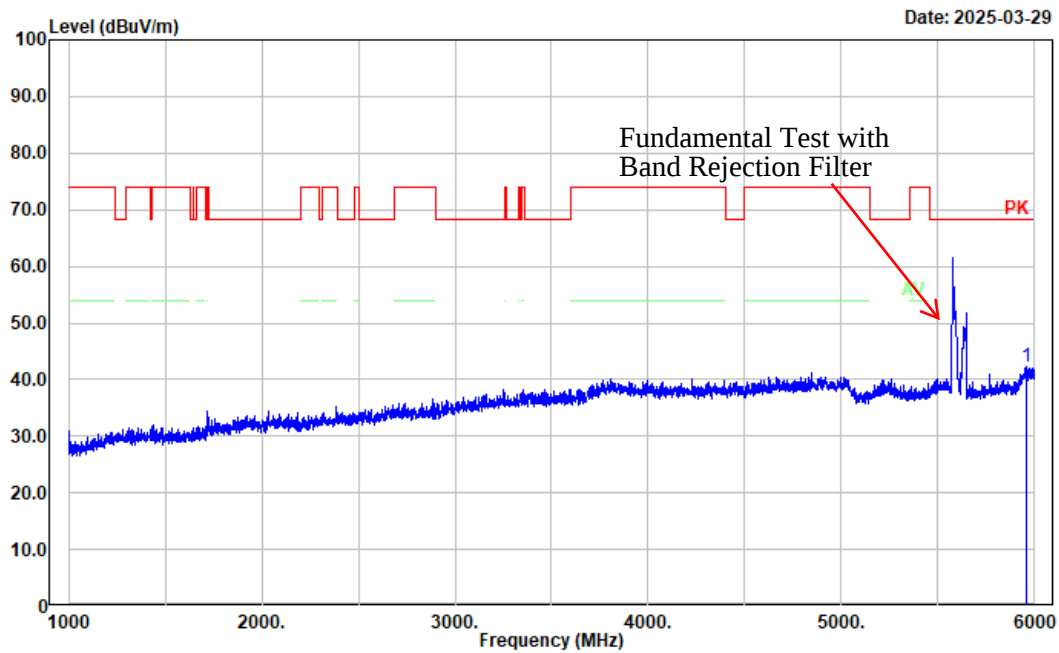


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5957.000	46.15	-3.90	42.25	68.20	25.95	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax80 High Channel 5610MHz Band 3

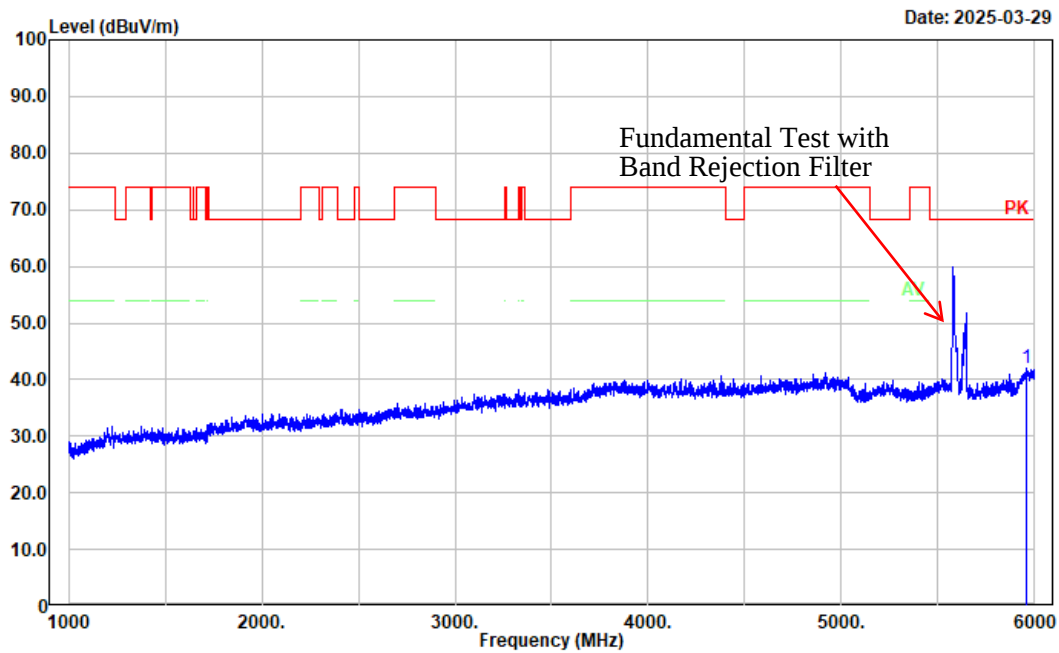


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5957.000	45.80	-3.90	41.90	68.20	26.30	Peak

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: ax80 High Channel 5610MHz Band 3

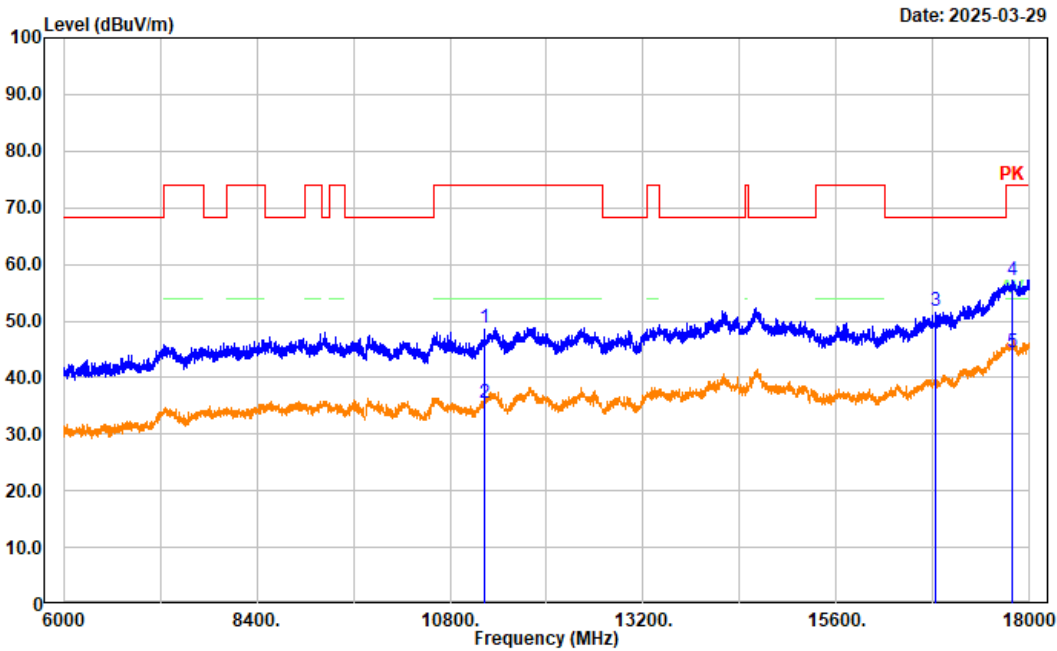


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11220.000	44.87	3.96	48.83	74.00	25.17	Peak
2	11220.000	31.45	3.96	35.41	54.00	18.59	Average
3	16830.000	44.52	7.27	51.79	68.20	16.41	Peak
4	17781.600	43.78	13.46	57.24	74.00	16.76	Peak
5	17781.600	31.08	13.46	44.54	54.00	9.46	Average

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: vertical
 Note: ax80 High Channel 5610MHz Band 3

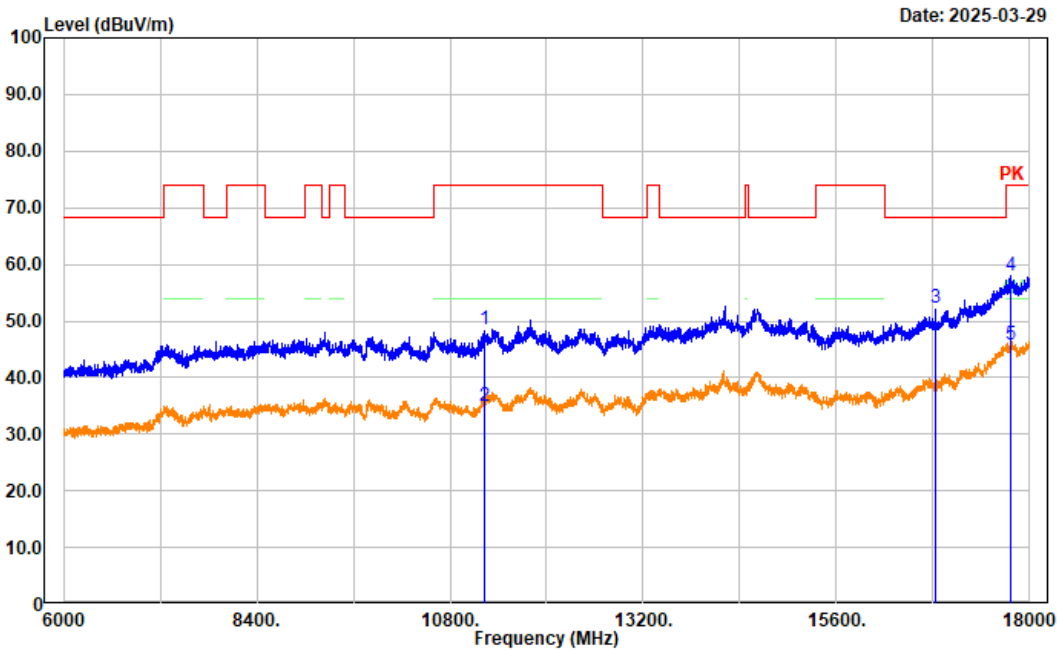


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11220.000	44.56	3.96	48.52	74.00	25.48	Peak
2	11220.000	31.02	3.96	34.98	54.00	19.02	Average
3	16830.000	45.13	7.27	52.40	68.20	15.80	Peak
4	17755.200	44.68	13.34	58.02	74.00	15.98	Peak
5	17755.200	32.35	13.34	45.69	54.00	8.31	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: a High Channel 5825MHz Band 4 Chain 0

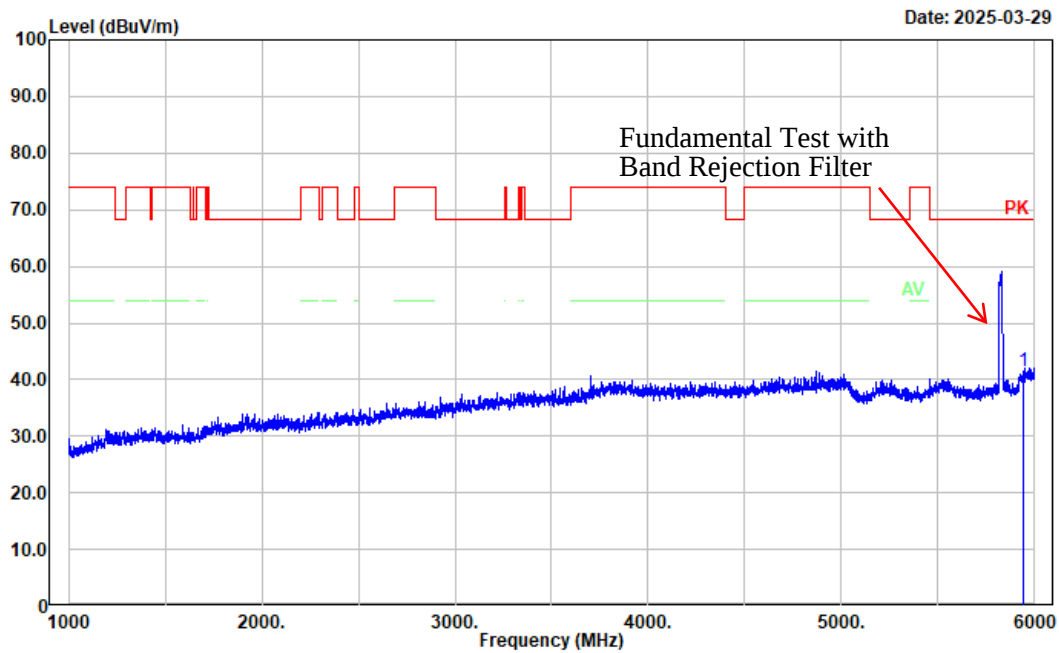


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5944.000	45.33	-3.92	41.41	68.20	26.79	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: a High Channel 5825MHz Band 4 Chain 0

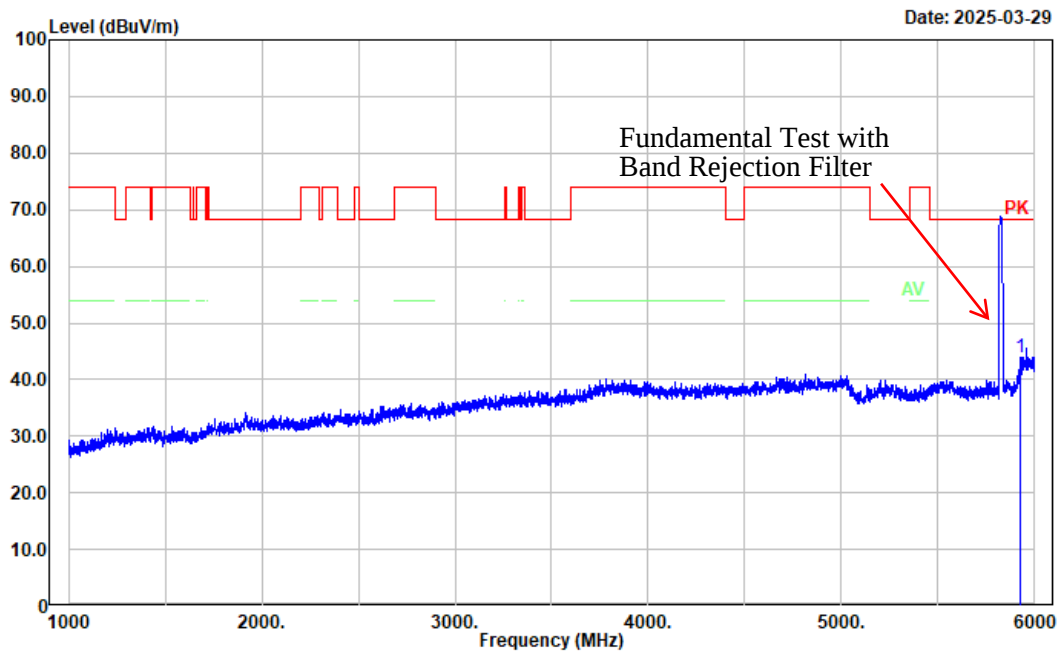


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5929.000	47.93	-4.09	43.84	68.20	24.36	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: a High Channel 5825MHz Band 4 Chain 0

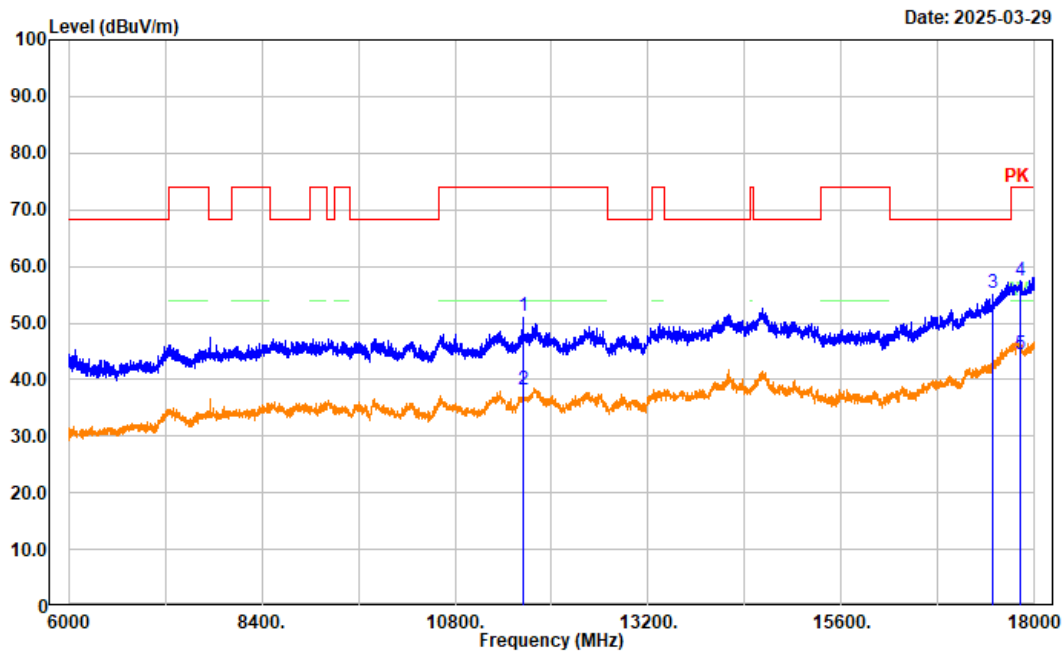


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11650.000	45.63	5.55	51.18	74.00	22.82	Peak
2	11650.000	32.68	5.55	38.23	54.00	15.77	Average
3	17475.000	44.49	10.91	55.40	68.20	12.80	Peak
4	17817.600	43.97	13.55	57.52	74.00	16.48	Peak
5	17817.600	31.01	13.55	44.56	54.00	9.44	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: a High Channel 5825MHz Band 4 Chain 0

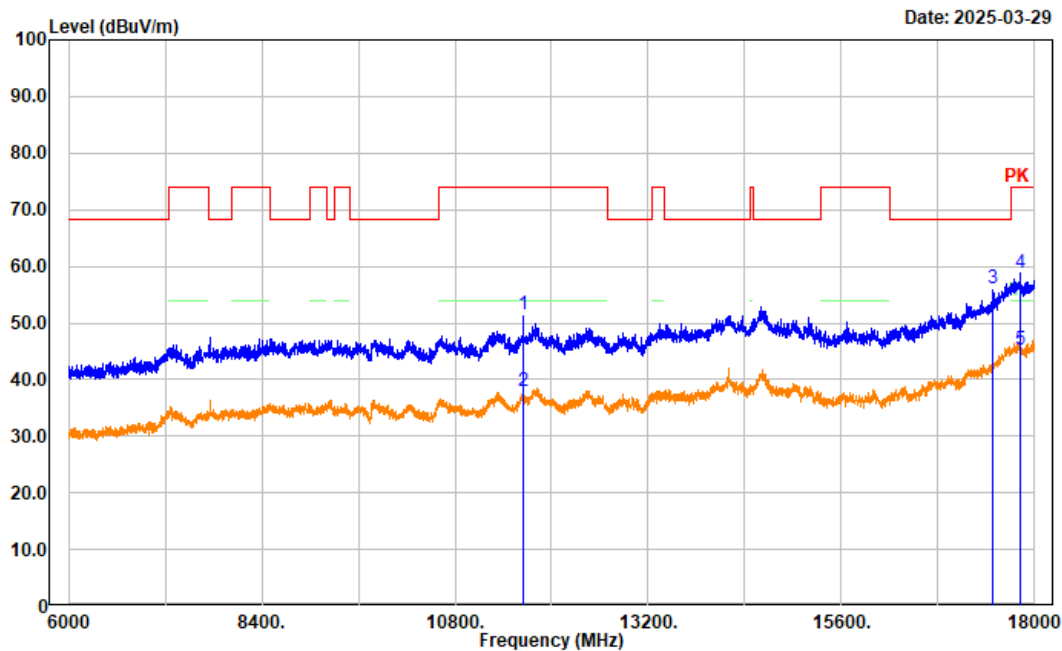


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11650.000	45.84	5.55	51.39	74.00	22.61	Peak
2	11650.000	32.50	5.55	38.05	54.00	15.95	Average
3	17475.000	45.21	10.91	56.12	68.20	12.08	Peak
4	17815.200	45.35	13.54	58.89	74.00	15.11	Peak
5	17815.200	31.67	13.54	45.21	54.00	8.79	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: a High Channel 5825MHz Band 4 Chain 1

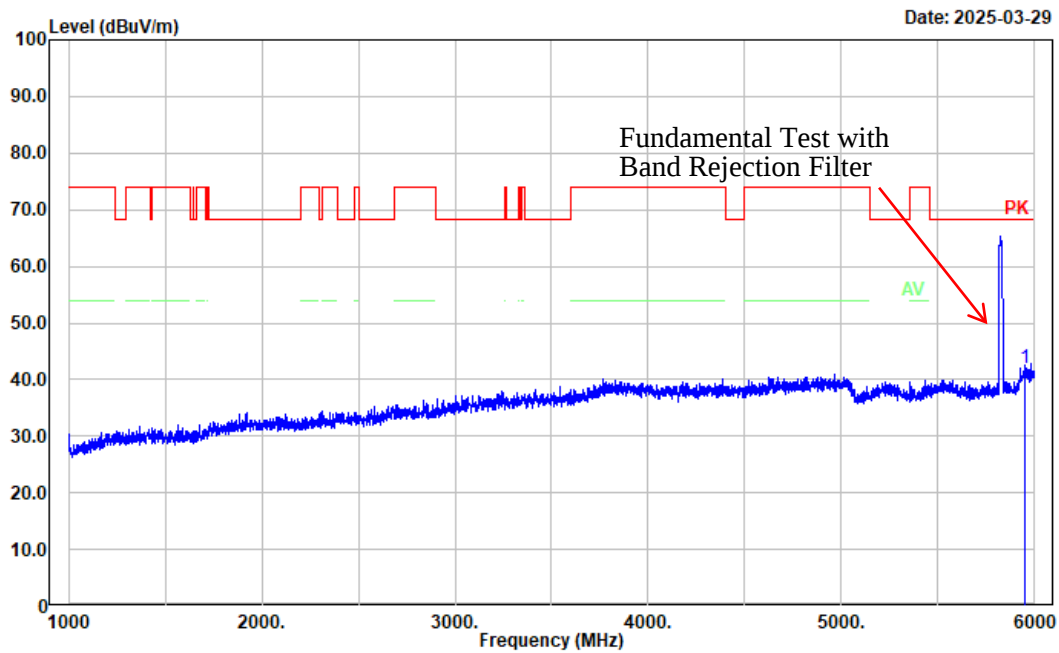


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5952.000	45.83	-3.87	41.96	68.20	26.24	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: a High Channel 5825MHz Band 4 Chain 1

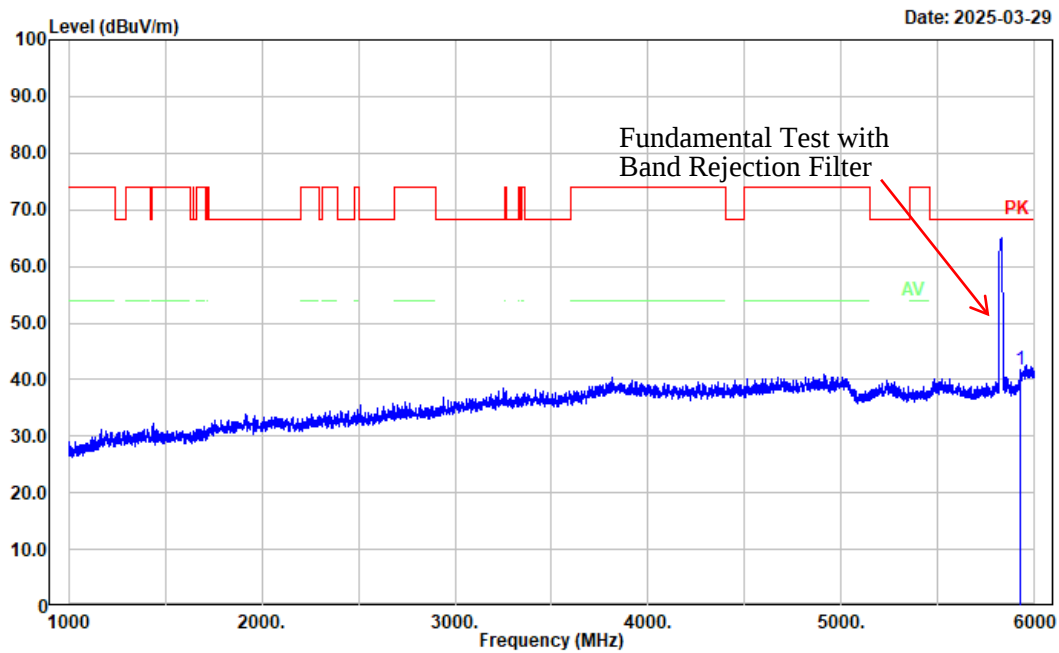


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5923.000	45.84	-4.17	41.67	68.20	26.53	Peak

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: a High Channel 5825MHz Band 4 Chain 1

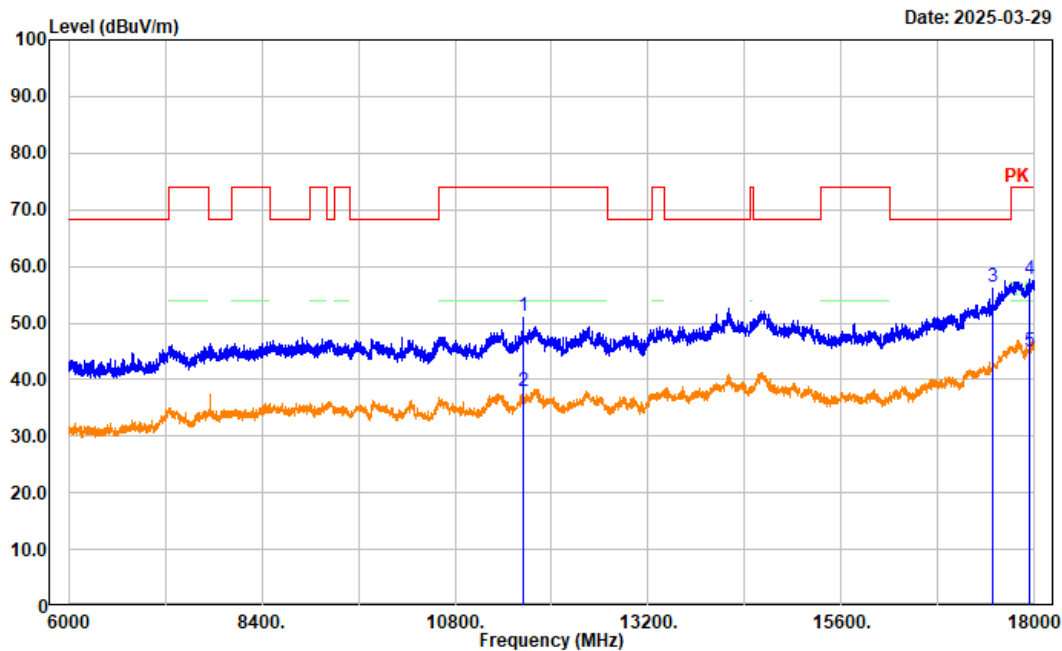


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11650.000	45.76	5.55	51.31	74.00	22.69	Peak
2	11650.000	32.47	5.55	38.02	54.00	15.98	Average
3	17475.000	45.45	10.91	56.36	68.20	11.84	Peak
4	17942.400	43.85	13.75	57.60	74.00	16.40	Peak
5	17942.400	31.12	13.75	44.87	54.00	9.13	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: a High Channel 5825MHz Band 4 Chain 1

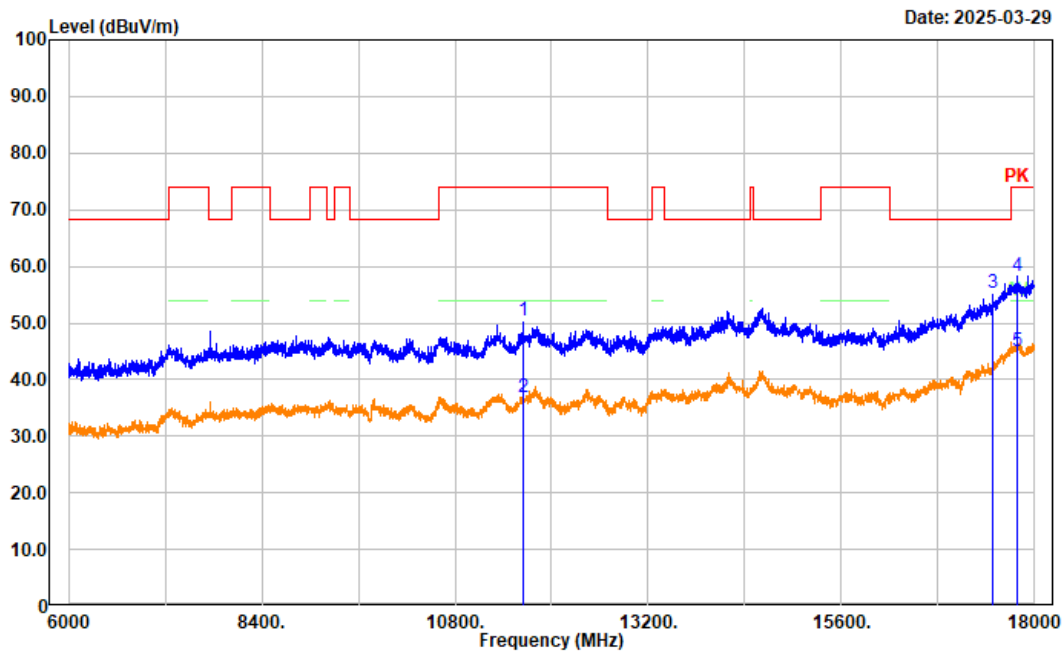


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11650.000	44.98	5.55	50.53	74.00	23.47	Peak
2	11650.000	31.22	5.55	36.77	54.00	17.23	Average
3	17475.000	44.47	10.91	55.38	68.20	12.82	Peak
4	17781.600	44.83	13.46	58.29	74.00	15.71	Peak
5	17781.600	31.58	13.46	45.04	54.00	8.96	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: n20 High Channel 5825MHz Band 4

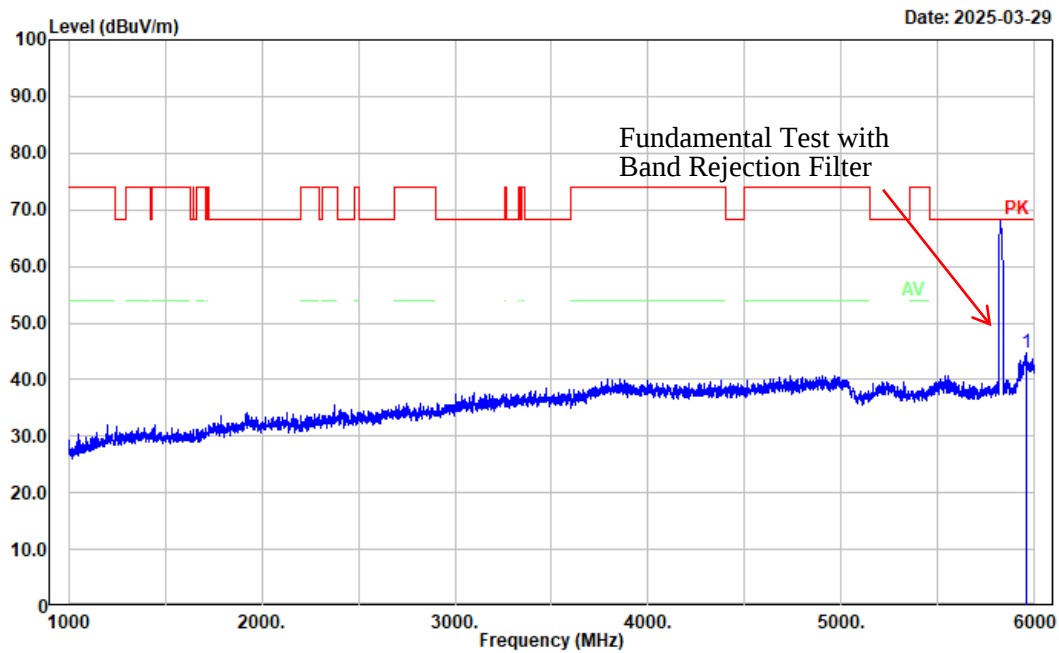


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5958.000	48.50	-3.89	44.61	68.20	23.59	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: n20 High Channel 5825MHz Band 4

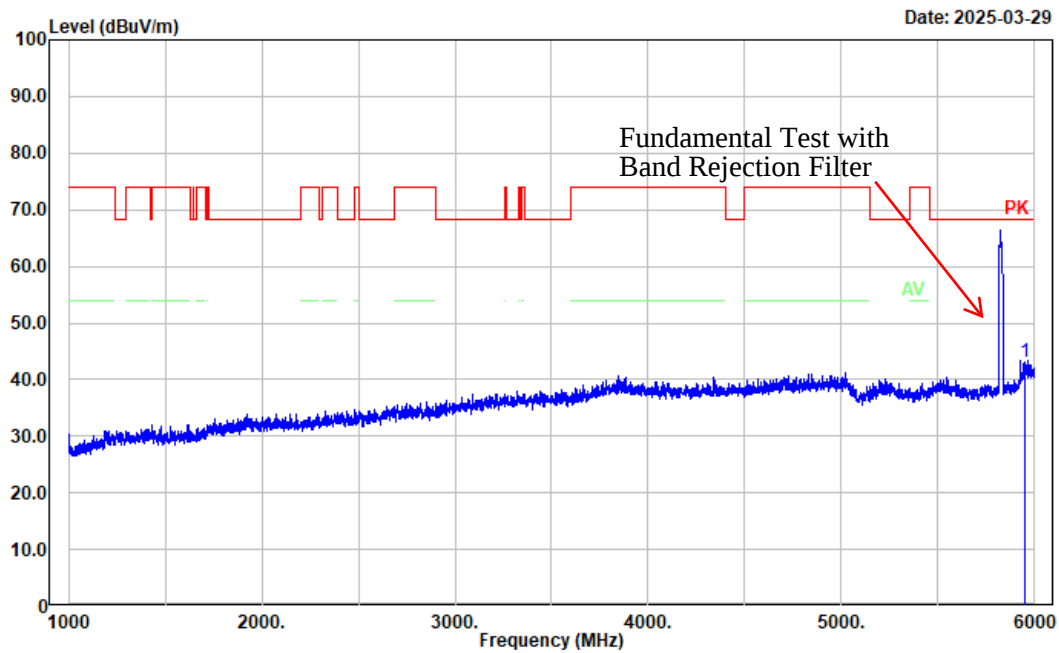


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5951.000	46.84	-3.85	42.99	68.20	25.21	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: n20 High Channel 5825MHz Band 4

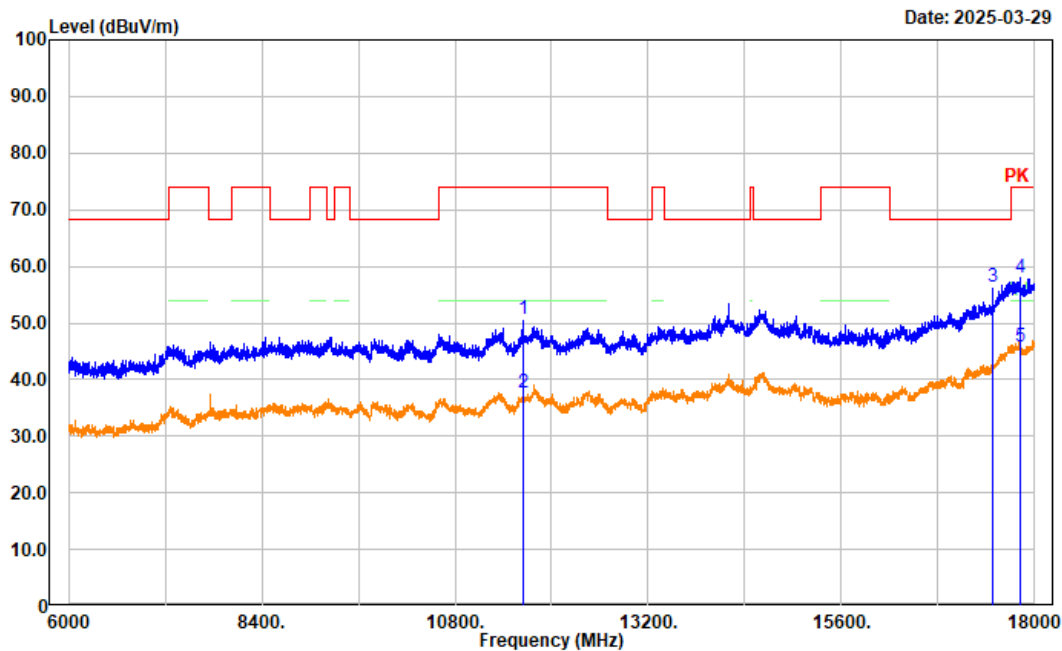


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11650.000	45.24	5.55	50.79	74.00	23.21	Peak
2	11650.000	32.04	5.55	37.59	54.00	16.41	Average
3	17475.000	45.40	10.91	56.31	68.20	11.89	Peak
4	17812.800	44.47	13.55	58.02	74.00	15.98	Peak
5	17812.800	32.27	13.55	45.82	54.00	8.18	Average

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: vertical
 Note: n20 High Channel 5825MHz Band 4

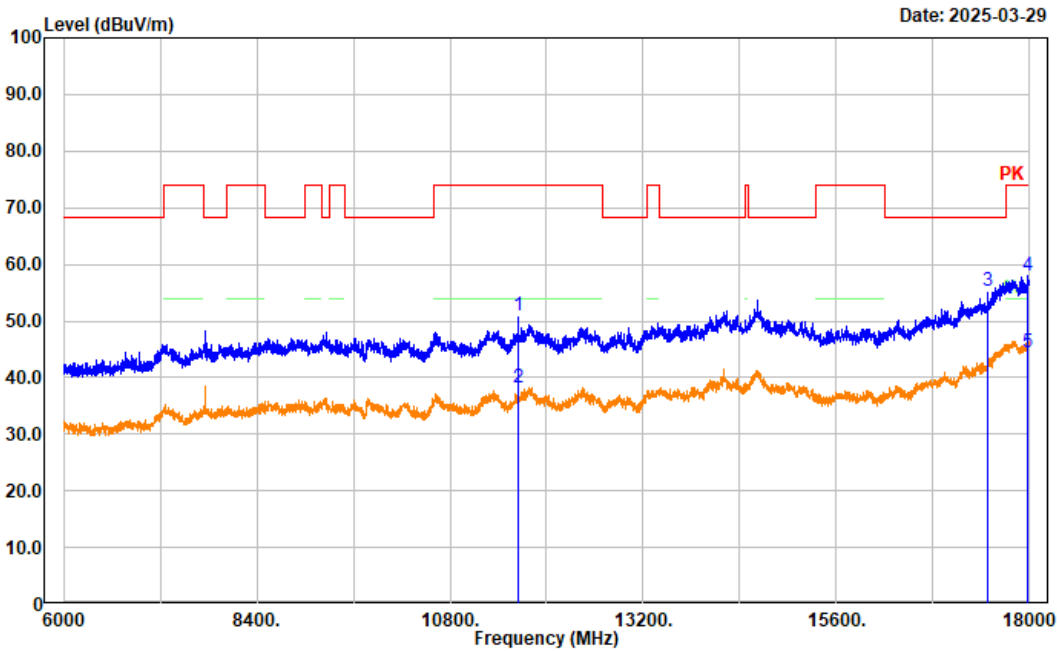


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11650.000	45.38	5.55	50.93	74.00	23.07	Peak
2	11650.000	32.59	5.55	38.14	54.00	15.86	Average
3	17475.000	44.37	10.91	55.28	68.20	12.92	Peak
4	17968.800	44.03	13.90	57.93	74.00	16.07	Peak
5	17968.800	30.59	13.90	44.49	54.00	9.51	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: n40 High Channel 5795MHz Band 4

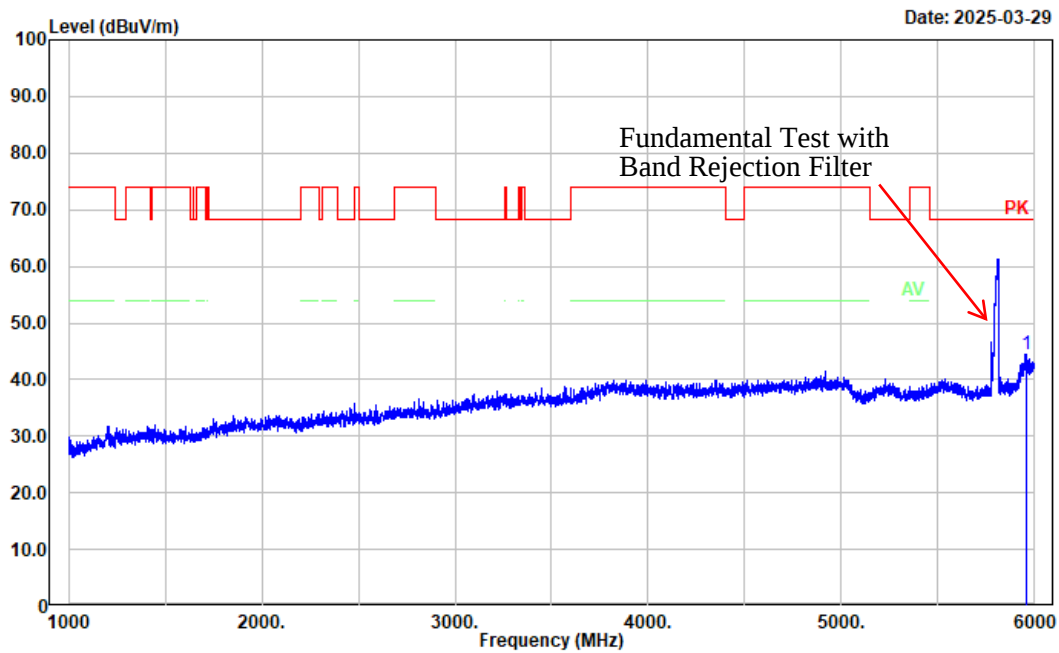


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5956.000	48.47	-3.89	44.58	68.20	23.62	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: n40 High Channel 5795MHz Band 4

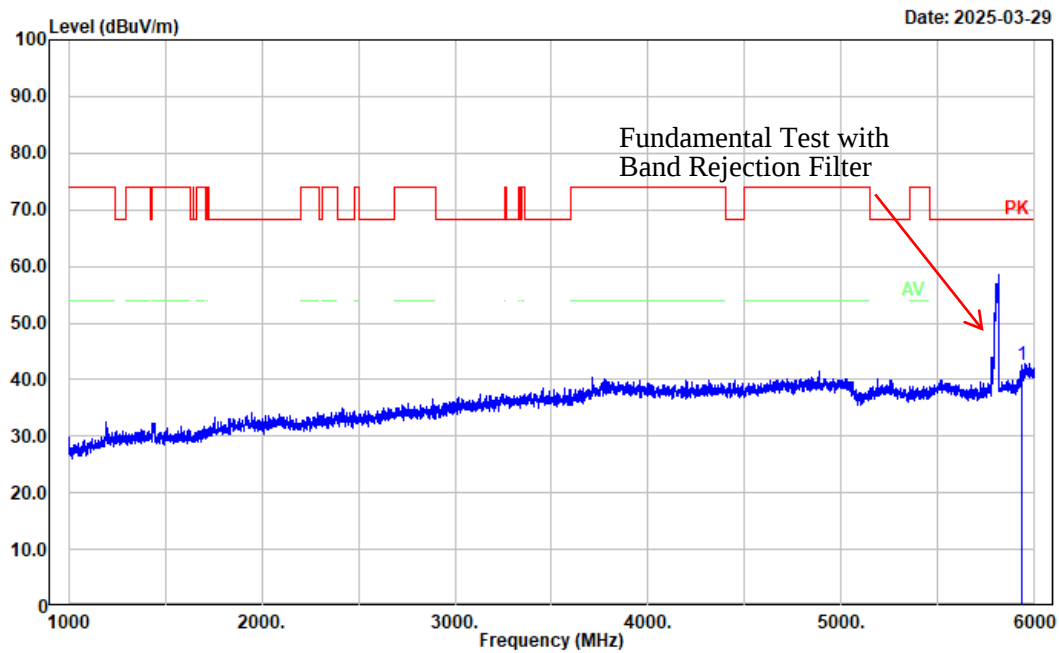


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5931.000	46.60	-4.07	42.53	68.20	25.67	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: n40 High Channel 5795MHz Band 4

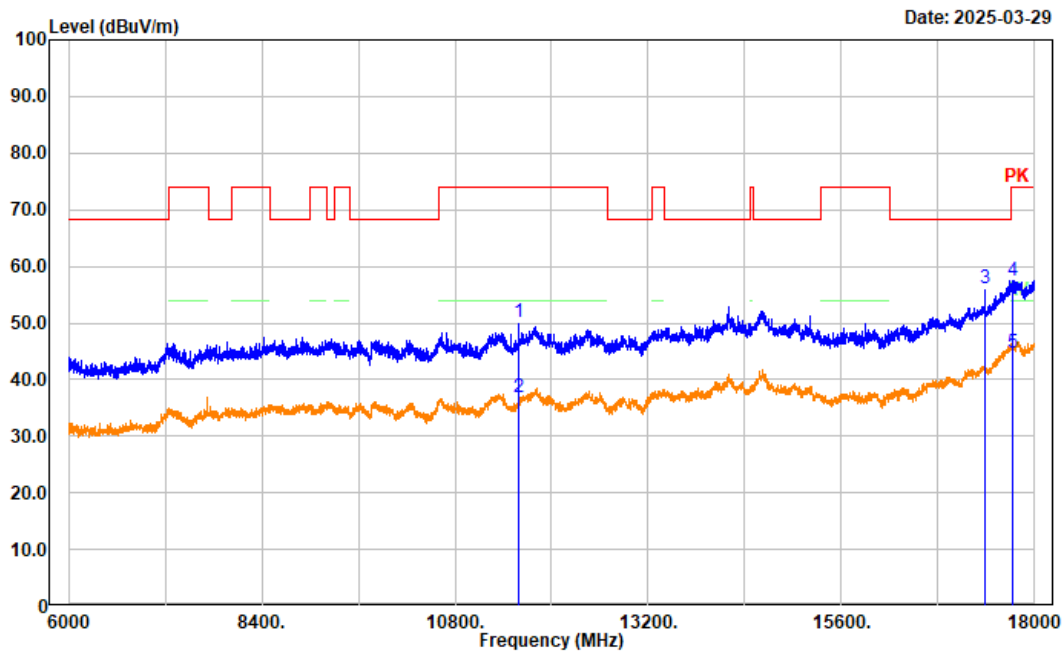


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11590.000	44.64	5.38	50.02	74.00	23.98	Peak
2	11590.000	31.56	5.38	36.94	54.00	17.06	Average
3	17385.000	45.65	10.41	56.06	68.20	12.14	Peak
4	17721.600	44.37	13.17	57.54	74.00	16.46	Peak
5	17721.600	31.42	13.17	44.59	54.00	9.41	Average

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: vertical
 Note: n40 High Channel 5795MHz Band 4

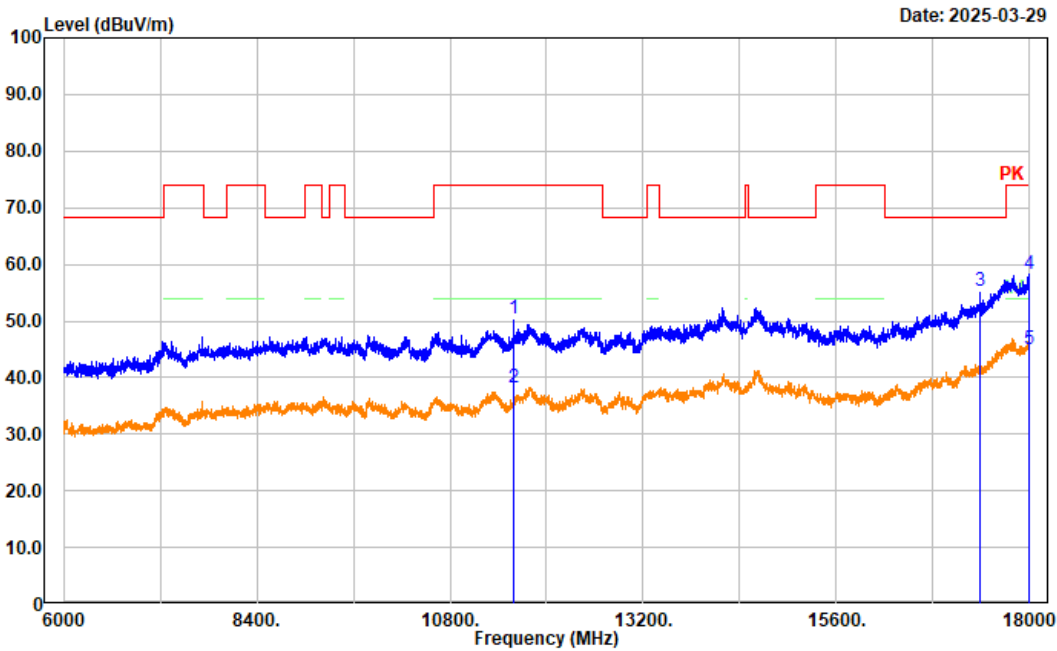


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11590.000	45.03	5.38	50.41	74.00	23.59	Peak
2	11590.000	32.78	5.38	38.16	54.00	15.84	Average
3	17385.000	44.79	10.41	55.20	68.20	13.00	Peak
4	17992.800	44.13	14.03	58.16	74.00	15.84	Peak
5	17992.800	31.00	14.03	45.03	54.00	8.97	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ac80 Middle Channel 5775MHz Band 4

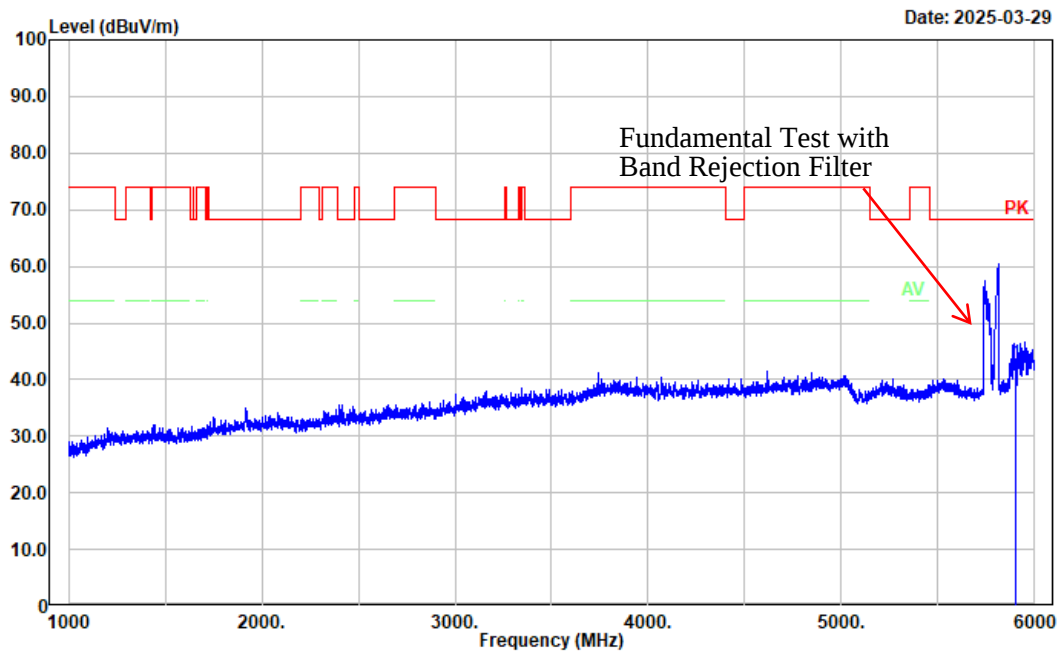


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5904.000	47.18	-4.38	42.80	68.20	25.40	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ac80 Middle Channel 5775MHz Band 4

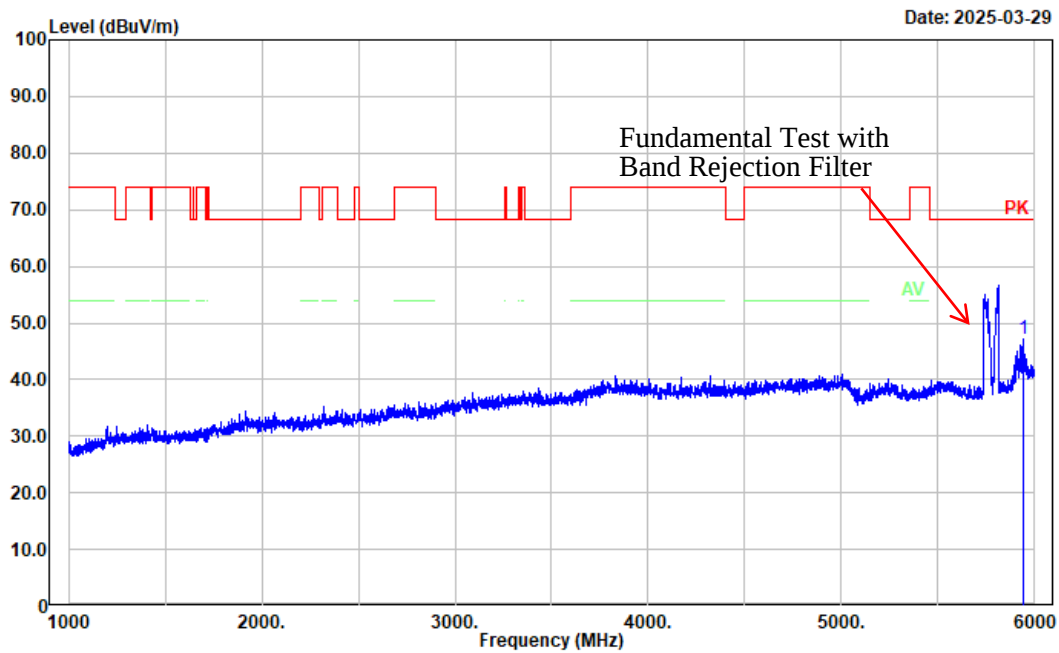


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5943.000	50.96	-3.93	47.03	68.20	21.17	Peak

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: ac80 Middle Channel 5775MHz Band 4

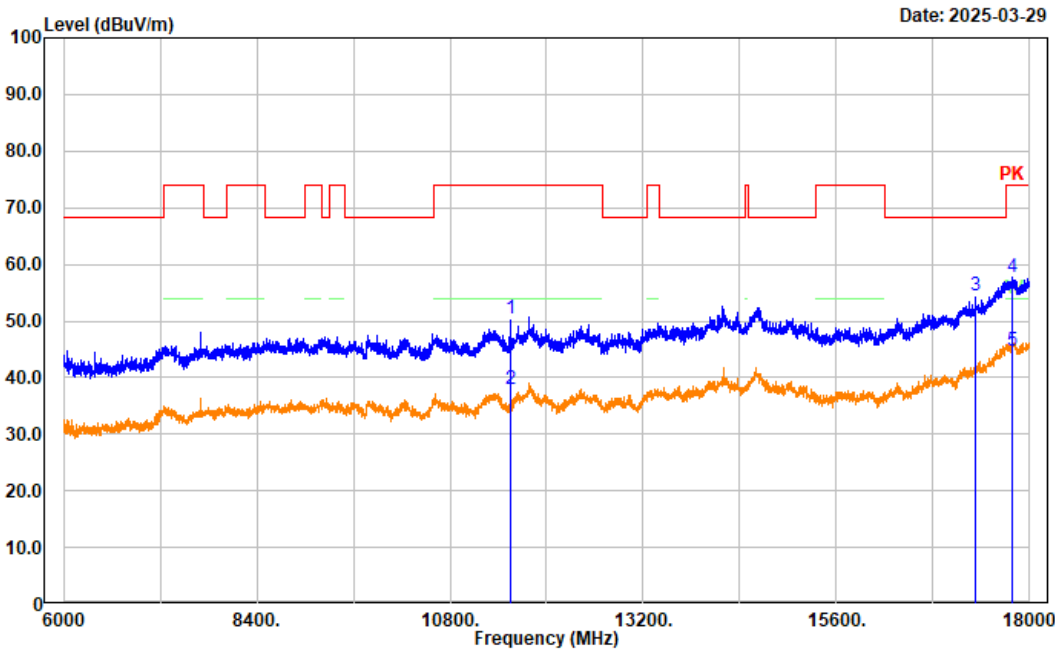


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11550.000	45.20	5.12	50.32	74.00	23.68	Peak
2	11550.000	32.74	5.12	37.86	54.00	16.14	Average
3	17325.000	44.53	9.86	54.39	68.20	13.81	Peak
4	17786.400	44.22	13.49	57.71	74.00	16.29	Peak
5	17786.400	31.20	13.49	44.69	54.00	9.31	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ac80 Middle Channel 5775MHz Band 4

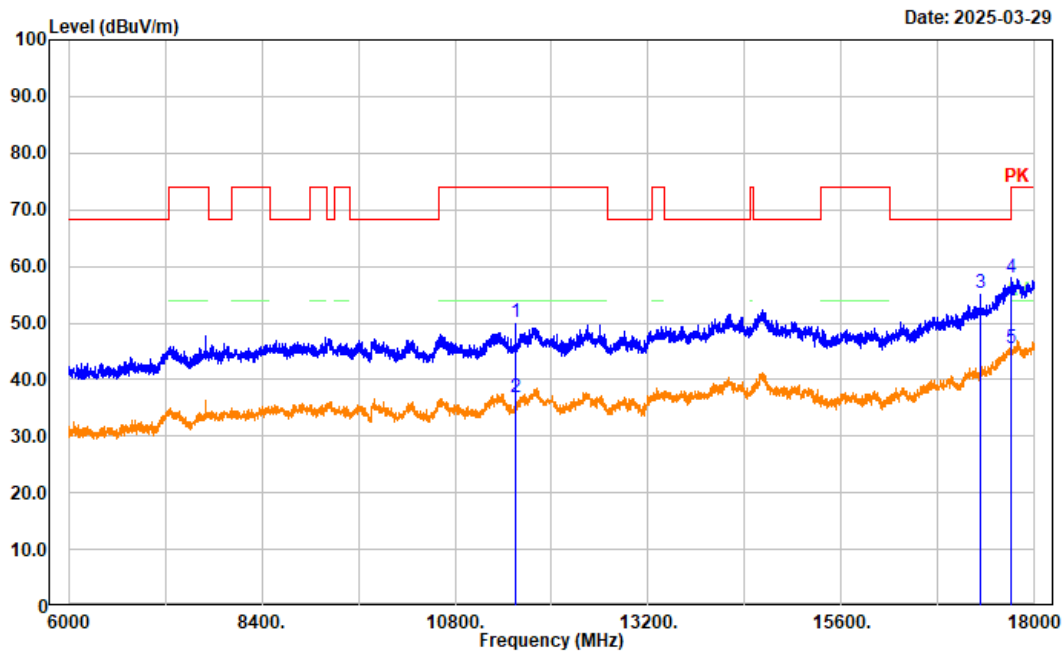


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11550.000	44.92	5.12	50.04	74.00	23.96	Peak
2	11550.000	31.71	5.12	36.83	54.00	17.17	Average
3	17325.000	45.39	9.86	55.25	68.20	12.95	Peak
4	17707.200	45.01	13.11	58.12	74.00	15.88	Peak
5	17707.200	32.36	13.11	45.47	54.00	8.53	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax20 High Channel 5825MHz Band 4

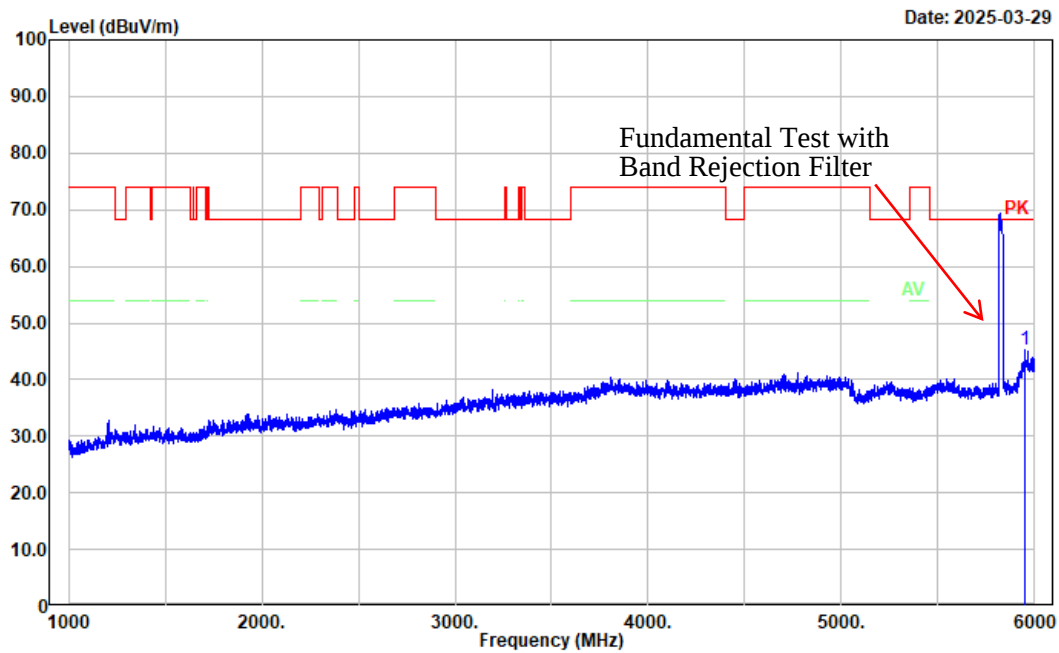


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5951.000	48.99	-3.85	45.14	68.20	23.06	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax20 High Channel 5825MHz Band 4

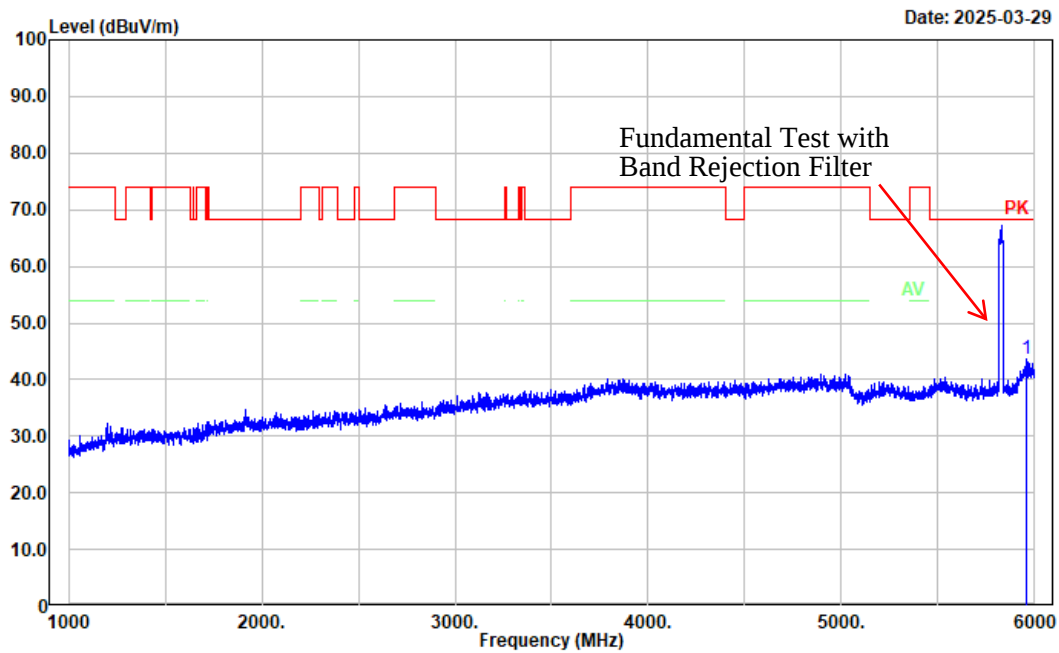


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5957.000	47.41	-3.90	43.51	68.20	24.69	Peak

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: ax20 High Channel 5825MHz Band 4

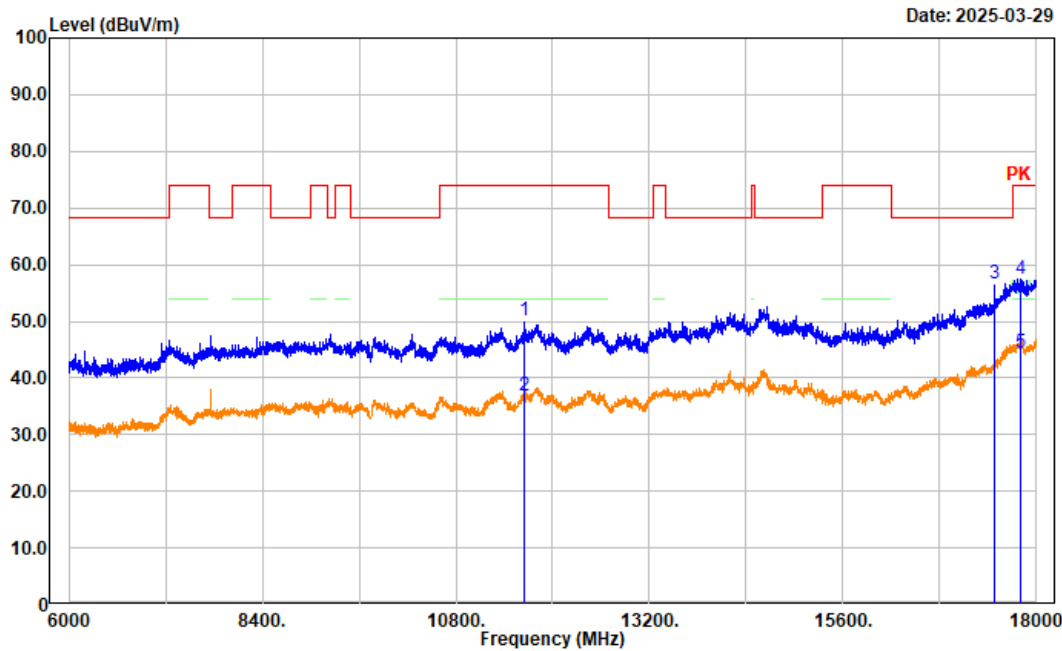


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11650.000	44.71	5.55	50.26	74.00	23.74	Peak
2	11650.000	31.28	5.55	36.83	54.00	17.17	Average
3	17475.000	45.71	10.91	56.62	68.20	11.58	Peak
4	17798.400	43.97	13.55	57.52	74.00	16.48	Peak
5	17798.400	31.00	13.55	44.55	54.00	9.45	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ax20 High Channel 5825MHz Band 4

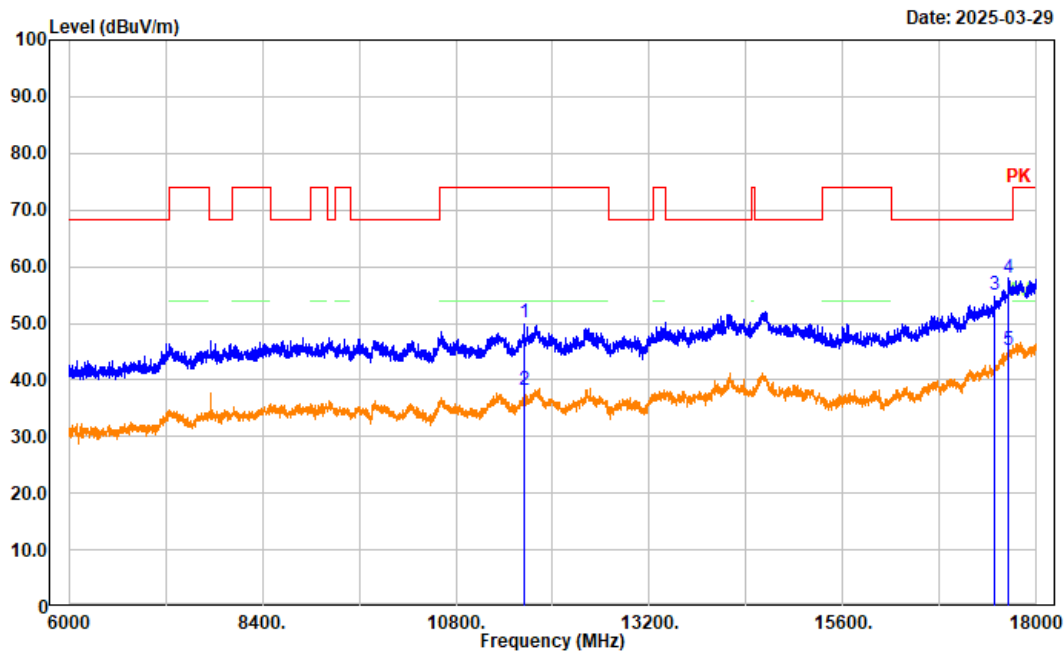


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11649.600	44.54	5.55	50.09	74.00	23.91	Peak
2	11649.600	32.63	5.55	38.18	54.00	15.82	Average
3	17475.000	44.02	10.91	54.93	68.20	13.27	Peak
4	17649.600	45.52	12.59	58.11	68.20	10.09	Peak
5	17649.600	32.74	12.59	45.33	68.20	22.87	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax40 High Channel 5795MHz Band 4

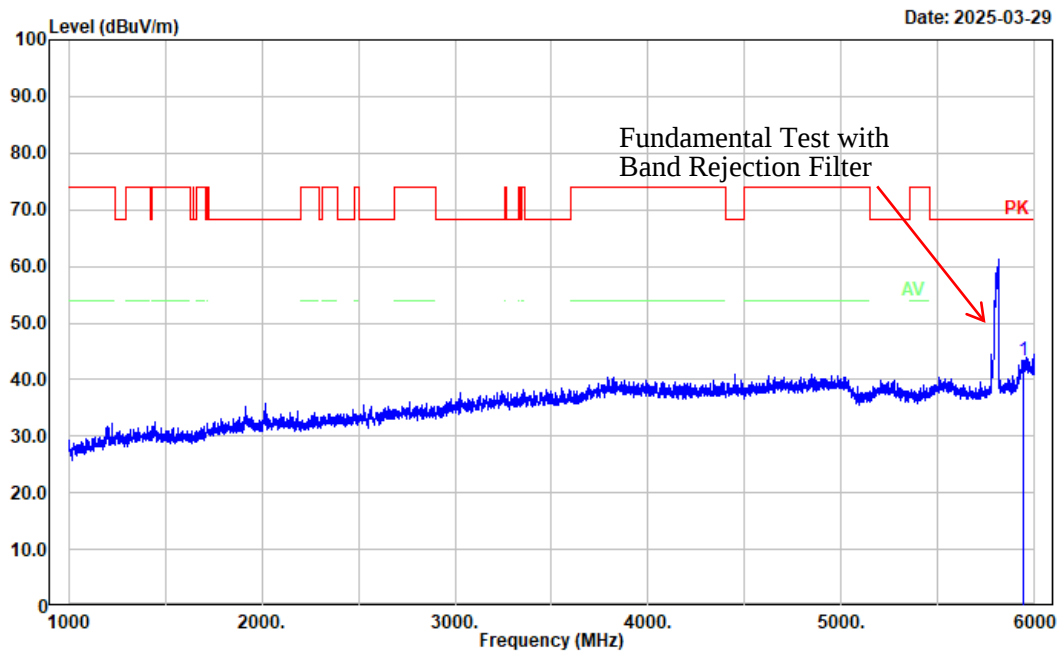


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5944.000	47.40	-3.92	43.48	68.20	24.72	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax40 High Channel 5795MHz Band 4

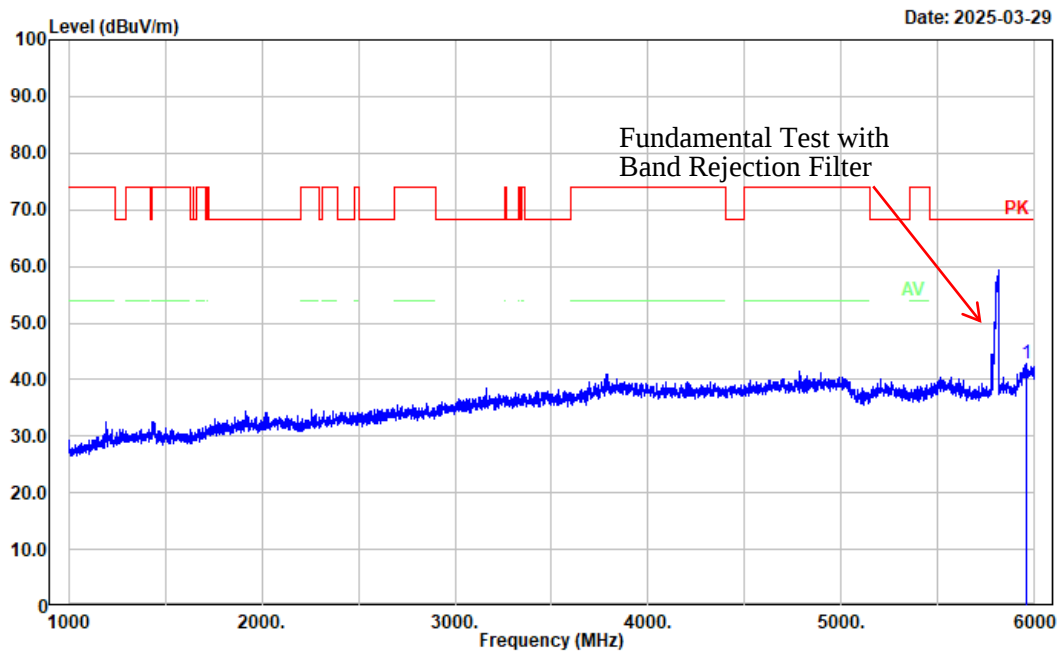


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5960.000	46.61	-3.91	42.70	68.20	25.50	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: ax40 High Channel 5795MHz Band 4

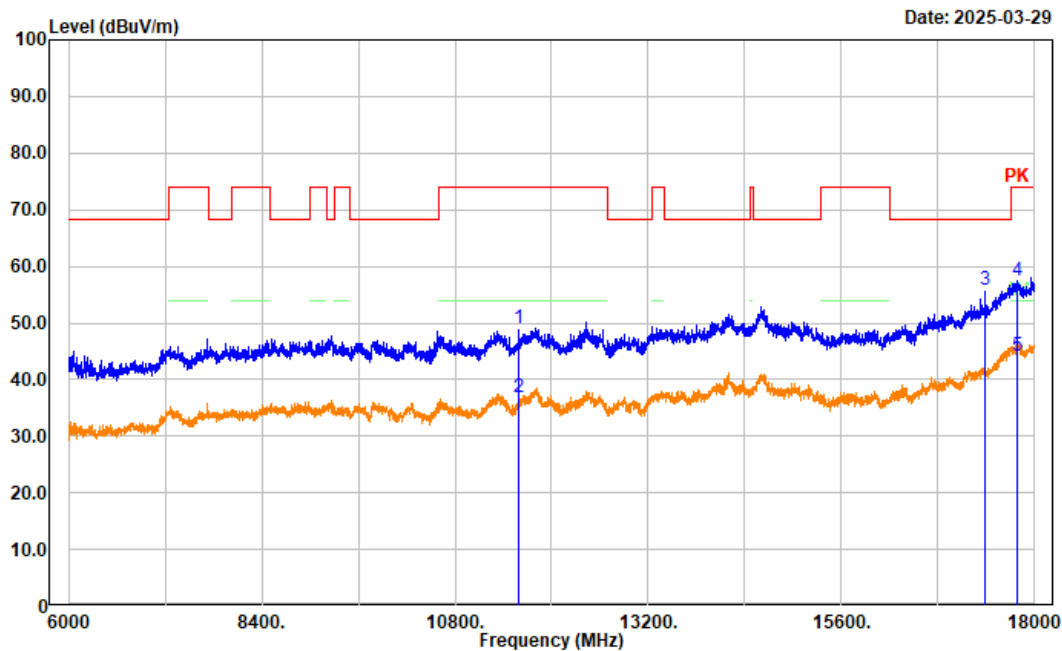


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11590.000	43.67	5.38	49.05	74.00	24.95	Peak
2	11590.000	31.58	5.38	36.96	54.00	17.04	Average
3	17385.000	45.29	10.41	55.70	68.20	12.50	Peak
4	17776.800	44.04	13.44	57.48	74.00	16.52	Peak
5	17776.800	30.77	13.44	44.21	54.00	9.79	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: ax40 High Channel 5795MHz Band 4

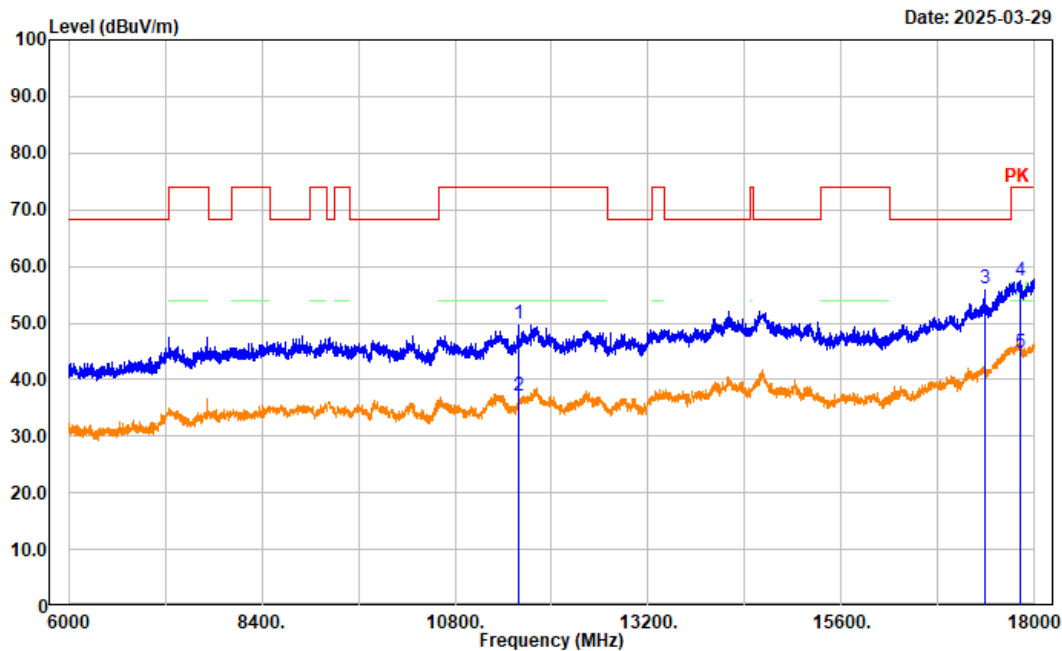


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11590.000	44.56	5.38	49.94	74.00	24.06	Peak
2	11590.000	31.74	5.38	37.12	54.00	16.88	Average
3	17385.000	45.81	10.41	56.22	68.20	11.98	Peak
4	17812.800	44.03	13.55	57.58	74.00	16.42	Peak
5	17812.800	31.19	13.55	44.74	54.00	9.26	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: ax80 Middle Channel 5775MHz Band 4

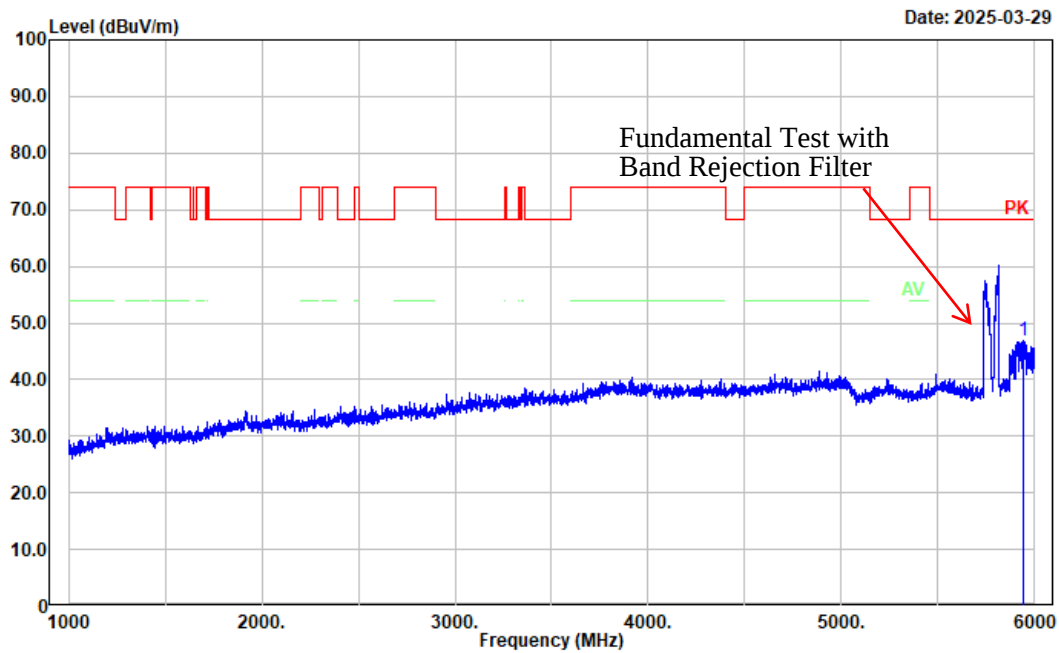


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5944.000	50.71	-3.92	46.79	68.20	21.41	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: ax80 Middle Channel 5775MHz Band 4

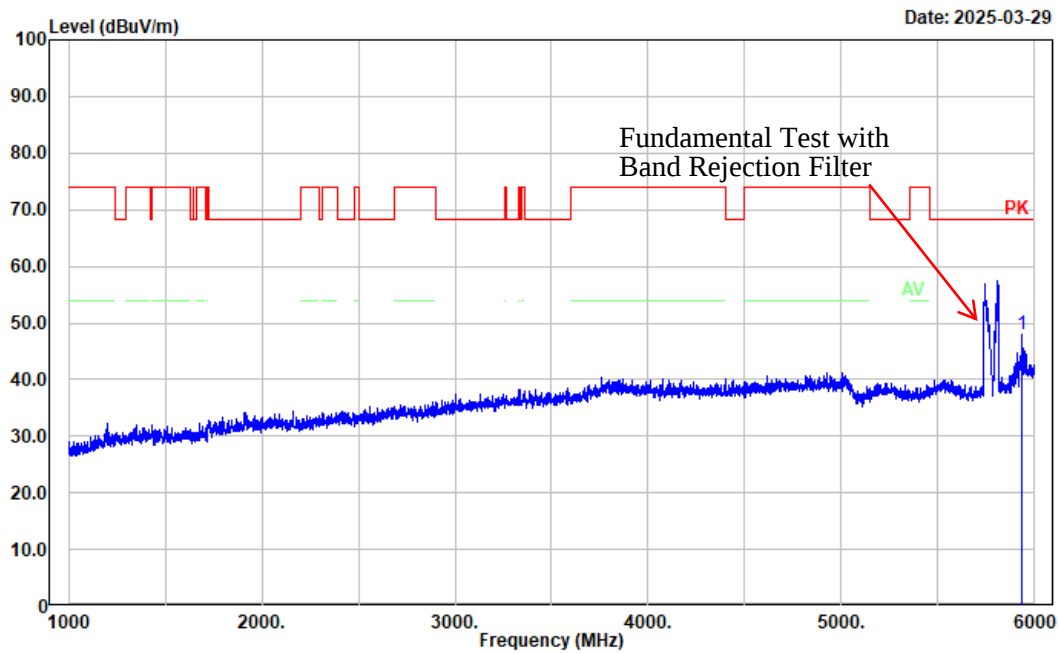


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5932.000	52.02	-4.06	47.96	68.20	20.24	Peak

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: ax80 Middle Channel 5775MHz Band 4

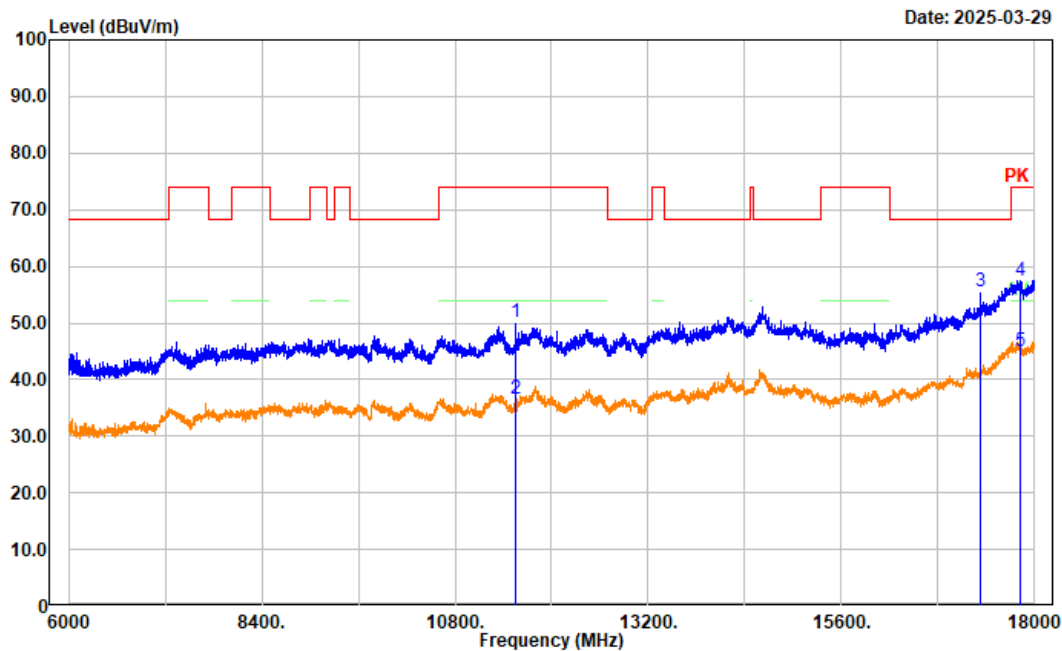


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11550.000	44.91	5.12	50.03	74.00	23.97	Peak
2	11550.000	31.58	5.12	36.70	54.00	17.30	Average
3	17325.000	45.61	9.86	55.47	68.20	12.73	Peak
4	17812.800	43.98	13.55	57.53	74.00	16.47	Peak
5	17812.800	31.32	13.55	44.87	54.00	9.13	Average

Project No.: 2503Q19064E
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: vertical
 Note: ax80 Middle Channel 5775MHz Band 4

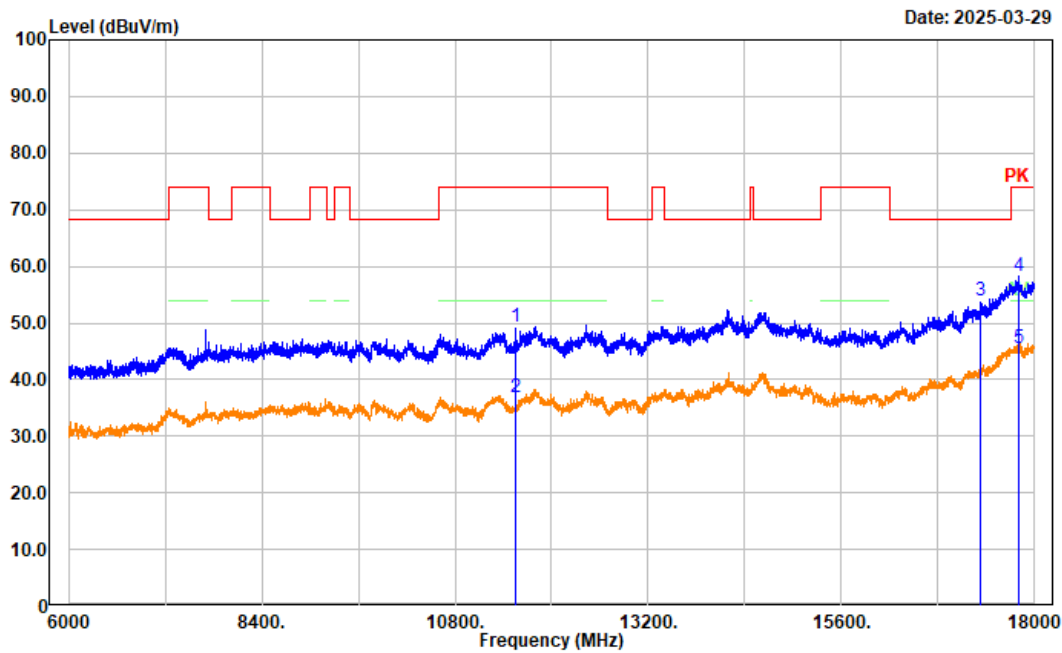


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11550.000	44.25	5.12	49.37	74.00	24.63	Peak
2	11550.000	31.76	5.12	36.88	54.00	17.12	Average
3	17325.000	44.16	9.86	54.02	68.20	14.18	Peak
4	17810.400	44.78	13.55	58.33	74.00	15.67	Peak
5	17810.400	32.01	13.55	45.56	54.00	8.44	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: ax40 High Channel 5310MHz Band 2

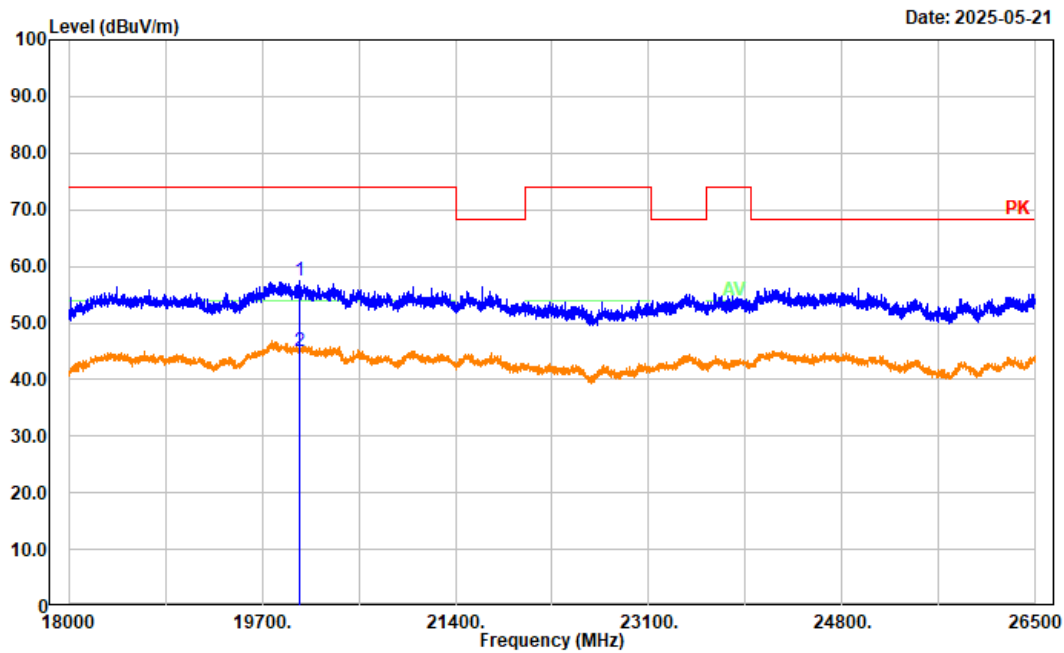


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	20024.700	50.19	7.25	57.44	74.00	16.56	Peak
2	20024.700	37.77	7.25	45.02	54.00	8.98	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: ax40 High Channel 5310MHz Band 2

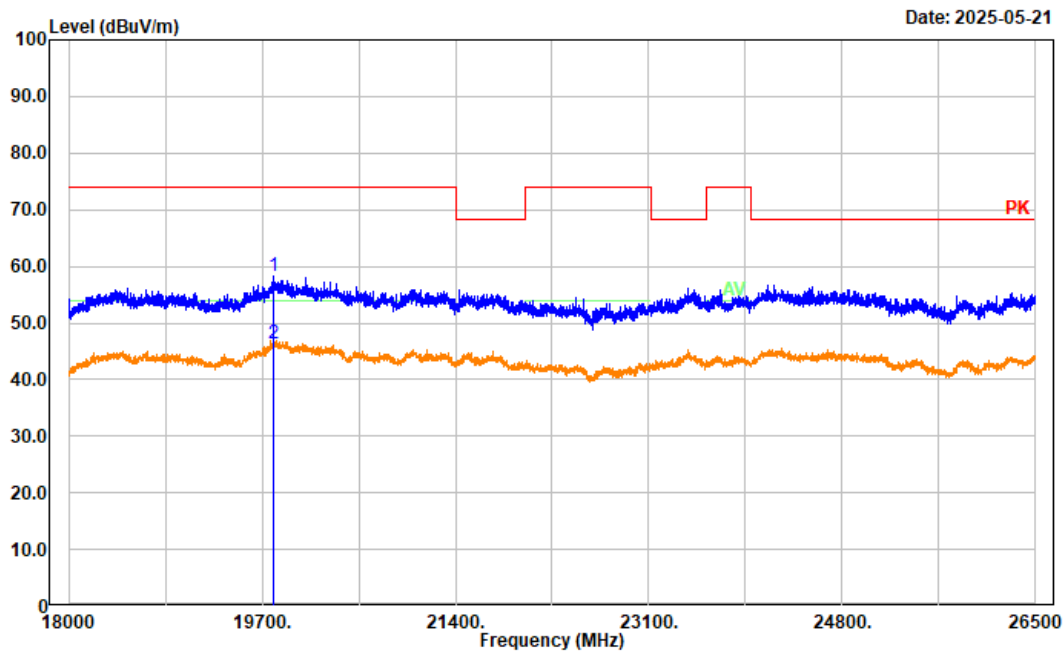


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	19798.600	50.30	7.94	58.24	74.00	15.76	Peak
2	19798.600	38.29	7.94	46.23	54.00	7.77	Average

Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: ax40 High Channel 5310MHz Band 2

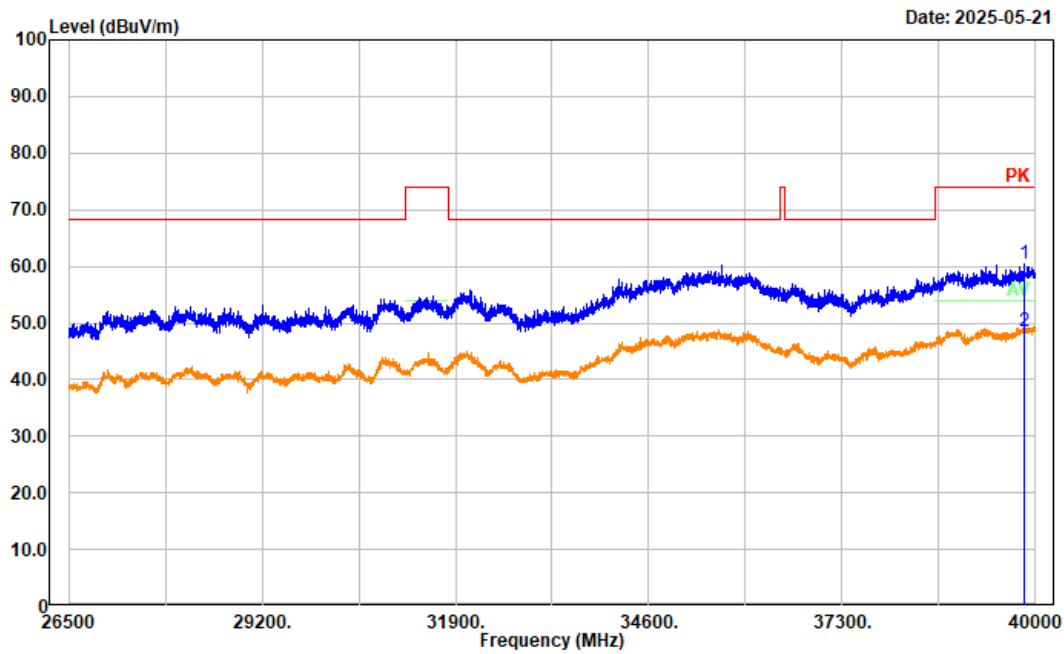

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	39848.800	53.07	7.28	60.35	74.00	13.65	Peak
2	39848.800	41.25	7.28	48.53	54.00	5.47	Average


Project No.: 2503Q19064E
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: ax40 High Channel 5310MHz Band 2

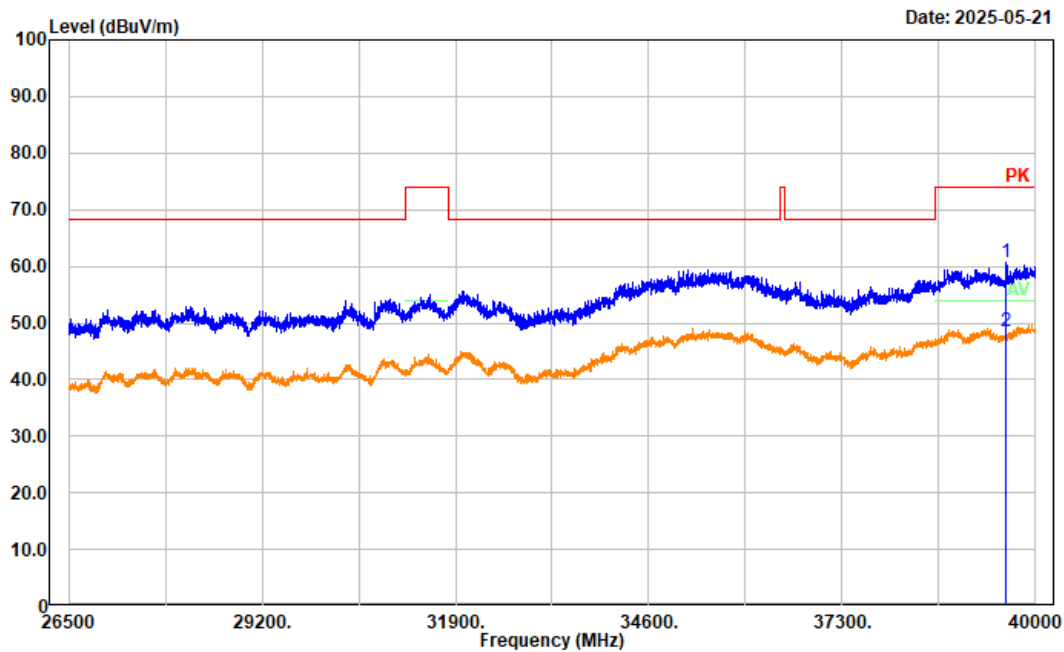


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	39584.200	53.17	7.51	60.68	74.00	13.32	Peak
2	39584.200	41.03	7.51	48.54	54.00	5.46	Average

Band edge test plots

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: a Low Channel 5180MHz band 1 Chain 0

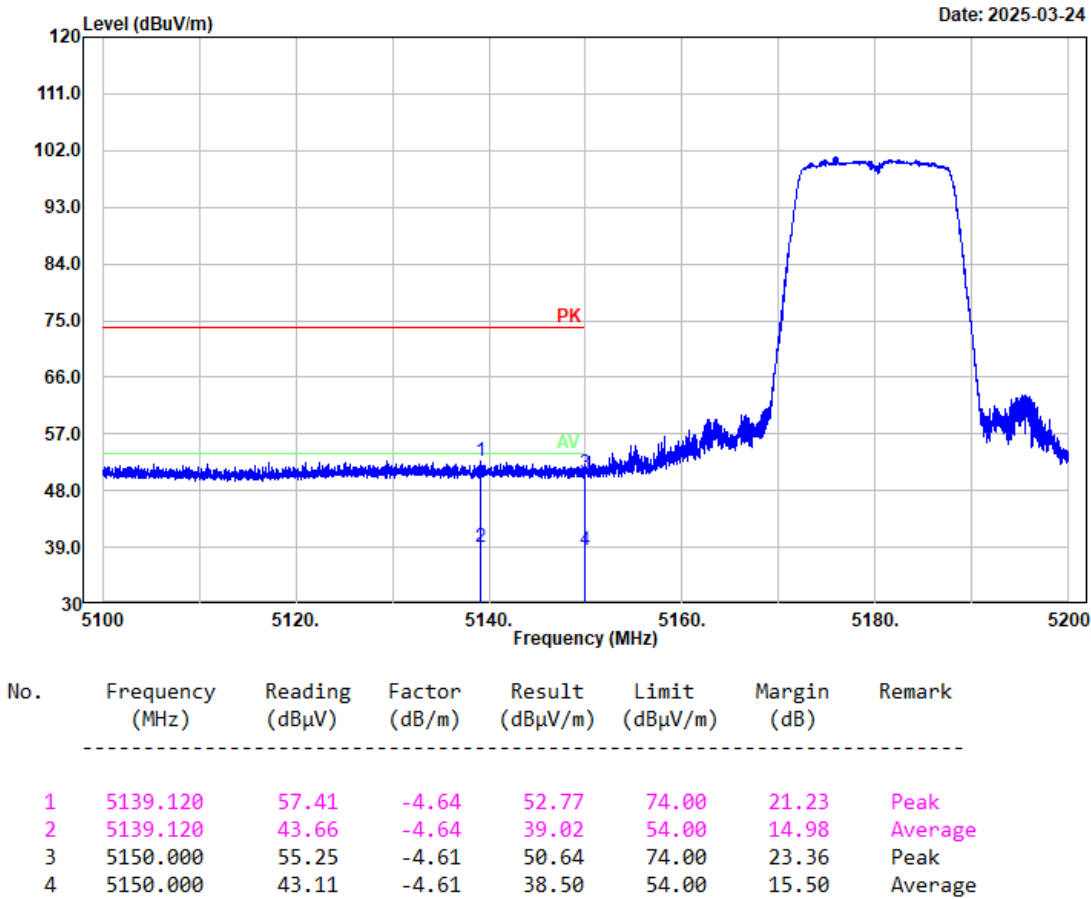


Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: a Low Channel 5180MHz band 1 Chain 0

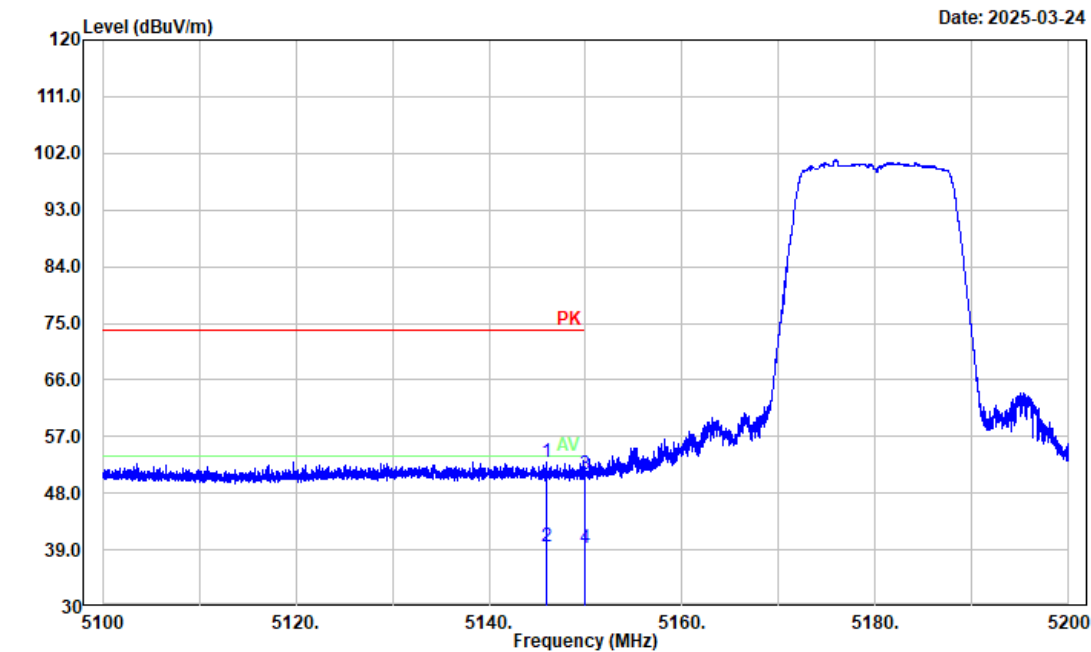


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5145.880	57.58	-4.62	52.96	74.00	21.04	Peak
2	5145.880	44.18	-4.62	39.56	54.00	14.44	Average
3	5150.000	55.63	-4.61	51.02	74.00	22.98	Peak
4	5150.000	43.97	-4.61	39.36	54.00	14.64	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: a High Channel 5240MHz band 1 Chain 0

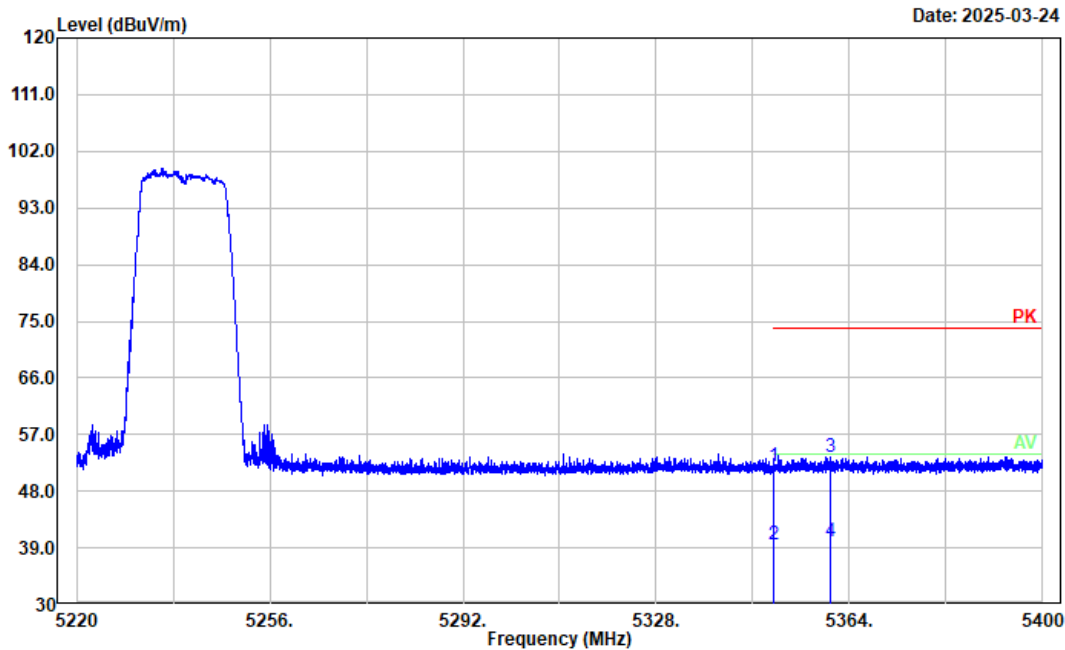


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	56.46	-4.52	51.94	74.00	22.06	Peak
2	5350.000	43.99	-4.52	39.47	54.00	14.53	Average
3	5360.508	57.89	-4.48	53.41	74.00	20.59	Peak
4	5360.508	44.51	-4.48	40.03	54.00	13.97	Average

Project No.: 2503Q19064E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
 Polarization: Vertical
 Note: a High Channel 5240MHz band 1 Chain 0

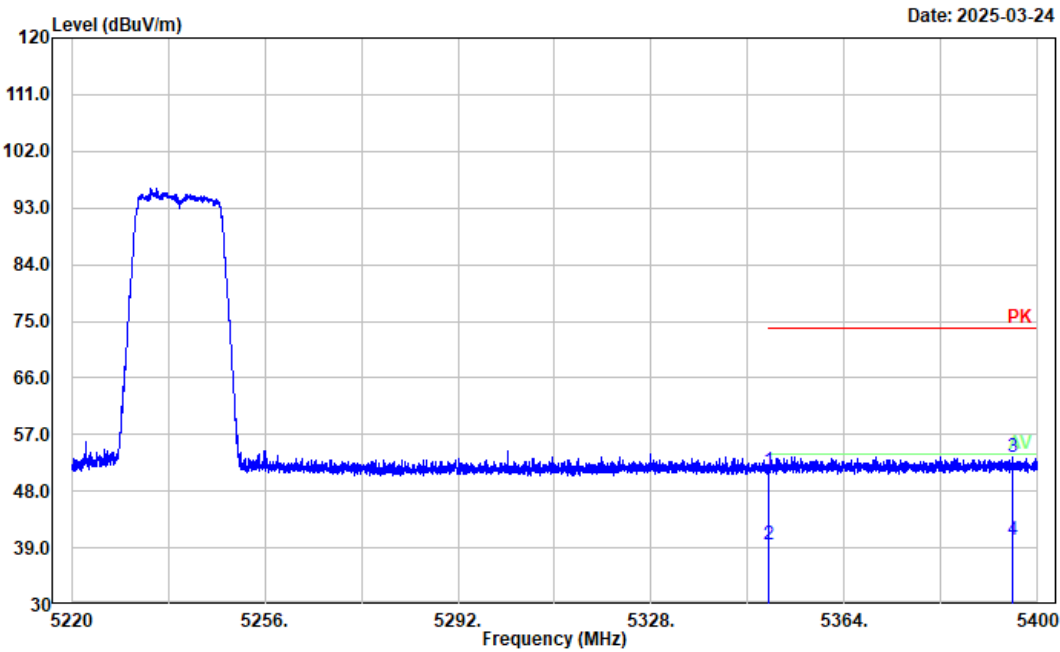


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	55.65	-4.52	51.13	74.00	22.87	Peak
2	5350.000	44.10	-4.52	39.58	54.00	14.42	Average
3	5395.320	57.85	-4.35	53.50	74.00	20.50	Peak
4	5395.320	44.60	-4.35	40.25	54.00	13.75	Average

Project No.: 2503Q19064E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
 Polarization: Horizontal
 Note: a Low Channel 5180MHz band 1 Chain 1

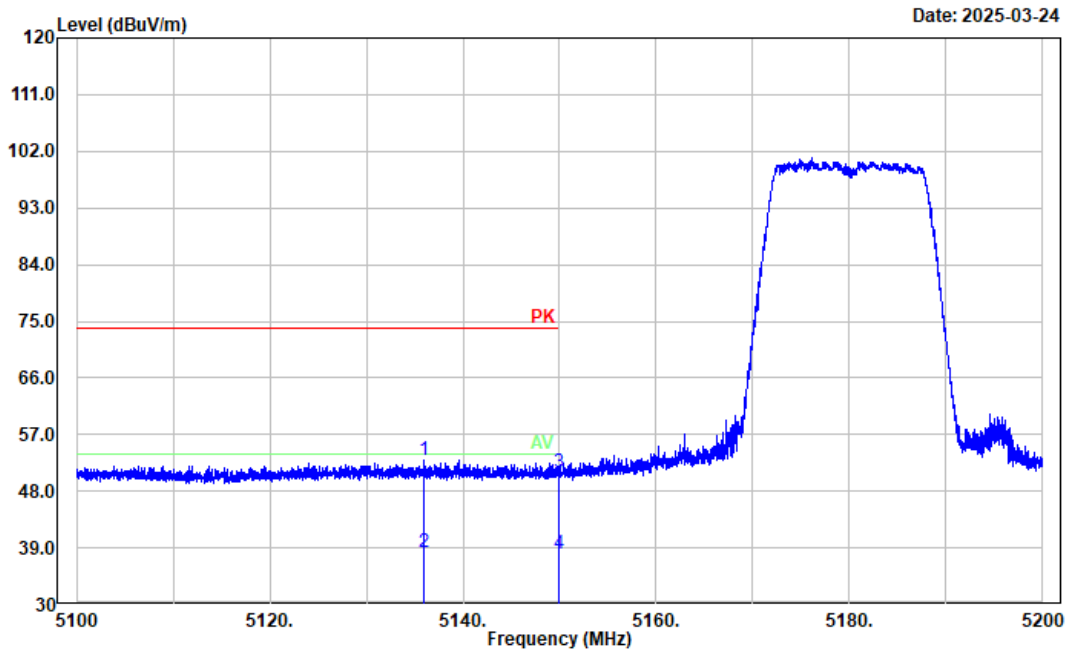


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5136.020	57.59	-4.66	52.93	74.00	21.07	Peak
2	5136.020	42.95	-4.66	38.29	54.00	15.71	Average
3	5150.000	55.47	-4.61	50.86	74.00	23.14	Peak
4	5150.000	42.67	-4.61	38.06	54.00	15.94	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: a Low Channel 5180MHz band 1 Chain 1

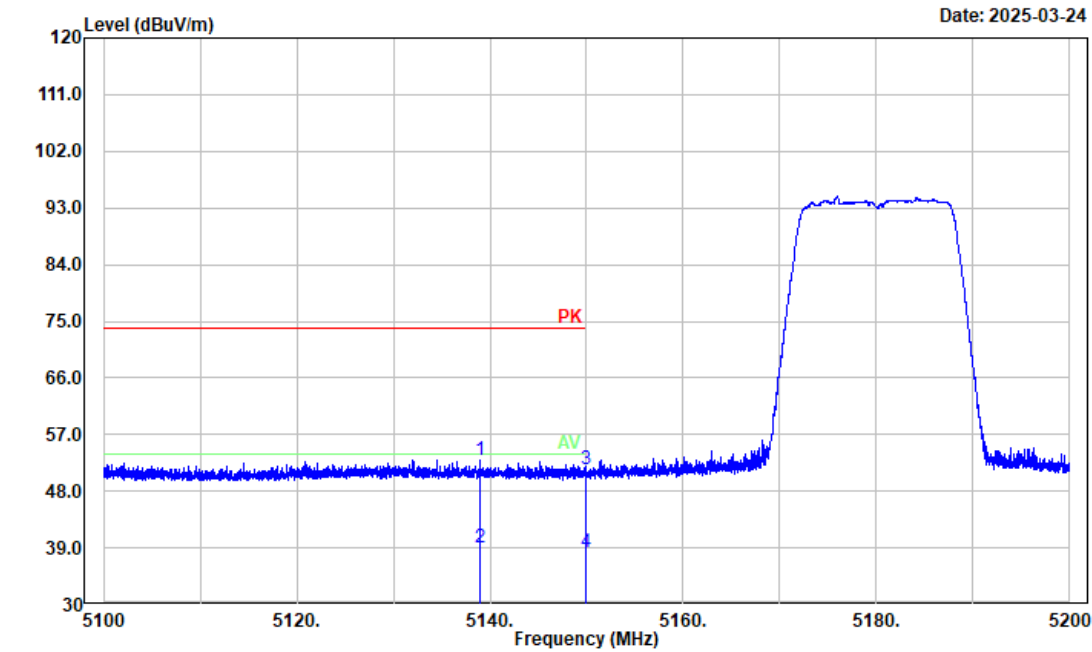


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5138.940	57.57	-4.64	52.93	74.00	21.07	Peak
2	5138.940	43.62	-4.64	38.98	54.00	15.02	Average
3	5150.000	56.19	-4.61	51.58	74.00	22.42	Peak
4	5150.000	42.84	-4.61	38.23	54.00	15.77	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: a High Channel 5240MHz band 1 Chain 1

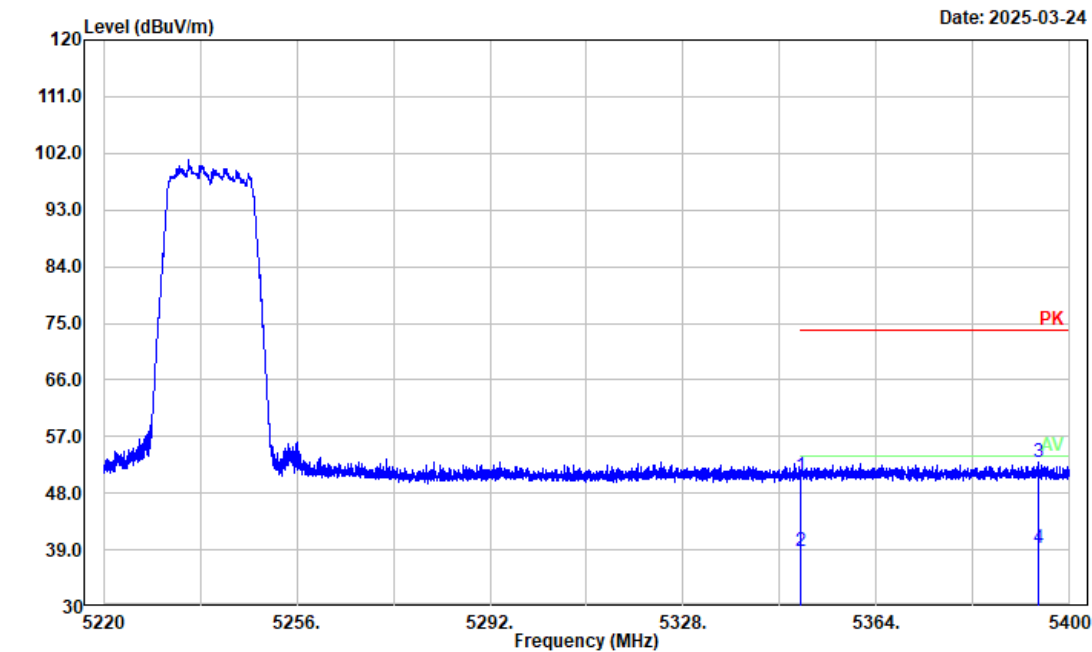


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	55.34	-4.52	50.82	74.00	23.18	Peak
2	5350.000	43.22	-4.52	38.70	54.00	15.30	Average
3	5394.132	57.19	-4.35	52.84	74.00	21.16	Peak
4	5394.132	43.58	-4.35	39.23	54.00	14.77	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: a High Channel 5240MHz band 1 Chain 1

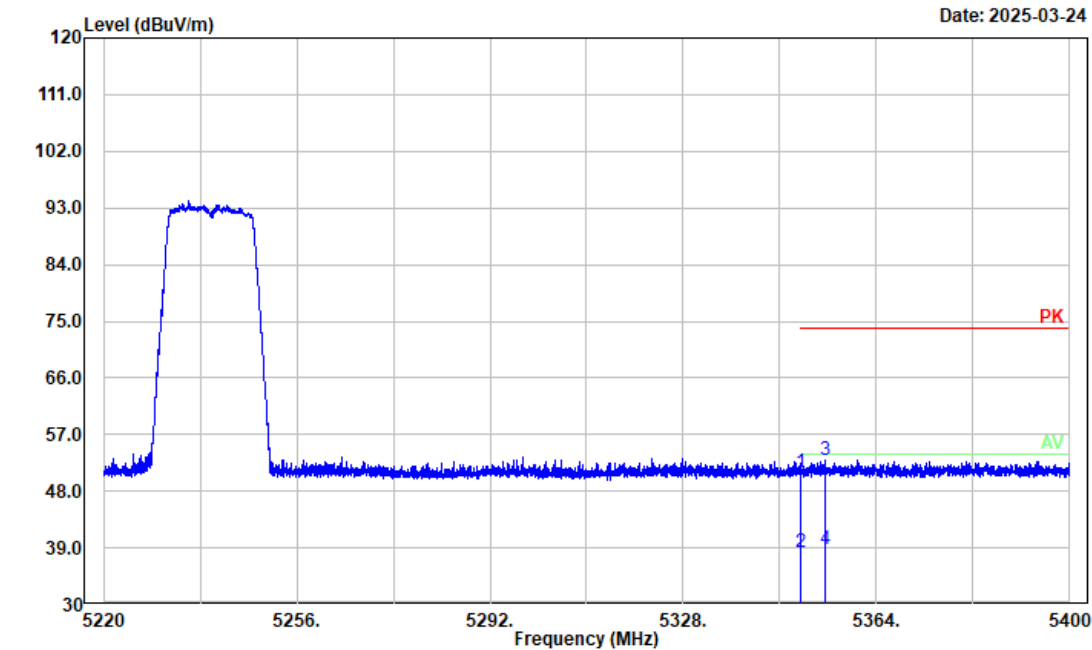


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	55.47	-4.52	50.95	74.00	23.05	Peak
2	5350.000	42.86	-4.52	38.34	54.00	15.66	Average
3	5354.532	57.48	-4.50	52.98	74.00	21.02	Peak
4	5354.532	43.17	-4.50	38.67	54.00	15.33	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: n20 Low Channel 5180MHz band 1

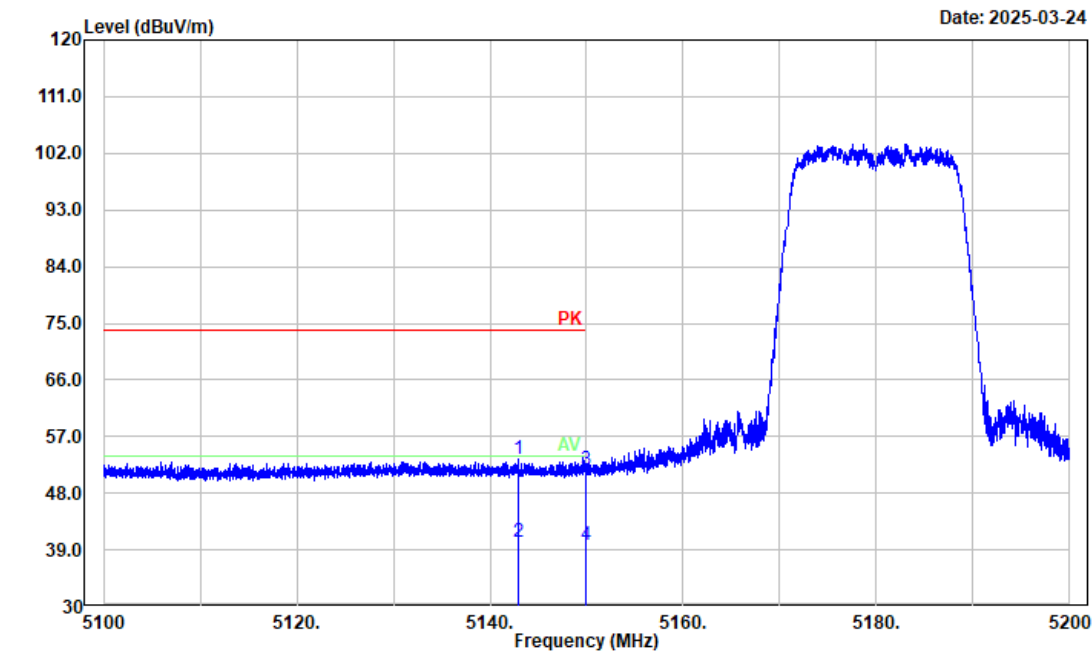


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5142.960	58.04	-4.64	53.40	74.00	20.60	Peak
2	5142.960	44.91	-4.64	40.27	54.00	13.73	Average
3	5150.000	56.30	-4.61	51.69	74.00	22.31	Peak
4	5150.000	44.32	-4.61	39.71	54.00	14.29	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: n20 Low Channel 5180MHz band 1

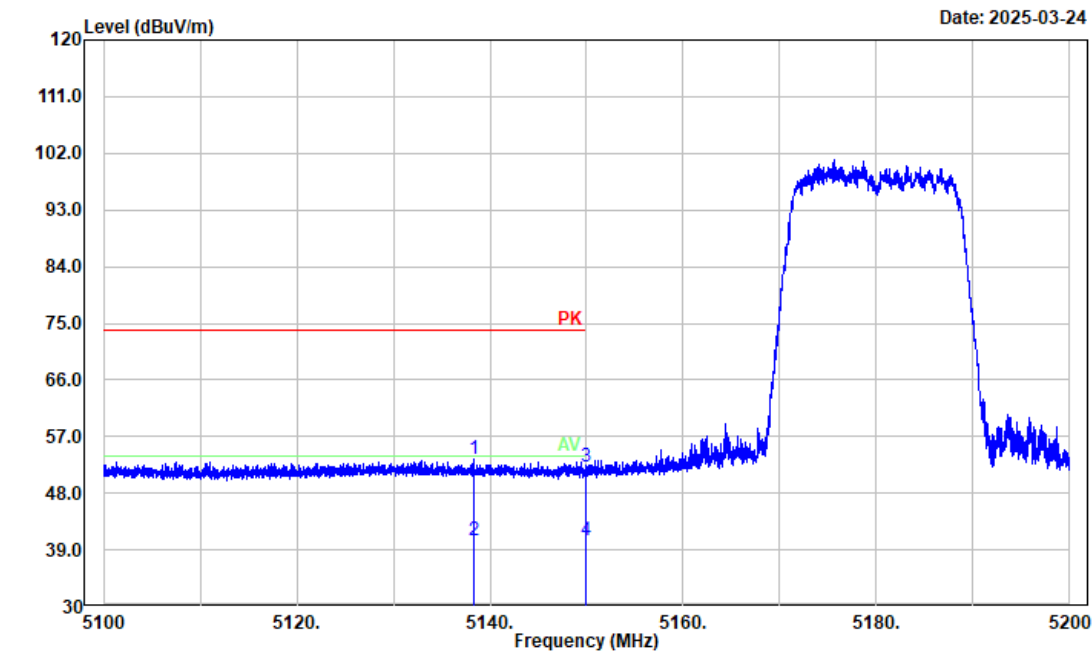


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5138.340	57.95	-4.65	53.30	74.00	20.70	Peak
2	5138.340	45.17	-4.65	40.52	54.00	13.48	Average
3	5150.000	56.71	-4.61	52.10	74.00	21.90	Peak
4	5150.000	45.14	-4.61	40.53	54.00	13.47	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: n20 High Channel 5240MHz band 1

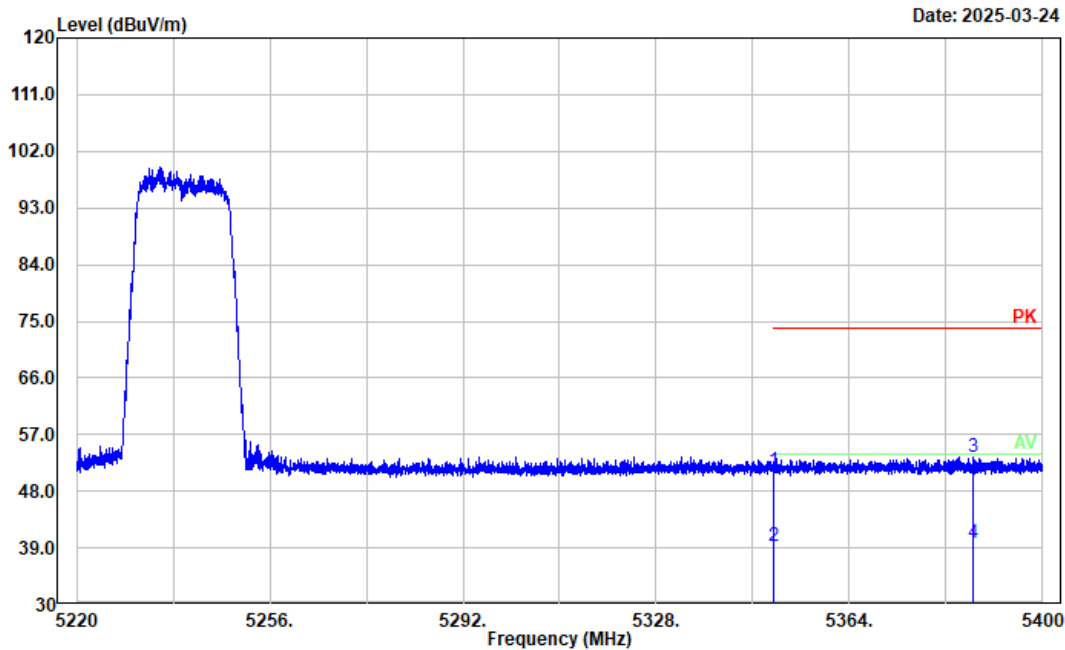


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	55.85	-4.52	51.33	74.00	22.67	Peak
2	5350.000	43.75	-4.52	39.23	54.00	14.77	Average
3	5387.112	57.81	-4.39	53.42	74.00	20.58	Peak
4	5387.112	44.10	-4.39	39.71	54.00	14.29	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: n20 High Channel 5240MHz band 1

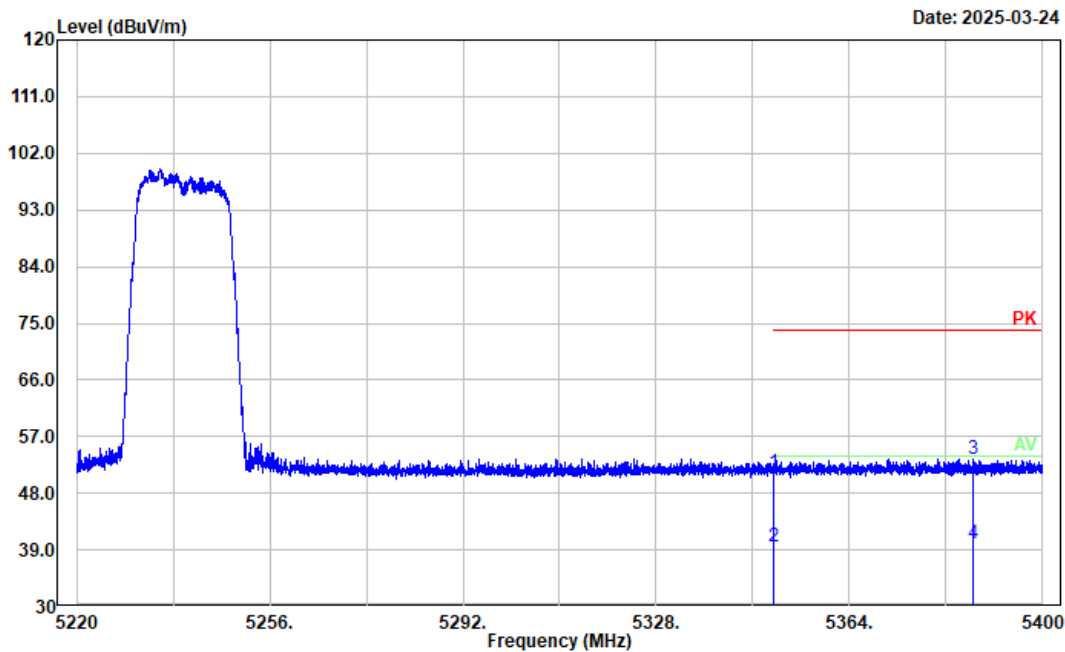


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	55.85	-4.52	51.33	74.00	22.67	Peak
2	5350.000	44.11	-4.52	39.59	54.00	14.41	Average
3	5387.112	57.81	-4.39	53.42	74.00	20.58	Peak
4	5387.112	44.50	-4.39	40.11	54.00	13.89	Average


Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: n40 Low Channel 5190MHz band 1

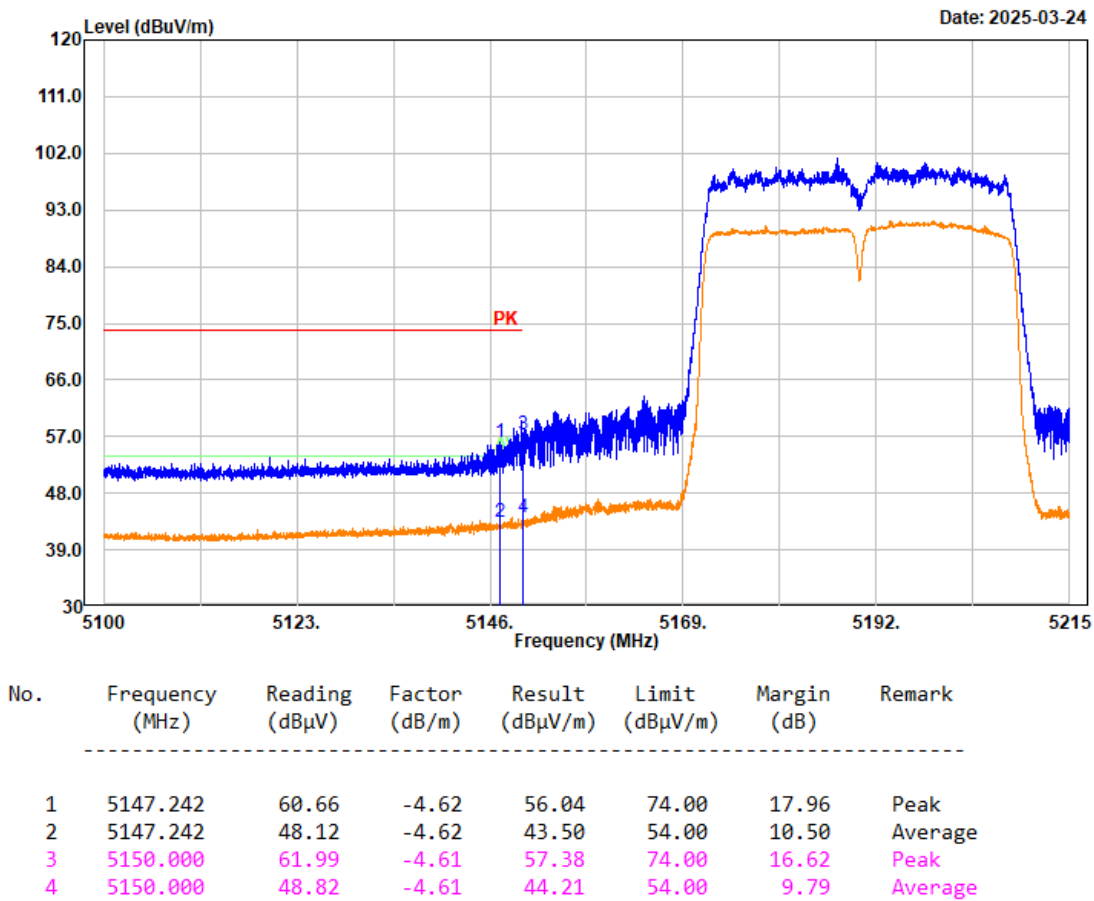

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: n40 Low Channel 5190MHz band 1

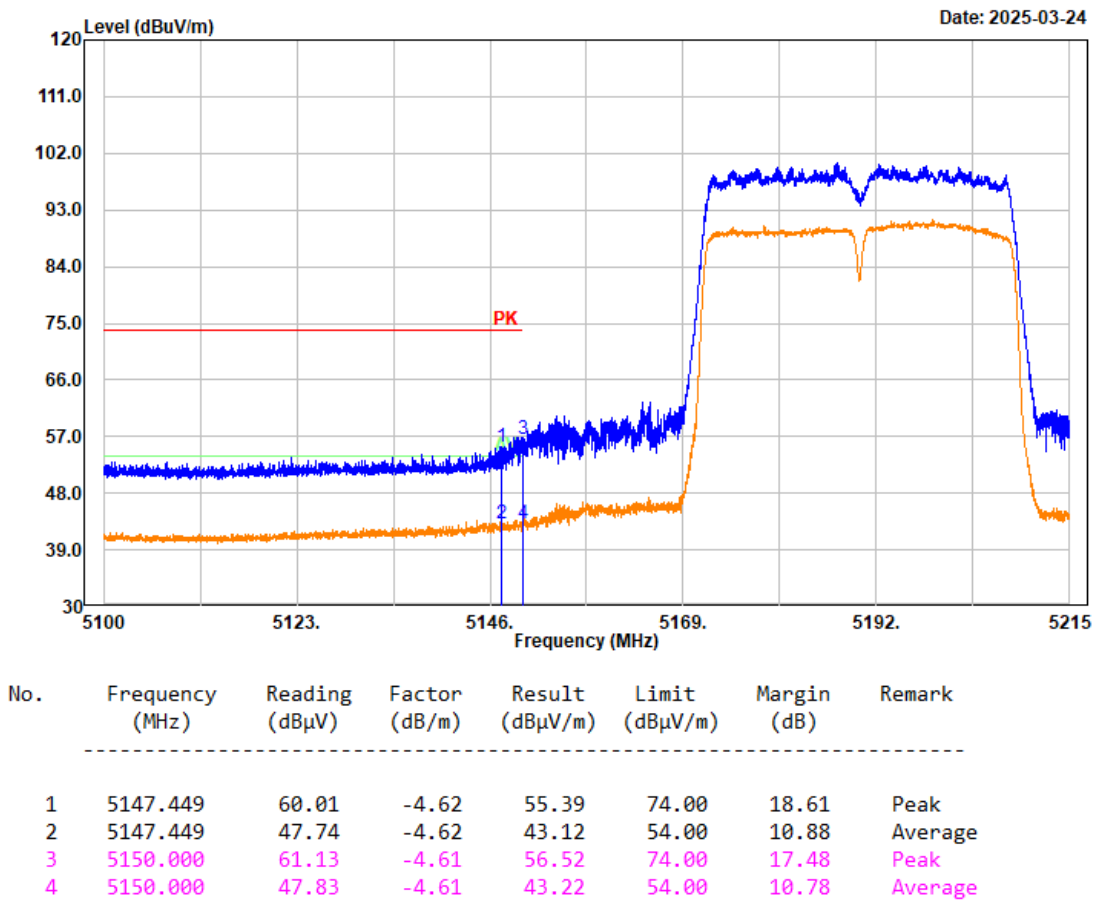


Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: n40 High Channel 5230MHz band 1

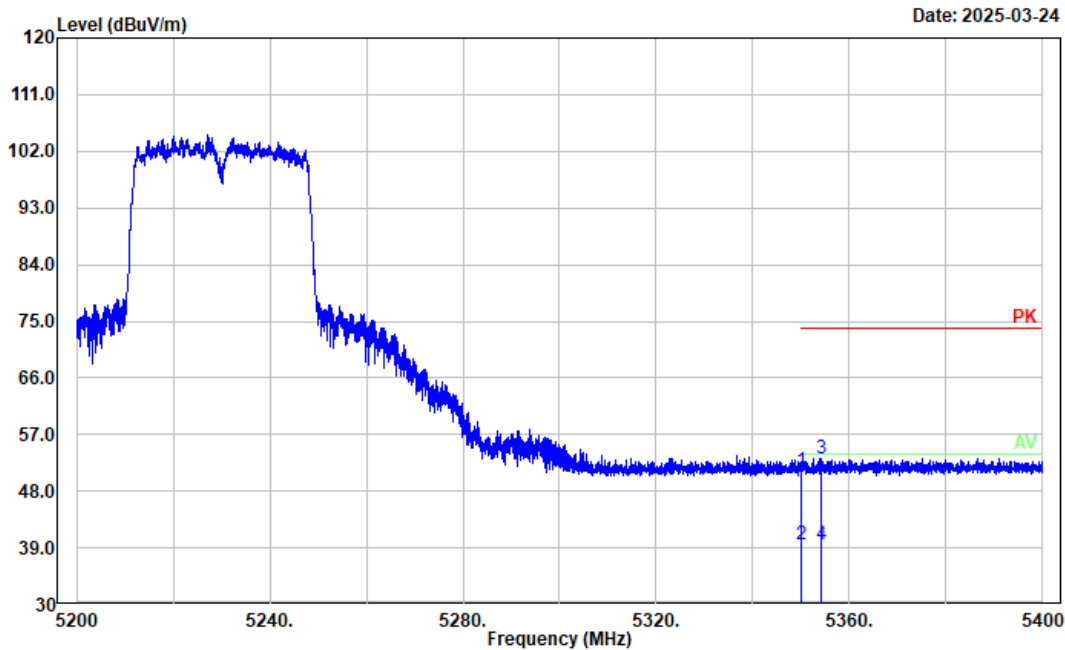


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	55.72	-4.52	51.20	74.00	22.80	Peak
2	5350.000	43.98	-4.52	39.46	54.00	14.54	Average
3	5354.200	57.76	-4.50	53.26	74.00	20.74	Peak
4	5354.200	44.13	-4.50	39.63	54.00	14.37	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: n40 High Channel 5230MHz band 1

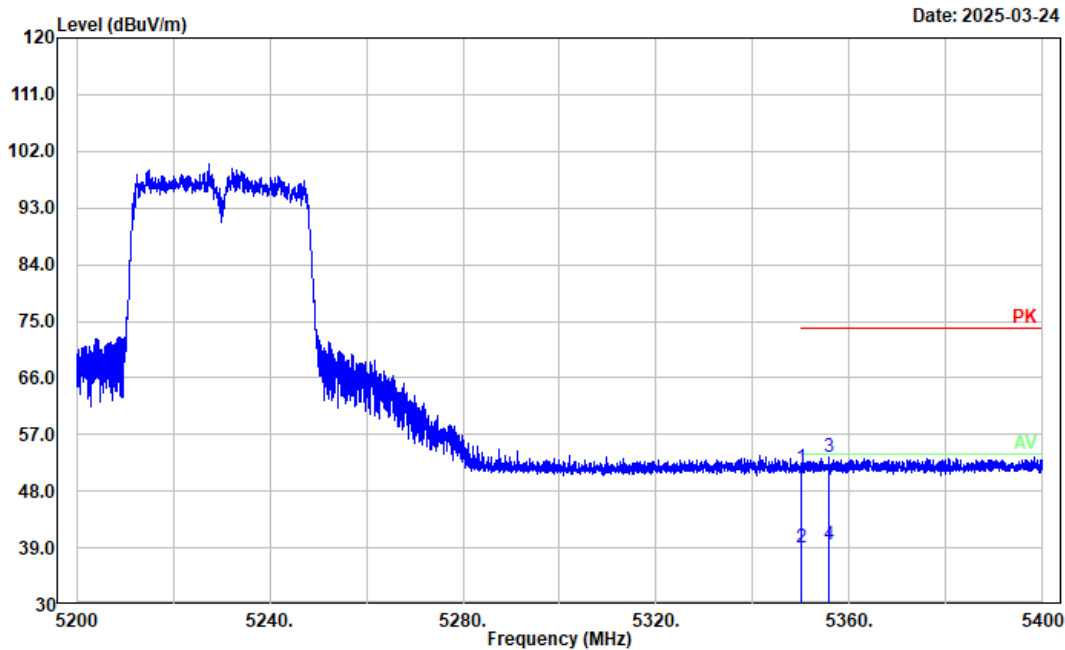


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	56.19	-4.52	51.67	74.00	22.33	Peak
2	5350.000	43.58	-4.52	39.06	54.00	14.94	Average
3	5355.680	58.03	-4.50	53.53	74.00	20.47	Peak
4	5355.680	44.07	-4.50	39.57	54.00	14.43	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: ac80 Middle Channel 5210MHz band 1

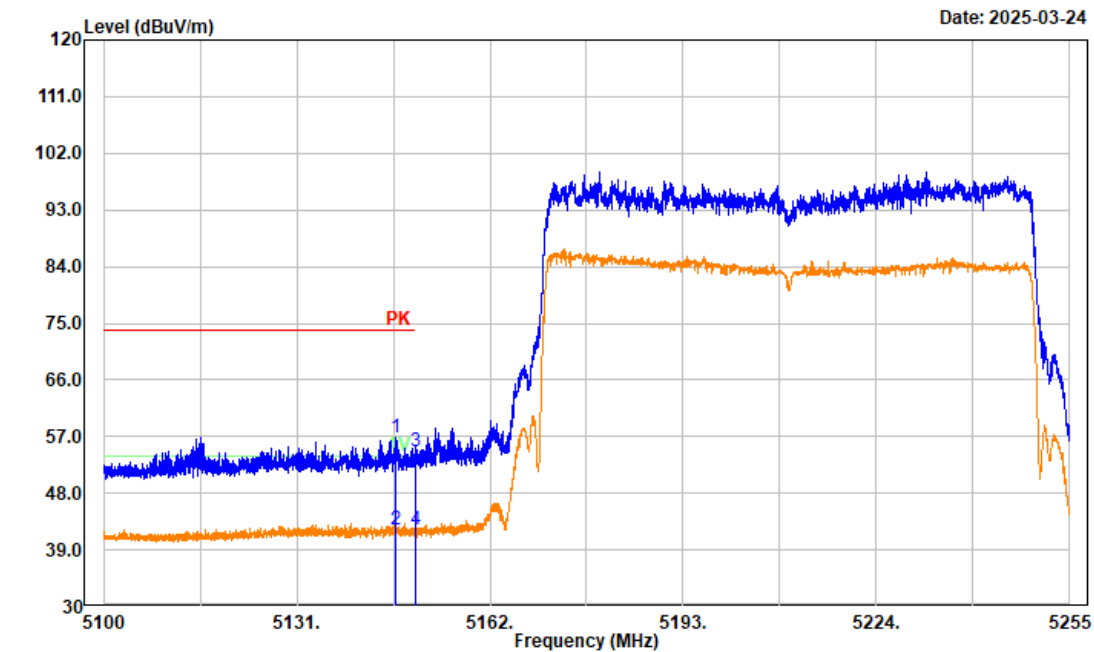


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5146.872	61.43	-4.62	56.81	74.00	17.19	Peak
2	5146.872	46.79	-4.62	42.17	54.00	11.83	Average
3	5150.000	59.34	-4.61	54.73	74.00	19.27	Peak
4	5150.000	46.82	-4.61	42.21	54.00	11.79	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ac80 Middle Channel 5210MHz band 1

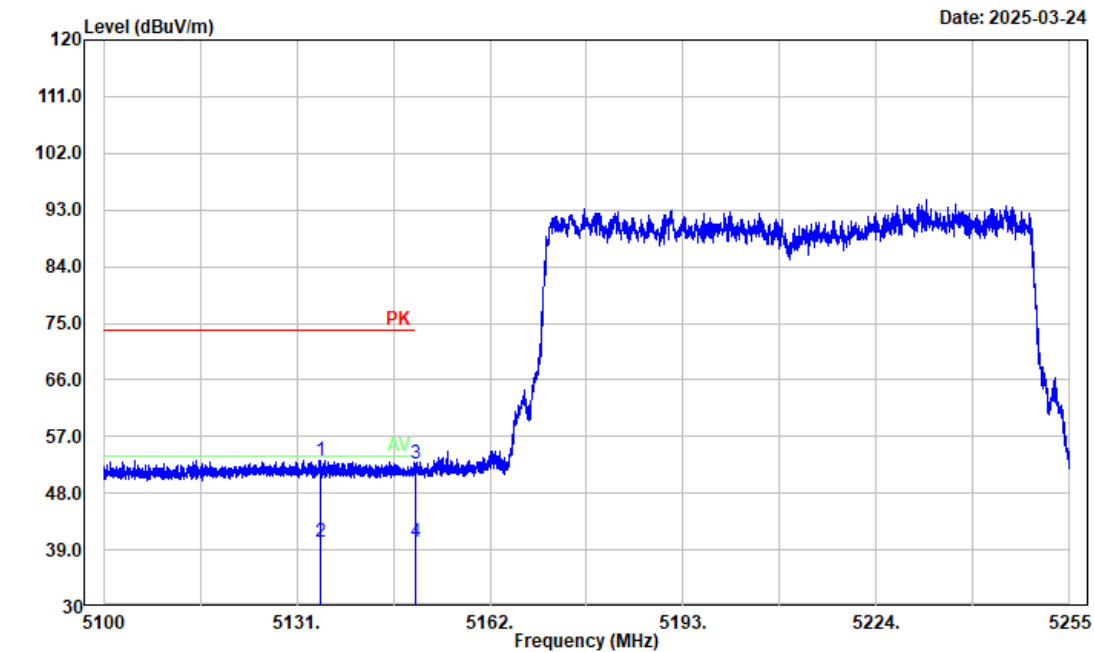


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5134.689	57.94	-4.66	53.28	74.00	20.72	Peak
2	5134.689	45.01	-4.66	40.35	54.00	13.65	Average
3	5150.000	57.31	-4.61	52.70	74.00	21.30	Peak
4	5150.000	44.96	-4.61	40.35	54.00	13.65	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: ac80 Middle Channel 5210MHz band 1

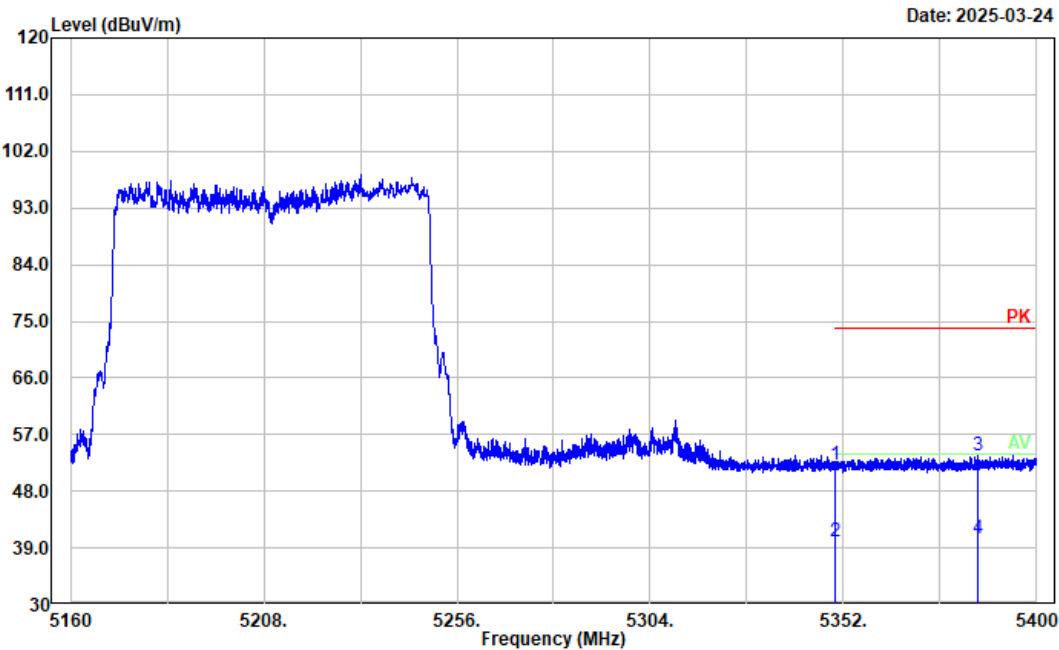


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	56.81	-4.52	52.29	74.00	21.71	Peak
2	5350.000	44.53	-4.52	40.01	54.00	13.99	Average
3	5385.552	58.00	-4.38	53.62	74.00	20.38	Peak
4	5385.552	44.77	-4.38	40.39	54.00	13.61	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ac80 Middle Channel 5210MHz band 1

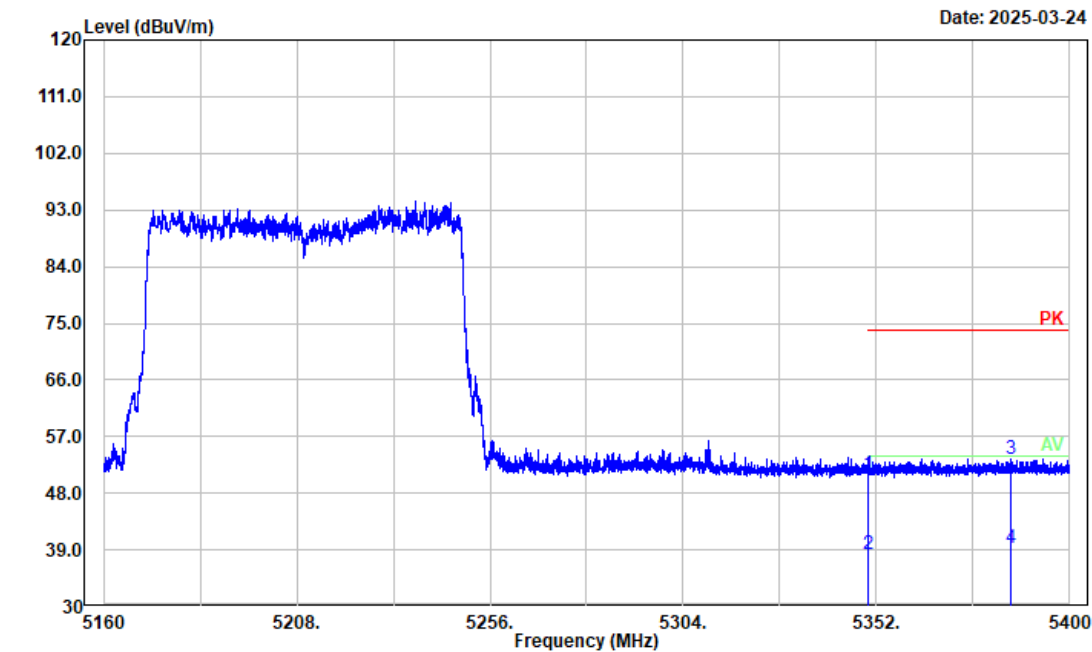


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	55.47	-4.52	50.95	74.00	23.05	Peak
2	5350.000	42.91	-4.52	38.39	54.00	15.61	Average
3	5385.552	57.85	-4.38	53.47	74.00	20.53	Peak
4	5385.552	43.66	-4.38	39.28	54.00	14.72	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: ax20 Low Channel 5180MHz band 1

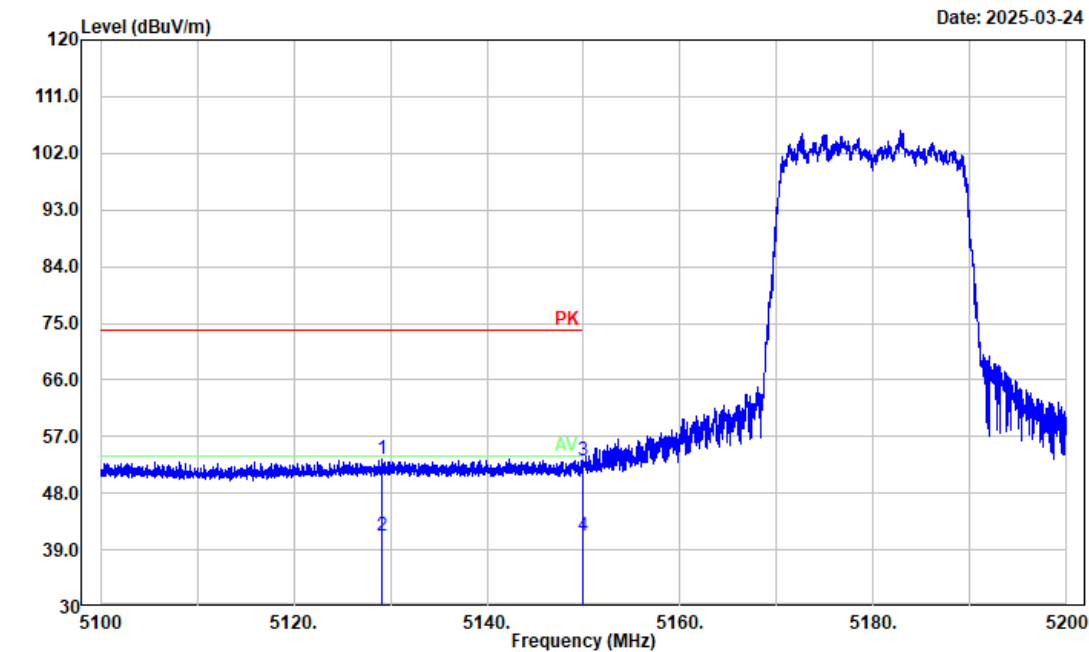


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5129.060	58.05	-4.68	53.37	74.00	20.63	Peak
2	5129.060	45.90	-4.68	41.22	54.00	12.78	Average
3	5150.000	57.80	-4.61	53.19	74.00	20.81	Peak
4	5150.000	45.87	-4.61	41.26	54.00	12.74	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax20 Low Channel 5180MHz band 1

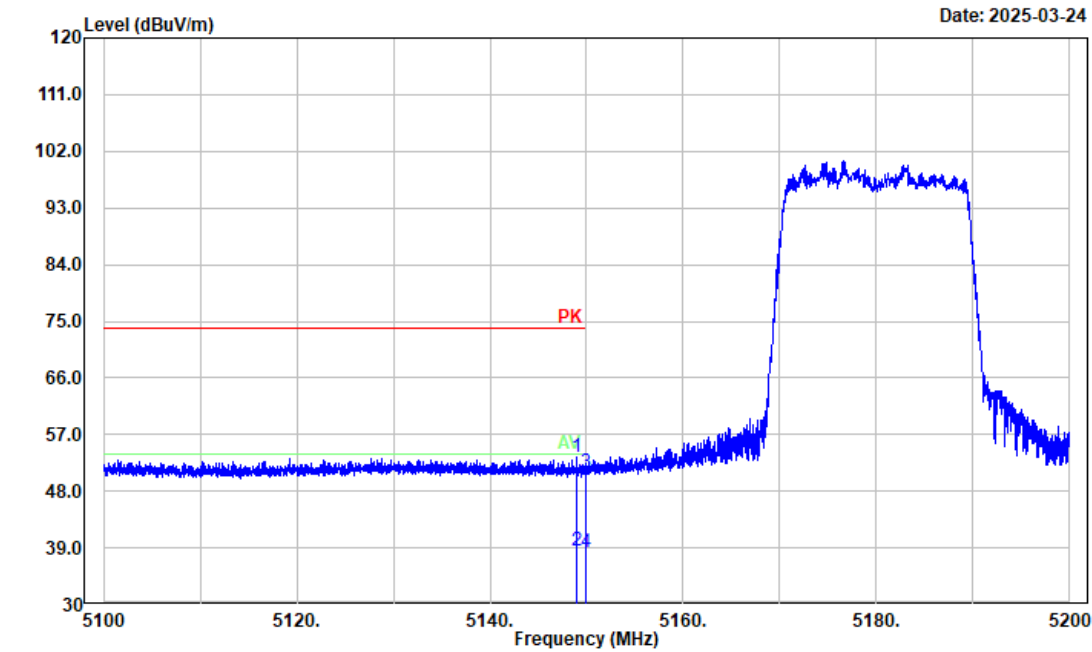


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5148.920	57.97	-4.61	53.36	74.00	20.64	Peak
2	5148.920	43.17	-4.61	38.56	54.00	15.44	Average
3	5150.000	55.60	-4.61	50.99	74.00	23.01	Peak
4	5150.000	42.88	-4.61	38.27	54.00	15.73	Average

Project No.: 2503Q19064E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
 Polarization: Horizontal
 Note: ax20 High Channel 5240MHz band 1

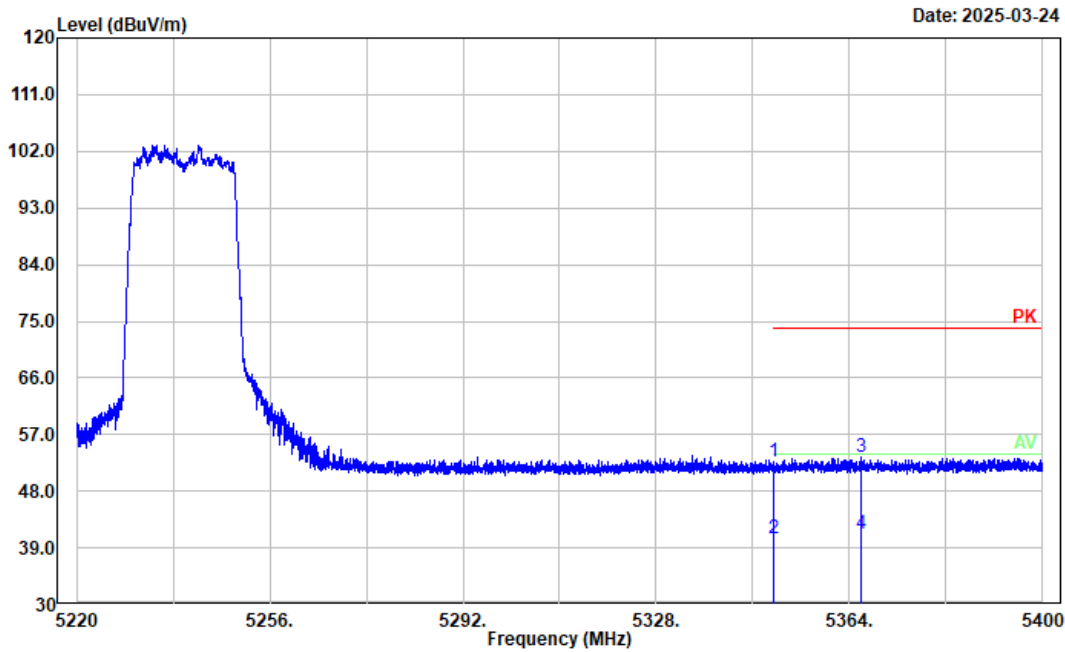


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	57.27	-4.52	52.75	74.00	21.25	Peak
2	5350.000	45.11	-4.52	40.59	54.00	13.41	Average
3	5366.196	57.89	-4.46	53.43	74.00	20.57	Peak
4	5366.196	45.72	-4.46	41.26	54.00	12.74	Average

Project No.: 2503Q19064E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
 Polarization: Vertical
 Note: ax20 High Channel 5240MHz band 1

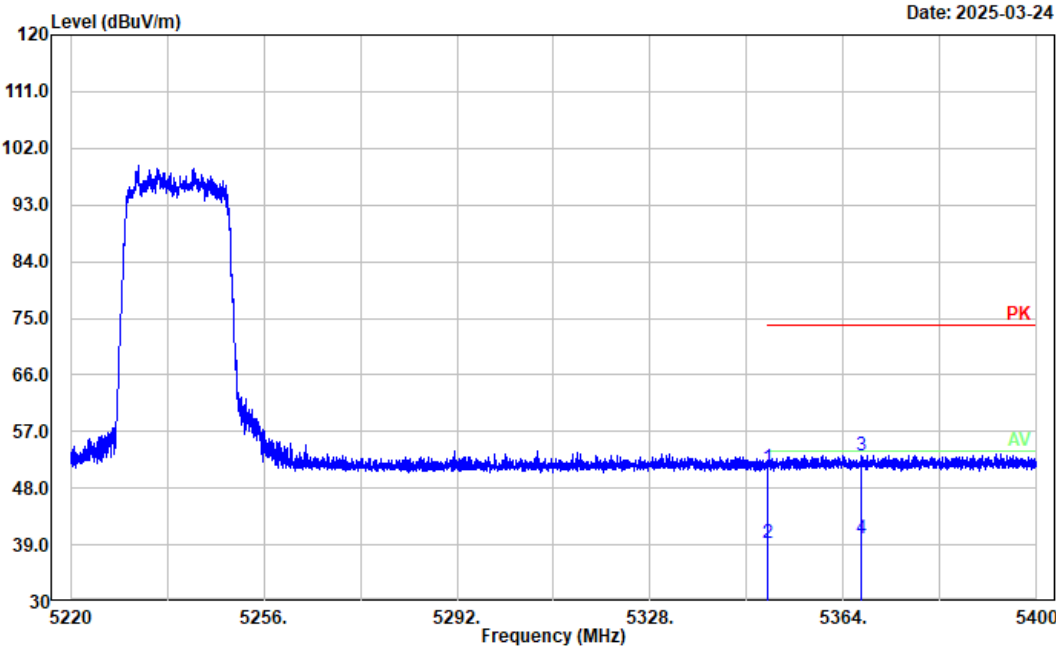


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	55.76	-4.52	51.24	74.00	22.76	Peak
2	5350.000	43.70	-4.52	39.18	54.00	14.82	Average
3	5367.204	57.68	-4.46	53.22	74.00	20.78	Peak
4	5367.204	44.34	-4.46	39.88	54.00	14.12	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: ax40 Low Channel 5190MHz band 1

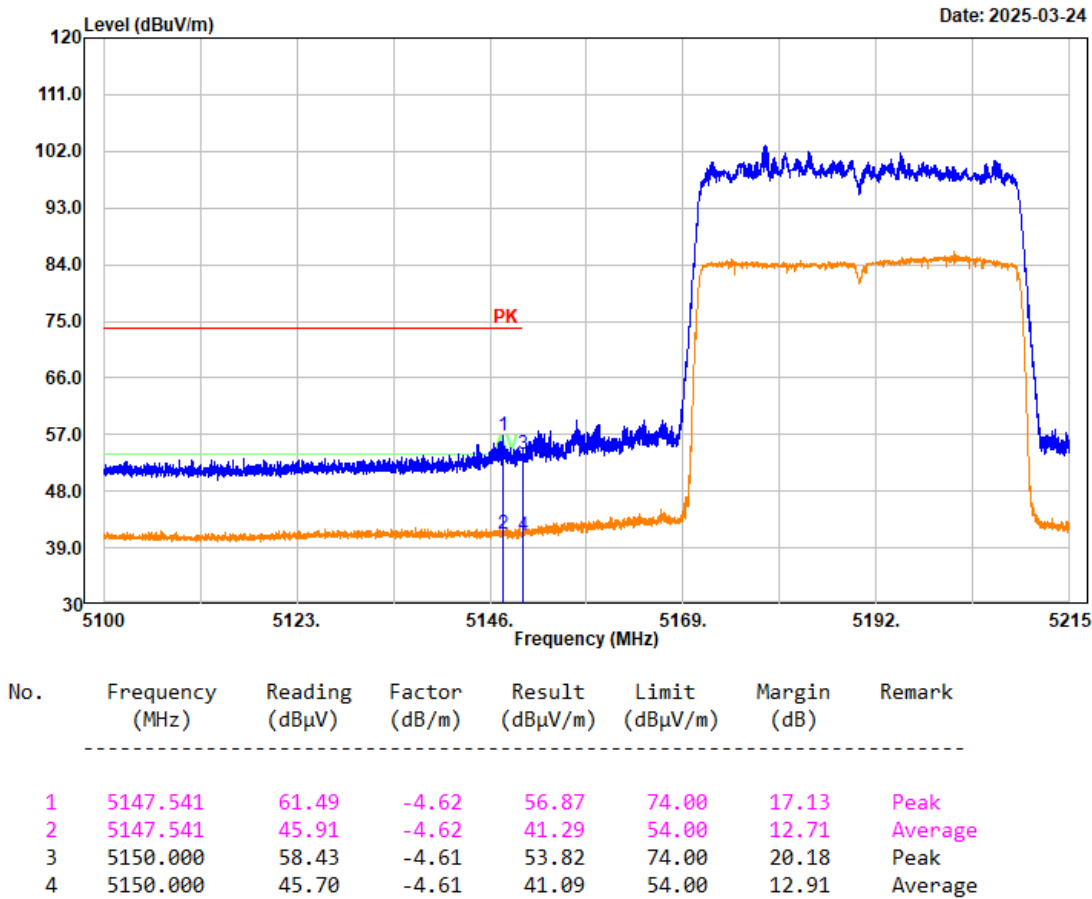


Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax40 Low Channel 5190MHz band 1

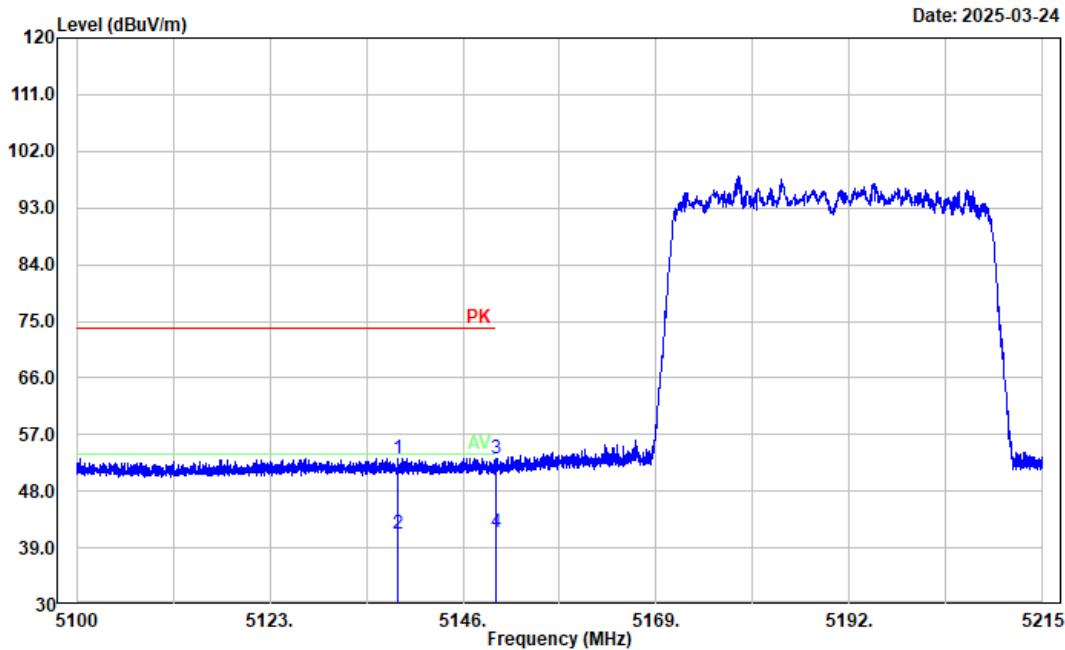


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5138.226	57.89	-4.65	53.24	74.00	20.76	Peak
2	5138.226	45.98	-4.65	41.33	54.00	12.67	Average
3	5150.000	57.85	-4.61	53.24	74.00	20.76	Peak
4	5150.000	46.18	-4.61	41.57	54.00	12.43	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: ax40 High Channel 5230MHz band 1

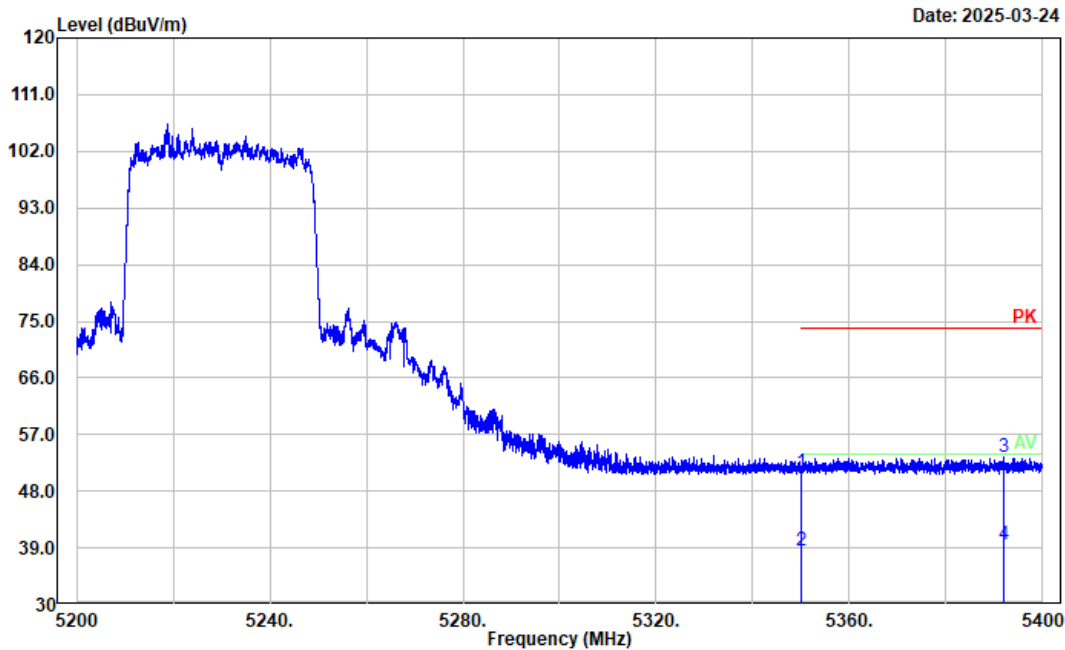


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	55.46	-4.52	50.94	74.00	23.06	Peak
2	5350.000	43.06	-4.52	38.54	54.00	15.46	Average
3	5391.960	57.78	-4.37	53.41	74.00	20.59	Peak
4	5391.960	43.88	-4.37	39.51	54.00	14.49	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax40 High Channel 5230MHz band 1

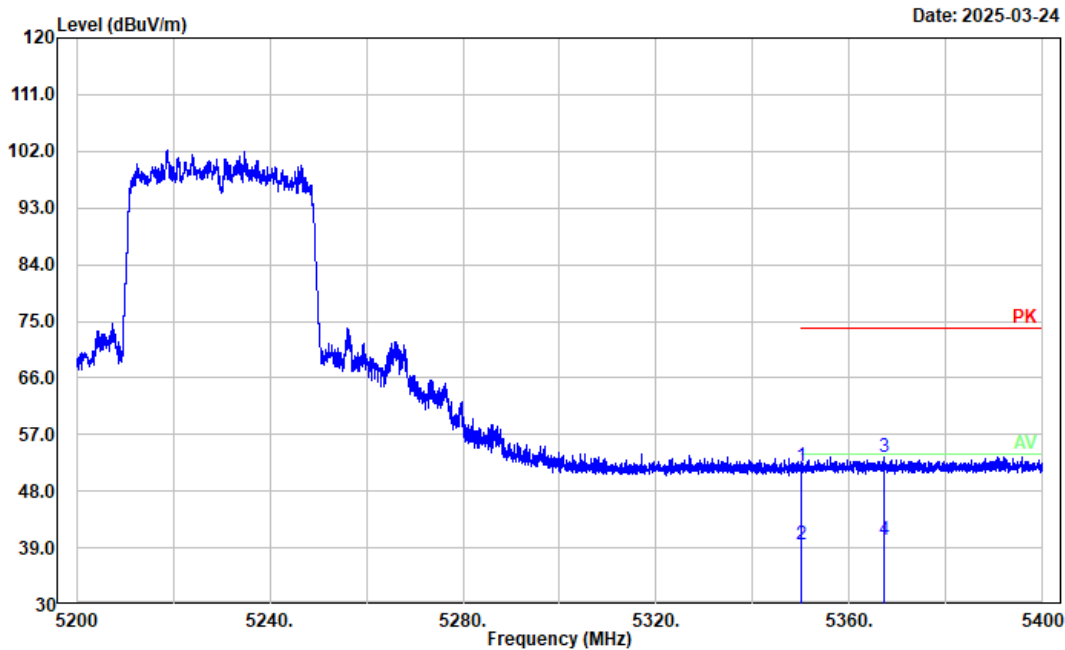


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	56.42	-4.52	51.90	74.00	22.10	Peak
2	5350.000	43.93	-4.52	39.41	54.00	14.59	Average
3	5367.120	57.97	-4.46	53.51	74.00	20.49	Peak
4	5367.120	44.59	-4.46	40.13	54.00	13.87	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: ax80 Middle Channel 5210MHz band 1

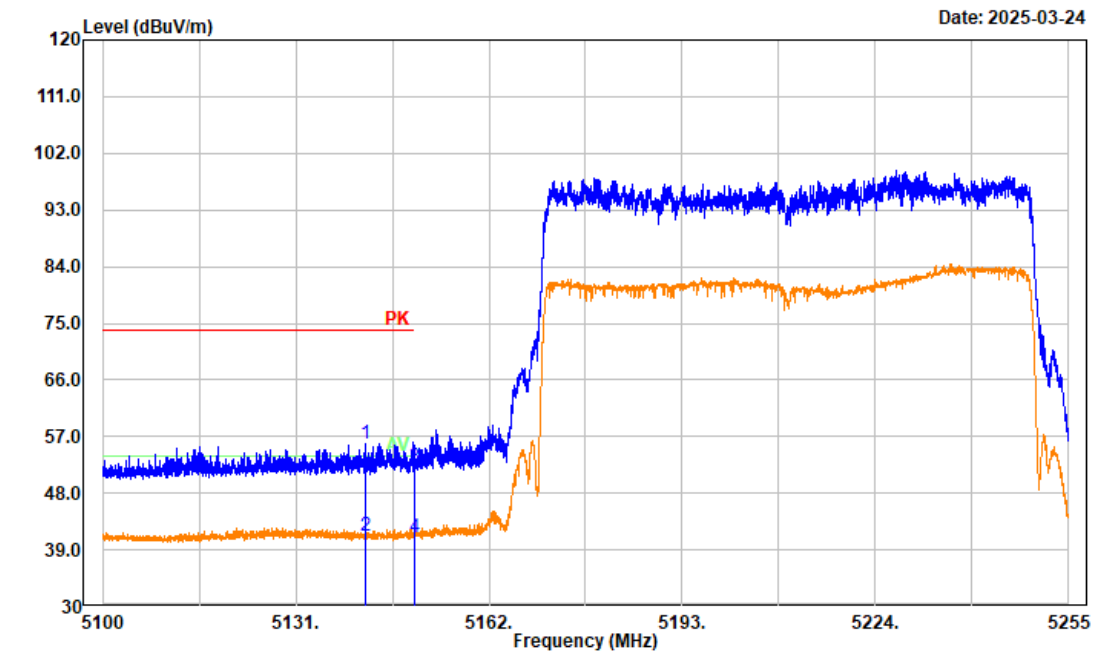


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5142.129	60.43	-4.64	55.79	74.00	18.21	Peak
2	5142.129	45.84	-4.64	41.20	54.00	12.80	Average
3	5150.000	56.74	-4.61	52.13	74.00	21.87	Peak
4	5150.000	45.48	-4.61	40.87	54.00	13.13	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax80 Middle Channel 5210MHz band 1

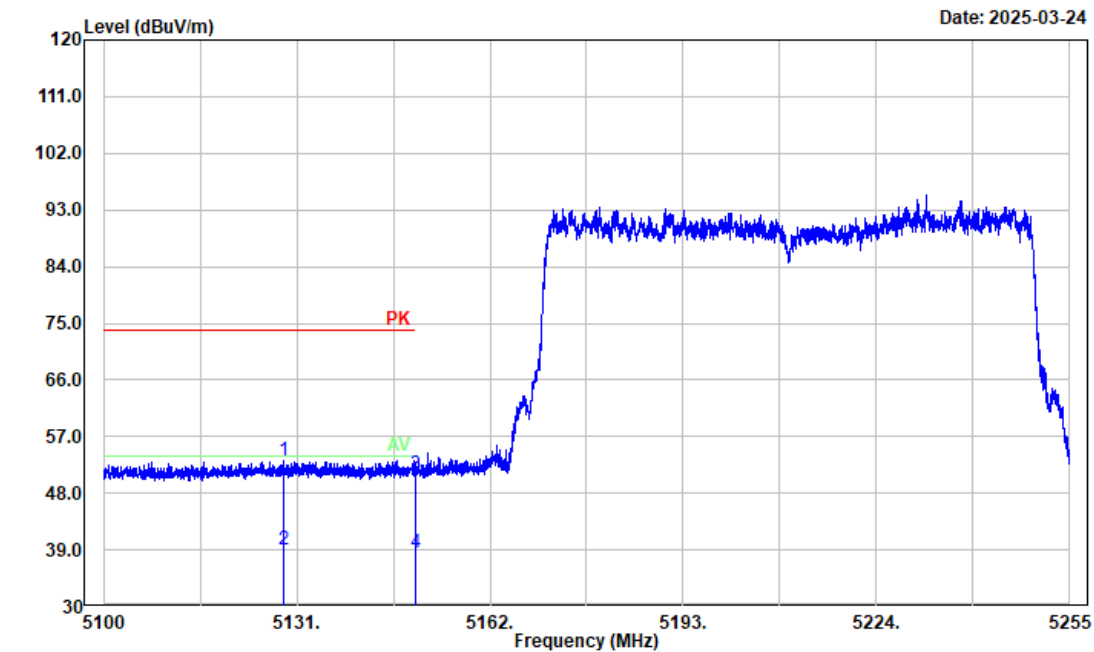


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5128.923	57.95	-4.68	53.27	74.00	20.73	Peak
2	5128.923	43.81	-4.68	39.13	54.00	14.87	Average
3	5150.000	55.55	-4.61	50.94	74.00	23.06	Peak
4	5150.000	43.08	-4.61	38.47	54.00	15.53	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: ax80 Middle Channel 5210MHz band 1

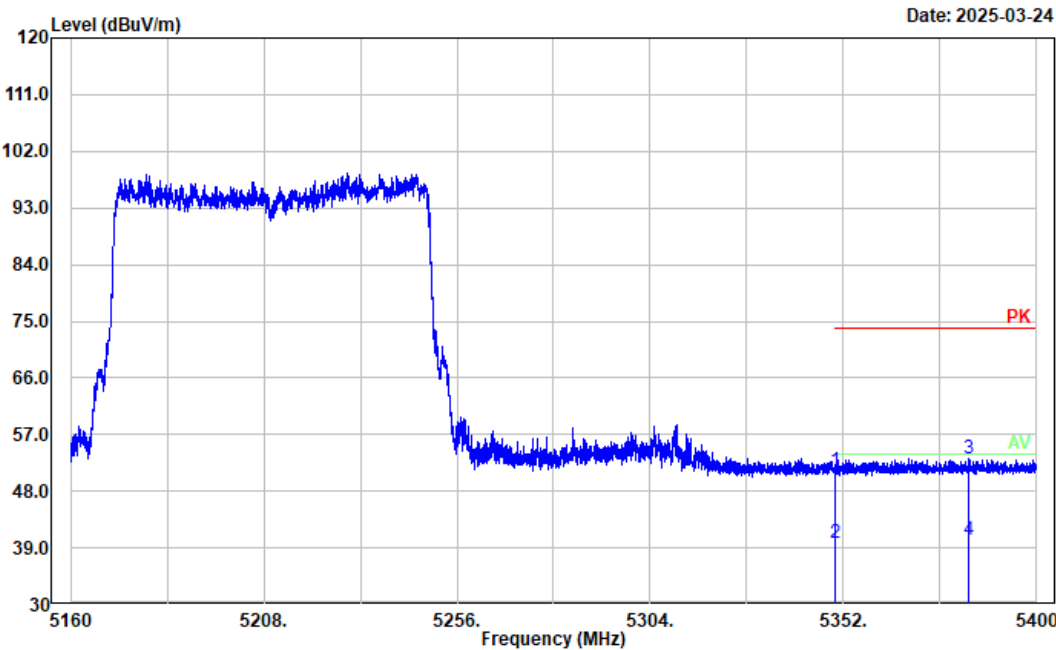


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	55.71	-4.52	51.19	74.00	22.81	Peak
2	5350.000	44.20	-4.52	39.68	54.00	14.32	Average
3	5383.056	57.57	-4.39	53.18	74.00	20.82	Peak
4	5383.056	44.56	-4.39	40.17	54.00	13.83	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax80 Middle Channel 5210MHz band 1

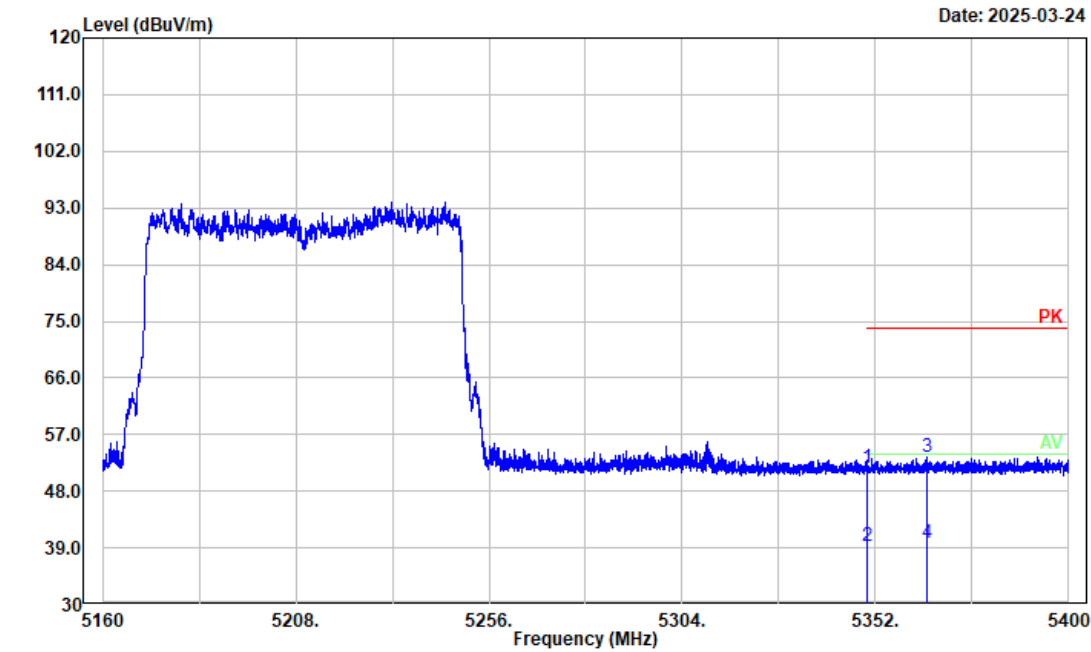


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	56.12	-4.52	51.60	74.00	22.40	Peak
2	5350.000	43.81	-4.52	39.29	54.00	14.71	Average
3	5364.720	57.81	-4.47	53.34	74.00	20.66	Peak
4	5364.720	44.21	-4.47	39.74	54.00	14.26	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: a Low Channel 5260MHz band 2 Chain 0

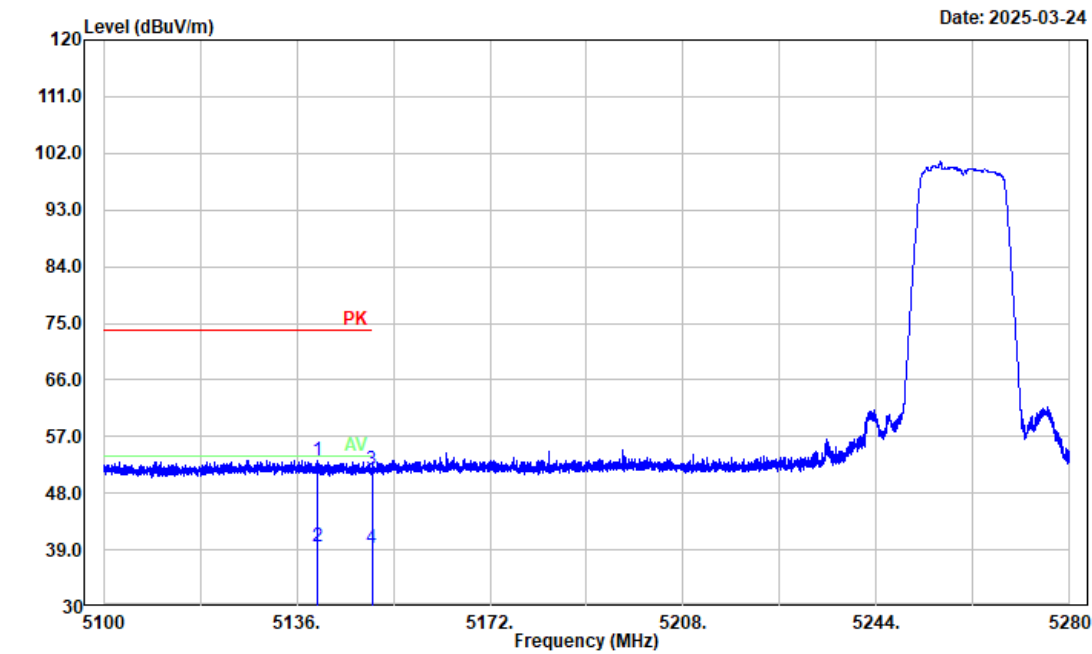


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5139.852	57.87	-4.65	53.22	74.00	20.78	Peak
2	5139.852	44.22	-4.65	39.57	54.00	14.43	Average
3	5150.000	56.32	-4.61	51.71	74.00	22.29	Peak
4	5150.000	43.78	-4.61	39.17	54.00	14.83	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: a Low Channel 5260MHz band 2 Chain 0

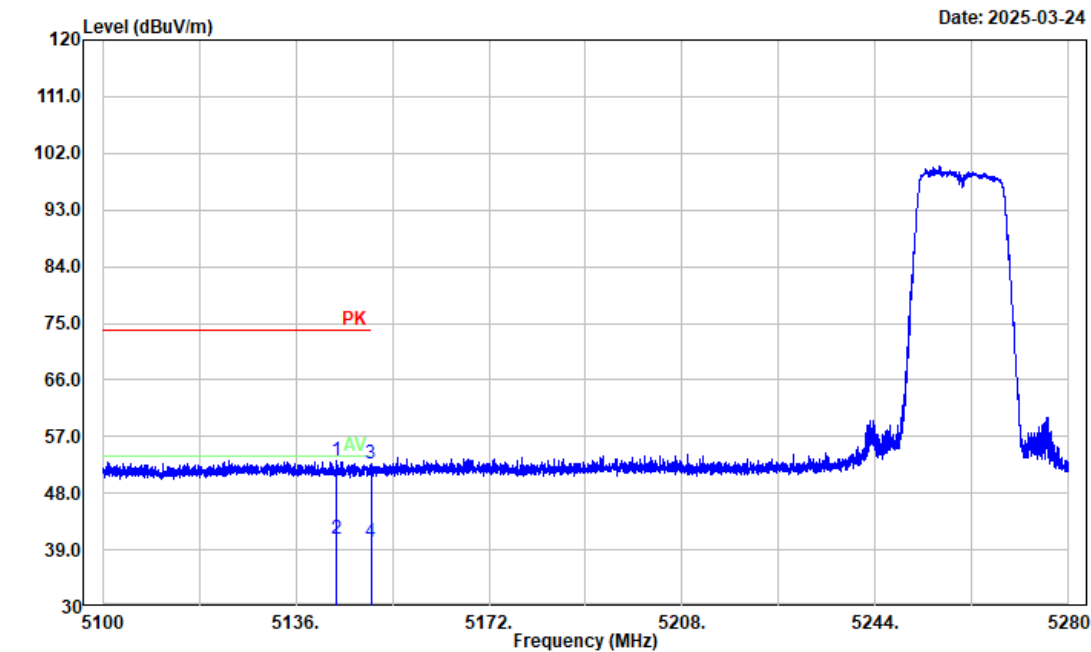


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5143.488	57.77	-4.64	53.13	74.00	20.87	Peak
2	5143.488	45.30	-4.64	40.66	54.00	13.34	Average
3	5150.000	57.24	-4.61	52.63	74.00	21.37	Peak
4	5150.000	44.84	-4.61	40.23	74.00	33.77	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: a High Channel 5320MHz band 2 Chain 0

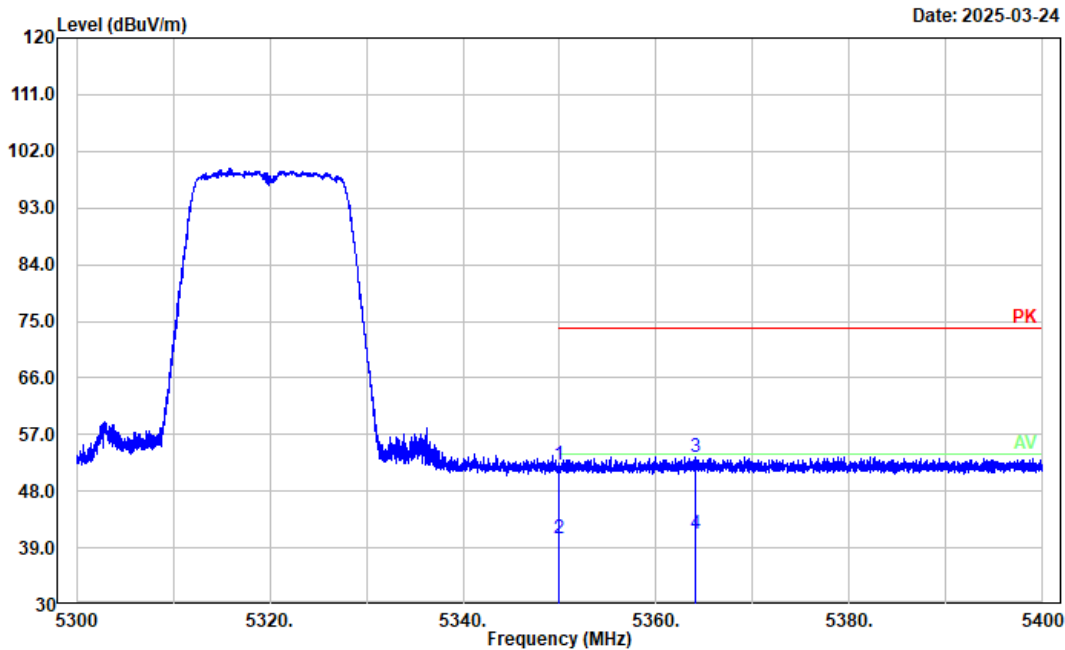


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	56.73	-4.52	52.21	74.00	21.79	Peak
2	5350.000	45.03	-4.52	40.51	54.00	13.49	Average
3	5364.120	57.88	-4.47	53.41	74.00	20.59	Peak
4	5364.120	45.70	-4.47	41.23	54.00	12.77	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: a High Channel 5320MHz band 2 Chain 0

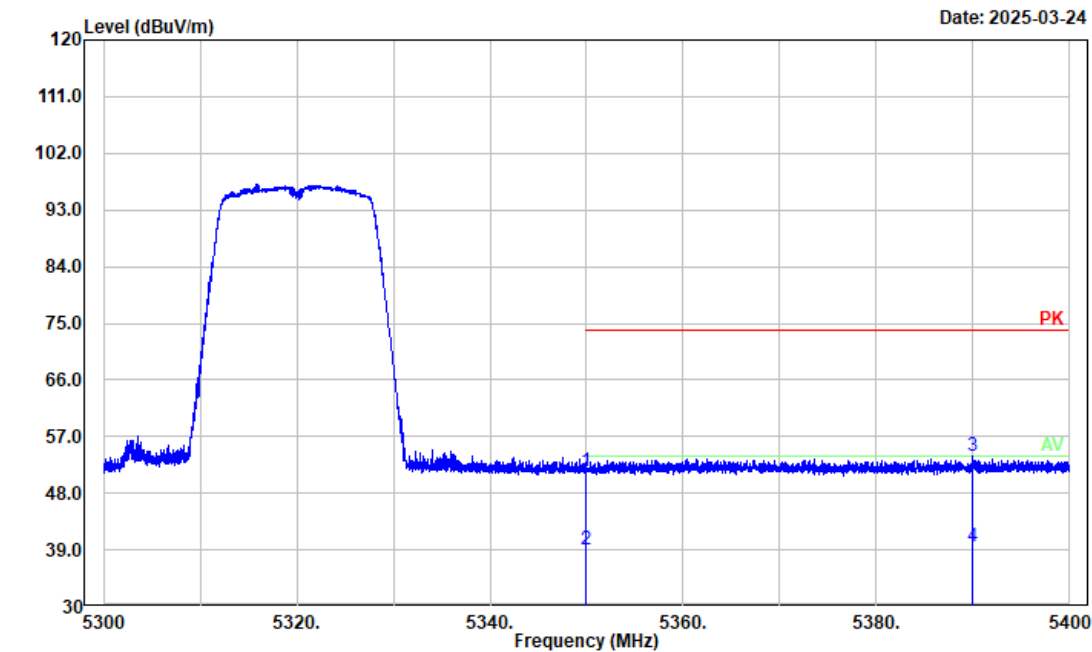


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	56.06	-4.52	51.54	74.00	22.46	Peak
2	5350.000	43.58	-4.52	39.06	54.00	14.94	Average
3	5389.940	58.26	-4.37	53.89	74.00	20.11	Peak
4	5389.940	43.96	-4.37	39.59	54.00	14.41	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: a Low Channel 5260MHz band 2 Chain 1

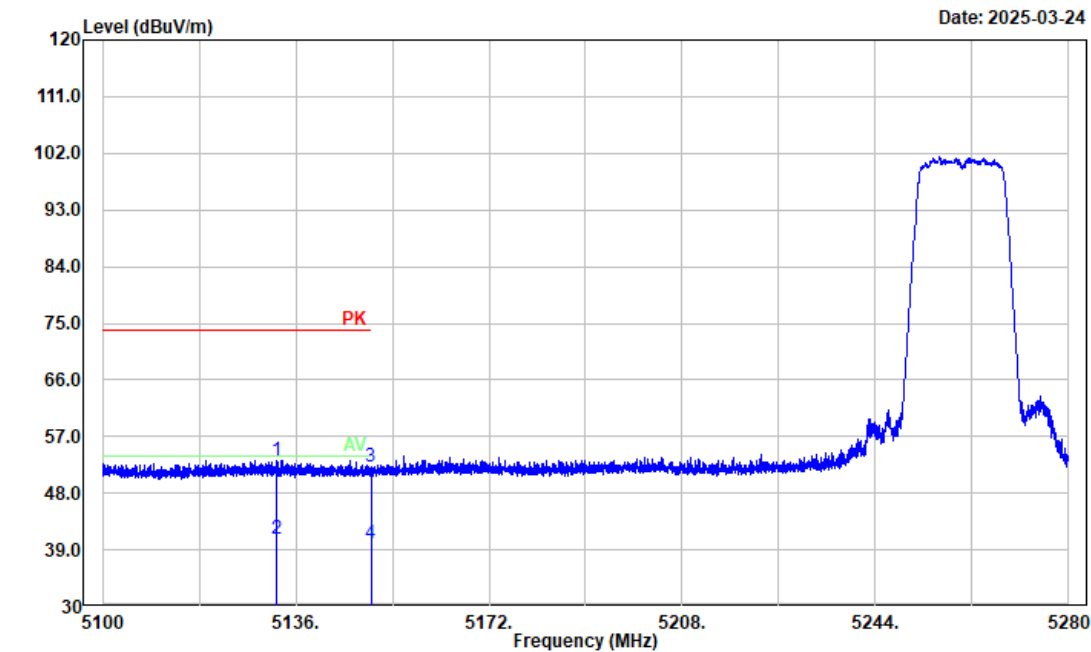


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5132.400	57.87	-4.67	53.20	74.00	20.80	Peak
2	5132.400	45.46	-4.67	40.79	54.00	13.21	Average
3	5150.000	56.82	-4.61	52.21	74.00	21.79	Peak
4	5150.000	44.66	-4.61	40.05	54.00	13.95	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: a Low Channel 5260MHz band 2 Chain 1

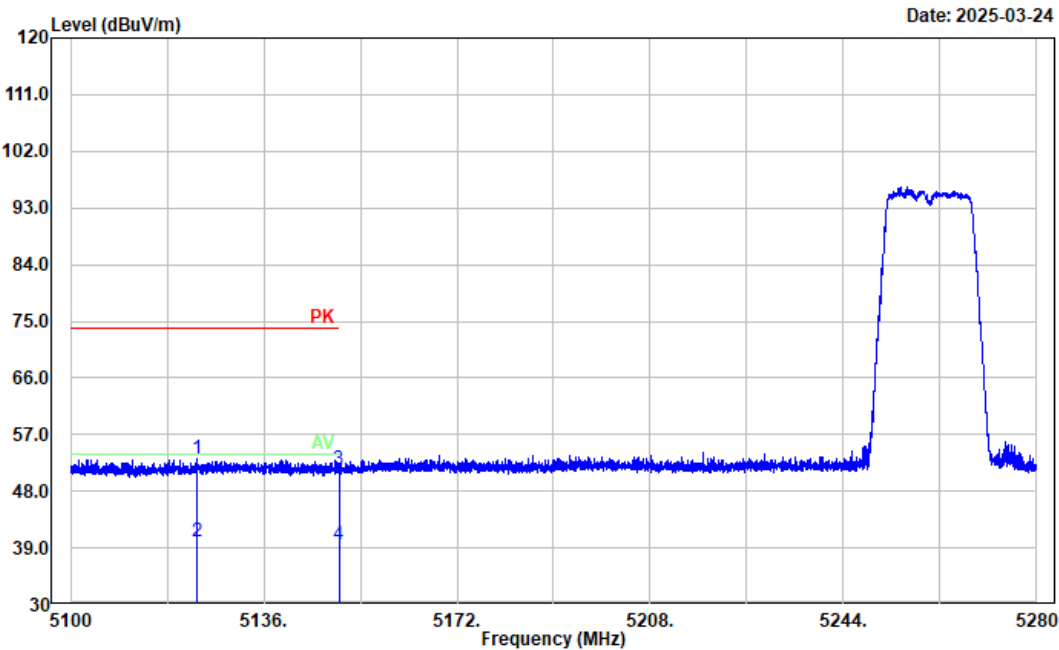


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5123.688	57.85	-4.70	53.15	74.00	20.85	Peak
2	5123.688	44.80	-4.70	40.10	54.00	13.90	Average
3	5150.000	56.05	-4.61	51.44	74.00	22.56	Peak
4	5150.000	44.06	-4.61	39.45	54.00	14.55	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: a High Channel 5320MHz band 2 Chain 1

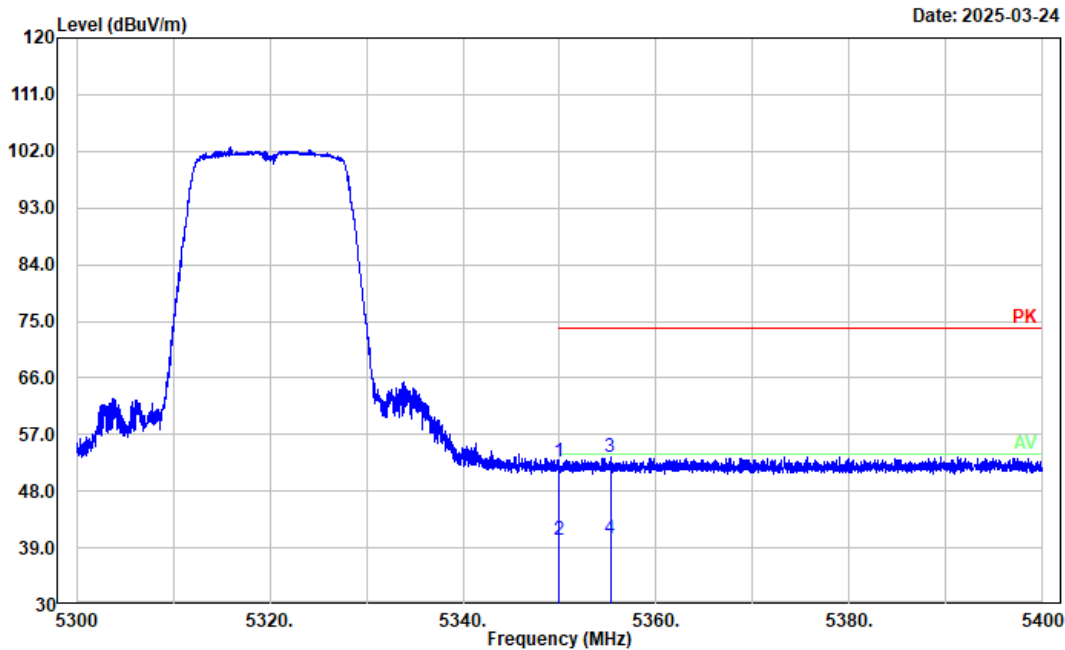


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	57.15	-4.52	52.63	74.00	21.37	Peak
2	5350.000	44.79	-4.52	40.27	54.00	13.73	Average
3	5355.240	57.95	-4.50	53.45	74.00	20.55	Peak
4	5355.240	45.07	-4.50	40.57	54.00	13.43	Average

Project No.: 2503Q19064E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
 Polarization: Vertical
 Note: a High Channel 5320MHz band 2 Chain 1

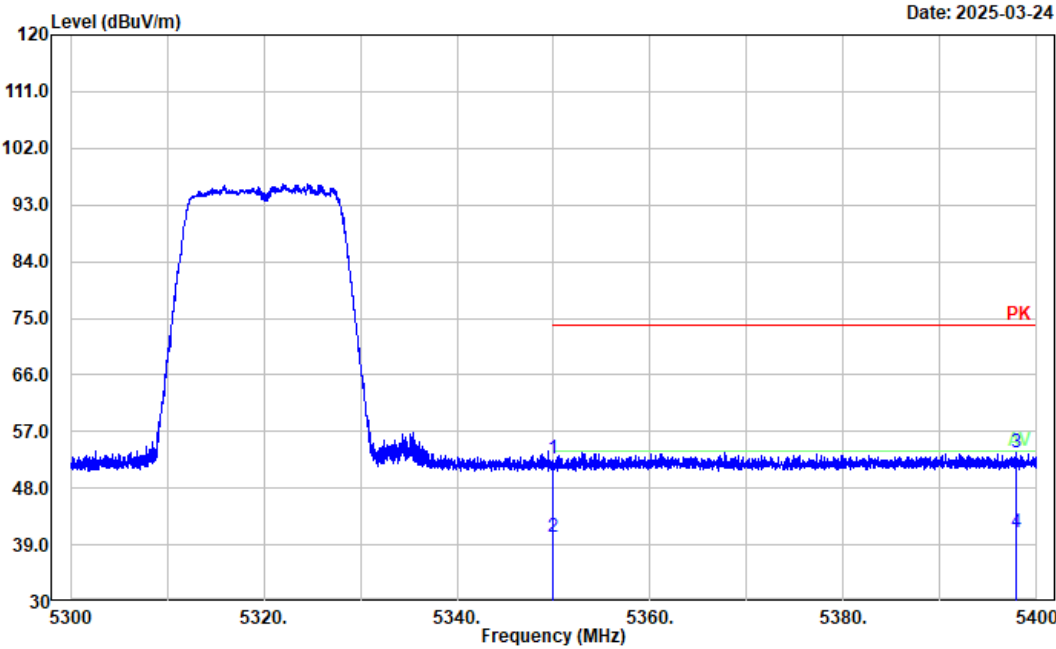


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	57.17	-4.52	52.65	74.00	21.35	Peak
2	5350.000	44.70	-4.52	40.18	54.00	13.82	Average
3	5397.900	58.05	-4.34	53.71	74.00	20.29	Peak
4	5397.900	45.36	-4.34	41.02	54.00	12.98	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: n20 Low Channel 5260MHz band 2

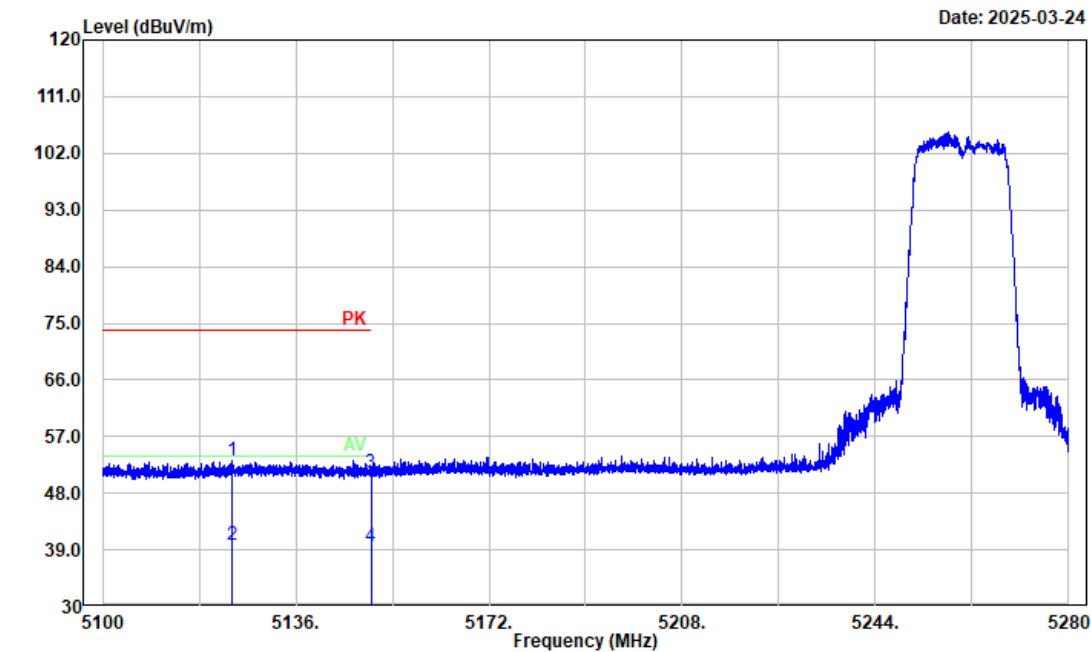


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5124.156	57.84	-4.69	53.15	74.00	20.85	Peak
2	5124.156	44.56	-4.69	39.87	54.00	14.13	Average
3	5150.000	55.93	-4.61	51.32	74.00	22.68	Peak
4	5150.000	44.17	-4.61	39.56	54.00	14.44	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: n20 Low Channel 5260MHz band 2

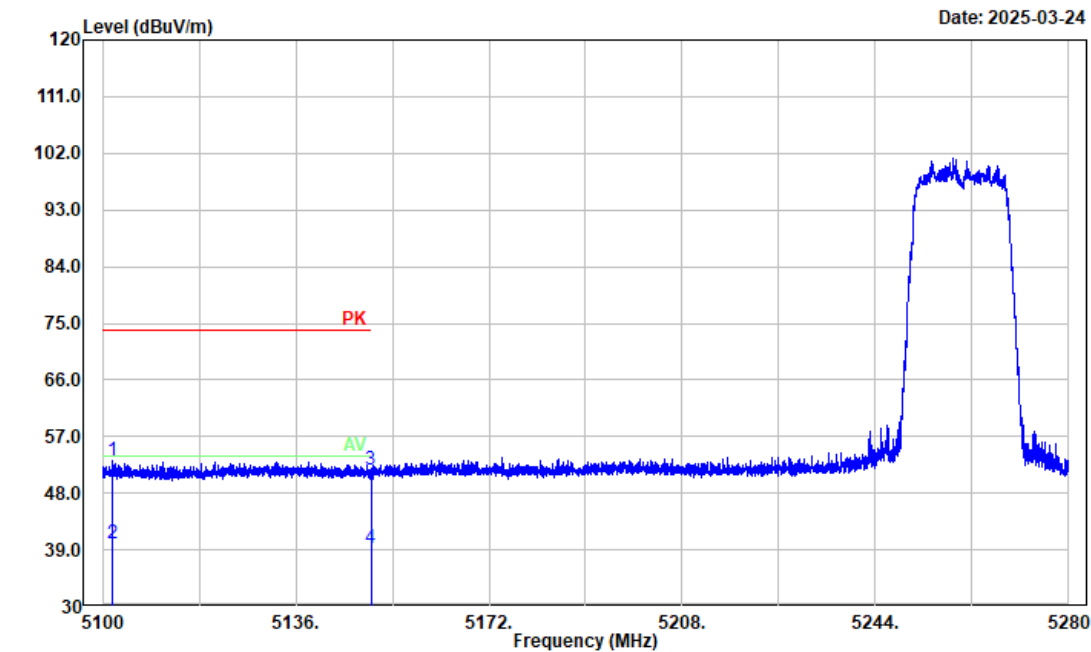


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5101.728	57.92	-4.77	53.15	74.00	20.85	Peak
2	5101.728	44.66	-4.77	39.89	54.00	14.11	Average
3	5150.000	56.39	-4.61	51.78	74.00	22.22	Peak
4	5150.000	43.88	-4.61	39.27	54.00	14.73	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: n20 High Channel 5320MHz band 2

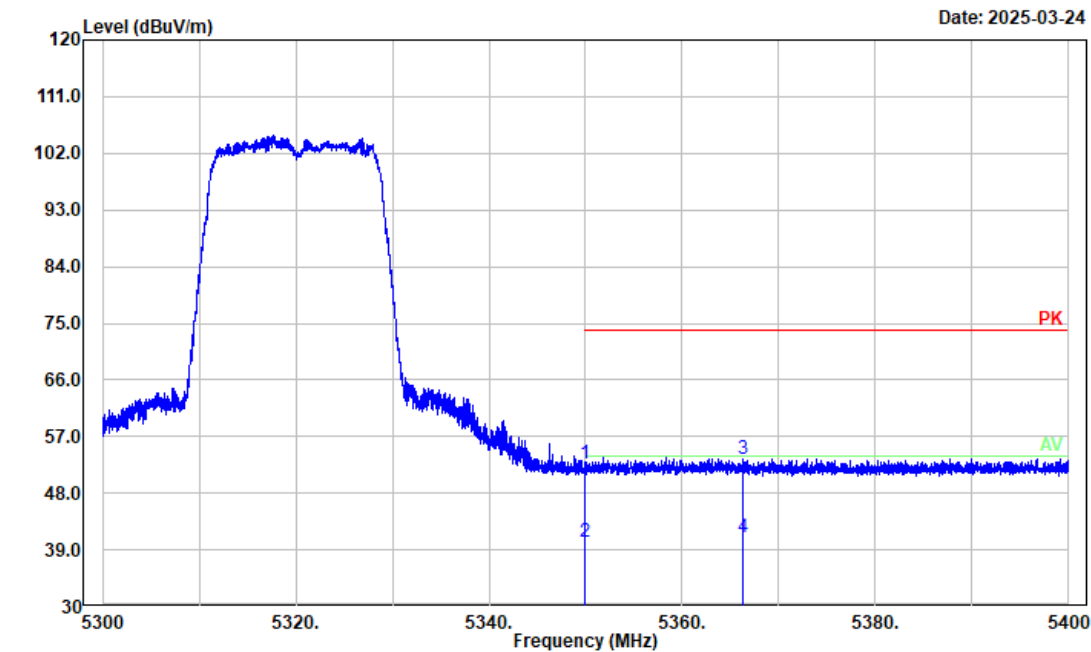


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	57.14	-4.52	52.62	74.00	21.38	Peak
2	5350.000	44.70	-4.52	40.18	54.00	13.82	Average
3	5366.220	57.98	-4.46	53.52	74.00	20.48	Peak
4	5366.220	45.35	-4.46	40.89	54.00	13.11	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: n20 High Channel 5320MHz band 2

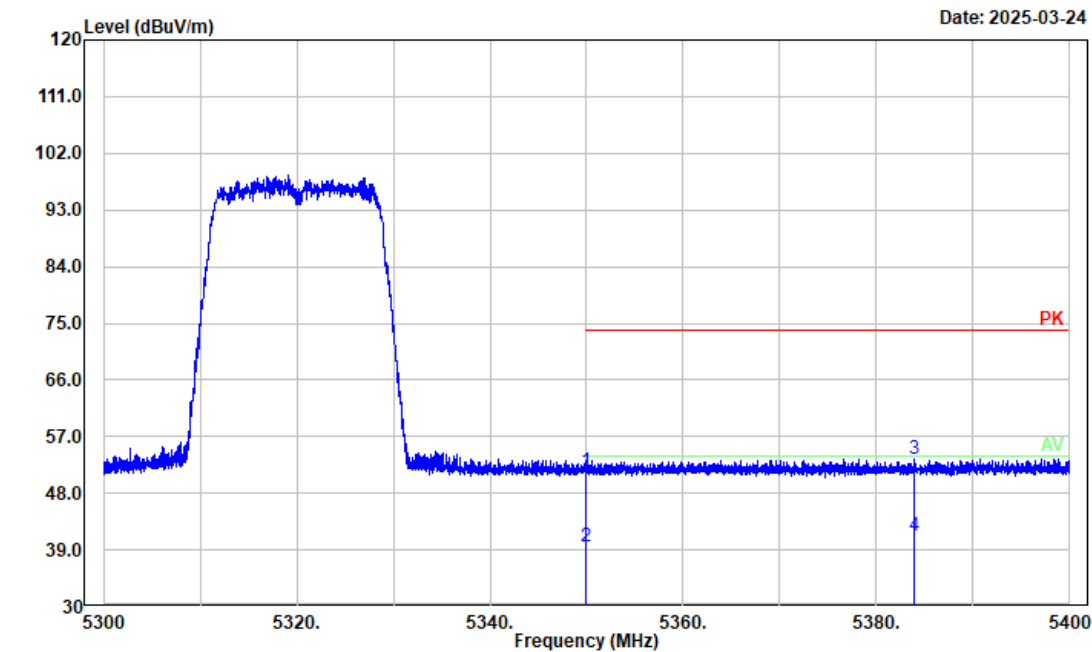


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	56.01	-4.52	51.49	74.00	22.51	Peak
2	5350.000	44.11	-4.52	39.59	54.00	14.41	Average
3	5383.840	57.88	-4.39	53.49	74.00	20.51	Peak
4	5383.840	45.52	-4.39	41.13	54.00	12.87	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: n40 Low Channel 5270MHz band 2

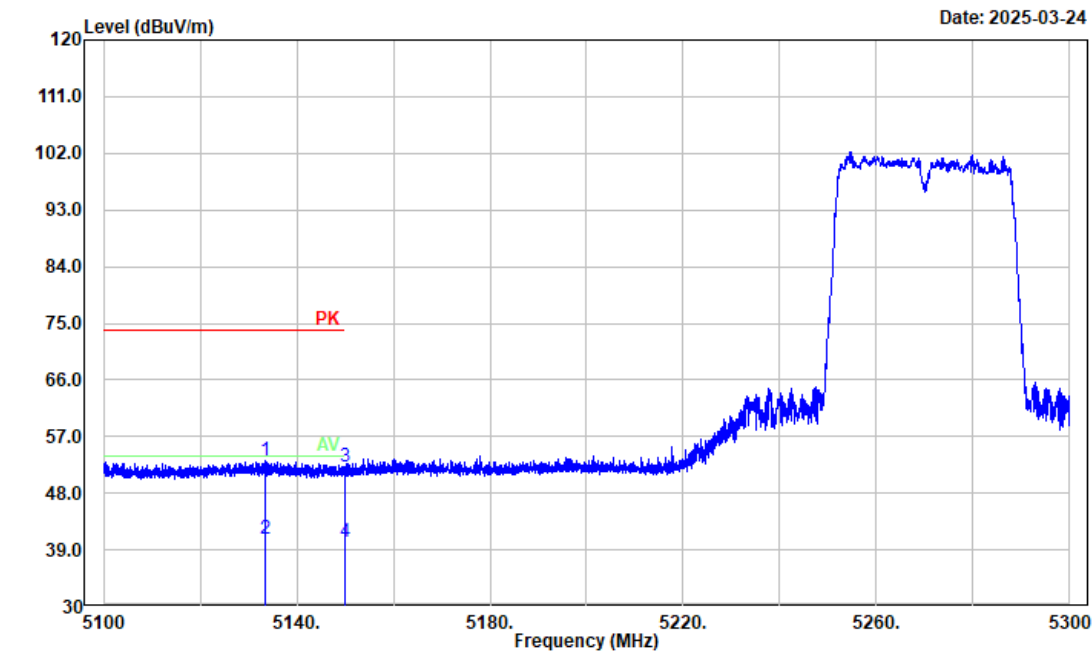


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5133.600	57.80	-4.67	53.13	74.00	20.87	Peak
2	5133.600	45.45	-4.67	40.78	54.00	13.22	Average
3	5150.000	56.85	-4.61	52.24	74.00	21.76	Peak
4	5150.000	44.80	-4.61	40.19	54.00	13.81	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: n40 Low Channel 5270MHz band 2

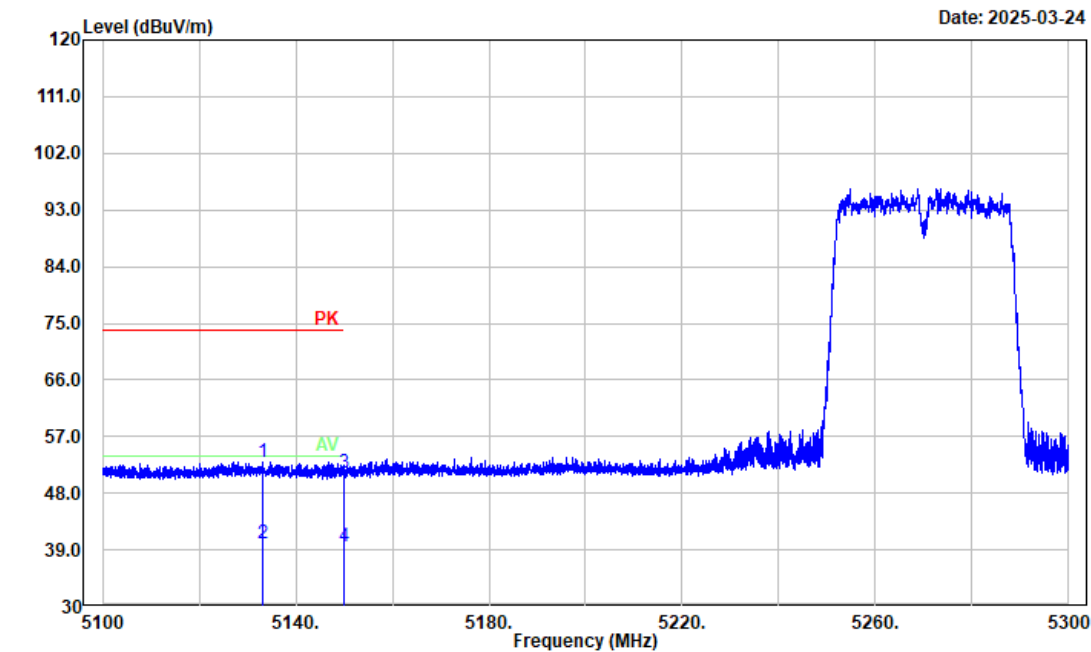


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5133.080	57.63	-4.67	52.96	74.00	21.04	Peak
2	5133.080	44.68	-4.67	40.01	54.00	13.99	Average
3	5150.000	55.94	-4.61	51.33	74.00	22.67	Peak
4	5150.000	44.18	-4.61	39.57	54.00	14.43	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: n40 High Channel 5310MHz band 2

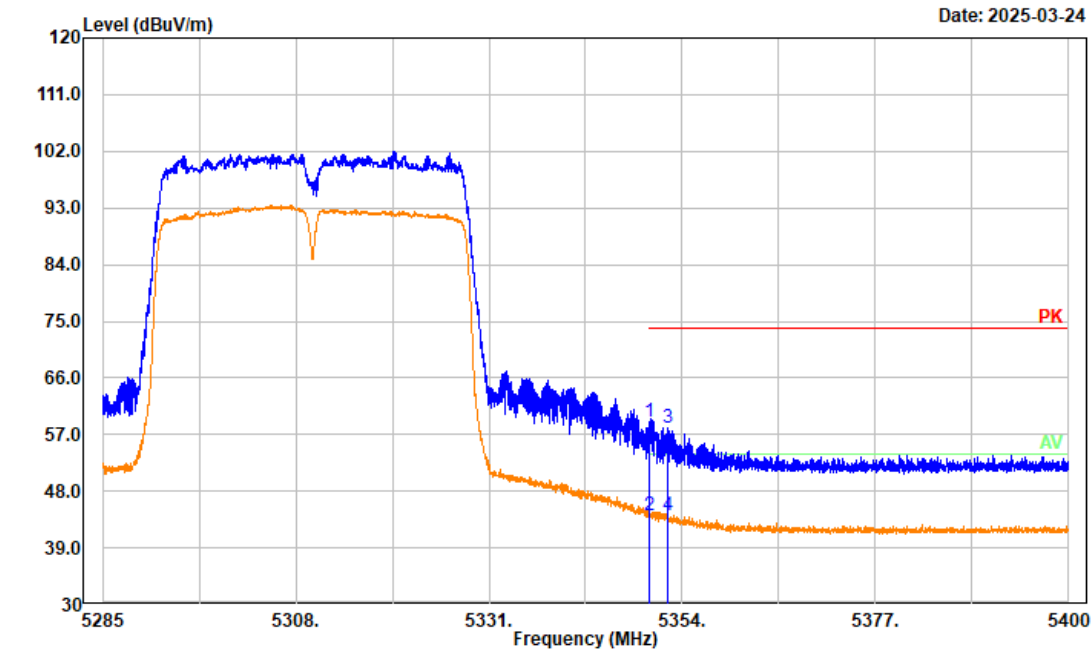


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	63.54	-4.52	59.02	74.00	14.98	Peak
2	5350.000	48.67	-4.52	44.15	54.00	9.85	Average
3	5352.321	62.66	-4.51	58.15	74.00	15.85	Peak
4	5352.321	48.63	-4.51	44.12	54.00	9.88	Average

Project No.: 2503Q19064E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
 Polarization: Vertical
 Note: n40 High Channel 5310MHz band 2

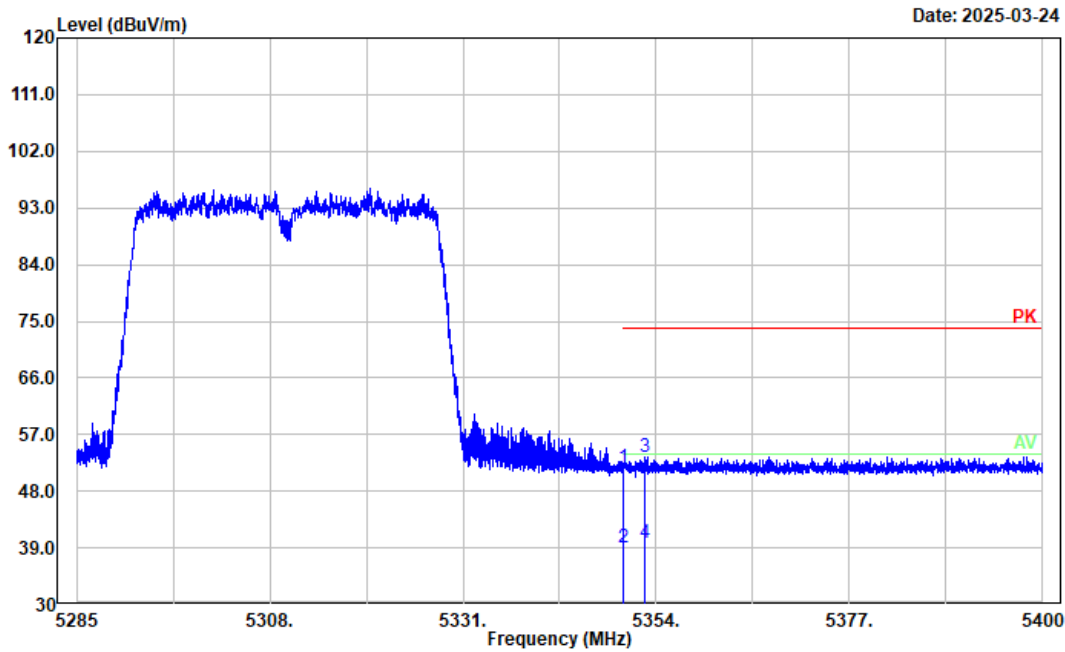


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	56.29	-4.52	51.77	74.00	22.23	Peak
2	5350.000	43.60	-4.52	39.08	54.00	14.92	Average
3	5352.712	57.86	-4.50	53.36	74.00	20.64	Peak
4	5352.712	44.28	-4.50	39.78	54.00	14.22	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: ac80 Middle Channel 5290MHz band 2

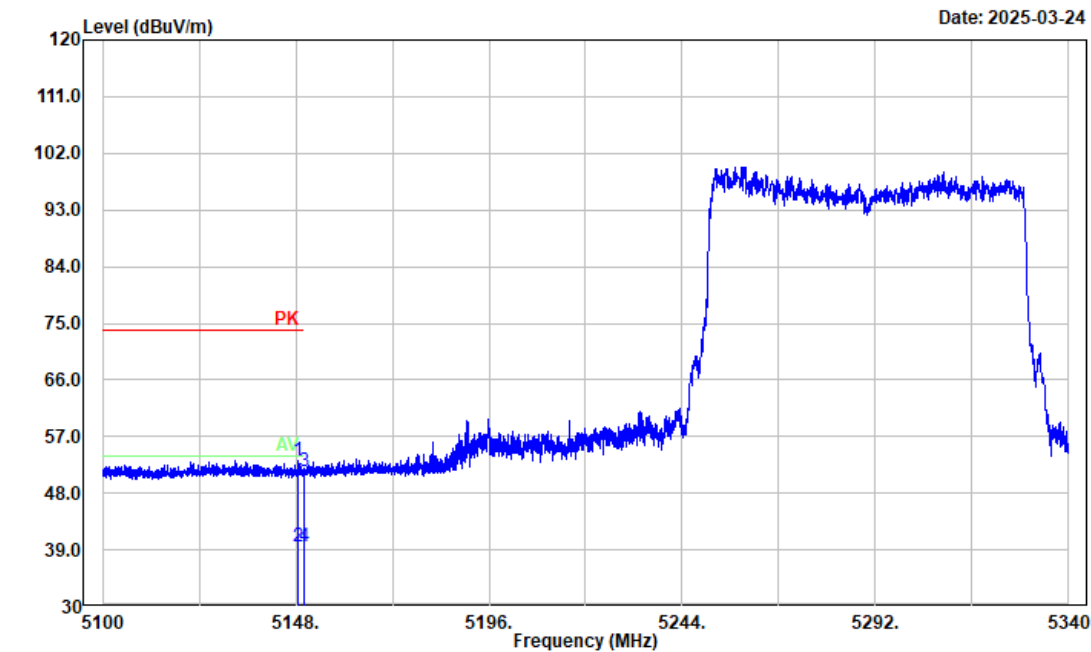


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5148.624	57.73	-4.62	53.11	74.00	20.89	Peak
2	5148.624	44.17	-4.62	39.55	54.00	14.45	Average
3	5150.000	55.99	-4.61	51.38	74.00	22.62	Peak
4	5150.000	44.08	-4.61	39.47	54.00	14.53	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: ac80 Middle Channel 5290MHz band 2

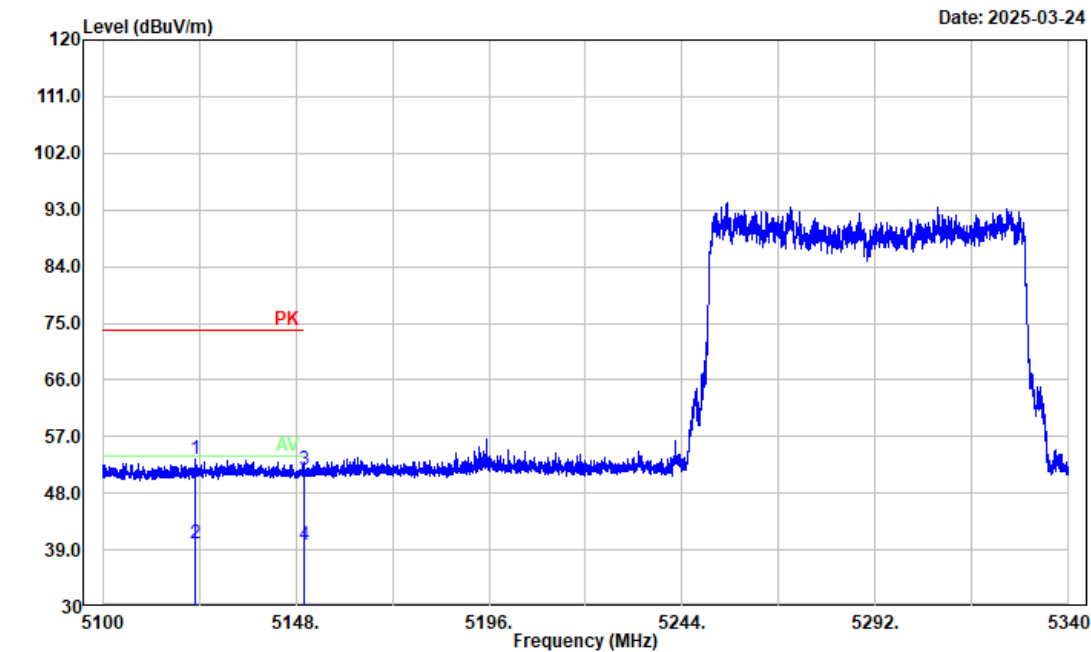


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5122.896	58.14	-4.70	53.44	74.00	20.56	Peak
2	5122.896	44.82	-4.70	40.12	54.00	13.88	Average
3	5150.000	56.22	-4.61	51.61	74.00	22.39	Peak
4	5150.000	44.43	-4.61	39.82	54.00	14.18	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: ac80 Middle Channel 5290MHz band 2

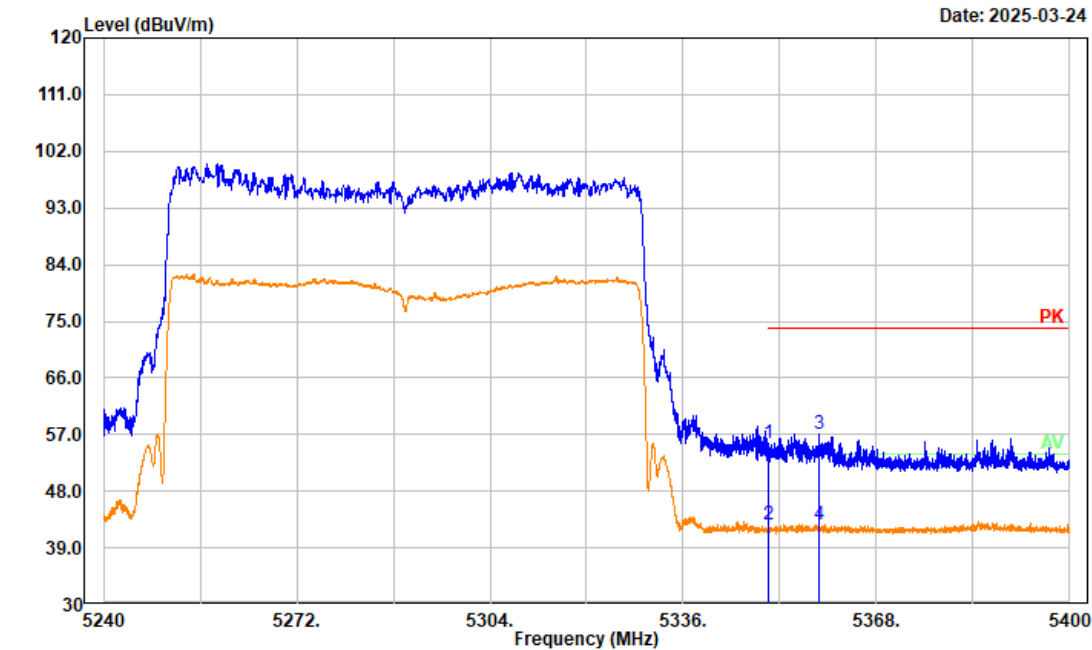


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	60.05	-4.52	55.53	74.00	18.47	Peak
2	5350.000	47.19	-4.52	42.67	54.00	11.33	Average
3	5358.560	61.55	-4.49	57.06	74.00	16.94	Peak
4	5358.560	47.16	-4.49	42.67	54.00	11.33	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ac80 Middle Channel 5290MHz band 2

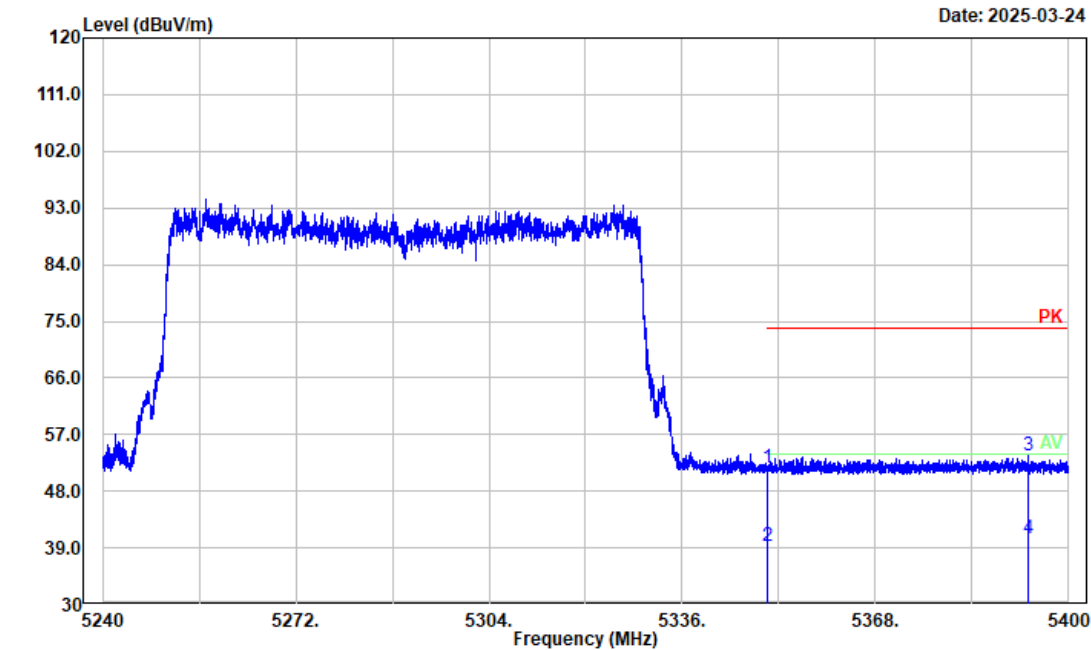


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	56.13	-4.52	51.61	74.00	22.39	Peak
2	5350.000	43.76	-4.52	39.24	54.00	14.76	Average
3	5393.216	57.94	-4.35	53.59	74.00	20.41	Peak
4	5393.216	44.75	-4.35	40.40	54.00	13.60	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: ax20 Low Channel 5260MHz band 2

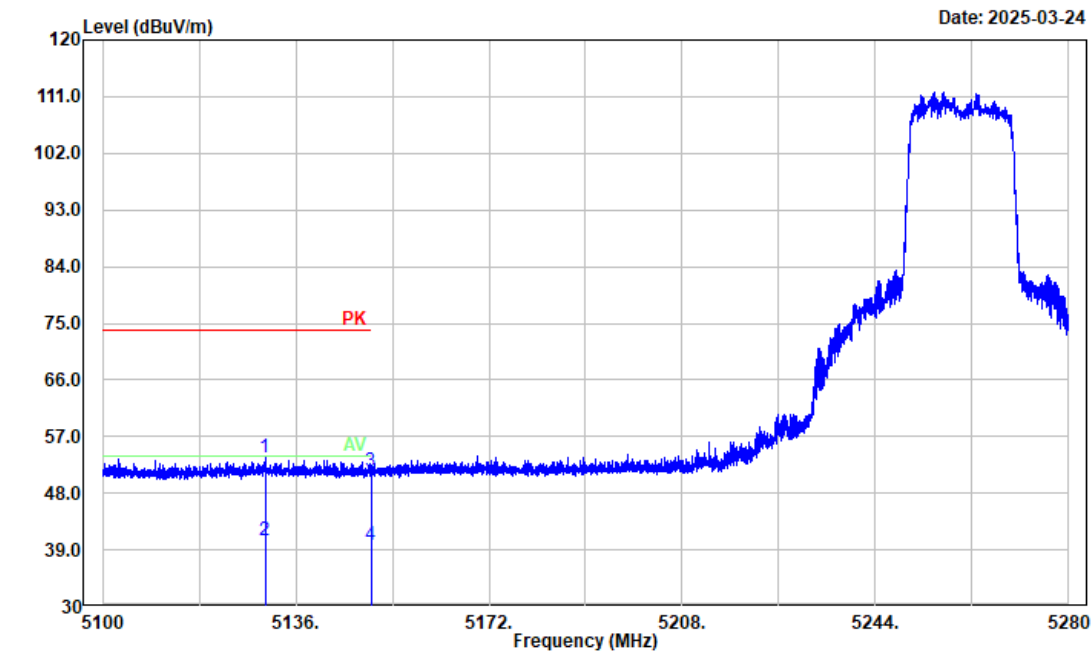


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5130.276	58.34	-4.68	53.66	74.00	20.34	Peak
2	5130.276	45.26	-4.68	40.58	54.00	13.42	Average
3	5150.000	56.03	-4.61	51.42	74.00	22.58	Peak
4	5150.000	44.32	-4.61	39.71	54.00	14.29	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax20 Low Channel 5260MHz band 2

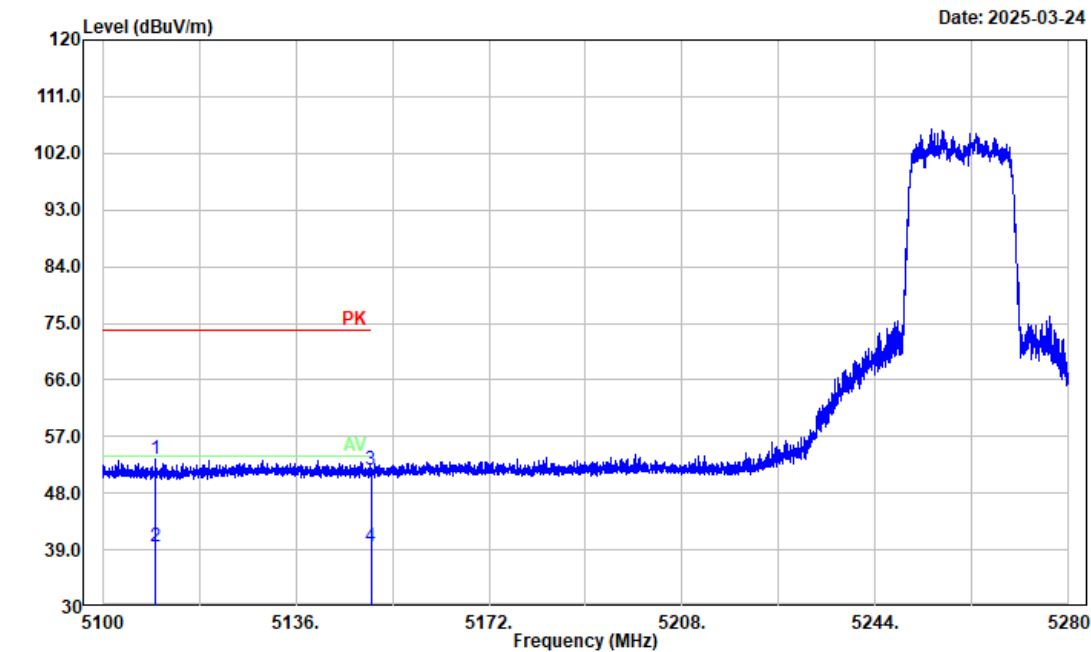


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5109.864	58.17	-4.74	53.43	74.00	20.57	Peak
2	5109.864	44.33	-4.74	39.59	54.00	14.41	Average
3	5150.000	56.43	-4.61	51.82	74.00	22.18	Peak
4	5150.000	44.10	-4.61	39.49	54.00	14.51	Average

Project No.: 2503Q19064E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: Horizontal
 Note: ax20 High Channel 5320MHz band 2

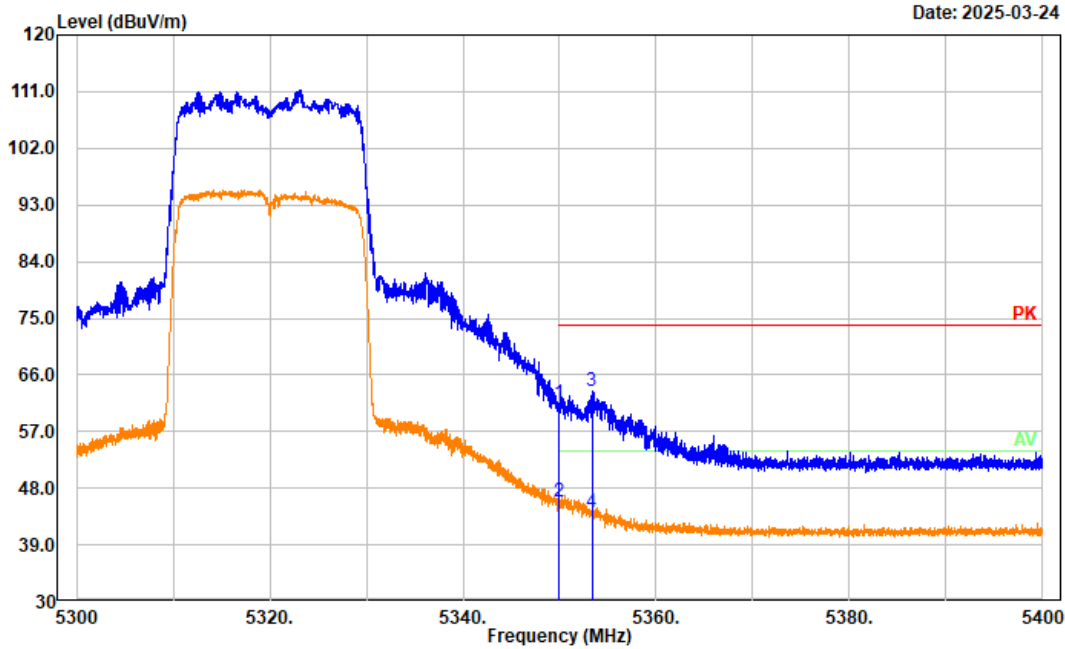


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	66.07	-4.52	61.55	74.00	12.45	Peak
2	5350.000	50.49	-4.52	45.97	54.00	8.03	Average
3	5353.340	67.93	-4.51	63.42	74.00	10.58	Peak
4	5353.340	48.62	-4.51	44.11	54.00	9.89	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: ax20 High Channel 5320MHz band 2

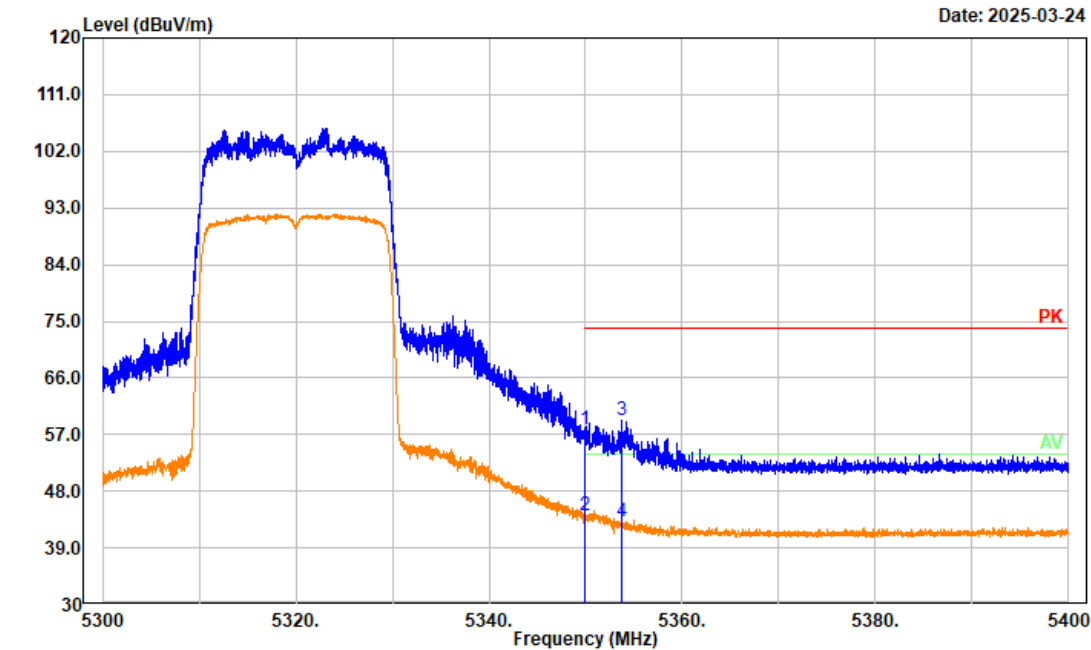


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	62.36	-4.52	57.84	74.00	16.16	Peak
2	5350.000	48.73	-4.52	44.21	54.00	9.79	Average
3	5353.720	63.86	-4.51	59.35	74.00	14.65	Peak
4	5353.720	47.63	-4.51	43.12	54.00	10.88	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: ax40 Low Channel 5270MHz band 2

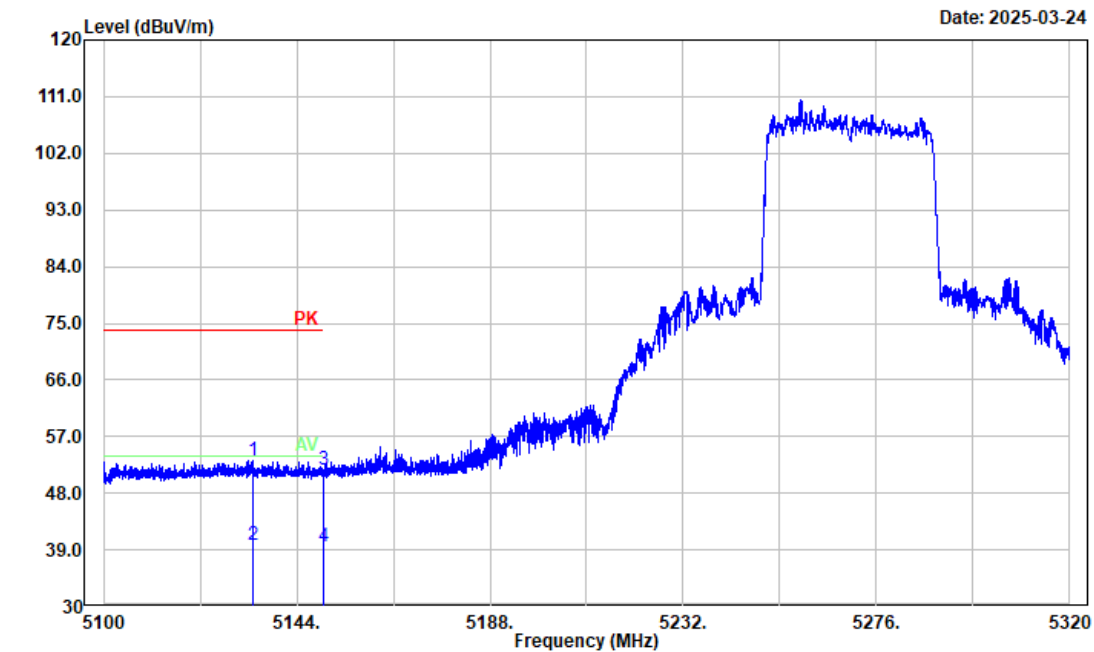


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5134.012	57.79	-4.66	53.13	74.00	20.87	Peak
2	5134.012	44.37	-4.66	39.71	54.00	14.29	Average
3	5150.000	56.33	-4.61	51.72	74.00	22.28	Peak
4	5150.000	44.03	-4.61	39.42	54.00	14.58	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax40 Low Channel 5270MHz band 2

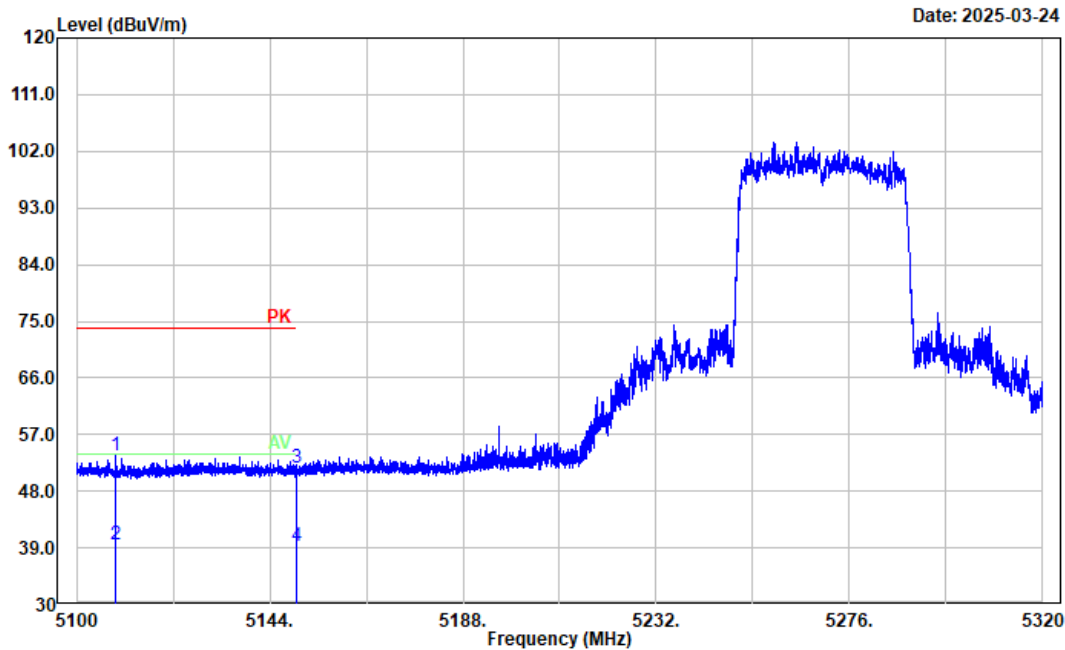


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5109.020	58.44	-4.74	53.70	74.00	20.30	Peak
2	5109.020	44.35	-4.74	39.61	54.00	14.39	Average
3	5150.000	56.21	-4.61	51.60	74.00	22.40	Peak
4	5150.000	43.96	-4.61	39.35	54.00	14.65	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: ax40 High Channel 5310MHz band 2

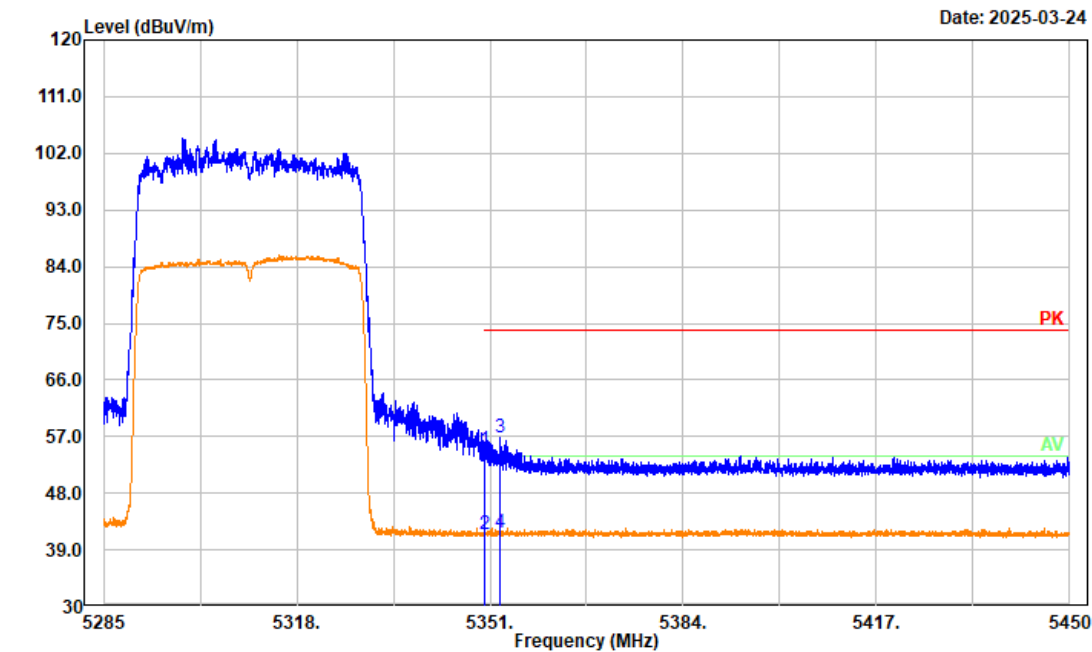


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	59.41	-4.52	54.89	74.00	19.11	Peak
2	5350.000	46.08	-4.52	41.56	54.00	12.44	Average
3	5352.815	61.25	-4.51	56.74	74.00	17.26	Peak
4	5352.815	46.25	-4.51	41.74	54.00	12.26	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: ax40 High Channel 5310MHz band 2

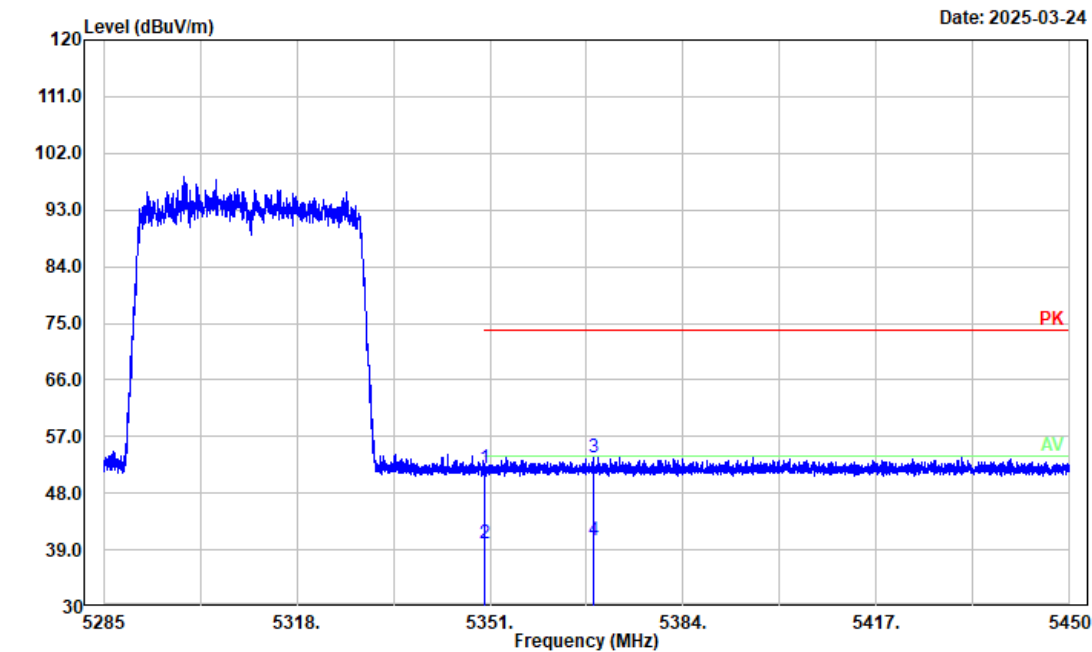


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	56.55	-4.52	52.03	74.00	21.97	Peak
2	5350.000	44.58	-4.52	40.06	54.00	13.94	Average
3	5368.589	58.20	-4.44	53.76	74.00	20.24	Peak
4	5368.589	44.99	-4.44	40.55	54.00	13.45	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: ax80 Middle Channel 5290MHz band 2

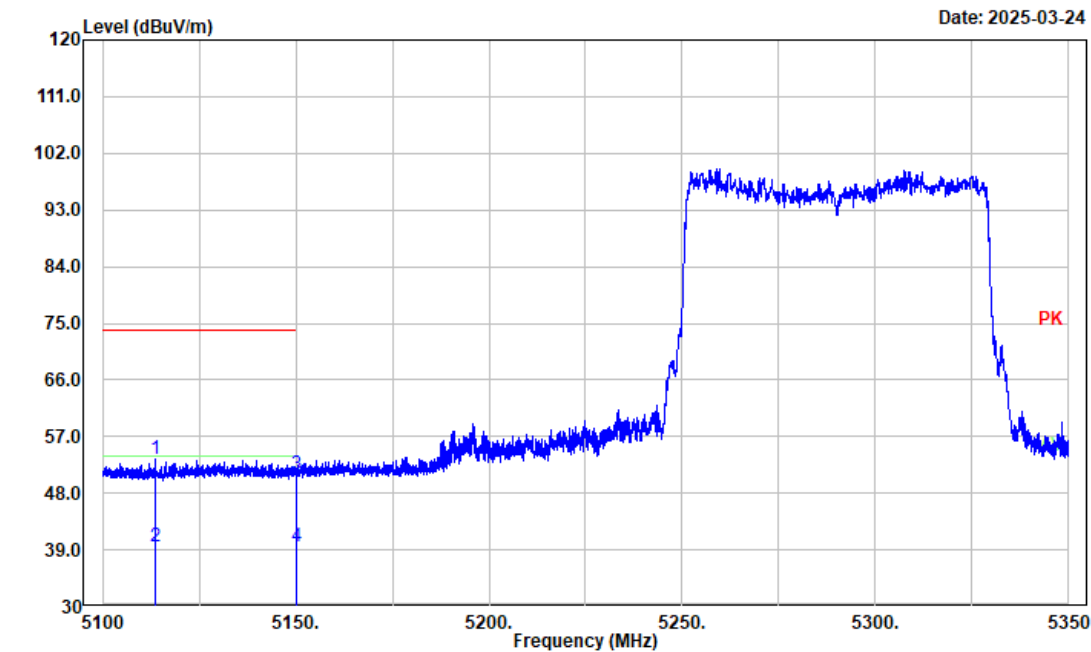


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5113.700	58.12	-4.74	53.38	74.00	20.62	Peak
2	5113.700	44.36	-4.74	39.62	54.00	14.38	Average
3	5150.000	55.62	-4.61	51.01	74.00	22.99	Peak
4	5150.000	44.06	-4.61	39.45	54.00	14.55	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax80 Middle Channel 5290MHz band 2

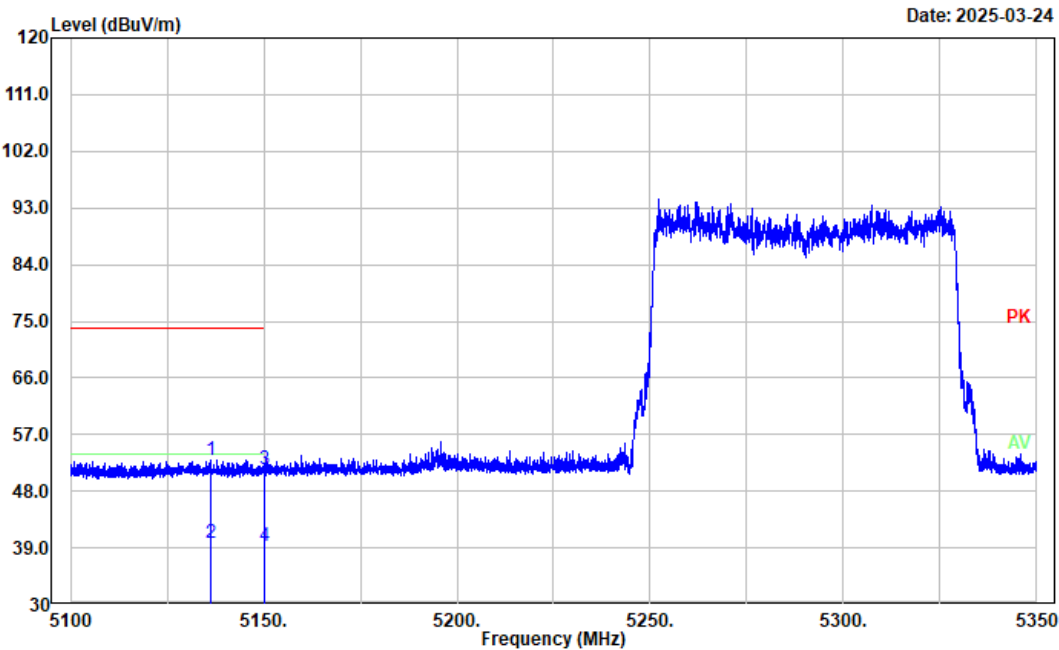


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5136.150	57.70	-4.66	53.04	74.00	20.96	Peak
2	5136.150	44.50	-4.66	39.84	54.00	14.16	Average
3	5150.000	56.08	-4.61	51.47	74.00	22.53	Peak
4	5150.000	43.89	-4.61	39.28	54.00	14.72	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: ax80 Middle Channel 5290MHz band 2

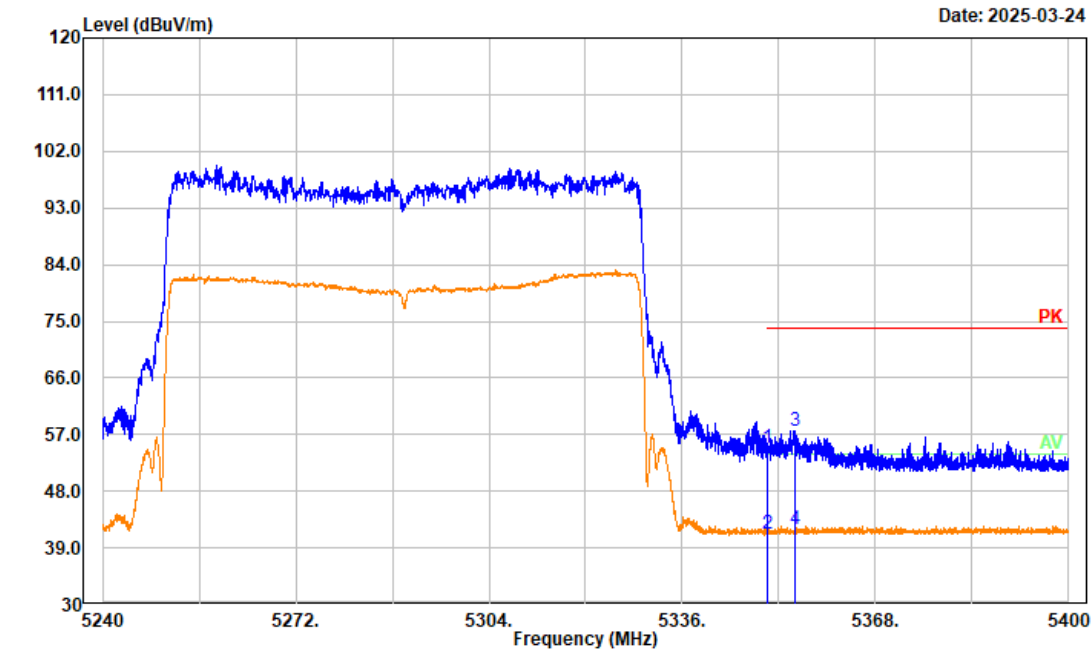


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	59.43	-4.52	54.91	74.00	19.09	Peak
2	5350.000	45.69	-4.52	41.17	54.00	12.83	Average
3	5354.592	62.10	-4.50	57.60	74.00	16.40	Peak
4	5354.592	46.36	-4.50	41.86	54.00	12.14	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax80 Middle Channel 5290MHz band 2

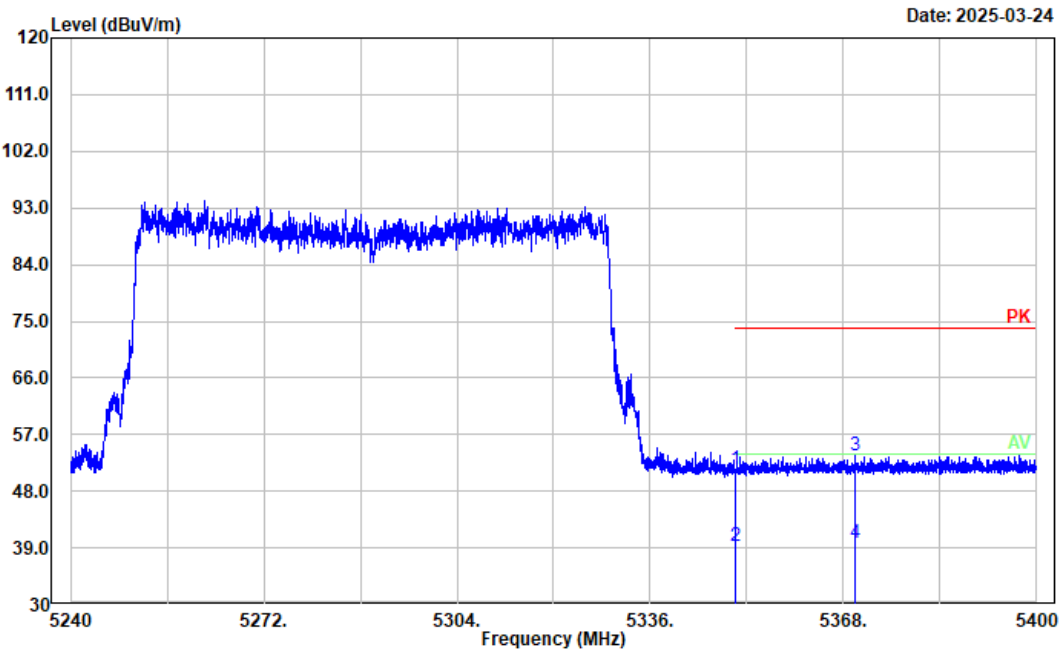


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	55.95	-4.52	51.43	74.00	22.57	Peak
2	5350.000	43.89	-4.52	39.37	54.00	14.63	Average
3	5369.888	58.10	-4.45	53.65	74.00	20.35	Peak
4	5369.888	44.11	-4.45	39.66	54.00	14.34	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: a Low Channel 5500MHz band 3 Chain 0

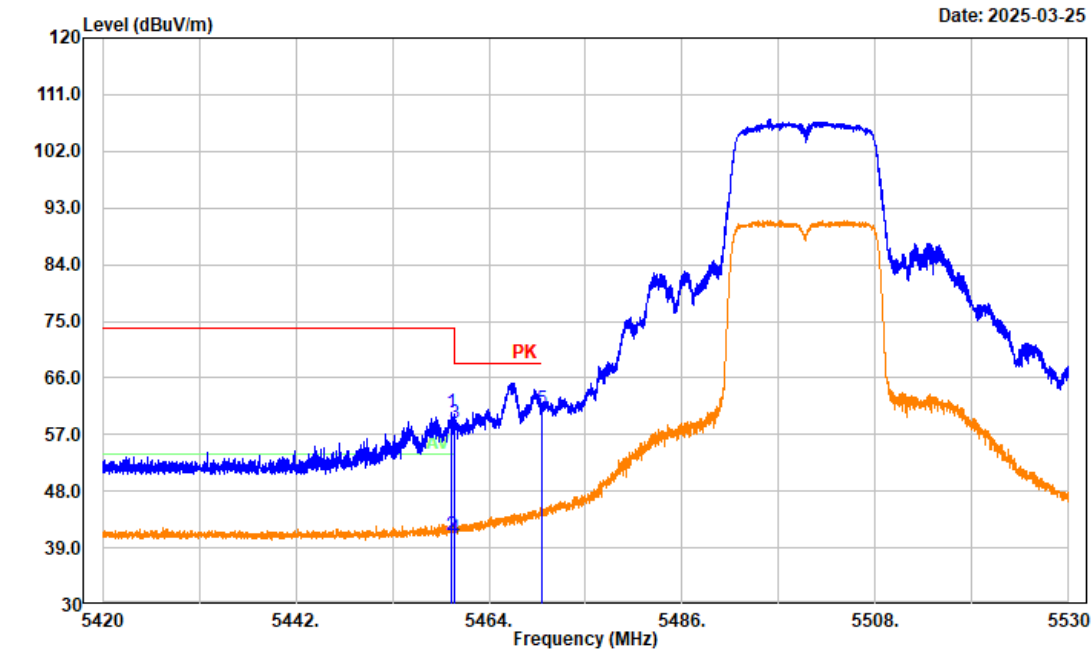


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5459.644	64.97	-4.38	60.59	74.00	13.41	Peak
2	5459.644	45.40	-4.38	41.02	54.00	12.98	Average
3	5460.000	63.19	-4.37	58.82	74.00	15.18	Peak
4	5460.000	44.89	-4.37	40.52	54.00	13.48	Average
5	5470.000	65.30	-4.29	61.01	68.20	7.19	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: a Low Channel 5500MHz band 3 Chain 0

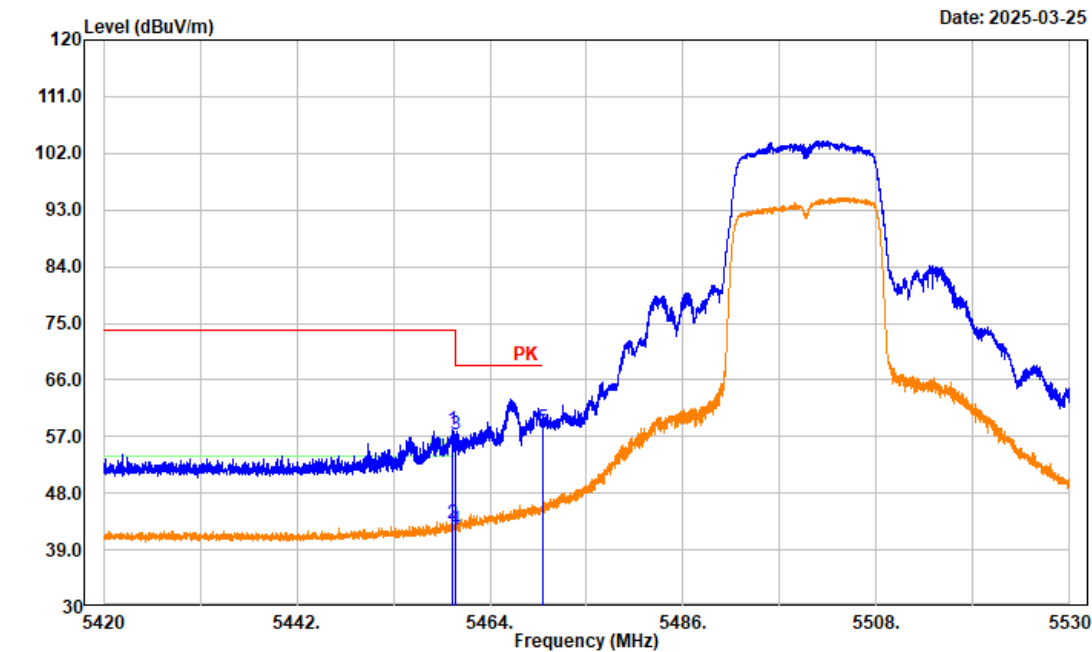


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5459.754	62.54	-4.37	58.17	74.00	15.83	Peak
2	5459.754	47.48	-4.37	43.11	54.00	10.89	Average
3	5460.000	61.75	-4.37	57.38	74.00	16.62	Peak
4	5460.000	46.63	-4.37	42.26	54.00	11.74	Average
5	5470.000	62.61	-4.29	58.32	68.20	9.88	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: a High Channel 5700MHz band 3 Chain 0

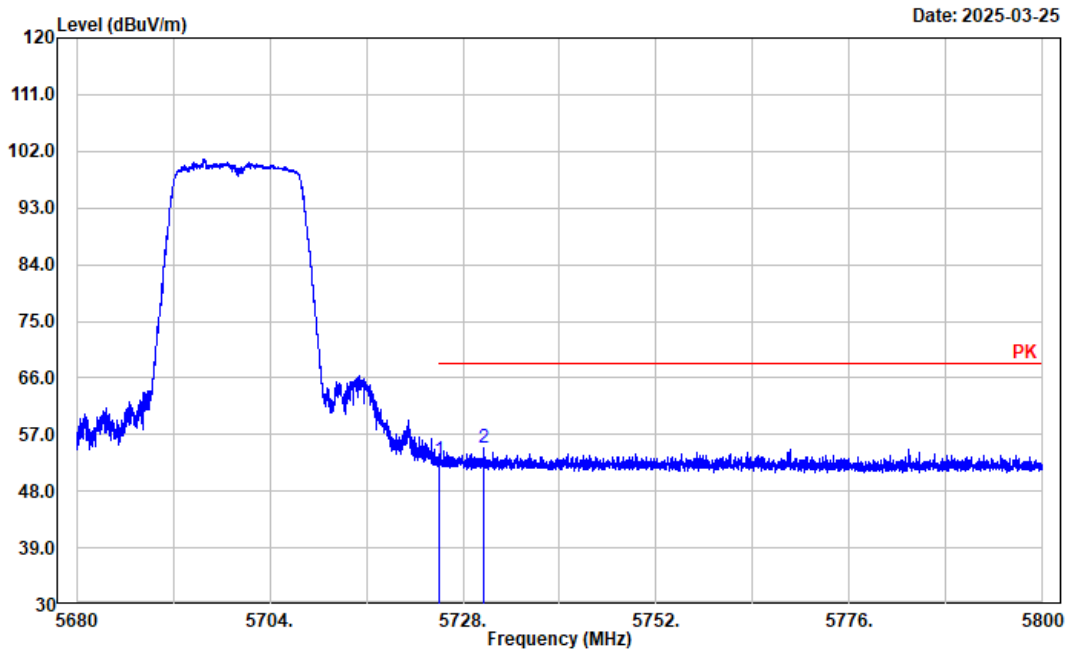


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	57.02	-4.06	52.96	68.20	15.24	Peak
2	5730.616	58.92	-4.04	54.88	68.20	13.32	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: a High Channel 5700MHz band 3 Chain 0

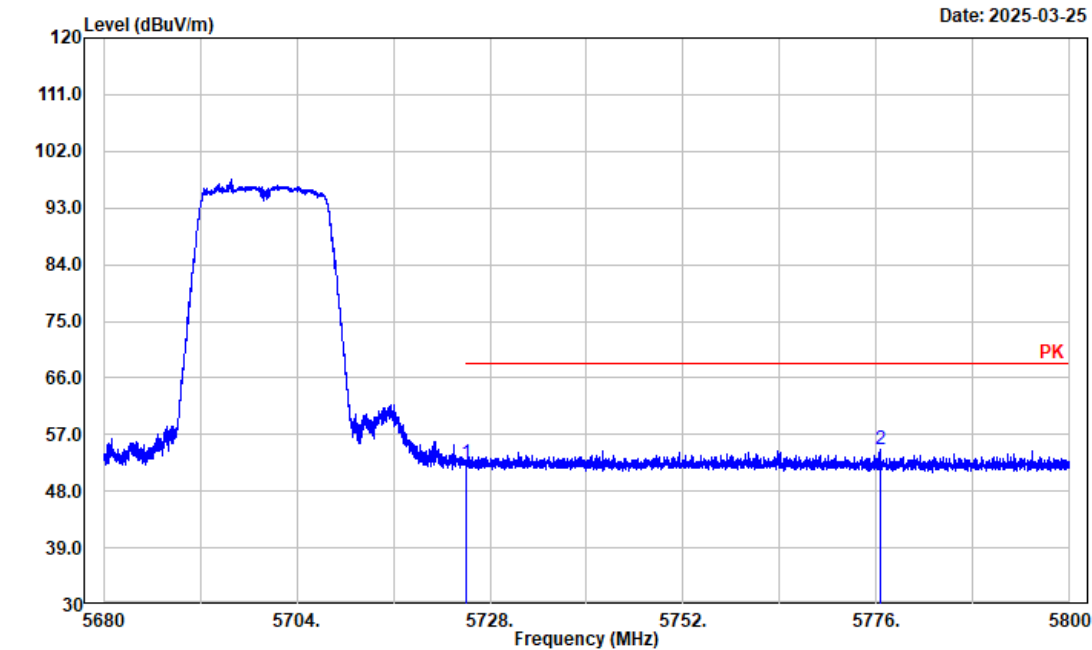


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	56.44	-4.06	52.38	68.20	15.82	Peak
2	5776.408	58.90	-4.22	54.68	68.20	13.52	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: a Low Channel 5500MHz band 3 Chain 1

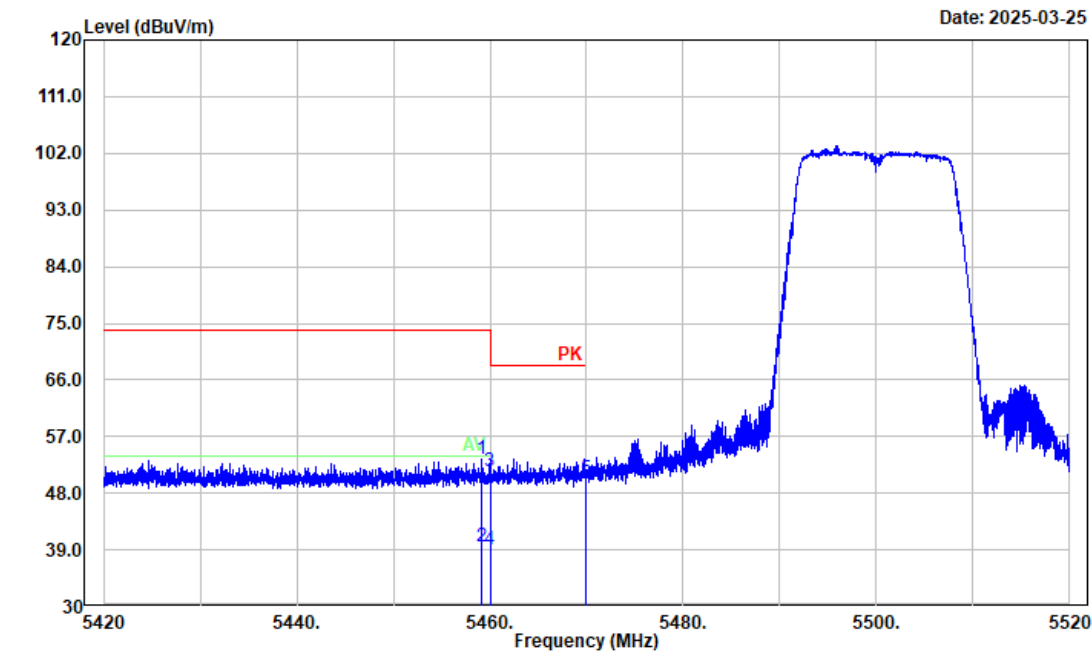


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5459.200	57.84	-4.38	53.46	74.00	20.54	Peak
2	5459.200	43.93	-4.38	39.55	54.00	14.45	Average
3	5460.000	55.95	-4.37	51.58	74.00	22.42	Peak
4	5460.000	43.49	-4.37	39.12	54.00	14.88	Average
5	5470.000	54.47	-4.29	50.18	68.20	18.02	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: a Low Channel 5500MHz band 3 Chain 1

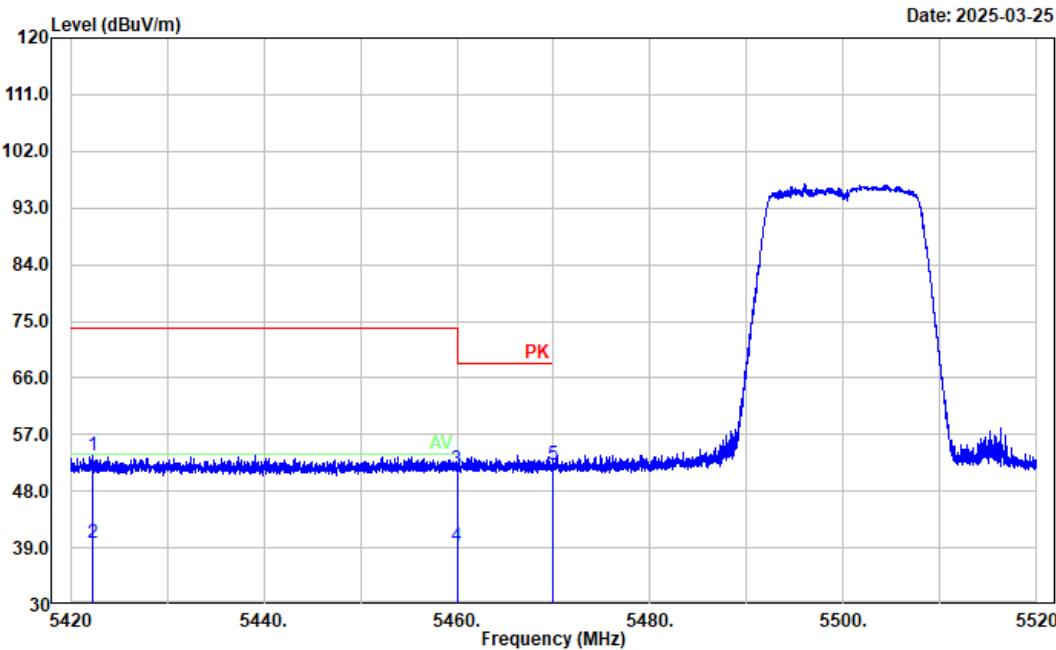


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5422.320	58.12	-4.39	53.73	74.00	20.27	Peak
2	5422.320	44.26	-4.39	39.87	54.00	14.13	Average
3	5460.000	55.94	-4.37	51.57	74.00	22.43	Peak
4	5460.000	43.73	-4.37	39.36	54.00	14.64	Average
5	5470.000	56.53	-4.29	52.24	68.20	15.96	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: a High Channel 5700MHz band 3 Chain 1

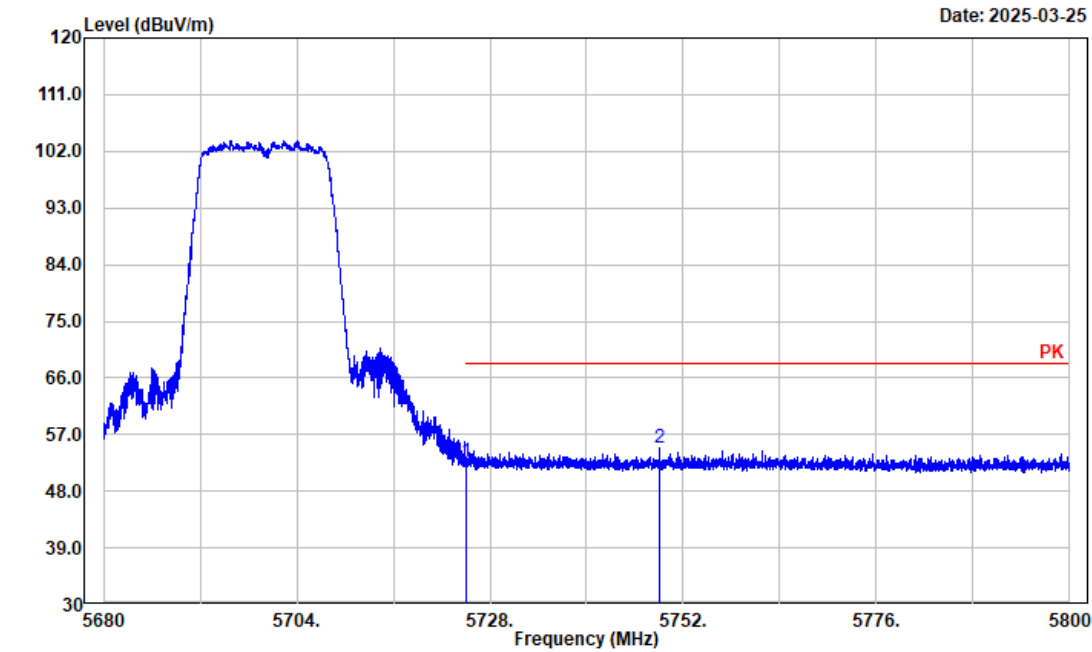


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	56.63	-4.06	52.57	68.20	15.63	Peak
2	5749.024	58.73	-3.97	54.76	68.20	13.44	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: a High Channel 5700MHz band 3 Chain 1

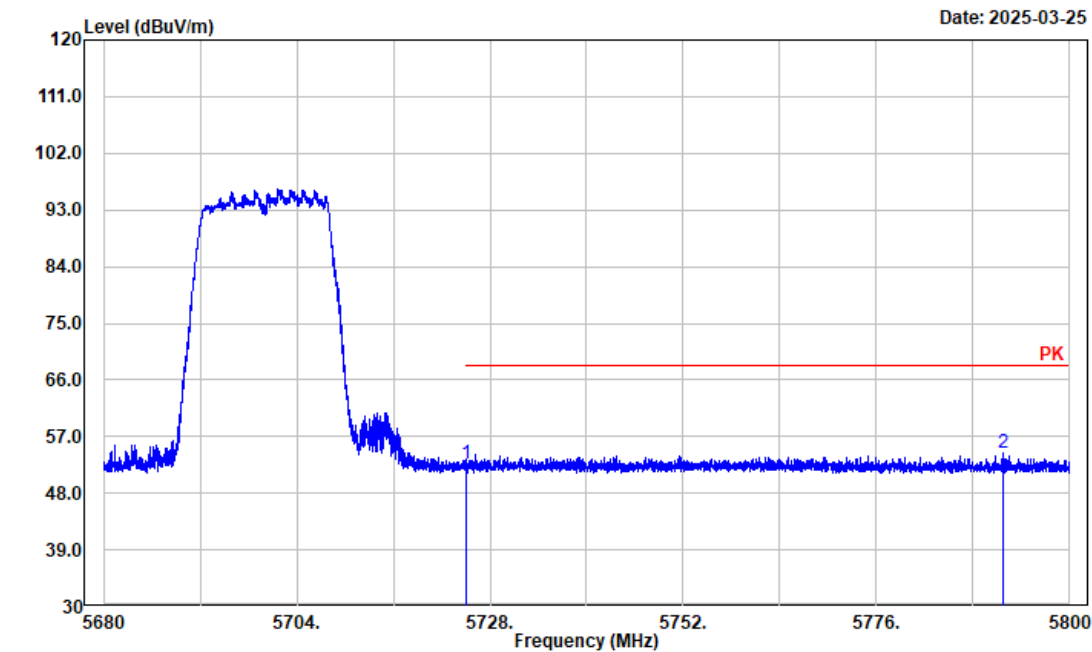


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	56.84	-4.06	52.78	68.20	15.42	Peak
2	5791.648	58.70	-4.36	54.34	68.20	13.86	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: n20 Low Channel 5500MHz band 3

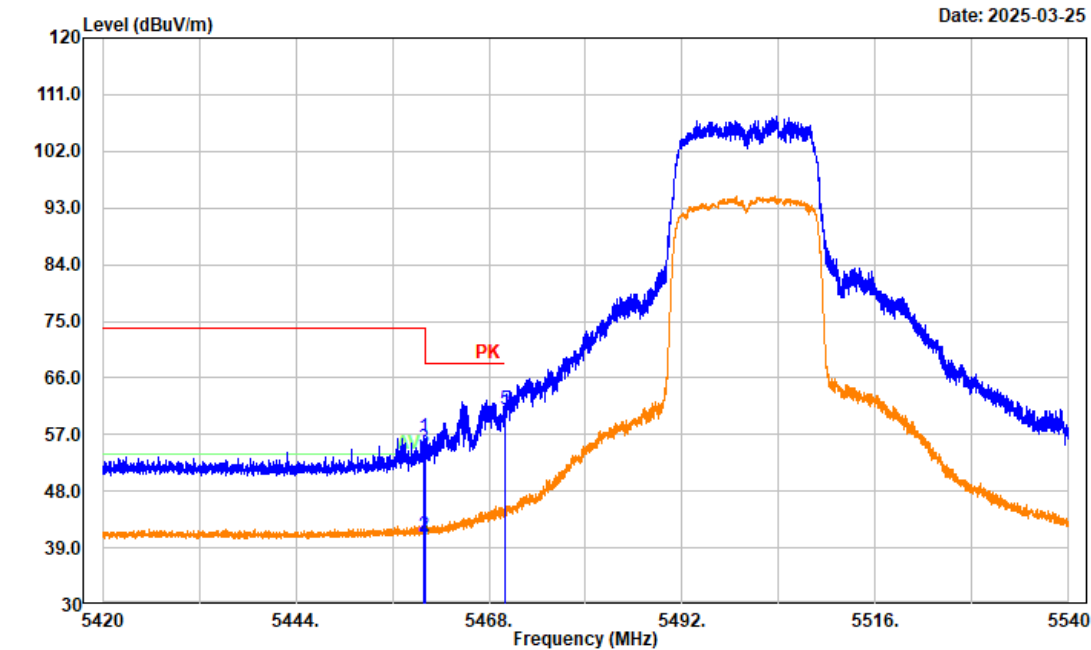


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5459.984	61.03	-4.37	56.66	74.00	17.34	Peak
2	5459.984	45.26	-4.37	40.89	54.00	13.11	Average
3	5460.000	59.26	-4.37	54.89	74.00	19.11	Peak
4	5460.000	44.60	-4.37	40.23	54.00	13.77	Average
5	5470.000	65.25	-4.29	60.96	68.20	7.24	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: n20 Low Channel 5500MHz band 3

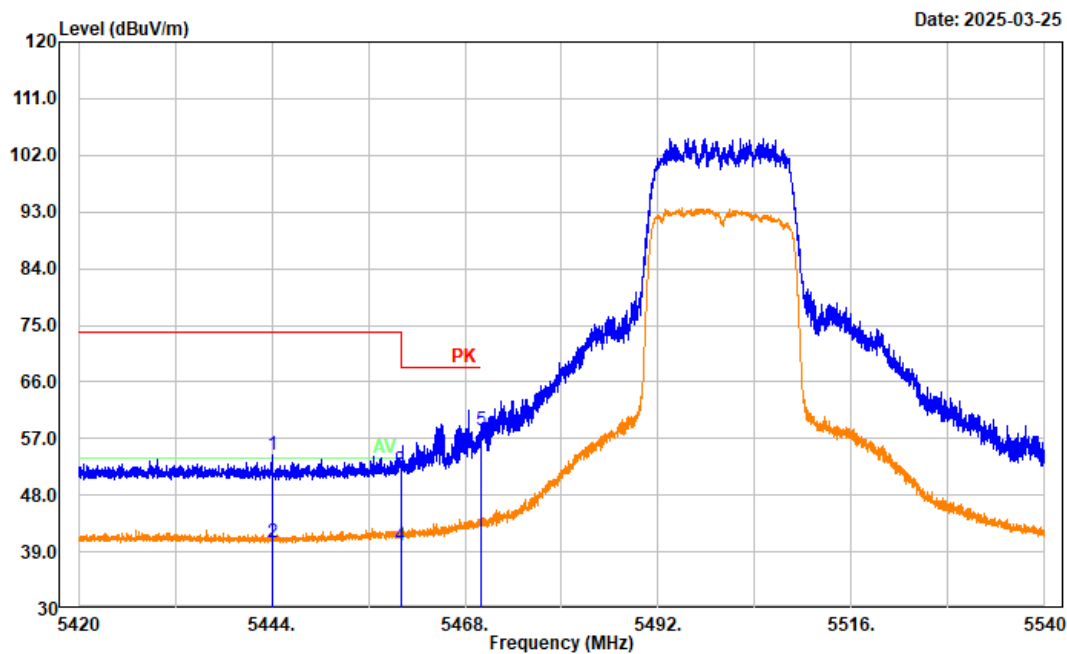


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5444.000	58.92	-4.44	54.48	74.00	19.52	Peak
2	5444.000	45.00	-4.44	40.56	54.00	13.44	Average
3	5460.000	56.21	-4.37	51.84	74.00	22.16	Peak
4	5460.000	44.47	-4.37	40.10	54.00	13.90	Average
5	5470.000	62.62	-4.29	58.33	68.20	9.87	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: n20 High Channel 5700MHz band 3

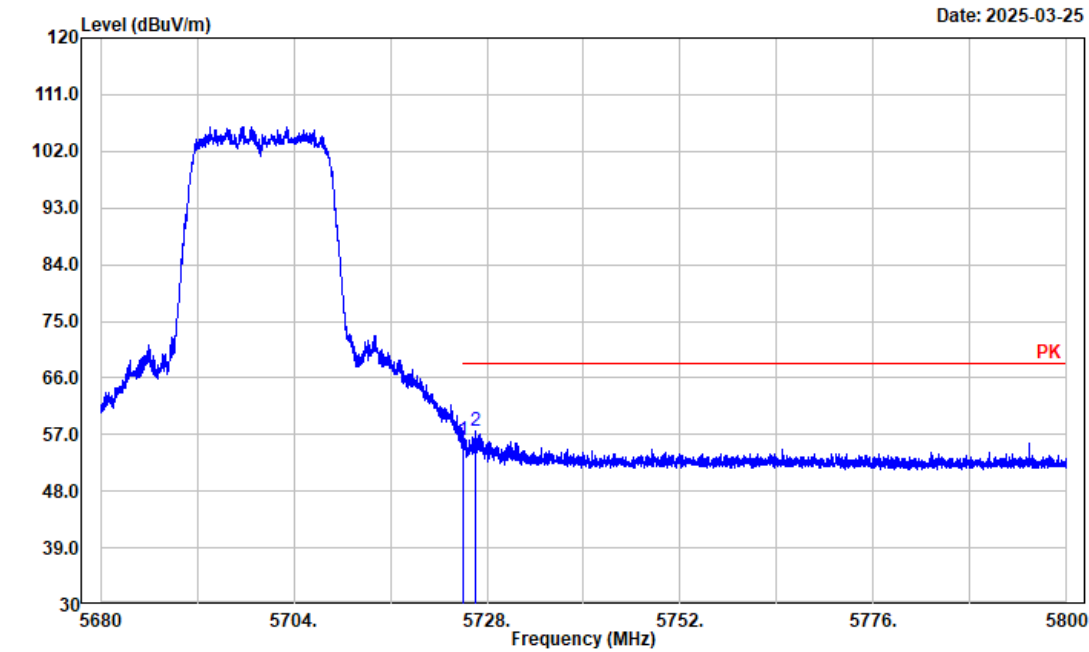


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	60.10	-4.06	56.04	68.20	12.16	Peak
2	5726.536	61.52	-4.05	57.47	68.20	10.73	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: n20 High Channel 5700MHz band 3

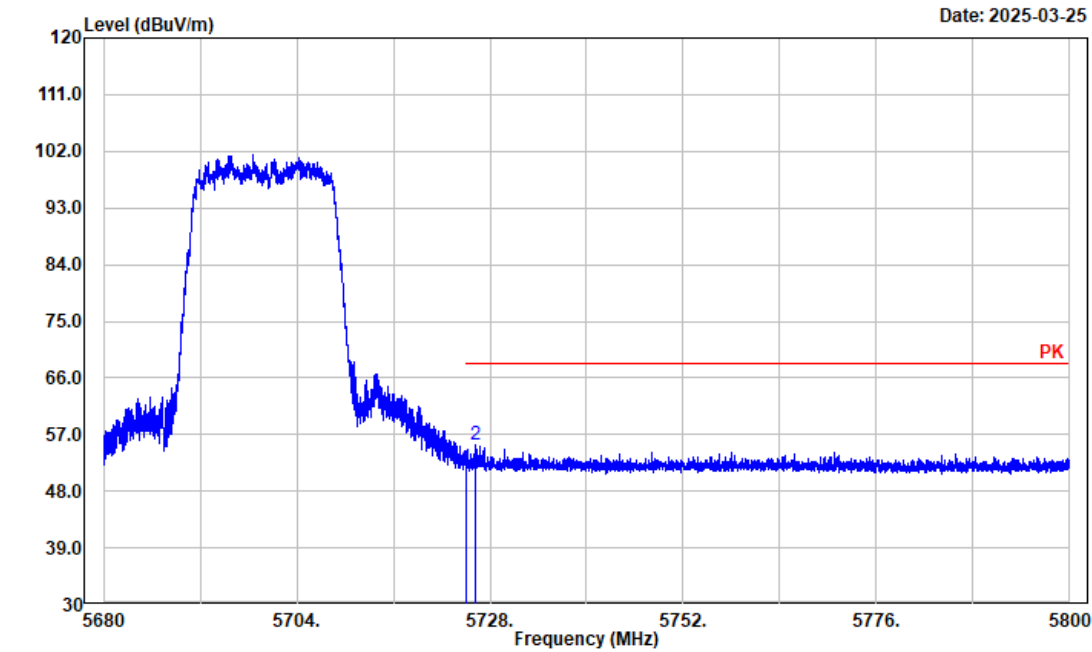


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	55.86	-4.06	51.80	68.20	16.40	Peak
2	5726.104	59.34	-4.05	55.29	68.20	12.91	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: n40 Low Channel 5510Hz band 3

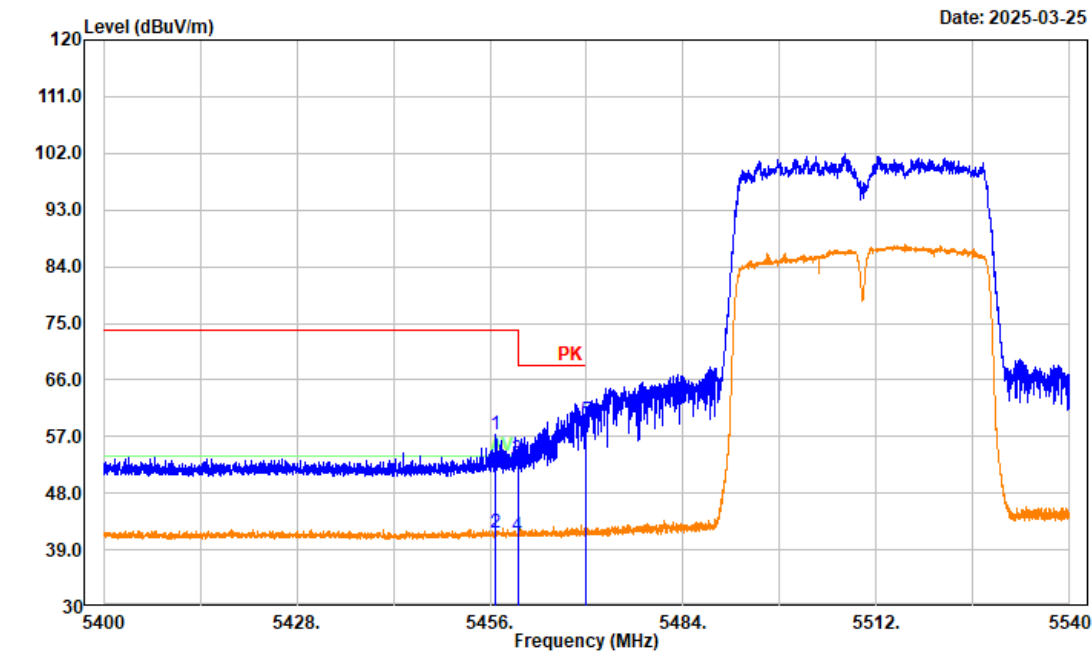


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5456.840	61.81	-4.41	57.40	74.00	16.60	Peak
2	5456.840	46.00	-4.41	41.59	54.00	12.41	Average
3	5460.000	57.81	-4.37	53.44	74.00	20.56	Peak
4	5460.000	45.58	-4.37	41.21	54.00	12.79	Average
5	5470.000	63.73	-4.29	59.44	68.20	8.76	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: n40 Low Channel 5510Hz band 3

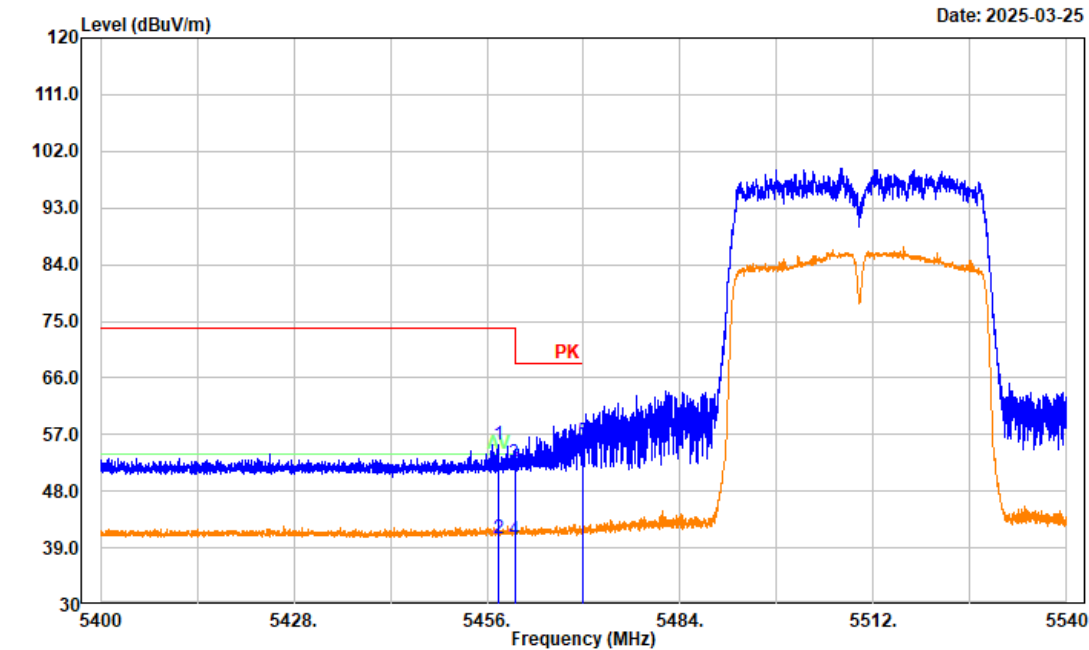


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5457.624	59.81	-4.39	55.42	74.00	18.58	Peak
2	5457.624	44.98	-4.39	40.59	54.00	13.41	Average
3	5460.000	56.69	-4.37	52.32	74.00	21.68	Peak
4	5460.000	44.55	-4.37	40.18	54.00	13.82	Average
5	5470.000	60.23	-4.29	55.94	68.20	12.26	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: n40 High Channel 5670Hz band 3

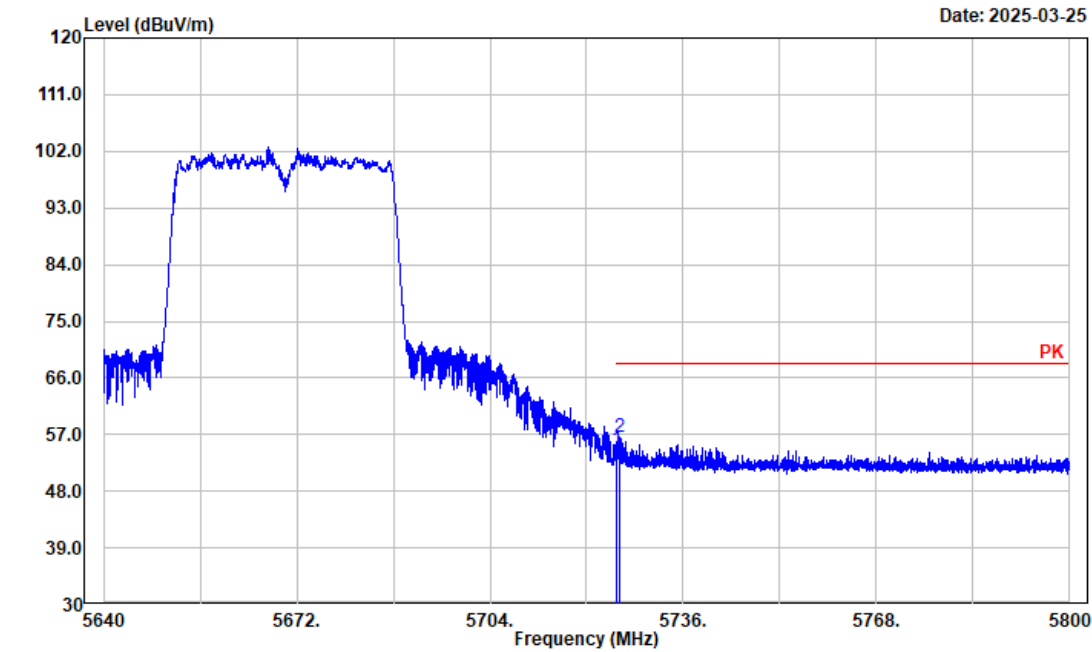


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	58.74	-4.06	54.68	68.20	13.52	Peak
2	5725.472	60.70	-4.05	56.65	68.20	11.55	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: n40 High Channel 5670Hz band 3

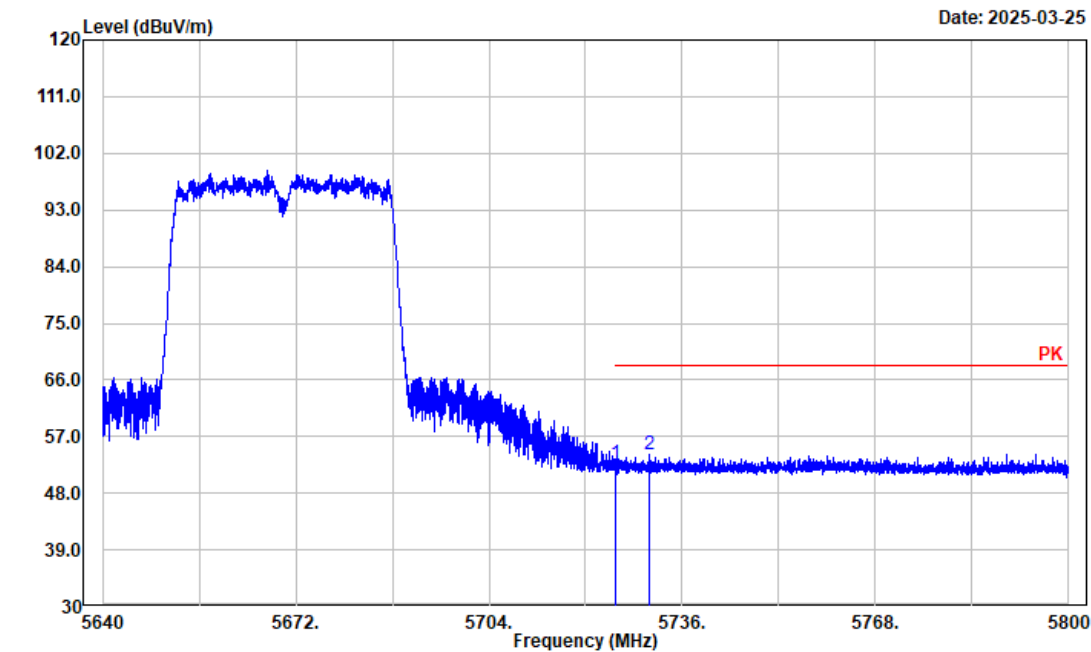


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	56.75	-4.06	52.69	68.20	15.51	Peak
2	5730.464	58.21	-4.04	54.17	68.20	14.03	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: ac80 Low Channel 5530Hz band 3

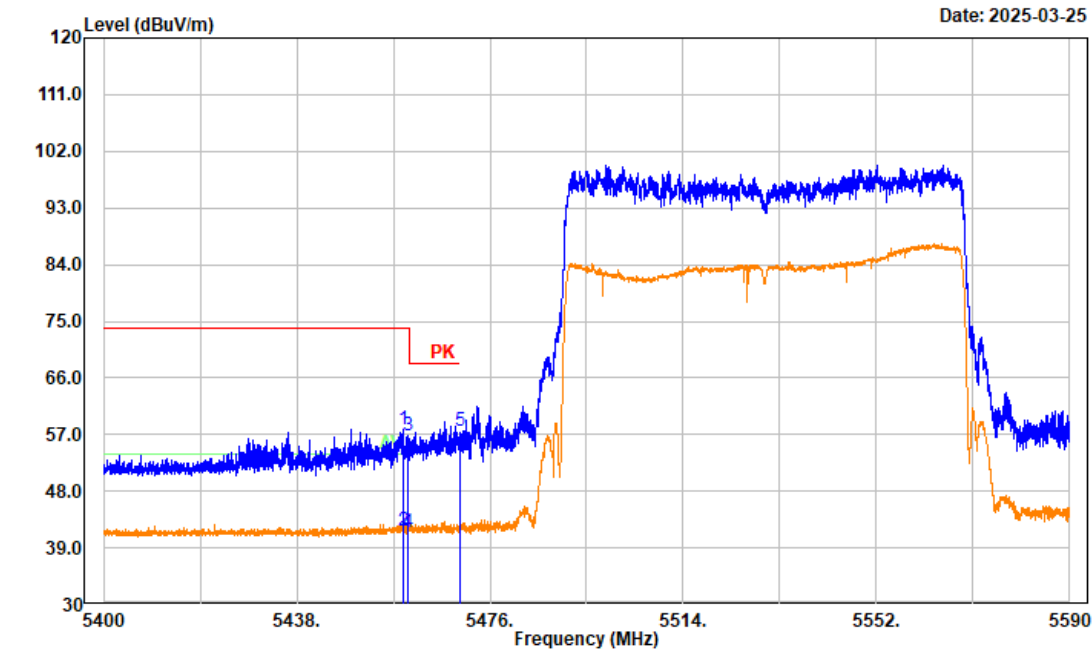


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5458.938	62.19	-4.39	57.80	74.00	16.20	Peak
2	5458.938	46.08	-4.39	41.69	54.00	12.31	Average
3	5460.000	61.12	-4.37	56.75	74.00	17.25	Peak
4	5460.000	45.89	-4.37	41.52	54.00	12.48	Average
5	5470.000	61.73	-4.29	57.44	68.20	10.76	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: ac80 Low Channel 5530Hz band 3

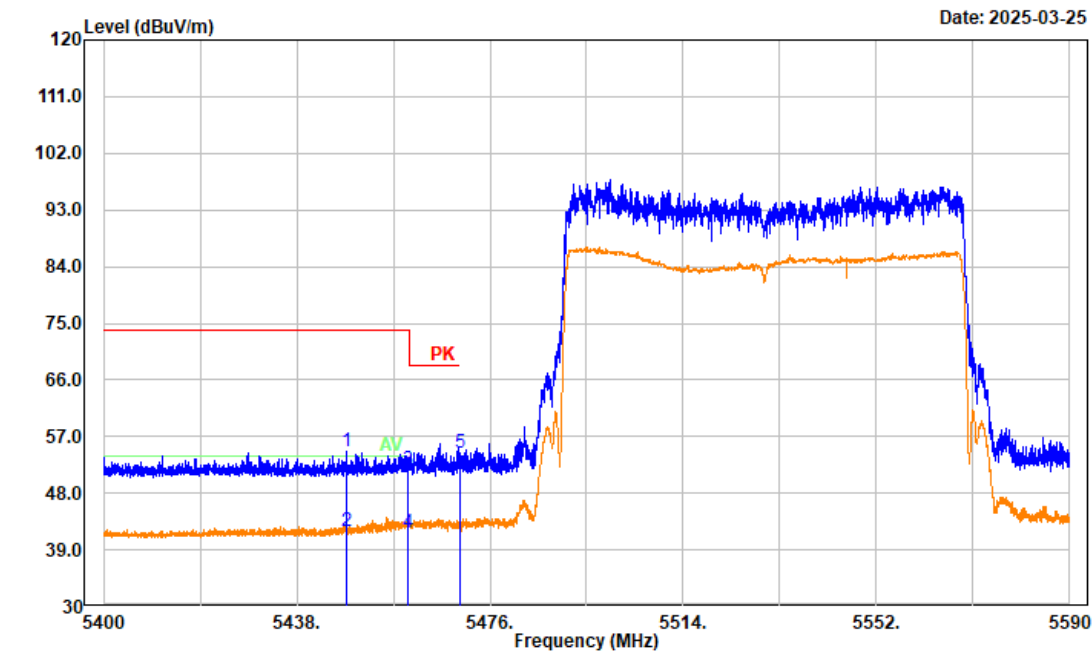


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5447.766	59.10	-4.45	54.65	74.00	19.35	Peak
2	5447.766	46.41	-4.45	41.96	54.00	12.04	Average
3	5460.000	56.02	-4.37	51.65	74.00	22.35	Peak
4	5460.000	45.96	-4.37	41.59	54.00	12.41	Average
5	5470.000	58.65	-4.29	54.36	68.20	13.84	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: ac80 High Channel 5610Hz band 3

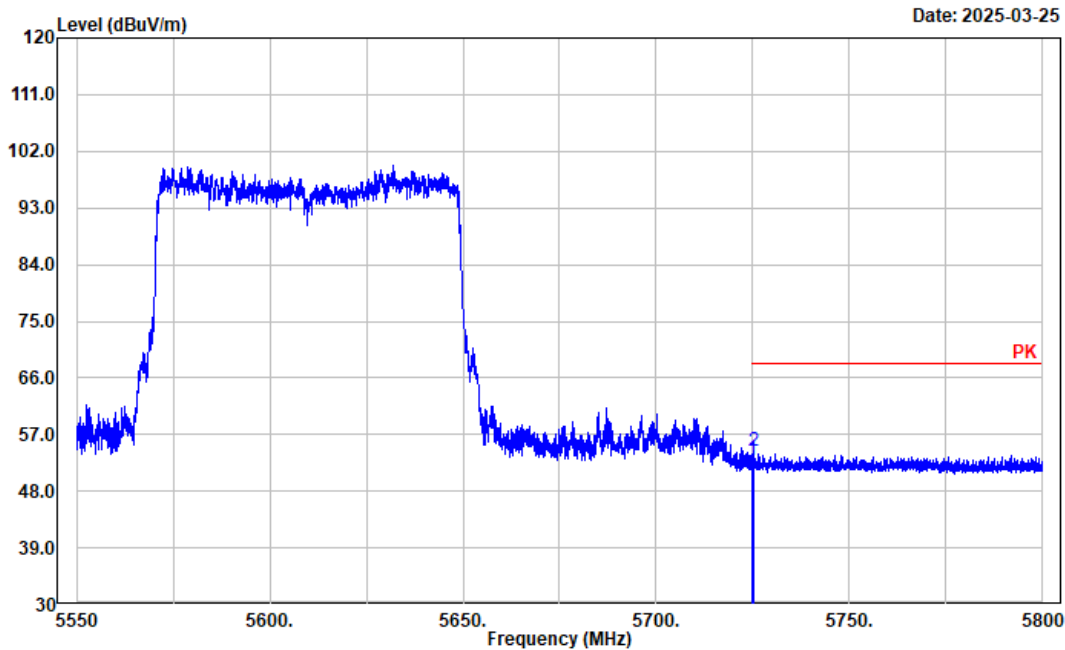


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	56.96	-4.06	52.90	68.20	15.30	Peak
2	5725.200	58.44	-4.05	54.39	68.20	13.81	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ac80 High Channel 5610Hz band 3

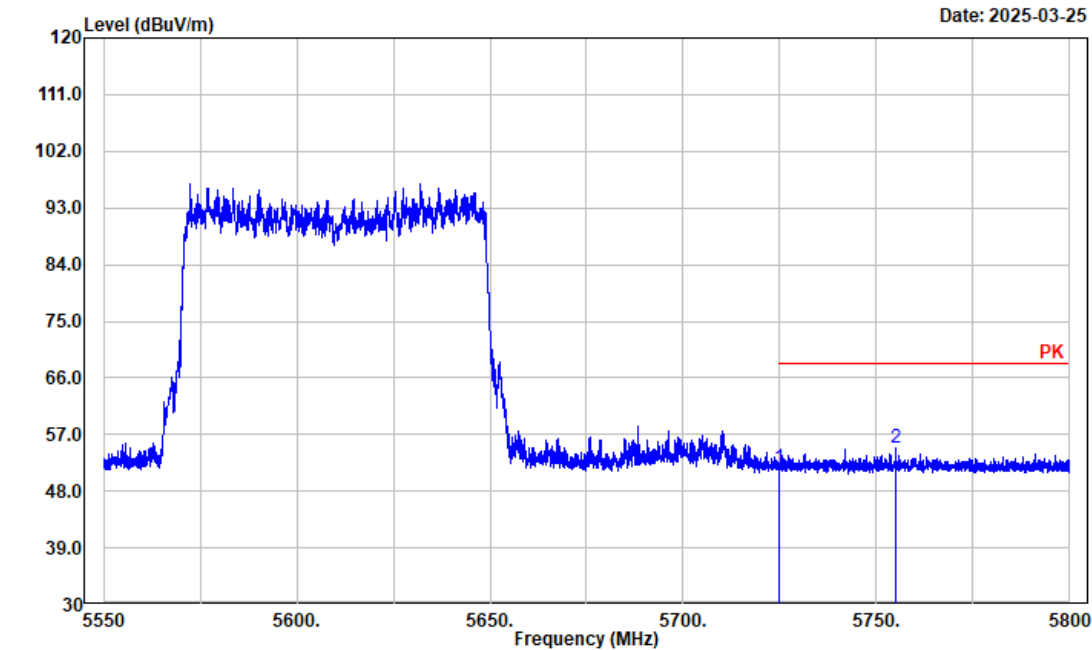


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	55.72	-4.06	51.66	68.20	16.54	Peak
2	5754.950	58.80	-4.01	54.79	68.20	13.41	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: ax20 Low Channel 5500Hz band 3

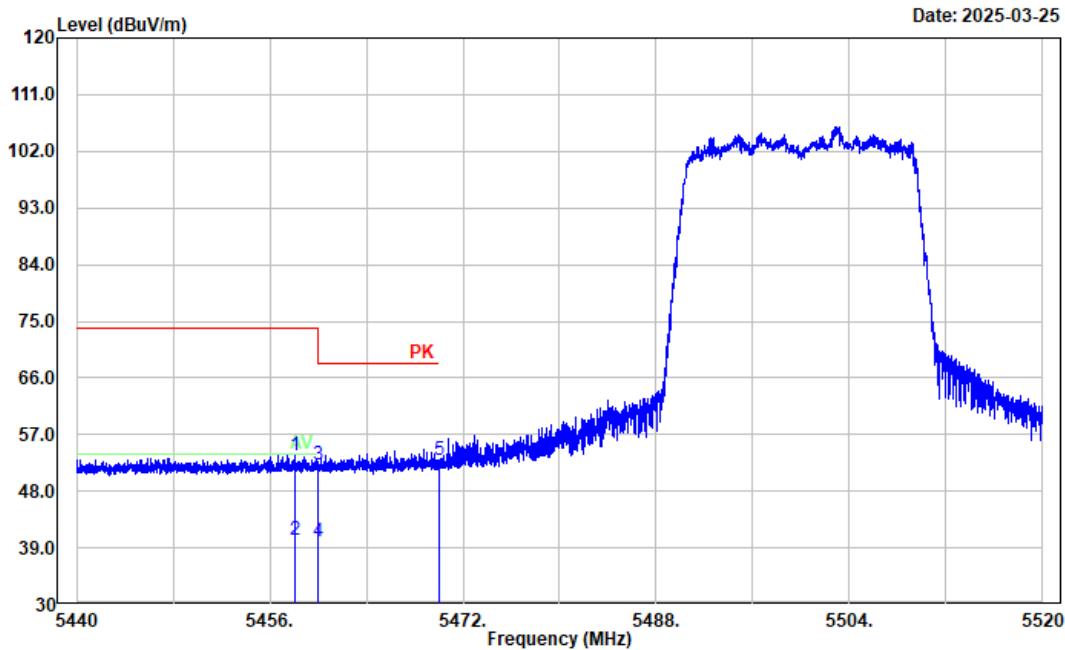


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5458.032	57.99	-4.39	53.60	74.00	20.40	Peak
2	5458.032	44.61	-4.39	40.22	54.00	13.78	Average
3	5460.000	56.47	-4.37	52.10	74.00	21.90	Peak
4	5460.000	44.49	-4.37	40.12	54.00	13.88	Average
5	5470.000	57.30	-4.29	53.01	68.20	15.19	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax20 Low Channel 5500Hz band 3

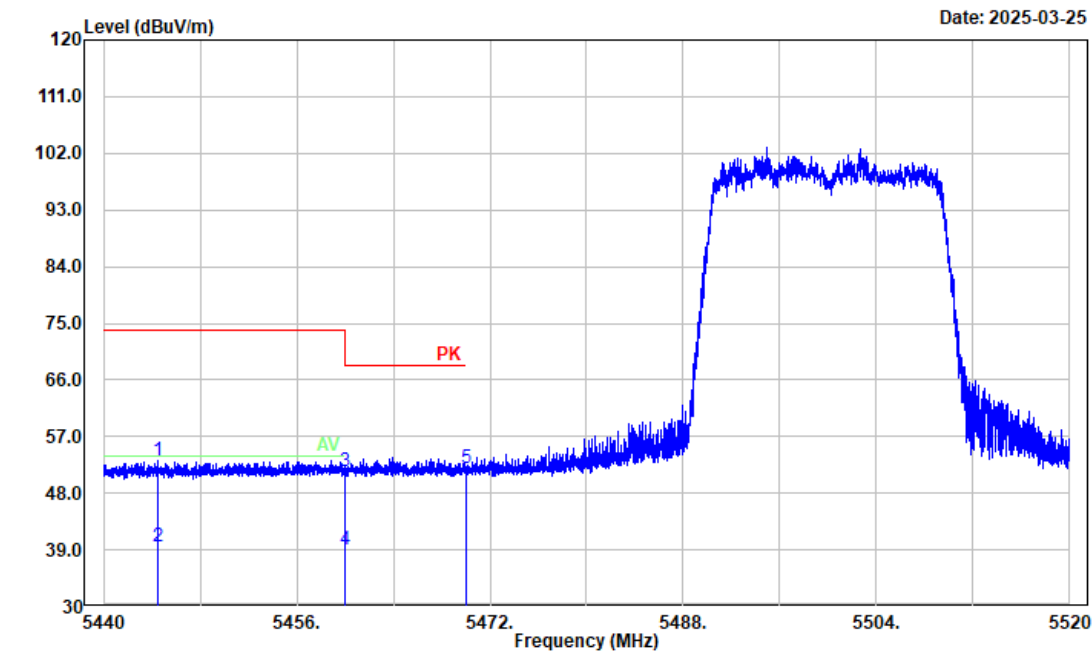


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5444.464	57.68	-4.44	53.24	74.00	20.76	Peak
2	5444.464	43.85	-4.44	39.41	54.00	14.59	Average
3	5460.000	55.95	-4.37	51.58	74.00	22.42	Peak
4	5460.000	43.49	-4.37	39.12	54.00	14.88	Average
5	5470.000	56.14	-4.29	51.85	68.20	16.35	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: ax20 High Channel 5700Hz band 3

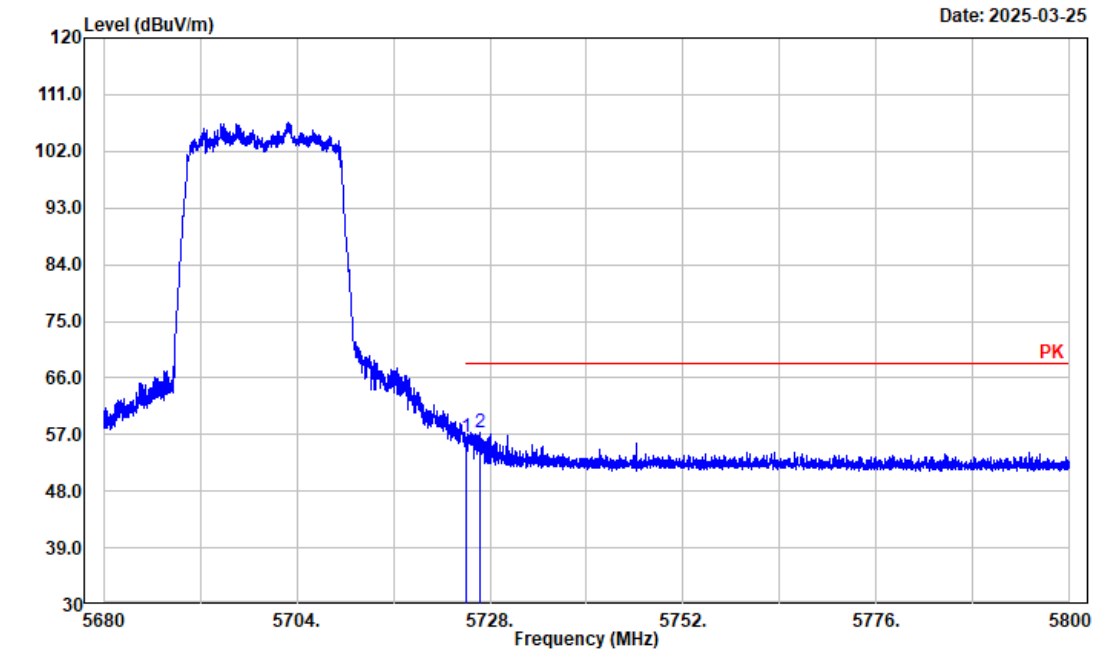


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	60.72	-4.06	56.66	68.20	11.54	Peak
2	5726.848	61.35	-4.05	57.30	68.20	10.90	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax20 High Channel 5700Hz band 3

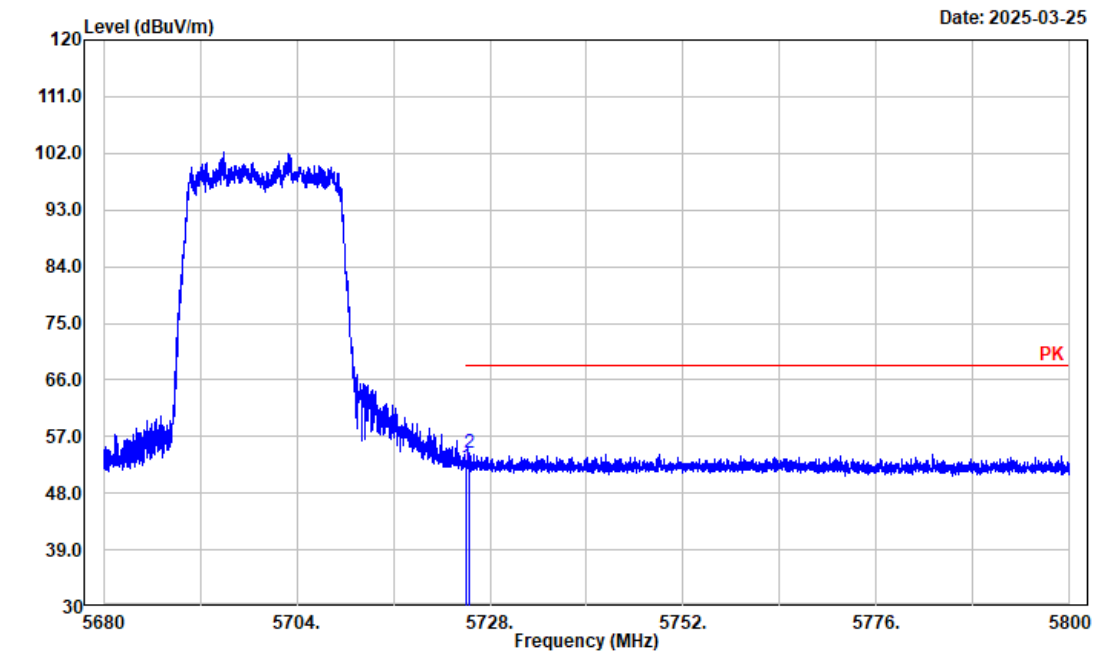


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	56.31	-4.06	52.25	68.20	15.95	Peak
2	5725.480	58.33	-4.05	54.28	68.20	13.92	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: ax40 Low Channel 5510Hz band 3

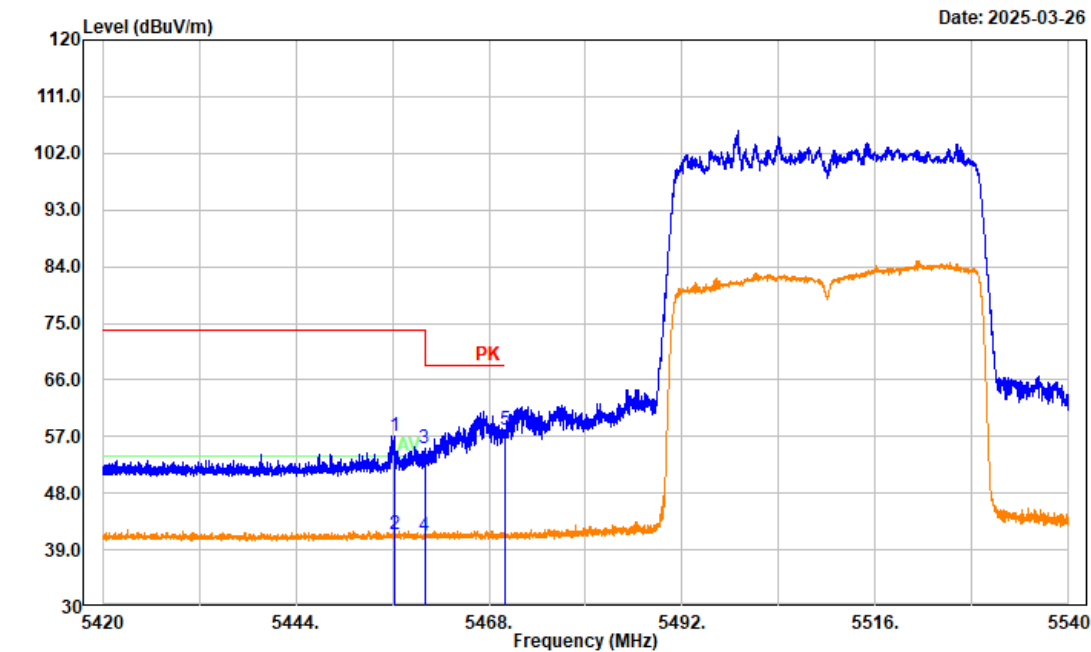


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5456.192	61.57	-4.41	57.16	74.00	16.84	Peak
2	5456.192	45.99	-4.41	41.58	54.00	12.42	Average
3	5460.000	59.50	-4.37	55.13	74.00	18.87	Peak
4	5460.000	45.52	-4.37	41.15	54.00	12.85	Average
5	5470.000	62.27	-4.29	57.98	68.20	10.22	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Vertical
Note: ax40 Low Channel 5510Hz band 3

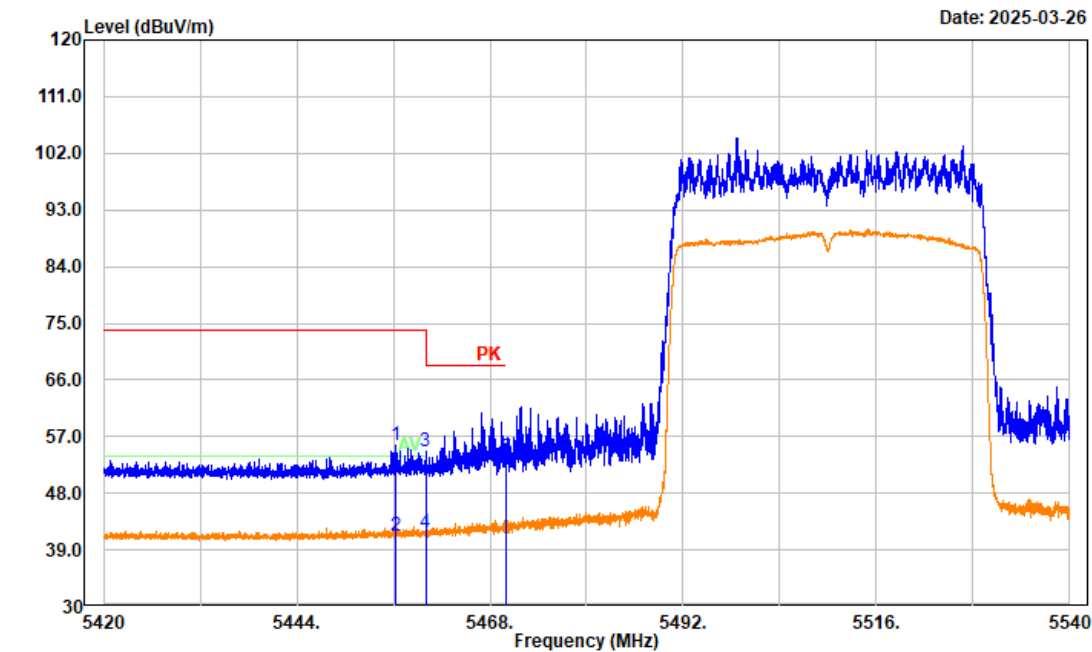


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5456.288	59.92	-4.41	55.51	74.00	18.49	Peak
2	5456.288	45.64	-4.41	41.23	54.00	12.77	Average
3	5460.000	58.92	-4.37	54.55	74.00	19.45	Peak
4	5460.000	45.96	-4.37	41.59	54.00	12.41	Average
5	5470.000	57.86	-4.29	53.57	68.20	14.63	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: ax40 High Channel 5670Hz band 3

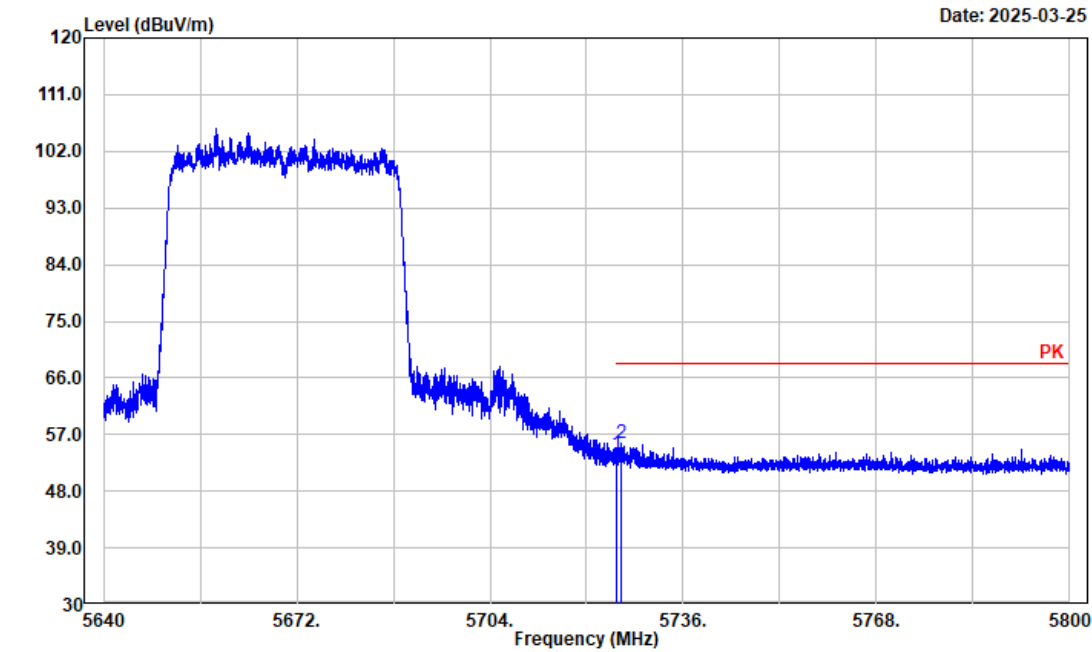


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	57.93	-4.06	53.87	68.20	14.33	Peak
2	5725.824	59.54	-4.05	55.49	68.20	12.71	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax40 High Channel 5670Hz band 3

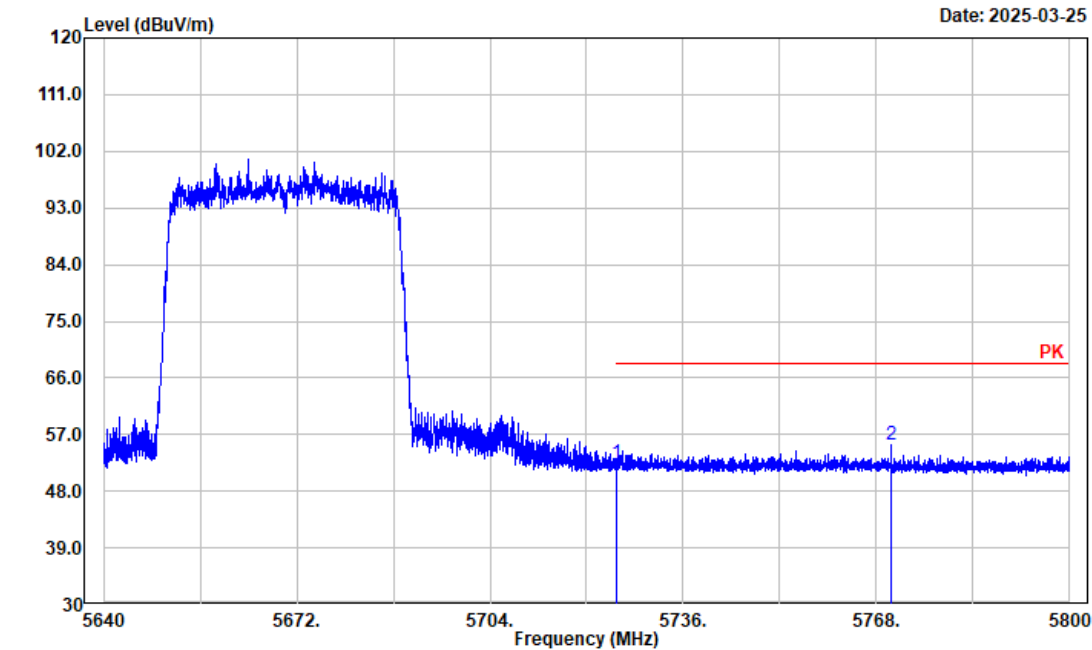


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	56.62	-4.06	52.56	68.20	15.64	Peak
2	5770.368	59.50	-4.17	55.33	68.20	12.87	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: ax80 Low Channel 5530Hz band 3

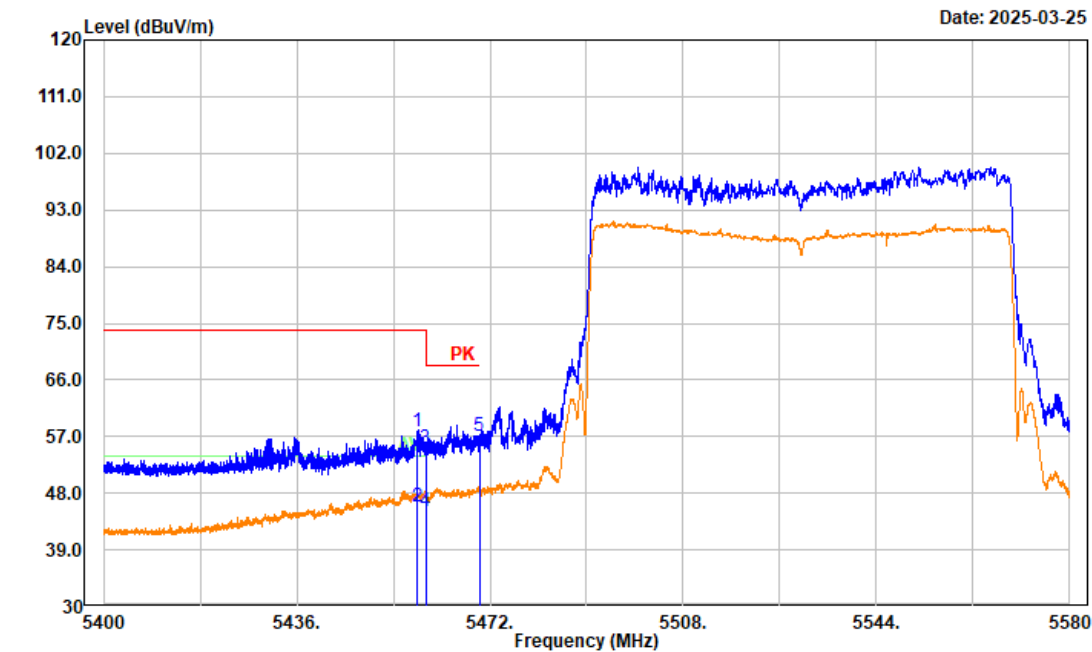


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5458.392	62.23	-4.39	57.84	74.00	16.16	Peak
2	5458.392	50.24	-4.39	45.85	54.00	8.15	Average
3	5460.000	59.37	-4.37	55.00	74.00	19.00	Peak
4	5460.000	49.48	-4.37	45.11	54.00	8.89	Average
5	5470.000	61.37	-4.29	57.08	68.20	11.12	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax80 Low Channel 5530Hz band 3

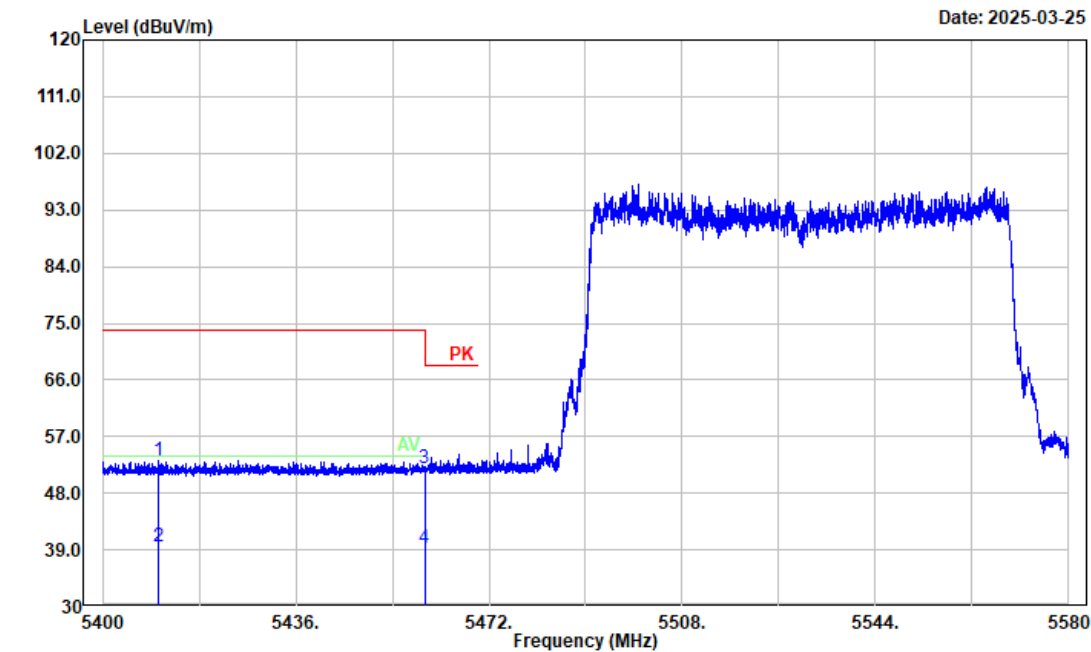


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5410.404	57.60	-4.35	53.25	74.00	20.75	Peak
2	5410.404	43.86	-4.35	39.51	54.00	14.49	Average
3	5460.000	56.28	-4.37	51.91	74.00	22.09	Peak
4	5460.000	43.58	-4.37	39.21	54.00	14.79	Average

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: ax80 High Channel 5610Hz band 3

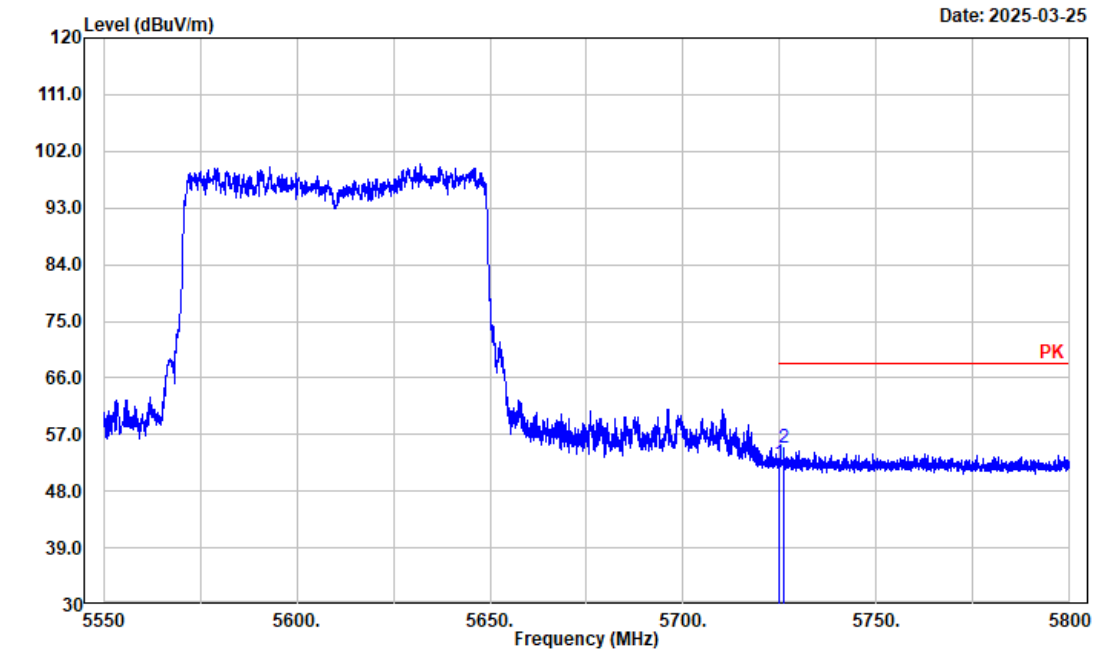


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	56.39	-4.06	52.33	68.20	15.87	Peak
2	5726.100	58.96	-4.05	54.91	68.20	13.29	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax80 High Channel 5610Hz band 3

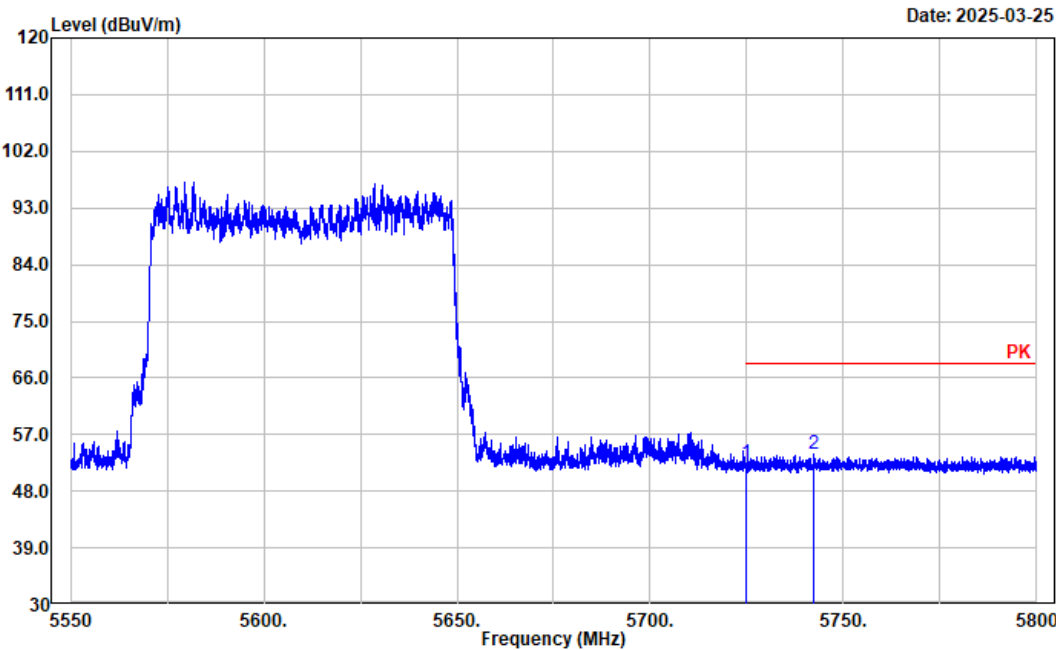


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	56.57	-4.06	52.51	68.20	15.69	Peak
2	5742.300	57.91	-3.99	53.92	68.20	14.28	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: a Low Channel 5745MHz band 4 Chain 0

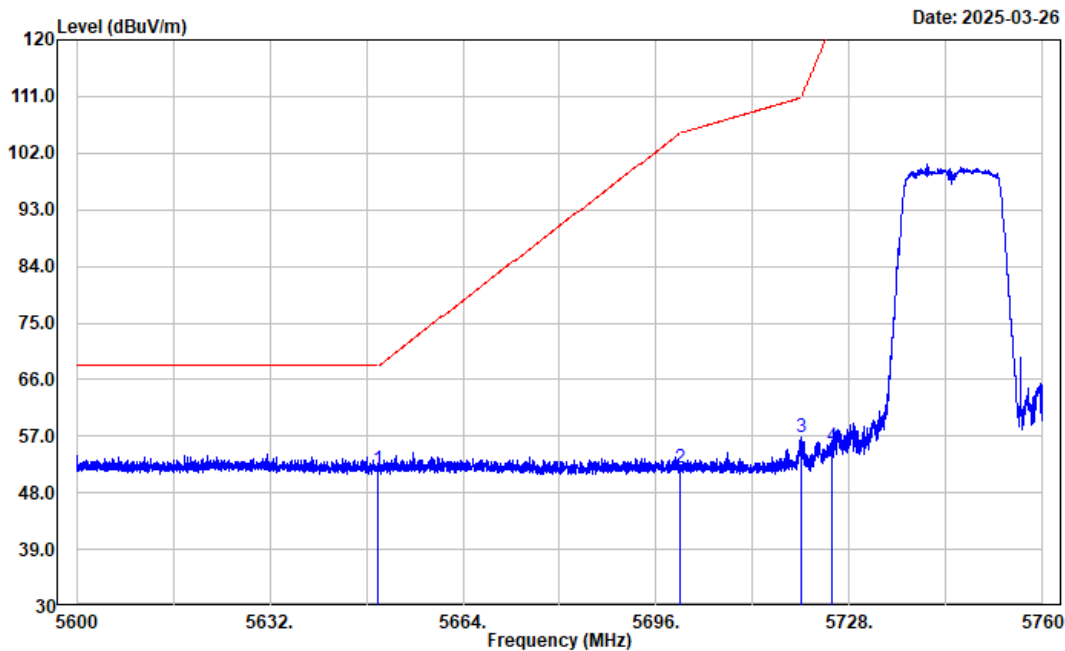


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	55.56	-3.89	51.67	68.20	16.53	Peak
2	5700.000	55.99	-4.15	51.84	105.20	53.36	Peak
3	5720.000	60.87	-4.08	56.79	110.80	54.01	Peak
4	5725.000	59.38	-4.06	55.32	122.20	66.88	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: a Low Channel 5745MHz band 4 Chain 0

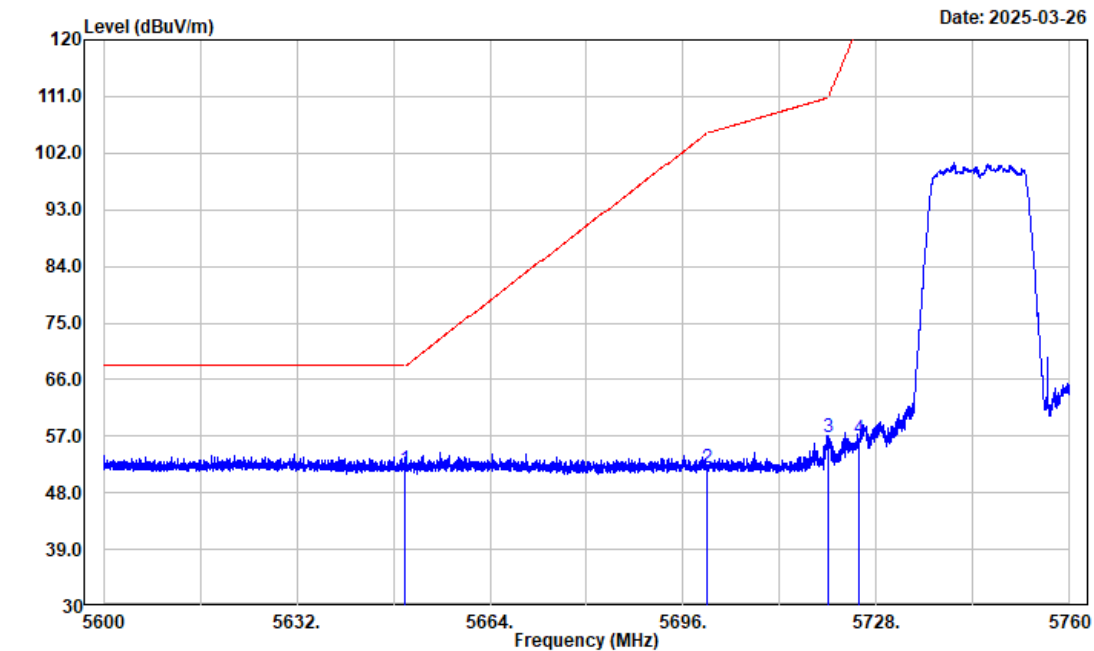


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	55.56	-3.89	51.67	68.20	16.53	Peak
2	5700.000	55.99	-4.15	51.84	105.20	53.36	Peak
3	5720.000	60.87	-4.08	56.79	110.80	54.01	Peak
4	5725.000	60.64	-4.06	56.58	122.20	65.62	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: a High Channel 5825MHz band 4 Chain 0

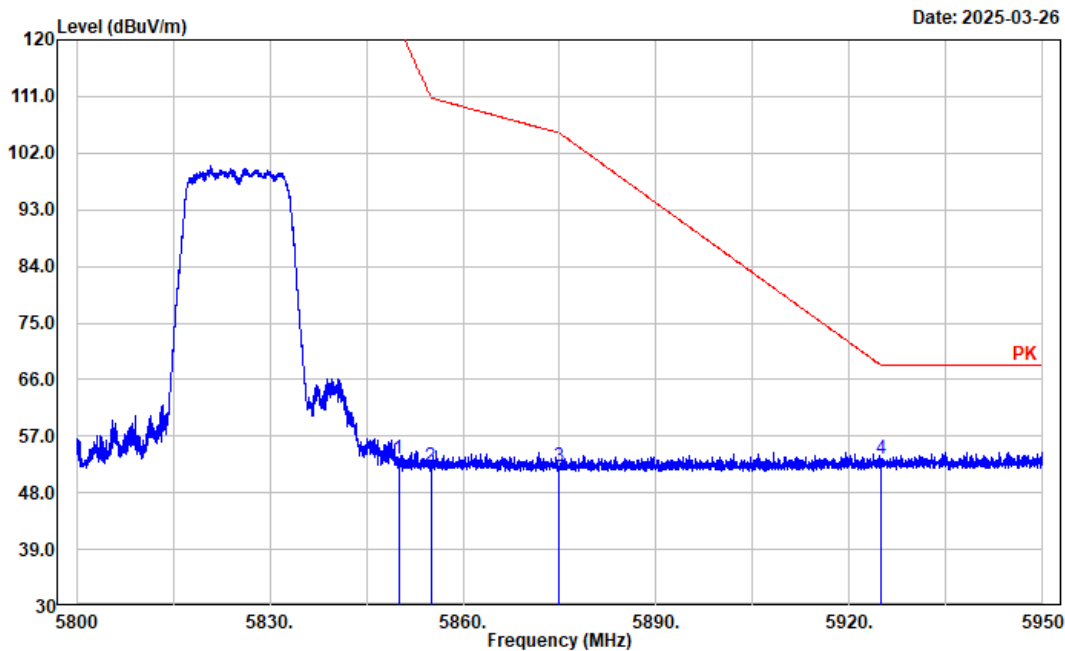


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	57.67	-4.30	53.37	122.20	68.83	Peak
2	5855.000	56.44	-4.31	52.13	110.80	58.67	Peak
3	5875.000	56.44	-4.36	52.08	105.20	53.12	Peak
4	5925.000	57.44	-4.14	53.30	68.20	14.90	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: a High Channel 5825MHz band 4 Chain 0

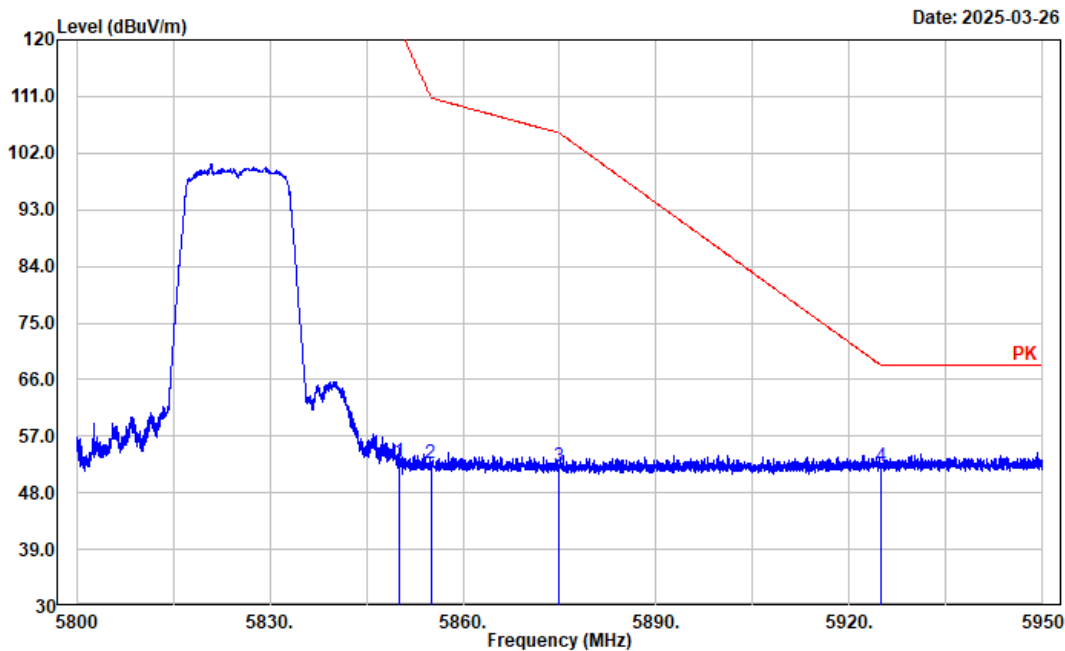


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.010	57.12	-4.30	52.82	122.18	69.36	Peak
2	5855.000	57.09	-4.31	52.78	110.80	58.02	Peak
3	5875.000	56.46	-4.36	52.10	105.20	53.10	Peak
4	5925.000	56.40	-4.14	52.26	68.20	15.94	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: a Low Channel 5745MHz band 4 Chain 1

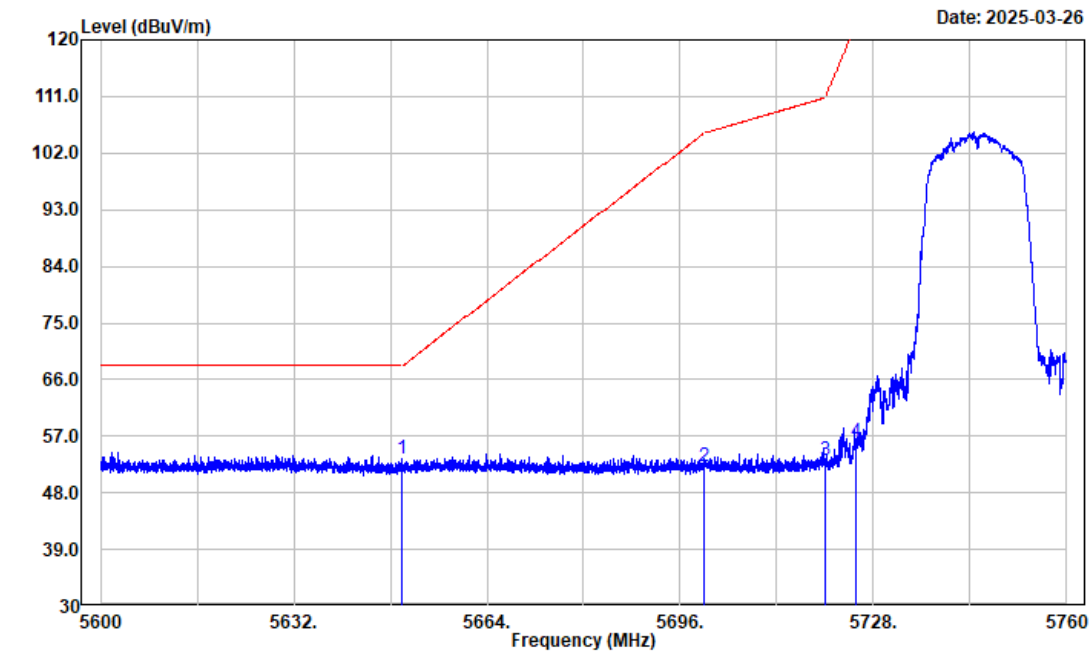


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	57.23	-3.89	53.34	68.20	14.86	Peak
2	5700.000	56.36	-4.15	52.21	105.20	52.99	Peak
3	5720.000	57.15	-4.08	53.07	110.80	57.73	Peak
4	5725.000	60.14	-4.06	56.08	122.20	66.12	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: a Low Channel 5745MHz band 4 Chain 1

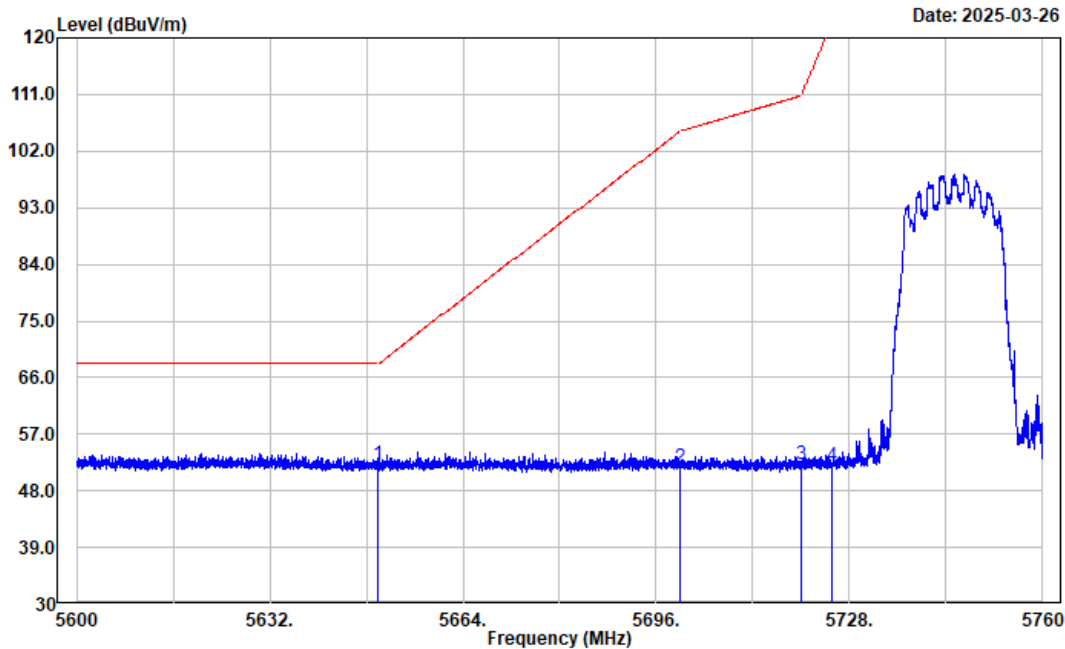


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	56.08	-3.89	52.19	68.20	16.01	Peak
2	5700.000	55.88	-4.15	51.73	105.20	53.47	Peak
3	5720.000	56.18	-4.08	52.10	110.80	58.70	Peak
4	5725.000	55.99	-4.06	51.93	122.20	70.27	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: a High Channel 5825MHz band 4 Chain 1

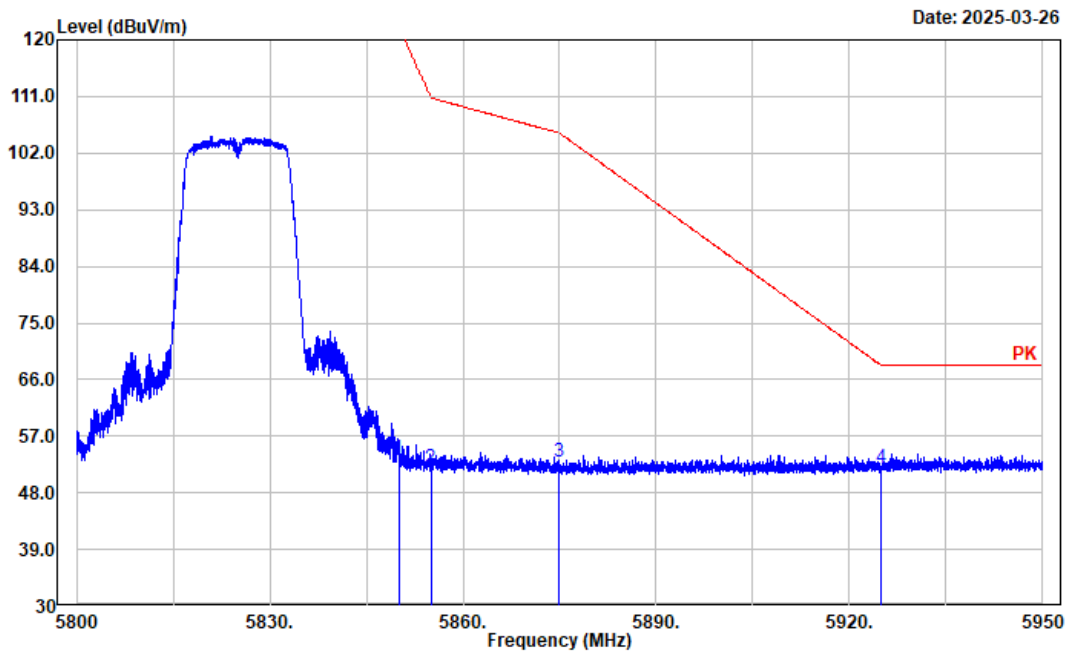


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	57.83	-4.30	53.53	122.20	68.67	Peak
2	5855.000	56.30	-4.31	51.99	110.80	58.81	Peak
3	5875.000	57.18	-4.36	52.82	105.20	52.38	Peak
4	5925.000	55.98	-4.14	51.84	68.20	16.36	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: a High Channel 5825MHz band 4 Chain 1

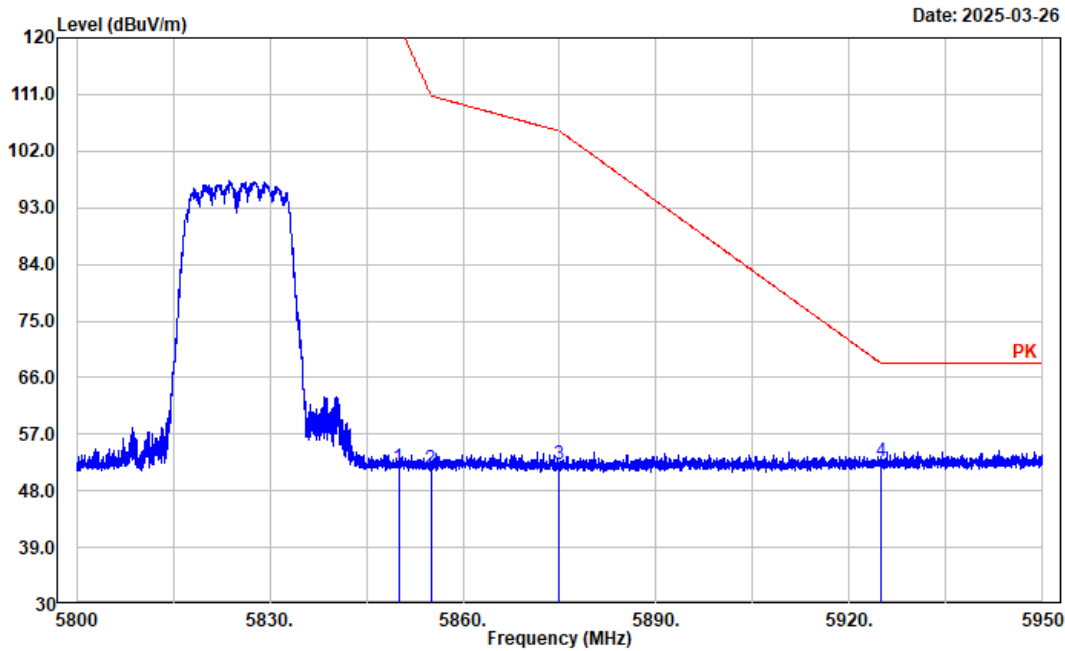


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	56.09	-4.30	51.79	122.20	70.41	Peak
2	5855.000	55.72	-4.31	51.41	110.80	59.39	Peak
3	5875.000	56.50	-4.36	52.14	105.20	53.06	Peak
4	5925.000	56.75	-4.14	52.61	68.20	15.59	Peak

Project No.: 2503Q19064E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
 Polarization: Horizontal
 Note: n20 Low Channel 5745MHz band 4

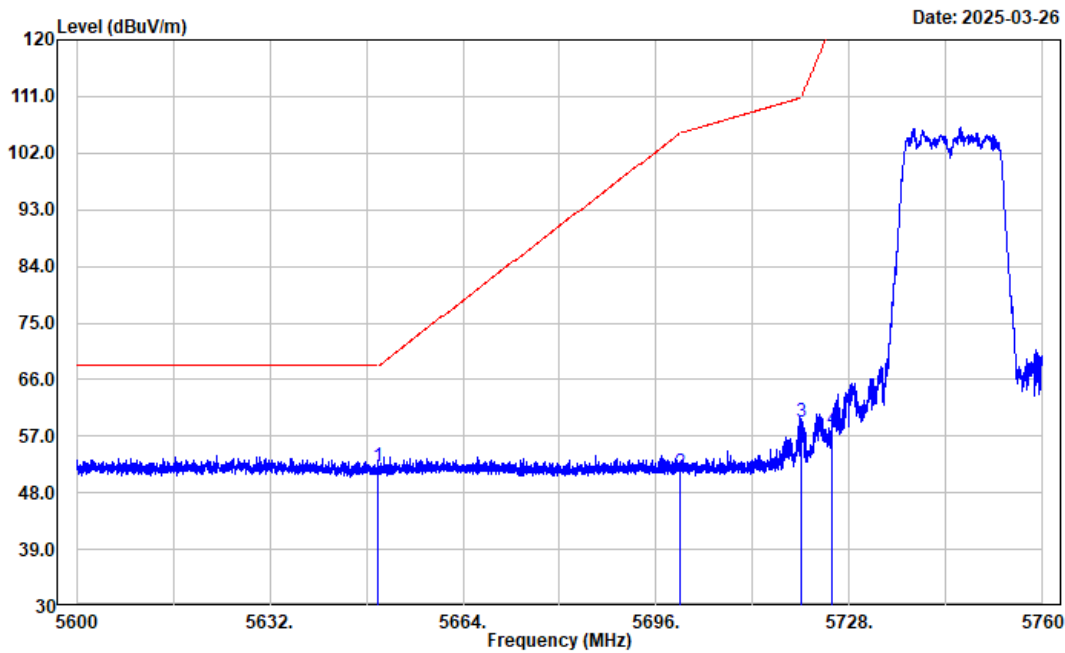


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	56.07	-3.89	52.18	68.20	16.02	Peak
2	5700.000	55.47	-4.15	51.32	105.20	53.88	Peak
3	5720.000	63.42	-4.08	59.34	110.80	51.46	Peak
4	5725.000	62.20	-4.06	58.14	122.20	64.06	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: n20 Low Channel 5745MHz band 4

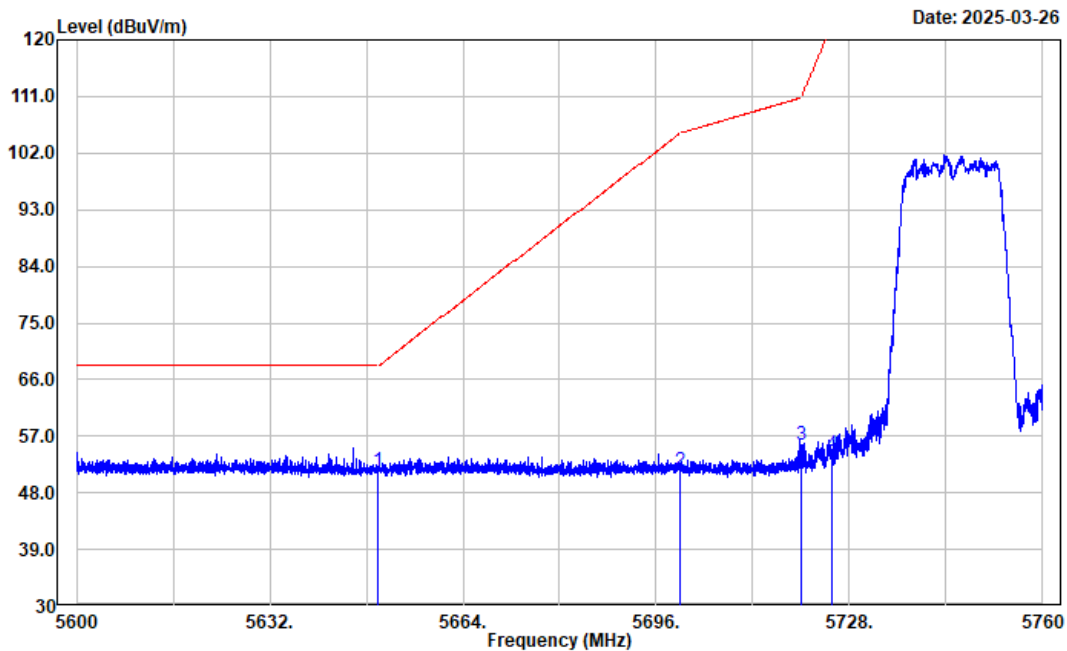


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	55.29	-3.89	51.40	68.20	16.80	Peak
2	5700.000	55.70	-4.15	51.55	105.20	53.65	Peak
3	5720.000	59.58	-4.08	55.50	110.80	55.30	Peak
4	5725.000	58.24	-4.06	54.18	122.20	68.02	Peak

Project No.: 2503Q19064E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
 Polarization: Horizontal
 Note: n20 High Channel 5825MHz band 4

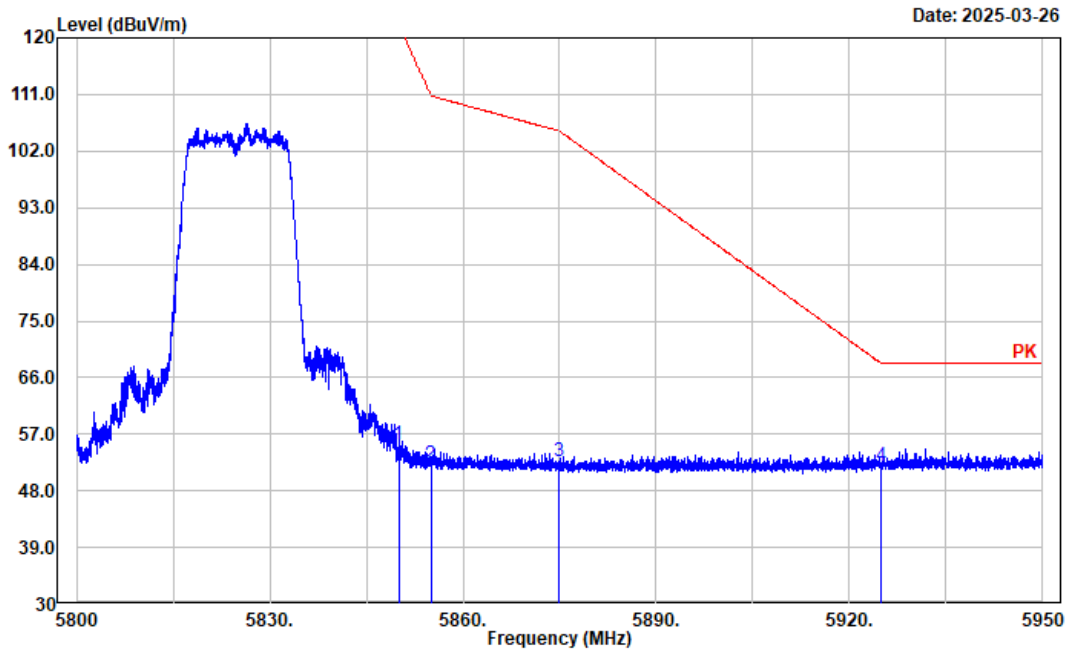


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	59.61	-4.30	55.31	122.20	66.89	Peak
2	5855.000	56.46	-4.31	52.15	110.80	58.65	Peak
3	5875.000	57.03	-4.36	52.67	105.20	52.53	Peak
4	5925.000	56.16	-4.14	52.02	68.20	16.18	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: n20 High Channel 5825MHz band 4

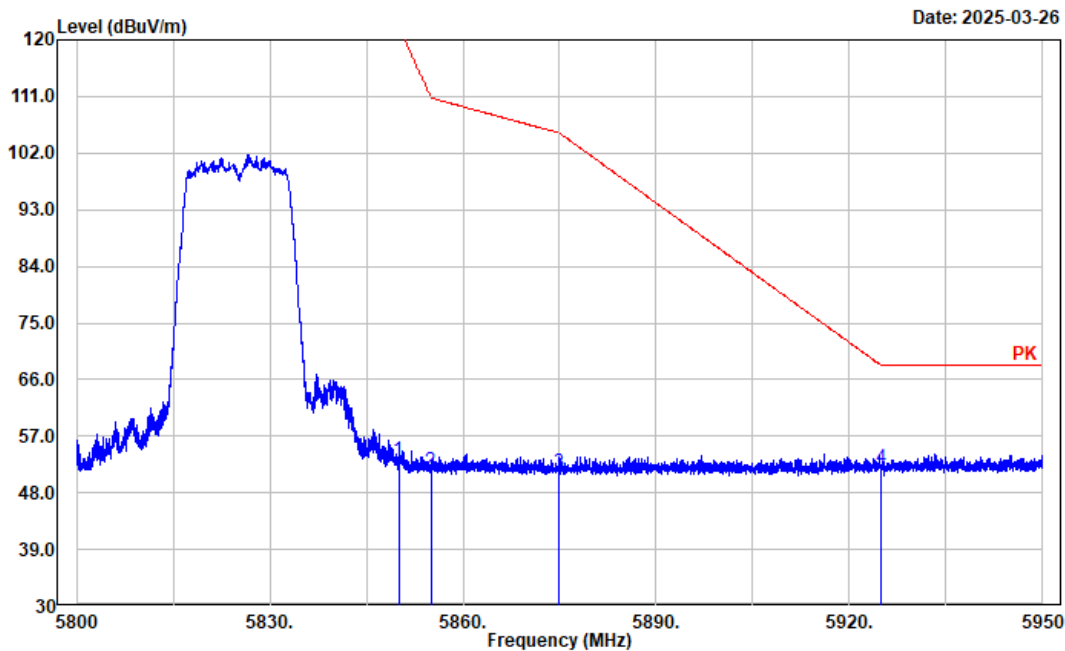


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	57.36	-4.30	53.06	122.20	69.14	Peak
2	5855.000	55.67	-4.31	51.36	110.80	59.44	Peak
3	5875.000	55.67	-4.36	51.31	105.20	53.89	Peak
4	5925.000	56.20	-4.14	52.06	68.20	16.14	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: n40 Low Channel 5755MHz band 4

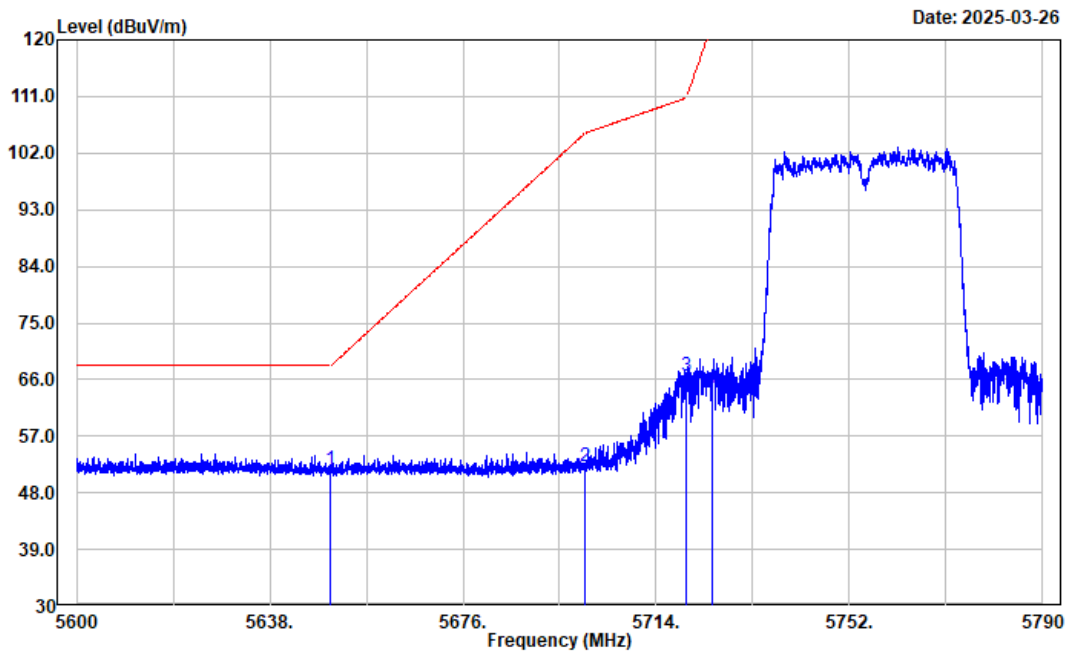


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	55.62	-3.89	51.73	68.20	16.47	Peak
2	5700.000	56.25	-4.15	52.10	105.20	53.10	Peak
3	5720.000	70.74	-4.08	66.66	110.80	44.14	Peak
4	5725.000	68.65	-4.06	64.59	122.20	57.61	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: n40 Low Channel 5755MHz band 4

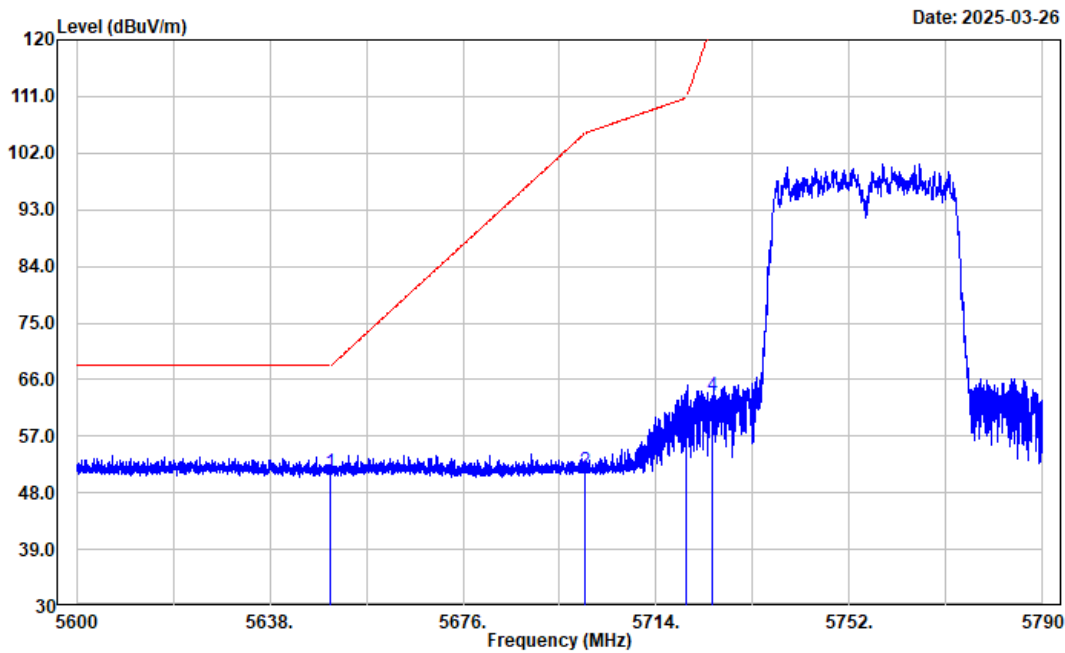


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	55.08	-3.89	51.19	68.20	17.01	Peak
2	5700.000	55.54	-4.15	51.39	105.20	53.81	Peak
3	5720.000	61.57	-4.08	57.49	110.80	53.31	Peak
4	5725.000	67.37	-4.06	63.31	122.20	58.89	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: n40 High Channel 5795MHz band 4

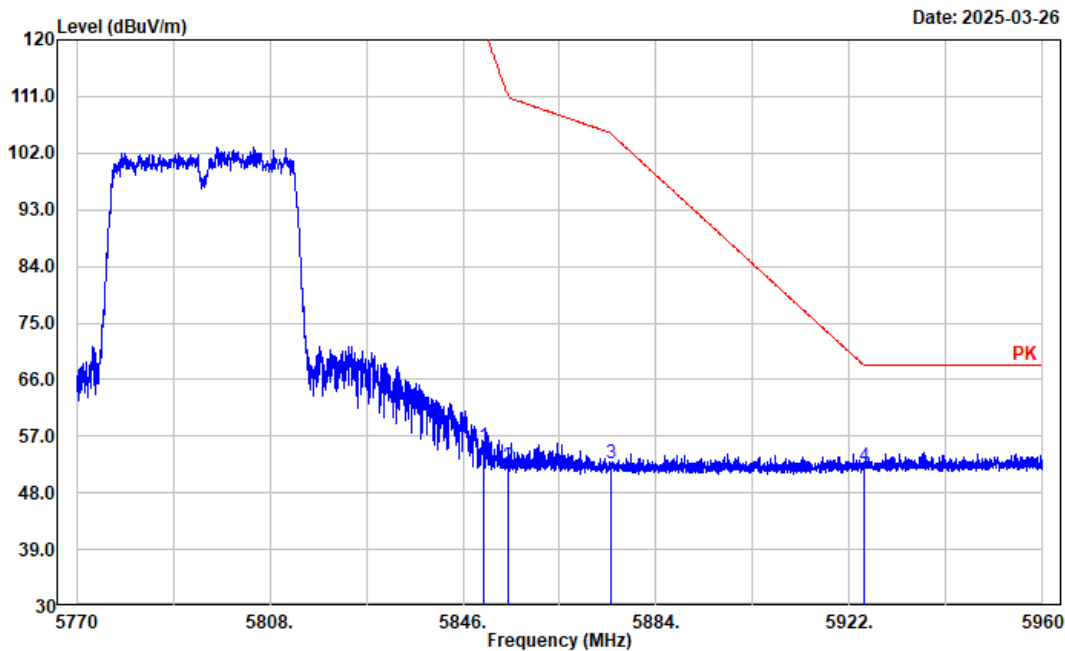


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	59.60	-4.30	55.30	122.20	66.90	Peak
2	5855.000	56.52	-4.31	52.21	110.80	58.59	Peak
3	5875.000	56.98	-4.36	52.62	105.20	52.58	Peak
4	5925.000	56.44	-4.14	52.30	68.20	15.90	Peak

Project No.: 2503Q19064E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
 Polarization: Vertical
 Note: n40 High Channel 5795MHz band 4

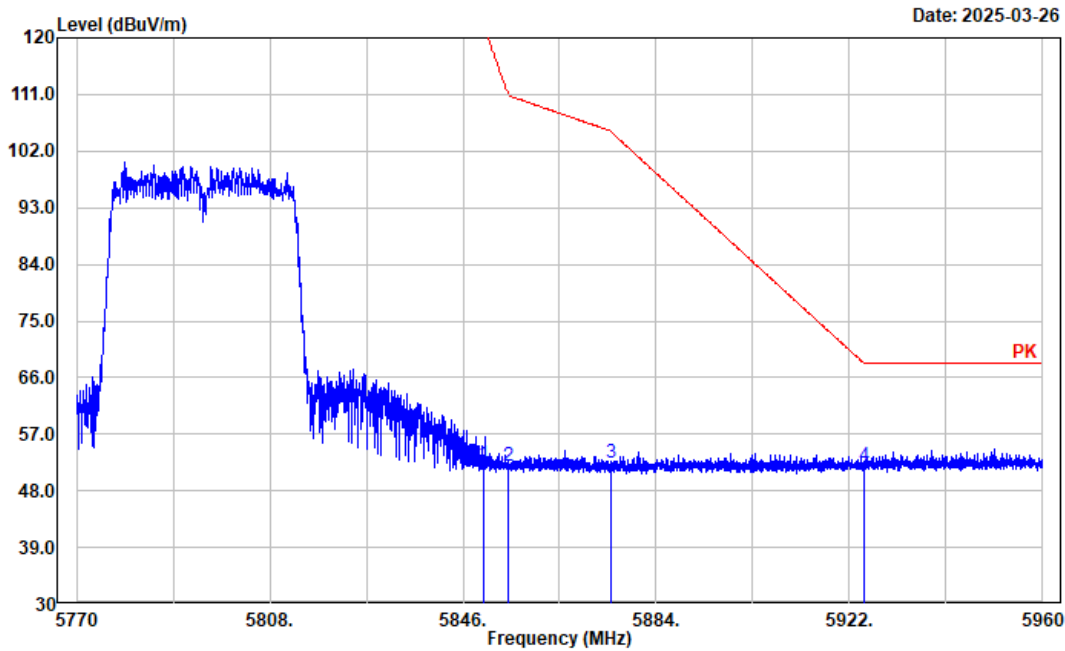


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	56.50	-4.30	52.20	122.20	70.00	Peak
2	5855.000	56.25	-4.31	51.94	110.80	58.86	Peak
3	5875.000	56.73	-4.36	52.37	105.20	52.83	Peak
4	5925.000	56.17	-4.14	52.03	68.20	16.17	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: ac80 Middle Channel 5775MHz band 4

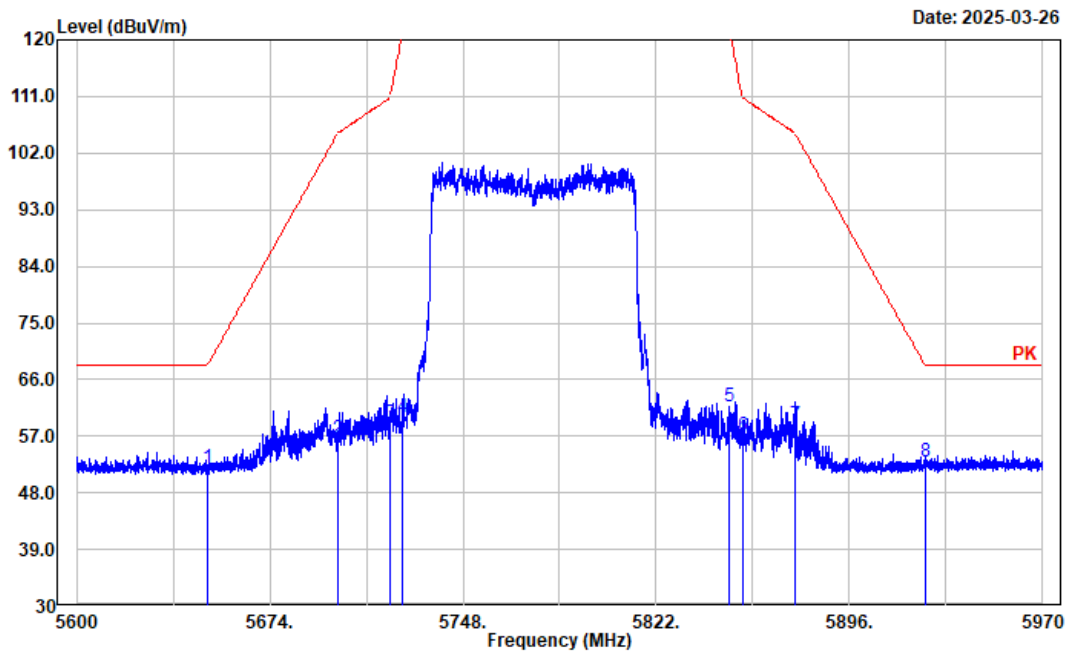


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	55.78	-3.89	51.89	68.20	16.31	Peak
2	5700.000	60.63	-4.15	56.48	105.20	48.72	Peak
3	5720.000	63.12	-4.08	59.04	110.80	51.76	Peak
4	5725.000	64.01	-4.06	59.95	122.20	62.25	Peak
5	5850.000	65.98	-4.30	61.68	122.20	60.52	Peak
6	5855.000	61.50	-4.31	57.19	110.80	53.61	Peak
7	5875.000	63.18	-4.36	58.82	105.20	46.38	Peak
8	5925.000	57.01	-4.14	52.87	68.20	15.33	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ac80 Middle Channel 5775MHz band 4

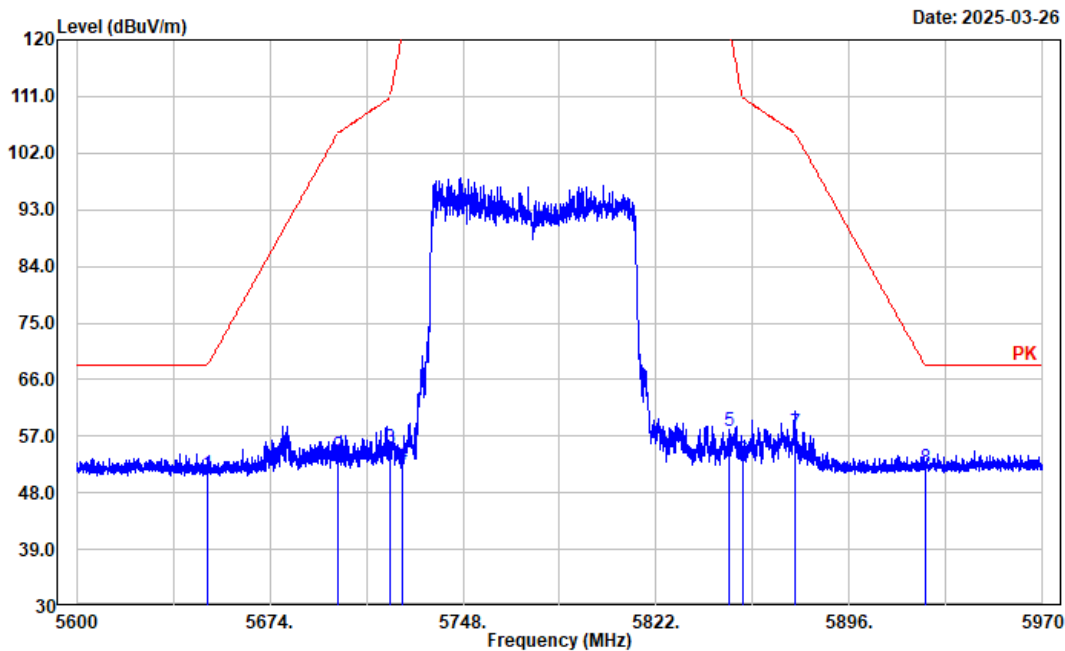


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	54.87	-3.89	50.98	68.20	17.22	Peak
2	5700.000	58.11	-4.15	53.96	105.20	51.24	Peak
3	5720.000	59.21	-4.08	55.13	110.80	55.67	Peak
4	5725.000	56.48	-4.06	52.42	122.20	69.78	Peak
5	5850.000	62.22	-4.30	57.92	122.20	64.28	Peak
6	5855.000	57.36	-4.31	53.05	110.80	57.75	Peak
7	5875.000	61.84	-4.36	57.48	105.20	47.72	Peak
8	5925.000	56.21	-4.14	52.07	68.20	16.13	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: ax20 Low Channel 5745MHz band 4

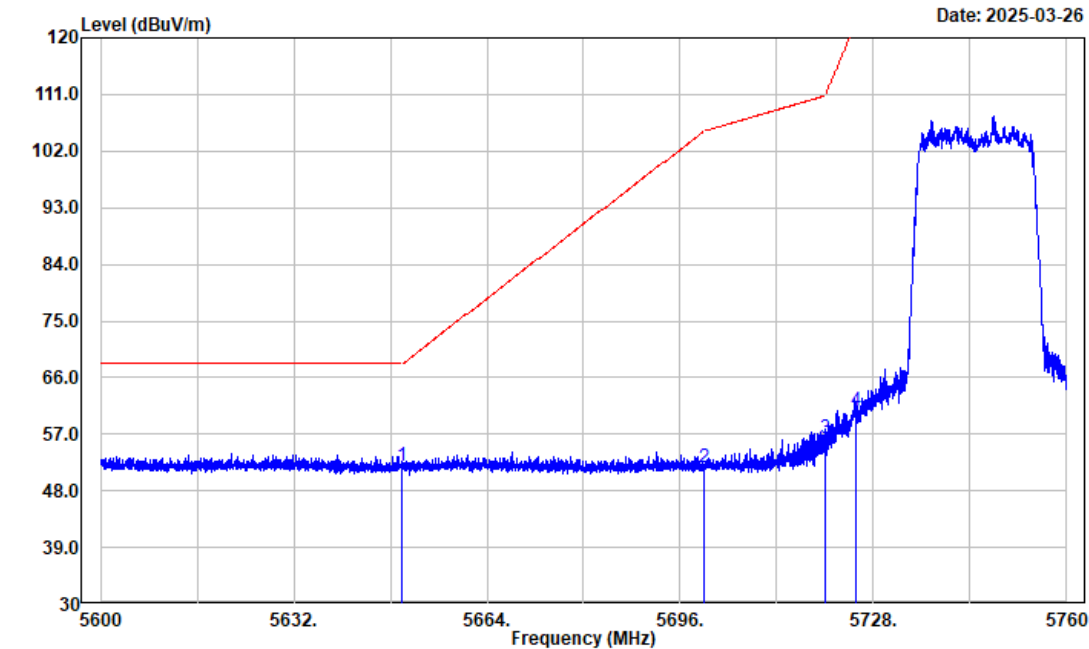


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	55.94	-3.89	52.05	68.20	16.15	Peak
2	5700.000	55.83	-4.15	51.68	105.20	53.52	Peak
3	5720.000	60.34	-4.08	56.26	110.80	54.54	Peak
4	5725.000	64.68	-4.06	60.62	122.20	61.58	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax20 Low Channel 5745MHz band 4

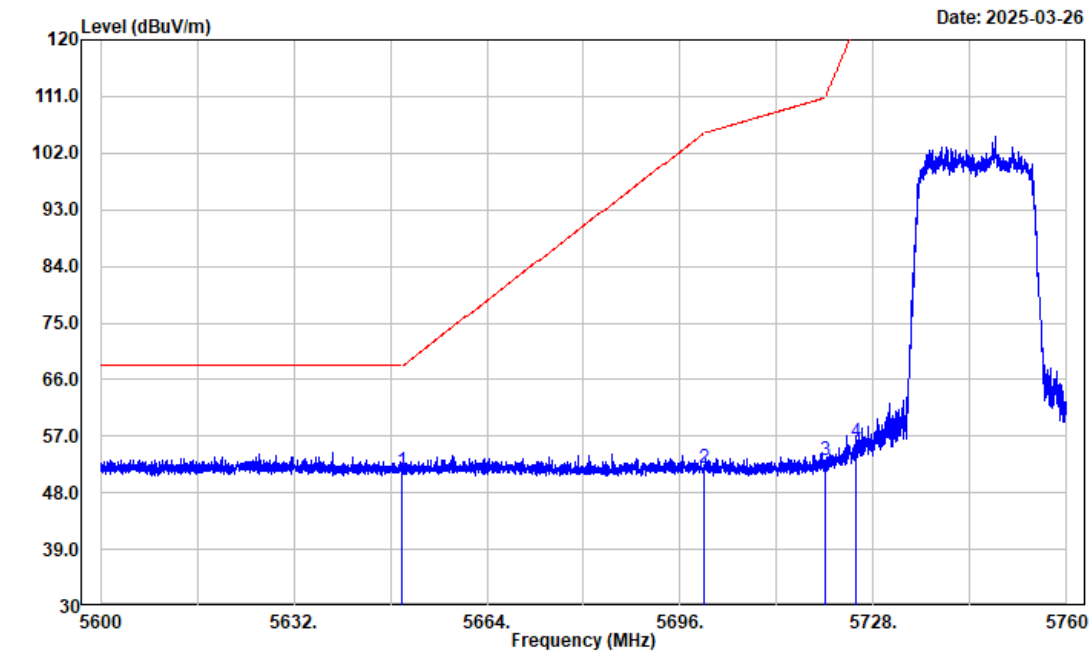


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	55.26	-3.89	51.37	68.20	16.83	Peak
2	5700.000	56.15	-4.15	52.00	105.20	53.20	Peak
3	5720.000	57.34	-4.08	53.26	110.80	57.54	Peak
4	5725.000	60.08	-4.06	56.02	122.20	66.18	Peak

Project No.: 2503Q19064E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
 Polarization: Horizontal
 Note: ax20 High Channel 5825MHz band 4

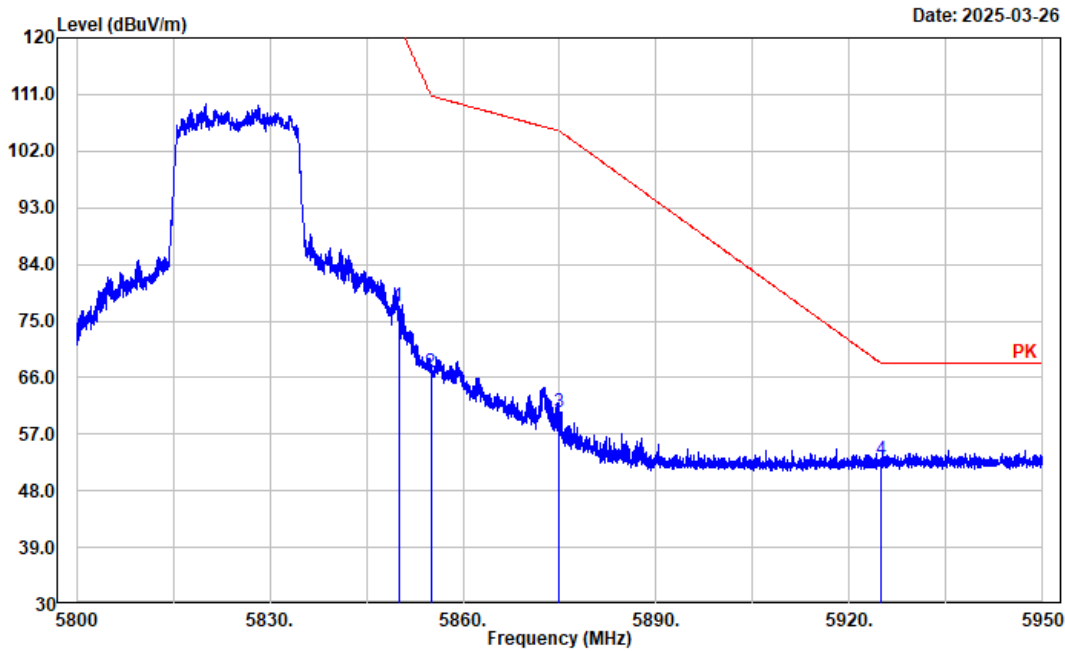


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	81.71	-4.30	77.41	122.20	44.79	Peak
2	5855.000	71.15	-4.31	66.84	110.80	43.96	Peak
3	5875.000	64.93	-4.36	60.57	105.20	44.63	Peak
4	5925.000	57.02	-4.14	52.88	68.20	15.32	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax20 High Channel 5825MHz band 4

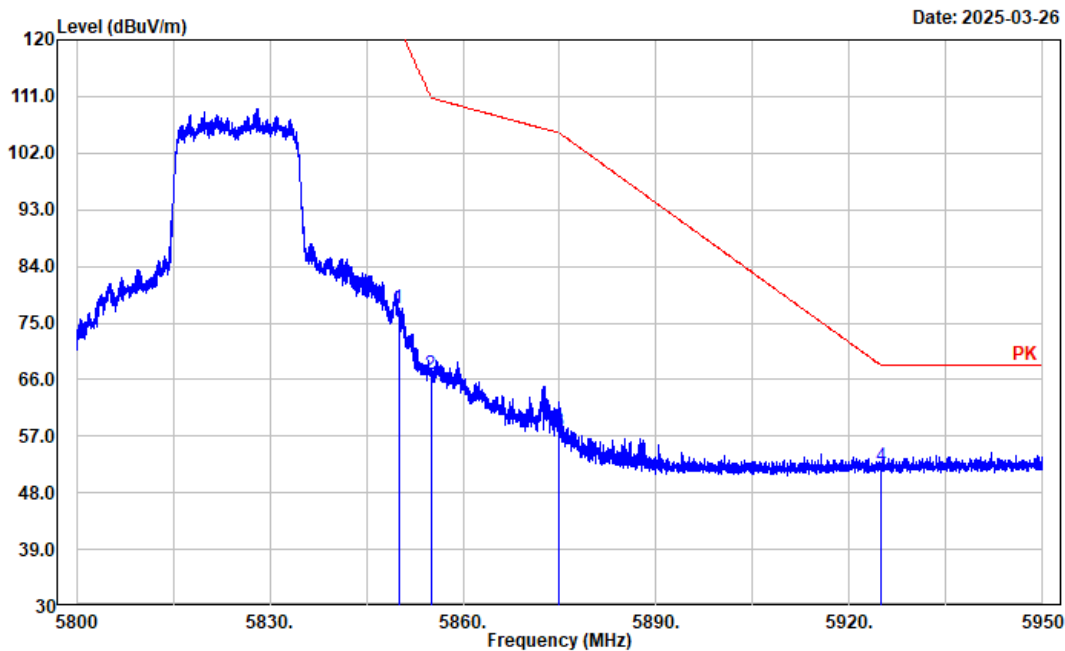


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	81.52	-4.30	77.22	122.20	44.98	Peak
2	5855.000	71.11	-4.31	66.80	110.80	44.00	Peak
3	5875.000	62.09	-4.36	57.73	105.20	47.47	Peak
4	5925.000	56.35	-4.14	52.21	68.20	15.99	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: ax40 Low Channel 5755MHz band 4

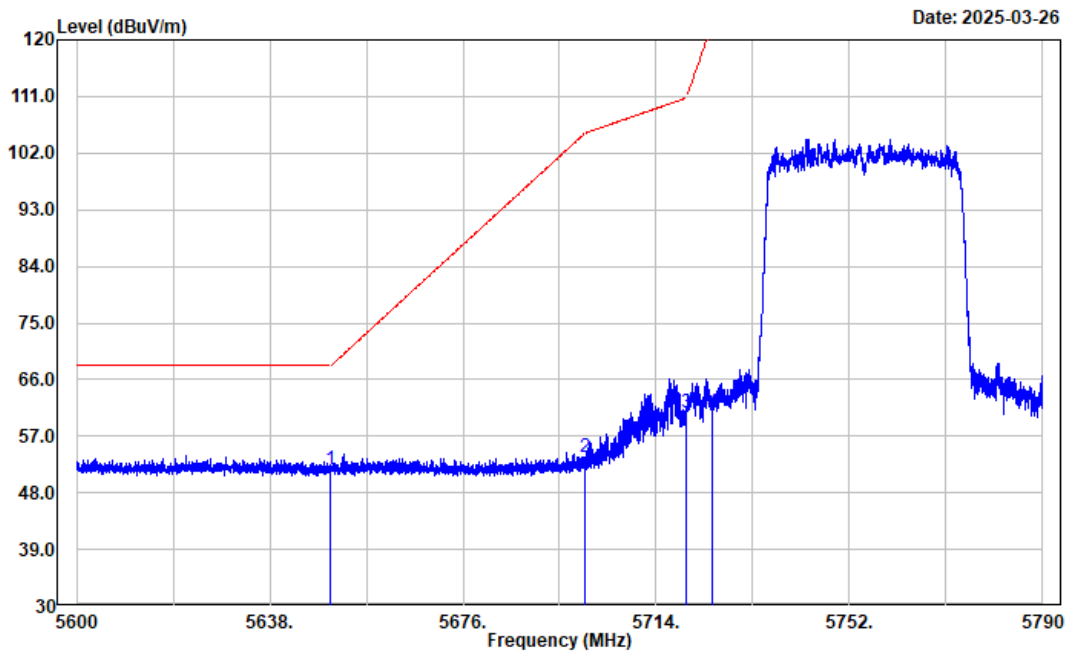


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	55.70	-3.89	51.81	68.20	16.39	Peak
2	5700.000	57.73	-4.15	53.58	105.20	51.62	Peak
3	5720.000	64.72	-4.08	60.64	110.80	50.16	Peak
4	5725.000	64.74	-4.06	60.68	122.20	61.52	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax40 Low Channel 5755MHz band 4

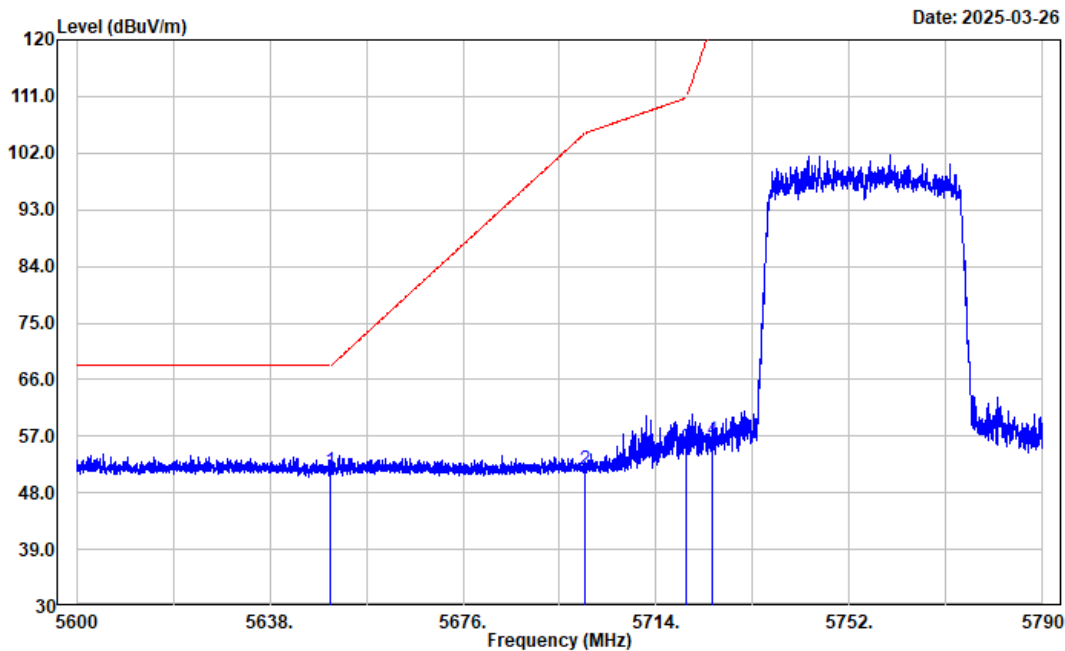


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	55.25	-3.89	51.36	68.20	16.84	Peak
2	5700.000	55.77	-4.15	51.62	105.20	53.58	Peak
3	5720.000	59.23	-4.08	55.15	110.80	55.65	Peak
4	5725.000	60.42	-4.06	56.36	122.20	65.84	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: ax40 High Channel 5795MHz band 4

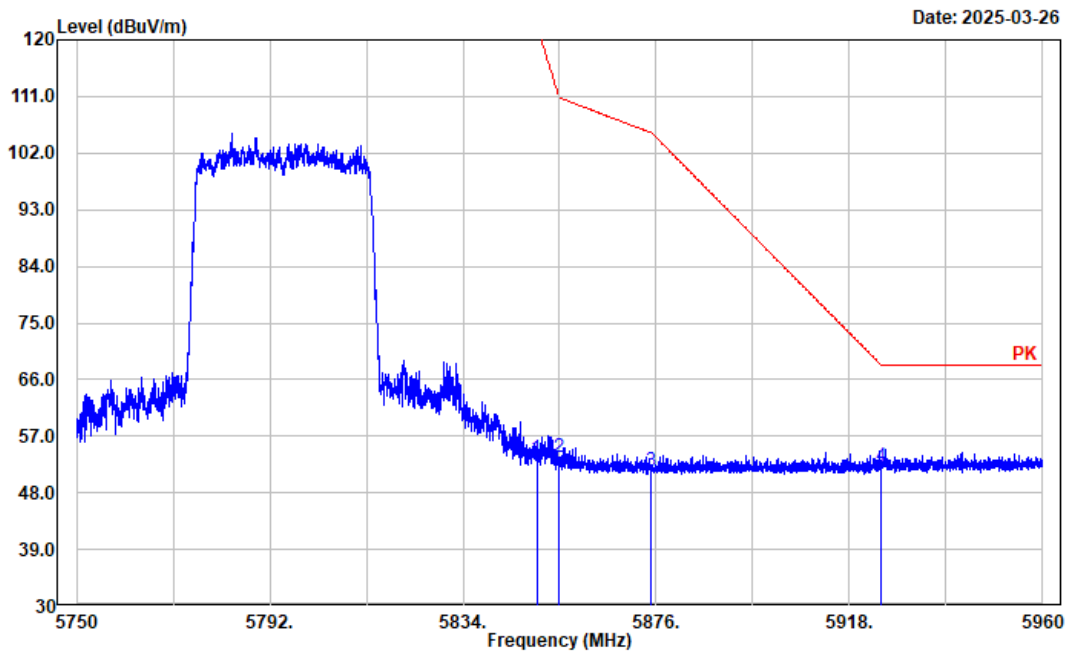


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	57.63	-4.30	53.33	122.20	68.87	Peak
2	5855.000	58.00	-4.31	53.69	110.80	57.11	Peak
3	5875.000	55.74	-4.36	51.38	105.20	53.82	Peak
4	5925.000	56.22	-4.14	52.08	68.20	16.12	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax40 High Channel 5795MHz band 4

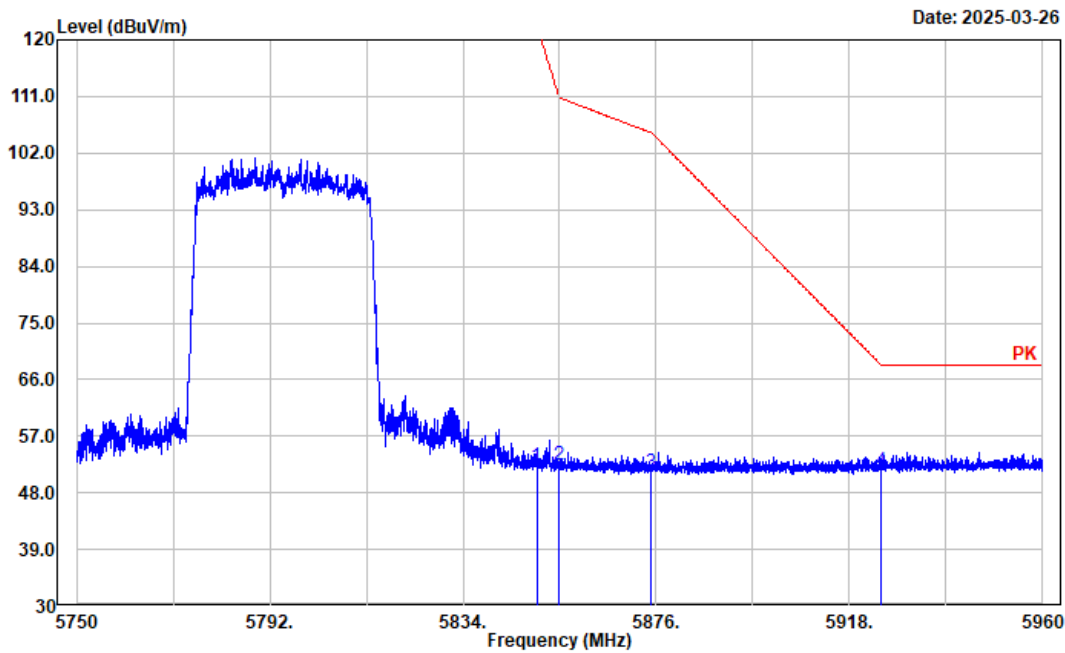


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	56.40	-4.30	52.10	122.20	70.10	Peak
2	5855.000	56.63	-4.31	52.32	110.80	58.48	Peak
3	5875.000	55.65	-4.36	51.29	105.20	53.91	Peak
4	5925.000	55.66	-4.14	51.52	68.20	16.68	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Horizontal
Note: ax80 Middle Channel 5775MHz band 4

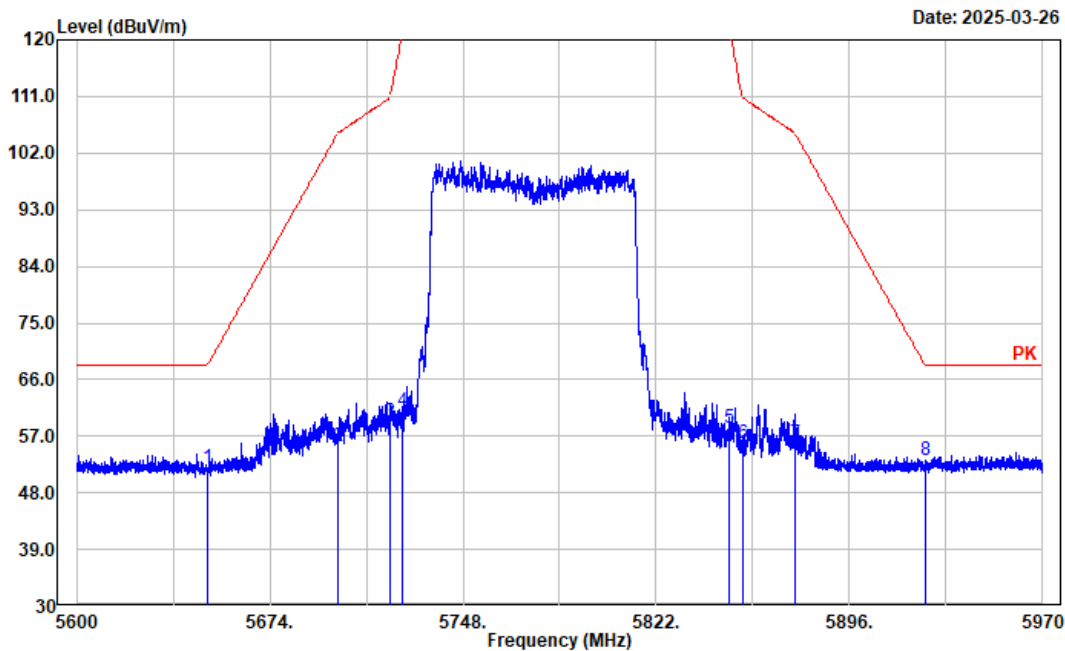

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	55.73	-3.89	51.84	68.20	16.36	Peak
2	5700.000	59.59	-4.15	55.44	105.20	49.76	Peak
3	5720.000	63.27	-4.08	59.19	110.80	51.61	Peak
4	5725.000	65.01	-4.06	60.95	122.20	61.25	Peak
5	5850.000	62.53	-4.30	58.23	122.20	63.97	Peak
6	5855.000	60.25	-4.31	55.94	110.80	54.86	Peak
7	5875.000	60.28	-4.36	55.92	105.20	49.28	Peak
8	5925.000	57.28	-4.14	53.14	68.20	15.06	Peak

Project No.: 2503Q19064E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: Vertical
Note: ax80 Middle Channel 5775MHz band 4

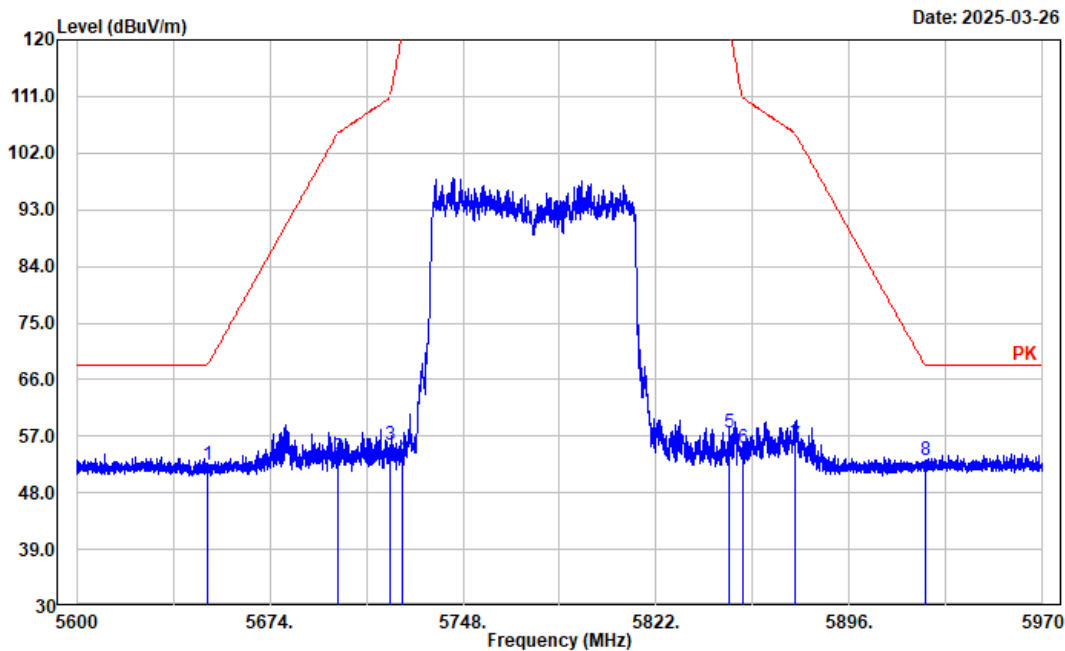

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	56.45	-3.89	52.56	68.20	15.64	Peak
2	5700.000	57.71	-4.15	53.56	105.20	51.64	Peak
3	5720.000	59.74	-4.08	55.66	110.80	55.14	Peak
4	5725.000	57.52	-4.06	53.46	122.20	68.74	Peak
5	5850.000	61.92	-4.30	57.62	122.20	64.58	Peak
6	5855.000	59.51	-4.31	55.20	110.80	55.60	Peak
7	5875.000	60.06	-4.36	55.70	105.20	49.50	Peak
8	5925.000	57.24	-4.14	53.10	68.20	15.10	Peak

4.3 RF Conducted Data

Please refer to Annex "2503Q19064E-RF-00B _Appendix A" for detail test data.

5. EUT PHOTOGRAPHS

Please refer to the attachment 2503Q19064E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2503Q19064E-RF-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2503Q19064E-RF-00B-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====