

Königswinkel 10  
32825 Blomberg  
Germany  
Phone: +49 (0) 52 35 95 00-0  
Fax: +49 (0) 52 35 95 00-10

# Test Report

Report Number: F136117E1

Applicant:

**u-blox Malmö AB**

Manufacturer:

**u-blox Malmö AB**

Equipment under Test (EUT):

**ODIN-W160**

Laboratory accredited by  
Deutsche Akkreditierungsstelle GmbH (DAkkS)  
in compliance with DIN EN ISO/IEC 17025  
under the Reg. No. D-PL-17186-01-02,  
FCC Test site registration number 90877 and  
Industry Canada Test site registration IC3469A-1

## REFERENCES

- [1] **ANSI C63.4-2009** American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- [2] **FCC CFR 47 Part 15 (September 2013)** Radio Frequency Devices
- [3] **Publication Number 558074 (April 2013)** DTS Meas Guidance v03r01
- [4] **RSS-210 Issue 8 (December 2010)** Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment
- [5] **RSS-Gen Issue 3 (December 2010)** General Requirements and Bluetooth module Information for the Certification of Radiocommunication Equipment

## TEST RESULT

The requirements of the tests performed as shown in the overview (clause 4) were fulfilled by the equipment under test.

The complete test results are presented in the following.

Test engineer:

Paul NEUFELD



10 July 2014

Name

Signature

Date

Authorized reviewer:

Bernd STEINER



10 July 2014

Name

Signature

Date

## RESERVATION

This test report is only valid in its original form.

Any reproduction of its contents in extracts without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT NUMBER.

## Contents:

	<b>Page</b>
1 IDENTIFICATION .....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Test laboratory.....	5
1.4 EUT (Equipment Under Test) .....	6
1.5 Dates .....	9
2 OPERATIONAL STATES.....	9
3 ADDITIONAL INFORMATION .....	11
4 OVERVIEW .....	11
5 TEST RESULTS .....	12
5.1 Maximum peak output power.....	12
5.1.1 Method of measurement.....	12
5.1.2 Test results .....	13
5.2 DTS Bandwidth.....	14
5.2.1 Method of measurement.....	14
5.2.2 Test result .....	15
5.3 Peak Power Spectral Density .....	16
5.3.1 Method of measurement.....	16
5.3.2 Test result .....	17
5.4 Band-edge compliance.....	18
5.4.1 Method of measurement (band edges next to unrestricted bands (conducted)) .....	18
5.4.2 Test result (band edges next to unrestricted bands (conducted)) .....	19
5.4.3 Method of measurement (band edges next to restricted bands (conducted)) .....	20
5.4.4 Test result (band edges next to restricted bands (conducted)) .....	20
5.5 Maximum unwanted emissions.....	23
5.5.1 Method of measurement (conducted emissions in the restricted bands) .....	23
5.5.1.1 Limit calculations .....	24
5.5.2 Method of measurement (conducted emissions in the unrestricted bands) .....	25
5.5.2.1 Reference level measurement.....	25
5.5.2.2 Emission level measurement.....	25
5.5.3 Test results (conducted emissions).....	26
5.5.3.1 Emissions below 1 GHz.....	26
5.5.3.2 Emissions above 1 GHz .....	28
5.5.4 Method of measurement (radiated emissions) .....	35
5.5.5 Test results (radiated emissions) – cabinet emissions.....	38
5.5.5.1 Preliminary radiated emission measurement.....	38
5.5.5.2 Final radiated emission measurement (9 kHz to 1 GHz).....	44
5.5.5.3 Final radiated emission measurement (1 GHz to 25 GHz).....	44
5.6 Conducted emissions on power supply lines (150 kHz to 30 MHz).....	47

5.6.1 Method of measurement.....	47
5.6.2 Test results (conducted emissions on power supply lines) .....	48
6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS.....	50
7 REPORT HISTORY .....	52
8 LIST OF ANNEXES .....	52

# 1 IDENTIFICATION

## 1.1 Applicant

Name:	u-blox Malmö AB
Address:	Norra Vallgatan 64 3V, SE-211 22 Malmö
Country:	Sweden
Name for contact purposes:	Mr. Mats ANDERSSON
Phone:	+ 46 40 63 07 100
Fax:	+ 46 40 23 71 37
eMail Address:	mats.andersson@u-blox.com
Applicant represented during the test by the following person:	None

## 1.2 Manufacturer

Name:	u-blox Malmö AB
Address:	Norra Vallgatan 64 3V, SE-211 22 Malmö
Country:	Sweden
Name for contact purposes:	Mr. Mats ANDERSSON
Phone:	+ 46 40 63 07 100
Fax:	+ 46 40 23 71 37
eMail Address:	mats.andersson@u-blox.com
Manufacturer represented during the test by the following person:	None

## 1.3 Test laboratory

The tests were carried out at: **PHOENIX TESTLAB GmbH**  
**Königswinkel 10**  
**32825 Blomberg**  
**Germany**

accredited by Deutsche Akkreditierungsstelle GmbH (DAkkS) in compliance with DIN EN ISO/IEC 17025 under the Reg. No. D-PL-17186-01-02, FCC Test site registration number 90877 and Industry Canada Test site registration IC3469A-1.

## 1.4 EUT (Equipment Under Test)

Test object: *	Bluetooth and WLAN module			
Model: *	ODIN-W160			
FCC ID: *	<b>PVH0953</b>			
IC: *	<b>5325A-0953</b>			
Serial number: *	WLAN: 292006260218, 292006259621, 292006259601, 292006260221			
PCB identifier: *	0953-03			
Hardware version: *	3.1			
Software version: *	cB-2282(wlan_pcti_release_1.0.13605)			

Channel 01	RX:	2412 MHz	TX:	2412 MHz
Channel 02	RX:	2417 MHz	TX:	2417 MHz
Channel 03	RX:	2422 MHz	TX:	2422 MHz
Channel 04	RX:	2427 MHz	TX:	2427 MHz
Channel 05	RX:	2432 MHz	TX:	2432 MHz
Channel 06	RX:	2437 MHz	TX:	2437 MHz
Channel 07	RX:	2442 MHz	TX:	2442 MHz
Channel 08	RX:	2447 MHz	TX:	2447 MHz
Channel 09	RX:	2452 MHz	TX:	2452 MHz
Channel 10	RX:	2457 MHz	TX:	2457 MHz
Channel 11	RX:	2462 MHz	TX:	2462 MHz
Channel 36	RX:	5180 MHz	TX:	5180 MHz
Channel 40	RX:	5200 MHz	TX:	5200 MHz
Channel 44	RX:	5220 MHz	TX:	5220 MHz
Channel 48	RX:	5240 MHz	TX:	5240 MHz
Channel 52	RX:	5260 MHz	TX:	5260 MHz
Channel 56	RX:	5280 MHz	TX:	5280 MHz
Channel 60	RX:	5300 MHz	TX:	5300 MHz
Channel 64	RX:	5320 MHz	TX:	5320 MHz
Channel 100	RX:	5500 MHz	TX:	5500 MHz
Channel 104	RX:	5520 MHz	TX:	5520 MHz
Channel 108	RX:	5540 MHz	TX:	5540 MHz
Channel 112	RX:	5560 MHz	TX:	5560 MHz
Channel 116	RX:	5580 MHz	TX:	5580 MHz
Channel 132	RX:	5660 MHz	TX:	5660 MHz
Channel 136	RX:	5680 MHz	TX:	5680 MHz
Channel 140	RX:	5700 MHz	TX:	5700 MHz
Channel 149	RX:	5745 MHz	TX:	5745 MHz
Channel 153	RX:	5765 MHz	TX:	5765 MHz
Channel 157	RX:	5785 MHz	TX:	5785 MHz
Channel 161	RX:	5805 MHz	TX:	5805 MHz
Channel 165	RX:	5825 MHz	TX:	5825 MHz

Fulfils WLAN specification: *	IEEE, 802.11b, 802.11g, 802.11n, 802.11a				
Antenna type: *	See Table 1				
Antenna gain: *	See Table 1				
Antenna connector: *	See Table 1				
Power supply - EUT	3.3 V DC				
Power supply Host	U <sub>nom</sub> =	5 V DC	U <sub>min</sub> =	3.6 V DC	U <sub>max</sub> =
Type of modulation: *	802.11a: OFDM 802.11b: CCK, DQPSK, DBPSK 802.11g: OFDM 802.11n: OFDM				
Operating frequency range:*	2412 MHz to 2462 MHz, 5180 MHz to 5240 MHz, 5260 MHz to 5320 MHz, 5500 MHz to 5700 MHz, 5745 to 5825 MHz				
Number of channels: *	32				
Temperature range: *	-40 °C to +85 °C				
Lowest / highest internal clock frequency: *	32768 Hz / 26.000 MHz				

\* declared by the applicant.

**Table 1** **Antenna specifications**

Antenna name	Manufacturer	Type	Comment	Gain [dBi]
WCR-2400 -IP04 -IP10 -SMA -SMRP	Centurion	Monopole	10cm flying lead U.FL 25cm flying lead U.FL SMA RSMA	2 dBi @ 2.4 GHz
SDM2-2400/1575	Mobile Mark	Patch	flying lead U.FL	2 dBi @ 2.4 GHz
PSTG0-2400HS	Mobile Mark	Monopole	SMA/RSMA	0 dBi @ 2.4 GHz
FlatWhip-2400	ProAnt	Monopole	SMA/RSMA	3 dBi @ 2.4 GHz
"InSide-EPA 2400"	ProAnt	Patch	circular polarization	3 dBi @ 2.4 GHz
"InSide-EPA-WLAN"	ProAnt	Patch	circular polarization	3 dBi @ 5 GHz
InSide-2400	ProAnt	Patch	10cm flying lead U.FL	3 dBi @ 2.4 GHz
InSide-WLAN	ProAnt	Patch	dual band 10cm flying lead U.FL	3 dBi @ 2.4 GHz 3 dBi @ 5 GHz
Outside-2400	ProAnt	Patch	10 cm flying lead U.FL 25 cm flying lead U.FL	3 dBi @ 2.4 GHz
Ex-IT 2400 -SMA 28-001 -RP-SMA 28-001 - MHF 28-001	ProAnt	Monopole	SMA RSMA 10 cm flying lead U.FL	3 dBi @ 2.4 GHz
Ex-IT WLAN - SMA - RP-SMA - MHF	ProAnt	Monopole	dual band SMA RSMA 10cm flying lead U.FL	3 dBi @ 2.4 GHz 3 dBi @ 5 GHz
Ex-IT 2400 -MHF 70-001	ProAnt	Monopole	10cm flying lead U.FL	3 dBi @ 2.4 GHz
Ex-IT 2400 -SMA 70-002 -RP-SMA 70-002	ProAnt	Monopole	SMA RSMA	3 dBi @ 2.4 GHz
InSide Fold-2400	ProAnt	Patch	10 cm flying lead U.FL	3 dBi @ 2.4 GHz
InSide Fold-WLAN	ProAnt	Patch	10 cm flying lead U.FL	3 dBi @ 2.4 GHz 3 dBi @ 5 GHz
InSide-WLAN Square	ProAnt	Patch	10 cm flying lead U.FL	3 dBi @ 2.4 GHz 3 dBi @ 5 GHz

**The following external I/O cables were used:**

Identification	Length
DC power cable	2 m *
RS232 cable	2 m *

\*: Length during the test if not other specified.

## 1.5 Dates

Date of receipt of test sample:	21 January 2014
Start of test:	21 January 2014
End of test:	4 April 2014

## 2 OPERATIONAL STATES

The equipment under test (EUT) is a WLAN dual band and Bluetooth dual mode module soldered on to a carrier board. The WLAN / Bluetooth module is equipped with an U.FL. antenna connector. A RS232 connector and the power supply connector are located at the carrier board.

The tests were carried out with an unmodified sample of the EUT. Parts of the tests were carried out conducted at the antenna port. If the conducted tests did not pass, the measurements were repeated as radiated tests with the dedicated antennas attached.

Additionally a radiated measurement of the housing emission was performed while the antenna port is terminated by a  $50 \Omega$  resistor.


The carrier board was connected via a RS232 connection to a laptop computer. With a testsoftware running on the laptop the operation mode as seen in the table below could be chosen.

During the tests, the test samples were powered with 5 V via the power supply connection of the carrier board from a laboratory power supply.

The following operation modes were identified as worst case condition and used during the tests:

Operation mode	Description of the operation mode	WLAN mode	WLAN channel	Modulation	Data rate / Mbps
1	Continuous transmitting on 2412 MHz	b	1	CCK	1 MBit/s
2	Continuous transmitting on 2437 MHz	b	6	CCK	1 MBit/s
3	Continuous transmitting on 2462 MHz	b	11	CCK	1 MBit/s
4	Continuous transmitting on 2412 MHz	g	1	OFDM	6 MBit/s
5	Continuous transmitting on 2437 MHz	g	6	OFDM	6 MBit/s
6	Continuous transmitting on 2462 MHz	g	11	OFDM	6 MBit/s
7	Continuous transmitting on 2412 MHz	n 20 MHz	1	OFDM	6.5 MBit/s
8	Continuous transmitting on 2437 MHz	n 20 MHz	6	OFDM	6.5 MBit/s
9	Continuous transmitting on 2462 MHz	n 20 MHz	11	OFDM	6.5 MBit/s

**Table 2      Worst case test setup**

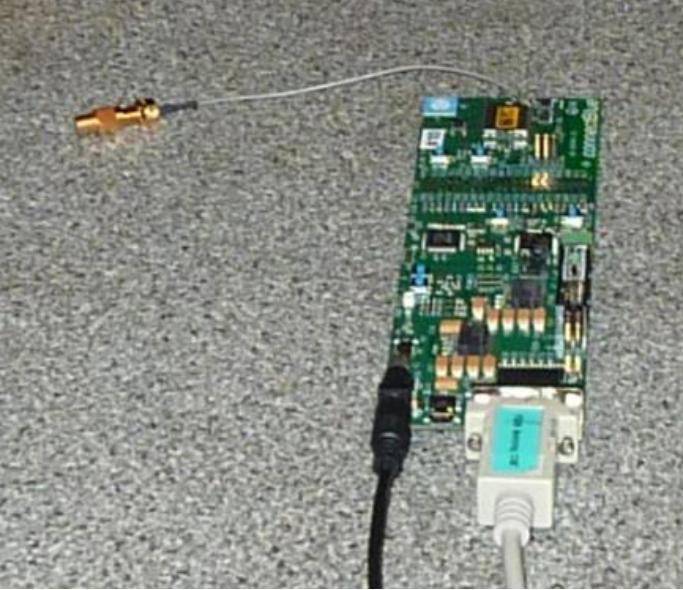Position 1 (Housing Emissions)	Position 3 (Housing Emissions)
	
Position 2 (Housing Emissions)	
	

Preliminary tests were performed to find worst-case configuration and position. The radiated emission measurements were carried out in the orthogonal direction that emits the highest spurious emission levels.

The following test modes were adjusted during the tests:

Test items	Operation mode
Maximum Peak Output Power	1 - 9
DTS Bandwidth	1 - 9
Peak Power Spectral Density	1 - 9
Band Edge Compliance	1, 3, 4, 6, 7, 9
Maximum Unwanted Emissions	1 - 9

### 3 ADDITIONAL INFORMATION

The power was set to the values shown in the table below.

Channel	1 - 11
Power 1 MBps	14.5
Power 2/5.5/11 MBps	15.5
Power all g and n20 modes	16.5

This report contains the results of the EUT operating in the 2.4 GHz band only.

### 4 OVERVIEW

Application	Frequency range [MHz]	FCC 47 CFR Part 15 section [2]	RSS 210, Issue 8 [4] or RSS-Gen, Issue 3 [5]	Status	Refer page
Maximum Peak Output Power	2400.0 - 2483.5	15.247 (b) (3), (4)	A8.4 (4) [4]	Passed	12 et seq
DTS Bandwidth	2400.0 - 2483.5	15.247 (a) (2)	A8.2 (a) [4]	Passed	14 et seq
Peak Power Spectral Density	2400.0 - 2483.5	15.247 (e)	A8.2 (b) [4]	Passed	16 et seq
Band edge compliance	2400.0 - 2483.5	15.247 (d)	A8.5 [4]	Passed	18 et seq.
Radiated emissions (transmitter)	0.009 – 26,500	15.247 (d) 15.205 (a) 15.209 (a)	A8.5 [4] 7.2.2 [5], 2.5 [4]	Passed	23 et seq.
Conducted emissions on supply line	0.15 - 30	15.207 (a)	7.2.4 [5]	Passed	47 et seq.

## 5 TEST RESULTS

### 5.1 Maximum peak output power

#### 5.1.1 Method of measurement

The EUT has to be connected to the power meter via a low loss cable.

#### Acceptable measurement configurations

The measurement procedures described herein are based on the use of an antenna-port conducted test configuration.

PKPM1 – Peak power meter method was used for this test. The procedure is described in chapter 9.1.3 of document [3].

The measurement was performed at the upper and lower end and the middle of the assigned frequency band.

Test set-up:



### 5.1.2 Test results

Ambient temperature	22 °C	Relative humidity	62 %
---------------------	-------	-------------------	------

The highest antenna gain is 3.0 dBi. Therefore no reduction of the Peak power limit is necessary.

Operation Mode	Antenna gain combined [dBi]	Maximum peak output power [dBm]	Margin [dB]	Peak power limit [dBm]
1	3.0	15.1	14.9	30
2	3.0	15.3	14.7	30
3	3.0	15.3	14.7	30
4	3.0	21.7	8.3	30
5	3.0	22.5	7.5	30
6	3.0	22.3	7.7	30
7	3.0	21.3	8.7	30
8	3.0	22.5	7.5	30
9	3.0	21.9	8.1	30
Measurement uncertainty		+0.66 dB / -0.72 dB		

Test: Passed

#### TEST EQUIPMENT USED FOR THE TEST:

26, 27

## 5.2 DTS Bandwidth

### 5.2.1 Method of measurement

The relating measurements were carried out in a conducting manner. Therefore, the antenna connector was directly connected to a spectrum analyser. The measurement procedure refers to part 8.1 of document [3].


- Set RBW = 100 kHz.
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

## 5.2.2 Test result

Ambient temperature	22 °C	Relative humidity	59 %
---------------------	-------	-------------------	------

The following results were measured at the antenna port of the EUT. The plot shows an exemplary measurement result for the worst documented case. The other results are listed in the following table.

136117\_6dB-BW\_b\_6: DTS Bandwidth (operation mode 2):

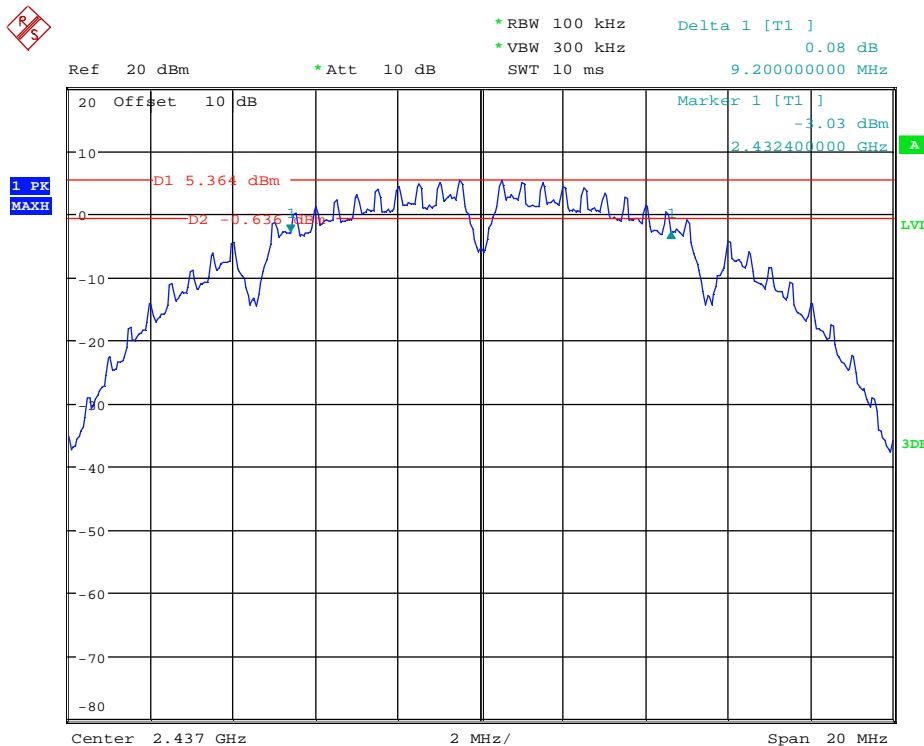

Operation Mode	Center Frequency [MHz]	Minimum 6-dB Bandwidth Limit [MHz]	6 dB Bandwidth [MHz]	Result
1	2412	0.5	9.200	Passed
2	2437	0.5	9.200	Passed
3	2462	0.5	9.200	Passed
4	2412	0.5	15.900	Passed
5	2437	0.5	15.800	Passed
6	2462	0.5	15.900	Passed
7	2412	0.5	15.900	Passed
8	2437	0.5	15.750	Passed
9	2462	0.5	15.550	Passed
Measurement uncertainty			+0.66 dB / -0.72 dB	

Test: Passed

### TEST EQUIPMENT USED FOR THE TEST:

7

## 5.3 Peak Power Spectral Density

### 5.3.1 Method of measurement

The relating measurements were carried out in a conducting manner. Therefore, the antenna connector was directly connected to a spectrum analyser. The measurement procedure refers to part 10.2 of document [3].


- Set analyser center frequency to DTS channel center frequency
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set the VBW  $\geq 3 \times \text{RBW}$ .
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (not less than 3 kHz) and repeat.

### 5.3.2 Test result

Ambient temperature	22 °C	Relative humidity	59 %
---------------------	-------	-------------------	------

The following results were measured at the antenna port of the EUT. The plot shows an exemplary measurement result for the worst documented case. The other results are listed in the following table.

136117\_PwrSpecDens\_b\_1.wmf: Power Spectral Density (operation mode 1):

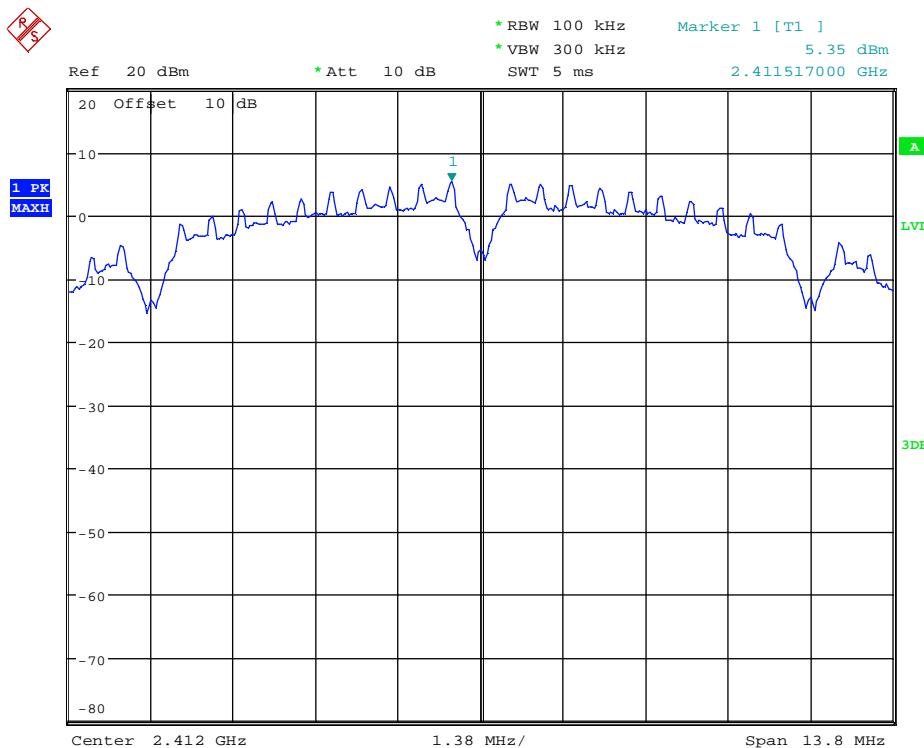

Operation Mode	Peak Frequency [MHz]	Power Spectral Density Limit [dBm/3kHz]	Power Spectral Density Reading [dBm/100kHz]	Array Gain [dB]	Power Spectral Density Level [dBm/100kHz]	Margin [dB]	Result
1	2.411.517	8	5.35	0.00	5.35	2.65	Passed
2	2.437.483	8	5.32	0.00	5.32	2.68	Passed
3	2.462.483	8	5.48	0.00	5.48	2.52	Passed
4	2.413.288	8	3.19	0.00	3.19	4.81	Passed
5	2.438.232	8	4.83	0.00	4.83	3.17	Passed
6	2.464.528	8	4.33	0.00	4.33	3.67	Passed
7	2413.240	8	2.61	0.00	2.61	5.39	Passed
8	2438.276	8	4.82	0.00	4.82	3.18	Passed
9	2463.260	8	3.94	0.00	3.94	4.06	Passed
Measurement uncertainty				+0.66 dB / -0.72 dB			

Test: Passed

#### TEST EQUIPMENT USED FOR THE TEST:

7

## 5.4 Band-edge compliance

### 5.4.1 Method of measurement (band edges next to unrestricted bands (conducted))

The relating measurements were carried out in a conducting manner. Therefore, the antenna connector was directly connected to a spectrum analyser. The measurement procedure refers to part 11.2 and 11.3 of document [3].

Measurement Procedure Reference – Reference Level:

- RBW = 100 kHz.
- VBW  $\geq$  300 kHz.
- Set the span to  $\geq$  1.5 times the DTS Bandwidth.
- Detector = Peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilise.
- Use the peak marker function to determine the the maximum PSD level.

Measurement Procedure – Unwanted Emissions

- Set the center frequency and span to encompass the frequency range to be measured.
- RBW = 100 kHz.
- VBW  $\geq$  300 kHz.
- Detector = Peak.
- Ensure that the number of measurement points  $\geq$  span/RBW.
- Sweep time = auto couple.
- Trace Mode = max hold.
- Allow the trace to stabilise.
- Use the peak marker function to determine the maximum amplitude level.

The measurement procedure at the band edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were be encompassed by the span. After trace stabilization, the maximum peak was be determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20 dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.


The measurements were performed at the lower end of the 2.4 GHz band.

### 5.4.2 Test result (band edges next to unrestricted bands (conducted))

Ambient temperature	22 °C	Relative humidity	59 %
---------------------	-------	-------------------	------

The following results were measured at antenna port 1 of the EUT. The plot shows an exemplary measurement result for the worst documented case. The other results are listed in the following table.

136117\_BandEdgeUnrestr\_n20\_1.wmf: conducted band-edge compliance (operation mode 7):

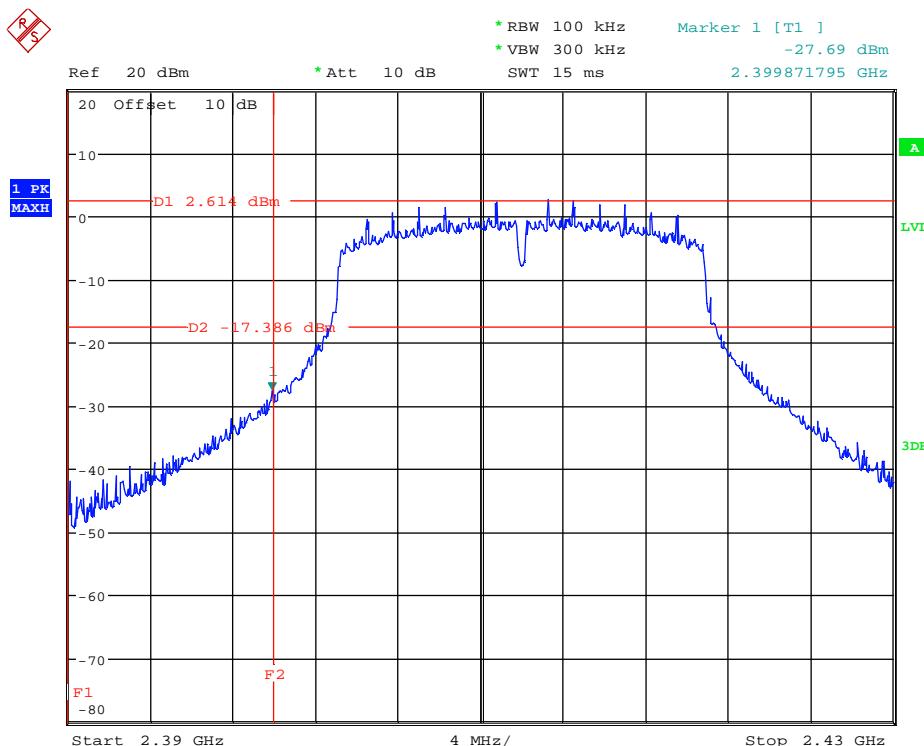

Operation Mode	WLAN channel	WLAN mode	Band-Edge	Reference Level dBm	Limit dBm	Unwanted Emission Frequency MHz	Unwanted Emission Value dBm	Margin dB
1	1	b	low	5.31	-14.69	2396.987	-43.61	28.92
4	1	g	low	2.88	-17.12	2400.000	-27.60	10.48
7	1	n20	low	2.61	-17.39	2.399.872	-27.69	10.30
Measurement uncertainty				+0.66 dB / -0.72 dB				

Test: Passed

#### TEST EQUIPMENT USED FOR THE TEST:

7

### 5.4.3 Method of measurement (band edges next to restricted bands (conducted))

The same test set-up as used for the final conducted emission measurement shall be used (refer also subclause 5.5.1 of this test report).

After trace stabilisation the marker shall be set on the signal peak. The frequency line shall be set on the edge of the assigned frequency band. Now set the second marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is higher than that at the band-edge. The level of the measured field strength shall be compared to the the general limits specified in § 15.205.


The measurement was performed at the lower and the upper end of the 2.4 GHz band.

### 5.4.4 Test result (band edges next to restricted bands (conducted))

Ambient temperature	22 °C	Relative humidity	59 %
---------------------	-------	-------------------	------

The plot shows an exemplary measurement result for the worst documented case. The other results are listed in the following table.

136117\_BandEdgeRestr\_n20\_11.wmf: conducted band-edge compliance (operation mode 9):

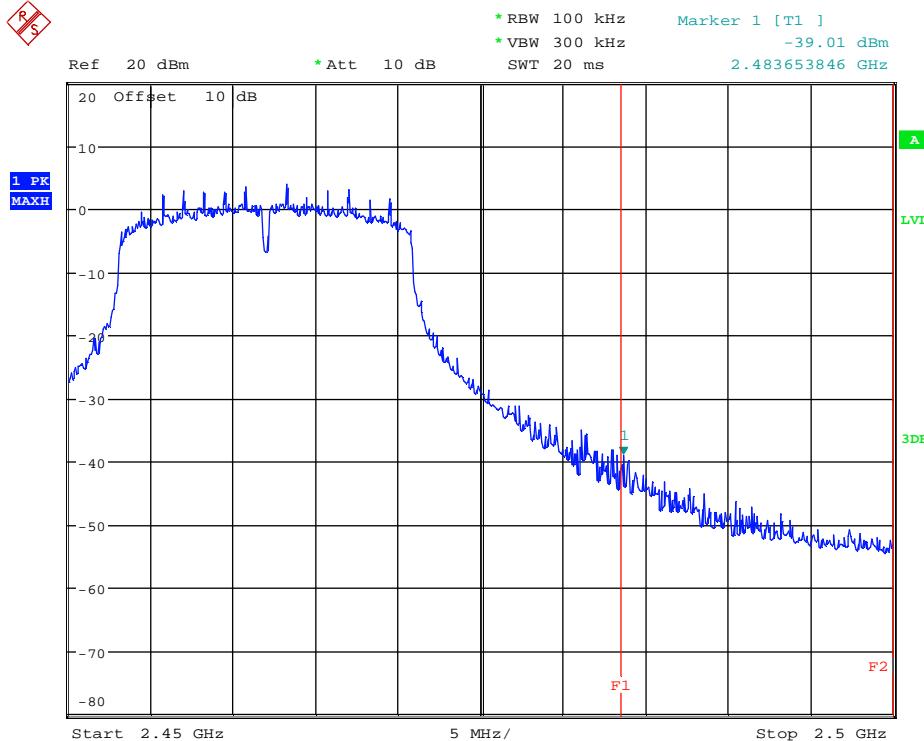

Band Edge Compliance, b-mode, channel 1 (Operation mode 1)									
WLAN Mode	Channel	Frequency [MHz]	Peak Limit [dBuV/m]	Field Strength [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
b	1	2384.113	52.08	74.00	21.92	-46.18	3.0	Passed	Y
WLAN Mode	Channel	Frequency [MHz]	Average Limit [dBuV/m]	Field Strength [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
b	1	2386.438	43.01	54.00	10.99	-55.24	3.0	Passed	Y
Measurement uncertainty				+0.66 dB / -0.72 dB					

Band Edge Compliance, b-mode, channel 11 (Operation mode 3)									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
b	11	2488.109	53.25	74.00	20.75	-45.01	3.0	Passed	Y
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Average Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
b	11	2487.959	44.19	54.00	9.81	-54.07	3.0	Passed	Y
Measurement uncertainty				+0.66 dB / -0.72 dB					

Band Edge Compliance, g-mode, channel 1 (Operation mode 4)									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
g	1	2389.315	72.78	74.00	1.22	-25.48	3.0	Passed	Y
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Average Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
g	1	2389.840	49.51	54.00	4.49	-48.75	3.0	Passed	Y
Measurement uncertainty				+0.66 dB / -0.72 dB					

Band Edge Compliance, g-mode, channel 11 (Operation mode 6)									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
g	11	2483.499	67.48	74.00	6.52	-22.05	3.0	Passed	Y
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Average Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
g	11	2483.874	53.22	54.00	0.78	-45.03	3.0	Passed	Y
Measurement uncertainty				+0.66 dB / -0.72 dB					

Band Edge Compliance, n20-mode, channel 1 (Operation mode 7)									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
n20	1	2389.060	70.45	74.00	3.55	-27.81	3.0	Passed	Y
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Average Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
n20	1	2390.035	50.23	54.00	3.77	-48.03	3.0	Passed	Y
Measurement uncertainty				+0.66 dB / -0.72 dB					

Band Edge Compliance, n20-mode, channel 11 (Operation mode 9)									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
n20	11	2484.104	63.76	74.00	10.24	-23.36	3.0	Passed	Y
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Average Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
n20	11	2483.654	52.94	54.00	1.06	-45.31	3.0	Passed	Y
Measurement uncertainty				+0.66 dB / -0.72 dB					

Test: Passed

**TEST EQUIPMENT USED FOR THE TEST:**

7

## 5.5 Maximum unwanted emissions

### 5.5.1 Method of measurement (conducted emissions in the restricted bands)

The relating measurements were carried out in a conducting manner. Therefore, the antenna connector was directly mounted to a spectrum analyser. The measurement procedure refers to part 12.2 D01 DTS Meas Guidance v03r01.

If emissions were detected during the preliminary measurements, they were measured using the following measurement procedures:

Procedure for average measurement: 12.2.5.1 – Trace averaging with continuous EUT transmission at full power:

The following method is valid if the EUT transmits continuously (duty cycle  $\geq 98\%$ )

- Set the RBW = 1 MHz.
- Set the VBW  $\geq 3 \times$  RBW.
- Detector = power average (RMS).
- Ensure that the number of measurement points in the sweep to  $\geq 2 \times$  (span/RBW).
- Averaging type = power
- Sweep time = auto
- Perform a trace average of at least 100 traces

Peak measurement procedure: 12.2.4

- Set the analyzer span to encompass the entire unwanted emission bandwidth.
- Set the RBW = specified in Table 3.
- Set the VBW  $\geq$  RBW.
- Set sweep time = auto.
- Detector = peak.
- Trace mode = max hold.
- Allow the trace to stabilize.
- Use the peak marker function to determine the peak power over the emission bandwidth.

**Table 3 RBW as a function of frequency**

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

### 5.5.1.1 Limit calculations

The following general procedure is described in chapter 12.2.2 of the D01 DTS Meas Guidance v03r01.

- a) Measure the conducted output power (in dBm) using the procedures described in 5.5.1.
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level
- c) Add the appropriate maximum ground reflections factor to the EIRP level (6 dB for frequencies  $\leq$  30 MHz, 4.7 for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $>$  1000 MHz)
- d) For devices with multiple antenna ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW)
- e) Convert the resultant level to an equivalent electric field strength using the following relationships:

$$E_r = EIRP - 20\log(d) + 104.8 \quad (1)$$

Where:

$E_r$  = electric field strength, in  $\text{dB}\mu\text{V/m}$   
 $EIRP$  = equivalent isotropic radiated power, in dBm  
 $d$  = specified measurement distance, in meters

- f) Compare the resultant electric field strength to the applicable limit

Document [6] states, that for transmitters with multiple outputs in the same band, summing of emissions and accounting for array gain have to be considered.

For combining emissions from multiple outputs, the spurious emissions at each output have to be measured and  $10\log(N)$  has to be added to the resulting value, whereby N refers to the number of outputs.

To account for directional gain which might occur in case of N transmit antennas, the directional has to be calculated as

$$G_{Dir} = G_{Ant} + 10\log(N)dB_i ,$$

whereby N is the number of antennas.

For the actual EUT the highest combination of antenna gain and used number of ports results in an additional value, added to the conducted spurious emission level, of 13 dB. Whereby the antenna has a gain of 3.5 dBi and the number of used ports is 3.

## 5.5.2 Method of measurement (conducted emissions in the unrestricted bands)

In any 100 kHz outside the authorized frequency band, the power shall be attenuated by 20 dB, compared to the highest in band power in any 100 kHz. This shall be demonstrated by using the peak power procedure. The reference level shall be measured using the procedure described in 5.5.2.1 and the emission level according to procedure 5.5.2.2.

### 5.5.2.1 Reference level measurement

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to  $\geq 1.5$  times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW  $\geq 3 \times$  RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.+
- i) Use the peak marker function to determine the maximum PSD level.

### 5.5.2.2 Emission level measurement

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq 3 \times$  RBW.
- d) Detector = peak.
- e) Ensure that the number of measurement points  $\geq$  span/RBW
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level.


### 5.5.3 Test results (conducted emissions)



#### 5.5.3.1 Emissions below 1 GHz

Ambient temperature	22 °C	Relative humidity	59 %
---------------------	-------	-------------------	------

The Emissions below 1 GHz were similar for all channels, modulations and data rates. Therefore only the results of an exemplary test case are submitted below.

136117\_9-150k\_allModesWLAN\_b\_1.wmf: conducted spurious emissions (operation mode 1):

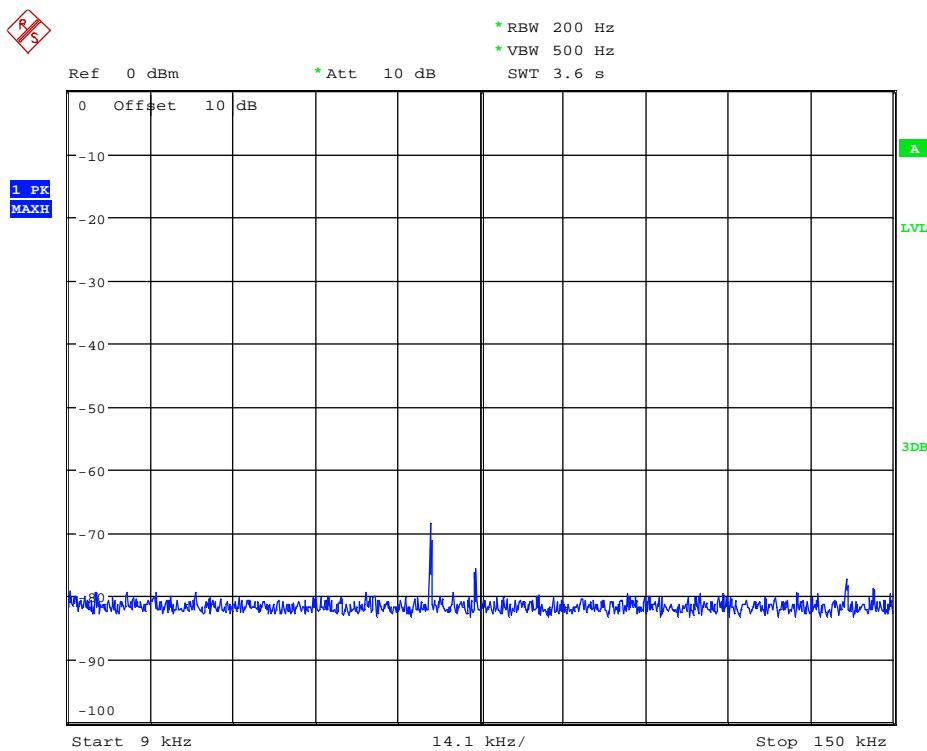

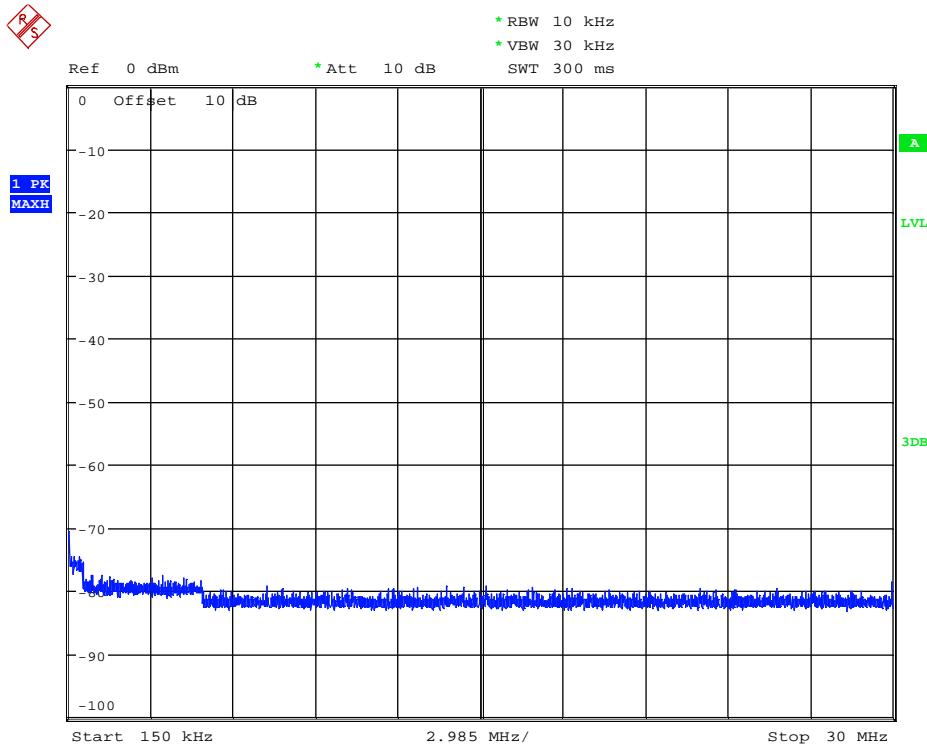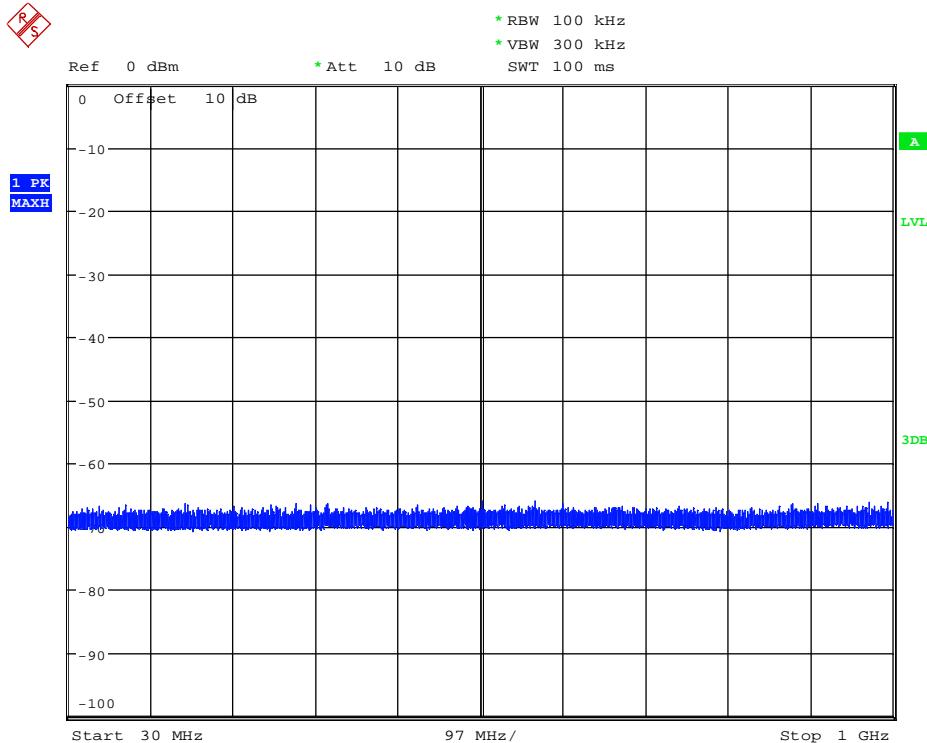136117\_150k-30M\_allModesWLAN\_b\_1.wmf: conducted spurious emissions (operation mode 1):

136117\_30M-1G\_allModesWLAN\_b\_1.wmf: conducted spurious emissions (operation mode 1):


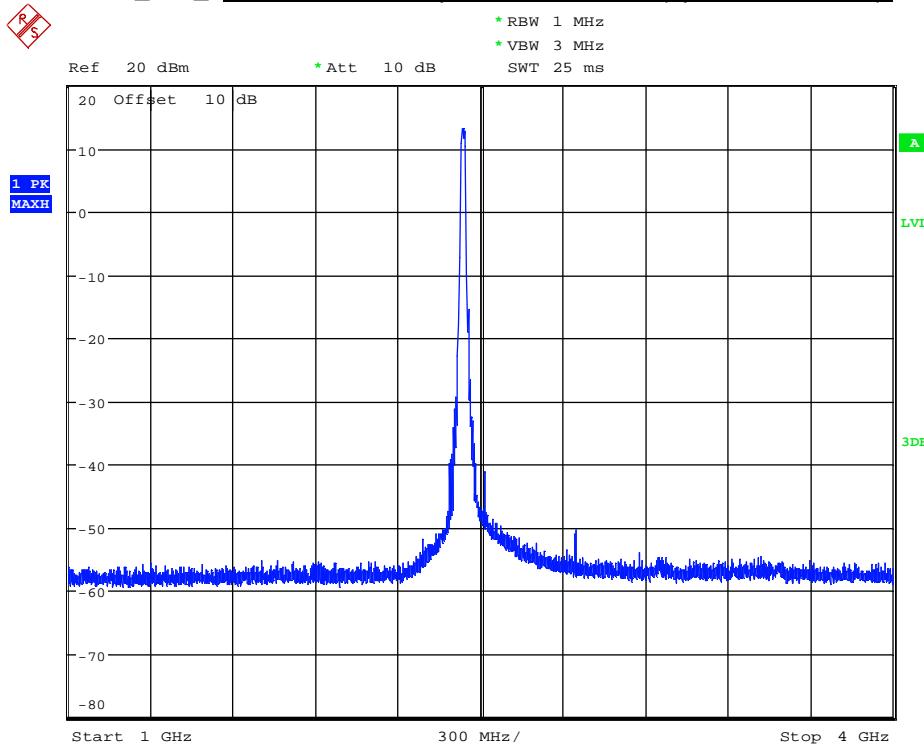
Spurious Emissions f < 1 GHz						
Peak Emission – Restricted Band						
Frequency [MHz]	Field Strength [dB $\mu$ V/m]	Max Peak Limit [dB $\mu$ V/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result
0.071	-4.69	30.59	35.28	-68.95	3.0	Passed
0.079	-11.12	29.71	40.83	-75.38	3.0	Passed



### 5.5.3.2 Emissions above 1 GHz

Ambient temperature	22 °C	Relative humidity	59 %
---------------------	-------	-------------------	------

The following results were measured at antenna port of the EUT. The plots shows an exemplary measurement results for the worst documented case. The other results are listed in the following tables.

136117\_SpurEmiss1-4G\_n20\_6.wmf: conducted spurious emissions (operation mode 5):

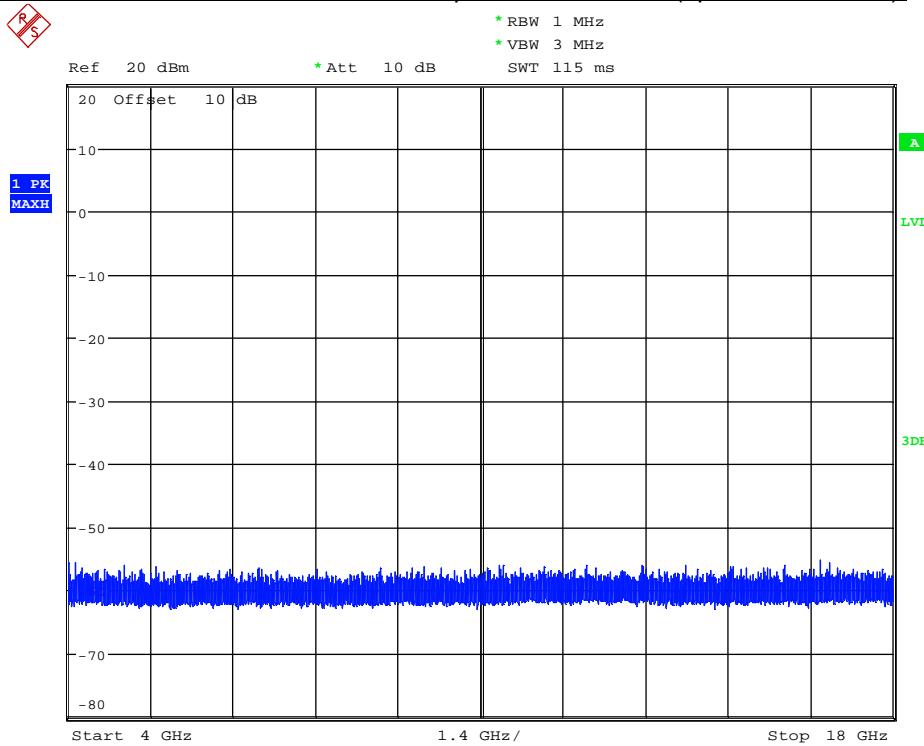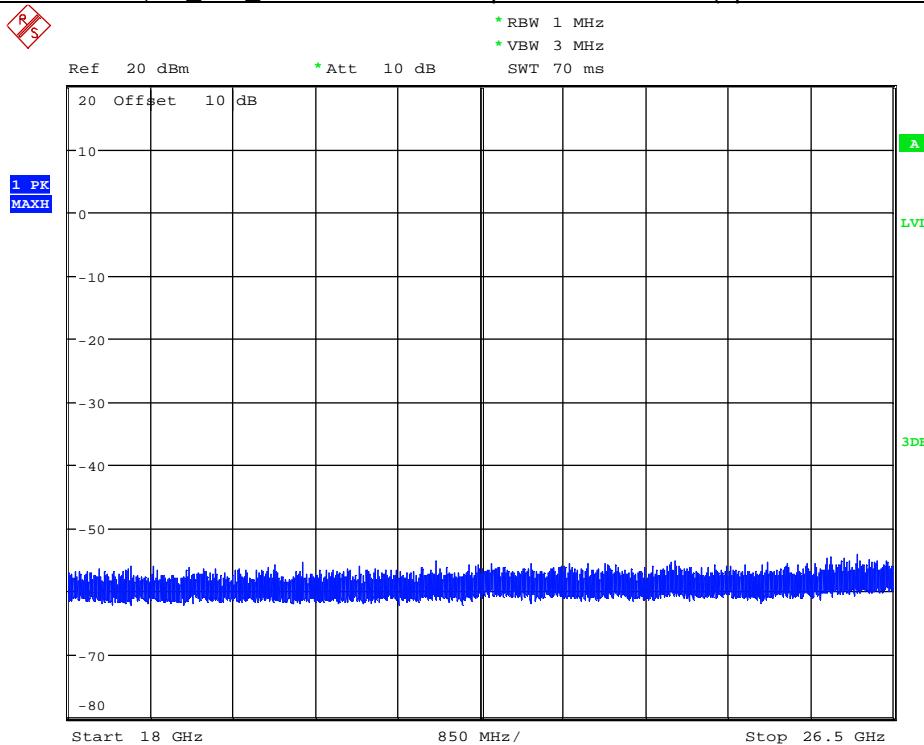

136117\_SpurEmiss4-18G\_n20\_6.wmf: conducted spurious emissions (operation mode 5):

136117\_SpurEmiss18-26,5G\_n20\_6.wmf: conducted spurious emissions (operation mode 5):


Spurious Emissions, b-mode, channel 1 (Operation mode 1)									
Peak Emission – Restricted Band									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Max Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
b	1	2813.888	49.37	74.00	24.63	-48.89	3.0	Passed	Y
Average Emission – Restricted Band									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Max Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
b	1	2813.963	43.25	54.00	10.75	-55.01	3.0	Passed	Y
Emissions in the non-restricted Bands									
WLAN Mode	Channel	Frequency [MHz]	Reading [dBm]	Limit [dBm]	Margin [dB]	Result	Restricted Band?		
b	1	2411.500	5.36	-	-	-	No		

Spurious Emissions, b-mode, channel 6 (Operation mode 2)									
Peak Emission – Restricted Band									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Max Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
b	6	2358.225	54.78	74.00	19.22	-43.48	3.0	Passed	Y
b	6	2843.356	48.39	74.00	25.61	-49.86	3.0	Passed	Y
Average Emission – Restricted Band									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Max Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
b	6	2360.300	37.25	54.00	16.75	-61.01	3.0	Passed	Y
b	6	2843.156	41.81	54.00	12.19	-56.44	3.0	Passed	Y
Emissions in the non-restricted Bands									
WLAN Mode	Channel	Frequency [MHz]	Reading [dBm]	Limit [dBm]	Margin [dB]	Result	Restricted Band?		
b	6	2436.500	5.49	-	-	-	No		

Spurious Emissions, b-mode, channel 11 (Operation mode 3)									
Peak Emission – Restricted Band									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Max Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
b	11	2872.250	48.01	74.00	25.99	-50.25	3.0	Passed	Y
Average Emission – Restricted Band									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Max Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
b	11	2872.300	40.19	54.00	13.81	-58.07	3.0	Passed	Y
Emissions in the non-restricted Bands									
WLAN Mode	Channel	Frequency [MHz]	Reading [dBm]	Limit [dBm]	Margin [dB]	Result	Restricted Band?		
b	11	2462.500	5.49	-	-	-	No		

Spurious Emissions, g-mode, channel 1 (Operation mode 4)									
Peak Emission – Restricted Band									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Max Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
g	1	2372.375	60.33	74.00	13.67	-37.93	3.0	Passed	Y
g	1	2258.046	52.67	74.00	21.33	-45.59	3.0	Passed	Y
g	1	2289.932	50.33	74.00	23.67	-47.93	3.0	Passed	Y
g	1	2491.415	59.05	74.00	14.95	-39.21	3.0	Passed	Y
g	1	2813.871	50.79	74.00	23.21	-47.47	3.0	Passed	Y
Average Emission – Restricted Band									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Max Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
g	1	2374.725	41.97	54.00	12.03	-56.28	3.0	Passed	Y
g	1	2262.771	35.04	54.00	18.96	-63.22	3.0	Passed	Y
g	1	2289.757	35.87	54.00	18.13	-62.38	3.0	Passed	Y
g	1	2487.890	40.75	54.00	13.25	-57.51	3.0	Passed	Y
g	1	2814.021	45.42	54.00	8.58	-52.84	3.0	Passed	Y
Emissions in the non-restricted Bands									
WLAN Mode	Channel	Frequency [MHz]	Reading [dBm]	Limit [dBm]	Margin [dB]	Result	Restricted Band?		
g	1	2413.275	3.13	-	-	-	No		
g	1	2573.209	-47.56	-16.87	30.69	Passed	No		
g	1	2533.242	-48.04	-16.87	31.17	Passed	No		

Spurious Emissions, g-mode, channel 6 (Operation mode 5)									
Peak Emission – Restricted Band									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Max Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
g	6	2356.450	56.02	74.00	17.98	-42.23	3.0	Passed	Y
g	6	2316.575	54.65	74.00	19.35	-43.61	3.0	Passed	Y
g	6	2483.541	60.45	74.00	13.55	-37.81	3.0	Passed	Y
g	6	2843.141	49.39	74.00	24.61	-48.87	3.0	Passed	Y
Average Emission – Restricted Band									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Max Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
g	6	2356.950	38.72	54.00	15.28	-59.54	3.0	Passed	Y
g	6	2321.825	36.66	54.00	17.34	-61.59	3.0	Passed	Y
g	6	2487.141	42.96	54.00	11.04	-55.29	3.0	Passed	Y
g	6	2843.216	43.43	54.00	10.57	-54.82	3.0	Passed	Y
Emissions in the non-restricted Bands									
WLAN Mode	Channel	Frequency [MHz]	Reading [dBm]	Limit [dBm]	Margin [dB]	Result	Restricted Band?		
g	6	2438.250	4.91	-	-	-	No		
g	6	2398.525	-48.83	-15.09	33.74	Passed	No		
g	6	2395.425	-50.70	-15.09	35.61	Passed	No		

Spurious Emissions, g-mode, channel 11 (Operation mode 6)									
Peak Emission – Restricted Band									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Max Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
g	11	2872.400	48.49	74.00	25.51	-49.77	3.0	Passed	Y
Average Emission – Restricted Band									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Max Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
g	11	2872.250	41.76	54.00	12.24	-56.50	3.0	Passed	Y
Emissions in the non-restricted Bands									
WLAN Mode	Channel	Frequency [MHz]	Reading [dBm]	Limit [dBm]	Margin [dB]	Result	Restricted Band?		
g	11	2463.250	4.35	-	-	-	No		
g	11	2500.400	-50.46	-15.65	34.81	Passed	No		
g	11	2542.000	-48.67	-15.65	33.02	Passed	No		
g	11	2582.025	-48.54	-15.65	32.89	Passed	No		
g	11	2627.250	-52.70	-15.65	37.05	Passed	No		
g	11	2385.775	-51.76	-15.65	36.11	Passed	No		
g	11	2307.000	-54.73	-15.65	39.09	Passed	No		
g	11	2305.725	-55.29	-15.65	39.64	Passed	No		

Spurious Emissions, n20-mode, channel 1 (Operation mode 7)									
Peak Emission – Restricted Band									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Max Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
n20	1	2363.536	55.56	74.00	18.44	-42.70	3.0	Passed	Y
n20	1	2291.546	51.05	74.00	22.95	-47.21	3.0	Passed	Y
n20	1	2257.768	52.78	74.00	21.22	-45.48	3.0	Passed	Y
n20	1	2334.389	54.72	74.00	19.28	-43.54	3.0	Passed	Y
n20	1	2368.871	59.29	74.00	14.71	-38.97	3.0	Passed	Y
n20	1	2491.474	57.01	74.00	16.99	-41.24	3.0	Passed	Y
n20	1	2814.021	50.63	74.00	23.37	-47.62	3.0	Passed	Y
Average Emission – Restricted Band									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Max Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
n20	1	2365.186	40.10	54.00	13.90	-58.16	3.0	Passed	Y
n20	1	2296.546	35.76	54.00	18.24	-62.50	3.0	Passed	Y
n20	1	2260.543	34.97	54.00	19.03	-63.29	3.0	Passed	Y
n20	1	2339.939	38.03	54.00	15.97	-60.23	3.0	Passed	Y
n20	1	2370.346	40.87	54.00	13.13	-57.38	3.0	Passed	Y
n20	1	2484.575	40.59	54.00	13.41	-57.67	3.0	Passed	Y
n20	1	2814.046	45.47	54.00	8.53	-52.79	3.0	Passed	Y
Emissions in the non-restricted Bands									
WLAN Mode	Channel	Frequency [MHz]	Reading [dBm]	Limit [dBm]	Margin [dB]	Result	Restricted Band?		
n20	1	2410.750	2.43	-	-	-	No		
n20	1	2575.734	-49.68	-17.57	32.11	Passed	No		
n20	1	2532.010	-45.93	-17.57	28.36	Passed	No		

Spurious Emissions, n20-mode, channel 6 (Operation mode 8)									
Peak Emission – Restricted Band									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Max Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
n20	6	2386.600	62.78	74.00	11.22	-35.48	3.0	Passed	Y
n20	6	2316.925	53.93	74.00	20.07	-44.33	3.0	Passed	Y
n20	6	2283.225	57.18	74.00	16.82	-41.08	3.0	Passed	Y
n20	6	2485.175	60.10	74.00	13.90	-38.16	3.0	Passed	Y
n20	6	2843.241	48.95	74.00	25.05	-49.31	3.0	Passed	Y
Average Emission – Restricted Band									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Max Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
n20	6	2389.950	41.13	54.00	12.87	-57.12	3.0	Passed	Y
n20	6	2315.825	36.41	54.00	17.59	-61.85	3.0	Passed	Y
n20	6	2283.625	35.54	54.00	18.46	-62.72	3.0	Passed	Y
n20	6	2483.975	42.82	54.00	11.18	-55.43	3.0	Passed	Y
n20	6	2843.141	43.40	54.00	10.60	-54.86	3.0	Passed	Y
Emissions in the non-restricted Bands									
n20	6	2438.275	4.90	-	-	-	-	No	
n20	6	2395.425	-47.53	-15.10	32.43	Passed	No		
n20	6	2550.722	-48.78	-15.10	33.68	Passed	No		
n20	6	2593.240	-49.55	-15.10	34.45	Passed	No		

Spurious Emissions, n20-mode, channel 11 (Operation mode 9)									
Peak Emission – Restricted Band									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Max Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
n20	11	2384.125	55.23	74.00	18.77	-43.03	3.0	Passed	Y
n20	11	2381.425	56.04	74.00	17.96	-42.22	3.0	Passed	Y
n20	11	2298.800	52.89	74.00	21.11	-45.37	3.0	Passed	Y
n20	11	2341.675	53.88	74.00	20.12	-44.37	3.0	Passed	Y
n20	11	2872.450	48.27	74.00	25.73	-49.98	3.0	Passed	Y
Average Emission – Restricted Band									
WLAN Mode	Channel	Frequency [MHz]	Field Strength [dBuV/m]	Max Peak Limit [dBuV/m]	Margin [dB]	Reading [dBm]	Antenna Gain + Array Gain [dBi]	Result	Restricted Band?
n20	11	2384.800	39.59	54.00	14.81	-59.07	3.0	Passed	Y
n20	11	2382.800	38.98	54.00	15.02	-59.28	3.0	Passed	Y
n20	11	2299.250	35.66	54.00	18.34	-62.60	3.0	Passed	Y
n20	11	2344.925	36.96	54.00	17.04	-61.30	3.0	Passed	Y
n20	11	2872.250	41.85	54.00	12.15	-56.40	3.0	Passed	Y
Emissions in the non-restricted Bands									
WLAN Mode	Channel	Frequency [MHz]	Reading [dBm]	Limit [dBm]	Margin [dB]	Result	Restricted Band?		
n20	11	2460.750	3.68	-	-	-	No		
n20	11	2307.050	-54.40	-16.32	38.08	Passed	No		
n20	11	2496.075	-49.66	-16.32	33.34	Passed	No		
n20	11	2540.725	-48.08	-16.32	31.77	Passed	No		

Test: Passed

**TEST EQUIPMENT USED FOR THE TEST:**

7, 28

## 5.5.4 Method of measurement (radiated emissions)

The radiated emission measurement is subdivided into four stages.

- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 30 MHz to 1 GHz.
- A final measurement carried out on an open area test side with reflecting ground plane and various antenna height in the frequency range 30 MHz to 1 GHz.
- A preliminary measurement carried out in a fully anechoic chamber with a variable antenna distance and height in the frequency range 1 GHz to 110 GHz.
- A final measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 1 GHz to 110 GHz.

All measurements will be carried out with the EUT working on the middle of the assigned frequency band.

### Preliminary and final measurement (1 GHz to 110 GHz)


This measurement will be performed in a fully anechoic chamber. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2009 [1].

### Preliminary measurement (1 GHz to 110 GHz)

The frequency range will be divided into different sub ranges depending on the frequency range of the used horn antenna. The spectrum analyser set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna, the antenna close to the EUT and while moving the antenna over all sides of the EUT. With the spectrum analyser in CLEAR / WRITE mode the cone of the emission should be found and than the measuring distance will be set to 3 m with the receiving antenna moving in this cone of emission. At this position the final measurement will be carried out.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	100 kHz
4 GHz to 12 GHz	100 kHz
12 GHz to 18 GHz	100 kHz
18 GHz to 26.5 GHz	100 kHz
26.5 GHz to 40 GHz	100 kHz
40 GHz to 60 GHz	100 kHz
50 GHz to 75 GHz	100 kHz
75 GHz to 110 GHz	100 kHz

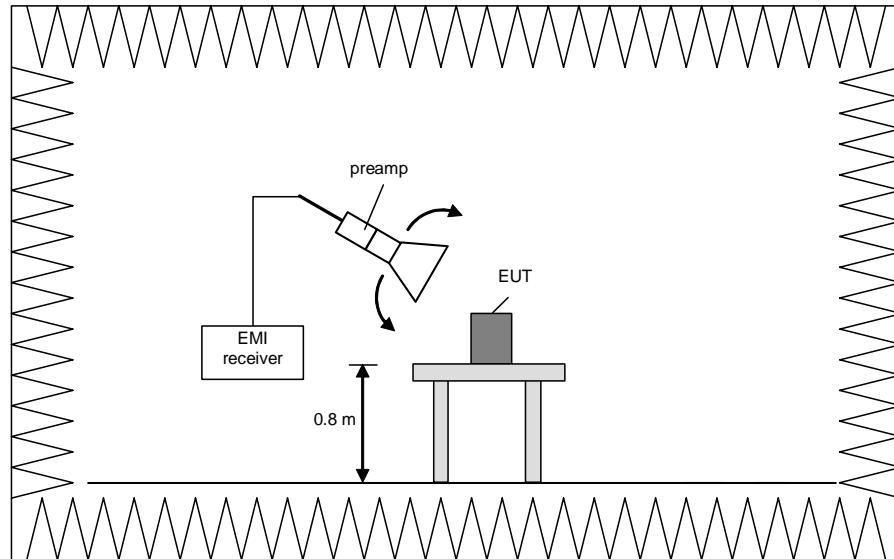


### Final measurement (1 GHz to 110 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1 MHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 ° in order to have the antenna inside the cone of radiation.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	1 MHz
4 GHz to 12 GHz	1 MHz
12 GHz to 18 GHz	1 MHz
18 GHz to 26.5 GHz	1 MHz
26.5 GHz to 40 GHz	1 MHz
40 GHz to 60 GHz	1 MHz
50 GHz to 75 GHz	1 MHz
75 GHz to 110 GHz	1 MHz

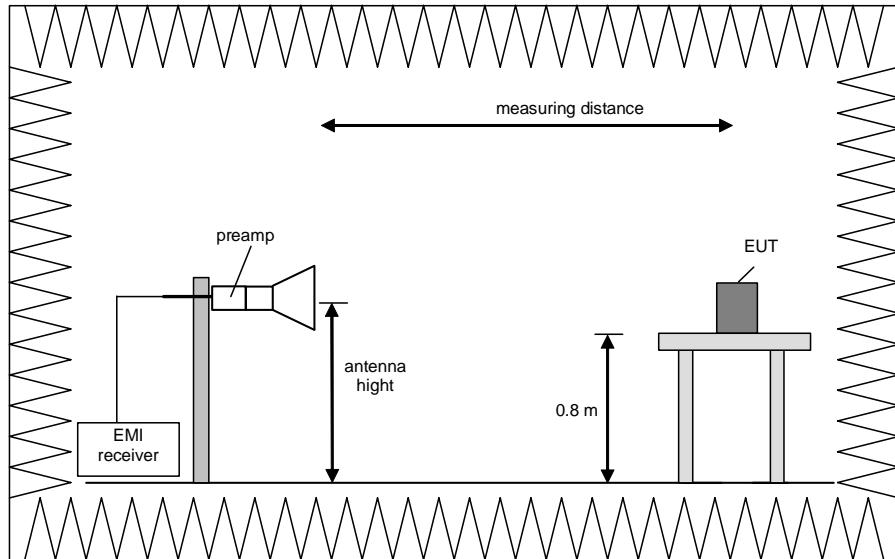

#### Procedure of measurement:

The measurements were performed in the frequency range 1 GHz to 4 GHz, 4 GHz to 12 GHz, 12 GHz to 18 GHz, 18 GHz to 26.5 GHz, 26.5 GHz to 40 GHz, 40 GHz to 60 GHz, 60 GHz to 75 GHz and 75 GHz to 110 GHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and move the antenna over all sides of the EUT (if necessary move the EUT to another orthogonal axis).
- 2) Change the antenna polarisation and repeat 1) with vertical polarisation.
- 3) Make a hardcopy of the spectrum.
- 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 5) Change the analyser mode to Clear / Write and found the cone of emission.
- 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3 m and the antenna will be still inside the cone of emission.
- 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarisation and azimuth and the peak and average detector, which causes the maximum emission.
- 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

Step 1) to 6) are defined as preliminary measurement.

## 5.5.5 Test results (radiated emissions) – cabinet emissions

### 5.5.5.1 Preliminary radiated emission measurement

Ambient temperature	21 °C	Relative humidity	51 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in Table 2.



Test record: All results are shown in the following.



Supply voltage: During all measurements the host of the EUT was powered with 5 V via an AC/DC Adapter.

Remark: Document [3] states in 12.2.1, that in case of conducted measurements, additional radiated cabinet emission measurements must be performed. The measurements were performed at the worst case modulation, namely 802.11b mode with at channel 1, 6 and 11.

Only the plots of the worst case emissions are submitted for every frequency range above 1 GHz in the preliminary results.


The Emissions below 1 GHz were equal for all antenna ports, transmit frequencies, modulation schemes and data rates. Therefore only the results of an exemplary test case are submitted below.

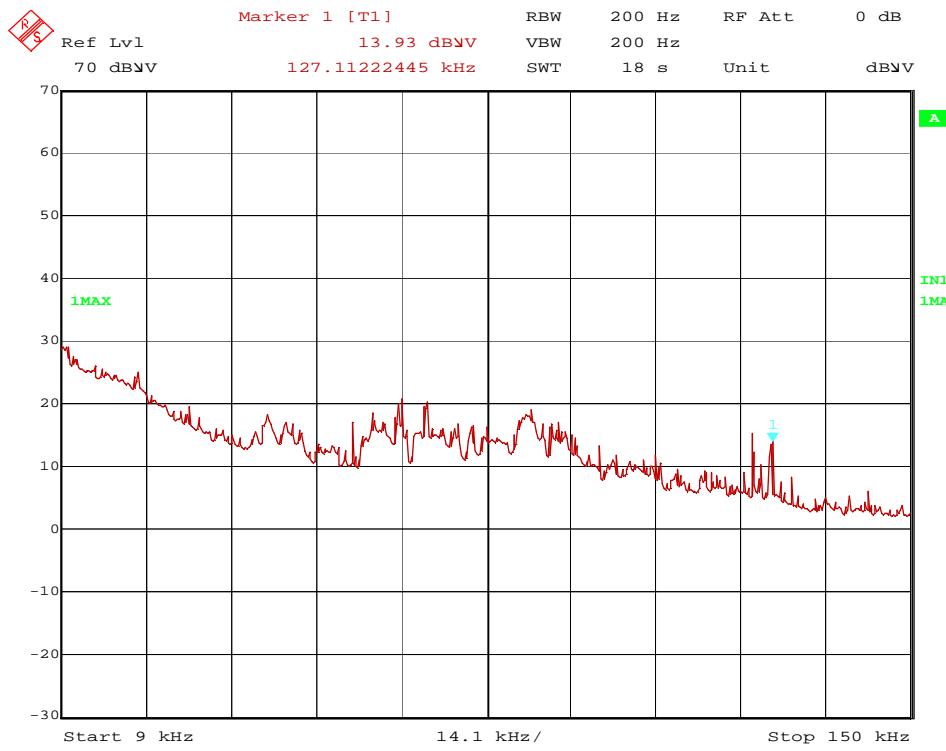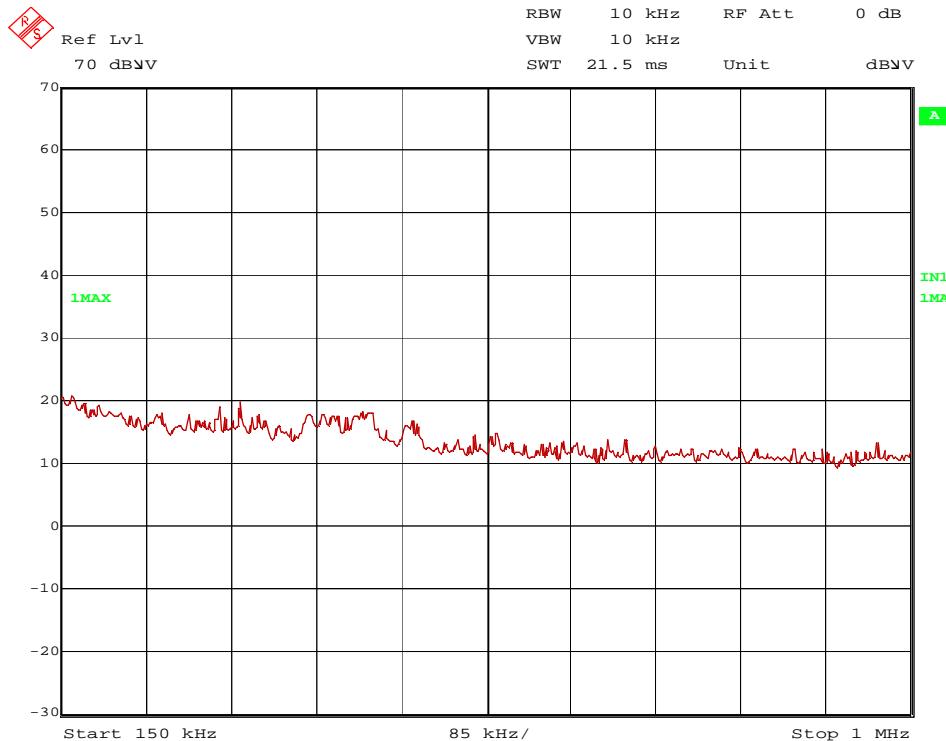117 W26.wmf: Spurious emissions from 9 kHz to 150 kHz:

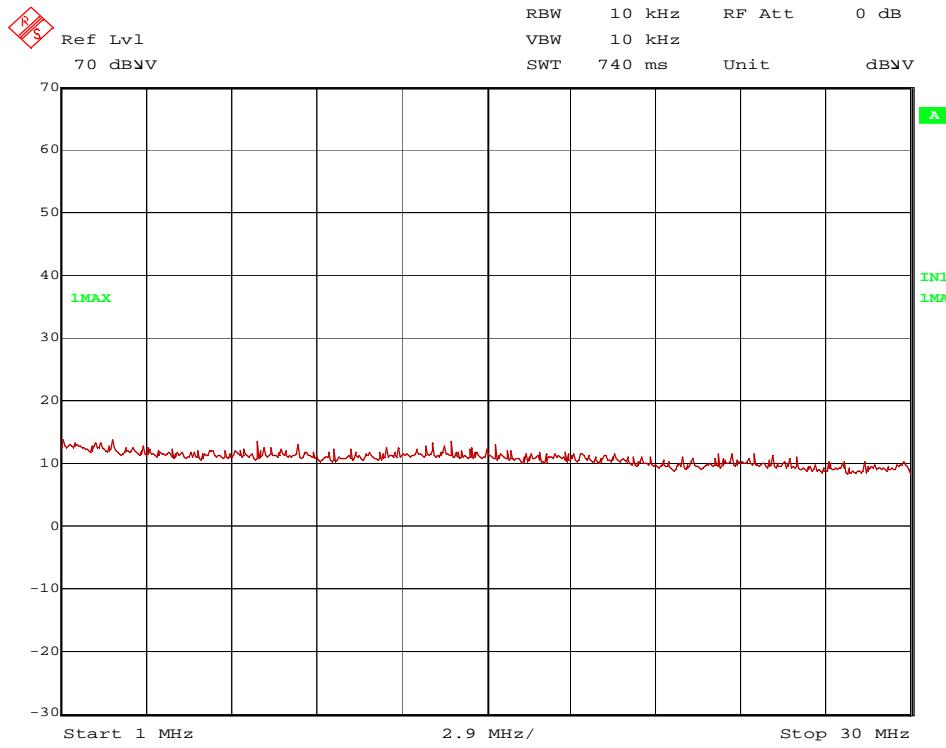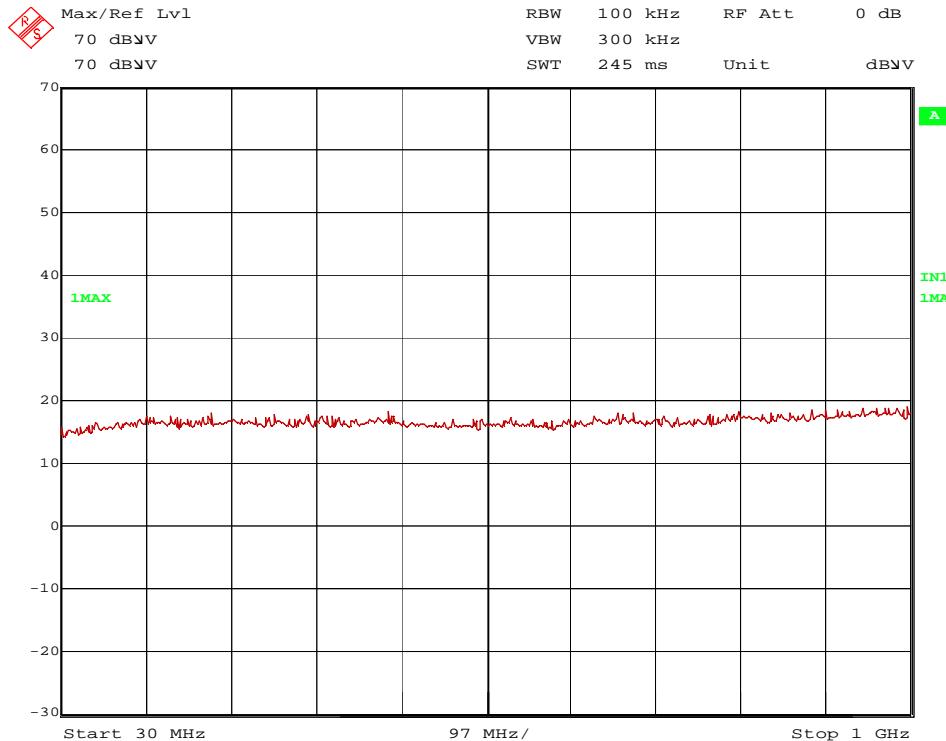117 W27.wmf: Spurious emissions from 150 kHz to 1 MHz:


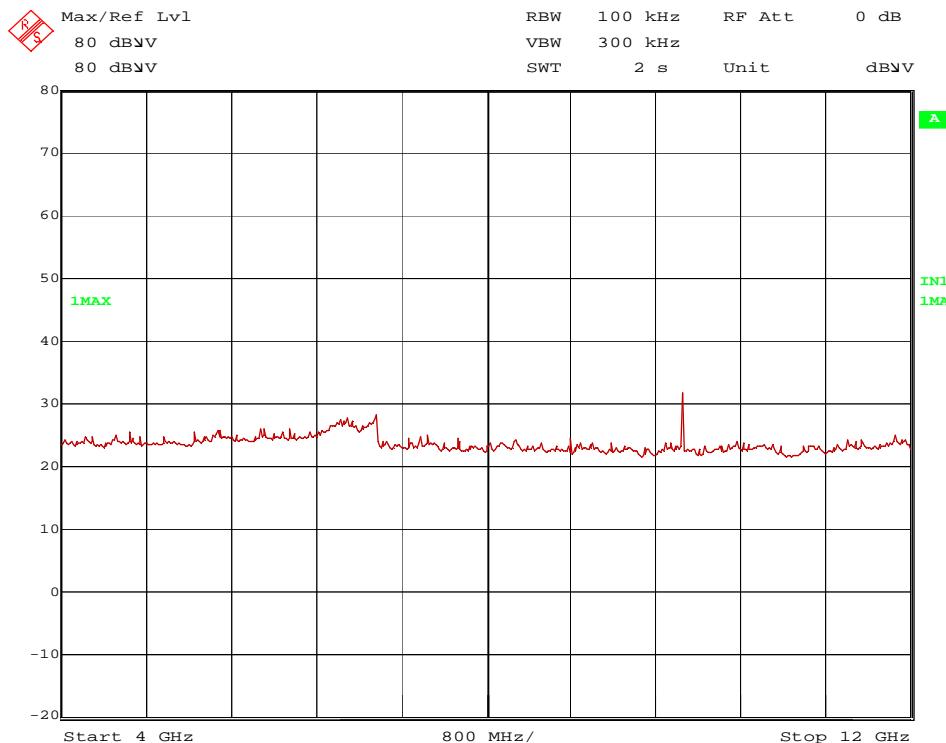
117 W28: Spurious emissions from 1 MHz to 30 MHz:

136117 WLAN2,4 30M-1G.wmf: Spurious emissions from 30 MHz to 1 GHz:

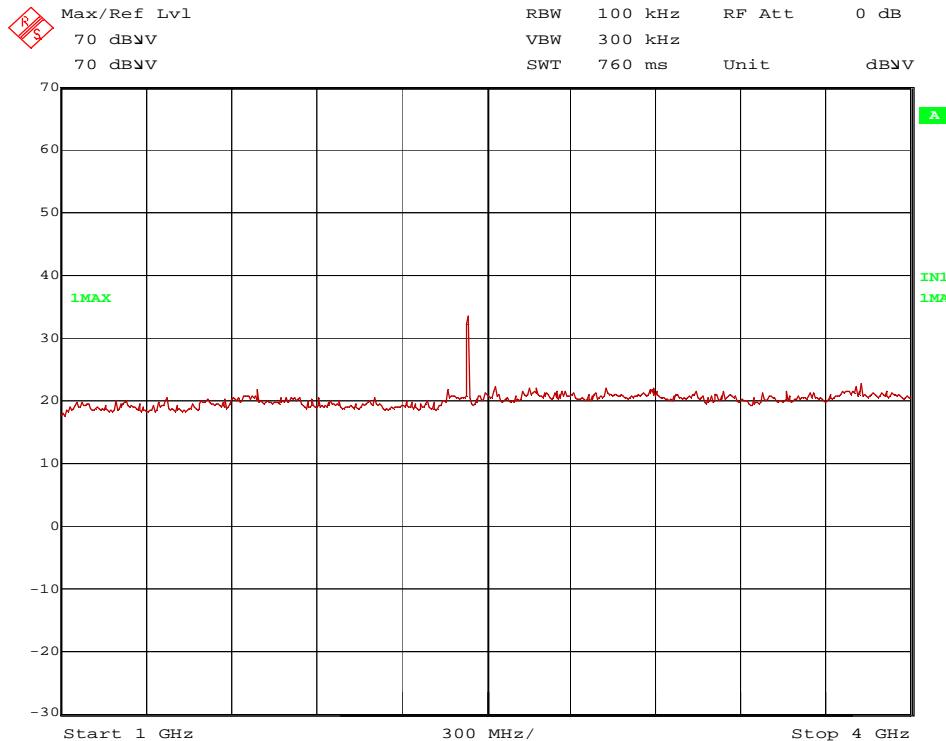
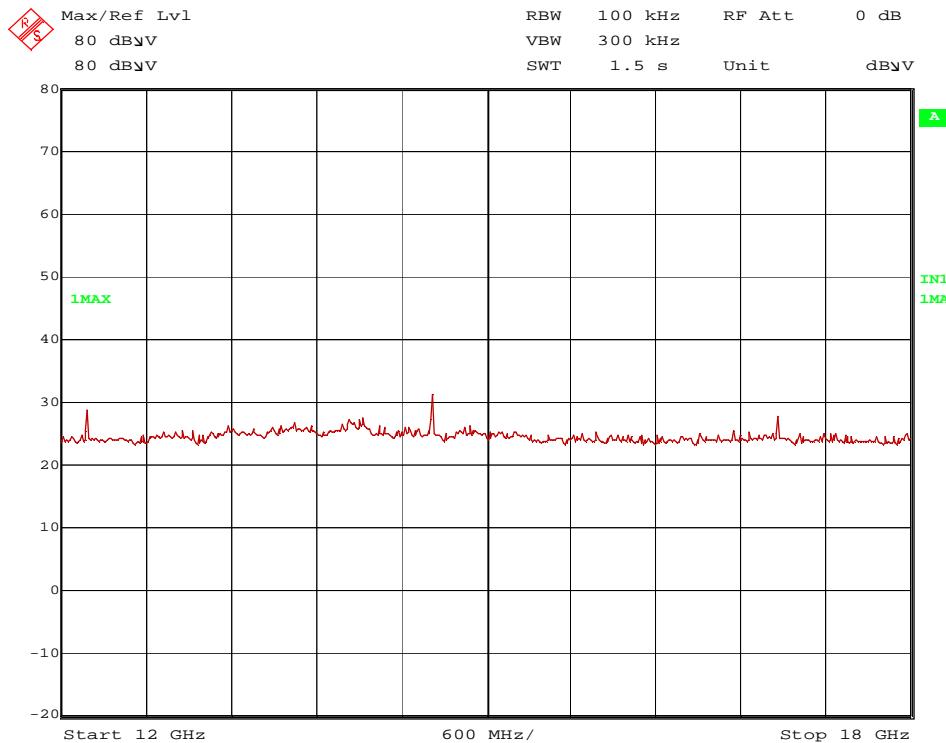
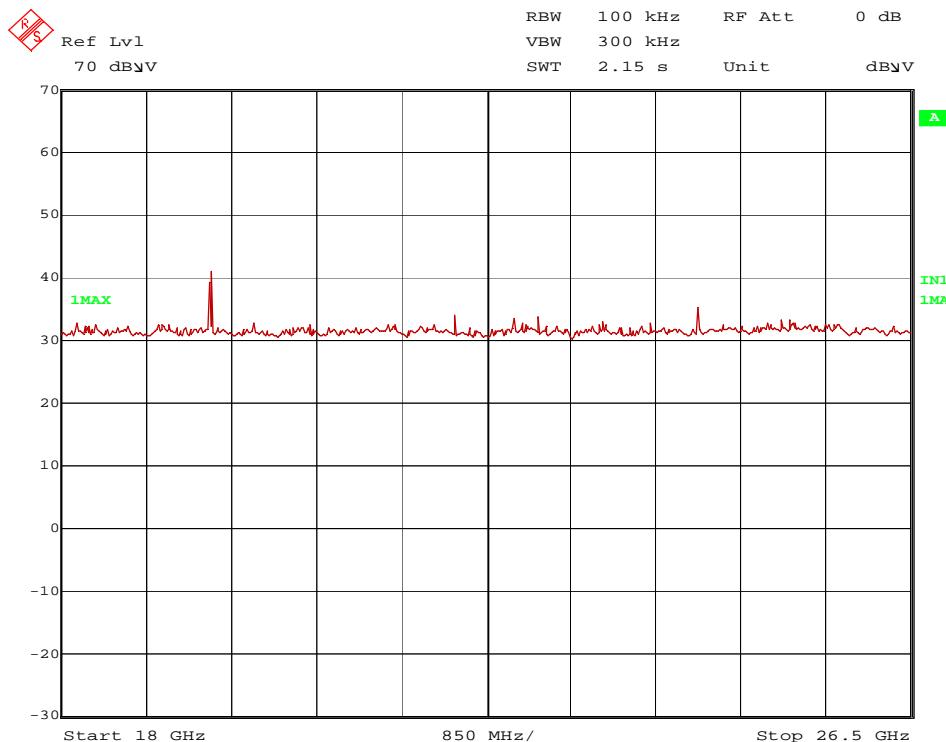
**Transmitter operates at the middle of the assigned frequency band (operation mode 5)**

136117\_ch11\_g\_9M\_Pwr16.5\_pos2\_1-4GHz.wmf: Spurious emissions from 1 GHz to 4 GHz (operation mode 5):



136117\_ch11\_g\_9M\_Pwr16.5\_pos2\_4-12GHz.wmf: Spurious emissions from 4 GHz to 12 GHz (operation mode 5):



136117 ch6 12-18G.wmf: Spurious emissions from 12 to 18 GHz, q-mode, ch6(operation mode 5):

136117 18-26,5G.wmf: Spurious emissions from 18 – 26.5 GHz, q-mode, ch6(operation mode 5):


The following frequencies were found inside the restricted bands during the preliminary radiated emission test:

- 12185 and 19496 MHz.

The following frequencies were found outside the restricted bands during the preliminary radiated emission test:

- 9748, 14622, 17059, 21933 and 24370 MHz.

These frequencies have to be measured in a final measurement. The results are presented in the following.

<b>TEST EQUIPMENT USED FOR THE TEST:</b>
5, 6, 8 - 25, 29

### 5.5.5.2 Final radiated emission measurement (9 kHz to 1 GHz)

No emissions could be found in the final measurement on the open area test site, therefore no results for the final measurements are submitted.

### 5.5.5.3 Final radiated emission measurement (1 GHz to 25 GHz)

Ambient temperature	22 °C	Relative humidity	55 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the host of the EUT was powered with 5 V via an laboratory power supply..

Resolution bandwidth: For all measurements a resolution bandwidth of 1 MHz was used.

Additional information: For simplification all values were compared to the restricted band limits. Position 2 was found to have the worst case spurious emissions.

#### Transmitter operates at the lower end of the assigned frequency band (operation mode 4)

##### Result measured with the peak detector:

Frequency MHz	Meas. Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Readings dB $\mu$ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Pos.
9648.0	57.2	74.0	16.8	36.9	37.3	23.3	6.3	150	Hor.	2
12060.0	45.2	74.0	28.8	34.9	33.6	26.3	3.0	150	Hor.	2
14472.0	45.0	74.0	29.0	34.7	33.7	26.9	3.5	150	Hor.	2
16884.0	45.9	74.0	28.1	36.6	33.8	28.3	3.8	150	Hor.	3
19296.0	49.2	74.0	24.8	45.8	37.1	37.8	4.1	150	Vert.	2
21708.0	46.5	74.0	27.5	42.8	37.2	37.9	4.4	150	Hor.	2
24120.0	46.4	74.0	27.6	42.8	37.2	38.4	4.8	150	Hor.	2
+2.2 dB / -3.6 dB				+2.2 dB / -3.6 dB						

##### Result measured with the average detector:

Frequency MHz	Meas. Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Readings dB $\mu$ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Pos.
9648	52.1	54.0	1.9	31.8	37.3	23.3	6.3	150	Hor.	2
12060	34.9	54.0	19.1	24.6	33.6	26.3	3	150	Hor.	2
14472	35.0	54.0	19.0	24.7	33.7	26.9	3.5	150	Hor.	2
16884	39.8	54.0	14.2	30.5	33.8	28.3	3.8	150	Vert.	3
19296	43.8	54.0	10.2	40.4	37.1	37.8	4.1	150	Hor.	2
21708	37.6	54.0	16.4	33.9	37.2	37.9	4.4	150	Hor.	2
24120	38.3	54.0	15.7	34.7	37.2	38.4	4.8	150	Hor.	2
+2.2 dB / -3.6 dB				+2.2 dB / -3.6 dB						

**Transmitter operates at the middle of the assigned frequency band (operation mode 5)**

**Result measured with the peak detector:**

Frequency MHz	Meas. Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Readings dB $\mu$ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Pos.
9748.0	56.2	74.0	17.8	36.1	37.3	23.6	6.4	150	Hor.	2
12185.0	46.9	74.0	27.1	36.7	33.6	26.5	3.1	150	Vert.	2
14622.0	49.0	74.0	25.0	38.9	33.7	27	3.4	150	Vert.	2
17059.0	44.4	74.0	29.6	35.1	33.8	28.4	3.9	150	Hor.	3
19496.0	49.9	74.0	24.1	46.1	37.1	37.5	4.2	150	Hor.	2
21933.0	45.9	74.0	28.1	41.8	37.2	37.7	4.6	150	Hor.	2
24370.0	46.4	74.0	27.6	42.9	37.2	38.4	4.7	150	Hor.	2
+2.2 dB / -3.6 dB				+2.2 dB / -3.6 dB						

**Result measured with the average detector:**

Frequency MHz	Meas. Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Readings dB $\mu$ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Pos.
9748.0	50.8	54.0	3.2	30.7	37.3	23.6	6.4	150	Hor.	2
12185.0	36.0	54.0	18.0	25.8	33.6	26.5	3.1	150	Vert.	2
14622.0	36.1	54.0	17.9	26	33.7	27	3.4	150	Vert.	2
17059.0	36.4	54.0	17.6	27.1	33.8	28.4	3.9	150	Hor.	3
19496.0	45.2	54.0	8.8	41.4	37.1	37.5	4.2	150	Hor.	2
21933.0	37.2	54.0	16.8	33.1	37.2	37.7	4.6	150	Hor.	2
24370.0	38.4	54.0	15.6	34.9	37.2	38.4	4.7	150	Hor.	2
+2.2 dB / -3.6 dB				+2.2 dB / -3.6 dB						

**Transmitter operates at the upper end of the assigned frequency band (operation mode 6)**

**Result measured with the peak detector:**

Frequency MHz	Meas. Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Readings dB $\mu$ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Pos.
9848.0	55.8	74.0	18.2	35.5	37.3	23.4	6.4	150	Hor.	2
12310.0	47.5	74.0	26.5	37.2	33.7	26.5	3.1	150	Vert.	2
14772.0	47.8	74.0	26.2	37.6	33.7	27	3.5	150	Vert.	2
17234.0	42.4	74.0	31.6	33.2	33.8	28.6	4	150	Hor.	3
19696.0	50.5	74.0	23.5	46.9	37.1	37.7	4.2	150	Hor.	2
22158.0	45.8	74.0	28.2	41.9	37.2	37.8	4.5	150	Hor.	2
24620.0	46.4	74.0	27.6	43.1	37.2	38.4	4.5	150	Hor.	2
+2.2 dB / -3.6 dB				+2.2 dB / -3.6 dB						

**Result measured with the average detector:**

Frequency MHz	Meas. Result dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Readings dB $\mu$ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Pos.
9848.0	49.8	54.0	4.2	29.5	37.3	23.4	6.4	150	Hor.	2
12310.0	35.9	54.0	18.1	25.6	33.7	26.5	3.1	150	Vert.	2
14772.0	36.9	54.0	17.1	26.7	33.7	27	3.5	150	Vert.	2
17234.0	32.1	54.0	21.9	22.9	33.8	28.6	4	150	Hor.	3
19696.0	46.2	54.0	7.8	42.6	37.1	37.7	4.2	150	Hor.	2
22158.0	36.8	54.0	17.2	32.9	37.2	37.8	4.5	150	Hor.	2
24620.0	38.6	54.0	15.4	35.3	37.2	38.4	4.5	150	Hor.	2
+2.2 dB / -3.6 dB				+2.2 dB / -3.6 dB						

Test: Passed

**TEST EQUIPMENT USED FOR THE TEST:**

5, 6, 8 - 15,17-25, 29


## 5.6 Conducted emissions on power supply lines (150 kHz to 30 MHz)

### 5.6.1 Method of measurement

This test will be carried out in a shielded chamber. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm above the ground plane. Floor-standing devices will be placed directly on the ground plane. The setup of the Equipment under test will be in accordance to ANSI C63.4-2009 [1].

The frequency range 150 kHz to 30 MHz will be measured with an EMI Receiver set to MAX Hold mode with peak and average detector and a resolution bandwidth of 9 kHz. A scan will be carried out on the phase (or plus pole in case of DC powered devices) of the AC mains network. If levels detected 10 dB below the appropriate limit. this emission will be measured with the average and quasi-peak detector on all lines.

Frequency range	Resolution bandwidth
150 kHz to 30 MHz	9 kHz

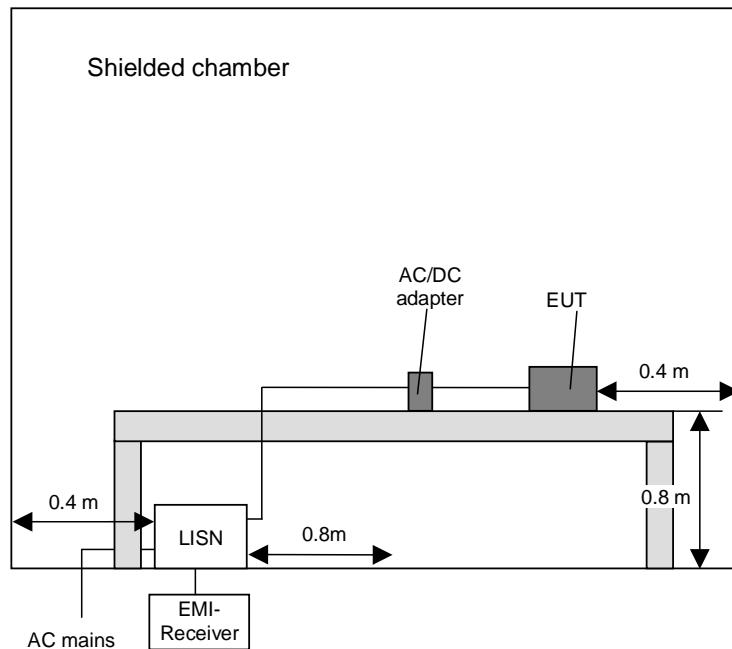

### 5.6.2 Test results (conducted emissions on power supply lines)

Ambient temperature	20 °C	Relative humidity	52 %
---------------------	-------	-------------------	------


Position of EUT: For the test the EUT were plugged into a laptop PC via a RS232 cable. The EUT was set to continuous transmission on channel 6 (n20 mode. 6.5 Mbps. PWR: 16.5 dBm. operation mode 8) by the laptop PC. The laptop PC with the inserted EUT was set-up on a non-conducting table of a height of 0.8 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: Measurement performed with US 120V/60Hz. For the test a power supply type 2121 from Mascot was used.

The curves in the diagram only represent for each frequency point the maximum measured value of all preliminary measurements. which were made for each power supply line. The top-measured curve represents the peak measurement and the bottom-measured curve the average measurement. The quasi-peak measured points are marked by an x and the average measured points by an +.

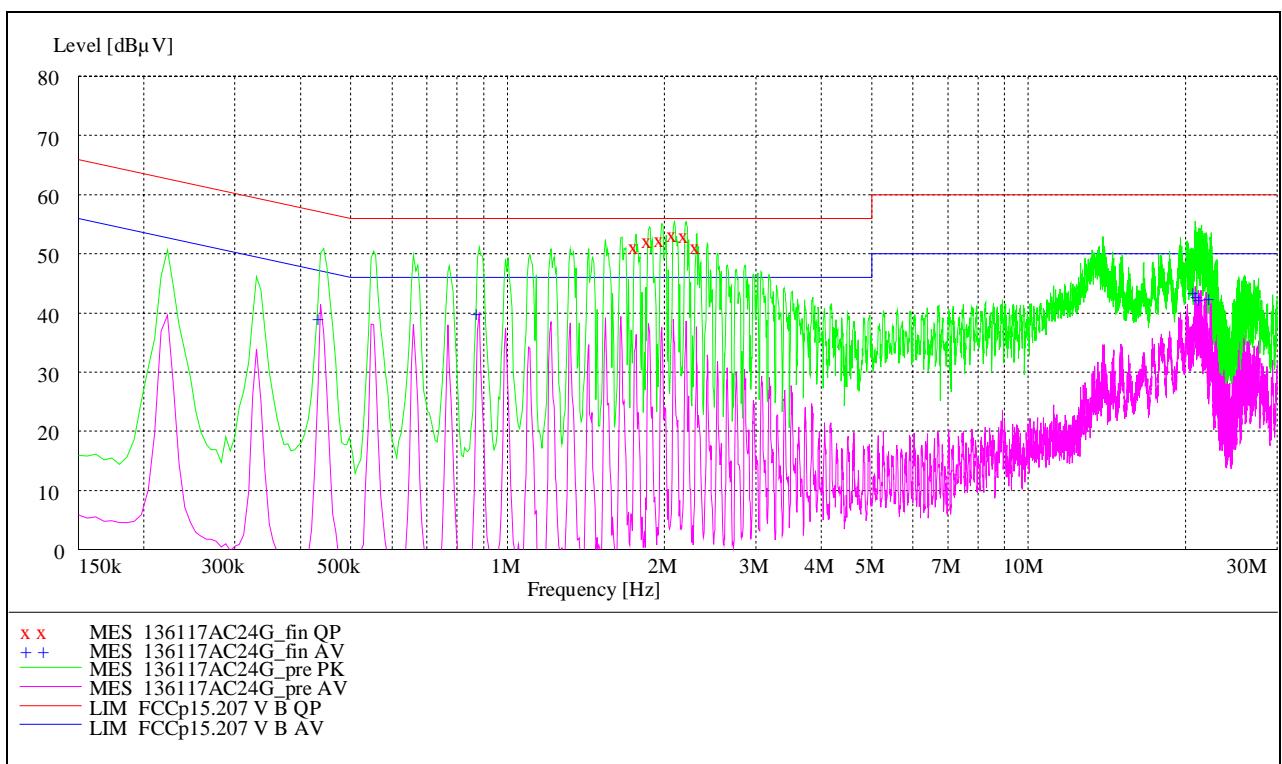

Data record name: 136117AC24G

Result measured with the quasipeak detector (marked by an x):

Frequency MHz	Level dB $\mu$ V	Transducer dB	Limit dB $\mu$ V	Margin dB	Line	PE
1.764000	51.50	0.7	56.0	4.5	L1	GND
1.872000	52.50	0.7	56.0	3.5	L1	GND
1.980000	52.90	0.8	56.0	3.1	L1	FLO
2.094000	53.70	0.7	56.0	2.3	L1	GND
2.202000	53.50	0.8	56.0	2.5	L1	GND
2.316000	51.70	0.7	56.0	4.3	L1	FLO

Test: Passed

**TEST EQUIPMENT USED FOR THE TEST:**

1 – 5

## 6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal. Due
1	Shielded chamber M47	-	Albatross Projects	B83117-C6439-T262	480662	Weekly verification (system cal.)	
2	EMI Receiver	ESIB 26	Rohde & Schwarz	1088.7490	481182	03/21/2014	03/2016
3	LISN	NSLK8128	Schwarzbeck	8128155	480058	04/05/2012	05/2014
4	High pass filter	HR 0.13-5ENN	FSY Microwave Inc.	DC 0109 SN 002	480340	Weekly verification (system cal.)	
5	EMI Software	ES-K1	Rohde & Schwarz	-	480111	-	-
6	Fully anechoic chamber M20	-	Albatross Projects	B83107-E2439-T232	480303	Weekly verification (system cal.)	
7	Spectrum analyser	FSU	Rohde & Schwarz	200125	480956	07/15/2013	07/2015
8	Measuring receiver	ESI 40	Rohde & Schwarz	100064	480355	02/26/2014	02/2016
9	Controller	MCU	Maturo	MCU/043/971107	480832	-	-
10	Turntable	DS420HE	Deisel	420/620/80	480315	-	-
11	Antenna support	AS615P	Deisel	615/310	480187	-	-
12	Antenna	CBL6112 B	Chase	2688	480328	04/14/2014	04/2017
13	Antenna	3115 A	EMCO	9609-4918	480183	11/09/2011	11/2014
14	Standard Gain Horn 11.9 GHz – 18 GHz	18240-20	Flann Microwave	483	480294	Six month verification (system cal.)	
15	Standard Gain Horn 17.9 GHz – 26.7 GHz	20240-20	Flann Microwave	411	480297	Six month verification (system cal.)	
16	Standard Gain Horn Antenne 26.4 – 40.1 GHz	22240-20	Flann Microwave	469	480229	Six month verification (system cal.)	
17	RF-cable No. 3	Sucoflex 106B	Huber&Suhner	0563/6B / Kabel 3	480670	Weekly verification (system cal.)	
18	RF-cable No. 40	Sucoflex 106B	Huber&Suhner	0708/6B / Kabel 40	481330	Weekly verification (system cal.)	
19	RF-cable No. 36	Sucoflex 106B	Huber&Suhner	500003/6B / Kabel 36-	481680	Weekly verification (system cal.)	
20	RF-cable 1 m	KPS-1533-400-KPS	Insulated Wire	-	480300	Six month verification (system cal.)	
21	RF-cable 2 m	KPS-1533-800-KPS	Insulated Wire		480302	Six month verification (system cal.)	
22	Preamplifier	JS3-00101200-23-5A	Miteq	681851	480337	Six month verification (system cal.)	
23	Preamplifier	JS3-12001800-16-5A	Miteq	571667	480343	Six month verification (system cal.)	
24	Preamplifier	JS3-18002600-20-5A	Miteq	658697	480342	Six month verification (system cal.)	
25	Loop antenna	HFH2-Z2	Rohde & Schwarz	832609/014	480059	02/2014	02/2016
26	Power Meter	NRVD	Rohde & Schwarz	833697/030	480589	07/2013	07/2015
27	Peak Power Sensor	NRV-Z32	Rohde & Schwarz	849745/016	480551	07/2013	07/2015
28	4 GHz High Pass Filter	WHKX4.0/18 G-8SS	Wainwright Instruments	1	480587	Weekly verification (system cal.)	

29	Single Control Unit	SCU	Maturo GmbH	SCU/006/971107	480831	Calibration not necessary
30	High-pass Filter	H26G40G1	Microwave Circuits, Inc.	33471	480593	Six month verification (system cal.)
31	Temperature Test Chamber	MK 240	Binder	05-79022	480462	02/18/2014 08/2015

## 7 REPORT HISTORY

Report Number	Date	Comment
F136117E1	10 July 2014	Document created

## 8 LIST OF ANNEXES

ANNEX A            TEST SET-UP PHOTOS            4 pages

136117\_01: Test setup - Radiated emission. Antennas terminated (fully anechoic chamber)  
 136117\_32: Test setup - Radiated emission. Antennas terminated (fully anechoic chamber)  
 136117\_03: Test setup - Radiated emission. Antennas terminated (fully anechoic chamber)  
 136117\_04: Test setup – conducted emissions on power supply lines

ANNEX B            EXTERNAL PHOTOGRAPHS            3 pages

136117\_18.jpg: Carrier Board + EUT – Top View  
 136117\_19.jpg: Carrier Board – Bottom View  
 136117\_17.jpg: Carrier Board – Side View / Connectors

ANNEX C            INTERNAL PHOTOGRAPHS            3 pages

136117\_11.JPG: EUT - top view, with shielding  
 136117\_13.JPG: EUT - top view, shielding removed  
 136117\_12.JPG: EUT – bottom view