

# TEST REPORT

Ref. Report No.

01-341-053-01

Name and address of the applicant

Drake Systems Co., Ltd.  
Acetechno 804, Yangpyung-dong, Youngdeungpo-ku,  
Seoul, 150-103, Korea

Standard / Test regulation

FCC Part 15, Subpart C

Test result

Pass

Incoming date : November 05, 2001

Test date : November 27, 2001

Test item(s) :

Low Power Transceiver, Rx Verified  
(Car Alarm System)

Model/type ref. :

DTH-3002R

Manufacturer :

Drake Systems Co., Ltd.

Additional information :


-Required Authorization : Certification  
-FCC ID. : PVQDSCAR002

-Note : Test report(Verification) of Receiver portion of this unit is issued on Ref. Report No. 01-341-053-02.

Issue date : November 30, 2001

*This test report only responds to the tested sample and shall not be reproduced except in full without written approval of the Korea Testing Laboratory.*

Tested and reported by



Jeong-Min Kim, Senior Engineer

Reviewed by



Won-Seo Cho, EMC Team Leader

**KOREA TESTING  
LABORATORY**

## **TABLE OF CONTENTS**

|   |      |
|---|------|
| I. GENERAL INFORMATION.....                             | 3    |
| 1. Grantee's Name and Mailing Address                   |      |
| 2. Manufacturer's Name and Mailing Address              |      |
| 3. Equipment Descriptions                               |      |
| 4. Rules and Regulations                                |      |
| 5. Measuring Procedure                                  |      |
| 6. Date of Measurement                                  |      |
| α. GENERAL REQUIREMENTS OF THE EUT.....                 | 4    |
| 1. Labelling Requirement (Section 15.19)                |      |
| 2. Information to User (Sections 15.21)                 |      |
| 3. Special Accessories (Section 15.27)                  |      |
| 4. Compliant Conditions (Section 15.231)                |      |
| β. RADIATED EMISSION MEASUREMENT (Section 15.231).....  | 6-12 |
| 1. Test Procedure                                       |      |
| 2. Photograph of the test configuration                 |      |
| 3. Sample Calculation                                   |      |
| 4. Measurement Data                                     |      |
| 5. Reference Data                                       |      |
| χ. OCCUPIED BANDWIDTH MEASUREMENT (Section 15.231)..... | 13   |
| δ. TEST EQUIPMENTS USED FOR MEASUREMENT.....            | 14   |

. GENERAL INFORMATION

1. Grantee's Name and : Drake Systems Co., Ltd.  
Mailing Address Acetechno 804, Yangpyung-dong, Youngdeungpo-ku,  
Seoul, 150-103, Korea

2. Manufacturer's Name and : Drake Systems Co., Ltd.  
Mailing Address Acetechno 804, Yangpyung-dong, Youngdeungpo-ku,  
Seoul, 150-103, Korea

3. Equipment Descriptions

3.1 Operating Frequency : 433.92 MHz  
3.2 Type of Emission : Pulse Code Signal  
3.3 Power Supply : DC 1.5V(Battery)

4. Rules and Regulations : FCC Part 15, Subpart C

5. Measuring Procedure : ANSI C63.4-1992

6. Place of Measurement : Absorber-lined Room (KTL)

7. Date of Measurement

7.1 Line Conducted : Not Applicable  
7.2 Radiated Emission : November 27, 2001

. GENERAL REQUIREMENTS OF THE EUT

## 1. Labelling Requirement (Section 15.19)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

1.1 Location of Label : User's Guide Manual1.2 How Applied : Printed

## 2. Information to User (Section 15.21)

The following or similar statements were provided in the manual for user instruction.

Please refer page 10 of the attached manual for details.

CAUTION : Any changes or modifications in construction of this device which are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## 3. Special Accessories (Section 15.27)

3.1 Were the special Accessories provided?  yes,  no

3.2 If yes, details for the special accessories are as follows :

3.3 If yes, were the appropriate instructions provided on the first page of the text concerned with the installation of the device?

yes,  no

3.4 Are these accessories provided of the type which can be readily obtained from multiple retail outlets ?

yes,  no

And therefore does the manual specify what additional components or accessories are required to be used in order to comply with the Rules?

yes,  no

4. Compliant Conditions (Section 15.231)

4.1 Was the EUT used for continuous transmissions, such as voice or video, and data transmission ?

[    ] yes, [ x ] no

4.2 Was the EUT manually operated ?

[ x ] yes, [    ] no

If yes, did the EUT employ a switch that would automatically deactivate the transmitter within not more than 5 seconds of being released ?

[ x ] yes, [    ] no

4.3 Was the EUT automatically activated ?

[    ] yes, [ x ] no

If yes, did the EUT cease transmission within 5 seconds after deactivation ?

[    ] yes, [    ] no

4.4 Was the EUT used for periodic transmissions at regular predetermined intervals ?

[    ] yes, [ x ] no

**. RADIATED EMISSION MEASUREMENT (Section 15.231)****1. Test Procedure****1.1 Preliminary Testing for Reference**

Preliminary testing was performed in a KTL absorber-lined room to determine the emission characteristics of the EUT. The EUT was placed on the wooden table which has dimensions of 0.8 meters in height, 1 meter in length and 1.5 meters in width. Receiving antenna (Biconical antenna : 30 to 300 MHz, Log-periodic antenna : 200 to 1000 MHz or Horn Antenna : 1 to 18 GHz) was placed at the distance of 1 meter from the EUT.

An attempt was made to maximize the emission level with the various configurations of the EUT. Emission levels from the EUT with various configurations were examined on a spectrum analyzer connected with a RF amplifier and graphed by a plotter.

**1.2 Final Radiated Emission Test at an Absorber-Lined Room**

The final measurement of radiated field strength was carried out in a KTL absorber-lined Room that was listed up at FCC according to the "Radiated Emissions Testing" procedure specified by ANSI C63.4.

Based on the test results in preliminary test, measurement was made in same test set up and configuration which produced maximum emission level. Receiving antenna was installed at 3-meter distance from the EUT, and was connected to an EMI receiver or spectrum analyzer with a RF amplifier.

Turntable was rotated through 360 degrees and receiving antenna height was varied from 1 to 4 meters above the ground plane with horizontal and vertical polarization to read maximum emission level.

If necessary, the radiated emission measurements could be performed at a closer distance than specified distance to ensure higher accuracy and their results were extrapolated to the specified distance using an inverse linear distance extrapolation factor(20dB/decade) as per Section 15.31(f).

The maximum emission level from the EUT occurred in such configuration as shown in the following photograph.

## 2. Photograph of the test configuration



## 3. Sample Calculation

The measured field strength was determined by averaging over one complete pulse train including blanking interval because the pulse train time of the EUT (= 86.0 msec) did not exceed 0.1 seconds (15.35(c)). See graphs of page 12.

With the resolution bandwidth set at 30 kHz, the EUT produces a pulse spectrum on the spectrum analyzer because the bandwidth of the analyzer is greater than or equal to the PRF (= 556 Hz).

Therefore, as mentioned in HP Application Note 150-2 (page 11), the pulse desensitization( $\langle_p$ ) equals zero and the display amplitude is essentially a peak level.

The field strengths were calculated as follows ;

$$- E_{\text{peak}} (\text{dB}) = E_{\text{reading}} (\text{dB}) + \langle \rho \rangle + \text{Ant. Factor \& Cable Loss (dB)}$$

- To get the average voltage values in the one complete pulse train blanking intervals,

$$E_{\text{avg}}(\partial) = \frac{\text{Total pulse time of transmitter} \cdot E_{\text{peak}}(\partial) \text{ in the one complete pulse train (sec)}}{T_t \text{ (sec)}}$$

where,

$$\begin{aligned} \text{Pulse desensitization } (\langle \rho \rangle) &= 20 \log (I_{\text{eff}} \times B \times K), \text{ HP AN150-2 (page 14)} \\ &= \underline{0} \text{ (See 1.4)} \end{aligned}$$

$$\begin{aligned} \text{Total pulse time of transmitter} \\ \text{in the one complete pulse train} &= \underline{32.4 \text{ msec}} \text{ (See the graph of page 12)} \end{aligned}$$

$$\begin{aligned} \text{One complete pulse train} \\ \text{time including blanking} &= \underline{86.0 \text{ msec}} \text{ (See the graph of page 12)} \\ \text{interval } (T_t) \end{aligned}$$

For example :

the average values at 433.98 MHz

$$\begin{aligned} \text{Spectrum Analyzer measured values} &: \underline{47.3} \text{ dB} \\ - \text{Preamplifier} &: \underline{0.0} \text{ dB} \\ + \text{Pulse Desensitization } (\langle \rho \rangle) &: \underline{0.0} \text{ dB} \\ + \text{Ant.Factor \& Cable Loss} &: \underline{20.2} \text{ dB/m} \end{aligned}$$

$$\begin{aligned} \text{Voltage Peak Levels} &: \underline{67.5} \text{ dB} \\ (= \underline{2371.4} \text{ } \partial/\text{m}) \end{aligned}$$

Voltage Average Levels

$$\begin{aligned} E_{\text{peak}} & \cdot \text{Total pulse time of transmitter} \\ = \frac{E_{\text{peak}} \cdot \text{Total pulse time of transmitter}}{T_t} & \\ = \frac{2371.4 \partial/\mu \cdot 32.4 \text{ msec}}{86.0 \text{ msec}} & = \underline{893.4 \partial/\mu} \end{aligned}$$

## 4. Measurement Data

- Resolution Bandwidth : Peak (6 dB Bandwidth : 120 kHz for ranges below 1 GHz)

Peak (6 dB Bandwidth : 1 MHz for ranges over 1 GHz)

- Measurement Distance : 3 Meter

| Frequency<br>(MHz) | *<br>D.M. | *<br>A.P. | Measured<br>Value<br>(dB $\delta$ ) | *<br>A.F.<br>+<br>C.L.<br>(dB/m) | *<br>A.G.<br>(dB) | *<br>D.C.F.<br>(dB) | Emission<br>Level        |                             | Limit<br>Average<br>(dB $\delta$ /m) | **<br>Margin<br>(dB) |
|--------------------|-----------|-----------|-------------------------------------|----------------------------------|-------------------|---------------------|--------------------------|-----------------------------|--------------------------------------|----------------------|
|                    |           |           |                                     |                                  |                   |                     | Peak<br>(dB $\delta$ /m) | Average<br>(dB $\delta$ /m) |                                      |                      |
| 433.98             | P         | V         | 47.3                                | 20.2                             | -                 | -                   | 67.5                     | 59.0                        | 80.8                                 | - 21.8               |
| 867.92             | P         | H/V       | < 35.0                              | 28.2                             | -30.0             | -                   | < 28.2                   | < 24.7                      | 60.8                                 | < - 36.1             |
| -                  | -         | -         | -                                   | -                                | -                 | -                   | -                        | -                           | -                                    | -                    |
|                    |           |           |                                     |                                  |                   |                     |                          |                             |                                      |                      |
|                    |           |           |                                     |                                  |                   |                     |                          |                             |                                      |                      |
|                    |           |           |                                     |                                  |                   |                     |                          |                             |                                      |                      |
|                    |           |           |                                     |                                  |                   |                     |                          |                             |                                      |                      |
|                    |           |           |                                     |                                  |                   |                     |                          |                             |                                      |                      |
|                    |           |           |                                     |                                  |                   |                     |                          |                             |                                      |                      |
|                    |           |           |                                     |                                  |                   |                     |                          |                             |                                      |                      |

## Note

The observed spectrum analyzer noise floor level with RF preamplifier was 35.0 dB $\delta$ (below 1000 MHz) and 40.0 dB $\delta$ (above 1000 MHz). And all other emissions not reported on data were more than 30 dB below the permitted level.

\* D.M. : Detect Mode (P : Peak, Q : Quasi-Peak, A : Average)

A.P. : Antenna Polarization (H : Horizontal, V : Vertical)

A.F. : Antenna Factor

C.L. : Cable Loss

A.G. : Amplifier Gain

D.C.F. : Distance Correction Factor

< : Less than

\*\* Margin (dB) = Emission Level (dB) - Limit (dB)

Note :

(1) Fundamental emissions from the intentional radiators were not located within any of frequency bands described in section 15.205(a) listed below ;

| <b>MHz</b>        | <b>MHz</b>          | <b>MHz</b>    | <b>GHz</b>  |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.25    |
| 0.495-0.505       | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-       |
| 7.75              |                     |               |             |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.1775    | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2 | 13.25-      |
| 13.4              |                     |               |             |
| 6.31175-6.31225   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2655-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     |             |
| 13.36-13.41       |                     |               |             |


The field strength of emissions appearing within above frequency bands did not exceed the limits shown in section 15.209. At frequency equal to or less than 1000MHz, compliance with the limits section 15.209 was demonstrated using measurement employing a CISPR quasi-peak detector. Above 1000MHz, demonstrated based on the average value of the measured emissions.

(2) If the intentional radiator was operated under the radiated emission limits of the general requirements of section 15.209, it's fundamental emissions were not located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-860MHz.


(3) The level of any unwanted emissions from an intentional radiator did not exceed the level of the fundamental emission.


(4) Radiated and spurious emissions were checked from 30MHz to 3GHz. And all other emissions not reported on data were more than 20 dB below the permitted level.

## 5. Reference Data : Frequency Pulse Width( $\Delta t_{\text{eff}}$ ) and Pulse Repetition Frequency(PRF)

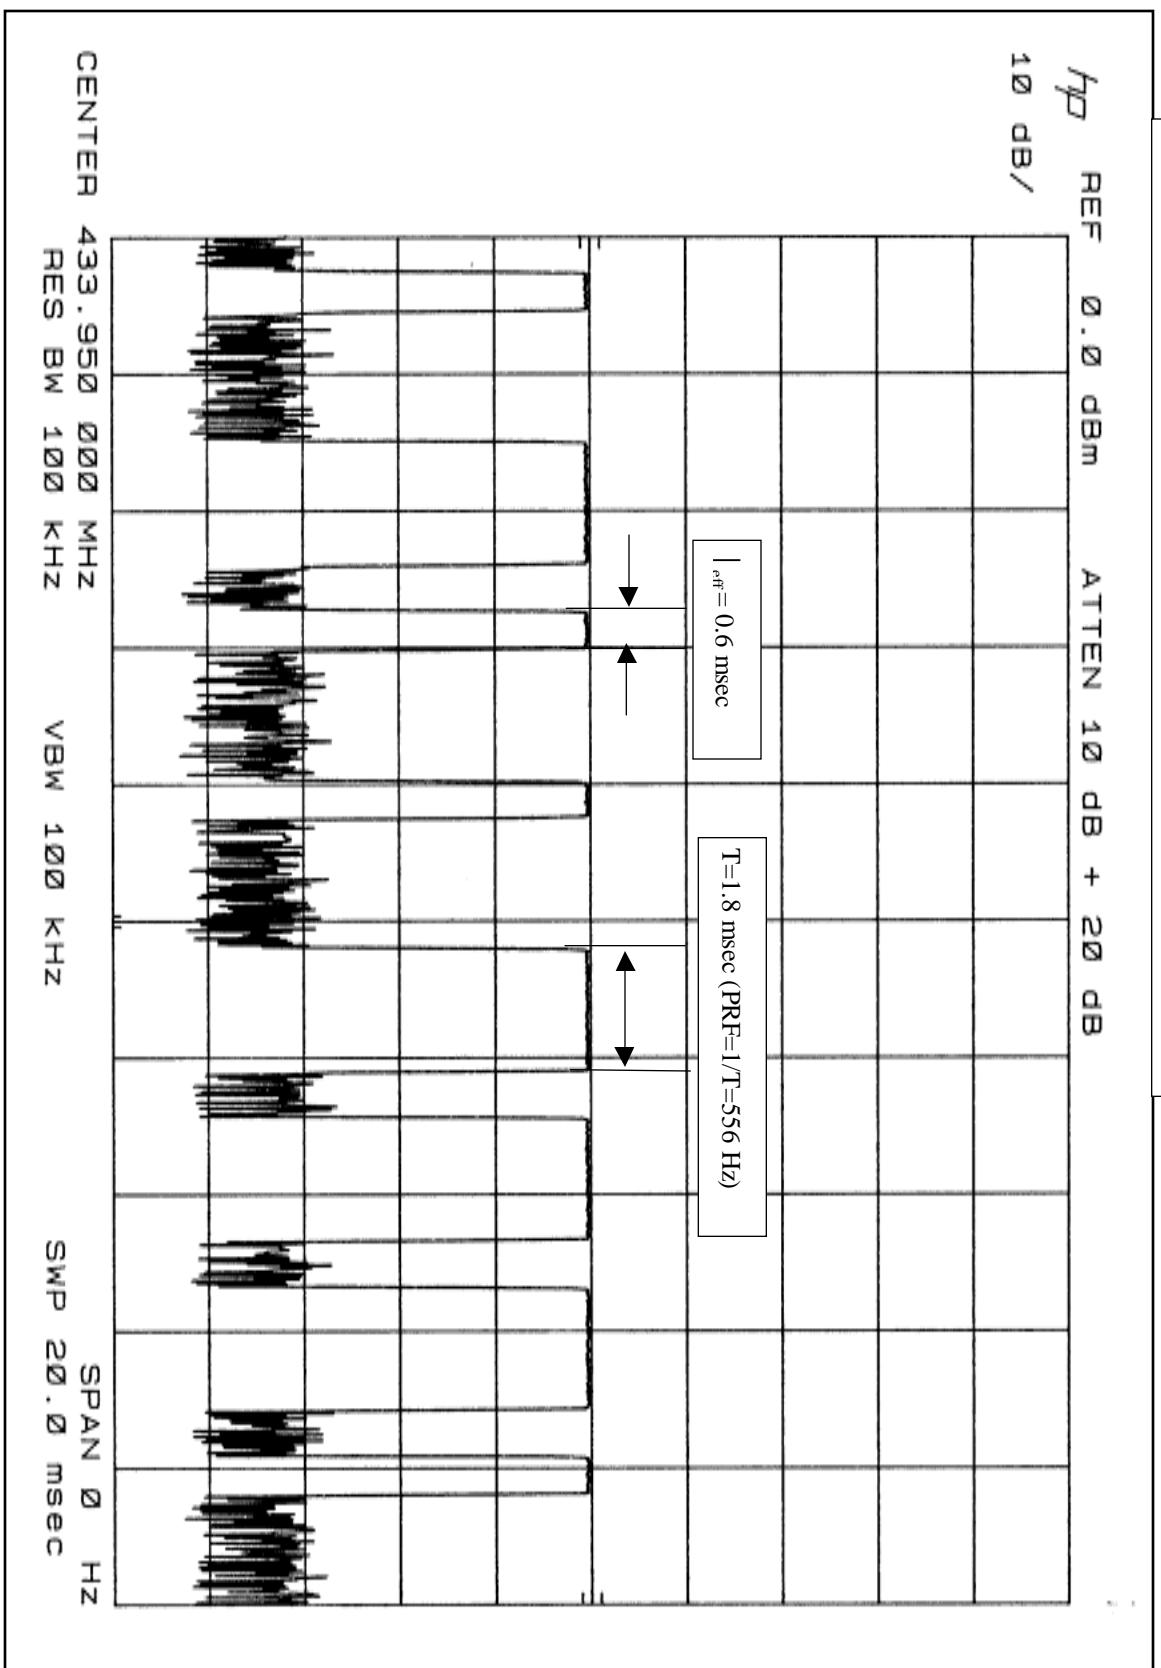

## Reference Data : Pulse Train Time

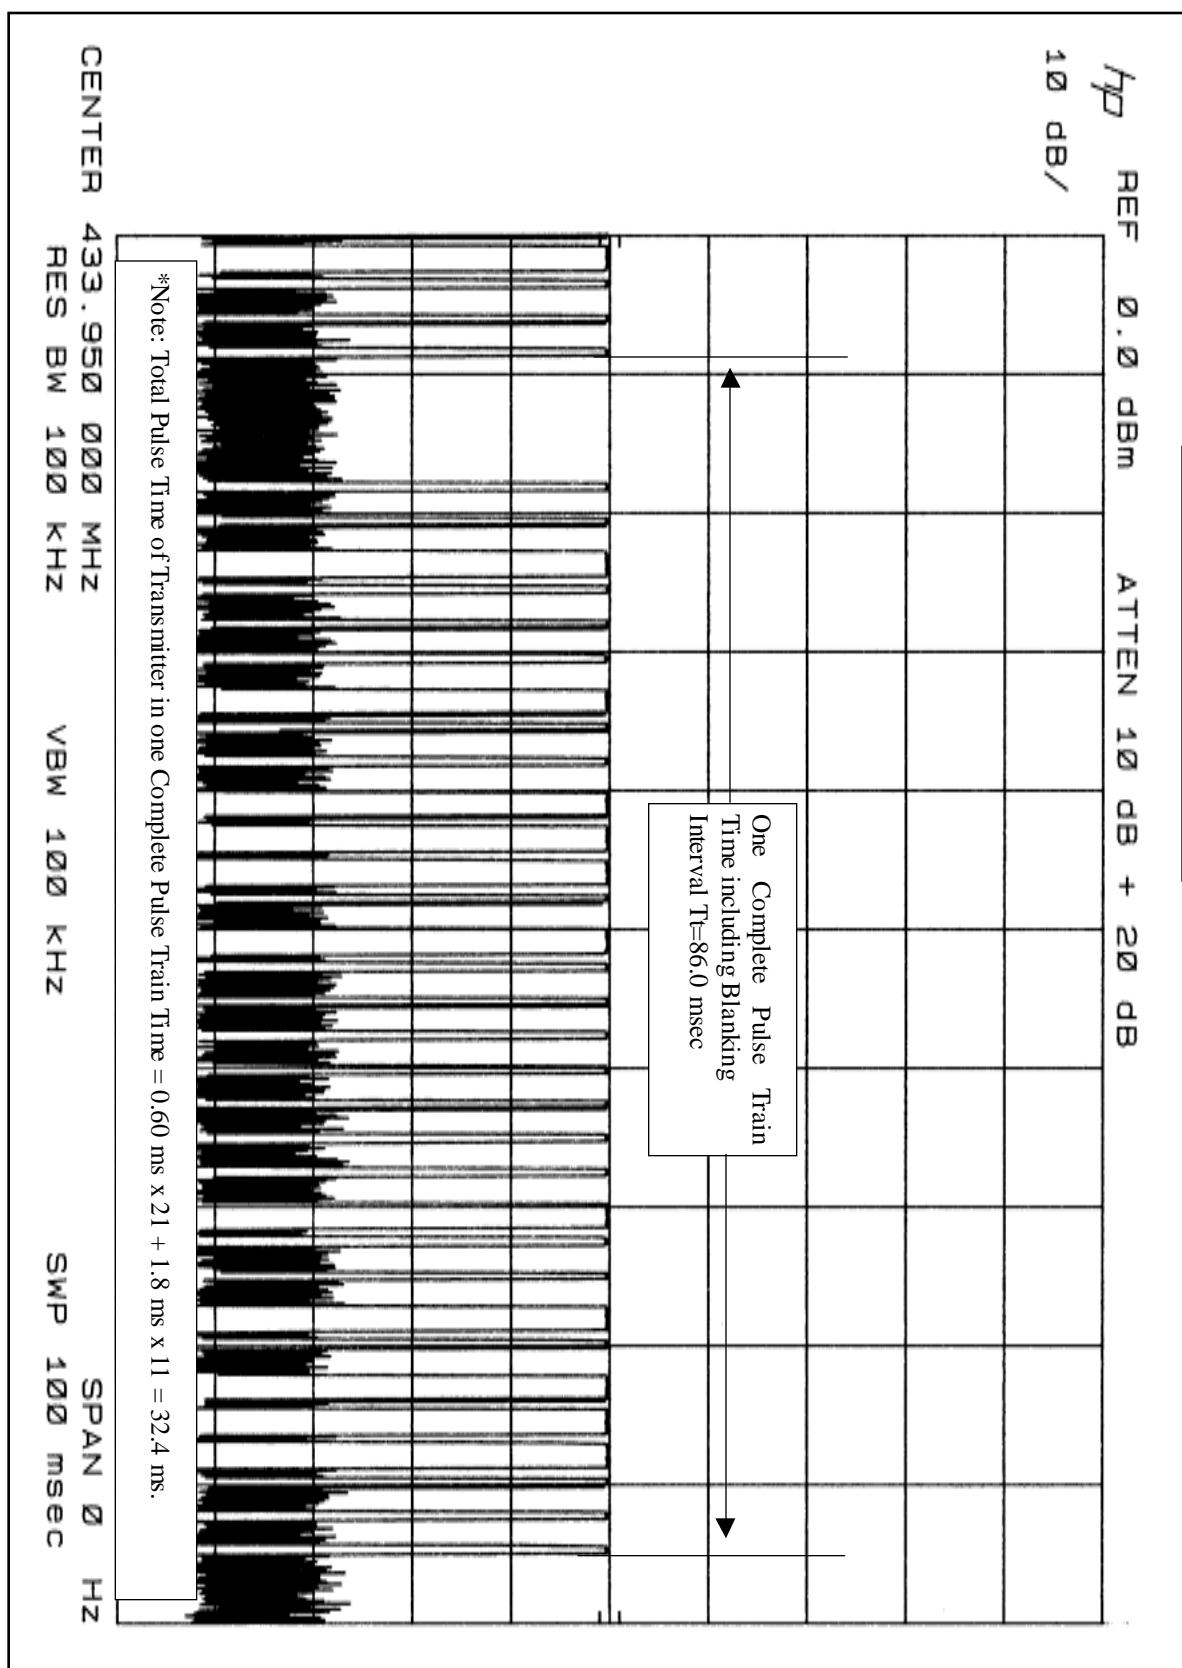

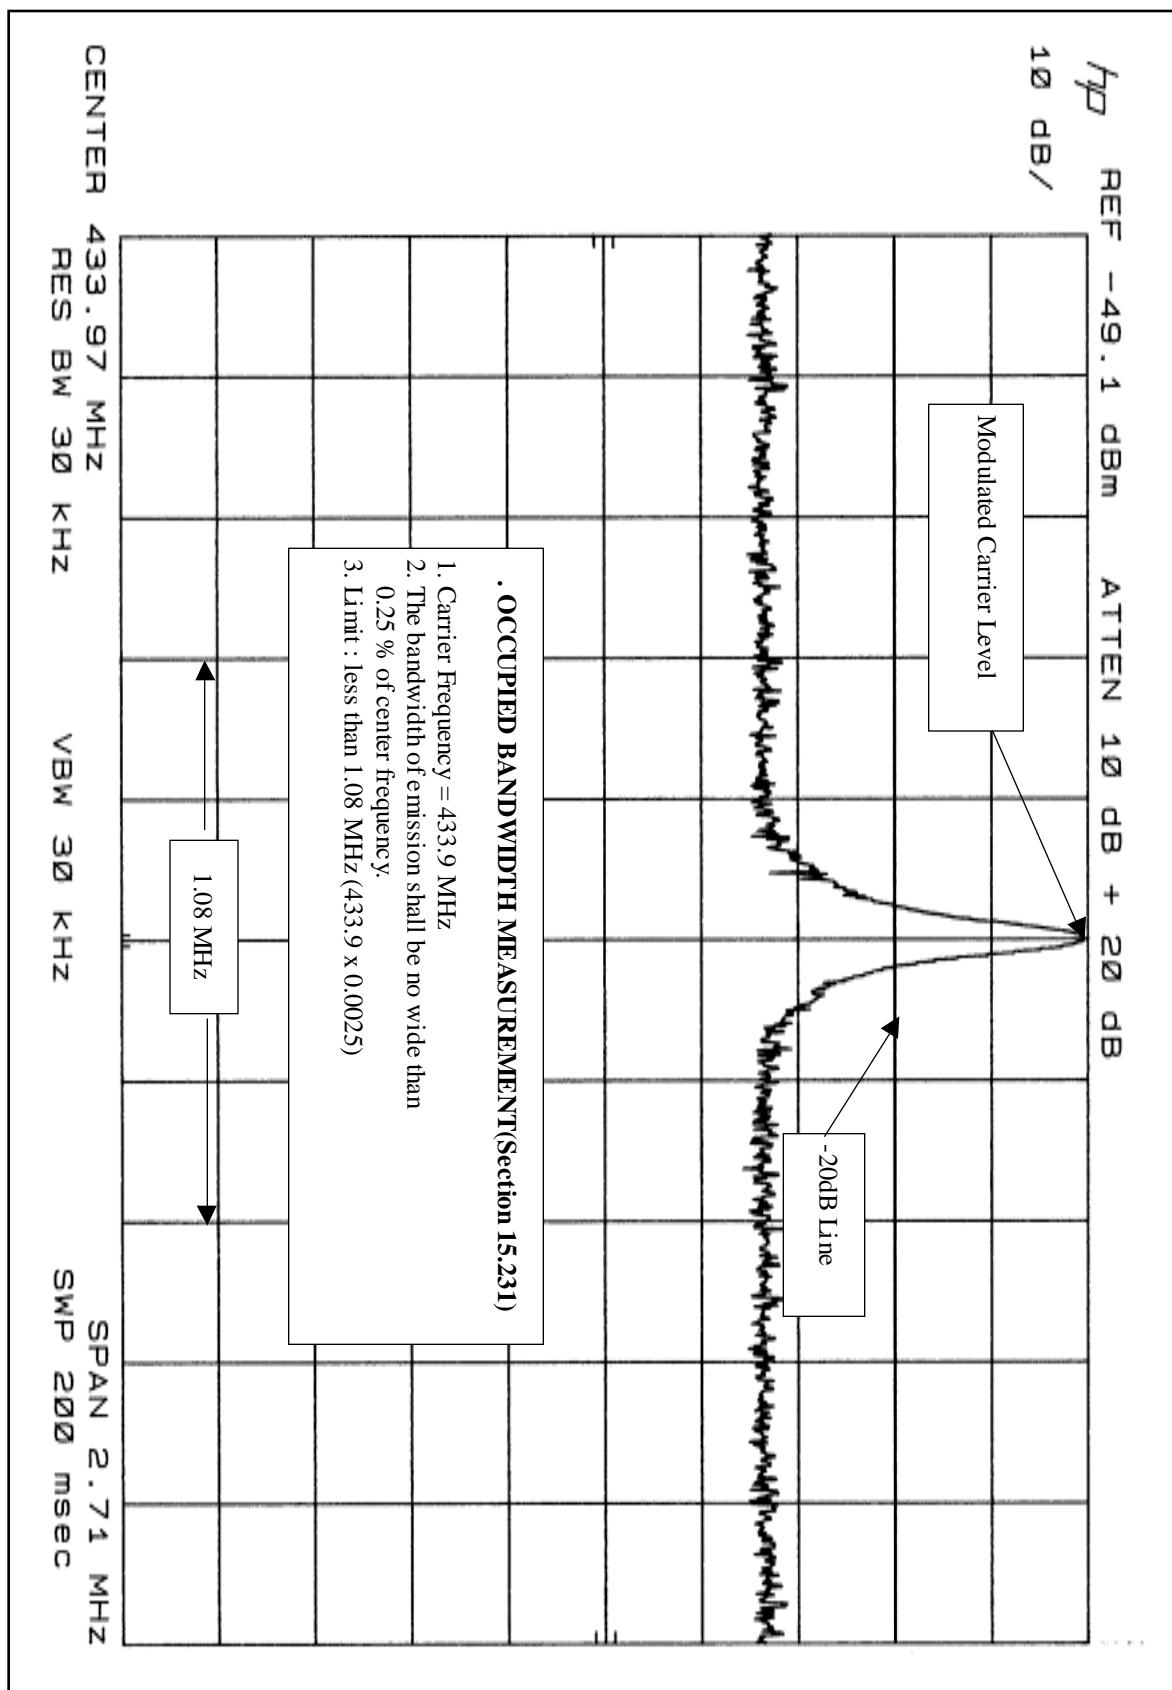

. TEST EQUIPMENT USED FOR MEASUREMENTS

| <u>Equipment</u>                               | <u>Model No.</u> | <u>Manufacturer</u> | <u>Serial No.</u> | <u>Effective Cal. Duration</u> |
|--|------------------|---------------------|-------------------|--------------------------------|
| [x] EMI Receiver<br>(20MHz-1GHz)               | ESVS30           | R & S               | 830516/002        | 06/13/01-06/13/02              |
| [x] Spectrum Analyzer<br>(9kHz-26.5GHz)        | 8563A            | H. P.               | 3222A02069        | 03/27/01-03/27/02              |
| [ ] Spectrum Analyzer<br>(100Hz-22GHz)         | 8566B            | H. P.               | 3014A07057        | 05/26/01-05/26/02              |
| [ ] Quasi-Peak Adapter<br>(10kHz-1GHz)         | 85650A           | H. P.               | 3107A01511        | 05/26/01-05/26/02              |
| [ ] RF-Preselector<br>(20Hz-2GHz)              | 85685A           | H. P.               | 3010A01181        | 05/26/01-05/26/02              |
| [ ] Test Receiver<br>(9kHz-30MHz)              | ESH3             | R & S               | 860905/001        | 06/13/01-06/13/02              |
| [x] Pre-Amplifier<br>(0.1-3000MHz, 30 dB)      | 8347A            | H. P.               | 2834A00543        | 05/26/01-05/26/02              |
| [x] Pre-Amplifier<br>(1 - 26.5 GHz, 35 dB)     | 8449B            | H. P.               | 3008A00302        | 05/26/01-05/26/02              |
| [ ] LISN(50ohm , 50 $\mu$ H)<br>(10kHz-100MHz) | 3825/2           | EMCO                | 9011-1720         | 05/26/01-05/26/02              |
| [x] Plotter                                    | 7470A            | H. P.               | 3104A21292        | -                              |
| [ ] Active Loop Ant.<br>(10 kHz – 30 MHz)      | 6502             | EMCO                | 9009-2532         | 05/03/01-05/03/02              |
| [ ] Tuned Dipole Ant.<br>(30 MHz – 300 MHz)    | VHA 9103         | Schwarzbeck         | -                 | 05/16/01-05/16/02              |
| [ ] Tuned Dipole Ant.<br>(300 MHz – 1 GHz)     | UHA 9105         | Schwarzbeck         | -                 | 05/16/01-05/16/02              |
| [x] Biconical Ant.<br>(30 MHz – 300 MHz)       | BBA 9106         | Schwarzbeck         | -                 | 05/16/01-05/16/02              |
| [x] Log Periodic Ant.<br>(200 MHz – 1 GHz)     | 3146             | EMCO                | -                 | 05/17/01-05/17/02              |
| [x] Horn Ant.<br>(1 GHz – 18 GHz)              | 3115             | EMCO                | -                 | 05/12/01-05/12/02              |
| [ ] Shielded Room<br>(5.0 m x 4.5 m)           | -                | SIN-MYUNG           | -                 | -                              |

\* Each set of antennas has been calibrated to ensure correlation with ANSI C63.5 standard. The calibration of antennas is traceable to Korea Standard Research Institute(KSRI).