




Engineering Solutions & Electromagnetic Compatibility Services

FCC Part 15.249 & IC RSS-210 Certification Application Report for Limited Modular Approval Report

Test Lab: Rhein Tech Laboratories, Inc. Phone: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 Web: www.rheintech.com Herndon, VA 20170 Email: atcbinfo@rheintech.com		Applicant: Ikusi – Angel Iglesias Phone: +34 943 448800 Paseo Miramon 170 20009 San Sebastian SPAIN Contact: Borja Pérez Domínguez	
FCC ID:	PVTTR800CE-MCX	Test Report Date	June 30, 2011
IC:	4166A-TR800CEMCX		
Platform	N/A	RTL Work Order Number	2011071DXX
Model #	TR800CE_MCX	RTL Quote Number	QRTL11-101
American National Standard Institute	ANSI C63.4-2003: Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz		
FCC Classification	DXX – Part 15 Low Power Communication Device Transmitter		
FCC Rule Part(s)	Part 15.249 (10-01-10): Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5850 MHz, and 24.0-24.25 GHz		
IC Rule Part(s)	RSS-210 Issue 8: Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment		
Frequency Range (MHz)	Output Power (W)	Frequency Tolerance	Emission Designator
902.5 – 927.45	N/A	N/A	11K3F1D

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the applicable parts of FCC Part 2, FCC Part 15, ANSI C63.4, and IC RSS-210.

Signature: 

Date: June 30, 2011

Typed/Printed Name: Desmond A. Fraser

Position: President

This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc. and IKUSI. The test results relate only to the item(s) tested.

These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANSI-ASQ National Accreditation Board/ACLASS. Refer to certificate and scope of accreditation AT-1445.

Table of Contents

1	General Information	5
1.1	Scope	5
1.2	Modifications	5
1.3	Test Facility	5
1.4	Related Submittal(s)/Grant(s)	5
2	Test Information	6
2.1	Test Justification	6
2.2	Exercising the EUT	6
2.3	Test Result Summary.....	6
2.4	Test System Details	7
2.5	Configuration of Tested System.....	8
3	Conducted AC Emissions – FCC 15.207 & IC RSS-Gen	9
3.1	Site and Test Description	9
3.2	Test Limits.....	9
3.3	Conducted AC Emissions Test Data.....	10
4	Radiated Emission Limits Fundamental Emissions – FCC 15.249 & IC RSS-210 A2.9	13
4.1	Radiated Emission Limits Test Procedure	13
4.2	Radiated Emission Limits Test Data	13
5	Radiated Spurious/Harmonics – FCC 15.249 & IC RSS-210 A2.9	15
5.1	Radiated Emission Limits Test Procedure	15
5.2	Radiated Emissions Test Data.....	15
6	Receiver Spurious Emissions – FCC 15B & IC RSS-Gen 4.10.....	16
6.1	Receiver Spurious Emissions Limits/Test Procedure	16
6.1.1	Site and Test Description	16
6.1.2	Test Limits.....	16
6.1.3	Radiated Emissions Data.....	16
7	Occupied Bandwidth - RSS-Gen 4.6.1	18
7.1	Modulated Bandwidth Test Procedure	18
7.2	Modulated Bandwidth Test Data	18
8	Conclusion	20

Table Index

Table 2-1:	Test Result Summary with FCC Rules and Regulations	6
Table 2-2:	Equipment under Test (EUT)	7
Table 3-1:	Conducted Emissions Test Equipment	12
Table 4-1:	Radiated Emissions Fundamental Emissions – Internal for T70	13
Table 4-2:	Radiated Emissions Fundamental Emissions – Internal for LR70	13
Table 4-3:	Radiated Emissions Fundamental Emissions – External Monopole Antenna	13
Table 4-4:	Radiated Emissions Fundamental Emissions Test Equipment	14
Table 5-1:	Radiated Emissions of Harmonics Test Equipment.....	15
Table 6-1:	Radiated Emissions Test Data.....	16
Table 6-2:	Radiated Emissions Test Equipment	17
Table 7-1:	Minimum 20 dB Modulated Bandwidths.....	18
Table 7-2:	Occupied Bandwidth Test Equipment.....	20

Figure Index

Figure 2-1:	Worst Case Configuration of System under Test.....	8
-------------	--	---

Plot Index

Plot 3-1:	Conducted AC Emissions; Neutral (Line 1); Receive Mode	10
Plot 3-2:	Conducted AC Emissions; Hot (Line 2); Receive Mode	10
Plot 3-3:	Conducted AC Emissions; Neutral (Line 1); Transmit Mode	11
Plot 3-4:	Conducted AC Emissions; Hot (Line 2); Transmit Mode	11
Plot 7-1:	Occupied Bandwidth - Low Channel.....	18
Plot 7-2:	Occupied Bandwidth - Middle Channel.....	19
Plot 7-3:	Occupied Bandwidth - High Channel	19

Appendix Index

Appendix A:	FCC Part 1.1307, 1.1310, 2.1091, 2.1093; IC RSS-Gen: RF Exposure	21
Appendix B:	TCB Agency Authorization Letter	22
Appendix C:	FCC Confidentiality Request Letter.....	23
Appendix D:	DA00-1407 Part 15 Unlicensed Modular TX Attestation.....	24
Appendix E:	IC Agent Authority, IC Listing Requirements and Canadian Representative Letters	25
Appendix F:	IC Confidentiality Request Letter	26
Appendix G:	Modular Approval Checklist RSS-Gen Issue 3 Dec 2010.....	27
Appendix H:	Label and Label Location	28
Appendix I:	Operational Description.....	29
Appendix J:	Schematics.....	30
Appendix K:	Block Diagram	31
Appendix L:	Manual.....	32
Appendix M:	Test Photographs	33
Appendix N:	External Photographs.....	37
Appendix O:	Internal Photographs	38

Photograph Index

Photograph 1:	Radiated Emissions - Front View – Module Tested in “Typical Host”	33
Photograph 2:	Radiated Emissions – Front View – Module Tested in Second “Typical Host”	34
Photograph 4:	Conducted AC Emissions - Front View - Module Tested in “Typical Host”	35
Photograph 5:	Conducted AC Emissions - Rear View - Module Tested in “Typical Host”	36

1 General Information

1.1 Scope

FCC Rules Part 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5850 MHz, and 24.0-24.25 GHz.

IC RSS-210 Section A2.9: 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

1.2 Modifications

None

1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at Rhein Tech Laboratories (RTL), 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 2003).

1.4 Related Submittal(s)/Grant(s)

This is an original LIMITED MODULAR APPROVAL application for IKUSI Model TR800CE_MCX, FCC ID: PVTTR800CE-MCX, IC: 4166A-TR800CEMCX.

2 Test Information

2.1 Test Justification

The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. The low channel at 902.5 MHz, mid channel at 915.7 MHz, and high channel at 927.45 MHz, were tested and investigated from 9 kHz to 10 GHz. Data for all three channels is presented in this report. The test results relate only to the item that was tested.

Three antennas were tested with the EUT; only one antenna is in place at a given time and antenna both transmits and receives.

2.2 Exercising the EUT

The EUT was provided with software to continuously transmit during testing. The carrier was also checked to verify that the information was being transmitted. There were no deviations from the test standard(s) and/or methods. The IF, LO, and up to the 2nd LO, were investigated and tested, and found to be compliant.

2.3 Test Result Summary

Table 2-1: Test Result Summary with FCC Rules and Regulations

Standard	Test	Pass/Fail or N/A
FCC 15.249(a)	Radiated Emissions	Pass
FCC 15.207	AC Line Conducted Emissions	Pass
RSS-Gen	20 dB Bandwidth	N/A
RSS-Gen ICES-003	Receiver/Digital Emissions	Pass

2.4 Test System Details

The test sample was received on May 31, 2011. The FCC Identifiers for all equipment, plus descriptions of all cables used in the tested system, are shown in the table below.

Table 2-2: Equipment under Test (EUT)

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
Transceiver Module	IKUSI	TR800CE_MCX	N/A	PVTTR800CE-MCX	N/A	19945
Antenna	IKUSI	AER-915	N/A	N/A	N/A	20258
Antenna	IKUSI	2303718 (LR70)	N/A	N/A	N/A	20259
External Monopole Antenna	IKUSI	2303733 (T70)	N/A	N/A	N/A	20260

2.5 Configuration of Tested System

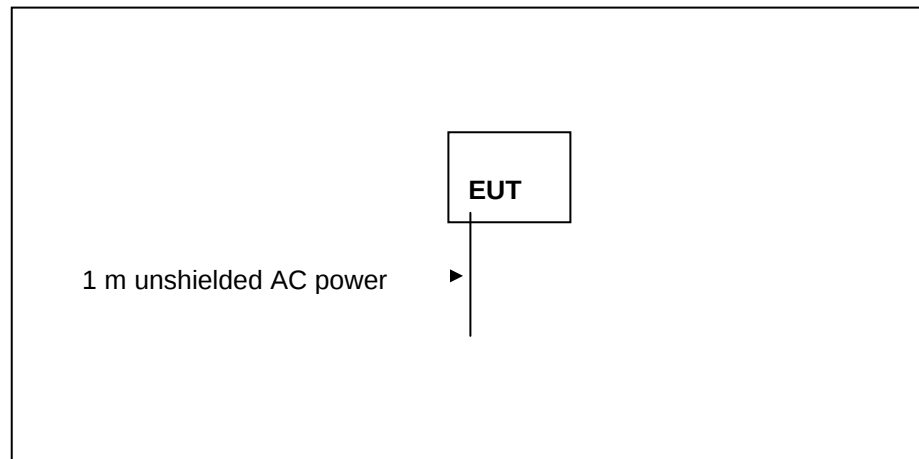


Figure 2-1: Worst Case Configuration of System under Test

3 Conducted AC Emissions – FCC 15.207 & IC RSS-Gen

3.1 Site and Test Description

The power line conducted emissions measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50-ohm/50 microhenry Line Impedance Stabilization Network (LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 100 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 100 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode, if applicable).


The analyzer's 6 dB bandwidth was set to 9 kHz. Video filter less than 10 times the resolution bandwidth is not used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded.

3.2 Test Limits


Line-Conducted Emissions		
Limit (dB μ V)		
Frequency (MHz)	Quasi-Peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.00	56	46
5.00 to 30.00	60	50

3.3 Conducted AC Emissions Test Data


Plot 3-1: Conducted AC Emissions; Neutral (Line 1); Receive Mode

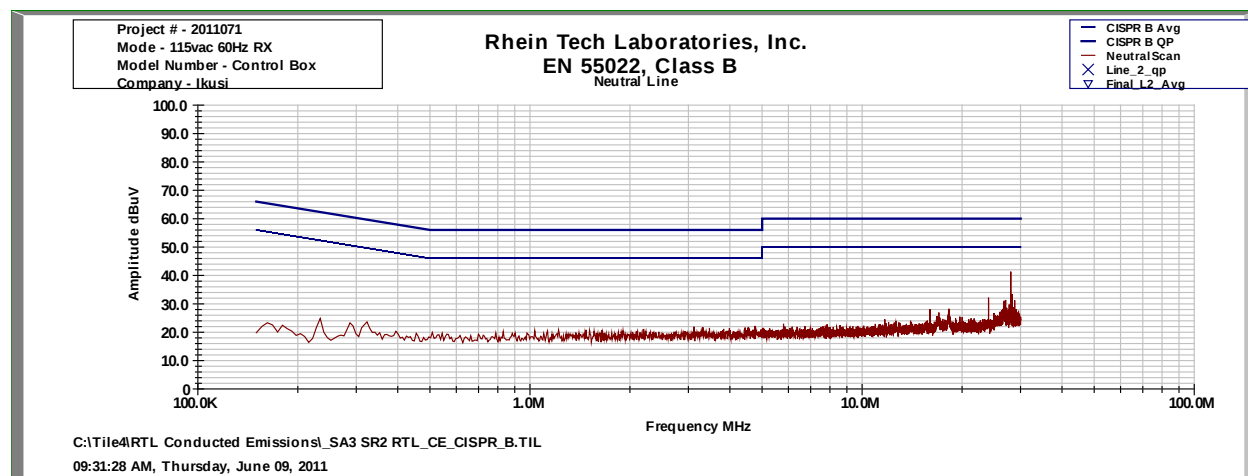

Plot 3-2: Conducted AC Emissions; Hot (Line 2); Receive Mode

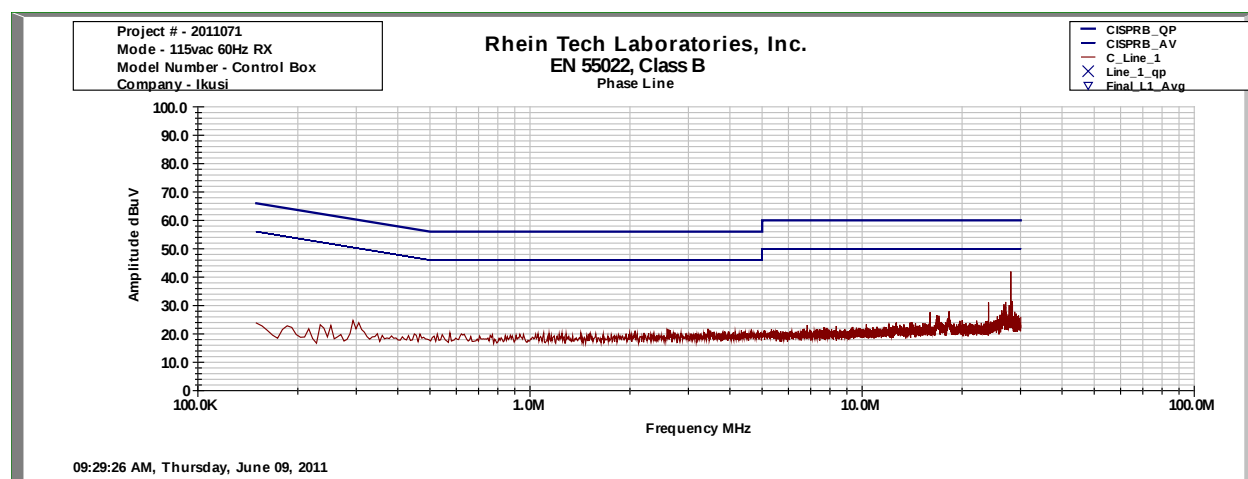

Plot 3-3: Conducted AC Emissions; Neutral (Line 1); Transmit Mode

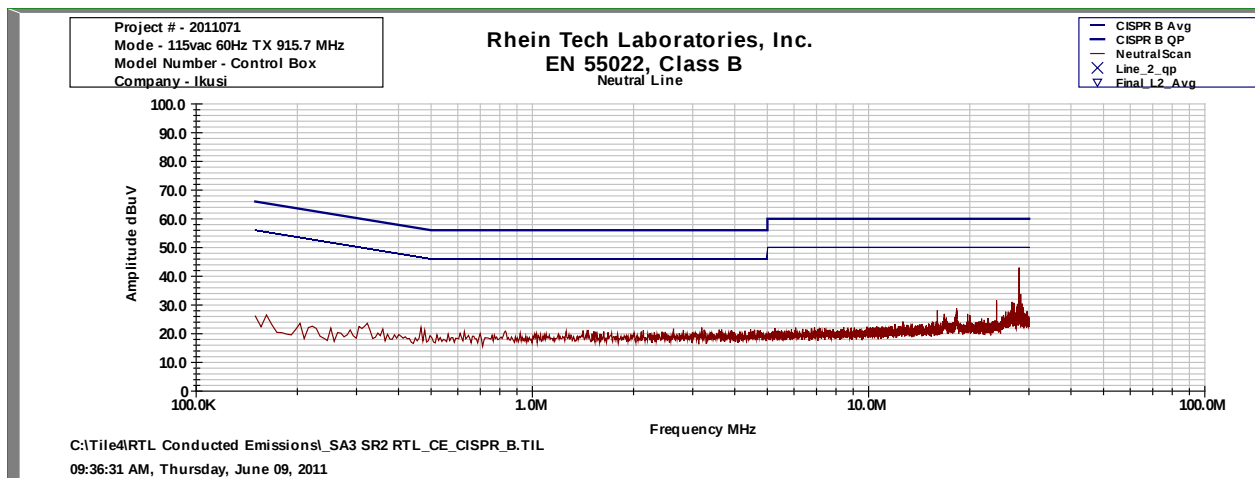

Plot 3-4: Conducted AC Emissions; Hot (Line 2); Transmit Mode

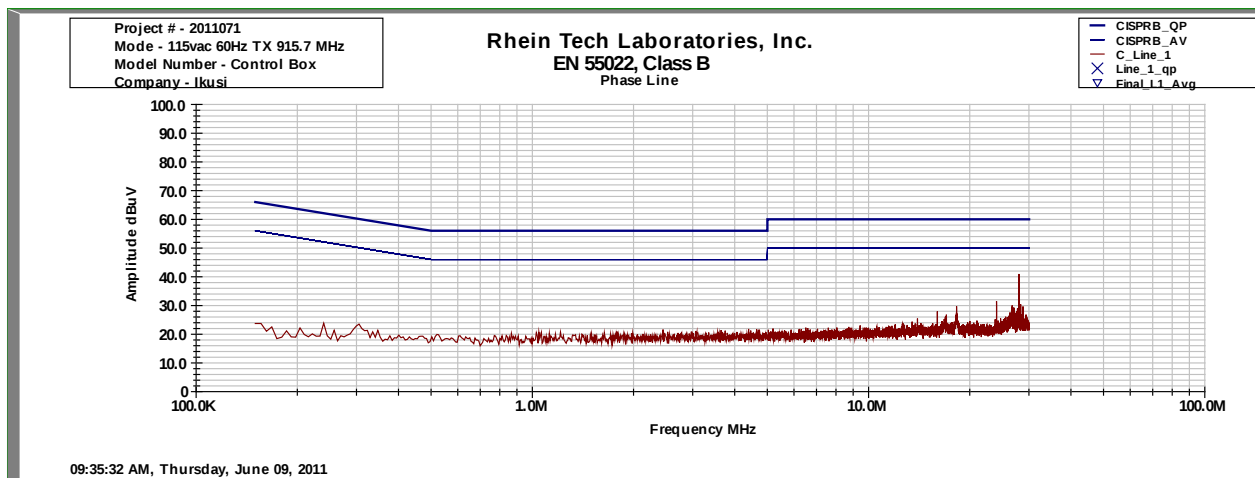


Table 3-1: Conducted Emissions Test Equipment

Part Type	Manufacturer	Model	Serial Number	RTL Barcode	Calibration Due Date
Spectrum Analyzer (100 Hz - .15 GHz)	Hewlett Packard	8567A	2602A00160	900968	11/17/12
Spectrum Analyzer Display Section	Hewlett Packard	85662A	2542A11239	900970	11/17/12
Quasi-Peak Adapter	Hewlett Packard	85650A	2521A00743	900339	11/17/12
Filter	Solar	8130	947306	900728	2/22/12
16A LISN	AFJ International	LS16/110VAC	16010020080	901083	12/1/12
Emissions Testing Software	Rhein Tech Laboratories, Inc.	Automated Emission Tester	Rev. 14.0.2	N/A	N/A
Test Software	Quantum Change	Tile!	4.0.A.8	N/A	N/A

Test Personnel:

Jon Wilson Test Engineer	 Signature	June 9 and 13, 2011 Dates of Tests
-----------------------------	--	---------------------------------------

4 Radiated Emission Limits Fundamental Emissions – FCC 15.249 & IC RSS-210 A2.9

4.1 Radiated Emission Limits Test Procedure

Radiated emissions of the fundamentals were tested at three meters, and meet the quasi-peak limit of 50 mV/m. The EUT was tested in all three orthogonal planes for the low, mid, and high channels; the worst case emissions are shown. Peak measurements were taken at 3 m and are compared to the quasi-peak limit.

4.2 Radiated Emission Limits Test Data

Table 4-1: Radiated Emissions Fundamental Emissions – Internal for T70

Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dBm)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
902.50	Pk	53.4	37.4	90.8	94.0	-3.2
915.70	Pk	53.4	38.2	91.6	94.0	-2.4
927.45	Pk	51.5	38.5	90.0	94.0	-4.0

Table 4-2: Radiated Emissions Fundamental Emissions – Internal for LR70

Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dBm)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
902.50	Pk	51.2	37.4	88.6	94.0	-5.4
915.70	Pk	51.0	38.2	89.2	94.0	-4.8
927.45	Pk	50.7	38.5	89.2	94.0	-4.8

Table 4-3: Radiated Emissions Fundamental Emissions – External Monopole Antenna

Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dBm)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
902.50	Pk	50.6	37.4	88.0	94.0	-6.0
915.70	Pk	48.3	38.2	86.5	94.0	-7.5
927.45	Pk	48.2	38.5	86.7	94.0	-7.3

Table 4-4: Radiated Emissions Fundamental Emissions Test Equipment

Part Type	Manufacturer	Model	Serial Number	RTL Barcode	Calibration Due Date
Amplifier (20 MHz - 2 GHz)	RheinTech Laboratories, Inc.	PR-1040	900905	900905	4/10/12
Bilog Periodic Antenna (25 MHz - 2 GHz)	Schaffner Chase	CBL6112	2099	900791	12/12/12
EMI Receiver RF Section (9 kHz - 6.5 GHz)	Hewlett Packard	85462A	3325A00159	900913	6/8/12
RF Filter Section (100 kHz - 6.5 GHz)	Hewlett Packard	85460A	3330A00107	900914	6/8/12
Spectrum Analyzer	Hewlett Packard	8596EM	3826A00144	901215	11/23/11
Amplifier (1 GHz – 26.4 GHz)	Rhein Tech Laboratories, Inc.	PR-1042	1003	901364	3/31/12
Horn Antenna (2.0 - 4.0 GHz)	EMCO	3161-02	9804-1044	900772	6/13/12
Horn Antenna (4.0 - 8.2 GHz)	EMCO	3161-03	9508-1020	900321	6/13/12
Horn Antenna (8.2 - 12.0 GHz)	EMCO	3160-07	9605-1054	900323	6/13/12
Emissions Testing Software	Rhein Tech Laboratories, Inc.	Automated Emission Tester	Rev. 14.0.2	N/A	N/A

Test Personnel:

Jon Wilson
 Test Engineer



Signature

June 9 - 27, 2011
 Dates of Tests

5 Radiated Spurious/Harmonics – FCC 15.249 & IC RSS-210 A2.9

5.1 Radiated Emission Limits Test Procedure

Radiated emissions of the harmonics were tested at three meters, and meet the requirements of 500 microvolts/meter in average mode, and 20 dB higher in peak mode, per 15.249(e). The EUT was tested in the X-Y, X-Z, and Y-Z orthogonal planes.

5.2 Radiated Emissions Test Data

All spurious emissions were greater than 20 dB below the limit; no data is being reported per 15.31(o).

Table 5-1: Radiated Emissions of Harmonics Test Equipment

Part Type	Manufacturer	Model	Serial Number	RTL Barcode	Calibration Due Date
Amplifier (20 MHz - 2 GHz)	RheinTech Laboratories, Inc.	PR-1040	900905	900905	4/10/12
Bilog Periodic Antenna (25 MHz - 2 GHz)	Schaffner Chase	CBL6112	2099	900791	12/12/12
EMI Receiver RF Section (9 kHz - 6.5 GHz)	Hewlett Packard	85462A	3325A00159	900913	6/8/12
RF Filter Section (100 kHz - 6.5 GHz)	Hewlett Packard	85460A	3330A00107	900914	6/8/12
Spectrum Analyzer	Hewlett Packard	8596EM	3826A00144	901215	11/23/11
Amplifier (1 GHz – 26.4 GHz)	Rhein Tech Laboratories, Inc.	PR-1042	1003	901364	3/31/12
Horn Antenna (2.0 - 4.0 GHz)	EMCO	3161-02	9804-1044	900772	6/13/12
Horn Antenna (4.0 - 8.2 GHz)	EMCO	3161-03	9508-1020	900321	6/13/12
Horn Antenna (8.2 - 12.0 GHz)	EMCO	3160-07	9605-1054	900323	6/13/12
Emissions Testing Software	Rhein Tech Laboratories, Inc.	Automated Emission Tester	Rev. 14.0.2	N/A	N/A

6 Receiver Spurious Emissions – FCC 15B & IC RSS-Gen 4.10

6.1 Receiver Spurious Emissions Limits/Test Procedure

6.1.1 Site and Test Description

Before final radiated emissions measurements were made on the OATS, the EUT was scanned indoors at both one and three meter distances. This was done in order to determine its emission spectrum signal. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emission measurements on the OATS, at each frequency, in order to ensure that maximum emission amplitudes were measured. Final radiated emissions measurements were made on the OATS at a distance of 3 meters. The EUT was placed on a non-conductive turntable. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emissions maximum levels. Measurements were taken using both horizontal and vertical antenna polarization. The spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the quasi-peak detection mode. No video filter less than 10 times the resolution bandwidth was used. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

6.1.2 Test Limits

FCC Class B Radiated Emissions	
Frequency (MHz)	At 3m (dB μ V/m)
30-88	40.0
88-216	43.5
216-960	46.0
>960	54.0

6.1.3 Radiated Emissions Data

Table 6-1: Radiated Emissions Test Data

Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dB μ V)	Site Correction Factor (dB/m)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
71.715	Qp	V	1	1.5	60.8	-25.3	35.5	40.0	-4.5
74.500	Qp	V	90	1.5	63.9	-25.0	38.9	40.0	-1.1
89.010	Qp	H	90	1.0	46.0	-22.5	23.5	43.5	-20.0
146.300	Qp	V	1	1.0	60.9	-20.8	40.1	43.5	-3.4
309.675	Qp	H	50	1.0	38.2	-16.0	22.2	46.0	-23.8
737.280	Qp	H	180	1.8	43.3	-6.3	37.0	46.0	-9.0
755.710	Qp	H	45	1.2	43.8	-5.8	38.0	46.0	-8.0
774.140	Qp	H	90	1.8	43.9	-5.4	38.5	46.0	-7.5
829.438	Qp	H	180	1.0	40.8	-4.8	36.0	46.0	-10.0
847.889	Qp	H	90	1.0	43.3	-4.4	38.9	46.0	-7.1

Table 6-2: Radiated Emissions Test Equipment

Part Type	Manufacturer	Model	Serial Number	RTL Barcode	Calibration Due Date
Amplifier (20 MHz - 2 GHz)	RheinTech Laboratories, Inc.	PR-1040	900905	900905	4/10/12
Bilog Periodic Antenna (25 MHz - 2 GHz)	Schaffner Chase	CBL6112	2099	900791	12/12/12
EMI Receiver RF Section (9 kHz - 6.5 GHz)	Hewlett Packard	85462A	3325A00159	900913	6/8/12
RF Filter Section (100 kHz - 6.5 GHz)	Hewlett Packard	85460A	3330A00107	900914	6/8/12
Spectrum Analyzer	Hewlett Packard	8596EM	3826A00144	901215	11/23/11
Amplifier (1 GHz – 26.4 GHz)	Rhein Tech Laboratories, Inc.	PR-1042	1003	901364	3/31/12
Horn Antenna (2.0 - 4.0 GHz)	EMCO	3161-02	9804-1044	900772	6/13/12
Horn Antenna (4.0 - 8.2 GHz)	EMCO	3161-03	9508-1020	900321	6/13/12
Horn Antenna (8.2 - 12.0 GHz)	EMCO	3160-07	9605-1054	900323	6/13/12
Emissions Testing Software	Rhein Tech Laboratories, Inc.	Automated Emission Tester	Rev. 14.0.2	N/A	N/A

Test Personnel:

Jon Wilson		June 9 - 27, 2011
Test Engineer	Signature	Dates of Tests

7 Occupied Bandwidth - RSS-Gen 4.6.1

7.1 Modulated Bandwidth Test Procedure

The 99% emission bandwidth was measured using a 50-ohm spectrum analyzer with the resolution bandwidth set at 510 Hz, and the video bandwidth set at 1.5 kHz.


7.2 Modulated Bandwidth Test Data

Table 7-1: Minimum 20 dB Modulated Bandwidths


Frequency (MHz)	99% Bandwidth (kHz)
902.5	11.3
915.7	11.1
927.45	11.3

Occupied Bandwidth Plots

Plot 7-1: Occupied Bandwidth - Low Channel

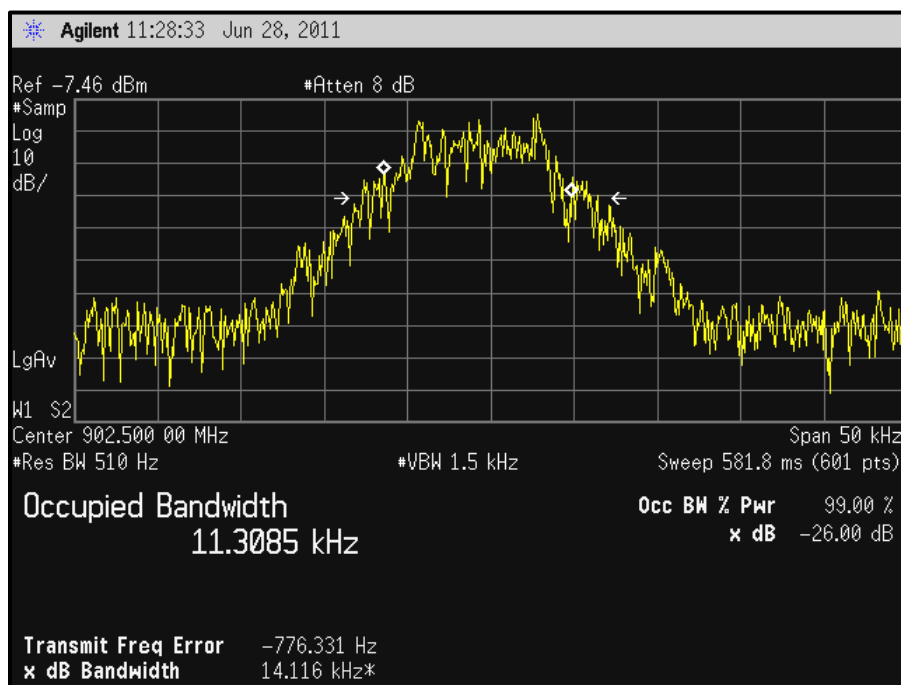

Plot 7-2: Occupied Bandwidth - Middle Channel

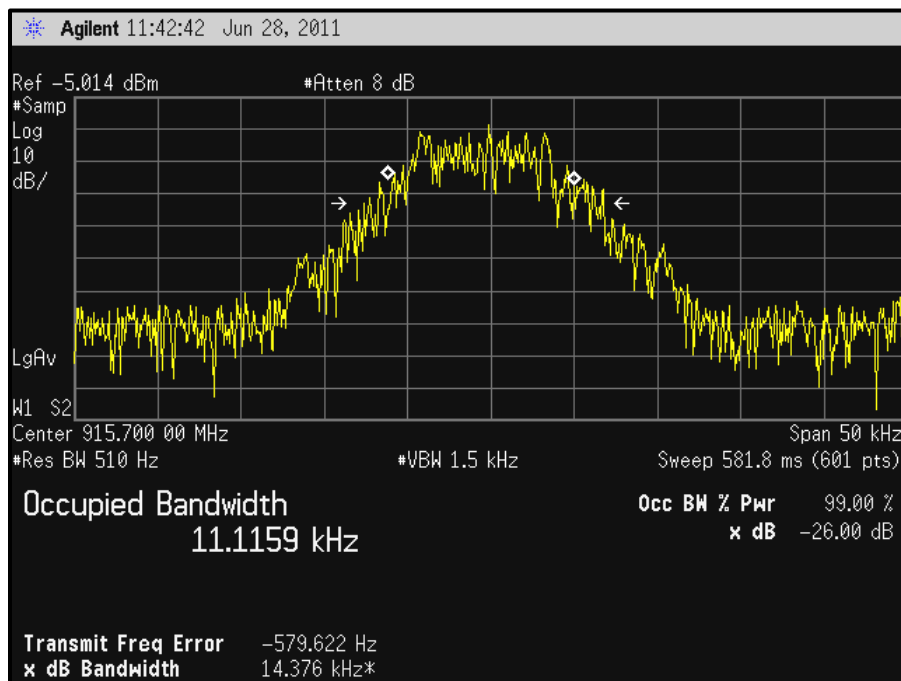

Plot 7-3: Occupied Bandwidth - High Channel

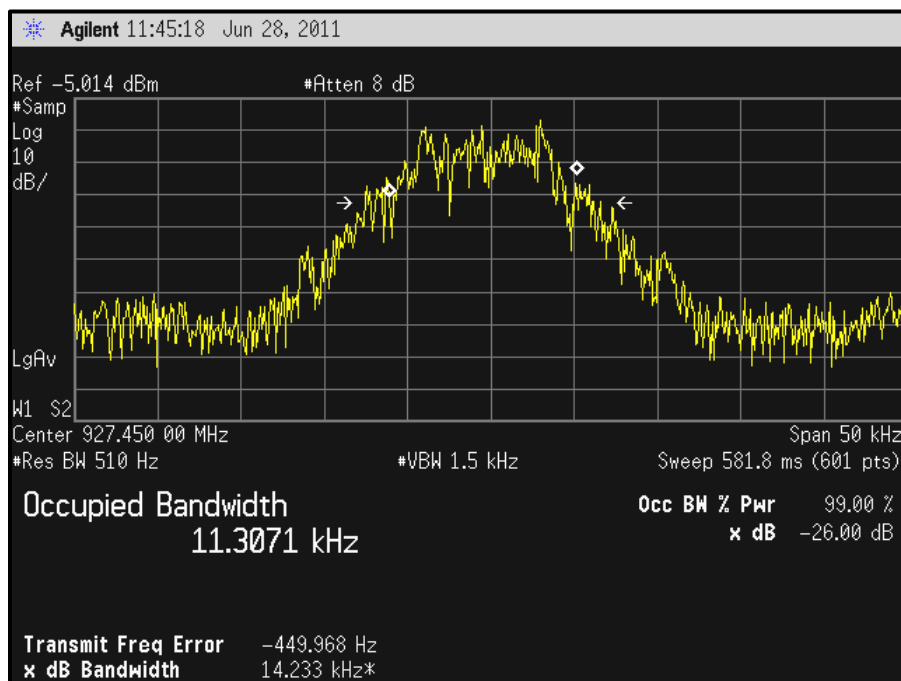



Table 7-2: Occupied Bandwidth Test Equipment

Part Type	Manufacturer	Model	Serial Number	RTL Barcode	Calibration Due Date
Spectrum Analyzer	Agilent Technologies	E4448A	US44020346	901413	4/08/12

Test Personnel:

Richard B. McMurray, P.E.		June 28, 2011
Test Engineer	Signature	Date of Test

8 Conclusion

The data in this measurement report shows that IKUSI Model TR800CE_MCX; FCC ID: PVTTR800CE-MCX, and IC: 4166A-TR800CEMCX, complies with all the applicable requirements of Parts 2 and 15 of the FCC Rules, and Industry Canada RSS-210 and RSS-Gen, for Limited Modular Approval.