


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2111

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/07/17/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 9/58/05

EUT: TABLET PC

Engineer Signature: STAR


Mode: TX Channel 1(802.11b)

Distance: 3m

Model: GT10V

Manufacturer: EKEN(HK)

Note: Report No.:ATE20131532

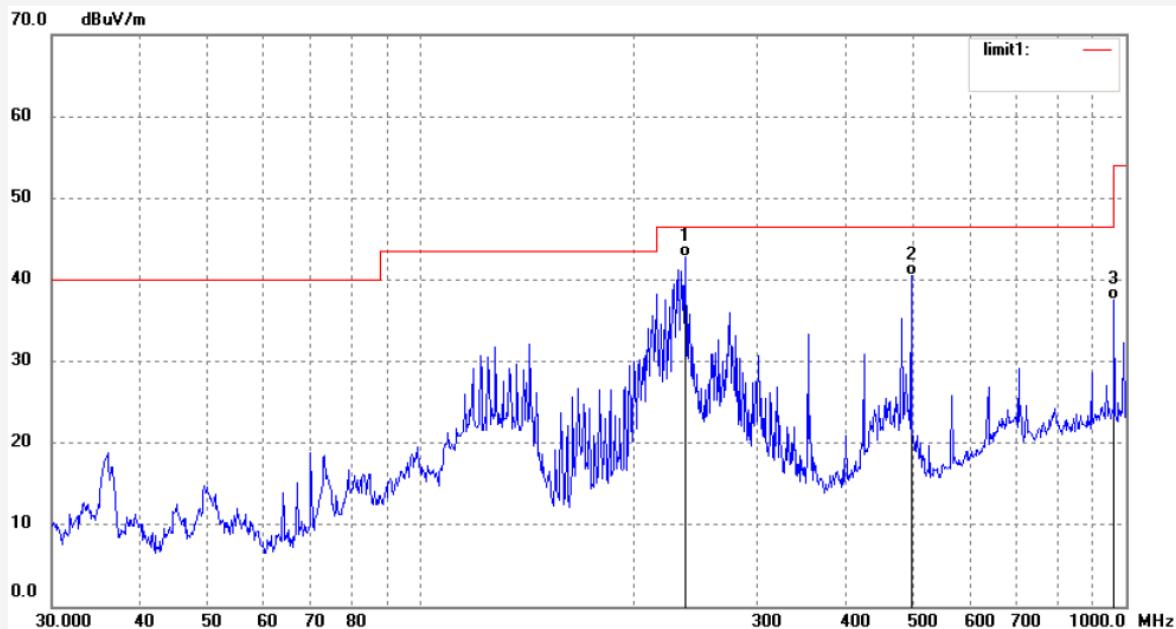


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	237.4760	62.61	-19.82	42.79	46.50	-3.71	QP			
2	495.9344	54.44	-13.99	40.45	46.50	-6.05	QP			
3	962.1623	42.73	-5.23	37.50	54.00	-16.50	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: star #2112	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/07/17/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 9/58/58
EUT: TABLET PC	Engineer Signature: STAR
Mode: TX Channel 1(802.11b)	Distance: 3m
Model: GT10V	
Manufacturer: EKEN(HK)	
Note: Report No.:ATE20131532	

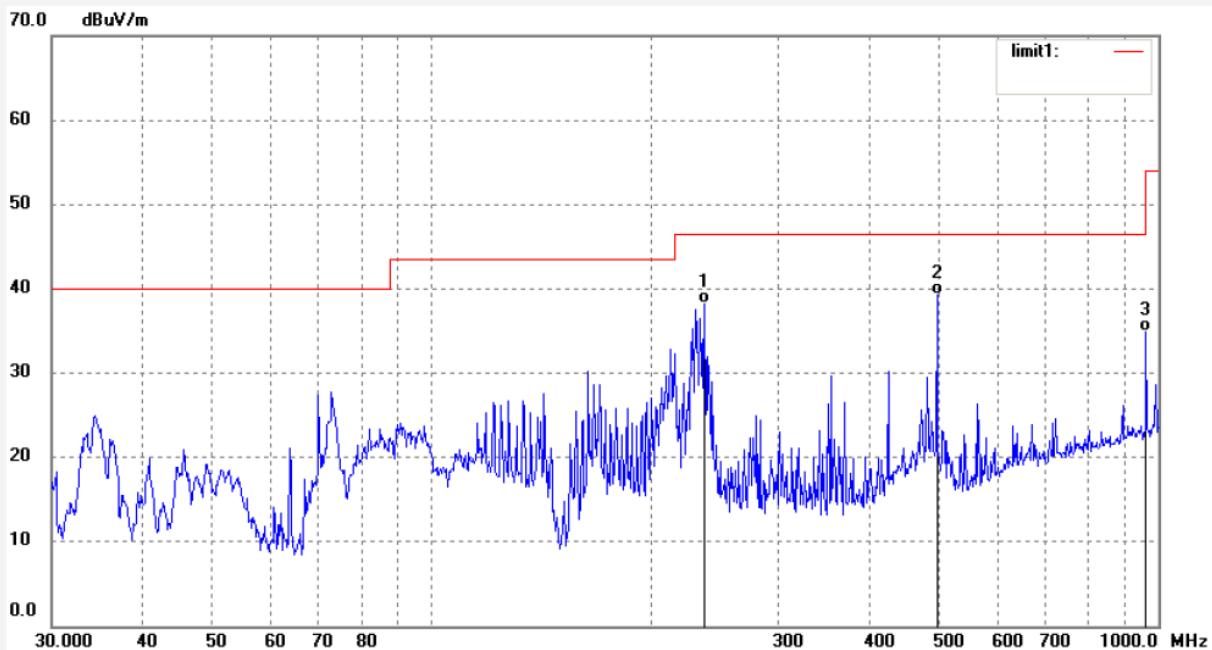

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	237.4760	58.10	-19.82	38.28	46.50	-8.22	QP			
2	495.9344	53.21	-13.99	39.22	46.50	-7.28	QP			
3	962.1623	40.08	-5.23	34.85	54.00	-19.15	QP			

Above 1G



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.ChinaSite: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #3777

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/07/20/

Temp.(C)/Hum.(%) 26 C / 55 %

Time: 13/30/36

EUT: TABLET PC

Engineer Signature:


Mode: TX Channel 1(802.11b)

Distance: 3m

Model: GT10V

Manufacturer: EKEN(HK)

Note: Report No.:ATE20131532

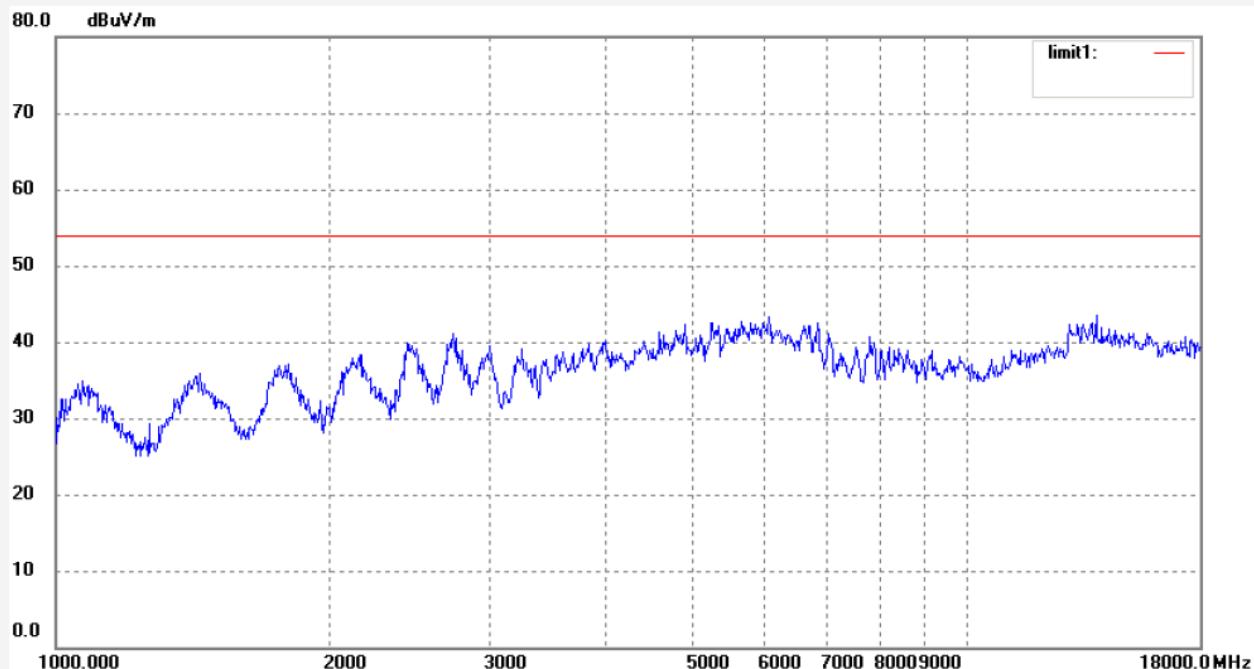

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: star #3778

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/07/20/

Temp.(C)/Hum.(%) 26 C / 55 %

Time: 13/35/58

EUT: TABLET PC

Engineer Signature:


Mode: TX Channel 1(802.11b)

Distance: 3m

Model: GT10V

Manufacturer: EKEN(HK)

Note: Report No.:ATE20131532

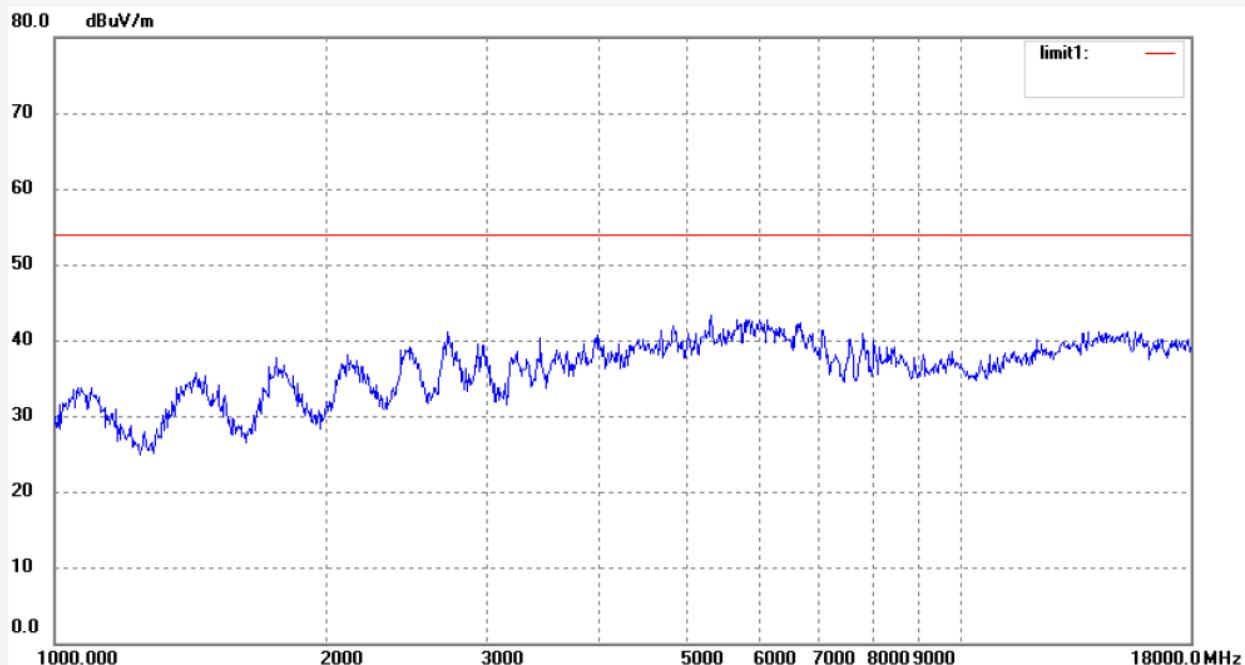


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	star #3779	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	13/07/20/
Temp.(C)/Hum.(%)	26 C / 55 %	Time:	13/39/22
EUT:	TABLET PC	Engineer Signature:	
Mode:	TX Channel 6(802.11b)	Distance:	3m
Model:	GT10V		
Manufacturer:	EKEN(HK)		
Note:	Report No.:ATE20131532		

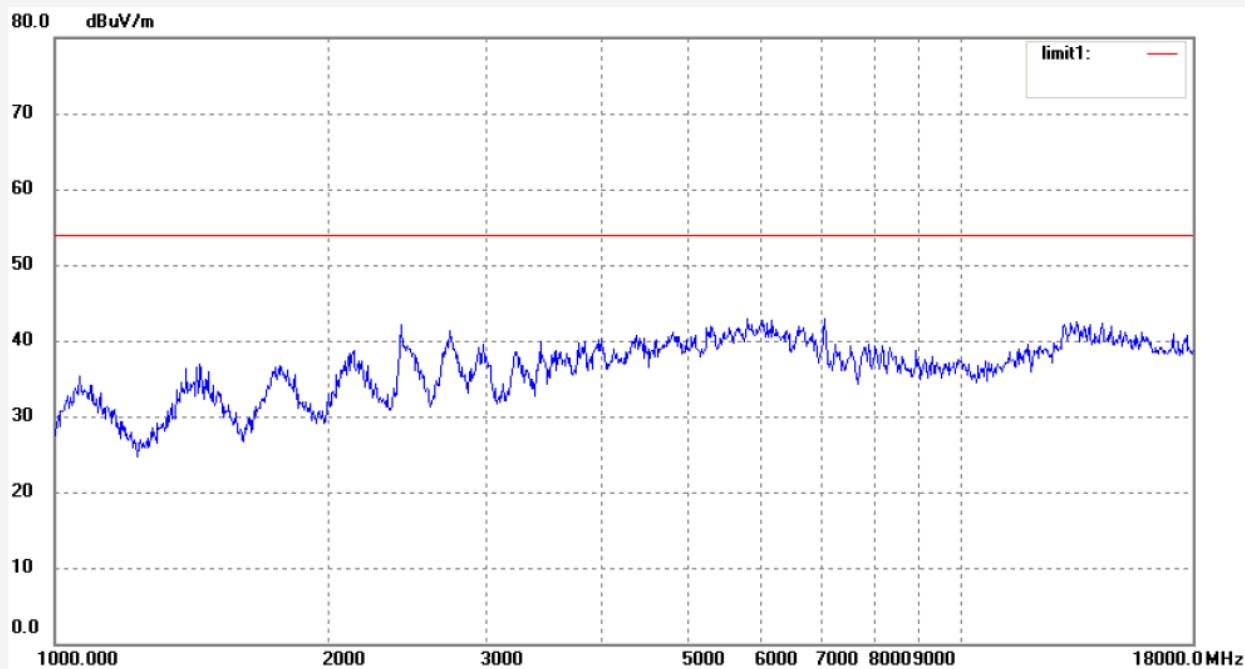

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: star #3780

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/07/20/

Temp.(C)/Hum.(%) 26 C / 55 %

Time: 13/41/47

EUT: TABLET PC

Engineer Signature:


Mode: TX Channel 6(802.11b)

Distance: 3m

Model: GT10V

Manufacturer: EKEN(HK)

Note: Report No.:ATE20131532

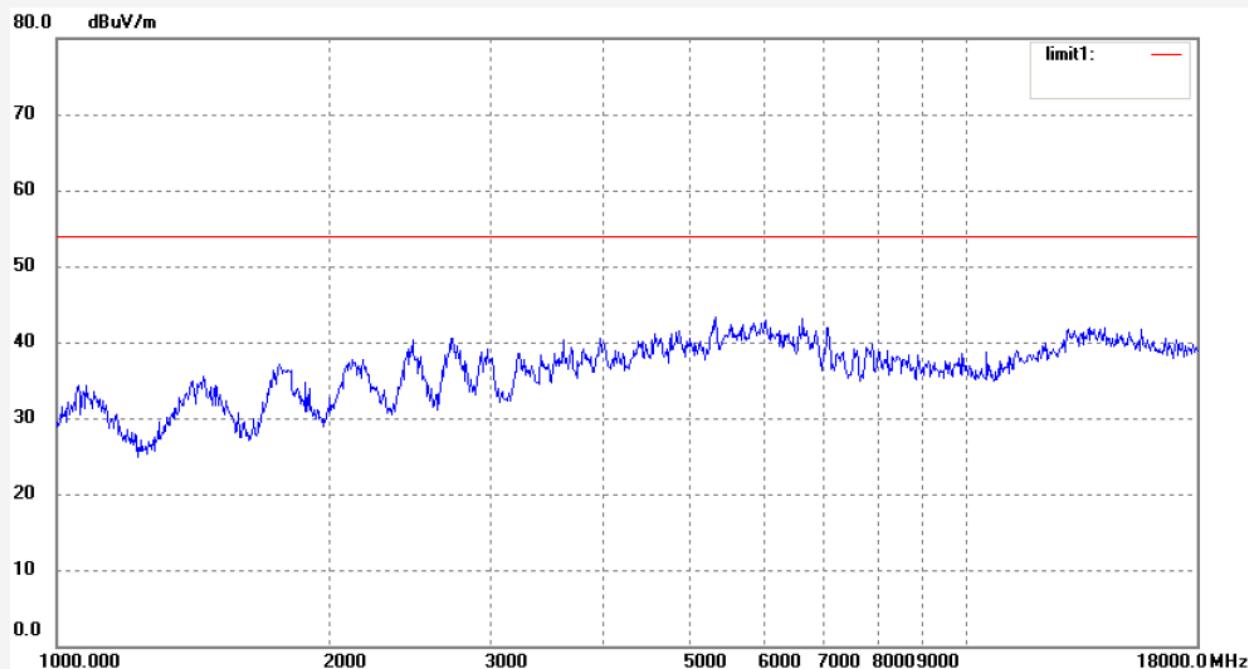

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: star #3781

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/07/20/

Temp.(C)/Hum.(%) 26 C / 55 %

Time: 13/46/13

EUT: TABLET PC

Engineer Signature:


Mode: TX Channel 11(802.11b)

Distance: 3m

Model: GT10V

Manufacturer: EKEN(HK)

Note: Report No.:ATE20131532

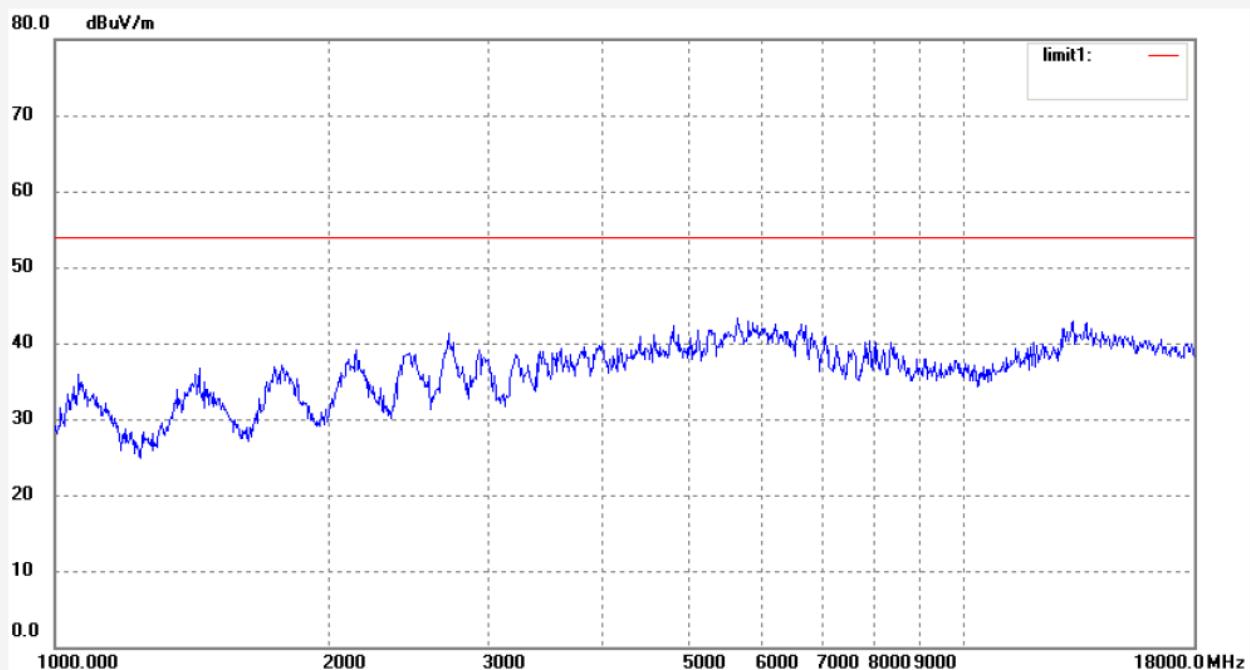

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: star #3782

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/07/20/

Temp.(C)/Hum.(%) 26 C / 55 %

Time: 13/50/31

EUT: TABLET PC

Engineer Signature:


Mode: TX Channel 11(802.11b)

Distance: 3m

Model: GT10V

Manufacturer: EKEN(HK)

Note: Report No.:ATE20131532

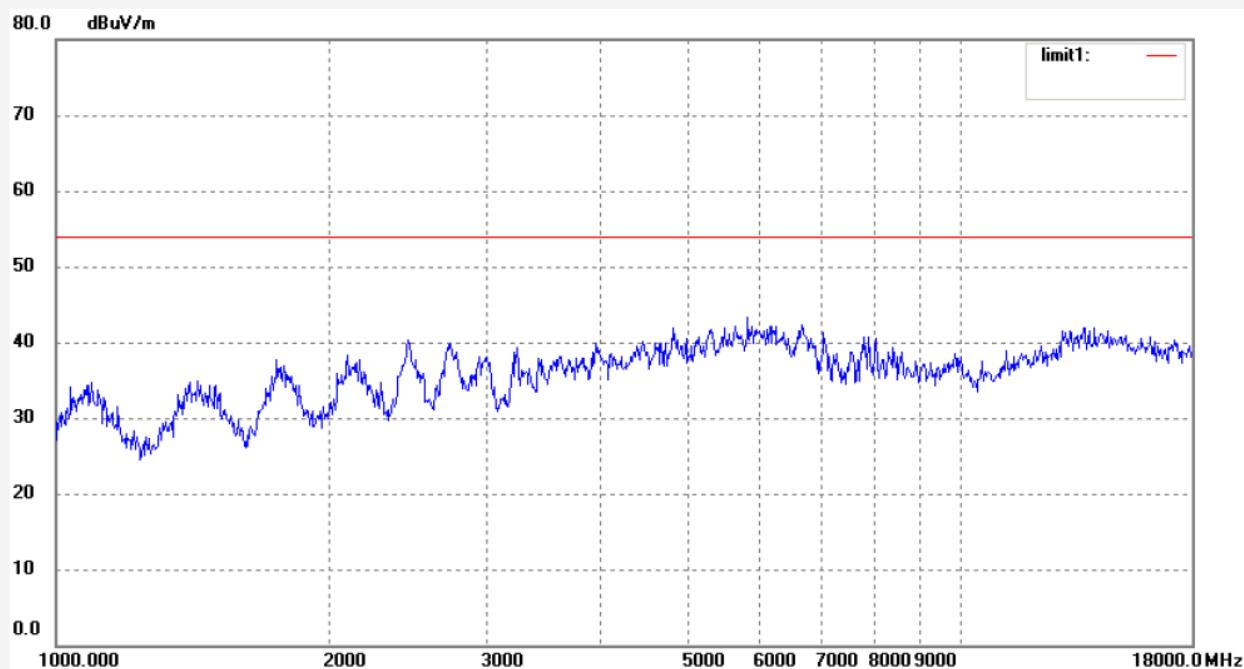

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: star #3783

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/07/20/

Temp.(C)/Hum.(%) 26 C / 55 %

Time: 13/53/15

EUT: TABLET PC

Engineer Signature:


Mode: TX Channel 1(802.11g)

Distance: 3m

Model: GT10V

Manufacturer: EKEN(HK)

Note: Report No.:ATE20131532

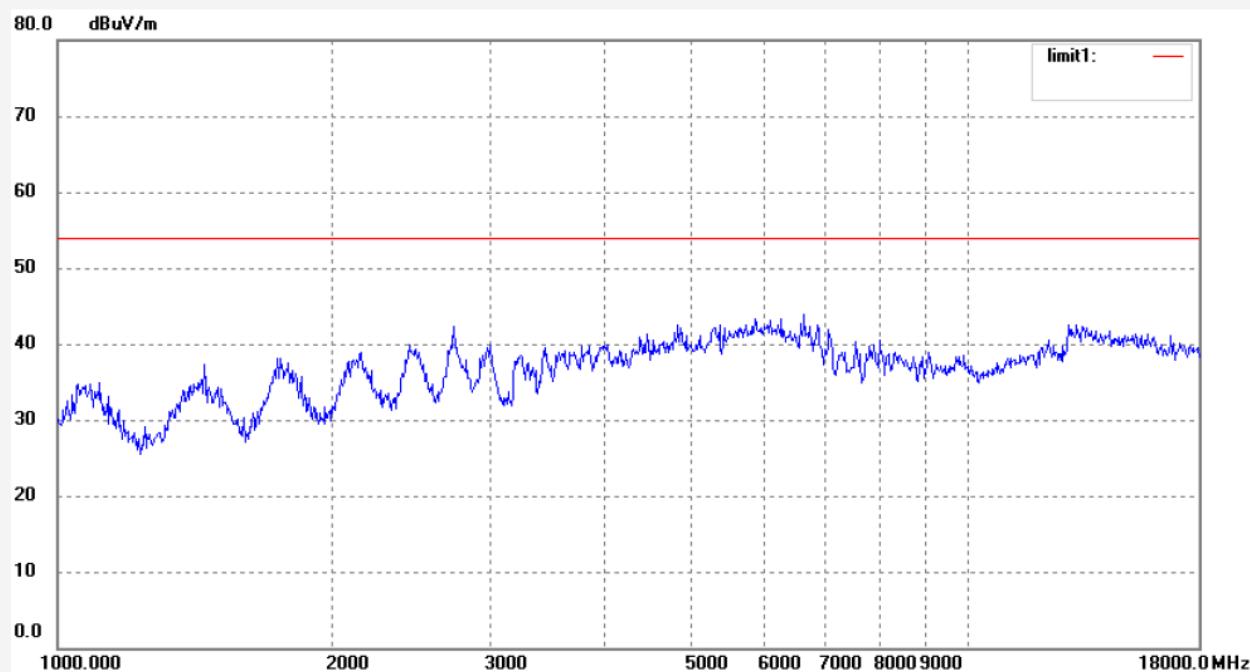

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: star #3784

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/07/20/

Temp.(C)/Hum.(%) 26 C / 55 %

Time: 13/57/44

EUT: TABLET PC

Engineer Signature:


Mode: TX Channel 1(802.11g)

Distance: 3m

Model: GT10V

Manufacturer: EKEN(HK)

Note: Report No.:ATE20131532

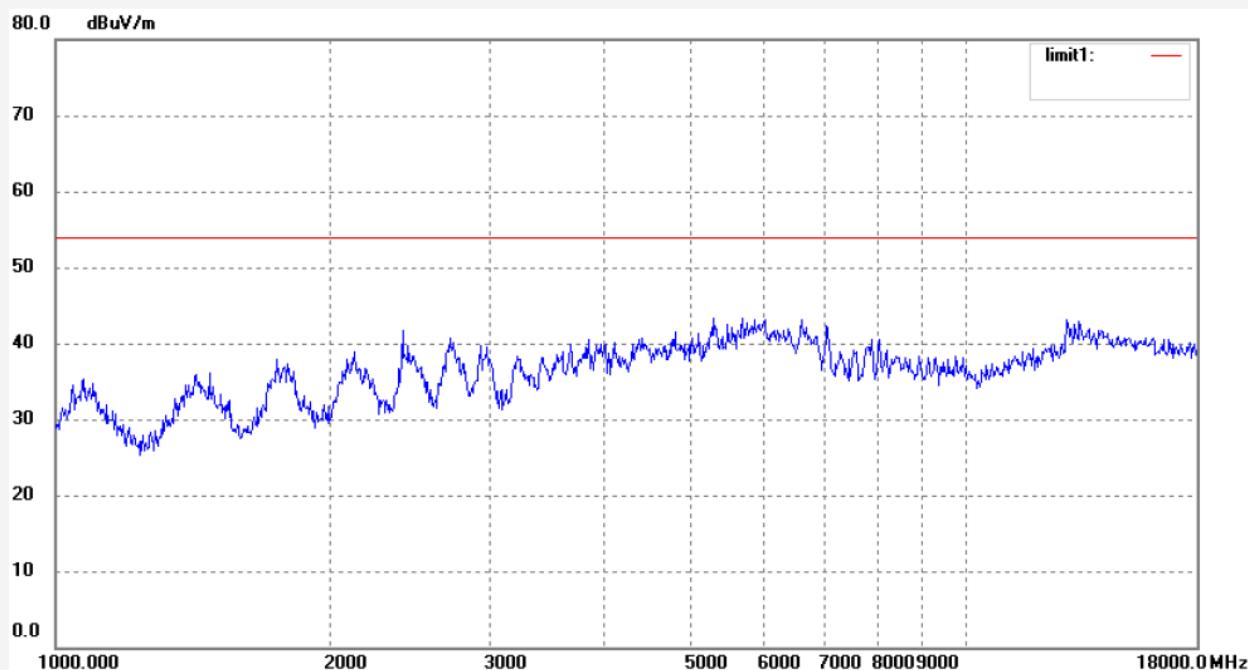

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: star #3785

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/07/20/

Temp.(C)/Hum.(%) 26 C / 55 %

Time: 14/00/10

EUT: TABLET PC

Engineer Signature:


Mode: TX Channel 6(802.11g)

Distance: 3m

Model: GT10V

Manufacturer: EKEN(HK)

Note: Report No.:ATE20131532

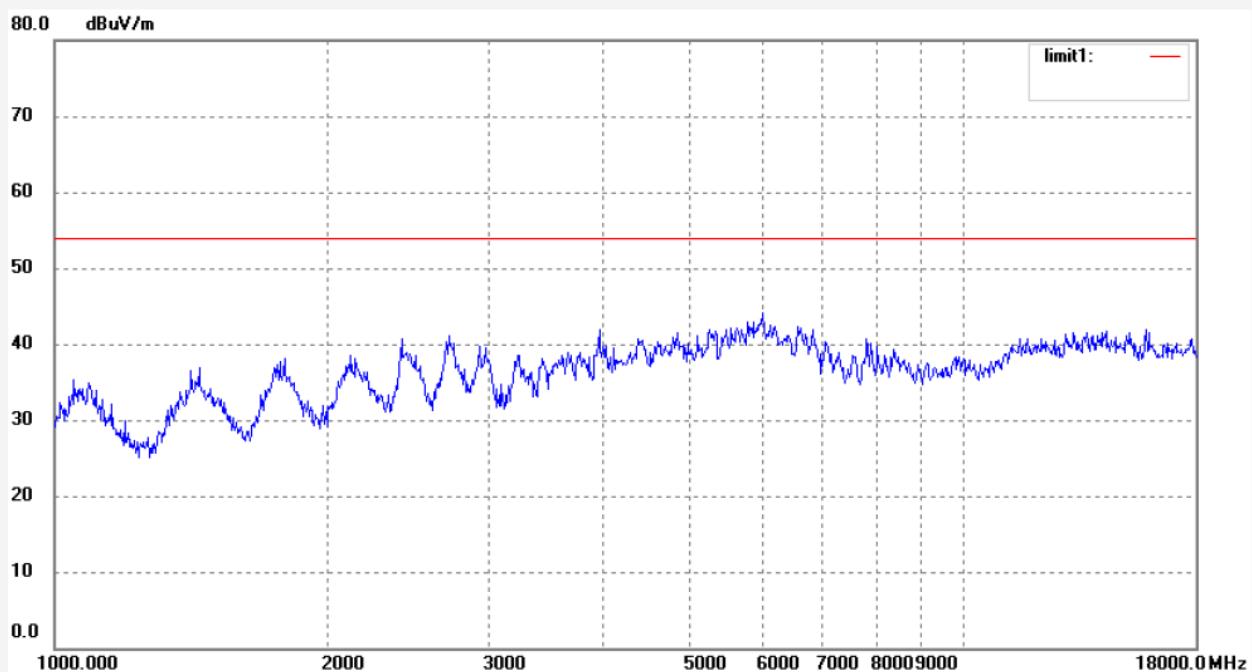

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: star #3786

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/07/20/

Temp.(C)/Hum.(%) 26 C / 55 %

Time: 14/04/42

EUT: TABLET PC

Engineer Signature:


Mode: TX Channel 6(802.11g)

Distance: 3m

Model: GT10V

Manufacturer: EKEN(HK)

Note: Report No.:ATE20131532

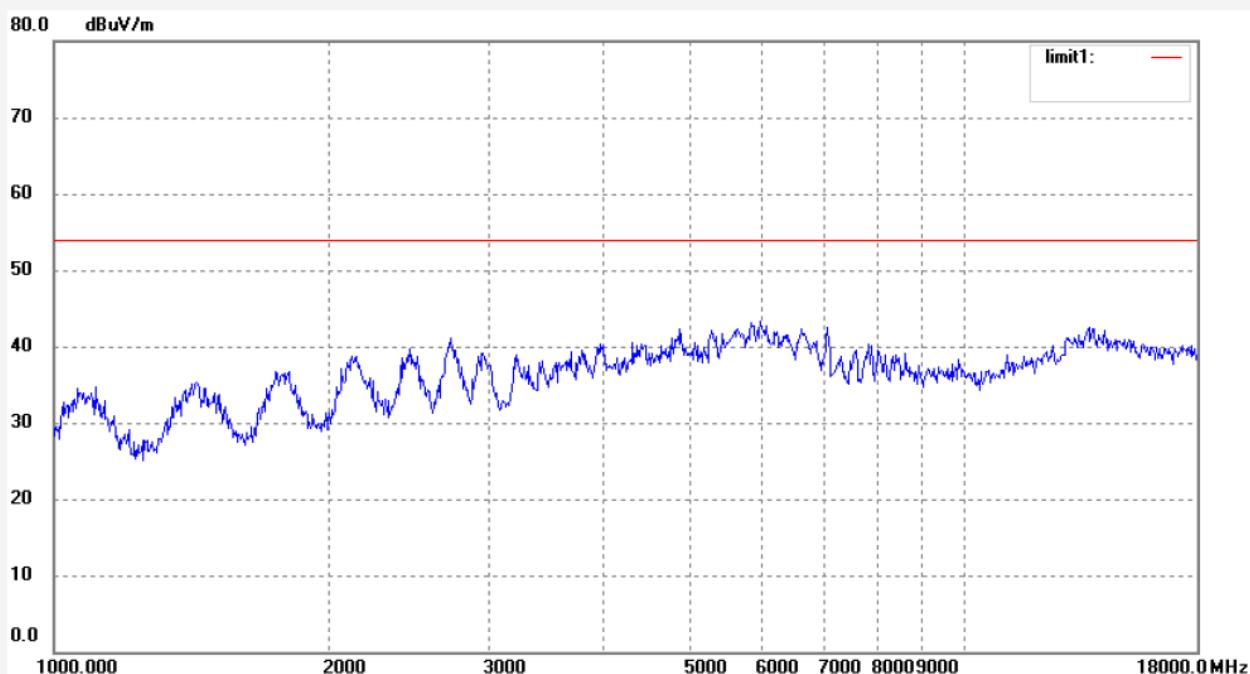


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	star #3787	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	13/07/20/
Temp.(C)/Hum.(%)	26 C / 55 %	Time:	14/09/59
EUT:	TABLET PC	Engineer Signature:	
Mode:	TX Channel 11(802.11g)	Distance:	3m
Model:	GT10V		
Manufacturer:	EKEN(HK)		
Note: Report No.:ATE20131532			

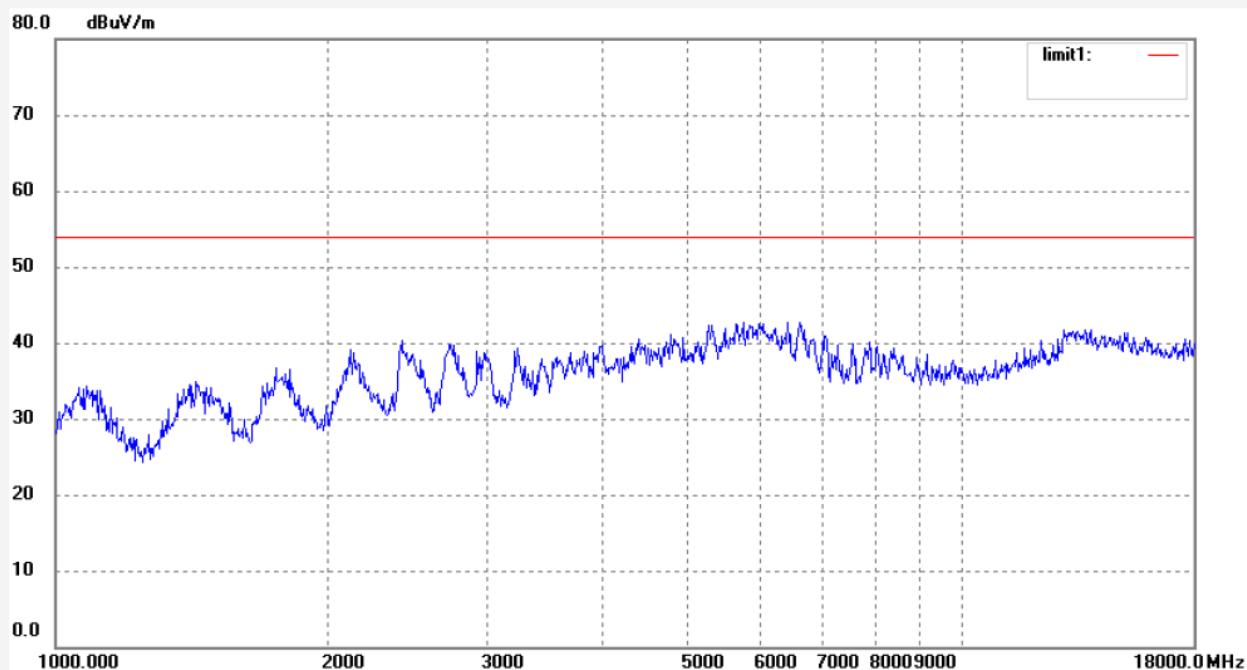

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.


 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

 Job No.: star #3788
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 26 C / 55 %
 EUT: TABLET PC
 Mode: TX Channel 11(802.11g)
 Model: GT10V
 Manufacturer: EKEN(HK)

 Polarization: Horizontal
 Power Source: AC 120V/60Hz
 Date: 13/07/20/
 Time: 14/13/35
 Engineer Signature:
 Distance: 3m

Note: Report No.:ATE20131532

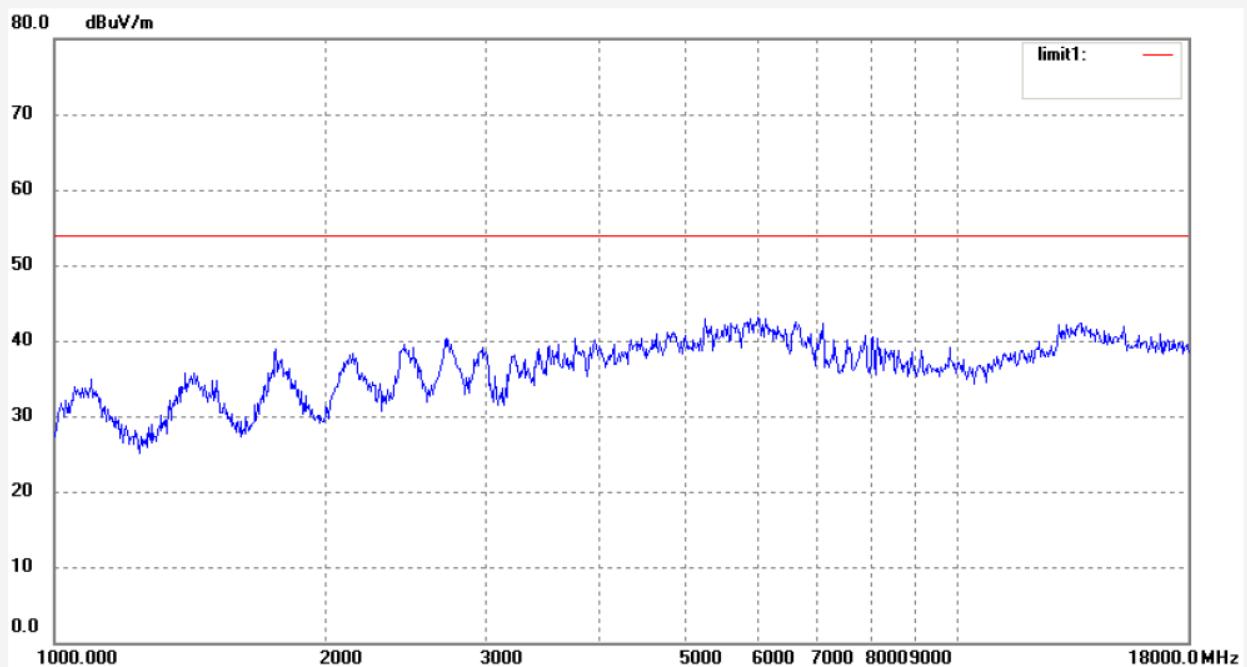

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: star #3789

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/07/20/

Temp. (C)/Hum.(%) 26 C / 55 %

Time: 14/17/59

EUT: TABLET PC

Engineer Signature:


Mode: TX Channel 1(802.11n)

Distance: 3m

Model: GT10V

Manufacturer: EKEN(HK)

Note: Report No.:ATE20131532

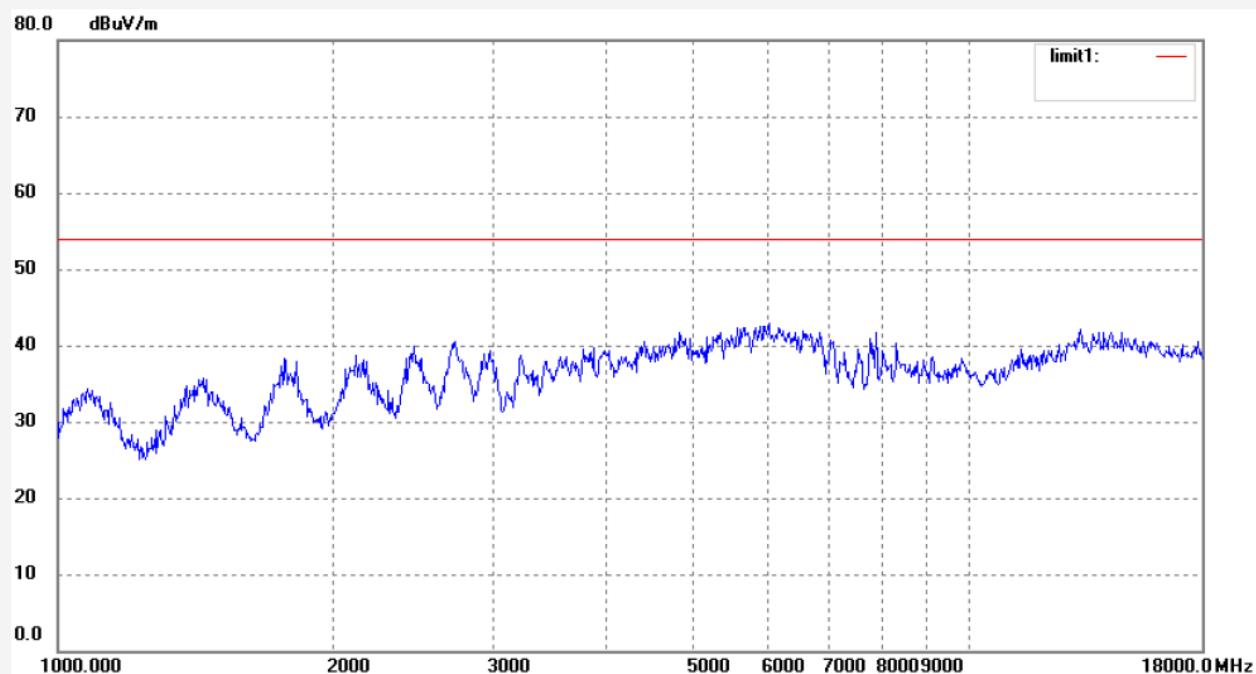

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: star #3790

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/07/20/

Temp.(C)/Hum.(%) 26 C / 55 %

Time: 14/21/35

EUT: TABLET PC

Engineer Signature:


Mode: TX Channel 1(802.11n)

Distance: 3m

Model: GT10V

Manufacturer: EKEN(HK)

Note: Report No.:ATE20131532

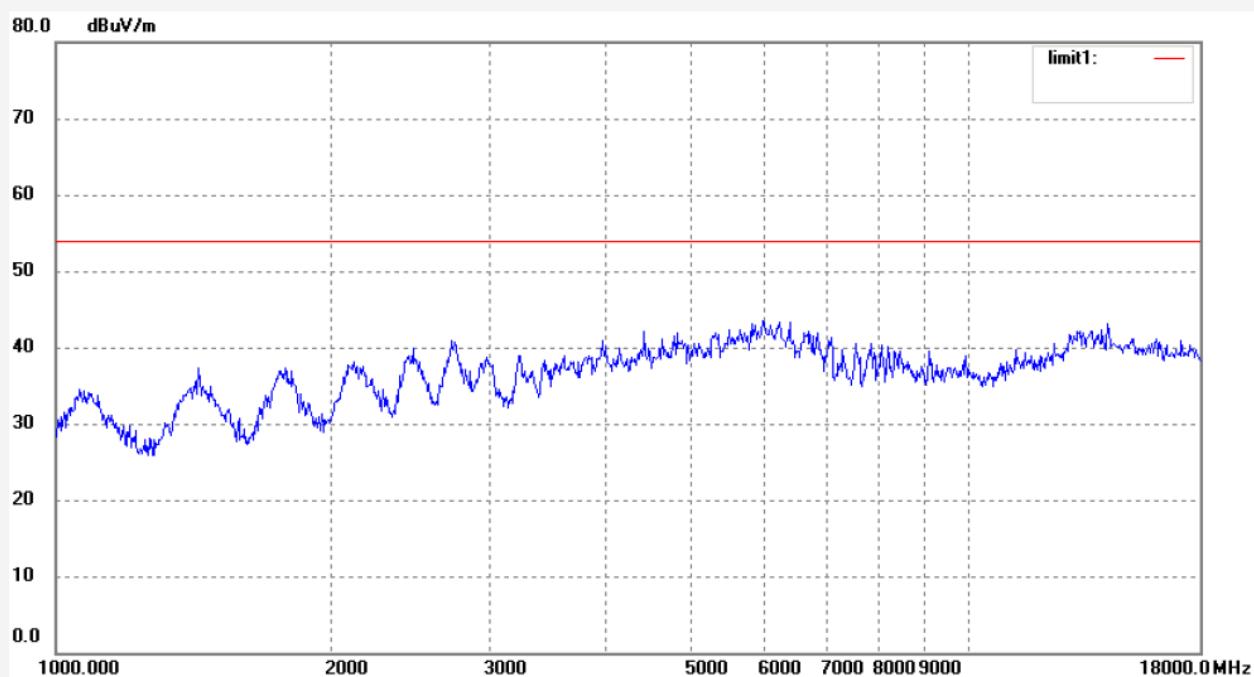


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	star #3791	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	13/07/20/
Temp. (C)/Hum.(%)	26 C / 55 %	Time:	14/27/00
EUT:	TABLET PC	Engineer Signature:	
Mode:	TX Channel 6(802.11n)	Distance:	3m
Model:	GT10V		
Manufacturer:	EKEN(HK)		
Note:	Report No.:ATE20131532		

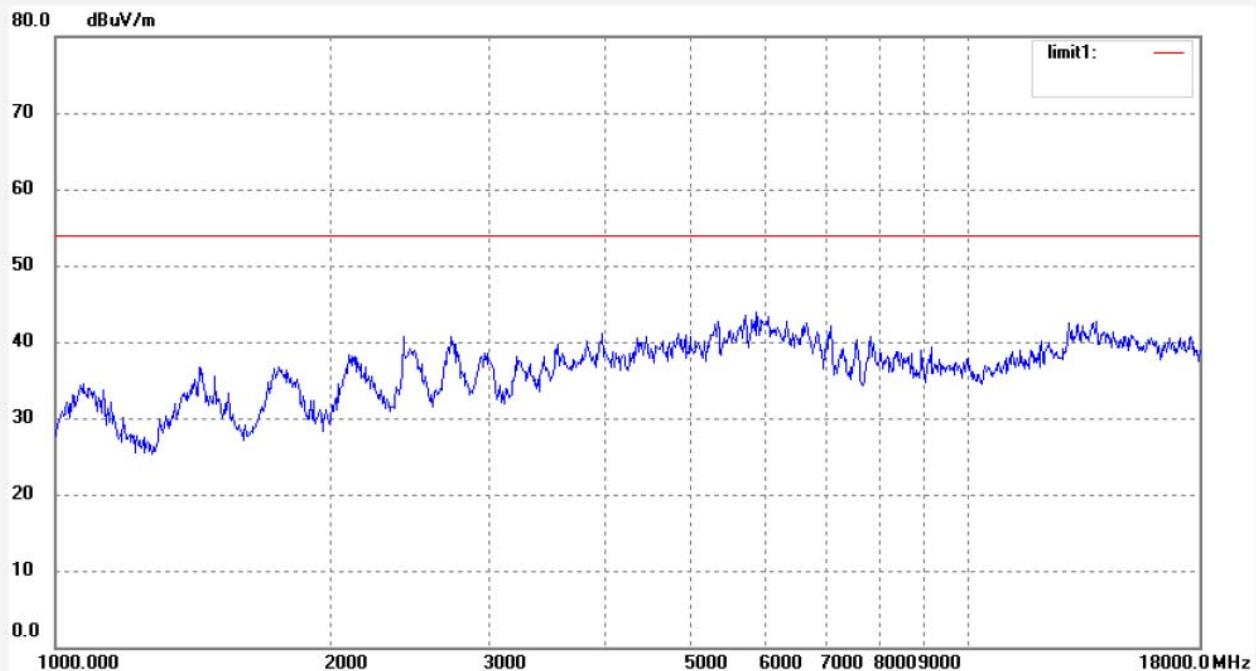


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: star #3792	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/07/20/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 14/31/23
EUT: TABLET PC	Engineer Signature:
Mode: TX Channel 6(802.11n)	Distance: 3m
Model: GT10V	
Manufacturer: EKEN(HK)	
Note: Report No.:ATE20131532	

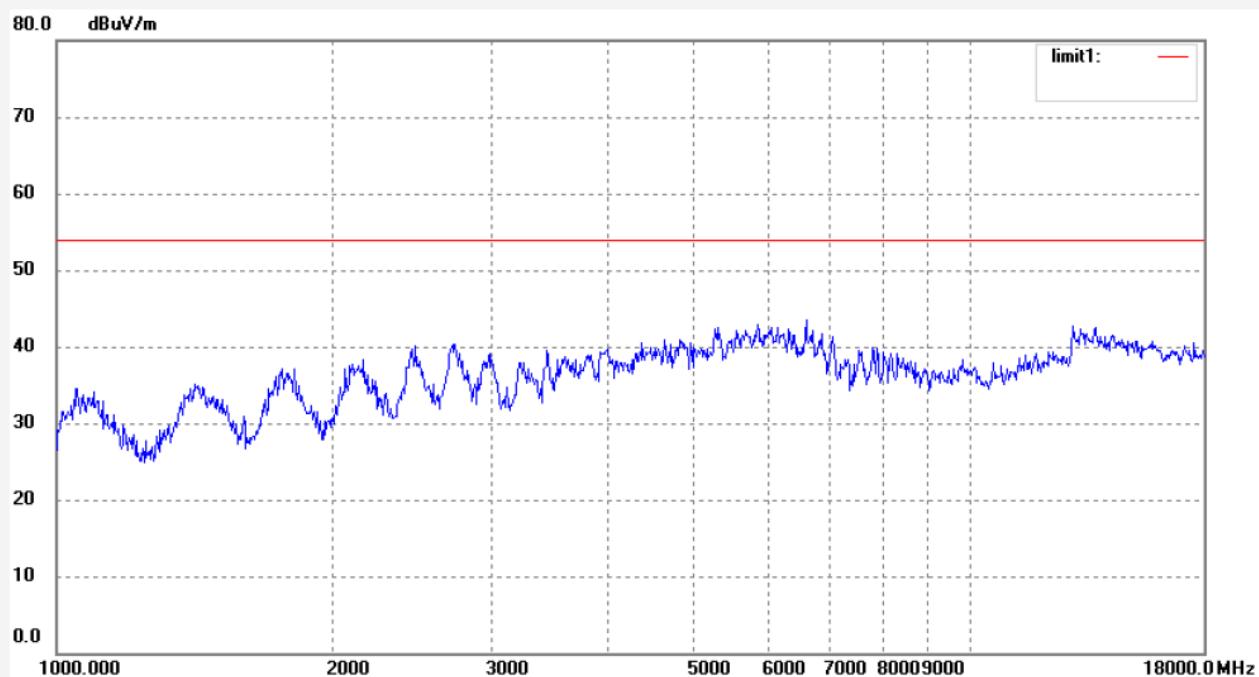


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	star #3793	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	13/07/20
Temp.(C)/Hum.(%)	26 C / 55 %	Time:	14:35:57
EUT:	TABLET PC	Engineer Signature:	
Mode:	TX Channel 11(802.11n)	Distance:	3m
Model:	GT10V		
Manufacturer:	EKEN(HK)		
Note:	Report No.:ATE20131532		

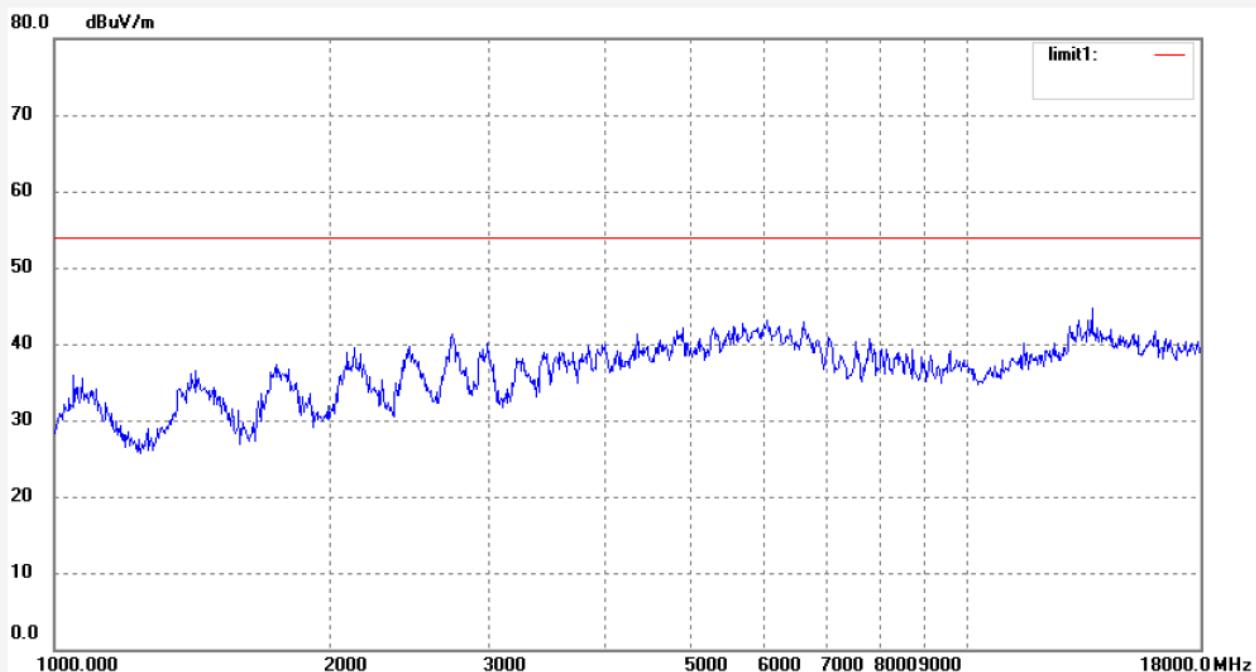


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	star #3794	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	13/07/20/
Temp.(C)/Hum.(%)	26 C / 55 %	Time:	14/38/34
EUT:	TABLET PC	Engineer Signature:	
Mode:	TX Channel 11(802.11n)	Distance:	3m
Model:	GT10V		
Manufacturer:	EKEN(HK)		
Note:	Report No.:ATE20131532		

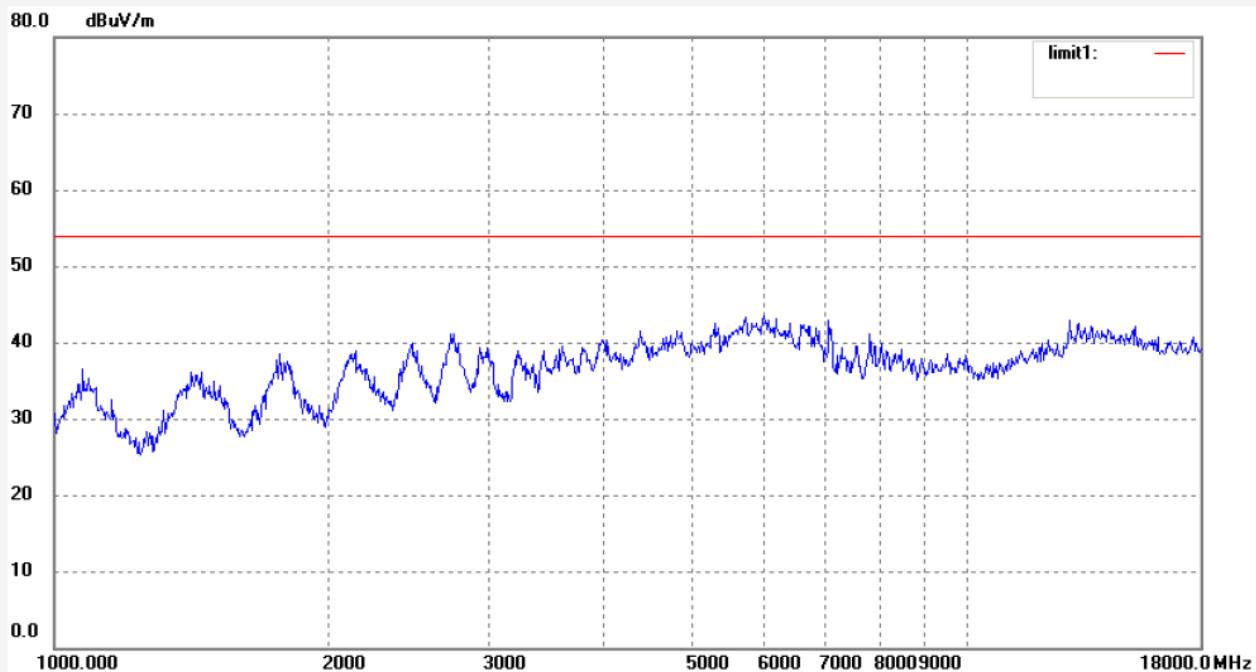

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark



ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	star #3795	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	13/07/20/
Temp.(C)/Hum.(%)	26 C / 55 %	Time:	14/42/20
EUT:	TABLET PC	Engineer Signature:	
Mode:	TX Channel 3(802.11n)40MHz	Distance:	3m
Model:	GT10V		
Manufacturer:	EKEN(HK)		

Note: Report No.:ATE20131532

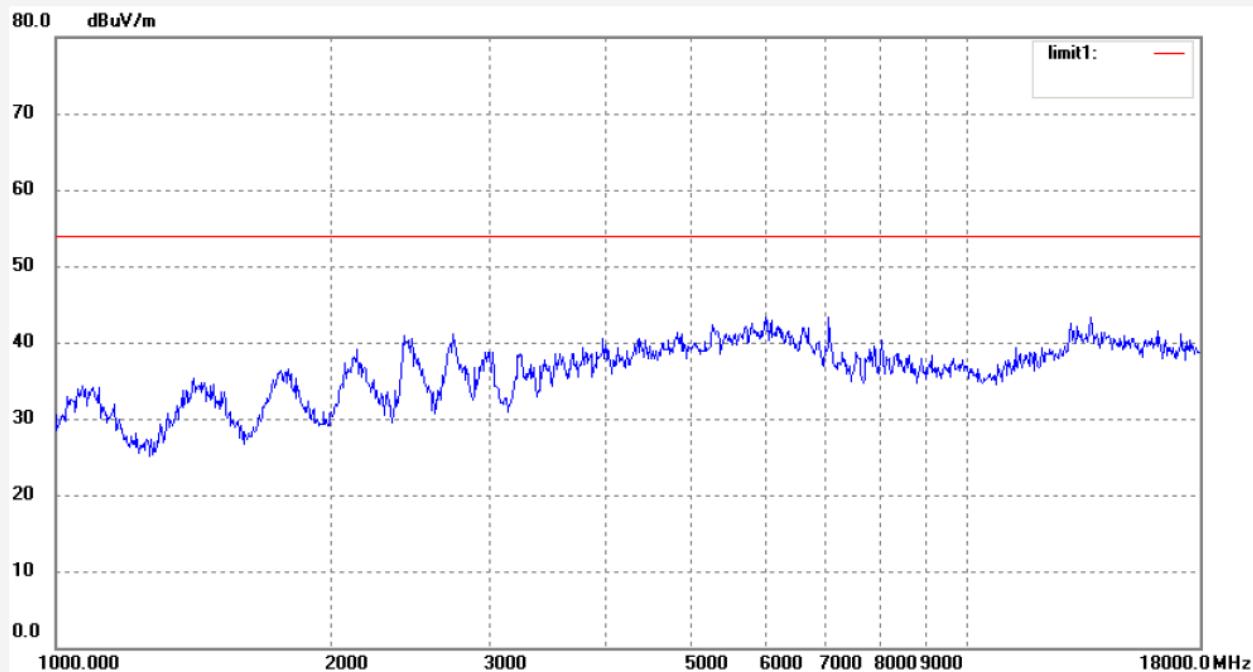


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	star #3796	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	13/07/20/
Temp.(C)/Hum.(%)	26 C / 55 %	Time:	14/46/09
EUT:	TABLET PC	Engineer Signature:	
Mode:	TX Channel 3(802.11n)40MHz	Distance:	3m
Model:	GT10V		
Manufacturer:	EKEN(HK)		
Note:	Report No.:ATE20131532		

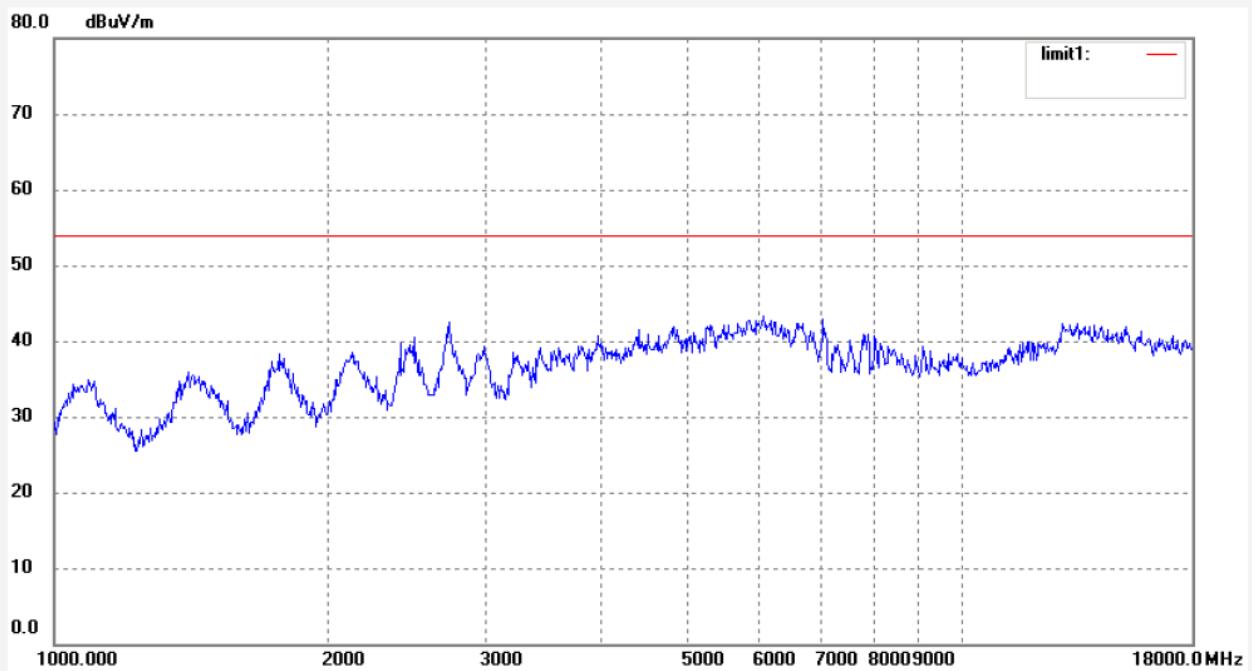


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	star #3797	Polarization:	Horizontal
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	13/07/20/
Temp. (C)/Hum.(%)	26 C / 55 %	Time:	14:49:05
EUT:	TABLET PC	Engineer Signature:	
Mode:	TX Channel 6(802.11n)40MHz	Distance:	3m
Model:	GT10V		
Manufacturer:	EKEN(HK)		
Note:	Report No.:ATE20131532		

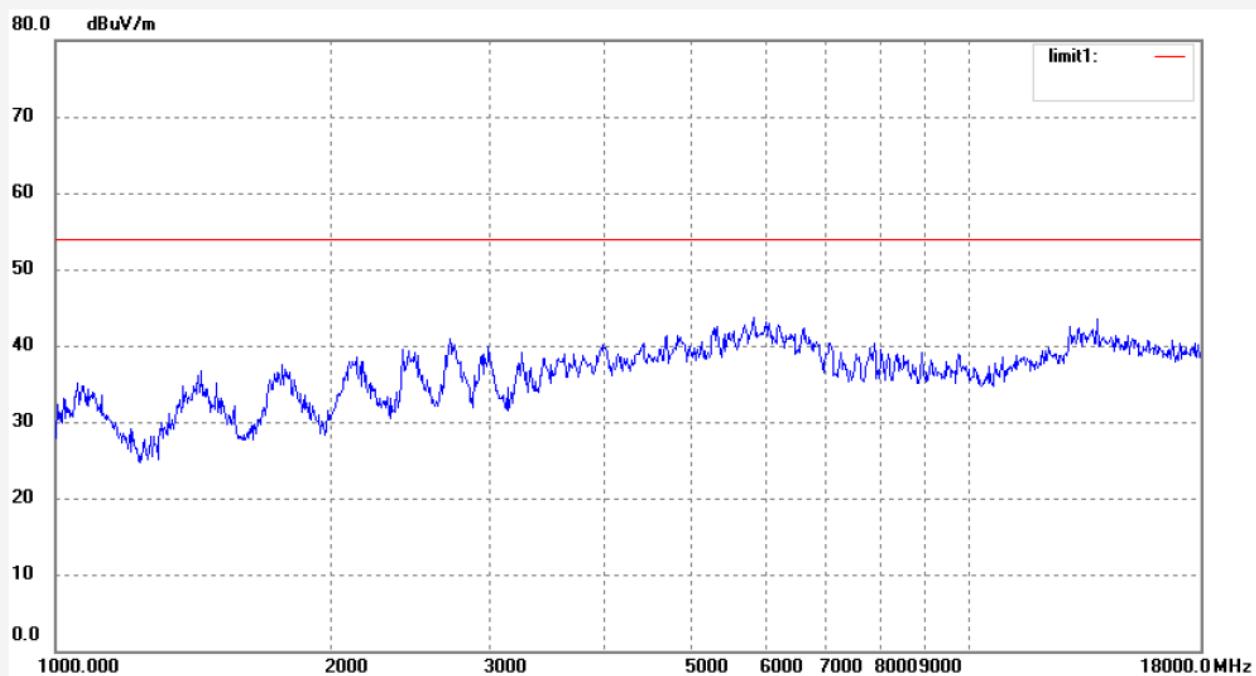


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.:	star #3798	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	13/07/20/
Temp. (C)/Hum.(%)	26 C / 55 %	Time:	14/51/37
EUT:	TABLET PC	Engineer Signature:	
Mode:	TX Channel 6(802.11n)40MHz	Distance:	3m
Model:	GT10V		
Manufacturer:	EKEN(HK)		
Note:	Report No.:ATE20131532		

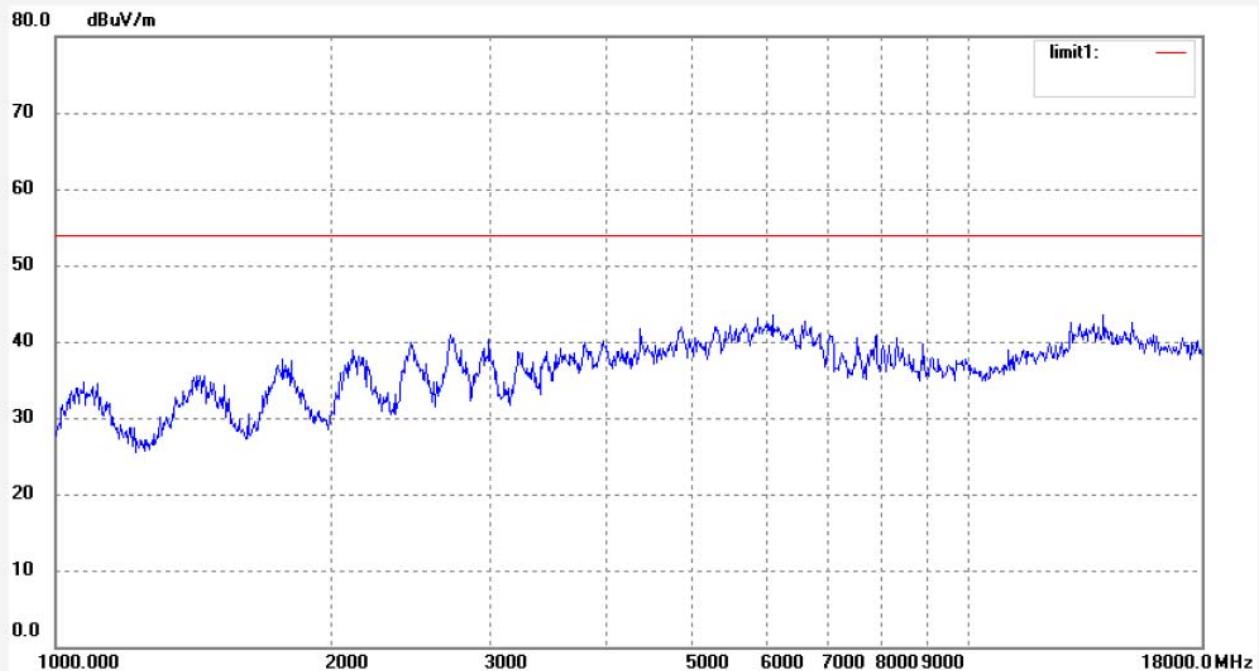

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: star #3799

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/07/20/

Temp.(C)/Hum.(%) 26 C / 55 %

Time: 14/55/02

EUT: TABLET PC

Engineer Signature:


Mode: TX Channel 9(802.11n)40MHz

Distance: 3m

Model: GT10V

Manufacturer: EKEN(HK)

Note: Report No.:ATE20131532

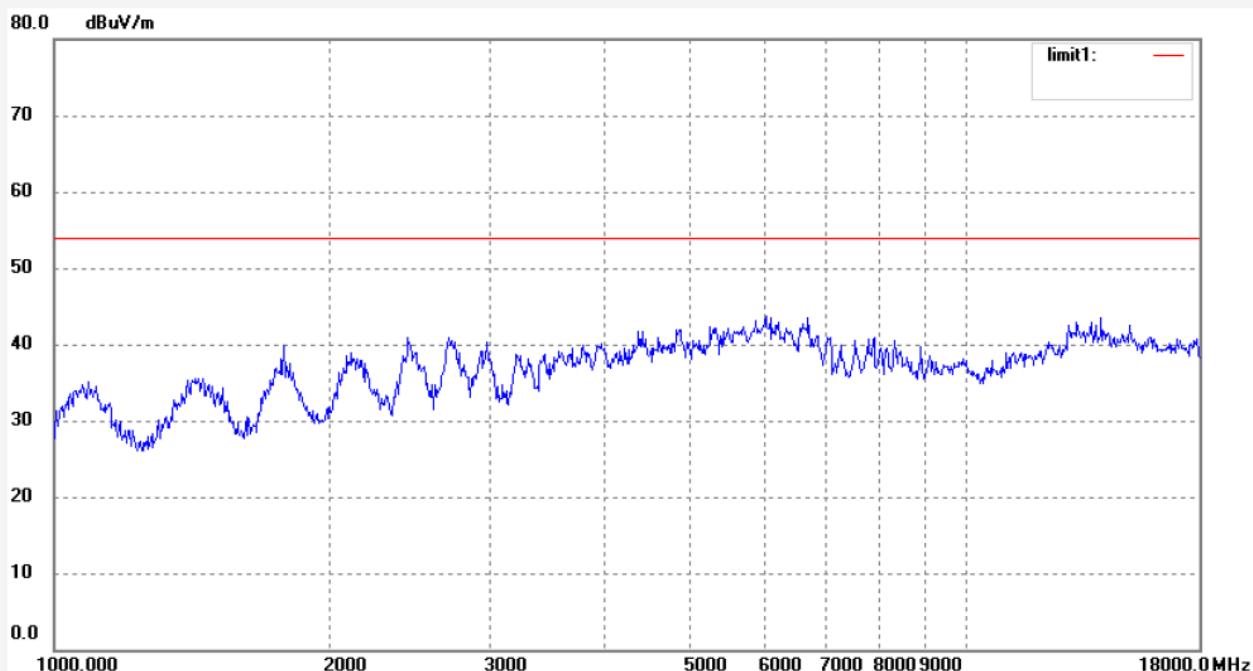

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: star #3800

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/07/20/

Temp. (C)/Hum.(%) 26 C / 55 %

Time: 14/59/31

EUT: TABLET PC

Engineer Signature:


Mode: TX Channel 9(802.11n)40MHz

Distance: 3m

Model: GT10V

Manufacturer: EKEN(HK)


Note: Report No.:ATE20131532

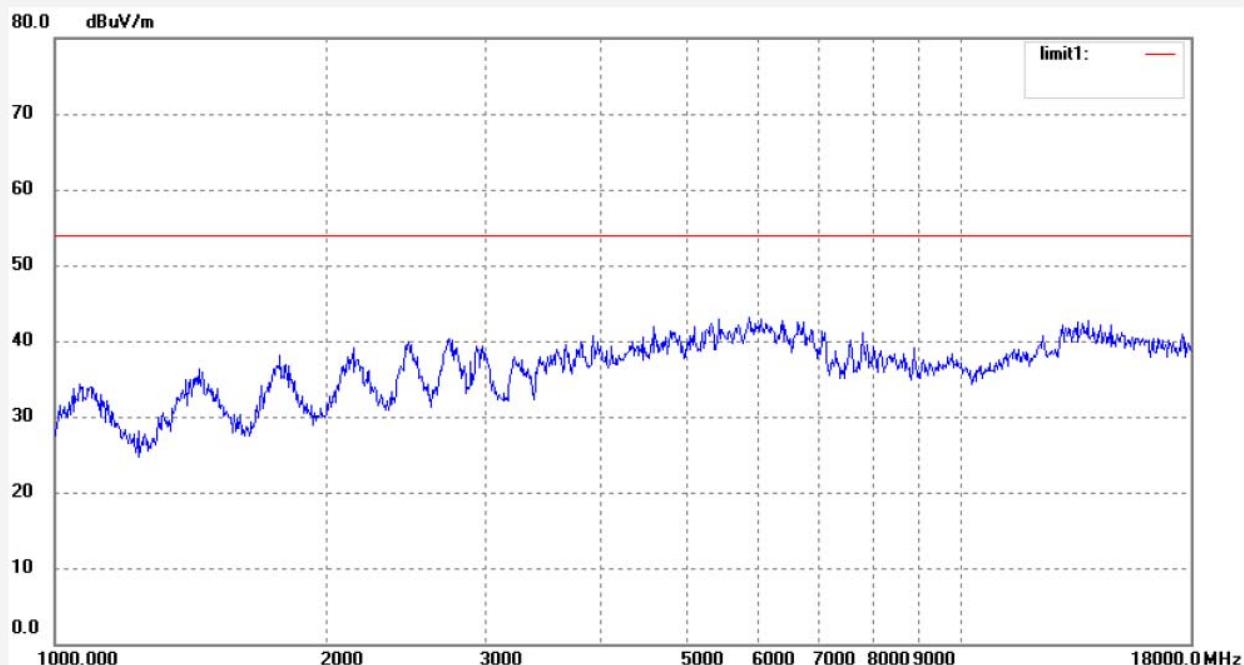

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

10. CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

10.1. Block Diagram of Test Setup

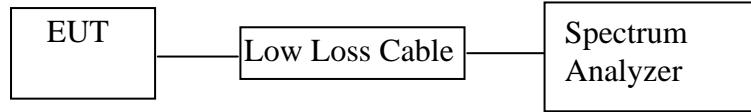

10.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3. EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.4. Operating Condition of EUT

10.4.1. Setup the EUT and simulator as shown as Section 10.1.

10.4.2. Turn on the power of all equipment.

10.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

10.5. Test Procedure


- 10.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- 10.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz (below 1GHz).
- 10.5.3. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz (above 1GHz).
- 10.5.4. The Conducted Spurious Emission was measured and recorded.

10.6. Test Result


Pass.

The spectrum analyzer plots are attached as below.


TX 802.11b Channel Low 2412MHz (30MHz-1GHz)

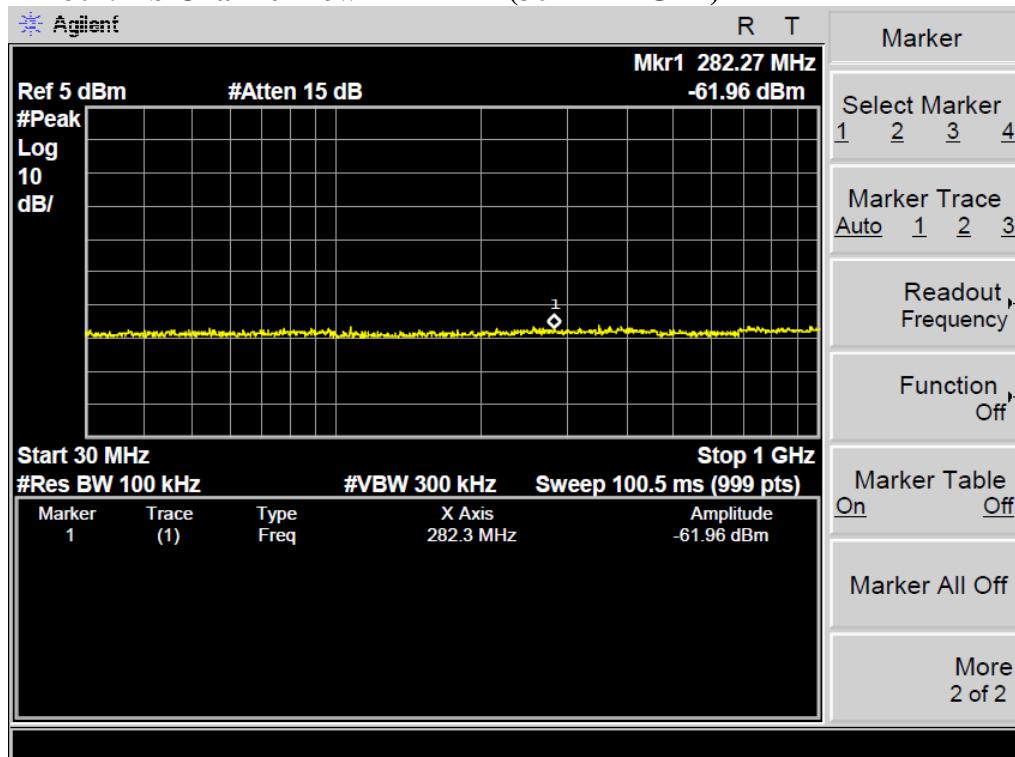


TX 802.11b Channel Low 2412MHz (1GHz-25GHz)

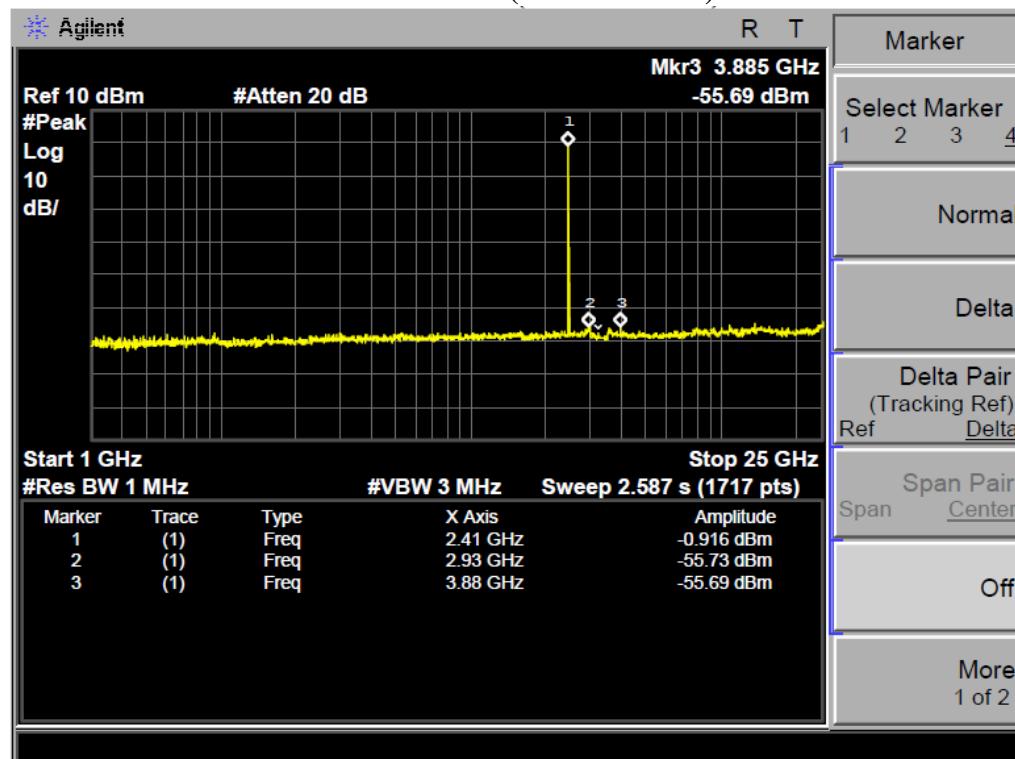


TX 802.11b Channel Middle 2437MHz (30MHz-1GHz)

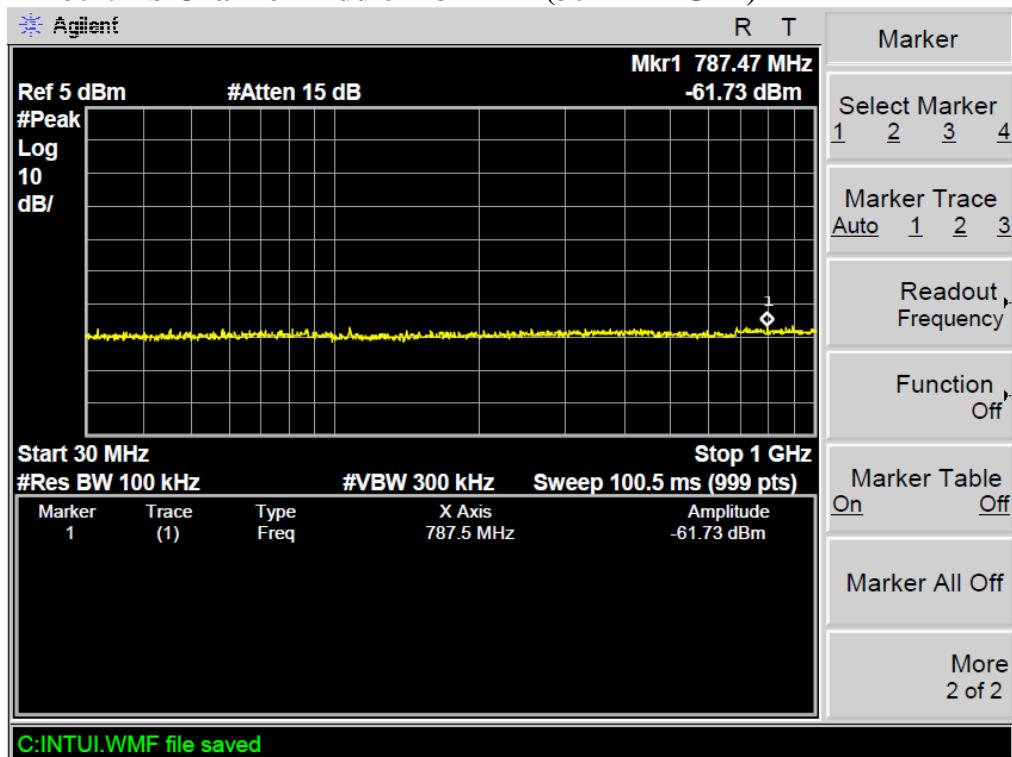


TX 802.11b Channel Middle 2437MHz (1GHz-25GHz)

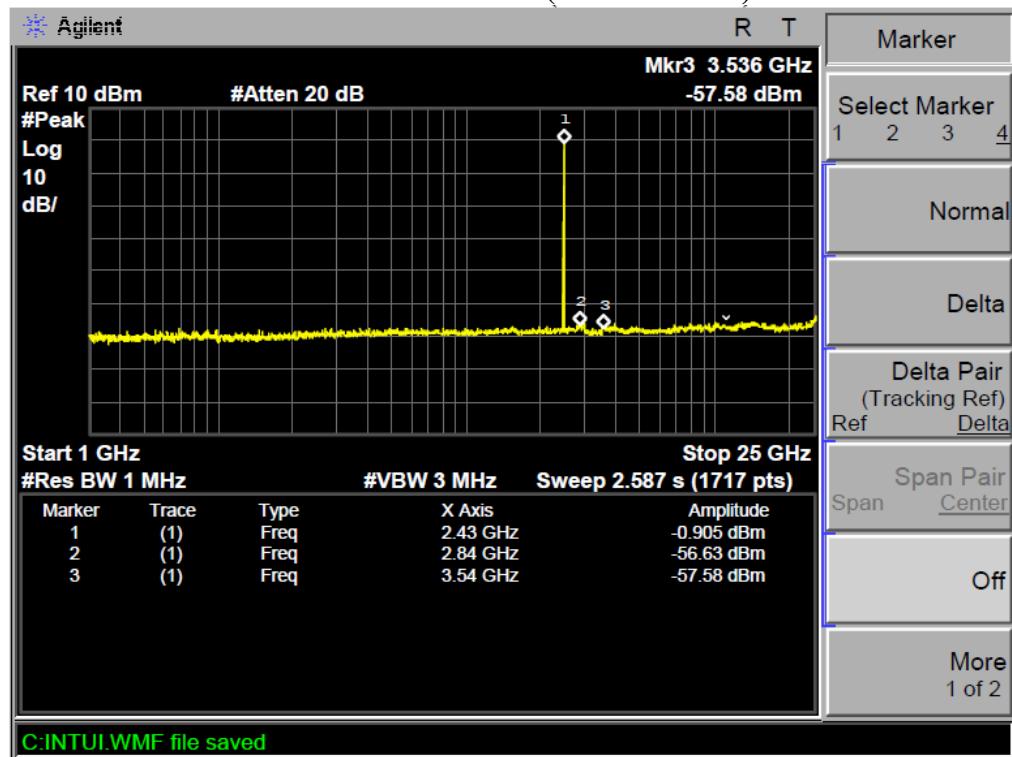


TX 802.11b Channel High 2462MHz (30MHz-1GHz)

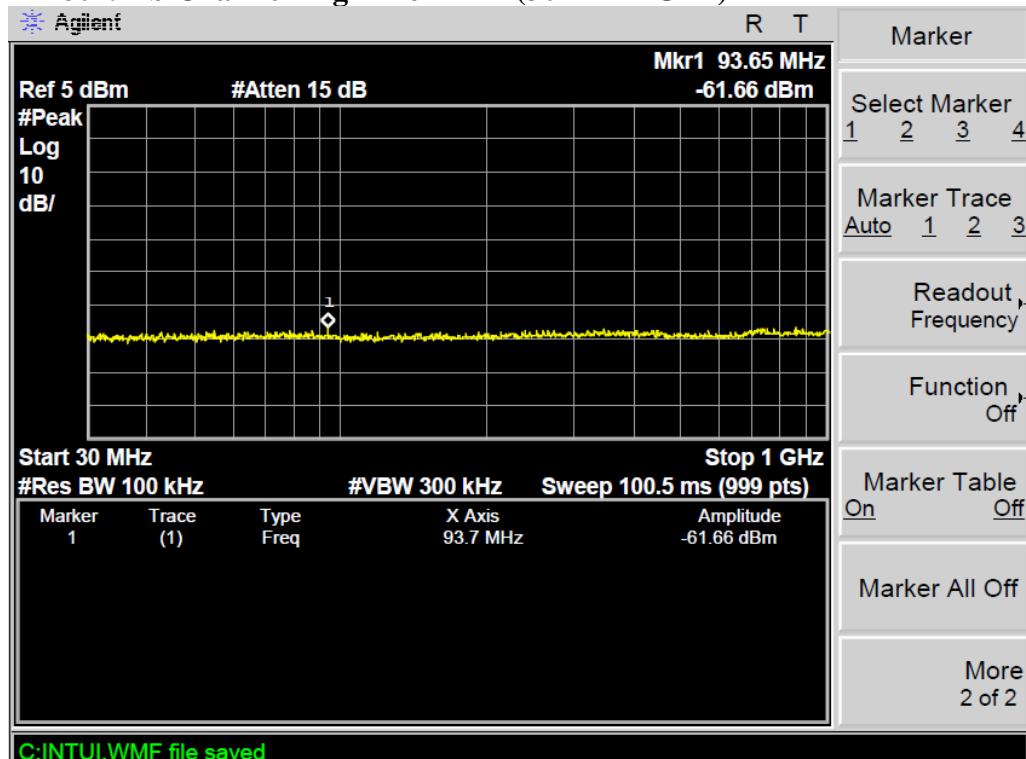


TX 802.11b Channel High 2462MHz (1GHz-25GHz)

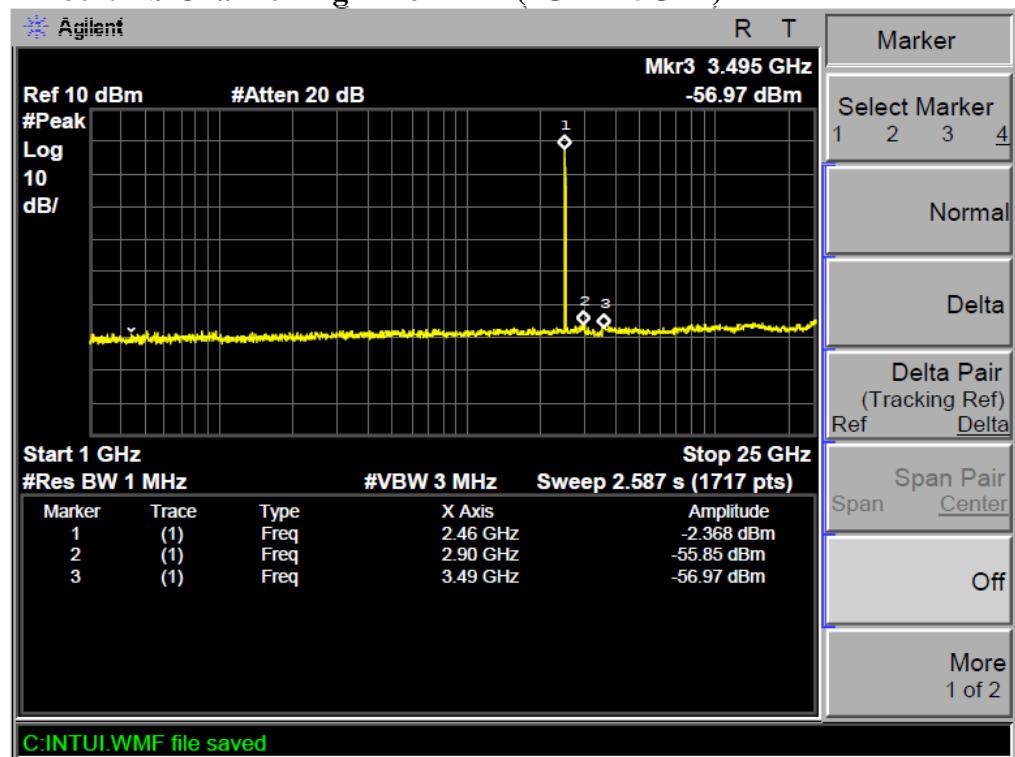


TX 802.11g Channel Low 2412MHz (30MHz-1GHz)

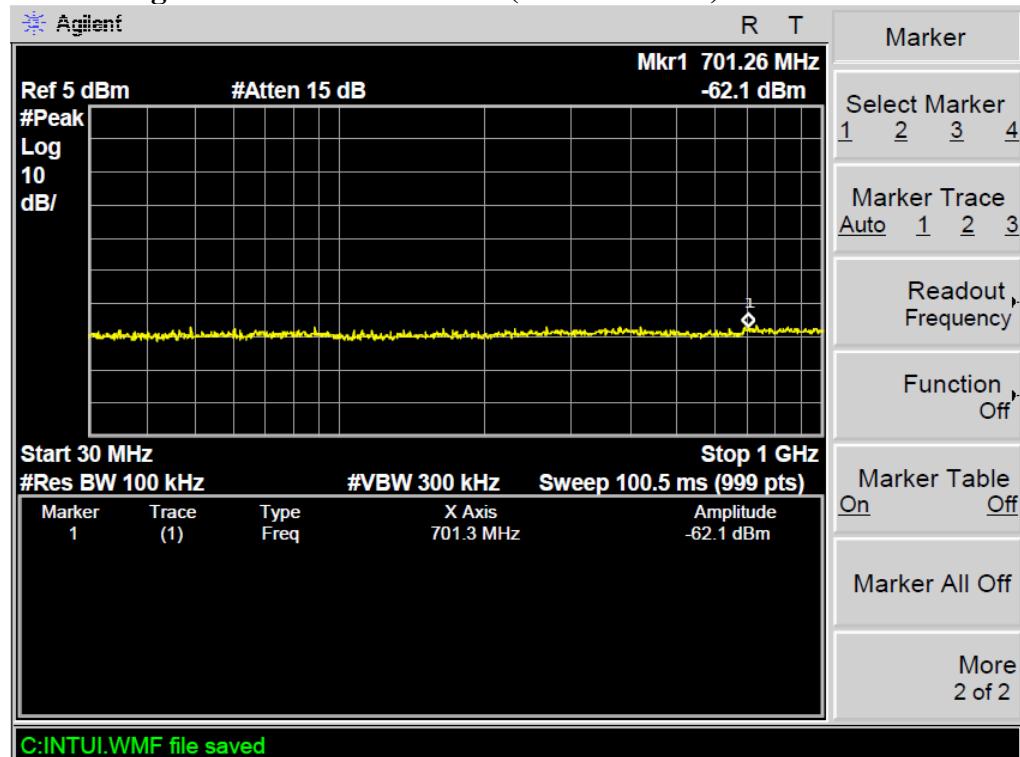


TX 802.11g Channel Low 2412MHz (1GHz-25GHz)

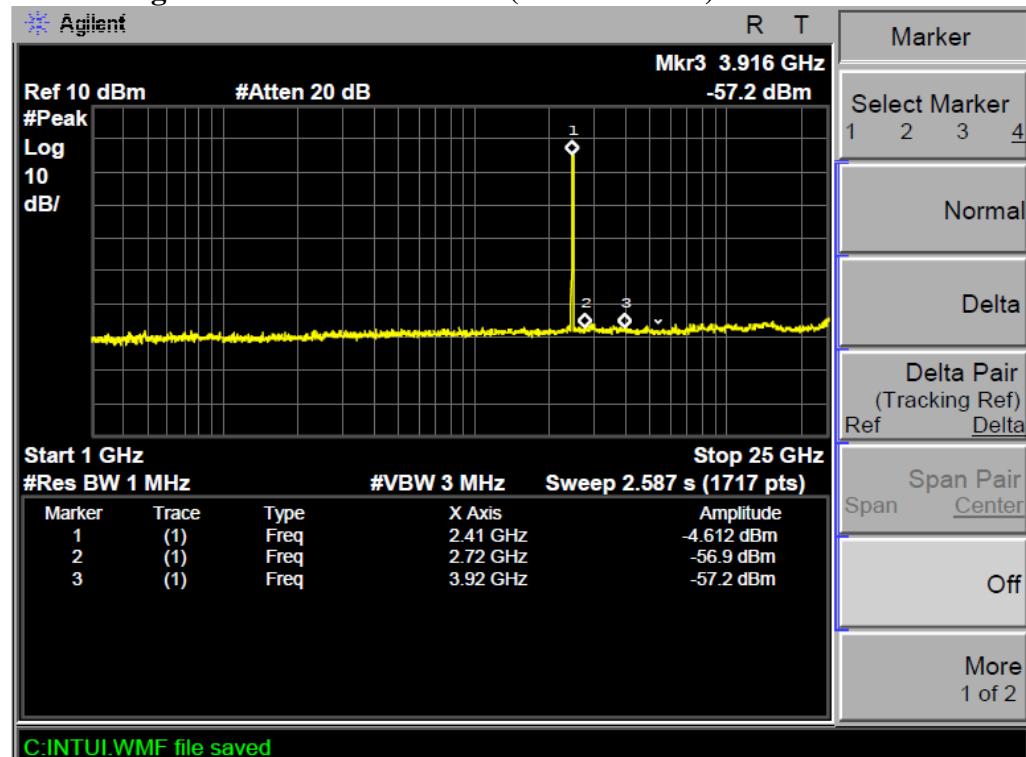


TX 802.11g Channel Middle 2437MHz (30MHz-1GHz)

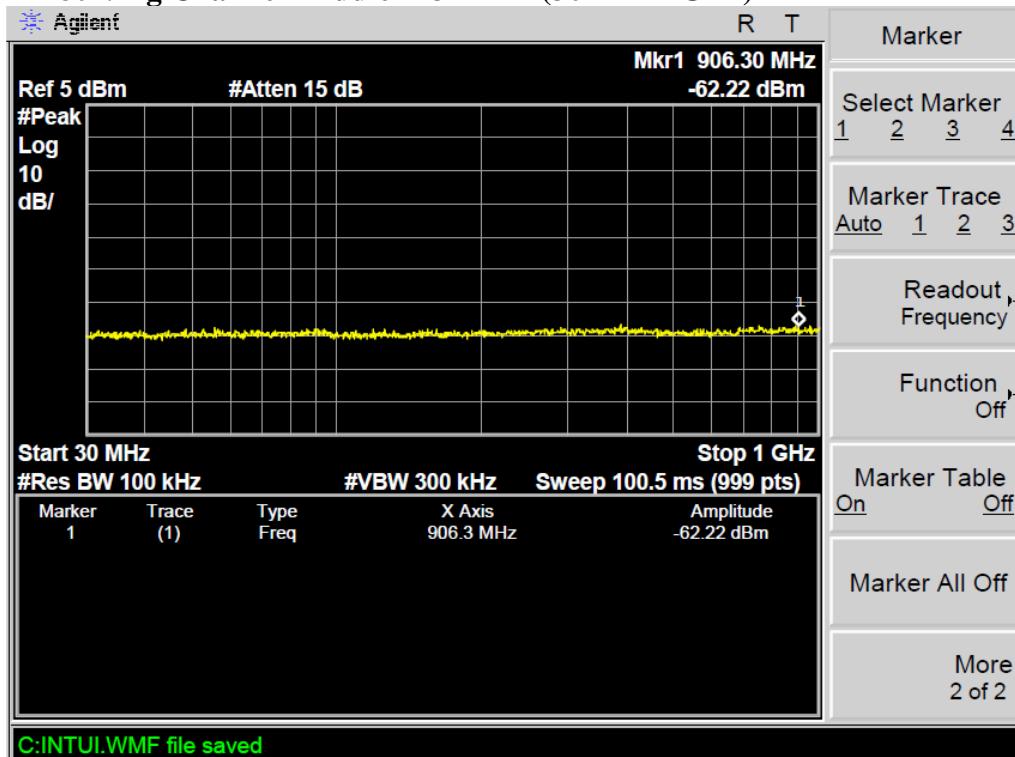


TX 802.11g Channel Middle 2437MHz

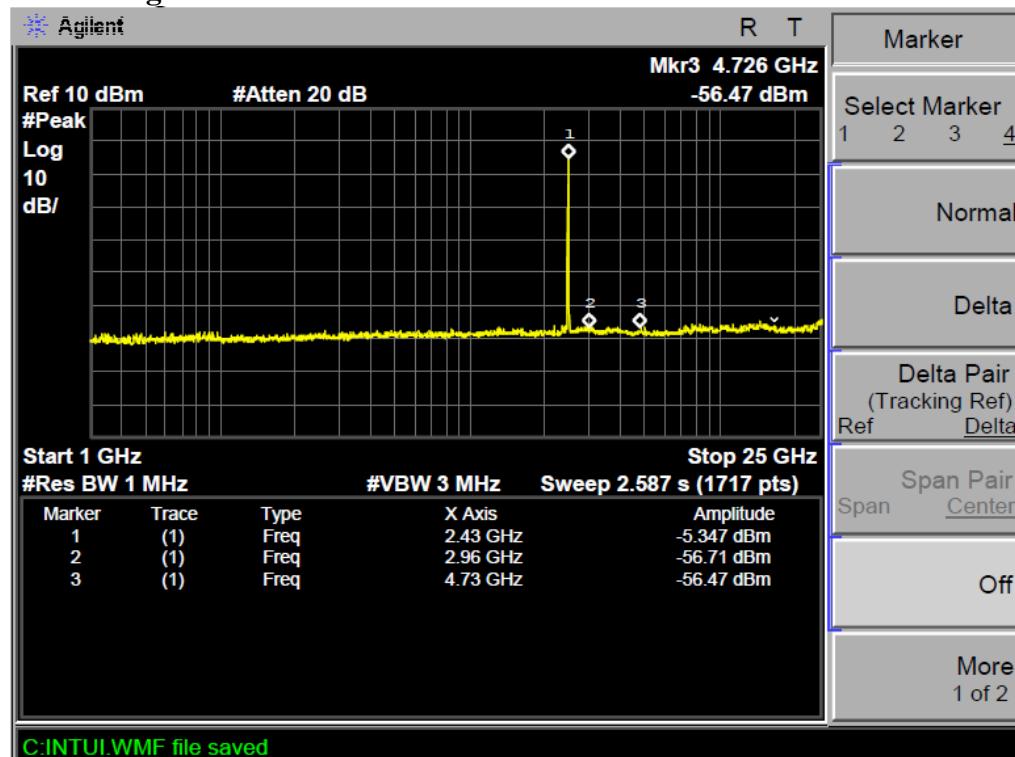


TX 802.11g Channel High 2462MHz (30MHz-1GHz)

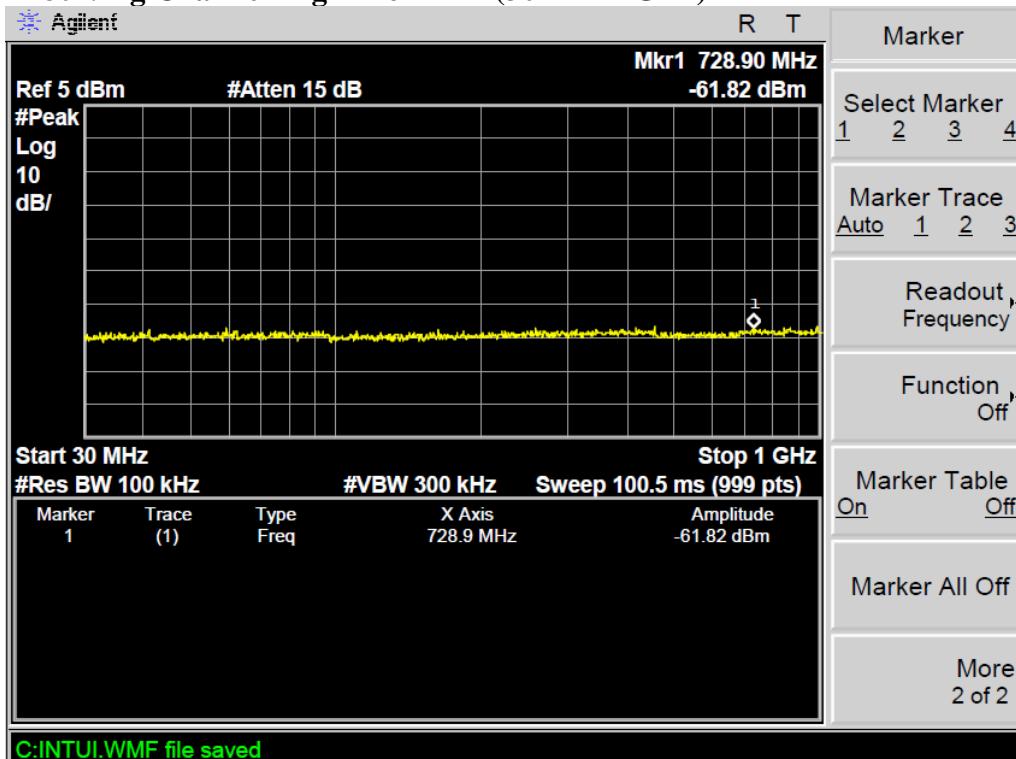


TX 802.11g Channel High 2462MHz (1GHz-25GHz)

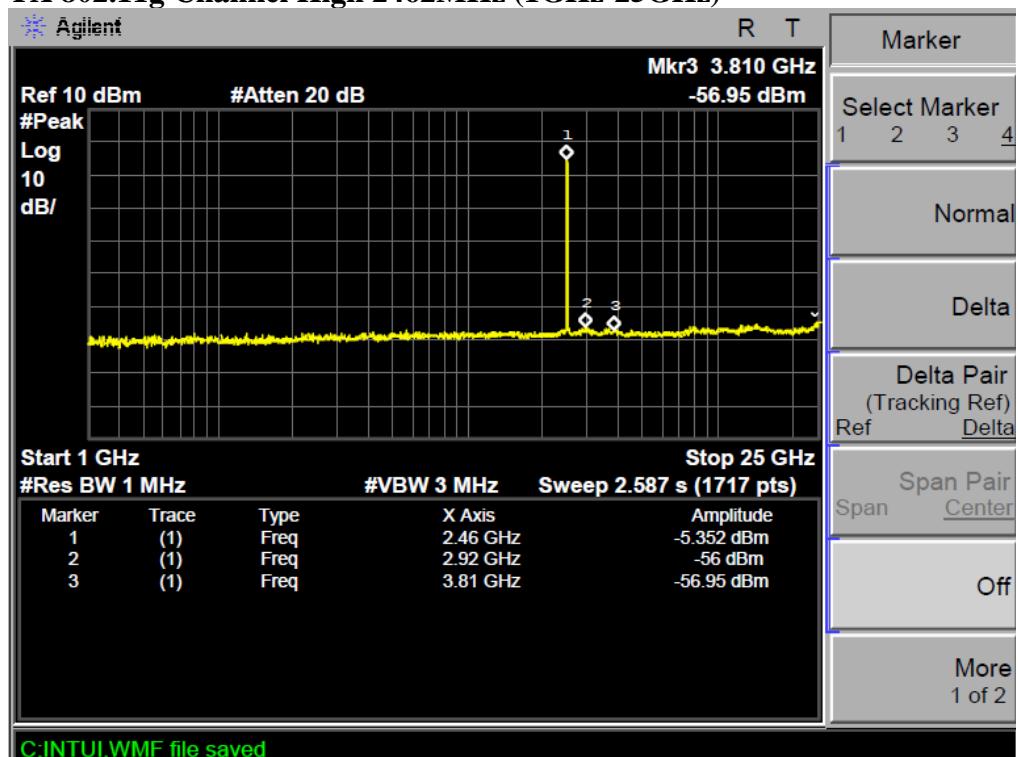


TX 802.11n Channel Low 2412MHz (20MHz) (30MHz-1GHz)

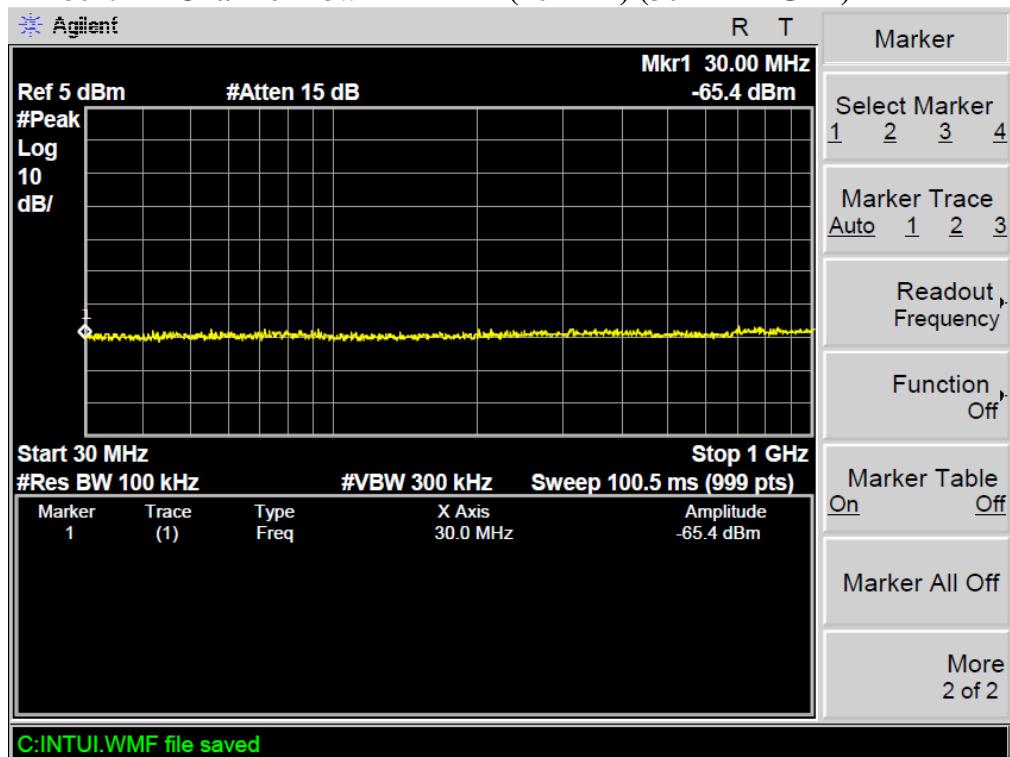


TX 802.11n Channel Low 2412MHz (20MHz) (1GHz-25GHz)

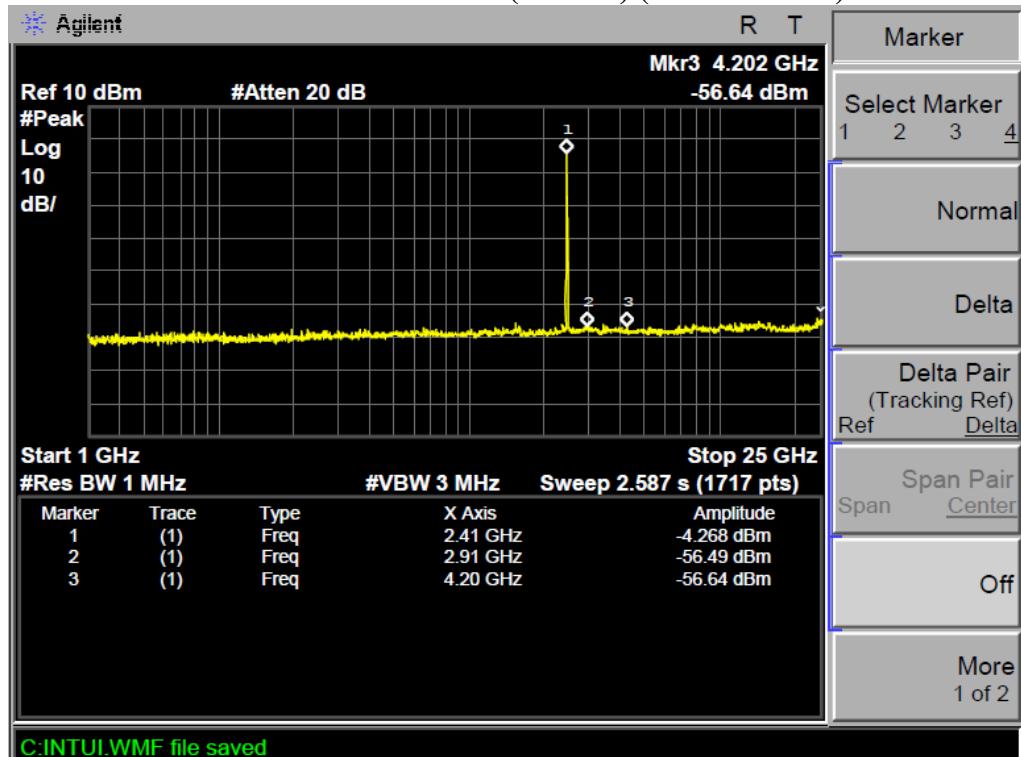


TX 802.11n Channel Middle 2437MHz (20MHz) (30MHz-1GHz)

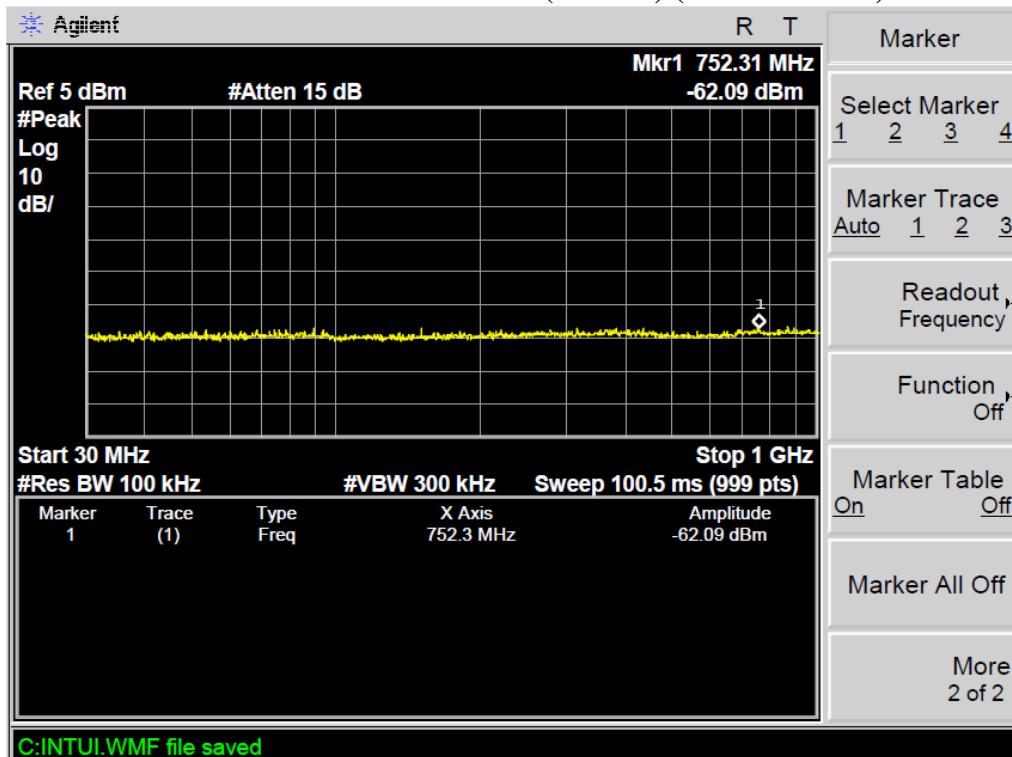


TX 802.11n Channel Middle 2437MHz (20MHz) (1GHz-25GHz)

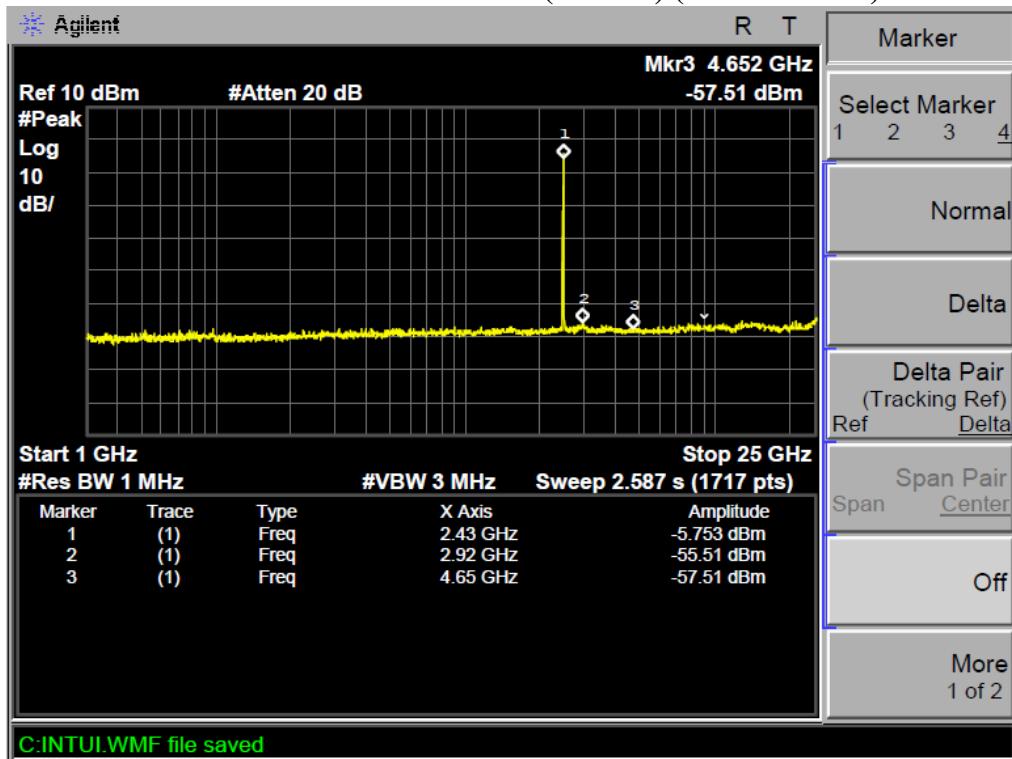


TX 802.11n Channel High 2462MHz (20MHz) (30MHz-1GHz)

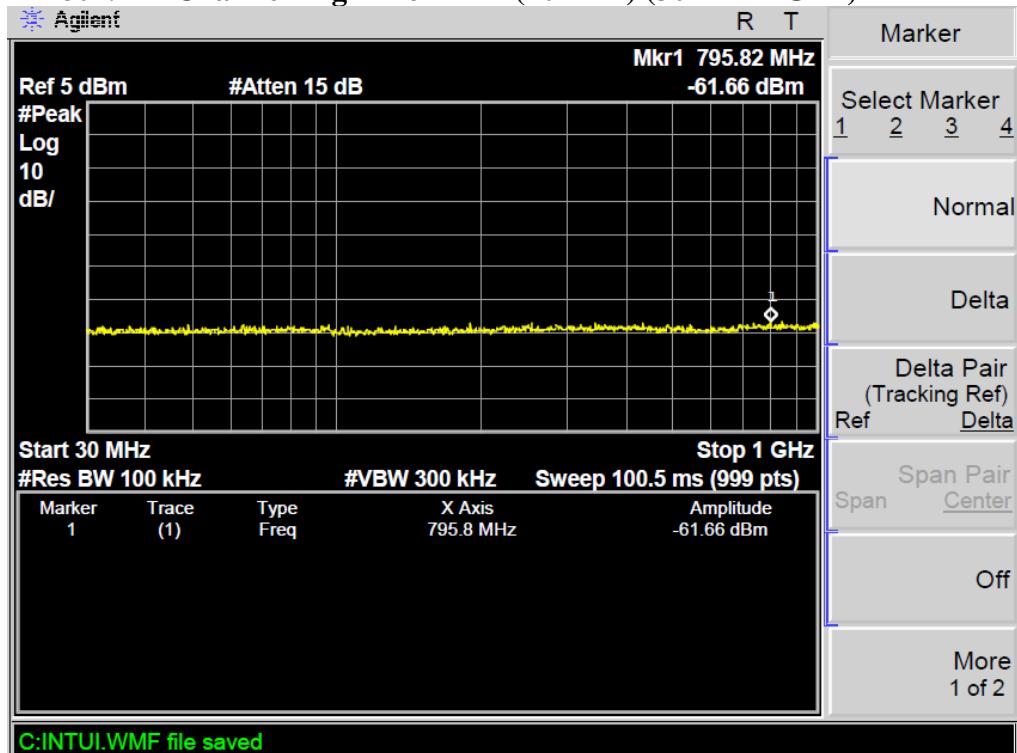


TX 802.11n Channel High 2462MHz (20MHz) (1GHz-25GHz)

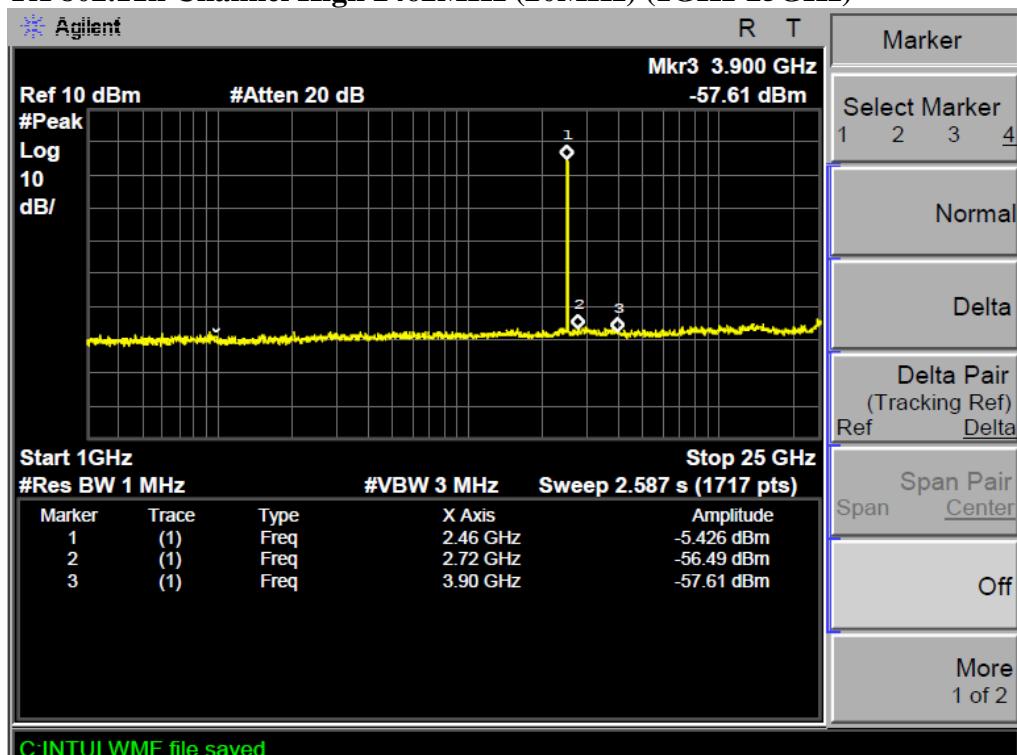


TX 802.11n Channel Low 2422MHz (40MHz) (30MHz-1GHz)

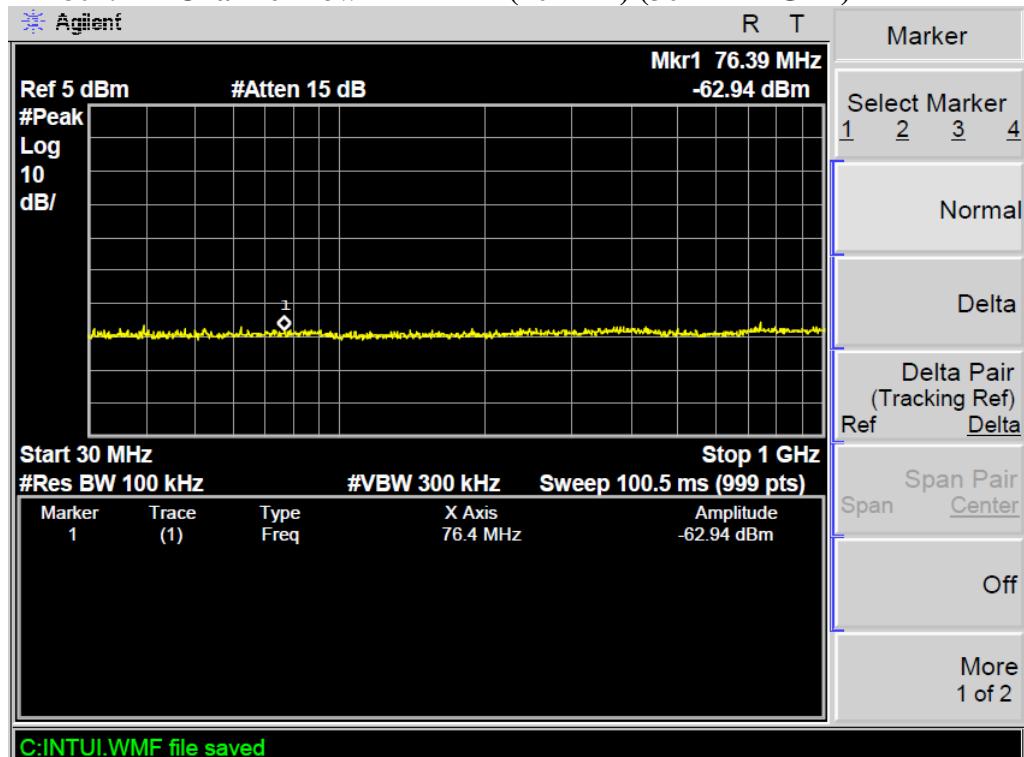


TX 802.11n Channel Low 2422MHz (40MHz) (1GHz-25GHz)

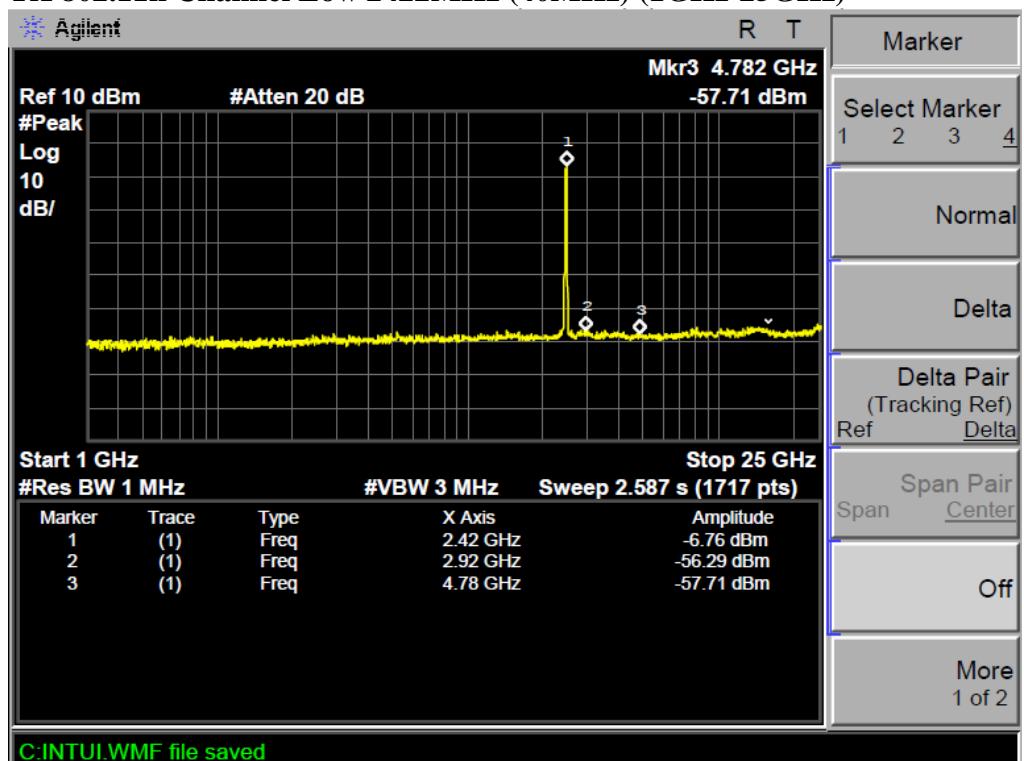


TX 802.11n Channel Middle 2437MHz (40MHz) (30MHz-1GHz)

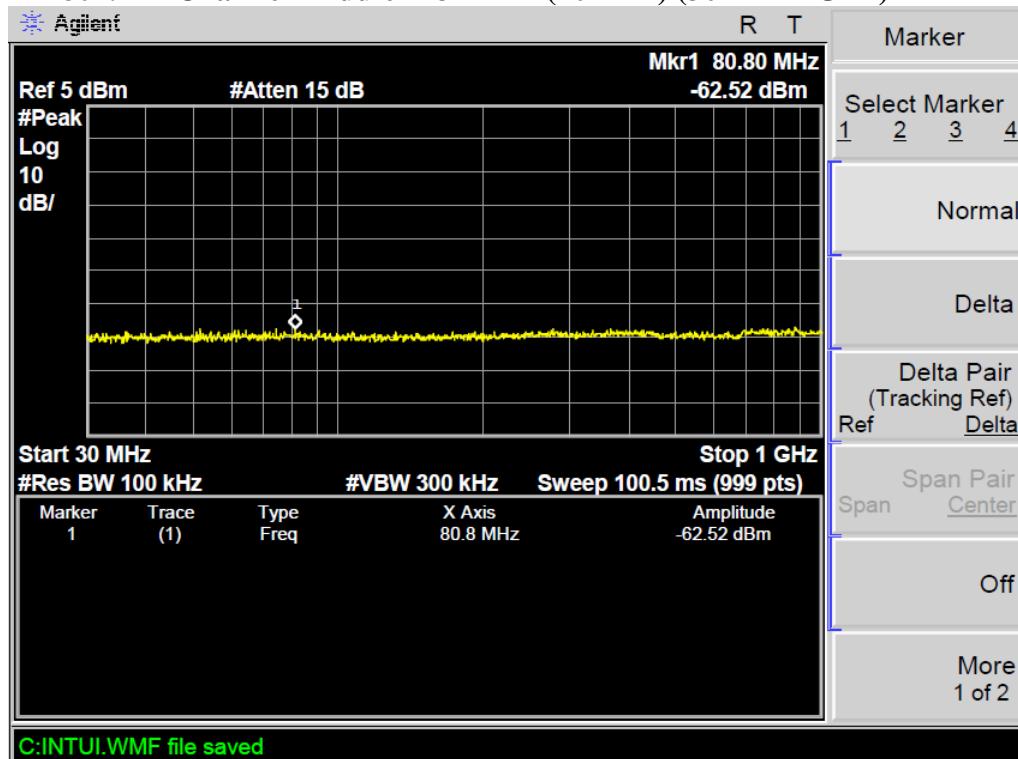


TX 802.11n Channel Middle 2437MHz (40MHz) (1GHz-25GHz)

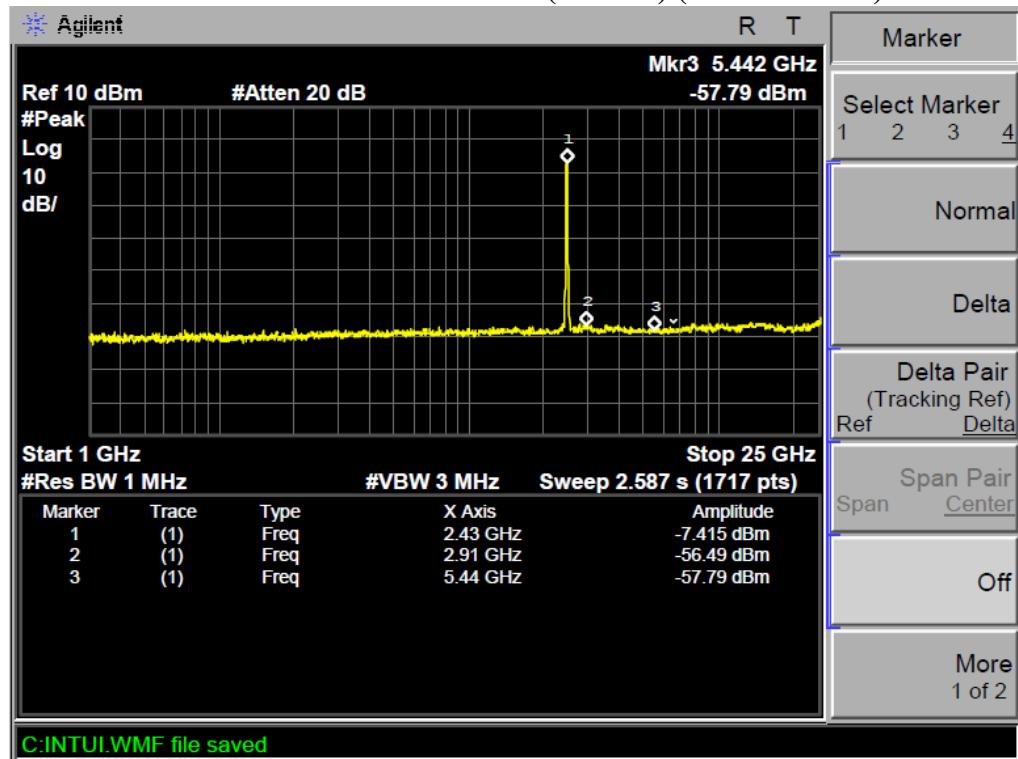

TX 802.11n Channel High 2452MHz (40MHz) (30MHz-1GHz)

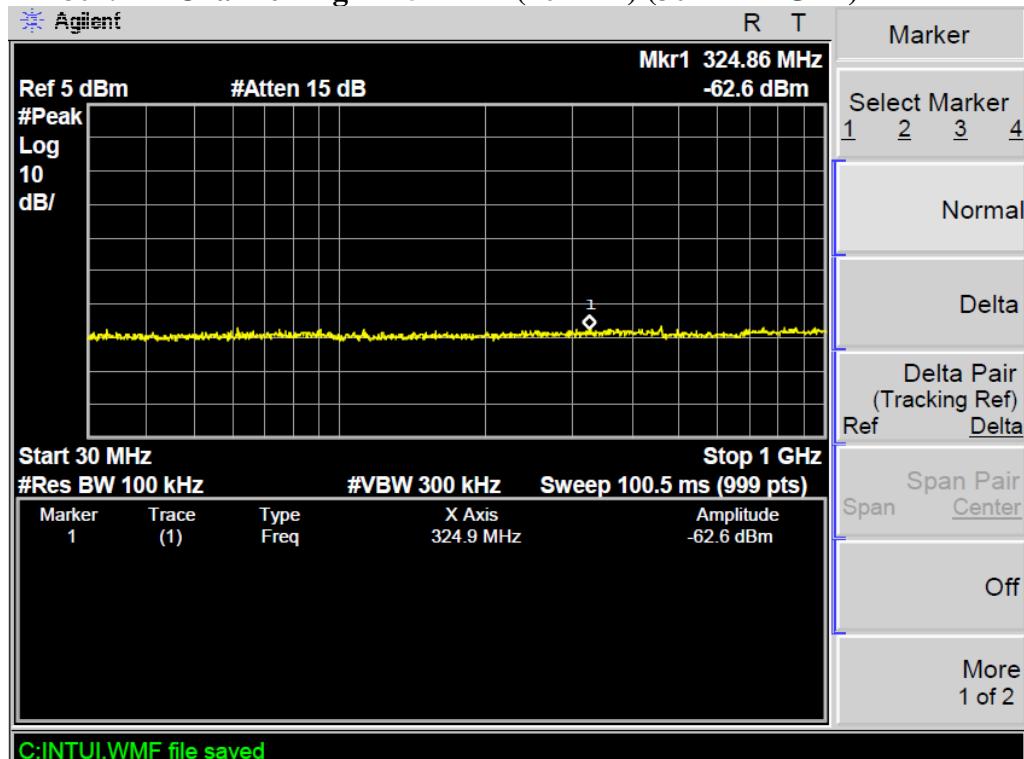

TX 802.11n Channel High 2452MHz (40MHz) (1GHz-25GHz)

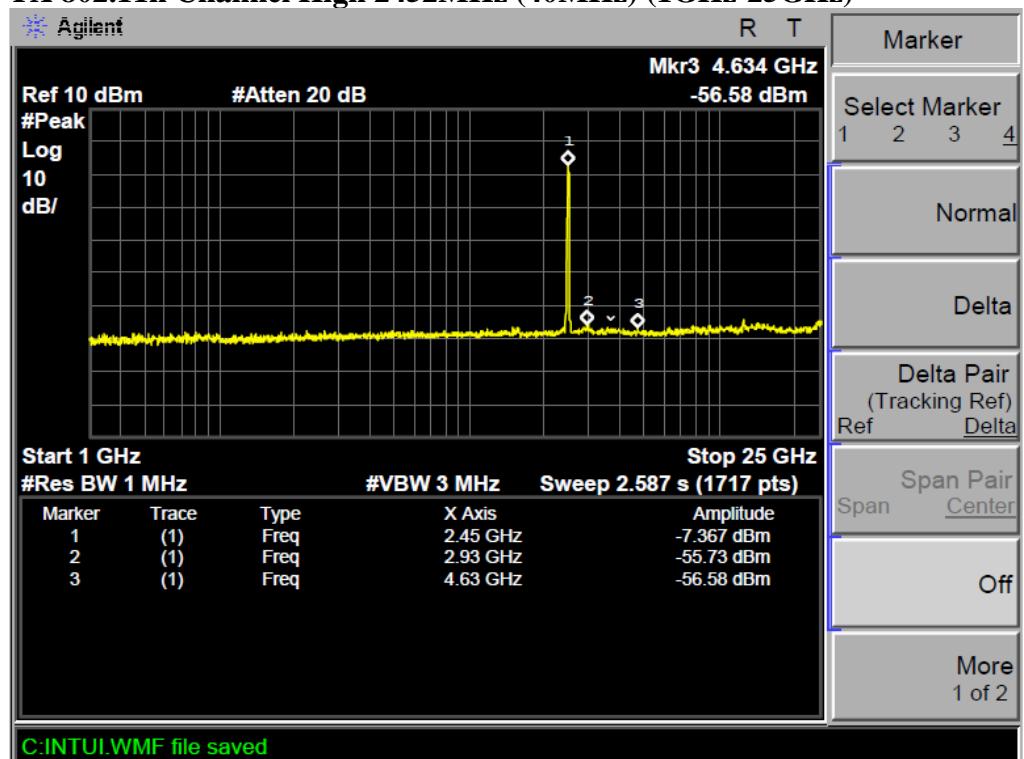


11.AC POWER LINE CONDUCTED EMISSION FOR FCC PART


15 SECTION 15.207(A)

11.1.Block Diagram of Test Setup

11.1.1.Block diagram of connection between the EUT and simulators



11.1.2.Shielding Room Test Setup Diagram

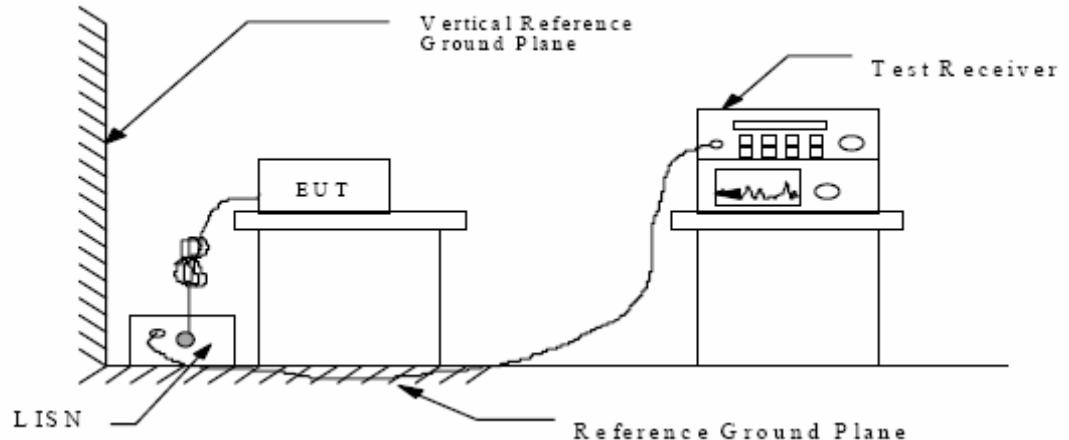

11.2.The Emission Limit

11.2.1.Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μ V)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 - 56.0 *	56.0 - 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

* Decreases with the logarithm of the frequency.

11.3.Configuration of EUT on Measurement

The equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.4.Operating Condition of EUT

11.4.1.Setup the EUT and simulator as shown as Section 11.1.

11.4.2.Turn on the power of all equipment.

11.4.3.Let the EUT work in (Charging) mode measure it.

11.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2009 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

11.6.Power Line Conducted Emission Measurement Results


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: TABLET PC M/N:GT10V
 Manufacturer: EKEN(HK)
 Operating Condition: On with Wi-Fi
 Test Site: 1#Shielding Room
 Operator: star
 Test Specification: L 120V/60Hz
 Comment: Report No.:ATE20131532
 Start of Test: 7/16/2013 / 5:16:42PM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

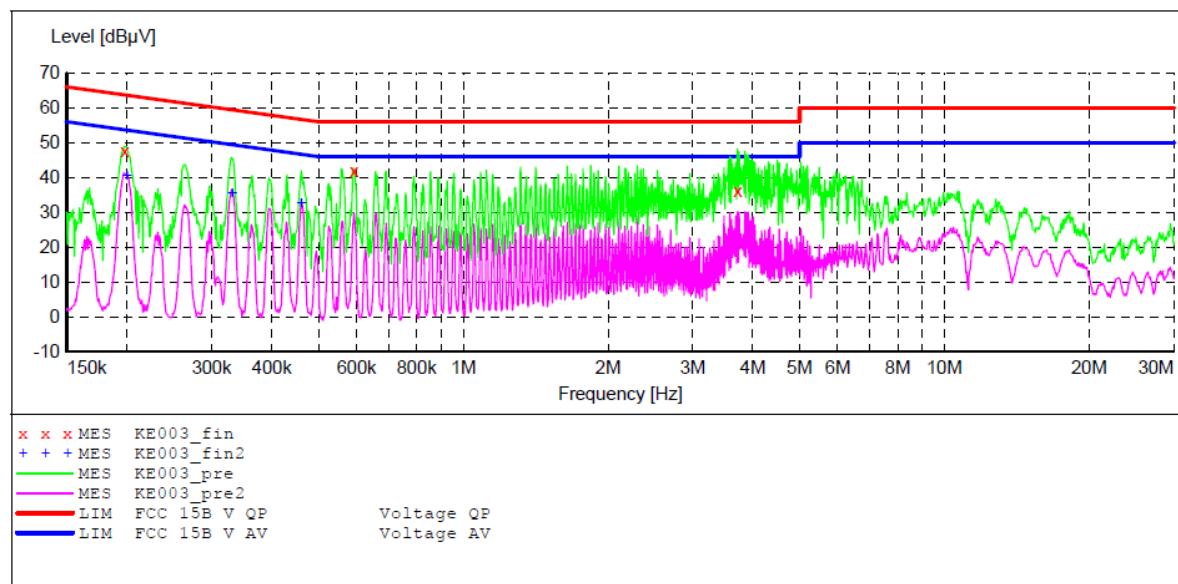

MEASUREMENT RESULT: "KE003_fin"

7/16/2013 5:18PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.197568	47.70	11.7	64	16.0	QP	L1	GND
0.592227	42.10	12.6	56	13.9	QP	L1	GND
3.715321	36.40	12.3	56	19.6	QP	L1	GND

MEASUREMENT RESULT: "KE003_fin2"

7/16/2013 5:18PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.199949	40.40	11.7	54	13.2	AV	L1	GND
0.330648	35.40	12.2	49	14.0	AV	L1	GND
0.460537	32.80	12.5	47	13.9	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART15B

EUT: TABLET PC M/N:GT10V
 Manufacturer: EKEN (HK)
 Operating Condition: On with Wi-Fi
 Test Site: 1#Shielding Room
 Operator: star
 Test Specification: N 120V/60Hz
 Comment: Report No.:ATE20131532
 Start of Test: 7/16/2013 / 5:19:16PM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

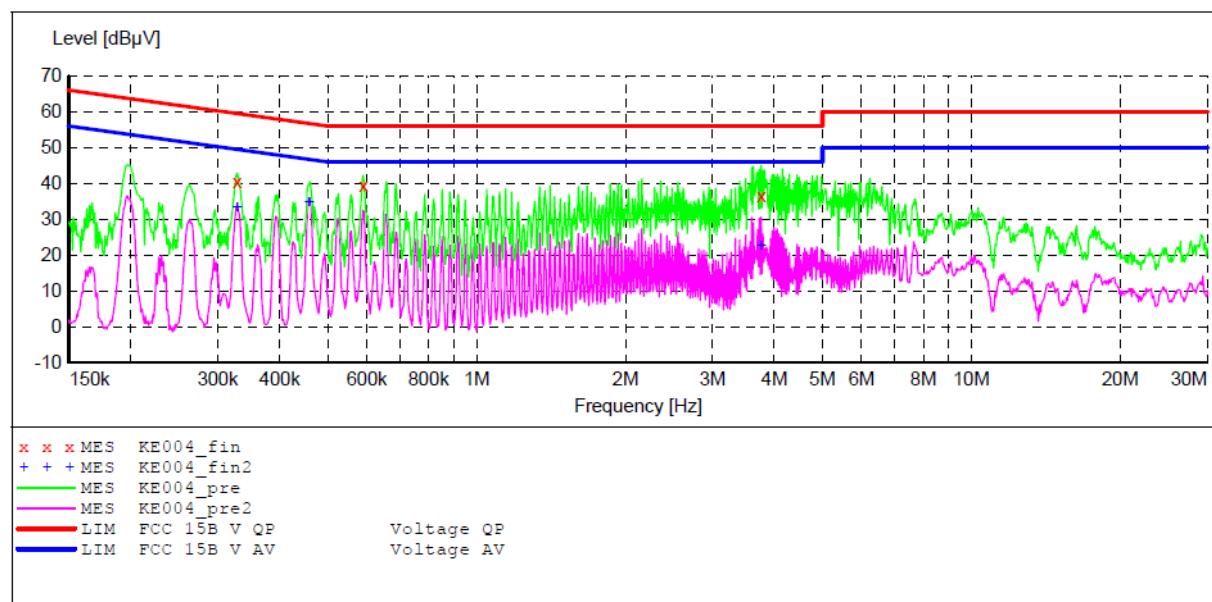

MEASUREMENT RESULT: "KE004_fin"

7/16/2013 5:21PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.328019	40.40	12.2	60	19.1	QP	N	GND
0.589868	39.50	12.6	56	16.5	QP	N	GND
3.760084	36.60	12.3	56	19.4	QP	N	GND

MEASUREMENT RESULT: "KE004_fin2"

7/16/2013 5:21PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.328019	33.40	12.2	50	16.1	AV	N	GND
0.458702	34.80	12.5	47	11.9	AV	N	GND
3.760084	29.60	12.3	46	16.4	AV	N	GND

12. ANTENNA REQUIREMENT

12.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2. Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

