



H.B. Compliance Solutions

RF Exposure Evaluation Report

For the

Wilson Electronics

WeBoost Dash

July 15, 2025

Prepared for:

Wilson Electronics

3301 E. Desert Drive,

St. George, UT 84790

Prepared By:

H.B. Compliance Solutions

5005 S. Ash Avenue, Suite # A-10

Tempe, Arizona 85282

Reviewed By:

A handwritten signature in black ink, appearing to read 'Hoosamuddin'.

Hoosamuddin Bandukwala



Cert # ATL-0062-E

1. Equipment Overview

Product Name:	WeBoost Dash
Model(s) Tested:	470082
FCC ID:	PWO082
Supply Voltage Input:	Primary Power: 12 VDC
Frequency Range:	100-127 kHz
No. of Channels:	1
Type(s) of Modulation:	ASK
Range of Operation Power:	0.035 mW (Radiated)
Emission Designator:	N/A
Channel Spacing(s)	None
Test Item:	Pre-Production
Type of Equipment:	Fixed
Measurement Distance declared by manufacturer	20 cm
Antenna Requirement (§15.203):	Type of Antenna: Integral Loop Gain of Antenna: 0dBi
Environmental Test Conditions:	Temperature: 15-35°C Humidity: 30-60% Barometric Pressure: 860-1060 mbar
Modification to the EUT:	None
Evaluated By:	Staff at H.B Compliance Solutions
Test Date(s):	April 22, 2025

2. Applicable Standard

According to §1.1307 the criteria listed in table 1 shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter. RF exposure is calculated according to KDB680106 D01v04: Wireless Power Transfer.

3. Test Limits

Evaluated against exposure limits: General Use X or Controlled Use

Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3–3.0	614	1.63	* 100	6
3.0–30	1842/f	4.89/f	* 900/f ²	6
30–300	61.4	0.163	1.0	6
300–1,500			f/300	6
1,500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	* 100	30
1.34–30	824/f	2.19/f	* 180/f ²	30
30–300	27.5	0.073	0.2	30
300–1,500			f/1500	30
1,500–100,000			1.0	30

f = frequency in MHz* = Plane-wave equivalent power density

RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in the above table. (Use 300kHz limits for 150kHz)

4. RF Exposure Requirements

This device and the test results is in compliance with item 5.2 of FCC KDB 680106 D01v04 below and can be excluded from submitting an RF exposure evaluation

1. Power transfer frequency is less than 1MHz
2. Output power from each primary coil is less than or equal to 15 watts
3. Client device is placed directly in contact with the transmitter
4. Mobile exposure conditions only (portable exposure conditions are not covered by the exclusion)
5. The aggregate H-field strengths at 20cm surrounding the device from all simultaneous coils are demonstrated to be less than 50% of the MPE Limit.
6. The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.

5. Test Limits

Evaluated against exposure limits: General Use X or Controlled Use

Maximum Permissible Exposure (MPE)


Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3–3.0	614	1.63	* 100	6
3.0–30	1842/f	4.89/f	* 900/f ²	6
30–300	61.4	0.163	1.0	6
300–1,500			f/300	6
1,500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	* 100	30
1.34–30	824/f	2.19/f	* 180/f ²	30
30–300	27.5	0.073	0.2	30
300–1,500			f/1500	30
1,500–100,000			1.0	30

f = frequency in MHz* = Plane-wave equivalent power density

RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules.

The emissions should be within the limits at 300kHz in the above table. (Use 300kHz limits for 150kHz)

6. Measurement Procedure

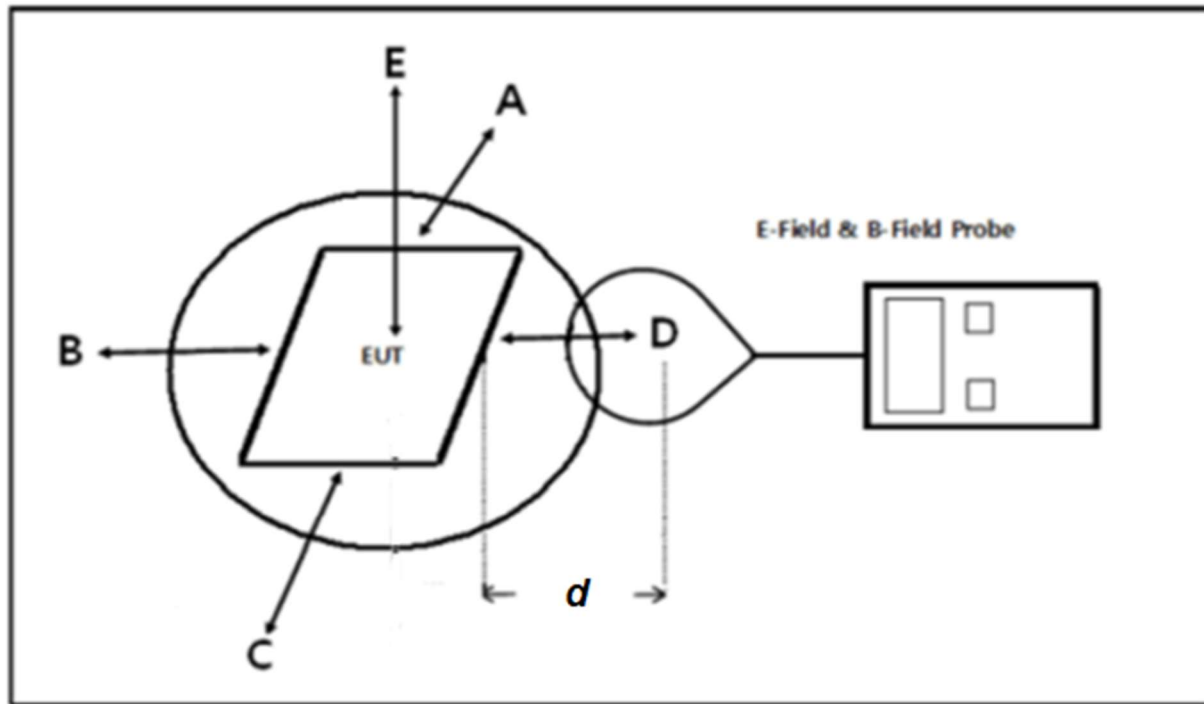

Test Setup

1. The RF exposure test was performed in a Shield Room
2. For RF exposure purposes, the E and H field strengths were measured separately with E and H field probes.
3. EUT was placed on a turntable and the measurement probe was placed at the manufacturer's specified distance d from the center of the probe to the edge of the device.
4. The measurement probe used to search for the highest strength
5. The highest emission level was recorded and compared with the limit for each point (A, B, C, D & E)
6. The EUT were measured according to the KDB 680106d01v04.

7. Test Results

Frequency Range (MHz)	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	FCC Limits (A/m)	Mode
0.127	0.005	0.003	0.005	0.003	0.003	1.63	Idle
0.099	0.046	0.056	0.047	0.031	0.060	1.63	WPT

H-Field Strength 15cm from the edges surrounding the EUT

Frequency Range (MHz)	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	FCC Limits (A/m)	Mode
0.127	0.104	0.136	0.130	0.054	0.266	1.63	Idle
0.099	0.065	0.159	0.069	0.033	0.054	1.63	WPT

H-Field Strength 10cm from the edges surrounding the EUT

Frequency Range (MHz)	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	FCC Limits (A/m)	Mode
0.127	0.176	0.316	0.193	0.061	0.475	1.63	Idle
0.099	0.102	0.304	0.116	0.037	0.197	1.63	WPT

H-Field Strength 8cm from the edges surrounding the EUT

Frequency Range (MHz)	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	FCC Limits (A/m)	Mode
0.127	0.351	0.504	0.297	0.092	0.679	1.63	Idle
0.099	0.162	0.610	0.206	0.057	0.147	1.63	WPT

H-Field Strength 6cm from the edges surrounding the EUT

Frequency Range (MHz)	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	FCC Limits (V/m)	Mode
0.127	1.904	2.228	1.428	2.375	2.485	614	Idle
0.099	1.133	1.133	1.184	1.151	1.896	614	WPT

E-Field Strength from the edges surrounding the EUT

Note: The worst-case data were reported.

The field strength limit refers to Part 1.1310 and the test results of exposure is compliant. 50% of the MPE limit (E-Field: 307 V/m; H-field: 0.815A/m)

Device meets the RF Exposure limits based on the above measurement.

Calculation for Probe Distance Correction:

Since the diameter of the H-Field probe is 6 cm as per the FCC KDB 680106 v04 Section 3.3 a numerical calculation approach was taken. A second order polynomial best fit approximation was done, and the calculations were validated against measured values to verify the model and the difference in the estimates were lower than 30%.

Based on TCB Workshop 2024 field estimates at the tip for large probe was performed using the example in figure 1 below.

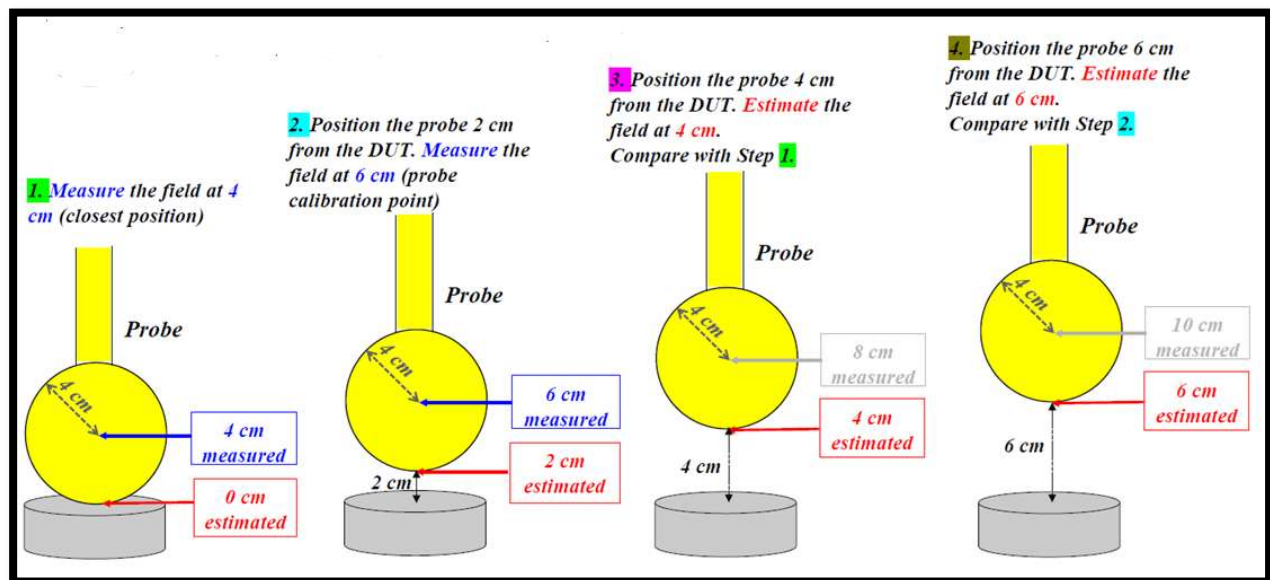


Figure 1. Example of Probe Validation.

Distance (cm)	Measured A (A/m)	Calculated A (A/m)	Difference (%)	FCC Limits (A/m)
10	0.265568	0.2628	1.047755	1.63
8	0.475408	0.4736	0.381029	1.63
6	0.679056	0.678	0.155631	1.63
4	-	0.876	-	1.63
2	-	1.0676	-	1.63
0	-	1.2528	-	1.63

H-Field Strength Above Coil (Position E) – Idle Mode


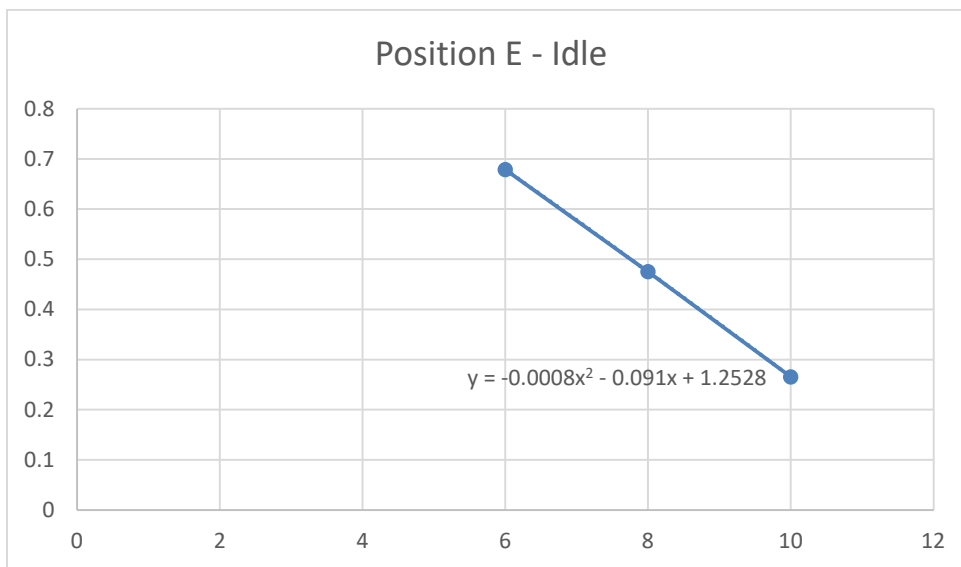


Figure 2.


Distance (cm)	Measured A (A/m)	Calculated A (A/m)	Difference (%)	FCC Limits (A/m)
10	0.053664	0.0542	0.993844	1.63
8	0.147232	0.1476	0.249634	1.63
6	0.196768	0.197	0.117836	1.63
4	-	0.2024	-	1.63
2	-	0.1638	-	1.63
0	-	0.0812	-	1.63

H-Field Strength Above Coil (Position E) – Charging Mode

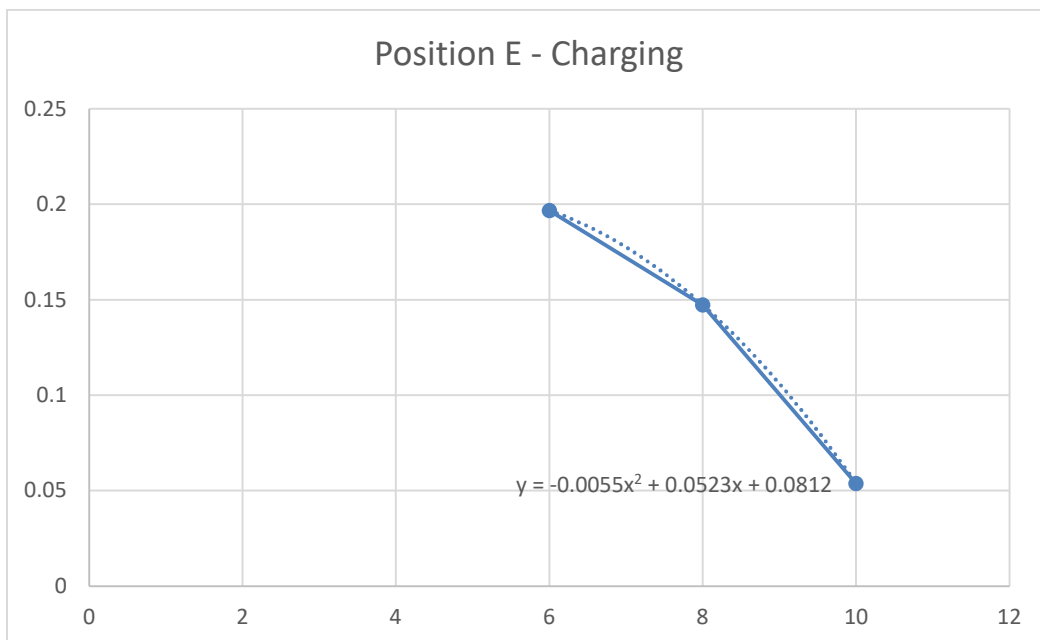


Distance (cm)	Measured A (A/m)	Calculated A (A/m)	Difference (%)	FCC Limits (A/m)
10	0.103888	0.1022	1.638135	1.63
8	0.176128	0.175	0.642501	1.63
6	0.35088	0.3502	0.193986	1.63
4	-	0.6278	-	1.63
2	-	1.0078	-	1.63
0	-	1.4902	-	1.63

H-Field Strength (Position A) – Idle Mode

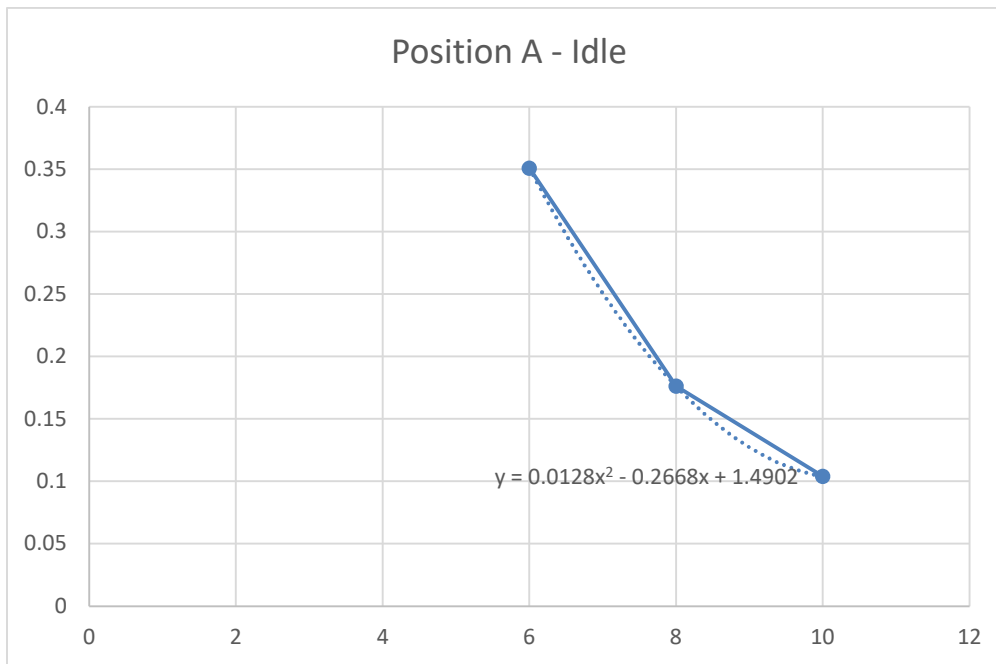


Distance (cm)	Measured A (A/m)	Calculated A (A/m)	Difference (%)	FCC Limits (A/m)
10	0.06536	0.0626	4.313848	1.63
8	0.101824	0.1	1.807515	1.63
6	0.16168	0.1606	0.670225	1.63
4	-	0.2444	-	1.63
2	-	0.3514	-	1.63
0	-	0.4816	-	1.63

H-Field Strength (Position A) – Charging

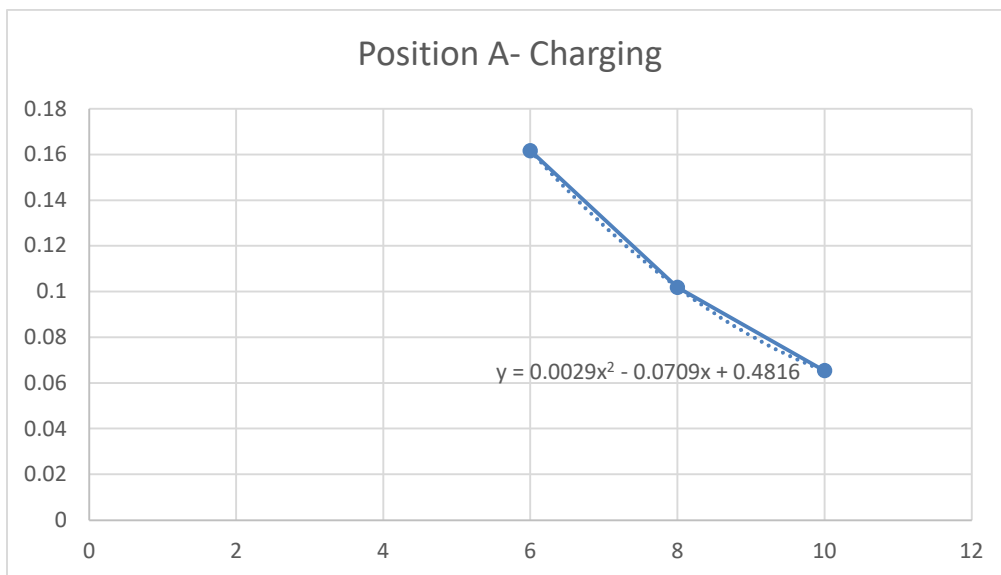


Distance (cm)	Measured A (A/m)	Calculated A (A/m)	Difference (%)	FCC Limits (A/m)
10	0.136224	0.1312	3.757329	1.63
8	0.31648	0.3132	1.041799	1.63
6	0.504304	0.5024	0.378264	1.63
4	-	0.6988	-	1.63
2	-	0.9024	-	1.63
0	-	1.1132	-	1.63

H-Field Strength (Position B) – Idle

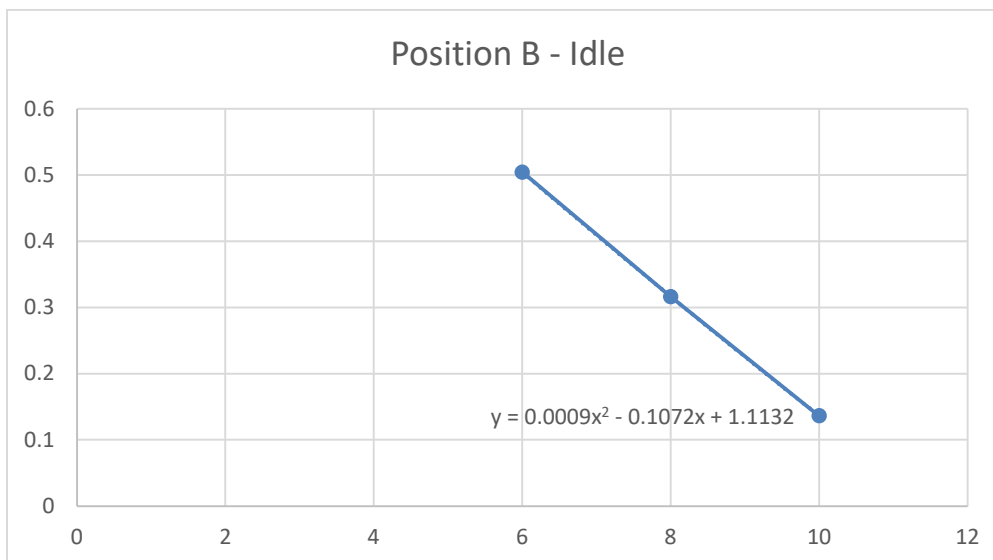


Distance (cm)	Measured A (A/m)	Calculated A (A/m)	Difference (%)	FCC Limits (A/m)
10	0.080496	0.0773	4.0508	1.63
8	0.129344	0.1273	1.592868	1.63
6	0.220848	0.2197	0.521169	1.63
4	-	0.3545	-	1.63
2	-	0.5317	-	1.63
0	-	0.7513	-	1.63

H-Field Strength (Position B) – Charging

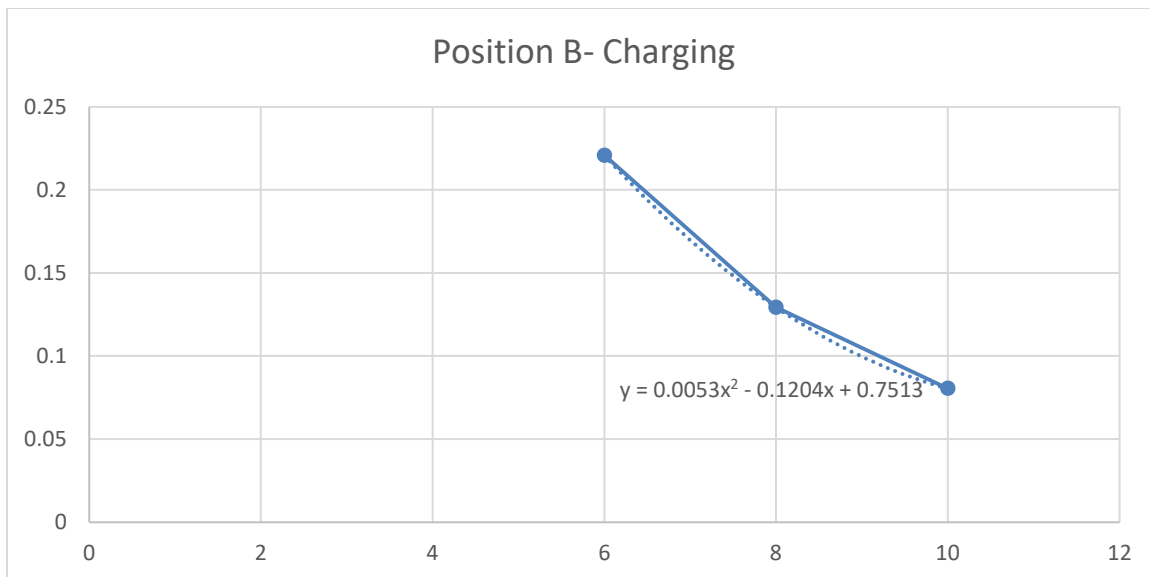


Distance (cm)	Measured A (A/m)	Calculated A (A/m)	Difference (%)	FCC Limits (A/m)
10	0.130032	0.1324	1.804658	1.63
8	0.193328	0.1948	0.758513	1.63
6	0.297216	0.298	0.263434	1.63
4	-	0.442	-	1.63
2	-	0.6268	-	1.63
0	-	0.8524	-	1.63

H-Field Strength (Position C) – Idle

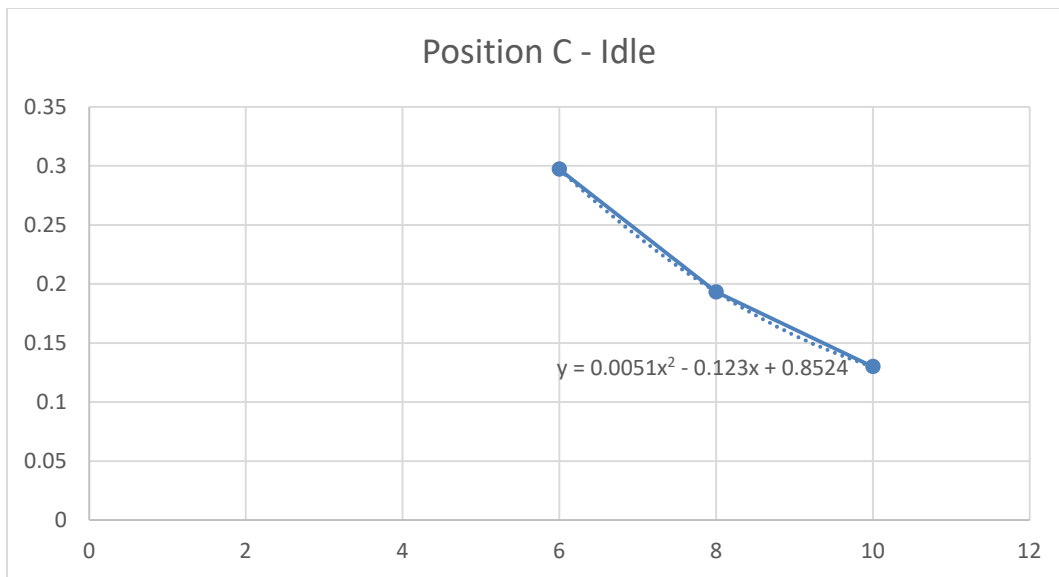


Distance (cm)	Measured A (A/m)	Calculated A (A/m)	Difference (%)	FCC Limits (A/m)
10	0.069488	0.0678	2.459064	1.63
8	0.116272	0.1152	0.926246	1.63
6	0.2064	0.2058	0.291121	1.63
4	-	0.3396	-	1.63
2	-	0.5166	-	1.63
0	-	0.7368	-	1.63

H-Field Strength (Position C) – Charging

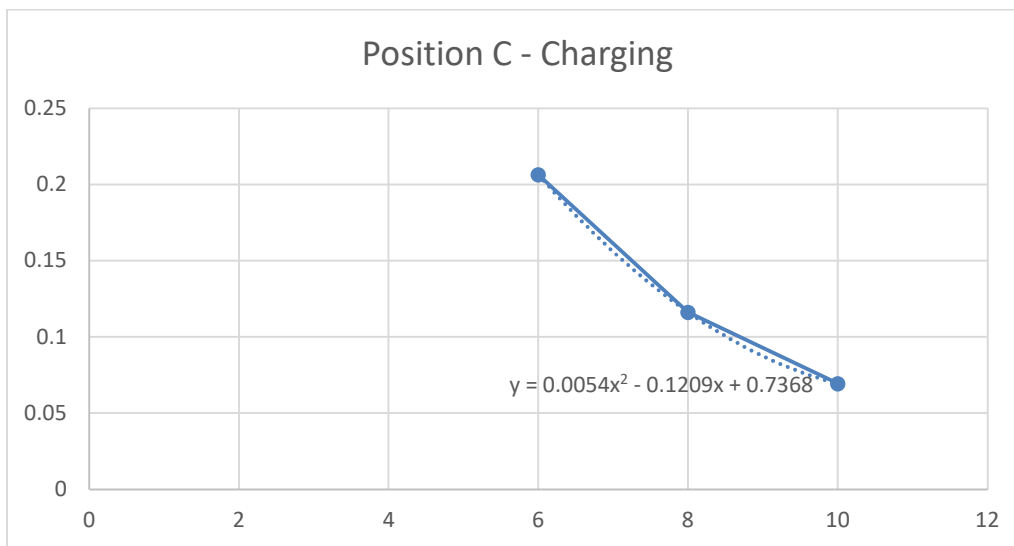


Distance (cm)	Measured A (A/m)	Calculated A (A/m)	Difference (%)	FCC Limits (A/m)
10	0.053664	0.0514	4.309754	1.63
8	0.061232	0.0598	2.366316	1.63
6	0.092192	0.0914	0.862783	1.63
4	-	0.1462	-	1.63
2	-	0.2242	-	1.63
0	-	0.3254	-	1.63

H-Field Strength (Position D) – Idle

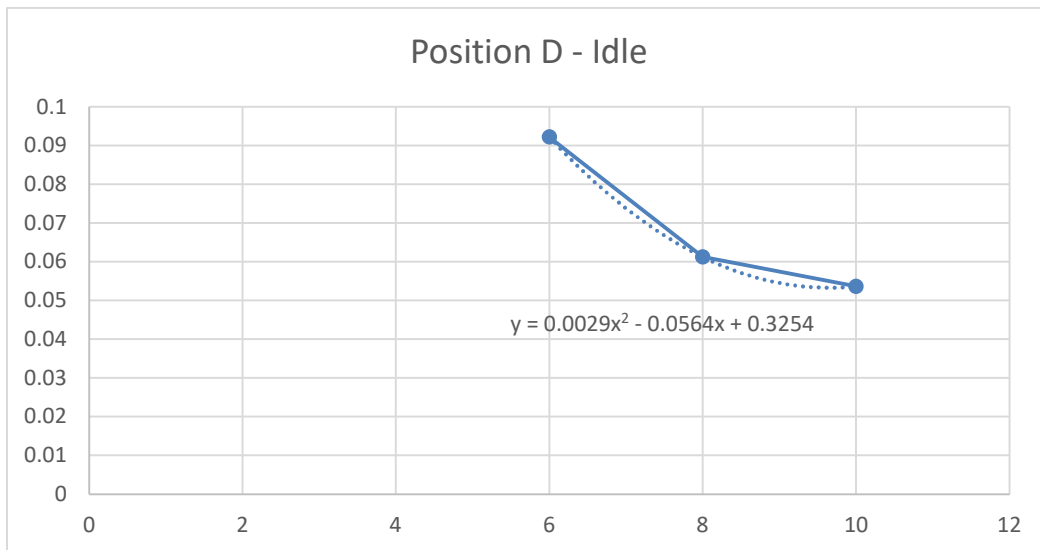

Distance (cm)	Measured A (A/m)	Calculated A (A/m)	Difference (%)	FCC Limits (A/m)
10	0.033024	0.0349	5.523821	1.63
8	0.037152	0.0383	3.042994	1.63
6	0.057104	0.0577	1.038291	1.63
4	-	0.0931	-	1.63
2	-	0.1445	-	1.63
0	-	0.2119	-	1.63

H-Field Strength (Position D) – Charging

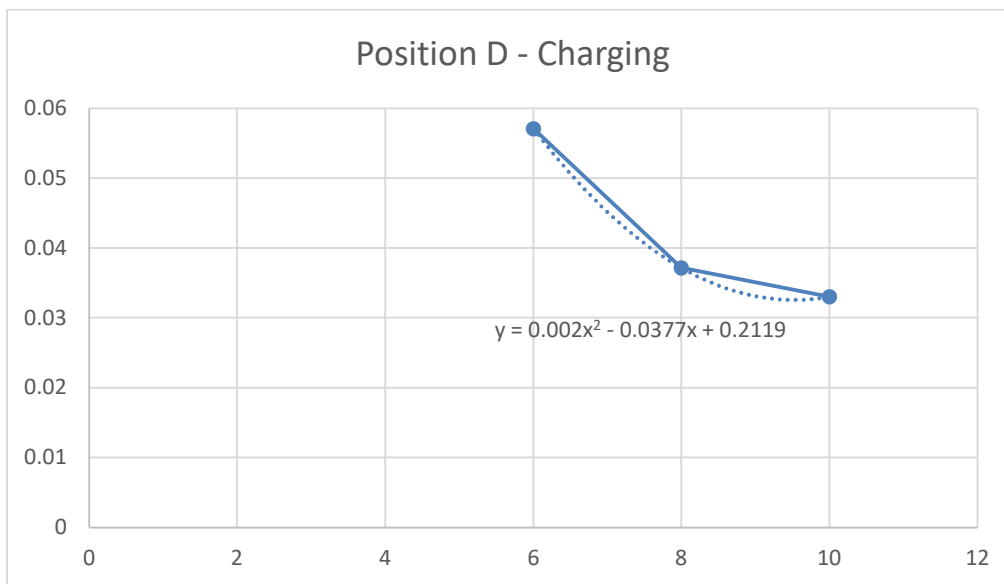

Power Density Calculation:

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where,

S = power density (mW/cm²)

P = output power at the antenna terminal (mW)

G = gain of transmit antenna (numeric)

R = distance from transmitting antenna (cm)

For 127kHz Transmitter

Maximum peak output power at antenna input terminal = 29.16 (dBm)

Maximum peak output power at antenna input terminal = 0.035 (mW)

Antenna gain (typical) = 0 (dBi)

Maximum antenna gain = 1.0 (numeric)

Prediction distance = 20 (cm)

Power density = 0.0000069632 (mW/cm²)

For Cellular Transmitter (Calculation shown for the highest power density band)

Maximum peak output power at antenna input terminal = 23.5 (dBm)

Maximum peak output power at antenna input terminal = 223.87 (mW)

Antenna gain (typical) = 6.1(dBi)

Maximum antenna gain = 3.98 (numeric)

Prediction distance = 20 (cm)

Power density = 0.177265 (mW/cm²)

Simultaneous Transmission Evaluation

Limit

The sum of the ratios of the peak or spatially averaged results to the applicable frequency dependent MPE limits must be <1 at all locations where users and bystanders can be exposed.

Calculation

Mode	127kHz Power Density/Limit	Cellular Power Density/Limit	Σ (Power Density/Limit) of Cellular+127kHz Transmitter
*Cellular		0.17	0.170006
127kHz	0.000006		

*Power with highest power density operating cellular band was used.

The 127kHz, WiFi and Cellular transmitter, the aggregated (power density/limit) is smaller than 1, and the MPE of 2 collocated transmitters is compliant.

According to KDB 680106 D01 V04 section 5, b, this device satisfies the following conditions.

Requirement of KDB 680106	Yes/No	Description
Power transfer frequency is less than 1MHz	Yes	The device operates in frequency range 100 – 200kHz
Output power from each primary coil is less than or equal to 15 watts	Yes	The maximum output power of the primary coil is 15W
The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils	Yes	The transfer system includes only single coil that is able to detect receiver device
Client device is placed directly in contact with the transmitter	Yes	Client device is placed directly in contact with the transmitter
Mobile exposure conditions only (portable exposure conditions are not covered by the exclusion)	Yes	Mobile exposure conditions only
The aggregate H-field strengths at 20cm surrounding the device from all simultaneous coils are demonstrated to be less than 50% of the MPE Limit.	Yes	The EUT H-field strengths at 20cm surrounding the device from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE Limit.

8. Test Equipment

Equipment	Manufacturer	Model	Serial #	Last Cal Date	Cal Due Date
Electric Field Probe	ETS Lindgren	HI-6105	58758	Apr-23-25	Apr-23-28
RF Screen Room	Lindgren	18-2/2-0	6500	NCR	N/A
Magnetic Field Meter	Combinova	MFM-1000	301	Apr-17-25	Apr-17-28

Table – Test Equipment List

***Statement of Traceability:** Test equipment is maintained and calibrated on a regular basis. All calibrations have been performed by a 17025 accredited test facility, traceable to National Institute of Standards and Technology (NIST)

END OF TEST REPORT