



Compliance Testing, LLC

Previously Flom Test Lab

EMI, EMC, RF Testing Experts Since 1963

toll-free: (866) 311-3268

fax: (480) 926-3598

<http://www.ComplianceTesting.com>

info@ComplianceTesting.com

Test Report

Prepared for: Wilson Electronics, Inc.

Model: 460026

Description: Dual Band Fixed Install Signal Booster

FCC ID: PWO460026

To

FCC Part 20

Date of Issue: February 19, 2015

On the behalf of the applicant:

Wilson Electronics, Inc.
3301 E Deseret Drive
St. George, UT 84790

To the attention of:

Patrick Cook, Sr Research & Development Engineer
Ph: (435) 673-5021
E-Mail: pcook@infowest.com

Prepared By
Compliance Testing, LLC
1724 S. Nevada Way
Mesa, AZ 85204
(480) 926-3100 phone / (480) 926-3598 fax
www.compliancetesting.com
Project No: p1510001

Mike Graffeo
Project Test Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing.
All results contained herein relate only to the sample tested.



Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	1/7/15	Mike Graffeo	Original Document
2.0	2/18/15	Mike Graffeo	Added EIRP Calculations



Table of Contents

<u>Description</u>	<u>Page</u>
Standard Test Conditions and Engineering Practices	5
Test Result Summary	7
Authorized Frequency Band	8
Maximum Power and Gain	11
Intermodulation	14
Out-of-Band Emissions	17
Conducted Spurious Emissions	32
Noise Limits	41
Variable Gain	47
Occupied Bandwidth	50
Oscillation Detection	63
Radiated Spurious	71
Test Equipment Utilized	73



ILAC / A2LA

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



FCC Site Reg. #349717

IC Site Reg. #2044A-2

Non-accredited tests contained in this report:

N/A



Test and Measurement Data

Subpart

2.1033(c)(14):

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Part 2, Subpart J and the following individual Parts: 20.21 in conjunction with latest version of KDB 935210.

Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI/C63.4-2009, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F), unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Environmental Conditions		
Temp (°C)	Humidity (%)	Pressure (mbar)
24.9 – 31.0	33.5 – 63.0	985.5 - 943.0

Measurement results, unless otherwise noted, are worst-case measurements.

EUT Description

Model: 460026

Description: Dual Band Fixed Install Signal Booster

Firmware: A46026A

Software: 460026A

Additional Information:

The EUT is a bi-directional amplifier for the boosting of cellular phone signals and data communication devices. The following frequency bands and emission types are utilized and it is considered a direct connect device.

Frequency Band (MHz)		
Uplink	824 - 849	1850 – 1915
Downlink	869 - 894	1930 - 1995
Modulation Type	GSM, CDMA, EDGE, HSPA, EVDO, LTE	GSM, CDMA, EDGE, HSPA, EVDO, LTE

Emission Designators					
CDMA	HSPA	LTE	EVDO	EDGE	GSM
F9W	F9W	G7D	F9W	G7W	GXW

The modulation types and emission designators listed in the tables represent the modulations that the cell phone providers use for each frequency band. GSM, CDMA, and WCDMA represent all the modulation types (phase and amplitude or a combination thereof) utilized within the industry. EDGE, HSPA, LTE etc. are all protocols or multiplexing techniques using the base modulations.

EUT Operation during Tests

The EUT was in a normal operating condition.



Accessories:

Qty	Description	Manufacturer	Model	S/N
1	50 to 75 ohm adaptor	MiniCircuits	SFMP-5075-3+	N/A

Cables: None

Modifications: None



Test Result Summary

Specification	Test Name	Pass, Fail, N/A	Comments
20.21(e)(3)	Authorized Frequency Band	Pass	
20.21(e)(8)(i)(B) 20.21(e)(8)(i)(C) 20.21(e)(8)(i)(D)	Maximum Power and Gain	Pass	
20.21(e)(8)(i)(F)	Intermodulation	Pass	
20.21(e)(8)(i)(E)	Out-of-Band Emissions	Pass	
2.1051 22.917(a) 24.238(a) 27.53(f)	Conducted Spurious Emissions	Pass	
20.21(e)(8)(i)(A) 20.21(e)(8)(I)	Noise Limits	N/A	
20.21(e)(8)(i)(I)	Uplink Inactivity	N/A	
20.21(e)(8)(i)(C)(1) 20.21(e)(8)(i)(H) 20.21(e)(8)(i)(C)(2)(i) (Fixed)	Variable Gain	Pass	
2.1049	Occupied Bandwidth	Pass	
20.21(e)(8)(ii)(A)	Oscillation Detection	Pass	
2.1053	Radiated Spurious	Pass	
20.21(e)(8)(i)(B)	Spectrum Block Filtering	N/A	This only applies to devices utilizing spectrum block filtering



Authorized Frequency Band

Name of Test:

Authorized Frequency Band

Engineer: Mike Graffeo

Test Equipment Utilized:


i00379, i00405

Test Date: 1/5/15

Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as needed to ensure accurate readings. A signal generator was utilized to produce a CW input signal tuned to the center channel of the operational band. The RF input level was increased to a point just prior to the AGC being in control of the power. The Signal generator was set to sweep across 2X the operational band of the EUT while the spectrum analyzer was set to MAX HOLD. Two markers were placed at the edges of the operational band and a third marker was placed at the highest point within the band no closer than 2.5 MHz from the band edge.

Test Setup





Uplink Test Plots

824 - 849 MHz Band

Agilent 09:08:42 Jan 5, 2015

L




Center 836.5 MHz Span 50 MHz
#Res BW 100 kHz VBW 300 kHz Sweep 5.18 ms (401 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	824.000 MHz	18.43 dBm
2	(1)	Freq	833.875 MHz	19.18 dBm
3	(1)	Freq	849.000 MHz	16.19 dBm

1850 - 1915 MHz Band

Agilent 09:14:30 Jan 5, 2015

L

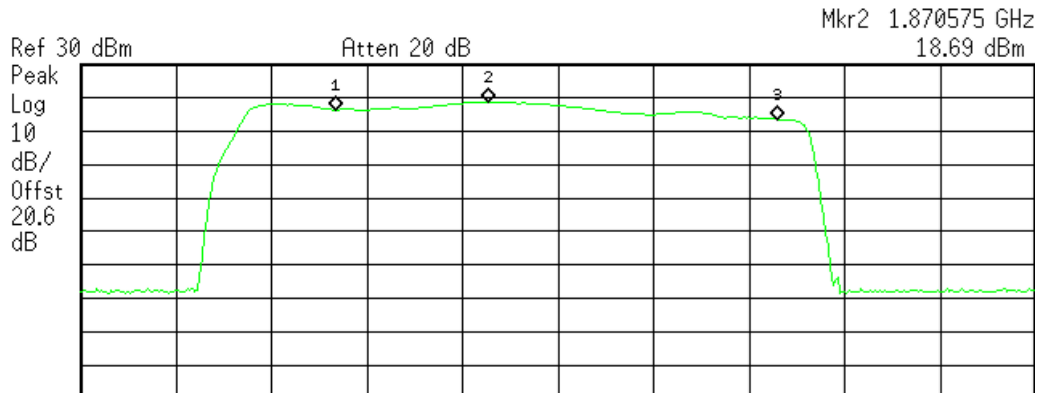

Center 1.88 GHz Span 130 MHz
#Res BW 100 kHz VBW 300 kHz Sweep 13.47 ms (401 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	1.850000 GHz	16.34 dBm
2	(1)	Freq	1.870575 GHz	18.69 dBm
3	(1)	Freq	1.910000 GHz	13.44 dBm




Downlink Test Plots

869 - 894 MHz Band

Agilent 09:21:03 Jan 5, 2015

L

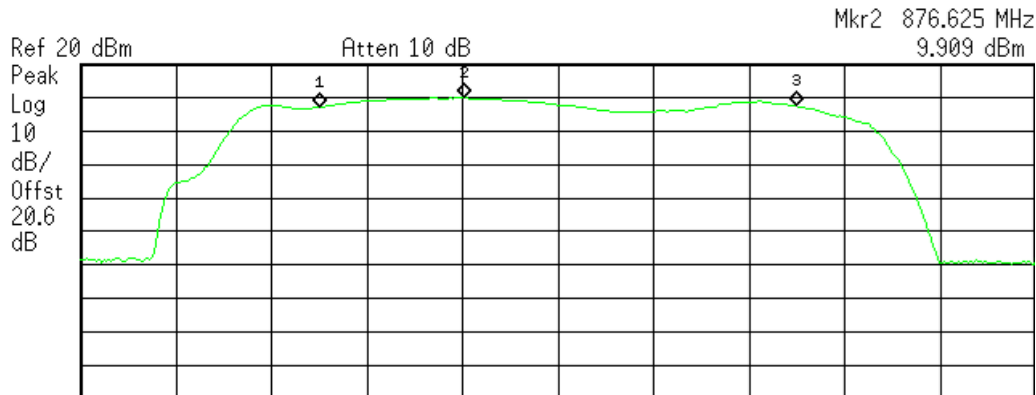


Center 881.5 MHz Span 50 MHz
#Res BW 100 kHz VBW 300 kHz Sweep 5.18 ms (401 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	869.000 MHz	7.15 dBm
2	(1)	Freq	876.625 MHz	9.909 dBm
3	(1)	Freq	894.000 MHz	7.387 dBm

1930 - 1995 MHz Band

Agilent 09:38:25 Jan 5, 2015

L

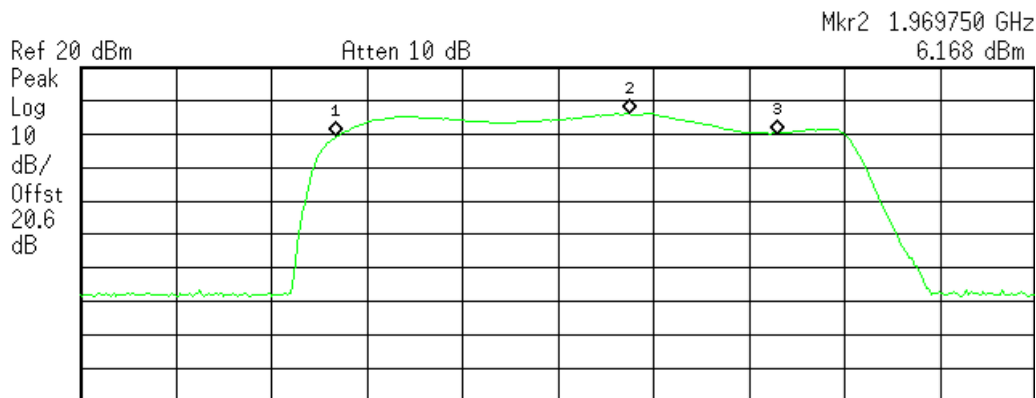

Center 1.96 GHz Span 130 MHz
#Res BW 100 kHz VBW 300 kHz Sweep 13.47 ms (401 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	1.930000 GHz	-0.483 dBm
2	(1)	Freq	1.969750 GHz	6.168 dBm
3	(1)	Freq	1.990000 GHz	0.105 dBm



Maximum Power and Gain

Name of Test: Maximum Power and Gain
Test Equipment Utilized: i00379, i00405

Engineer: Mike Graffeo
Test Date: 1/5/15

Test Procedure


The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as needed to ensure accurate readings. The spectrum analyzer and signal generator were tuned to the frequency with the highest power level in the band, as determined by the Authorized Frequency Band test. The RF input level was increased to a point just prior to the AGC being in control of the power for both pulsed single time slot GSM modulation and 4.1 MHz AWGN modulation. The maximum power was measured and verified to meet the minimum and maximum levels allowed, with the maximum gain being computed from these values. The uplink and downlink gain under each condition were verified to be within 9 dB of each other.

For Fixed installations the following formula was used for calculating the gain limits.

$$\text{Gain Limit (dB)} = 6.5 \text{ dB} + 20\text{Log}(F_{\text{MHz}})$$

F_{MHz} is the uplink mid-band frequency with the downlink gain limit being equivalent to the paired Uplink band gain limit.

Test Setup





Uplink Power Test Results

Frequency Band (MHz)	Input Level (dBm)	Output Power (dBm)	Lower Limit (dBm)	Upper Limit (dBm)	Result
824 - 849 MHz Pulsed GSM	-36.3	24.70	17	30	Pass
824 - 849 MHz AWGN	-40.3	21.29	17	30	Pass
1850 - 1915 MHz Pulsed GSM	-45.2	24.78	17	30	Pass
1850 - 1915 MHz AWGN	-48.4	21.44	17	30	Pass

Downlink Power Test Results

Frequency Band (MHz)	Input Level (dBm)	Output Power (dBm)	Upper Limit (dBm)	Result
869 - 894 MHz Pulsed GSM	-51.7	10.17	17	Pass
869 - 894 MHz AWGN	-49.5	12.26	17	Pass
1930 - 1995 MHz Pulsed GSM	-61.8	6.69	17	Pass
1930 - 1995 MHz AWGN	-59.2	9.26	17	Pass

Uplink and Downlink Gain Test Results

Modulation	Uplink Frequency (MHz)	Downlink Frequency (MHz)	Uplink Gain (dB)	Uplink Limit (dB)	Downlink Gain (dB)	Downlink Limit (dB)	Delta (dB)	Limit (dB)	Margin (dB)
Pulsed CW	833.88	876.6	61.00	64.9	61.9	64.9	0.87	9	-8.13
AWGN	833.88	876.6	61.59	64.9	61.8	64.9	0.17	9	-8.83
Pulsed CW	1870.6	1969.7	69.98	72	68.5	72	1.49	9	-7.51
AWGN	1870.6	1969.7	69.84	72	68.5	72	1.38	9	-7.62



EIRP Uplink Power Calculations

Frequency Band (MHz)	Antenna Kit	EIRP (dBm)	Limit (dBm)	Result
824 - 849	311129-400100	29.56	30.0	Pass
1850 - 1915	3144473-0640	29.52	30.0	Pass

EIRP Downlink Power Calculations

Frequency Band (MHz)	Antenna Kit	EIRP (dBm)	Limit (dBm)	Result
869 - 894	311115-1150	2.12	30.0	Pass
1930 - 1995	309900-50N	7.49	30.0	Pass



Intermodulation


Name of Test: Intermodulation
Test Equipment Utilized: i00379, i00405

Engineer: Mike Graffeo
Test Date: 1/5/2015

Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator. Two signal generators were utilized to produce two CW signals 600 kHz apart and centered in the operational band. Attenuator and cable insertion loss correction factors were input to either the signal generator or the spectrum analyzer as required to ensure that accurate measurements were recorded. The input power was set at the maximum allowable power and the intermodulation products were measured to ensure they were less than -19 dBm in a 3 kHz RBW. The uplink and downlink intermodulation products were plotted, with the levels being listed in the summary tables.

Test Setup

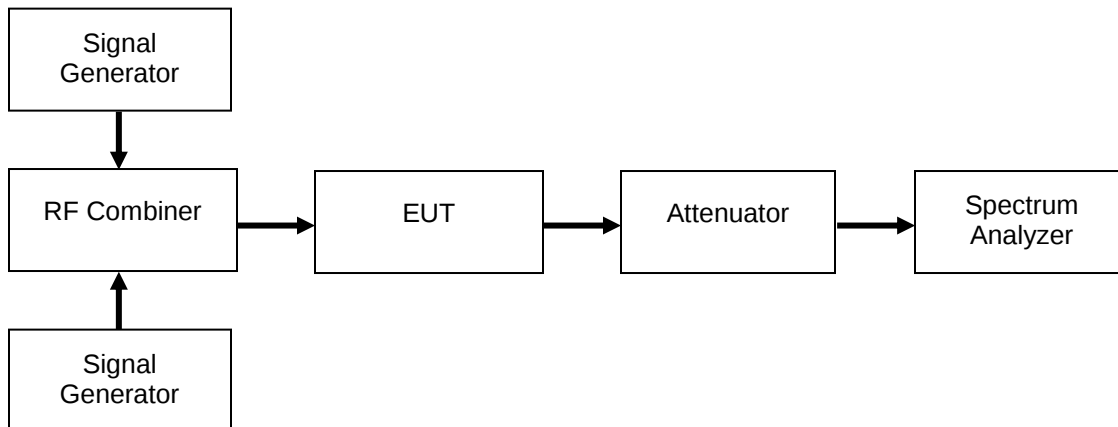

Uplink Test Results

Frequency Band (MHz)	Intermodulation Level (dBm)	Limit (dBm)	Result
824 - 849 MHz	-19.71	-19	Pass
1850 - 1915 MHz	-19.95	-19	Pass


Downlink Test Results

Frequency Band (MHz)	Intermodulation Level (dBm)	Limit (dBm)	Result
869 - 894 MHz	-35.68	-19	Pass
1930 - 1995 MHz	-34.80	-19	Pass




Uplink Test Results

824 - 849 MHz Band

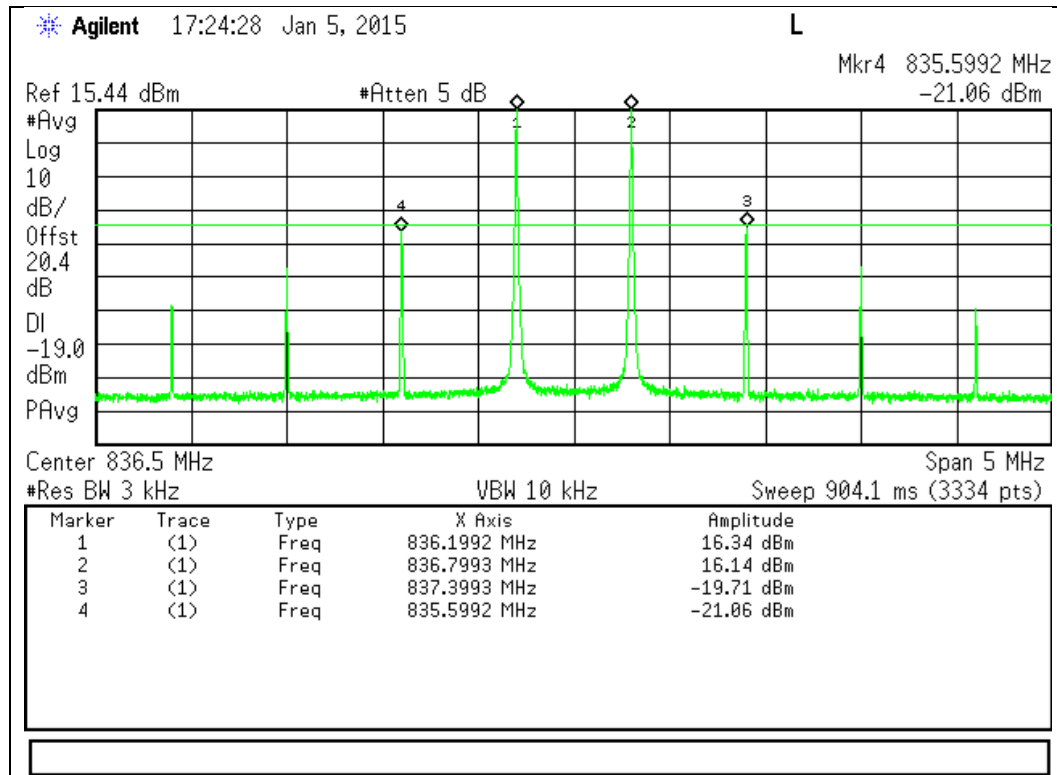


1850 - 1915 MHz Band

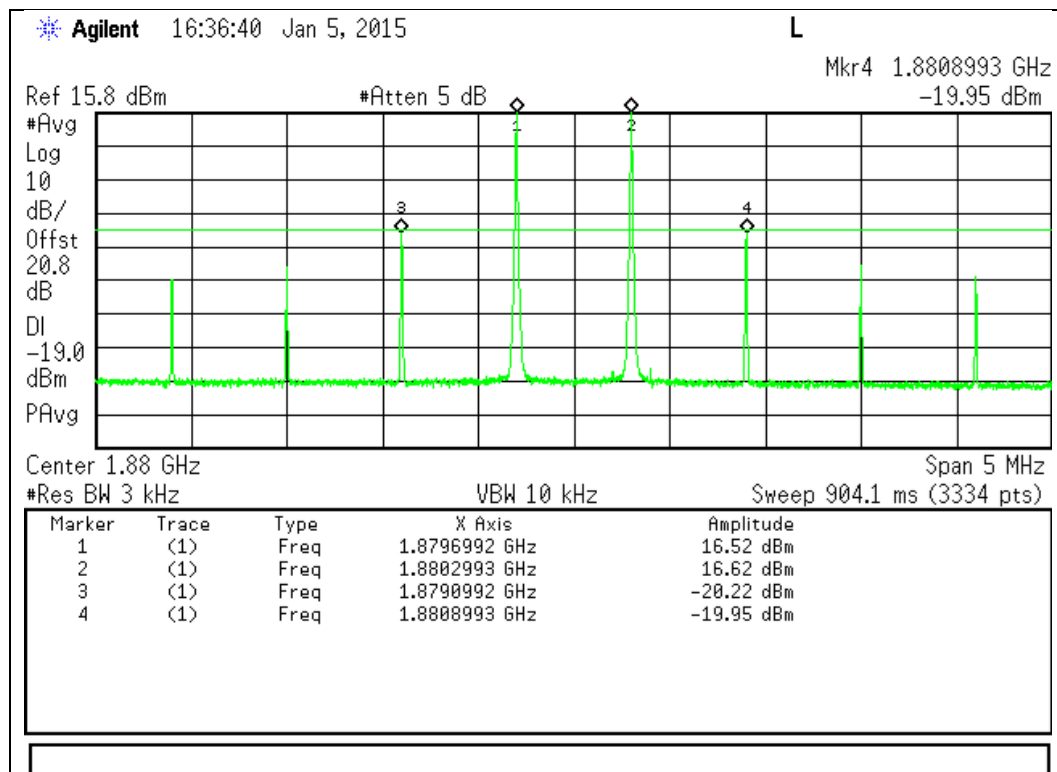




Downlink Test Results

869 - 894 MHz Band

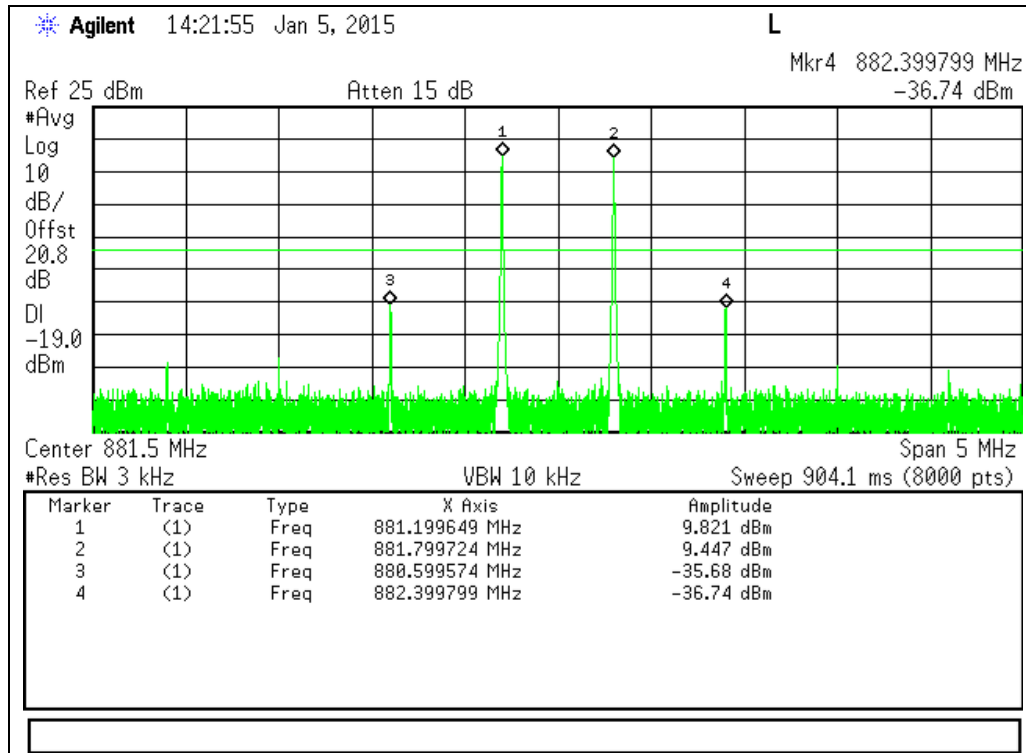

1930 - 1995 MHz Band

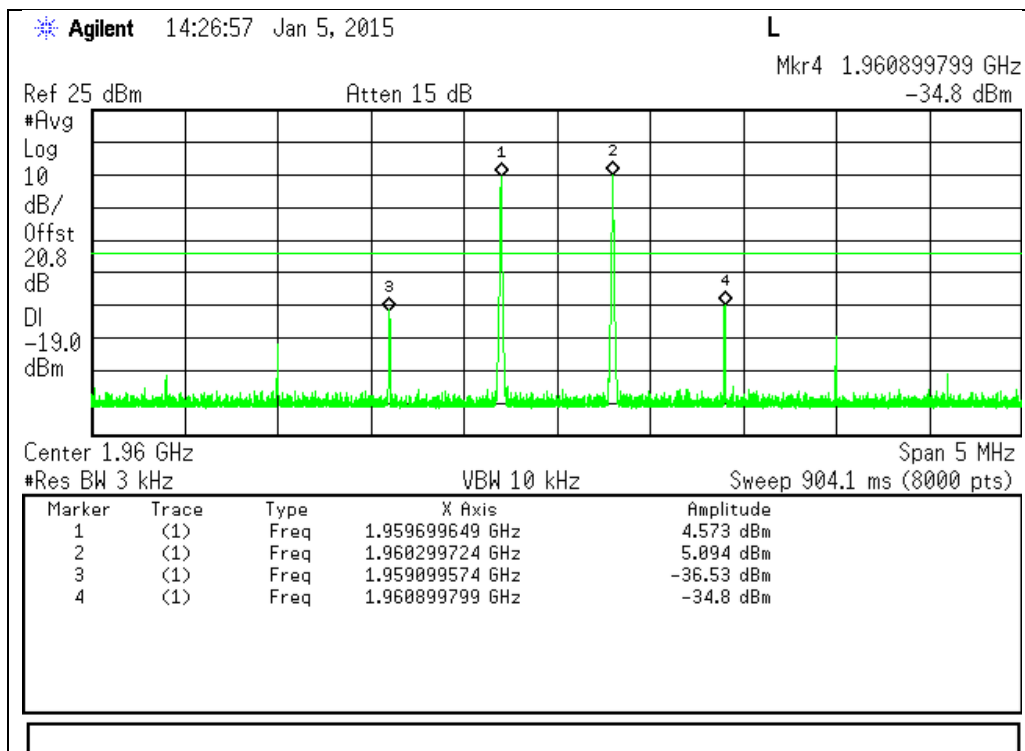



Out-of-Band Emissions

Name of Test:

Out-of-Band Emissions

Engineer: Mike Graffeo

Test Equipment Utilized:

i00379, i00405

Test Date: 1/6/15

Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor in order to ensure accurate readings. A signal generator was utilized to produce the following signals: GSM, CDMA, and WCDMA. The signal generator was tuned to the lowest allowable upper and lower channel within the EUT operational band for each respective modulation type. The RF input level was increased to a point just prior to the AGC being in control of the power. For each modulation type the Out of Band Emissions were measured to ensure they met the limits.

The following formula was used for calculating the limits:

$$\text{Limit} = P1 - 6 - (43 + 10\log(P2)) = -19\text{dBm}$$

P1 = power in dBm

P2 = power in Watts

Test Setup





GSM Uplink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
824 - 849	Lower	-38.81	-19	Pass
824 - 849	Upper	-39.31	-19	Pass
1850-1915	Lower	-37.81	-19	Pass
1850-1915	Upper	-63.08	-19	Pass

CDMA Uplink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
824 - 849	Lower	-39.80	-19	Pass
824 - 849	Upper	-38.15	-19	Pass
1850-1915	Lower	-40.30	-19	Pass
1850-1915	Upper	-55.08	-19	Pass

WCDMA Uplink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
824 - 849	Lower	-49.35	-19	Pass
824 - 849	Upper	-49.11	-19	Pass
1850-1915	Lower	-38.08	-19	Pass
1850-1915	Upper	-47.84	-19	Pass



GSM Downlink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
869 - 894	Lower	-47.62	-19	Pass
869 - 894	Upper	-44.73	-19	Pass
1930-1995	Lower	-51.44	-19	Pass
1930-1995	Upper	-51.44	-19	Pass

CDMA Downlink Test Results

Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
869 - 894	Lower	-54.65	-19	Pass
869 - 894	Upper	-54.14	-19	Pass
1930-1995	Lower	-55.70	-19	Pass
1930-1995	Upper	-55.67	-19	Pass

WCDMA Downlink Test Results


Frequency Band (MHz)	Band Edge	Measured Level (dBm)	Limit (dBm)	Result
869 - 894	Lower	-48.18	-19	Pass
869 - 894	Upper	-45.37	-19	Pass
1930-1995	Lower	-47.46	-19	Pass
1930-1995	Upper	-48.80	-19	Pass




GSM Uplink Test Plots

824 - 849 MHz Band

Lower Band Edge

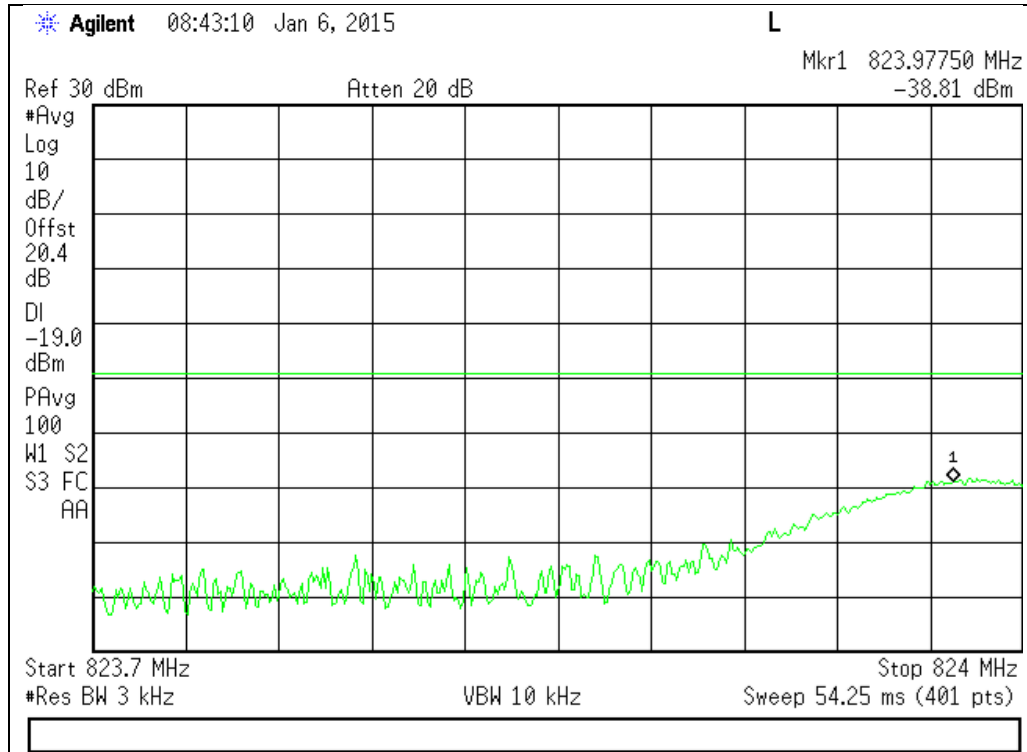


Upper Band Edge

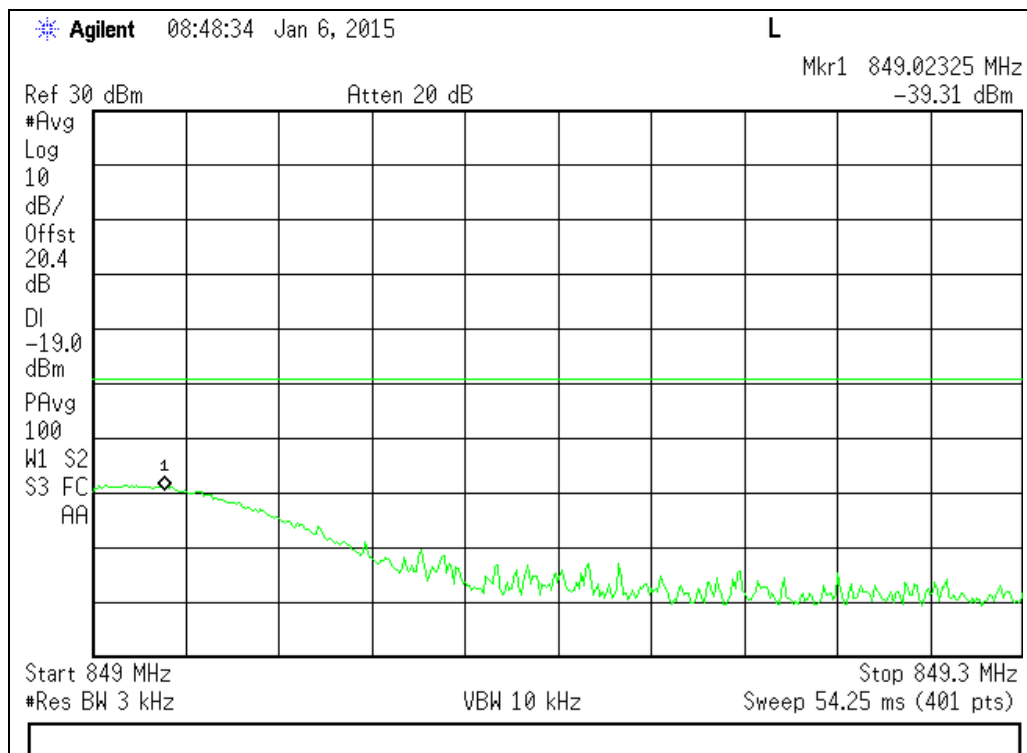




1850 - 1915 MHz Band

Lower Band Edge

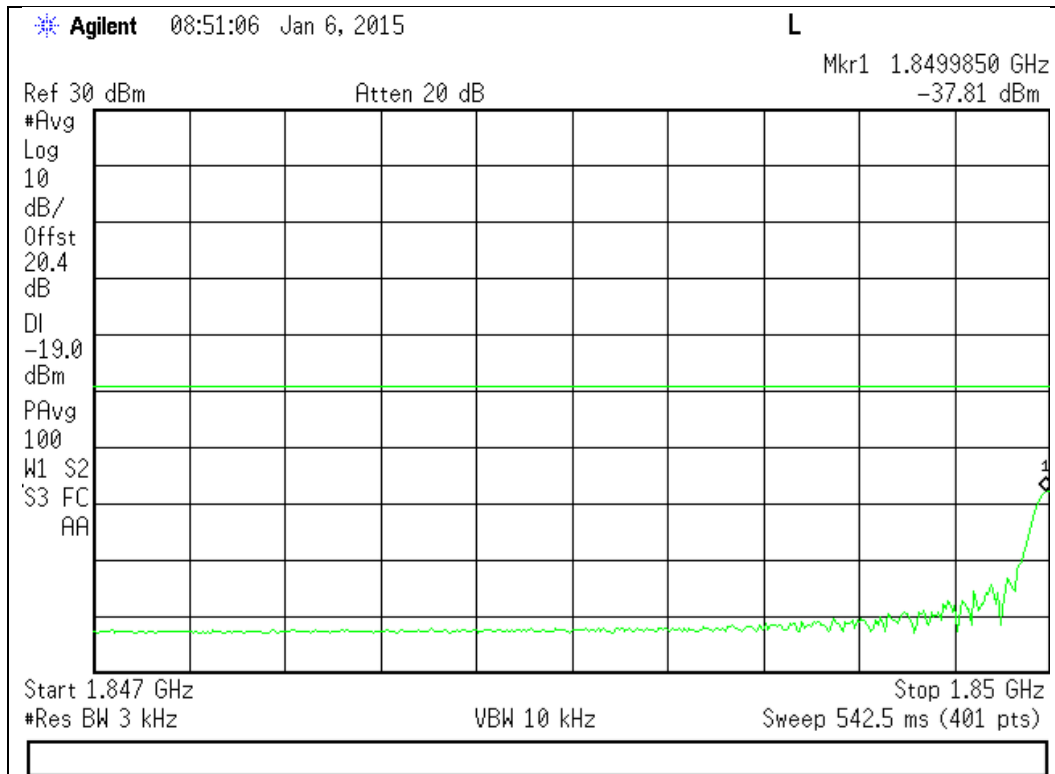

Upper Band Edge

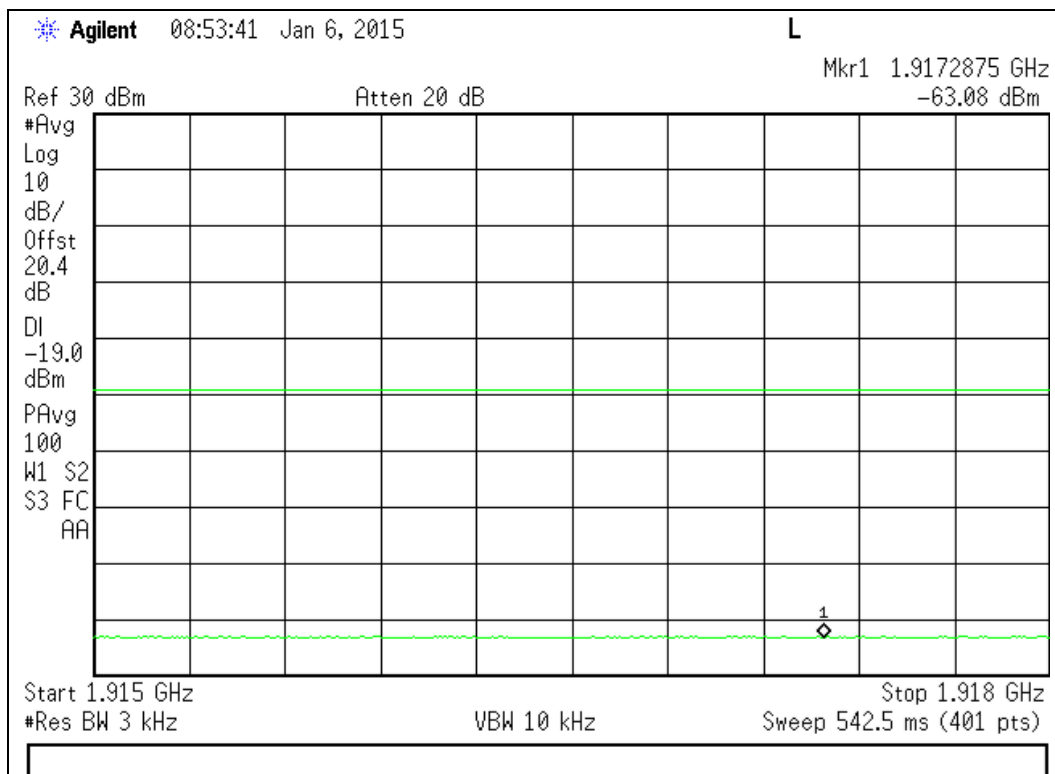





CDMA Uplink Test Plots

824 - 849 MHz Band

Lower Band Edge

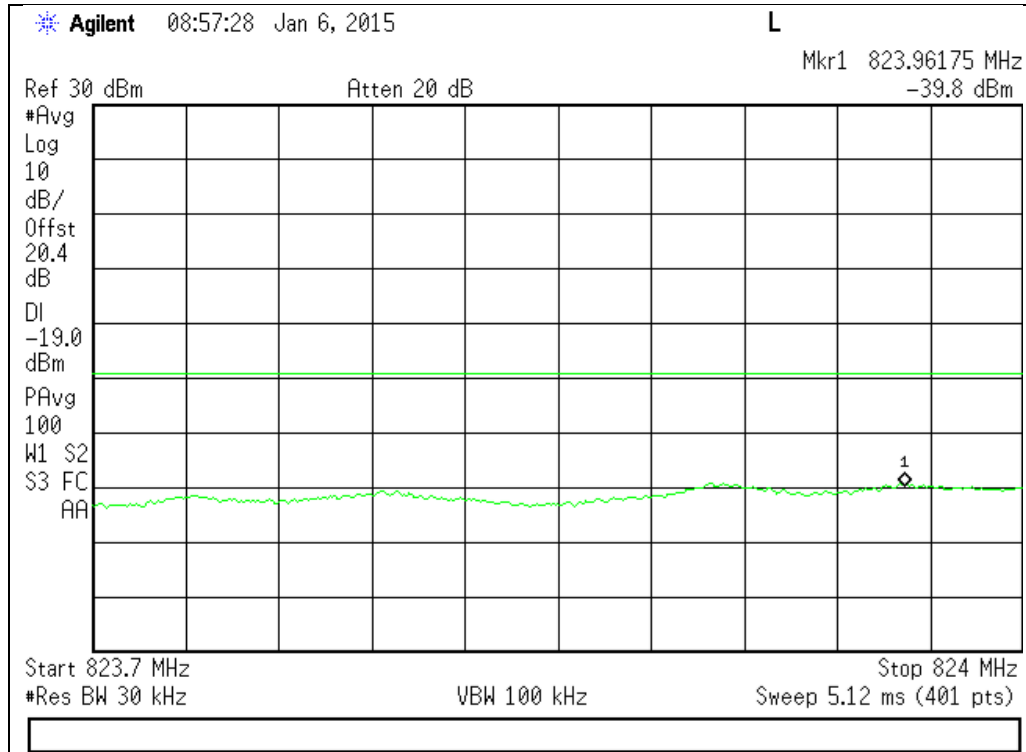


Upper Band Edge

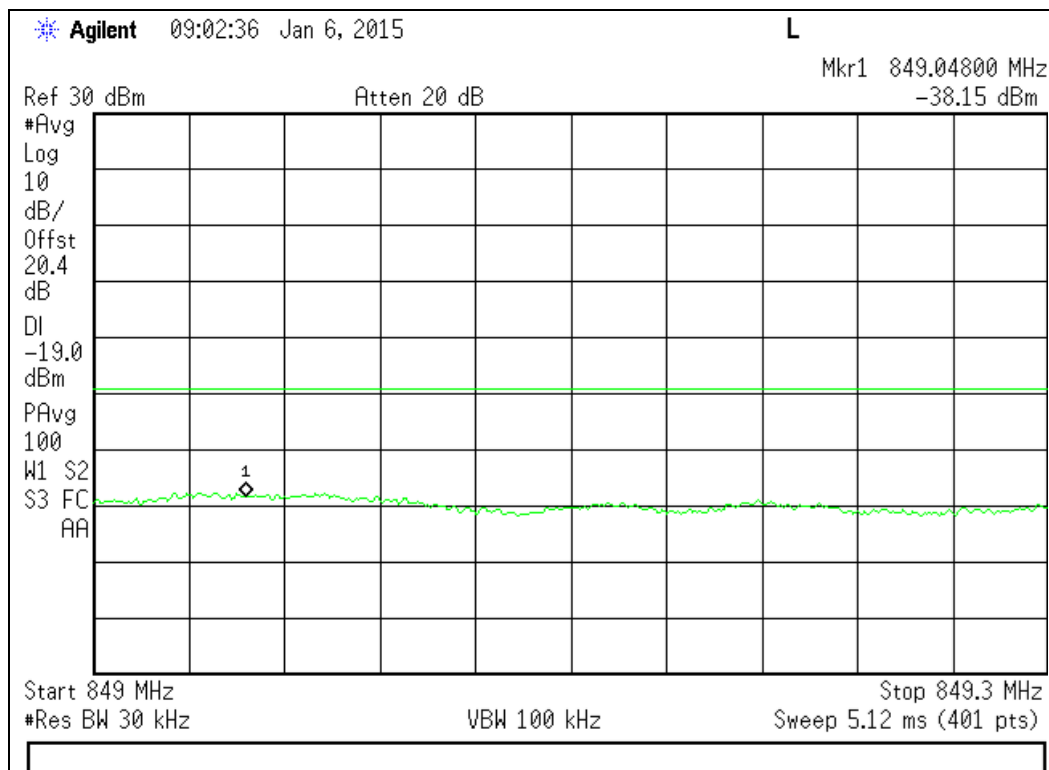




1850 - 1915 MHz Band

Lower Band Edge

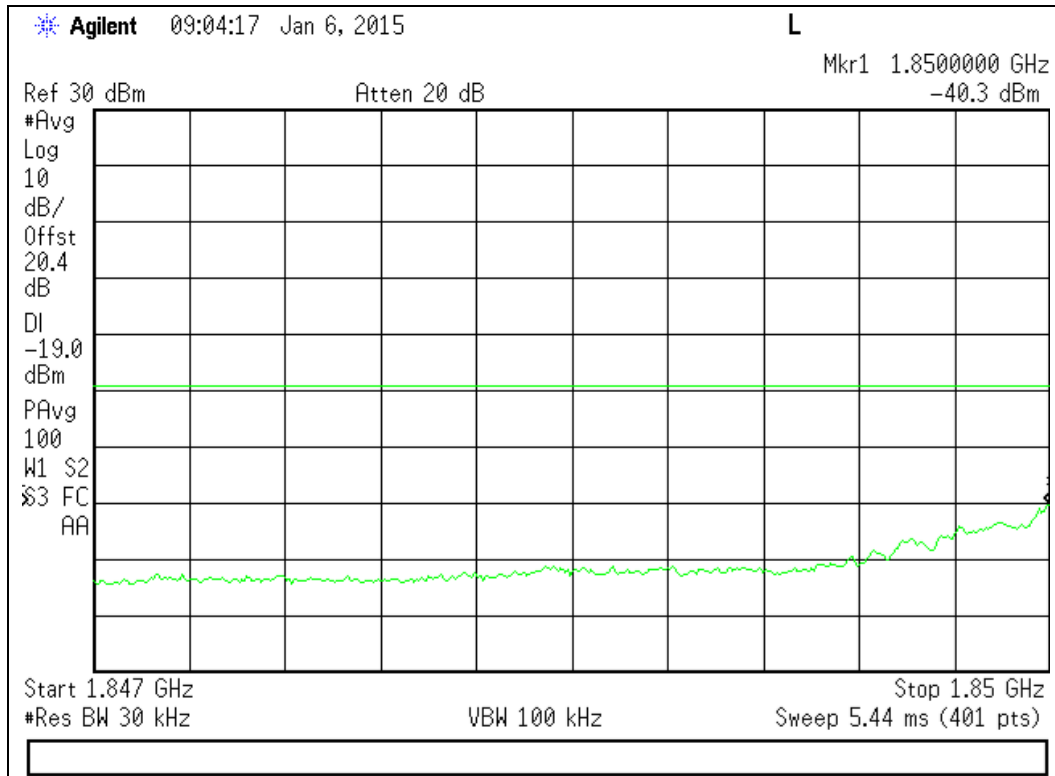


Upper Band Edge

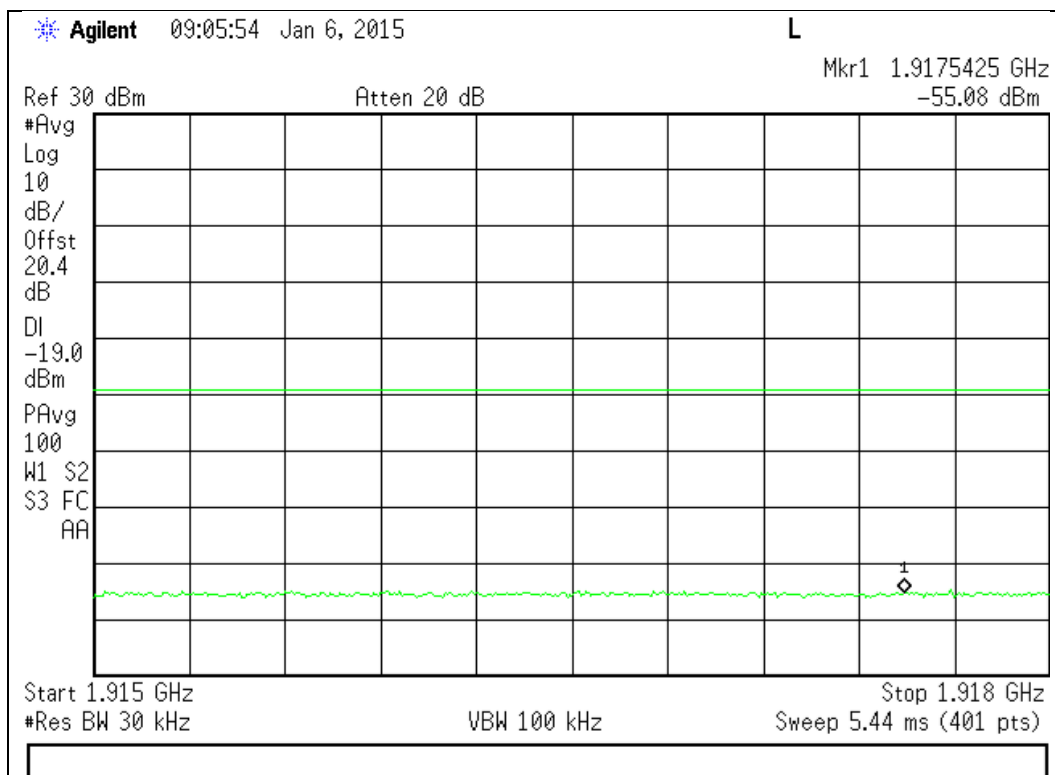




WCDMA Uplink Test Plots 824 - 849 MHz Band

Lower Band Edge

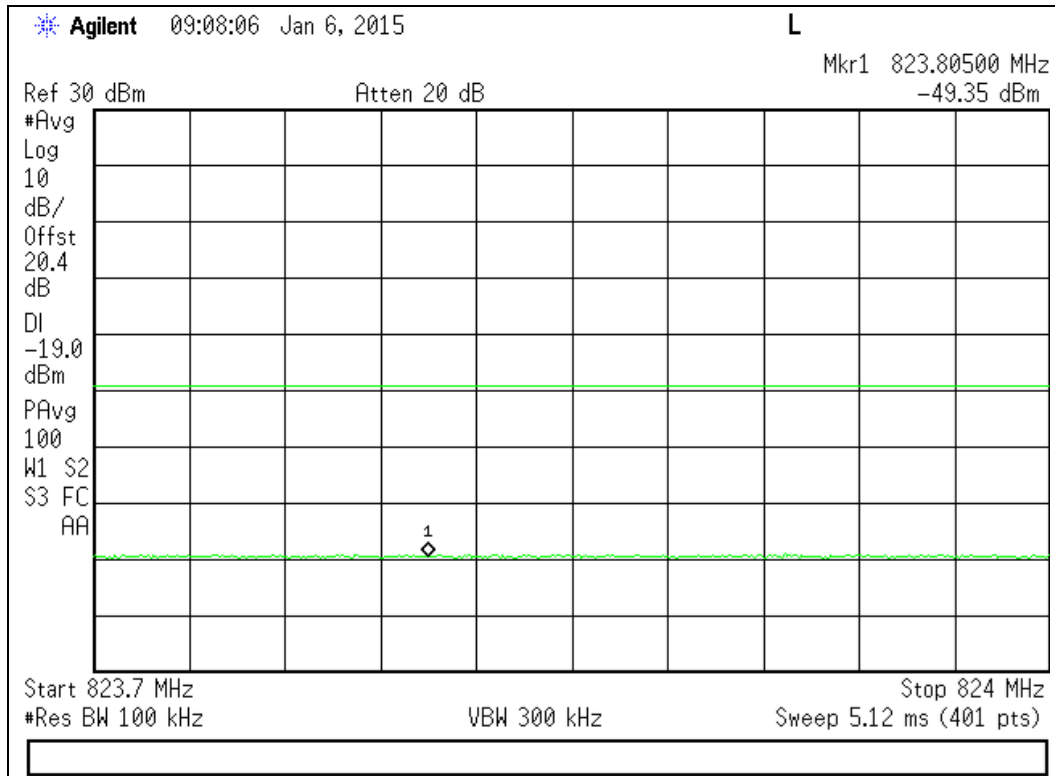


Upper Band Edge

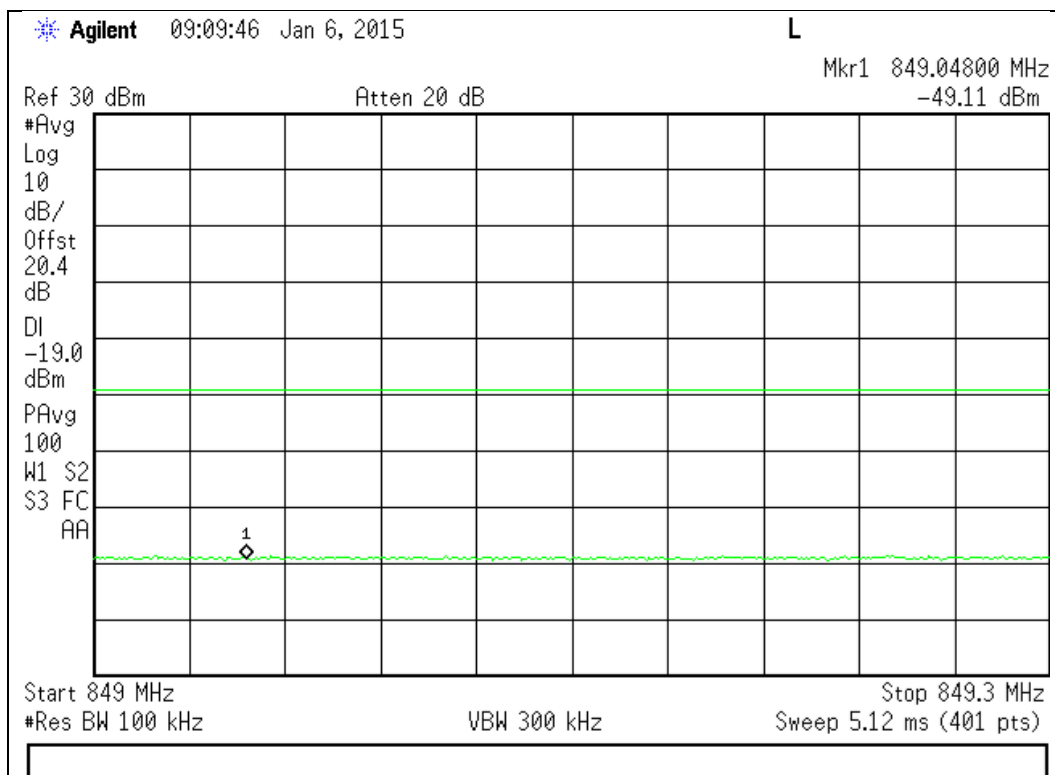




1850 - 1915 MHz Band

Lower Band Edge

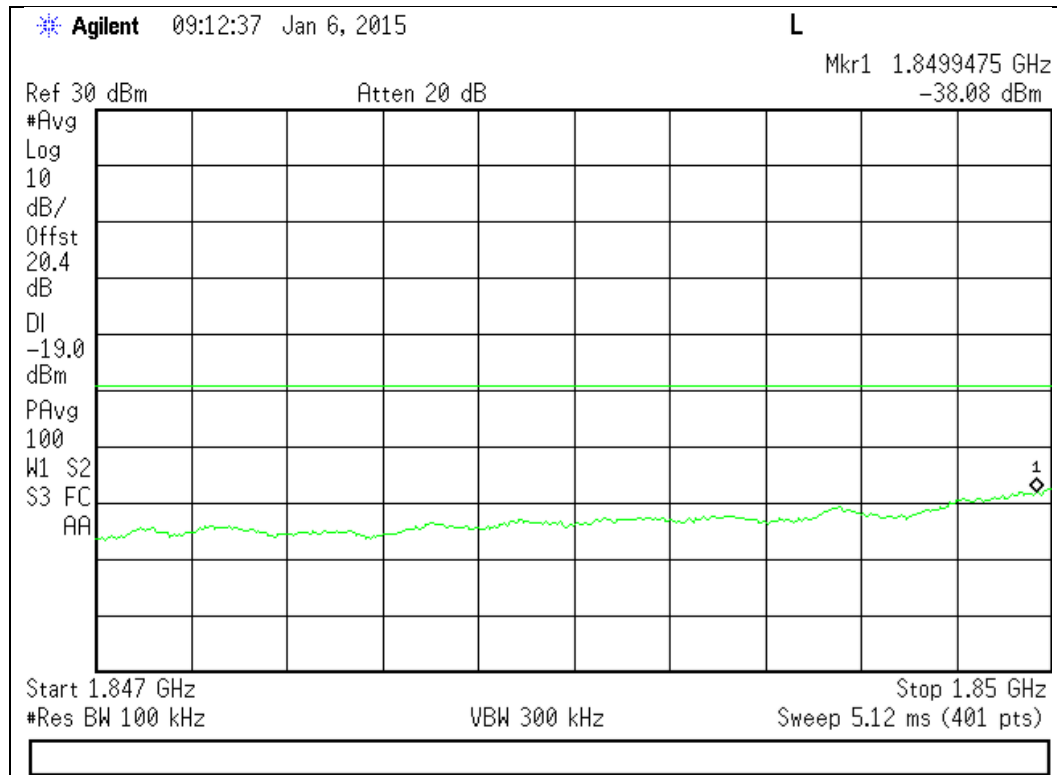


Upper Band Edge

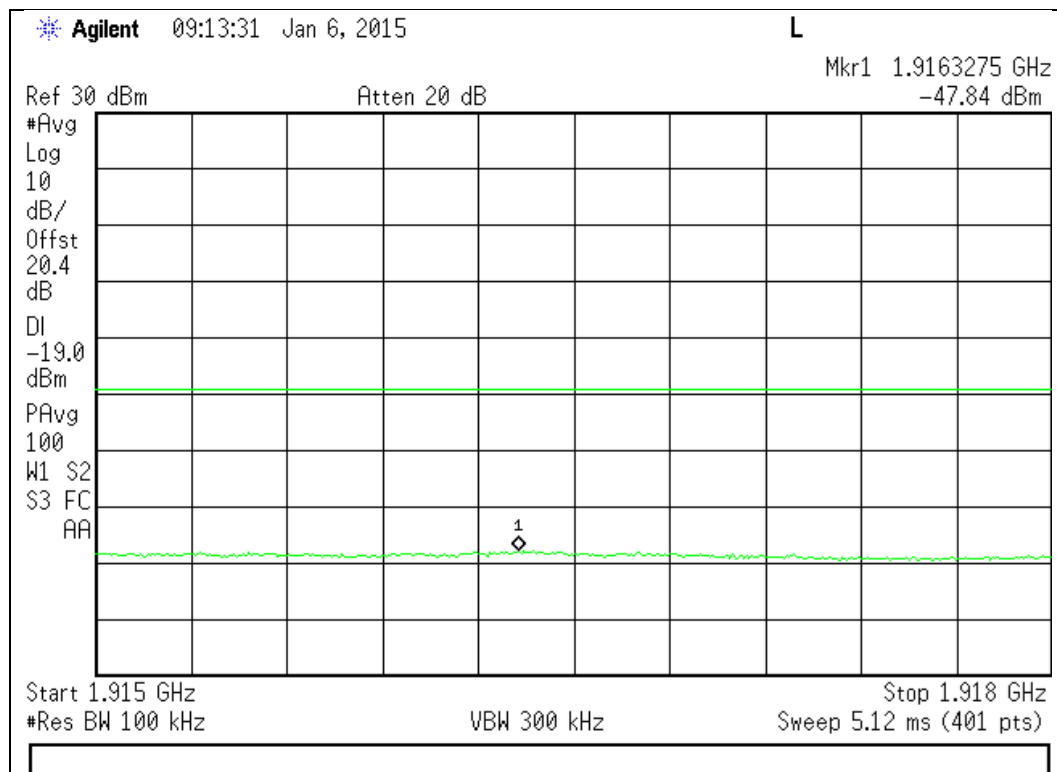




GSM Downlink Test Plots 869 - 894 MHz Band

Lower Band Edge

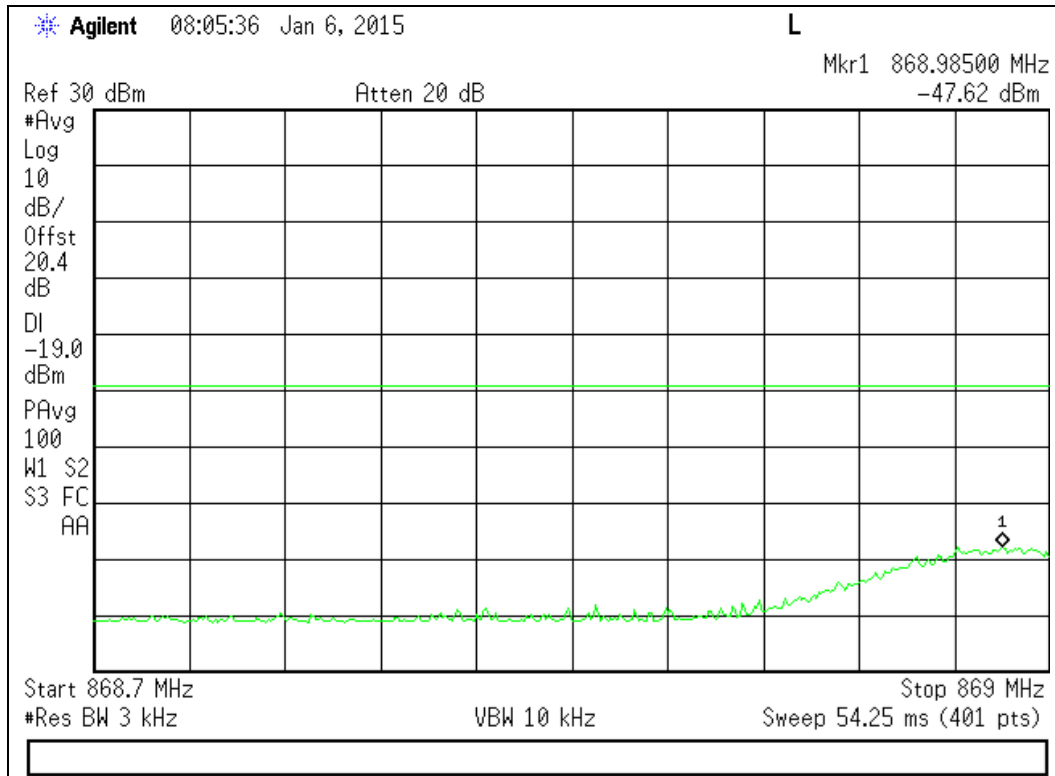


Upper Band Edge

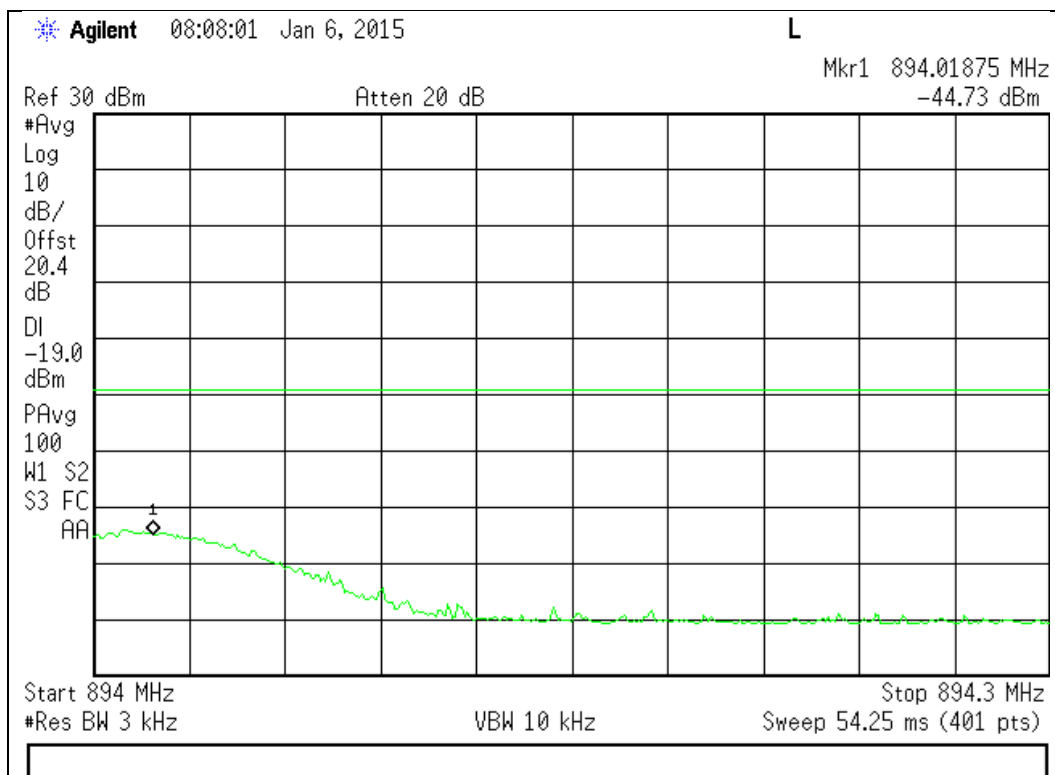




1930 - 1995 MHz Band

Lower Band Edge

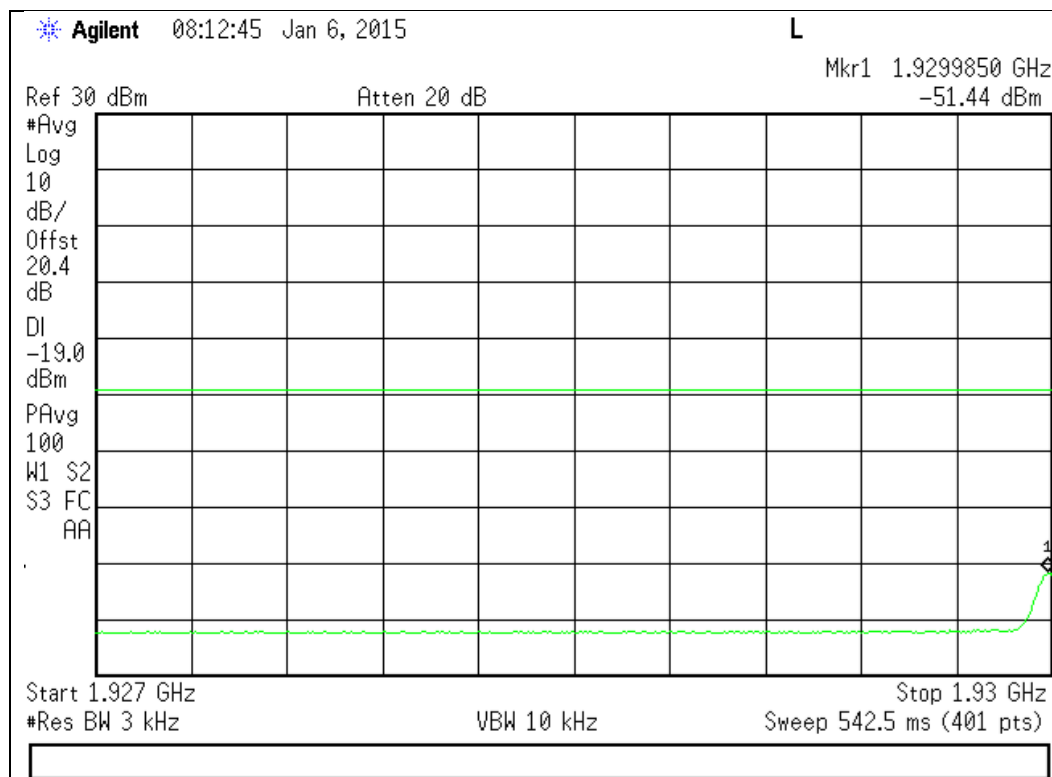

Upper Band Edge

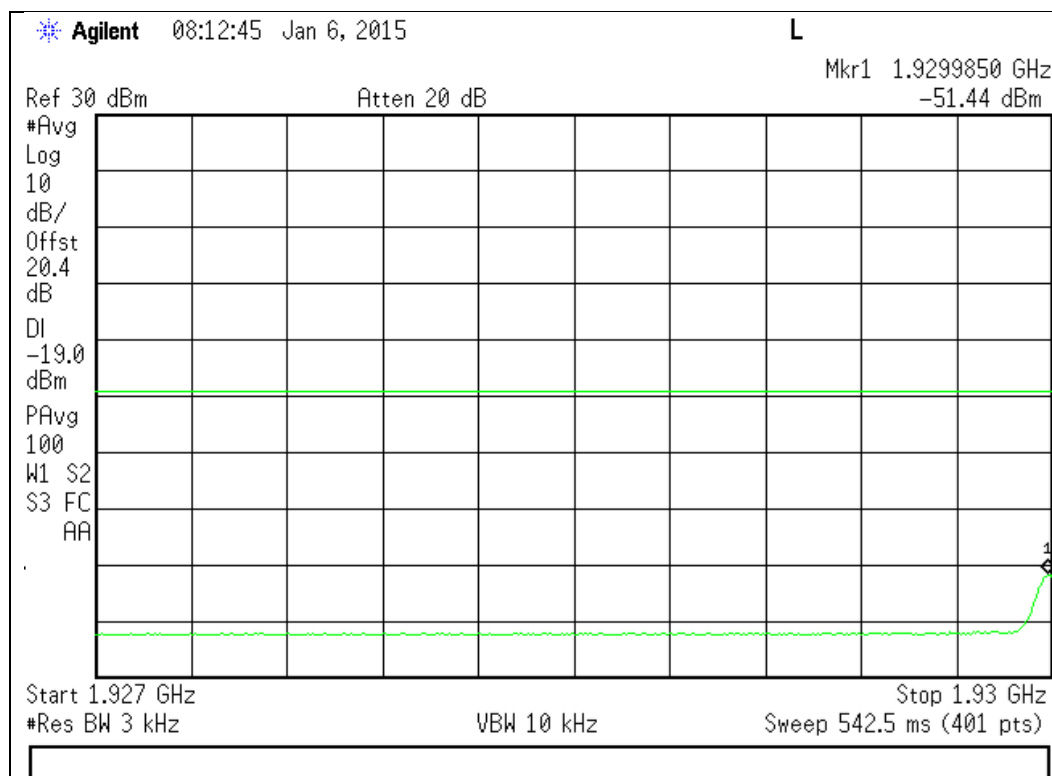





CDMA Downlink Test Plots

869 - 894 MHz Band

Lower Band Edge

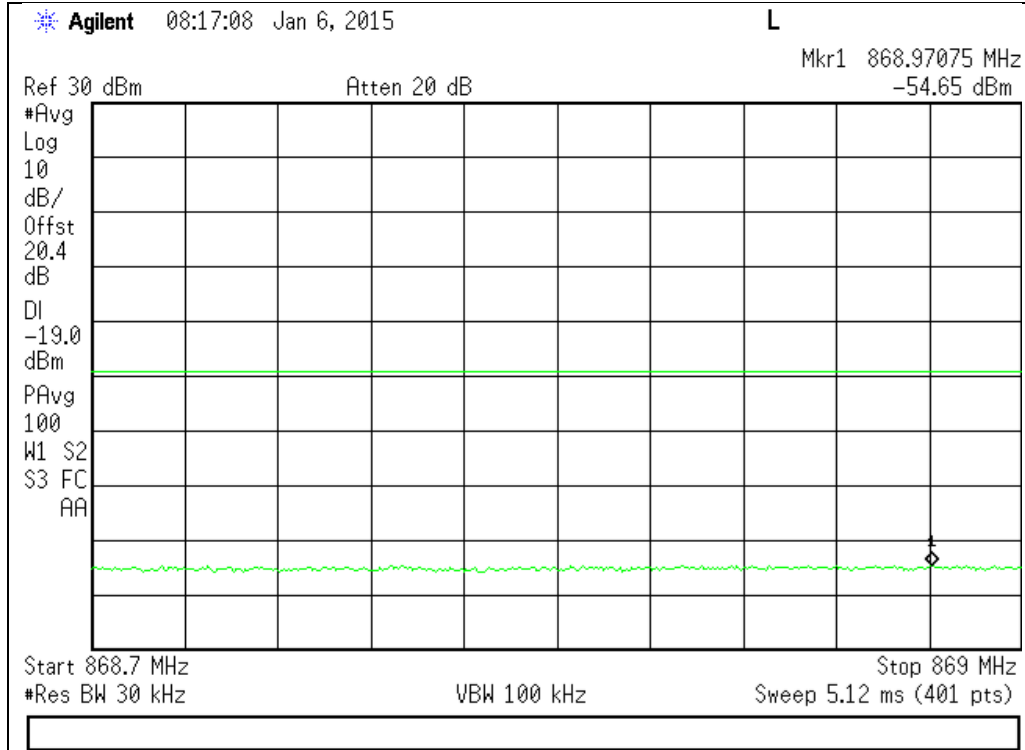


Upper Band Edge

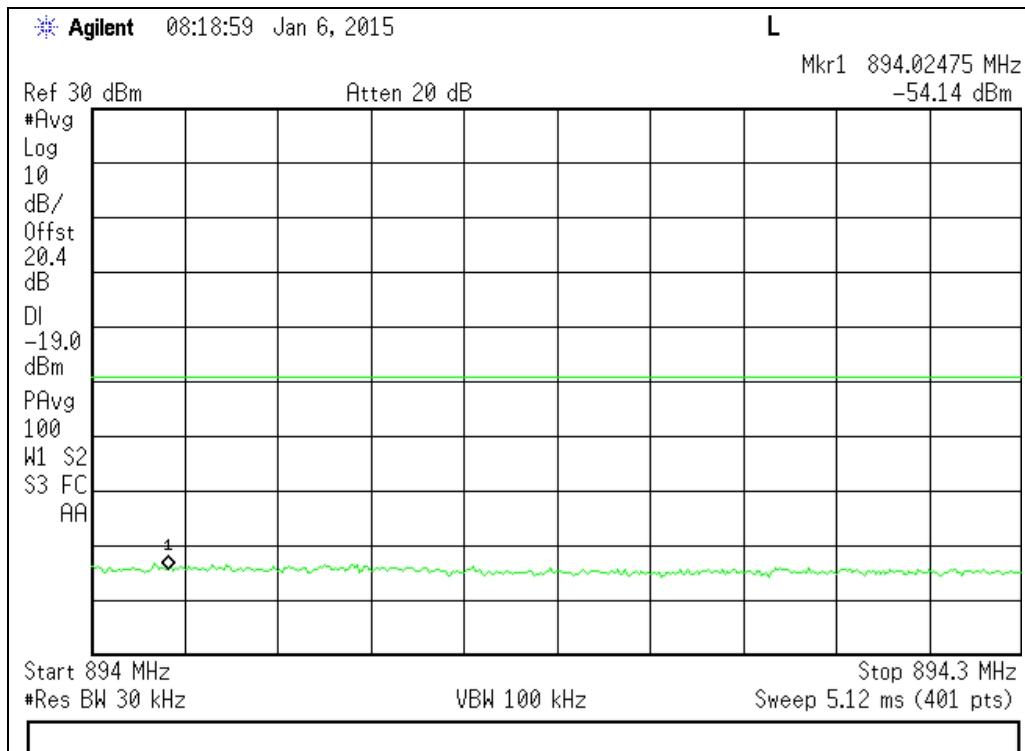




1930 - 1995 MHz Band

Lower Band Edge

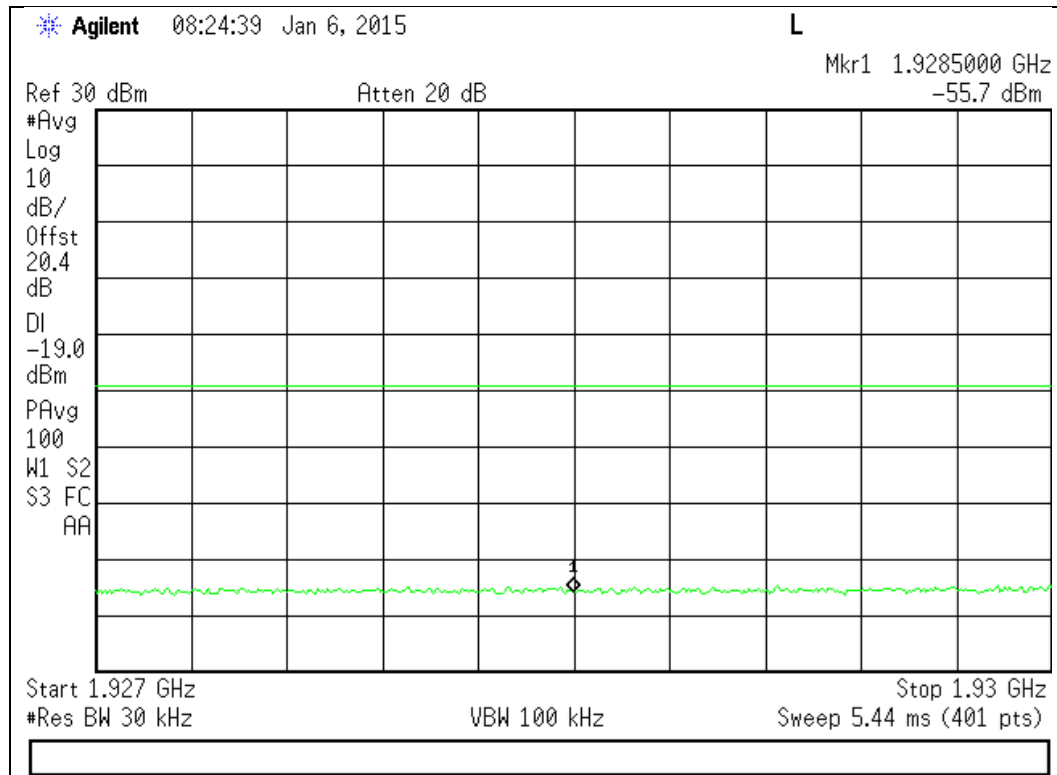

Upper Band Edge

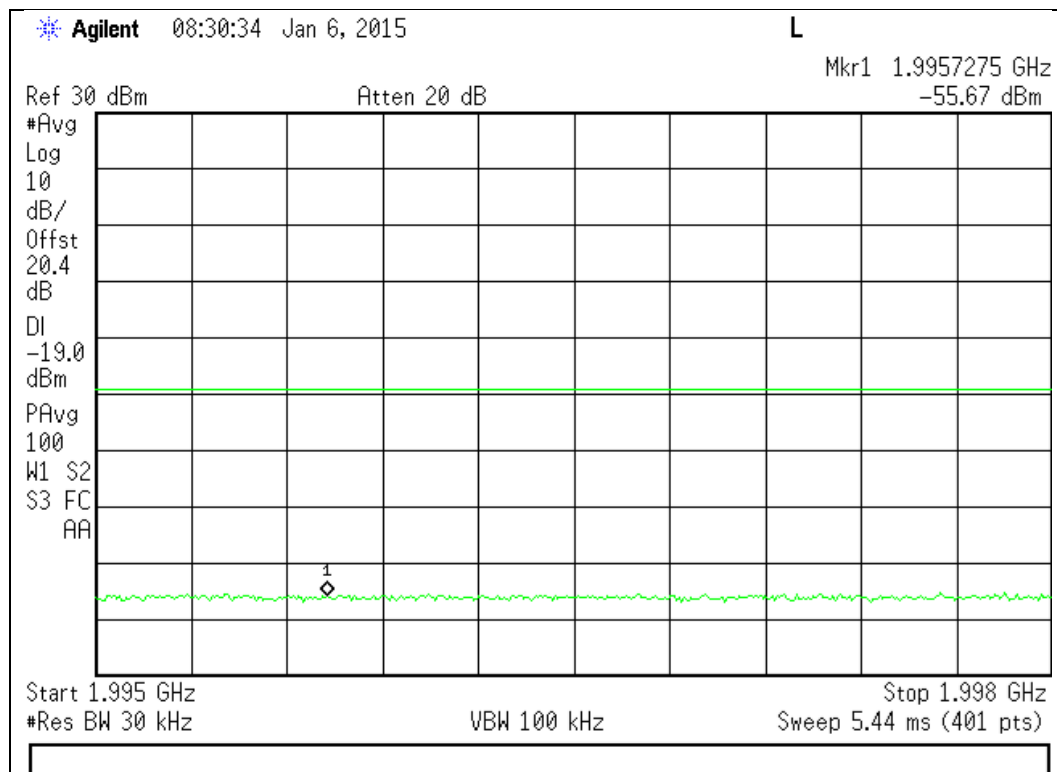





WCDMA Downlink Test Plots

869 - 894 MHz Band

Lower Band Edge

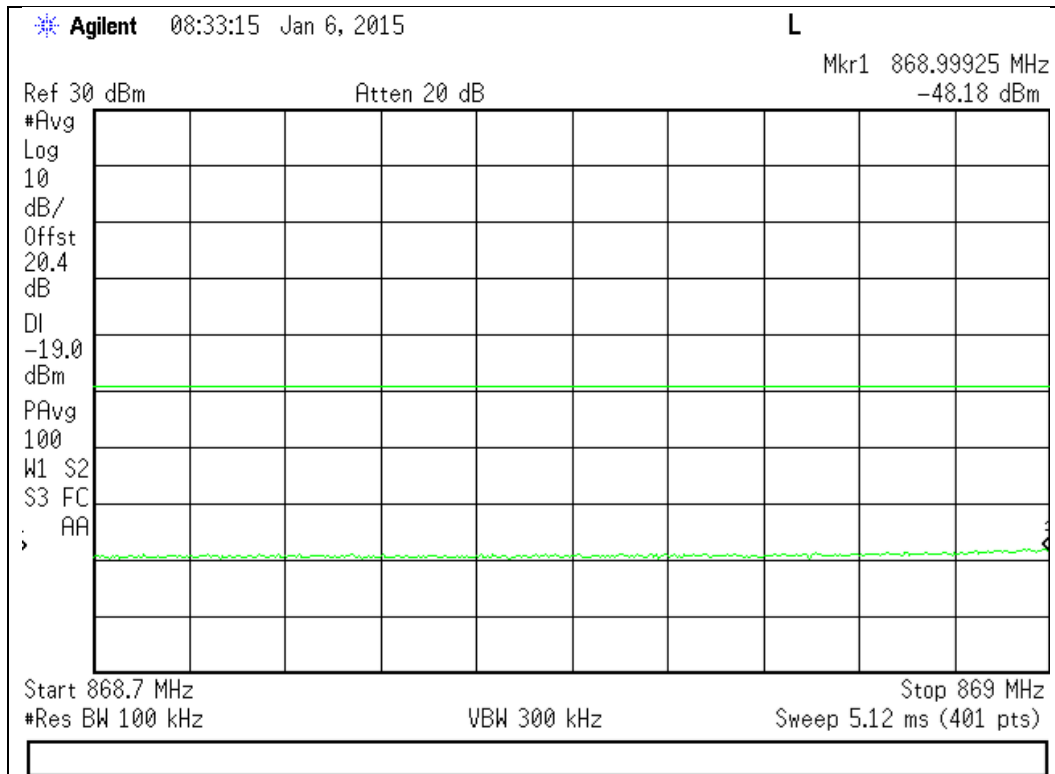


Upper Band Edge

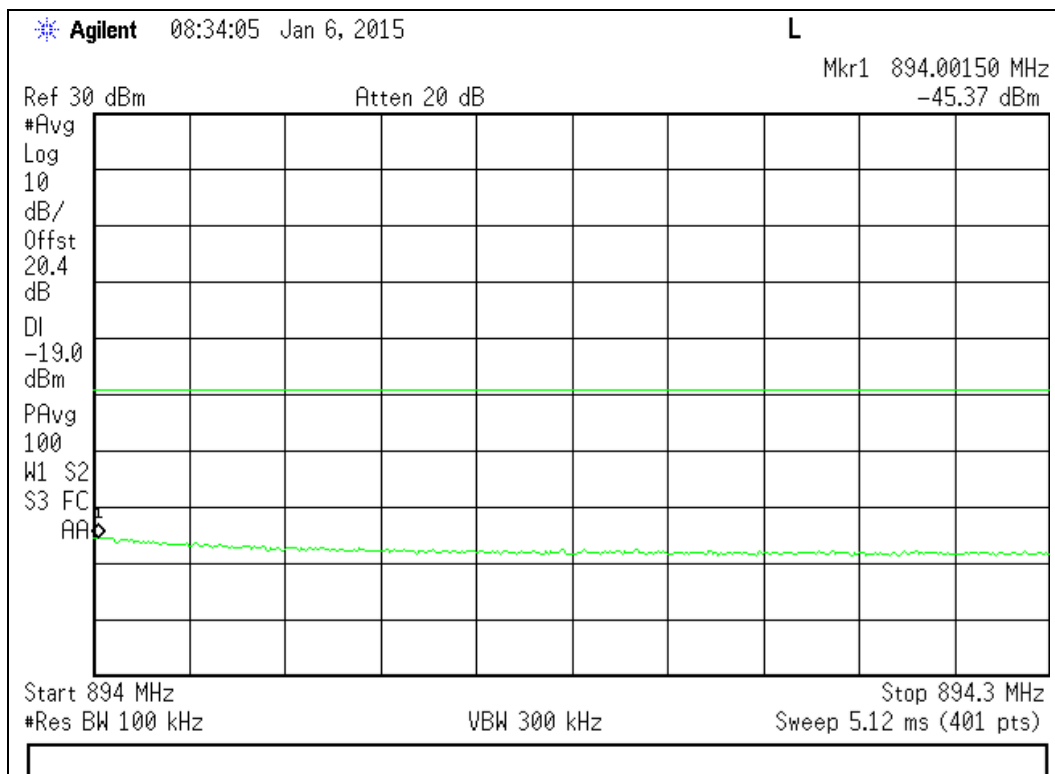




1930 - 1995 MHz Band

Lower Band Edge

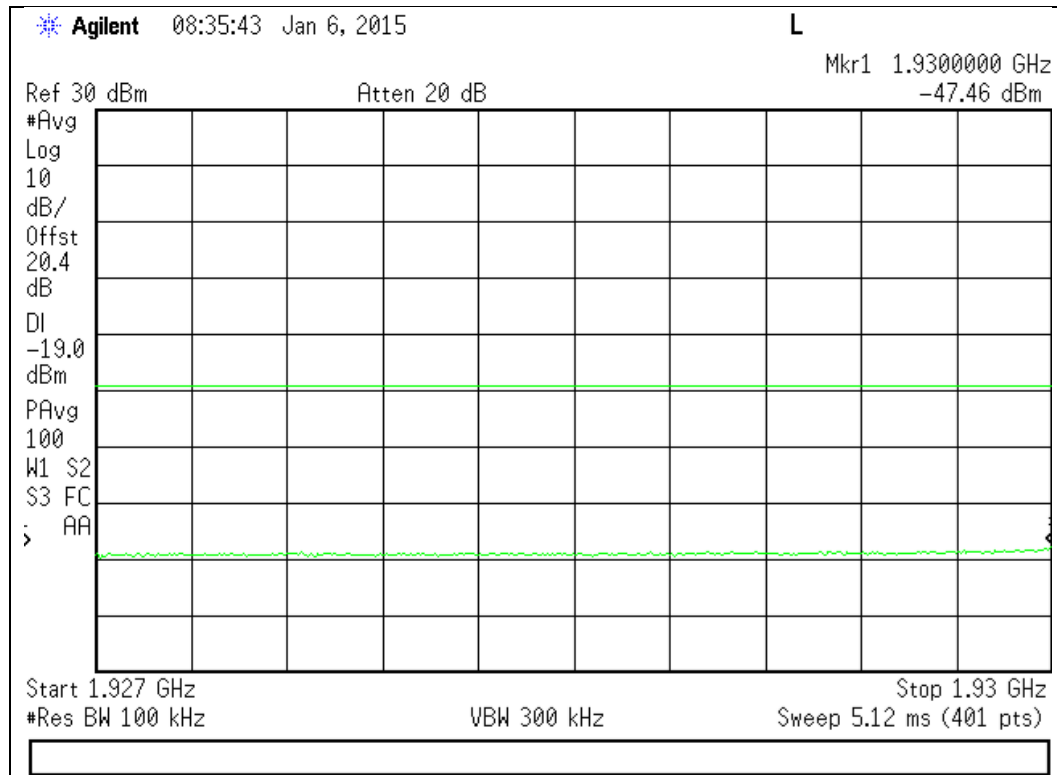

Upper Band Edge

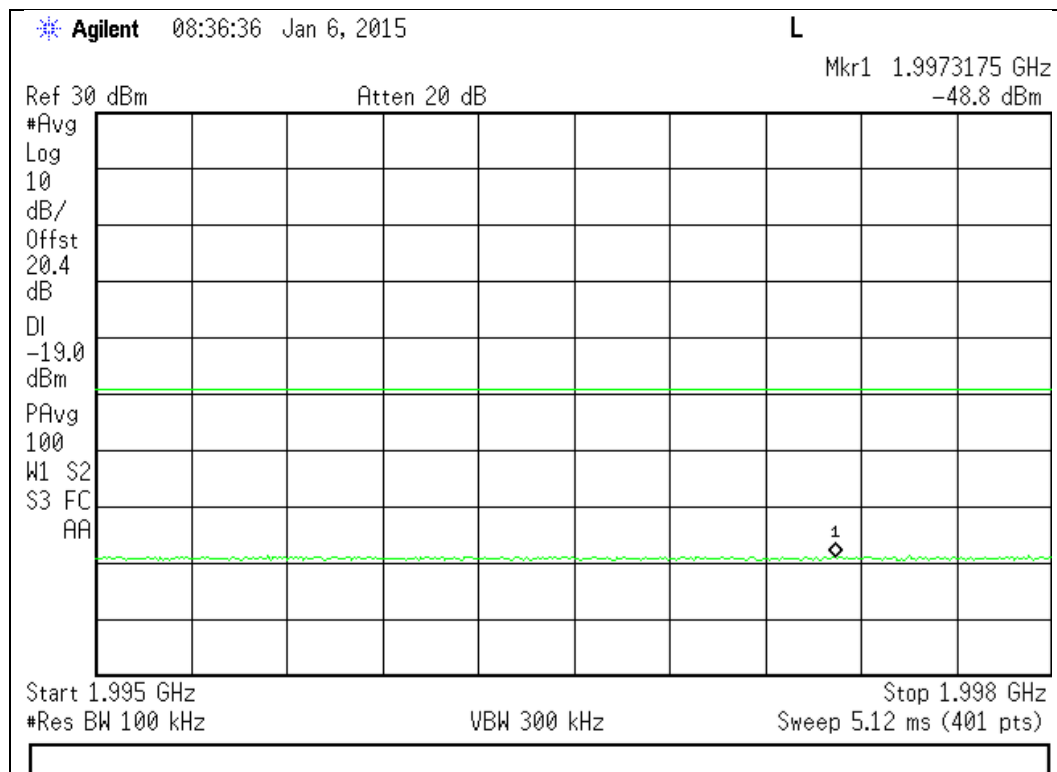



Conducted Spurious Emissions

Name of Test: Conducted Spurious Emissions
Test Equipment Utilized: i00379, i00405

Engineer: Mike Graffeo
Test Date: 1/6/15

Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator, with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as needed to ensure accurate readings. A signal generator was utilized to produce a 4.1 MHz AWGN signal operating at the maximum allowable power. The conducted spurious emissions from 30 MHz to 10 times the highest tunable frequency for each operational band were measured per section 7.6(i) of KDB935210. The emissions were plotted and the highest level was recorded in the summary table.


The following formulas are used for calculating the limits.

Conducted Spurious Emissions Limit = $P1 - (43 + 10\log(P2)) = -13$ dBm

P1 = power in dBm

P2 = power in Watts

Test Setup



Uplink Test Results

Frequency Band (MHz)	Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
824 - 849	2986.9	-38.94	-13	Pass
1850 - 1915	2996	-39.97	-13	Pass


Downlink Test Results

Frequency Band (MHz)	Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
869 - 894	1973.4	-34.16	-13	Pass
1930 - 1995	2996.5	-39.94	-13	Pass




Uplink Test Plots

824 - 849 MHz Band 30 MHz – 823 MHz

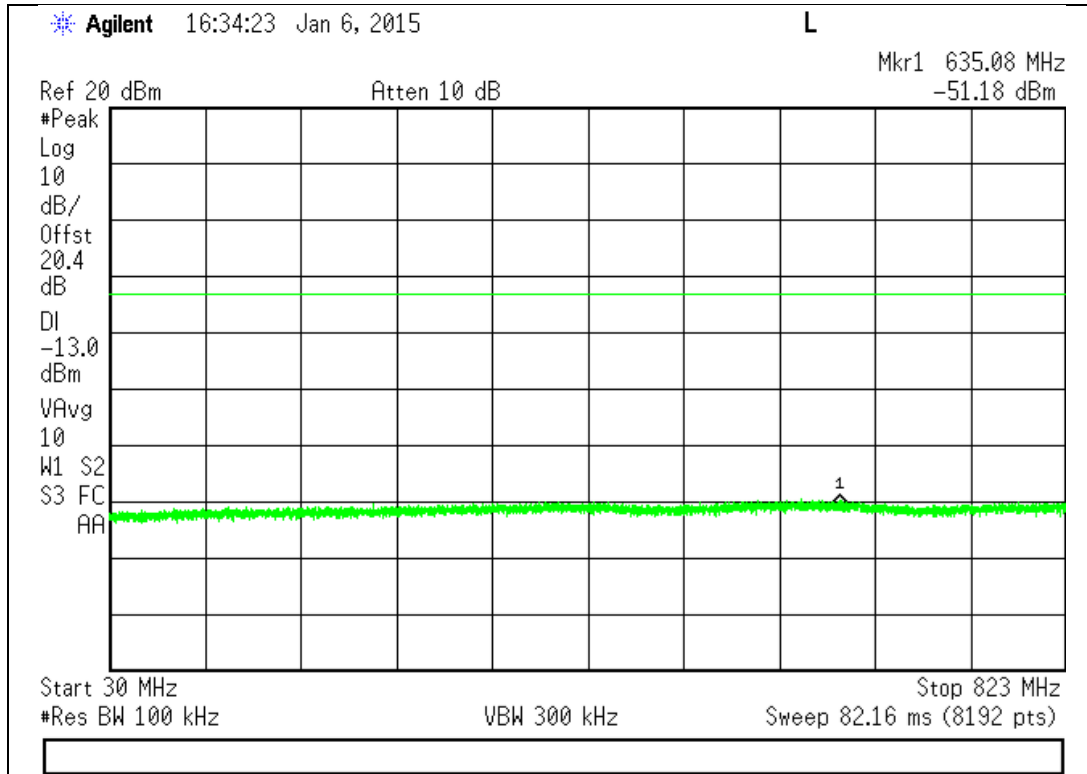


850 - 8490 MHz

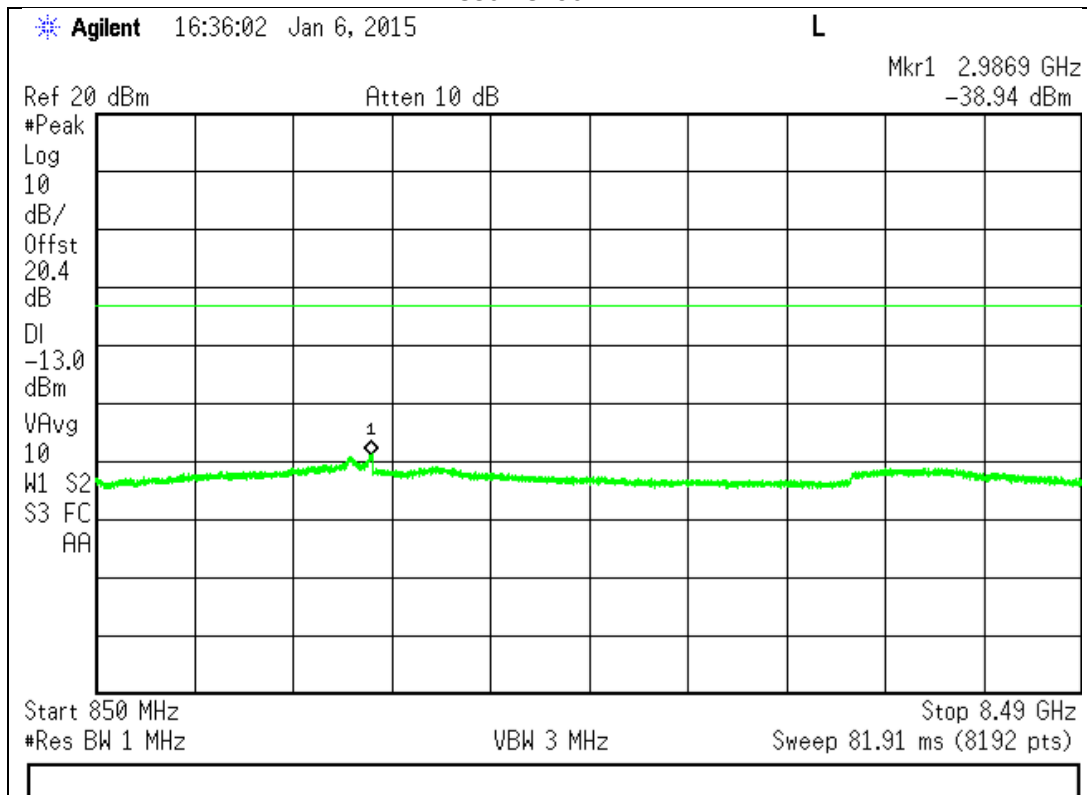




1850 - 1915 MHz Band

30 MHz – 1000 MHz

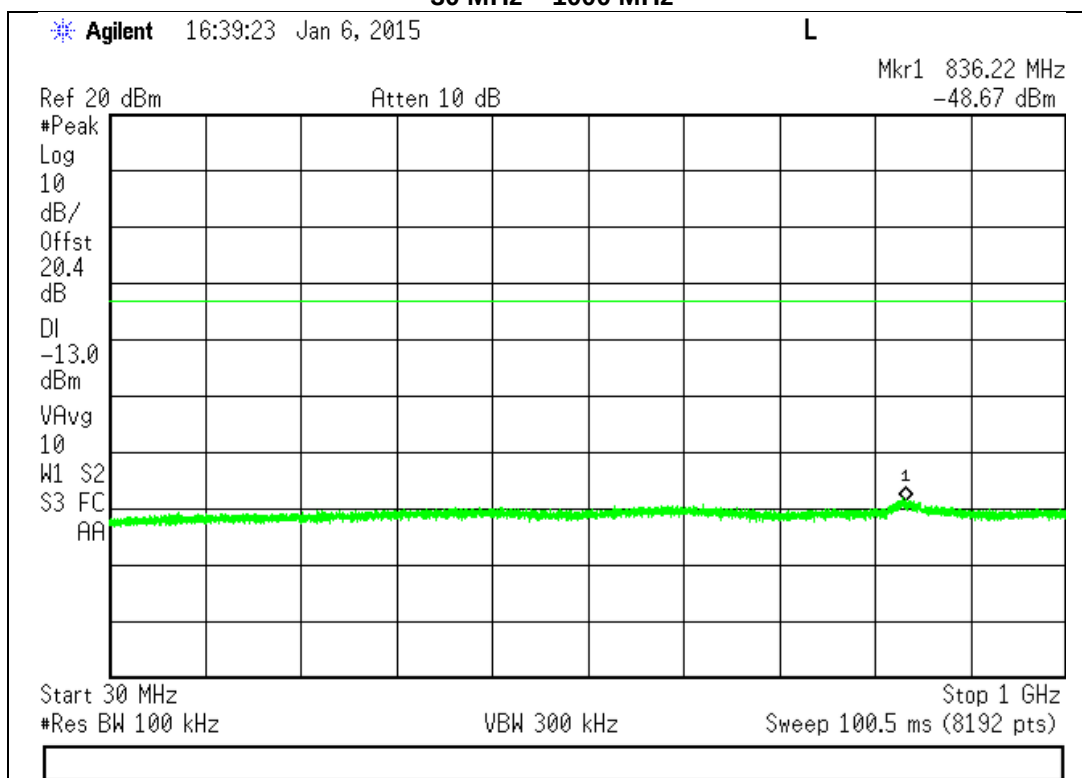


1000 – 1849 MHz

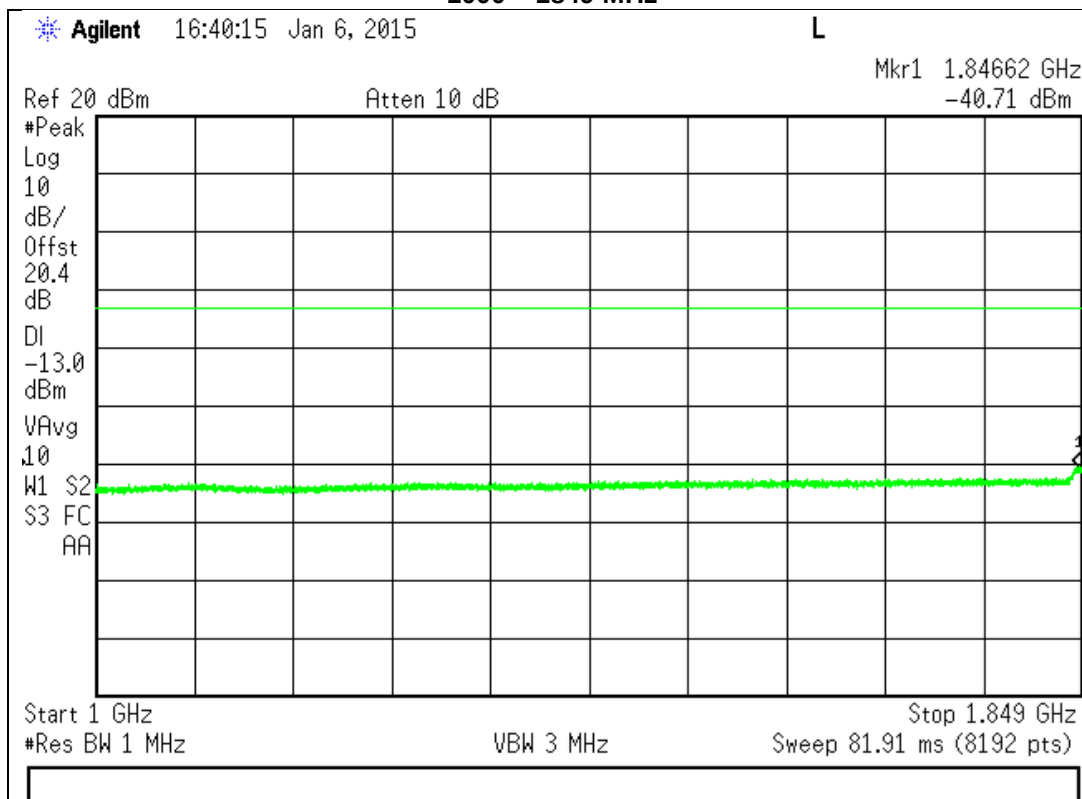




1850 - 1915 MHz Band (cont)
1916 - 8000 MHz

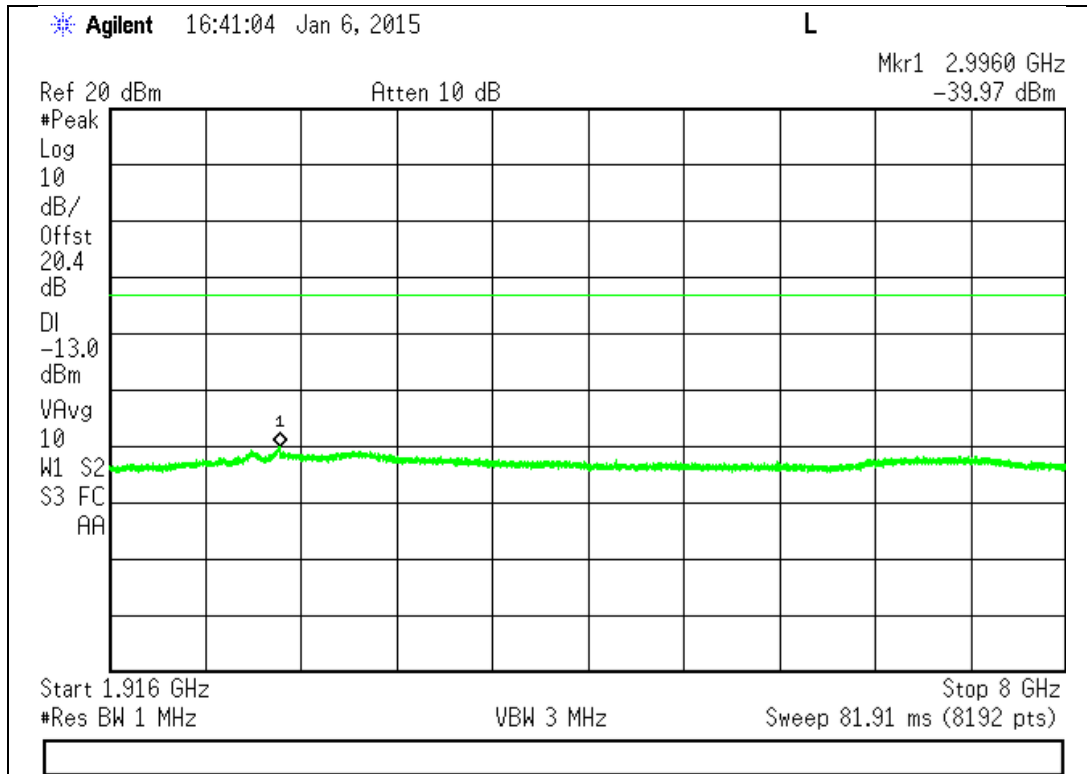


8000 - 16,000 MHz

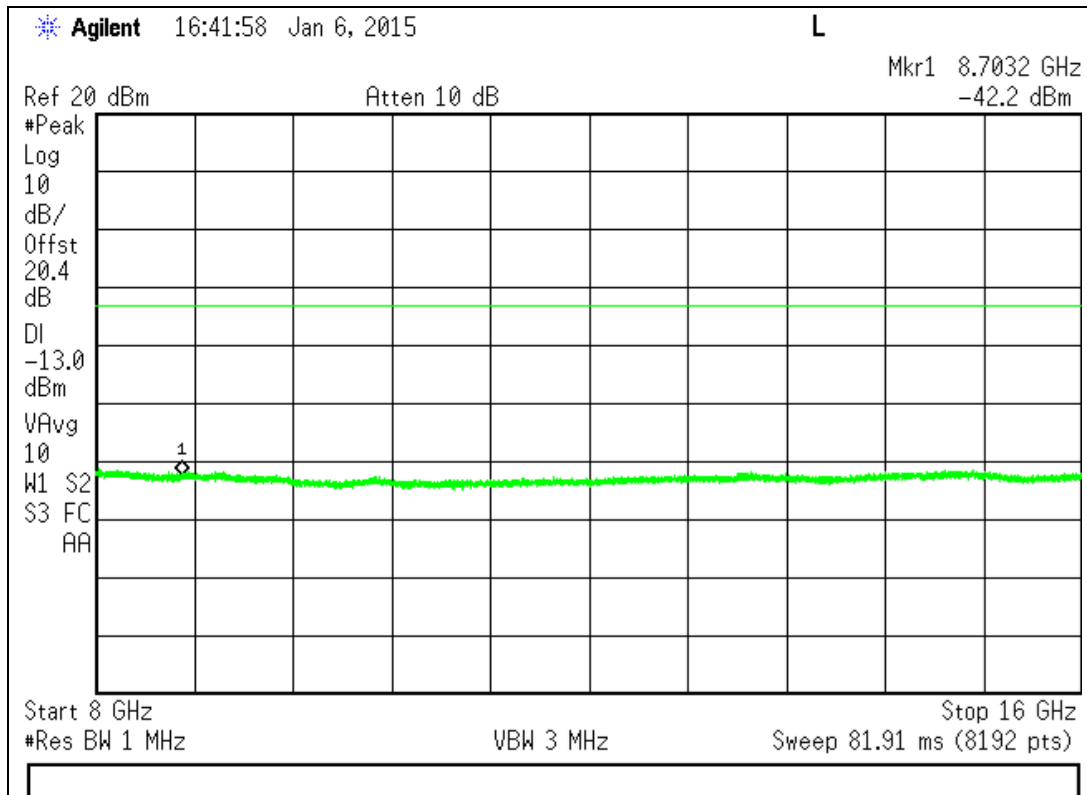



1850 - 1915 MHz Band (cont)
16,000 - 22,000 MHz

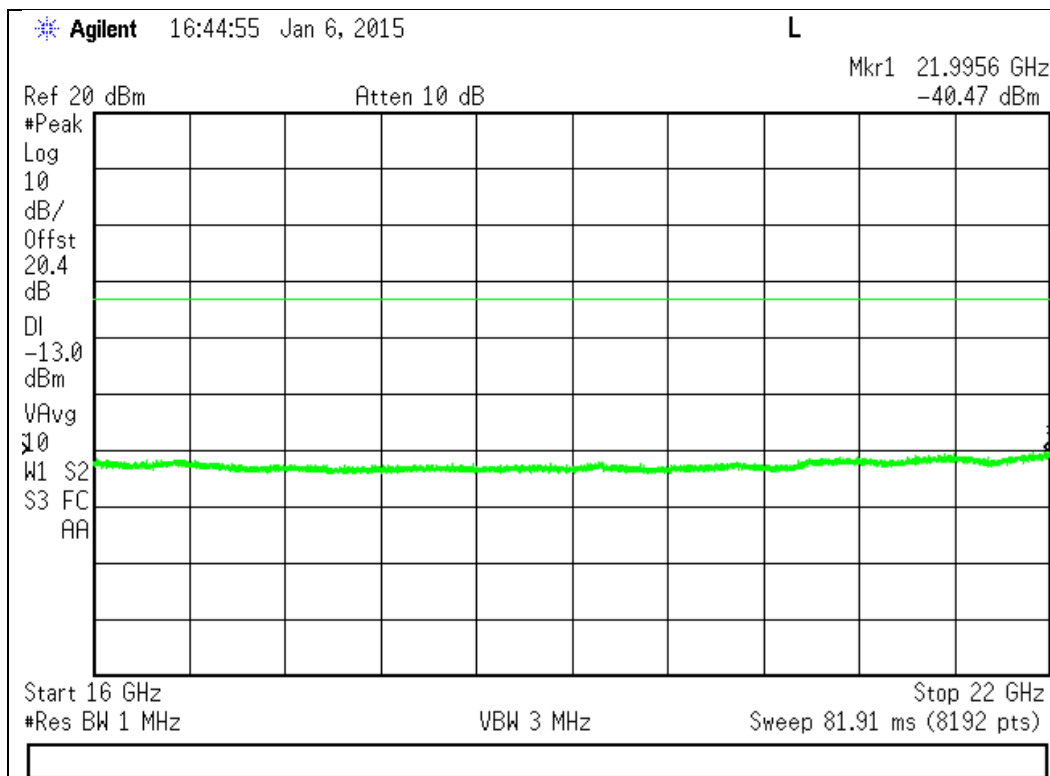





Downlink Test Plots

869 - 894 MHz Band

30 MHz – 868 MHz

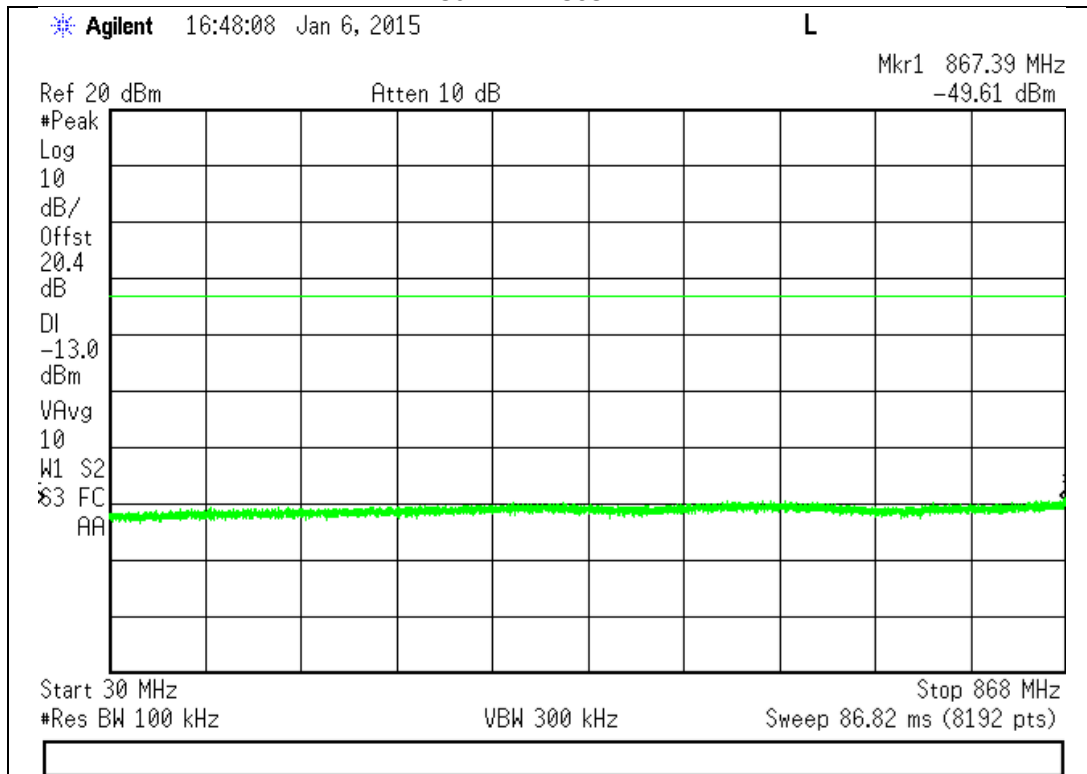


895 – 8940 MHz

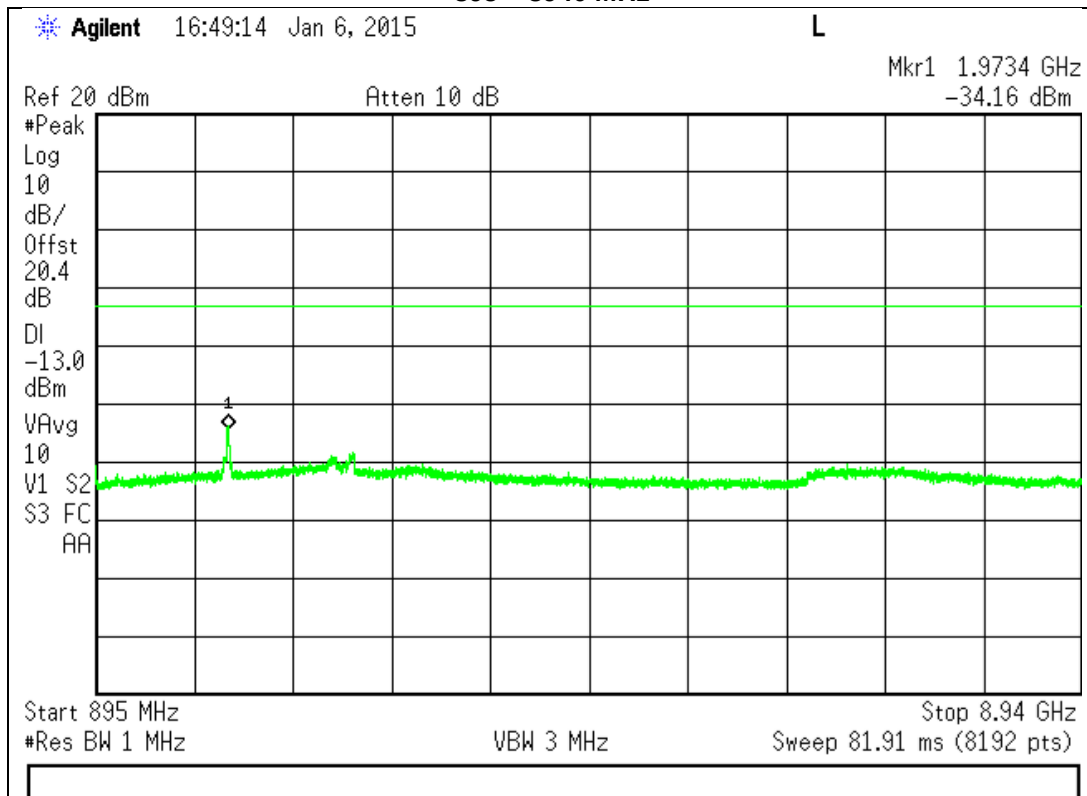




1930 - 1995 MHz Band

30 MHz – 1000 MHz

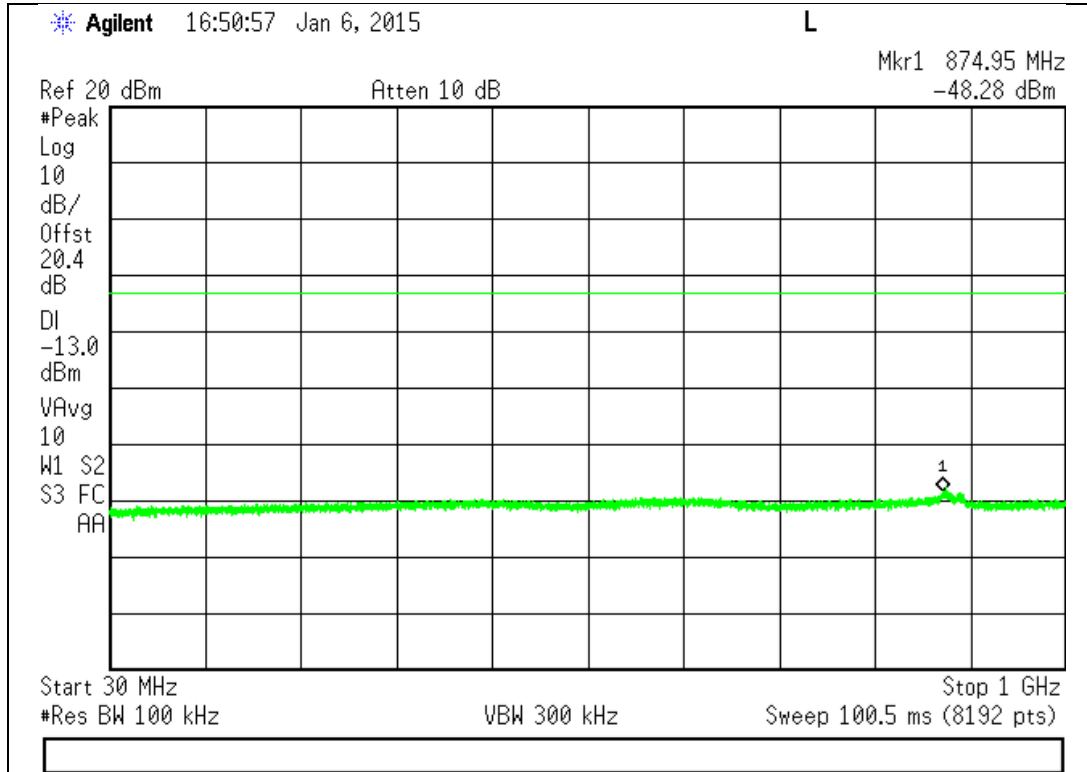


1000 – 1929 MHz

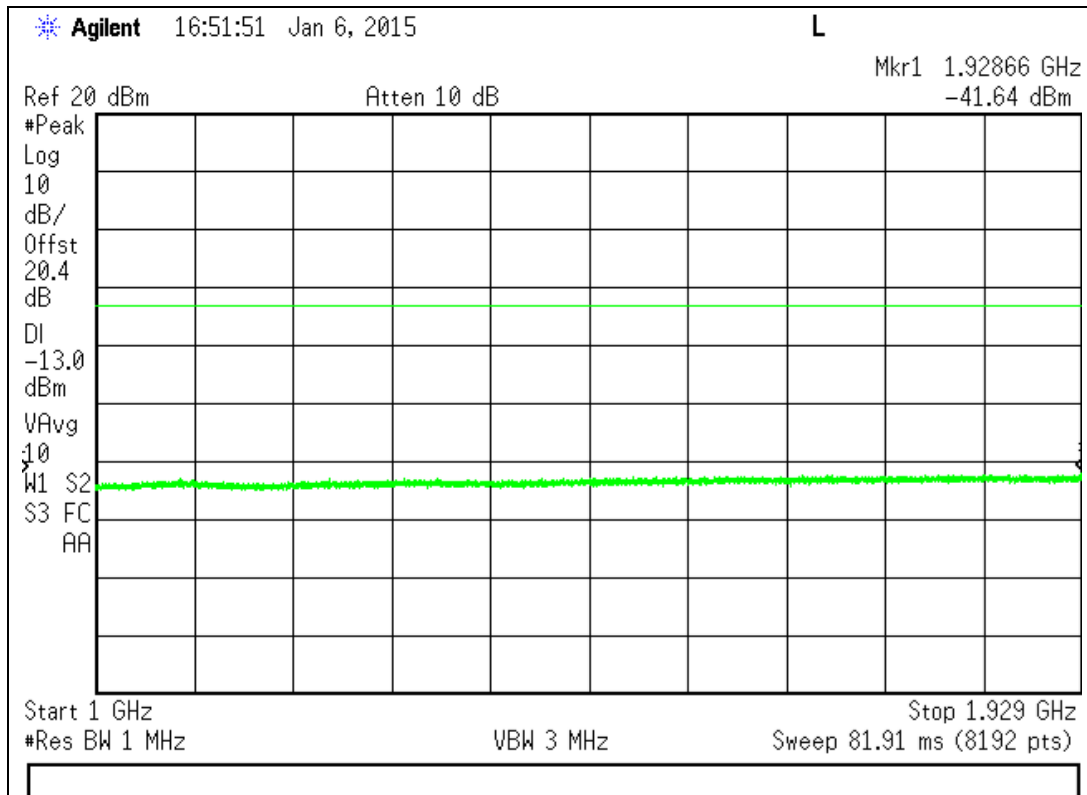




1930 - 1995 MHz Band (cont)

1996 – 8000 MHz

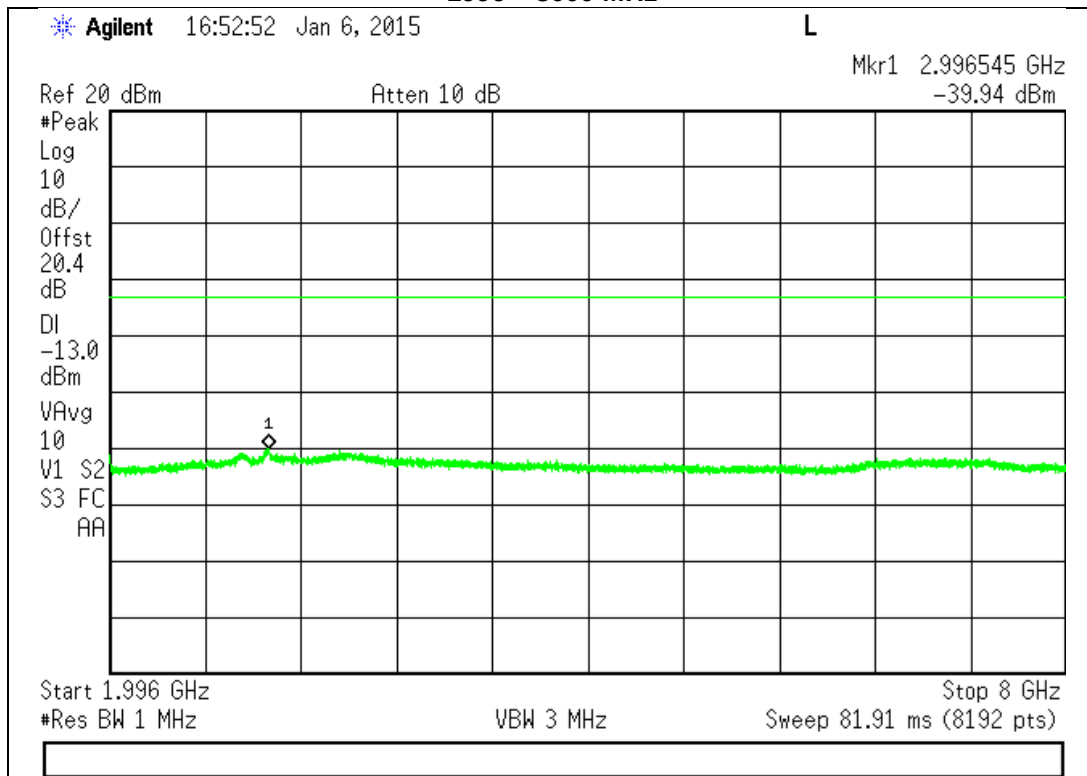


8000 – 16,000 MHz

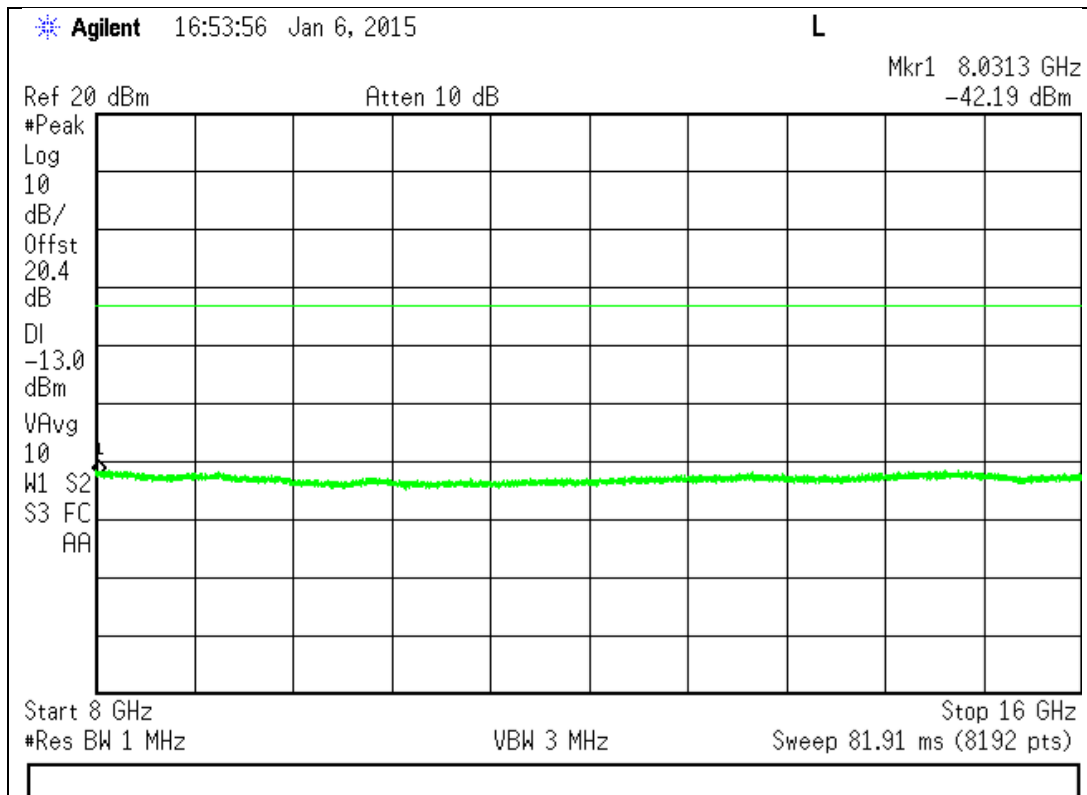



1930 - 1995 MHz Band (cont)

16,000 – 22,000 MHz

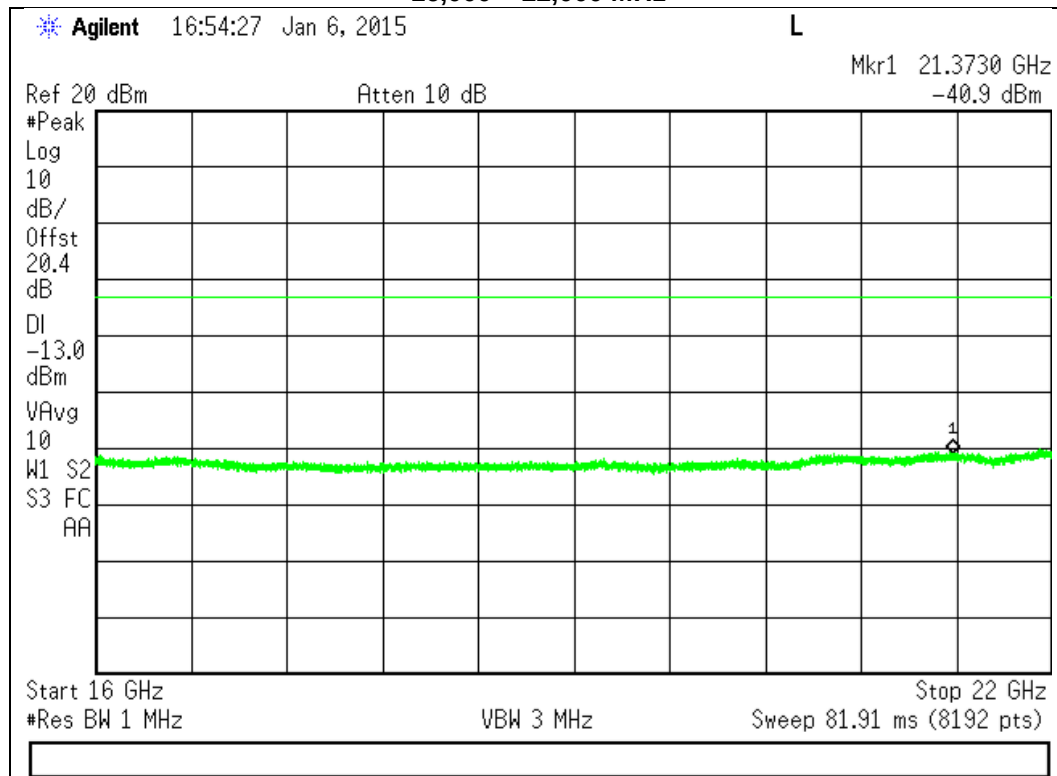



Noise Limits

Name of Test: Noise Limits
Test Equipment Utilized: i00379, i00405

Engineer: Mike Graffeo
Test Date: 1/6/15

Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as necessary to ensure that accurate readings were obtained. Two tests were performed: the maximum uplink and downlink noise. The detailed procedures from KDB 935210 D03 Wideband Consumer Signal Booster Measurement Guidance DR04-41516c were followed.

The following formulas are used for calculating the limits. Note – Downlink noise power limit is calculated with the center frequency of the associated uplink band.

Noise Power = $-102.5 + \text{LOG}_{10}(\text{Band Center Frequency}) * 20$

Variable Noise = $-103 \text{ dBm/MHz} - \text{RSSI}$

Test Setup

Uplink and Downlink Maximum Noise Power





Maximum Uplink Noise Test Results

Frequency Band (MHz)	Measured Noise (dBm)	Limit (dBm)	Margin (dB)	Result
824 - 849	-47.19	-44.05	-3.1	Pass
1850 – 1915	-38.97	-37.02	-2.0	Pass


Maximum Downlink Noise Test Results

Frequency Band (MHz)	Measured Noise (dBm)	Limit (dBm)	Margin (dB)	Result
869 - 894	-46.18	-44.1	-2.1	Pass
1930 – 1995	-39.88	-37.0	-2.9	Pass




Maximum Uplink Noise Test Plots

824 - 849 MHz Band

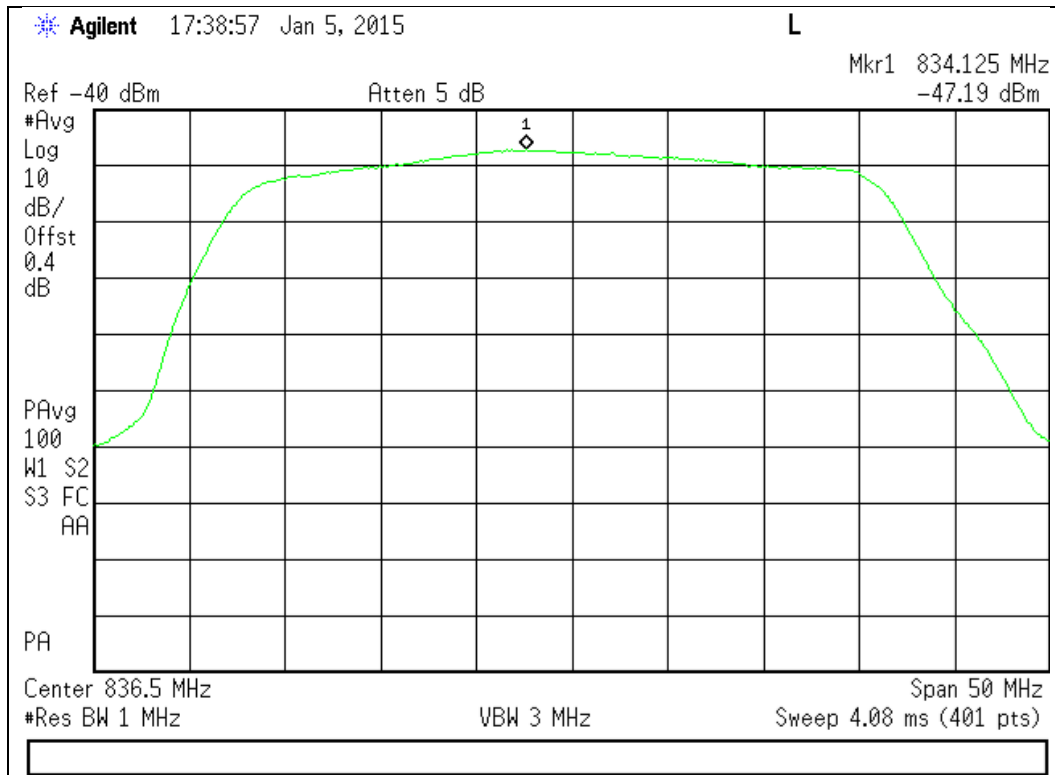


1850 - 1915 MHz Band

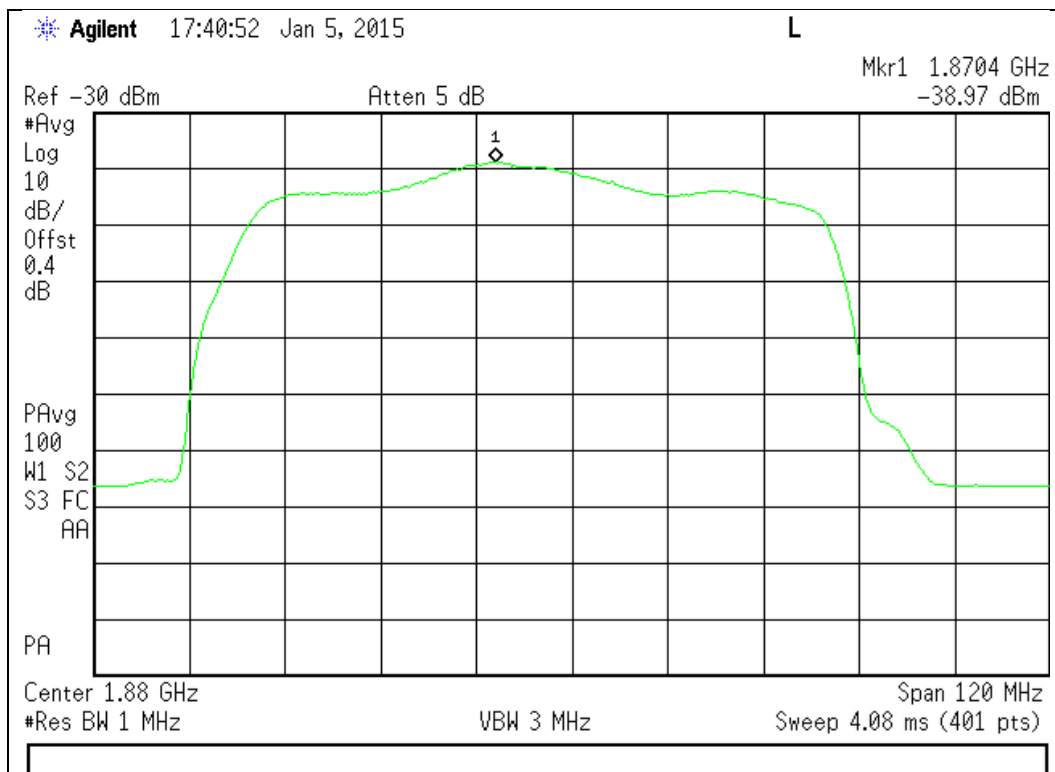




Maximum Downlink Noise Test Plots 869 – 894 MHz Band

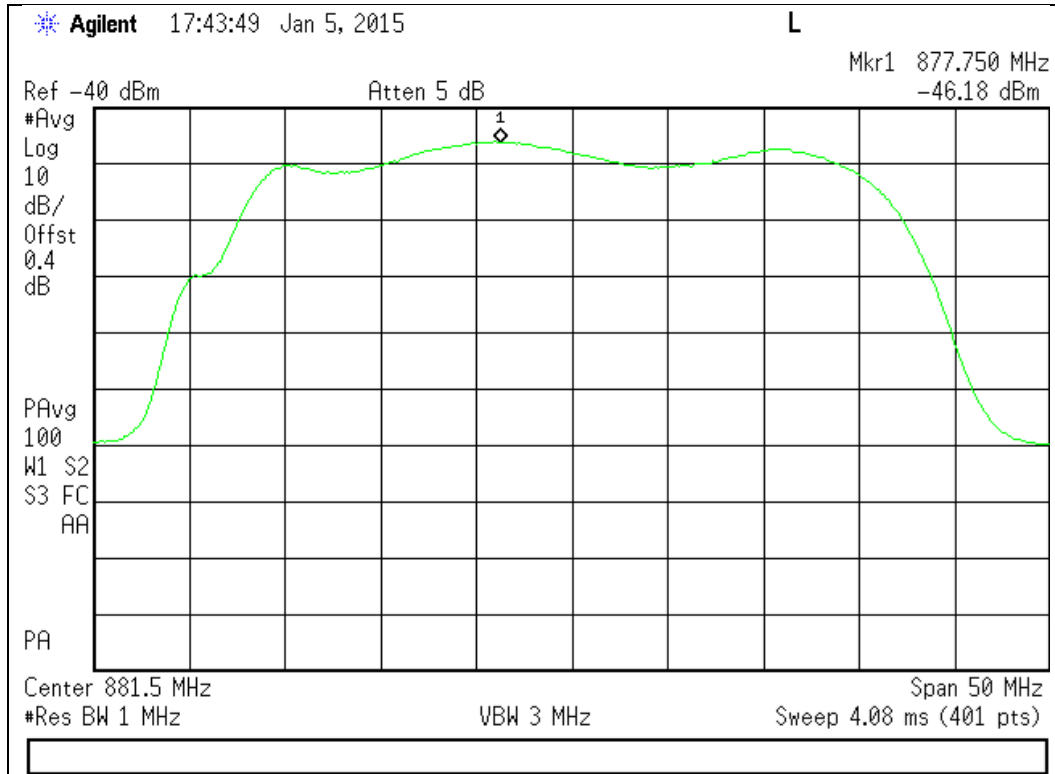

1930 - 1995 MHz Band

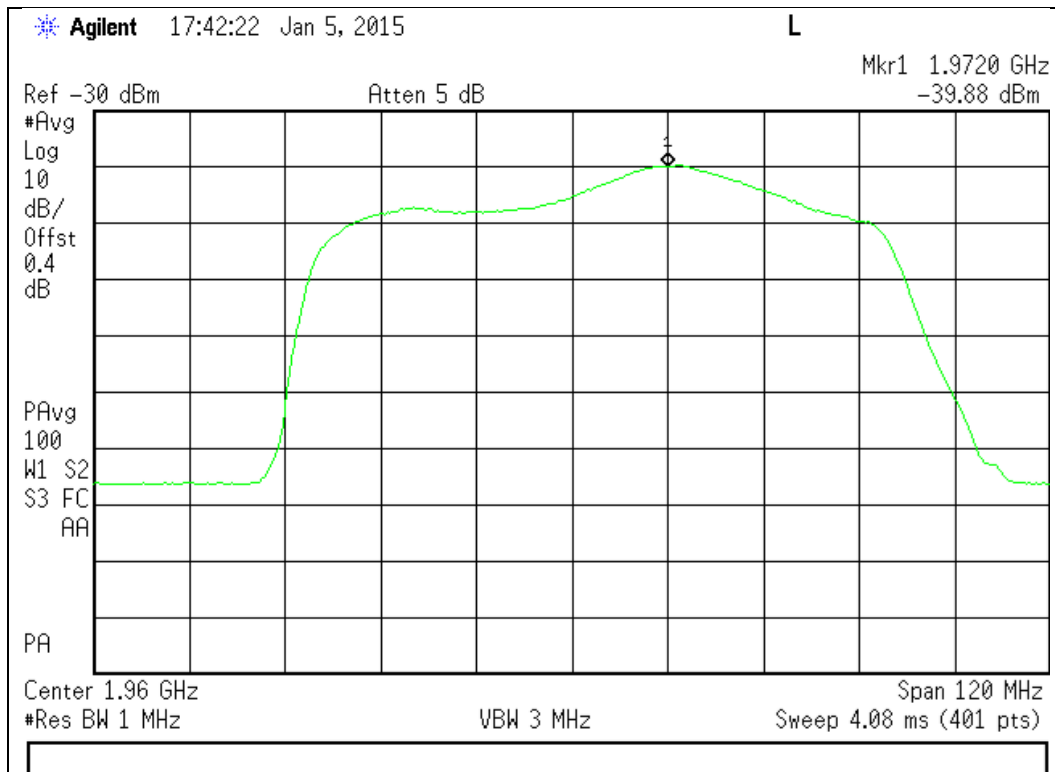



Variable Uplink Noise Limit Test Results

824 - 849 MHz

RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-71.0	-44.05	-46.7	-2.6
-70.0	-44.05	-46.7	-2.6
-69.0	-44.05	-46.7	-2.6
-68.0	-44.05	-46.7	-2.6
-42.0	-61.00	-62.8	-1.8
-41.0	-62.00	-63.8	-1.8


1850 - 1915 MHz

RSSI (dBm)	Noise Limit (dBm)	Measured Noise (dBm)	Margin (dB)
-71.0	-37.02	-38.4	-1.4
-70.0	-37.02	-38.4	-1.4
-69.0	-37.02	-38.4	-1.4
-68.0	-37.02	-38.4	-1.4
-44.0	-59.0	-59.3	-0.3
-43.0	-60.0	-60.3	-0.3




Uplink Noise Timing Test Plots

824 - 849 MHz Band

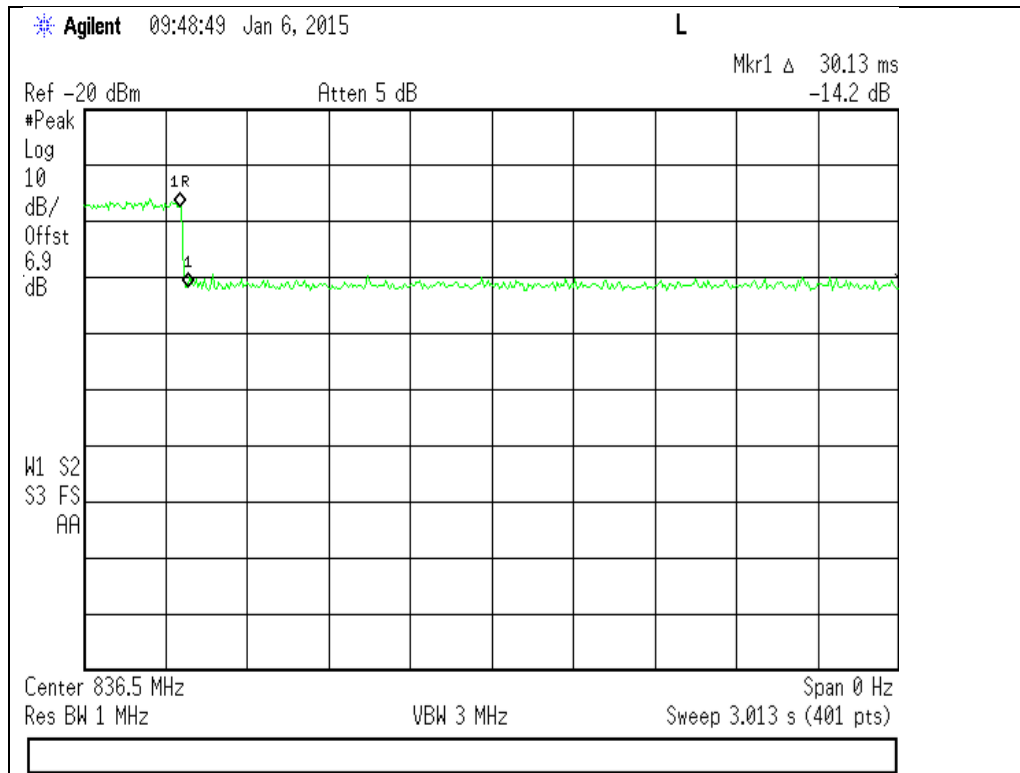

1850 - 1915 MHz Band

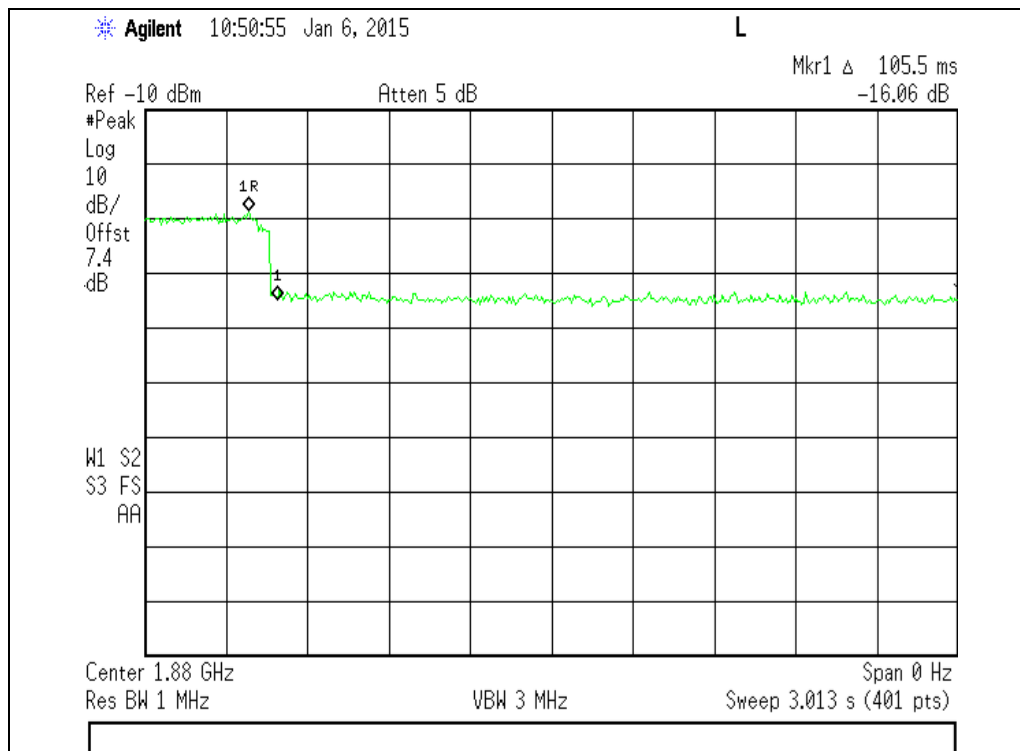



Variable Gain

Name of Test: Variable Gain
Test Equipment Utilized: i00379, i00405, i00412

Engineer: Mike Graffeo
Test Date: 1/6/15


Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor in order to ensure accurate readings were obtained. The uplink gain in the presence of a downlink signal was measured for each operational uplink band using the detailed procedures from KDB 935210 D03 Wideband Consumer Signal Booster Measurement Guidance DR04-41516.

The following formula is used for calculating the limits:

$$\text{Variable Gain} = -34 \text{ dB} - \text{RSSI} + \text{MSCL}$$

Test Setup

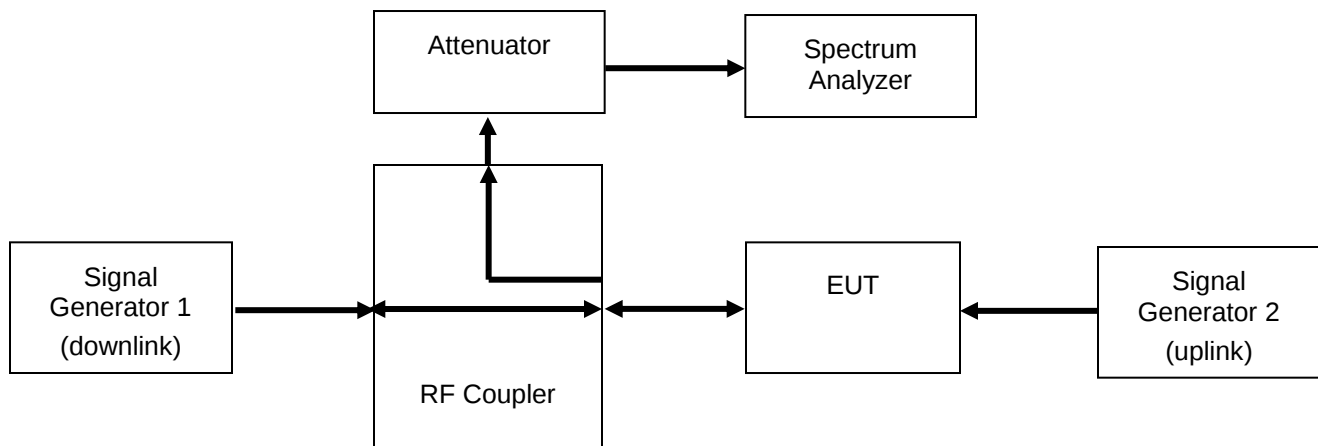



Uplink Test Results

824 - 849 MHz

RSSI (dBm)	MSCL (dB)	Gain Limit (dB)	P(in) (dBm)	P(out) (dBm)	Gain (dB)	Margin (dB)
-66.0	37.04	64.90	-45.3	15.6	60.9	-4.0
-65.0	37.04	64.90	-45.3	15.6	60.9	-4.0
-64.0	37.04	64.90	-45.3	15.6	60.9	-4.0
-63.0	37.04	64.90	-45.3	15.6	60.9	-4.0
-44.0	37.04	47.04	-45.3	1.0	46.3	-0.7
-43.0	37.04	46.04	-45.3	0.0	45.3	-0.7

1850 - 1915 MHz

RSSI (dBm)	MSCL (dB)	Gain Limit (dB)	P(in) (dBm)	P(out) (dBm)	Gain (dB)	Margin (dB)
-71.0	38.72	72.00	-53.4	14.8	68.2	-3.8
-70.0	38.72	72.00	-53.4	14.8	68.2	-3.8
-69.0	38.72	72.00	-53.4	14.8	68.2	-3.8
-68.0	38.72	72.00	-53.4	14.8	68.2	-3.8
-52.0	38.72	56.72	-53.4	1.9	55.3	-1.4
-51.0	38.72	55.72	-53.4	0.9	54.3	-1.4

Variable Uplink Gain Timing Test Results

Frequency Band (MHz)	Measured Timing (ms)	Limit (ms)	Result
824 - 849	131.80	3000	Pass
1850 - 1915	31.00	3000	Pass




Variable Uplink Gain Timing

824 - 849 MHz

Agilent 14:33:19 Jan 6, 2015


L

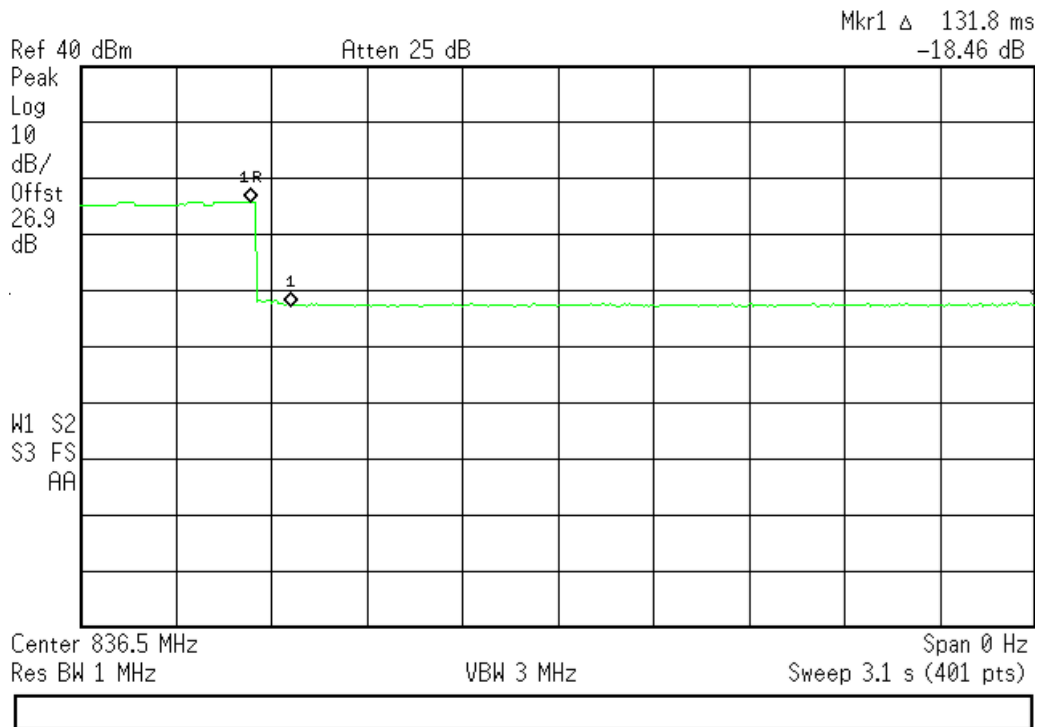

1850 - 1915 MHz

Agilent 14:29:49 Jan 6, 2015

L

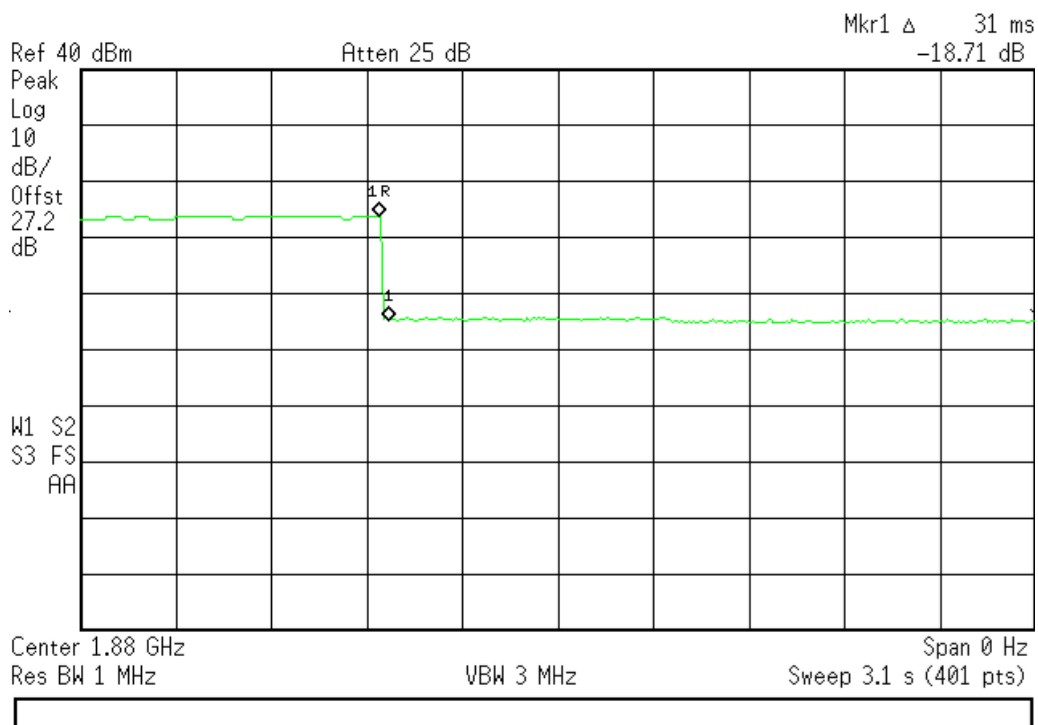



Occupied Bandwidth


Name of Test: Occupied Bandwidth
Test Equipment Utilized: i00379, i00405

Engineer: Mike Graffeo
Test Date: 1/6/15

Test Procedure

The EUT was connected to a spectrum analyzer through an attenuator with the losses being input into the spectrum analyzer as a combination of reference level offset and correction factor as required to ensure that accurate readings were obtained. A signal generator was utilized to produce the following signals: GSM, CDMA, and WCDMA. The signal generator was tuned to the center channel of each of the EUT operational uplink and downlink bands with the RF level set at a point just prior to the AGC being in control of the power. For each modulation type, the input and output signal was measured and plotted to ensure that the signals were similar.

Test Setup







GSM Uplink Test Plots

824 - 849 MHz Band

Input

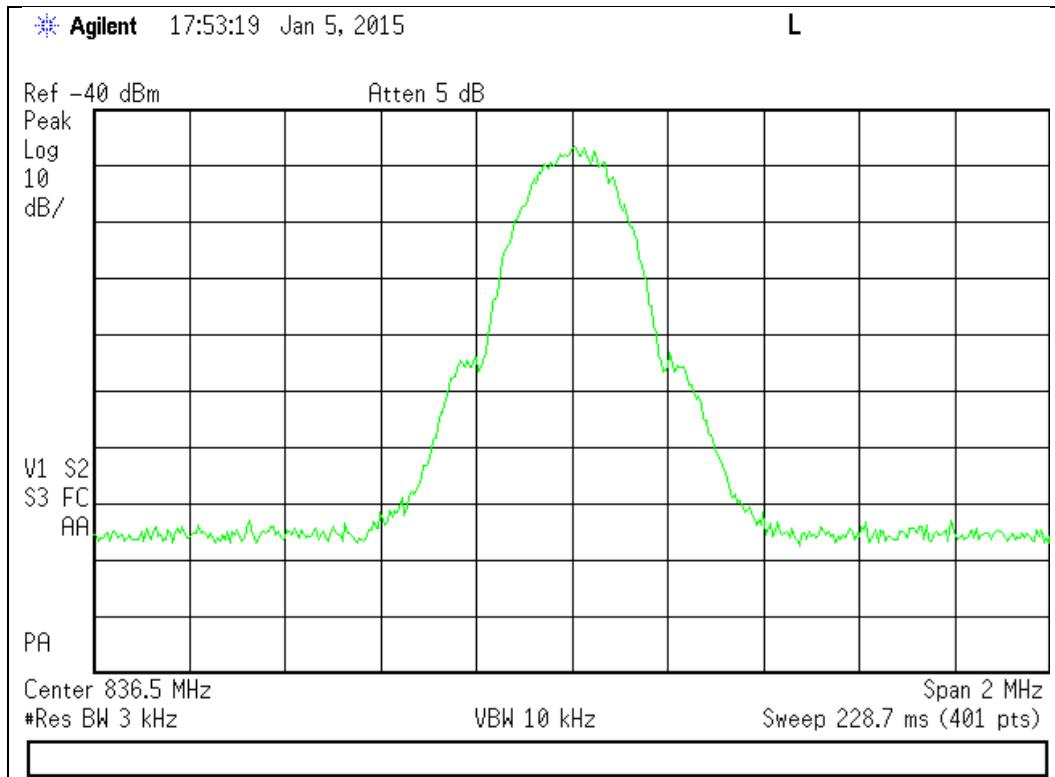


Output

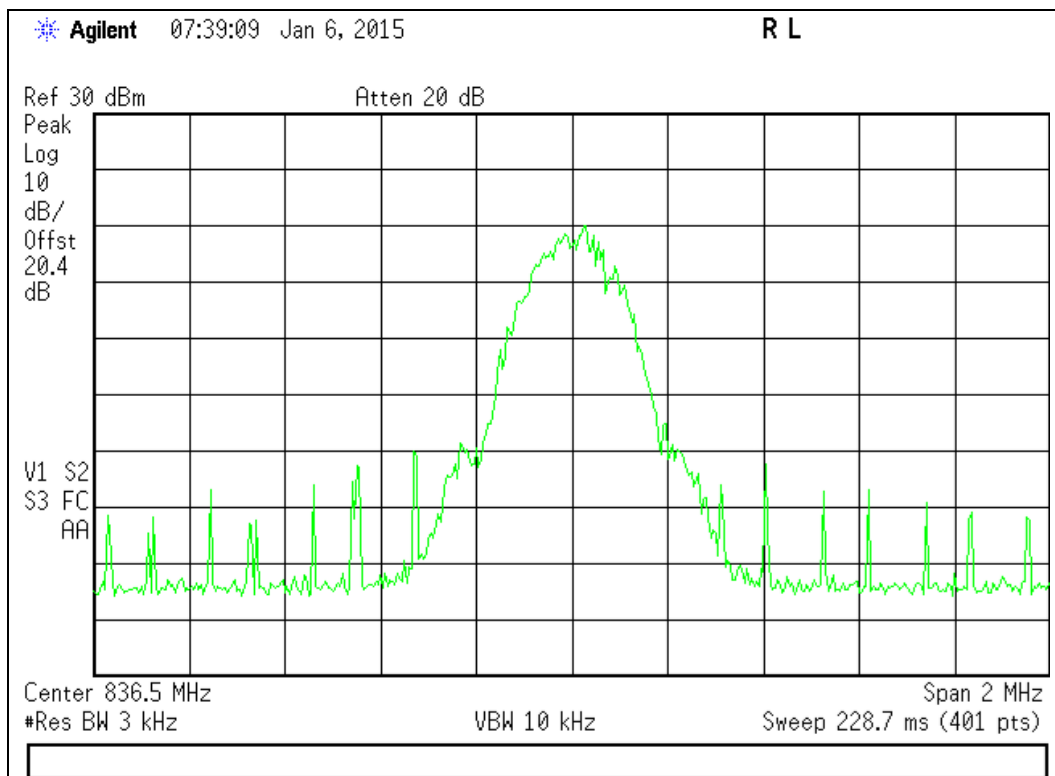




1850 - 1915 MHz Band

Input

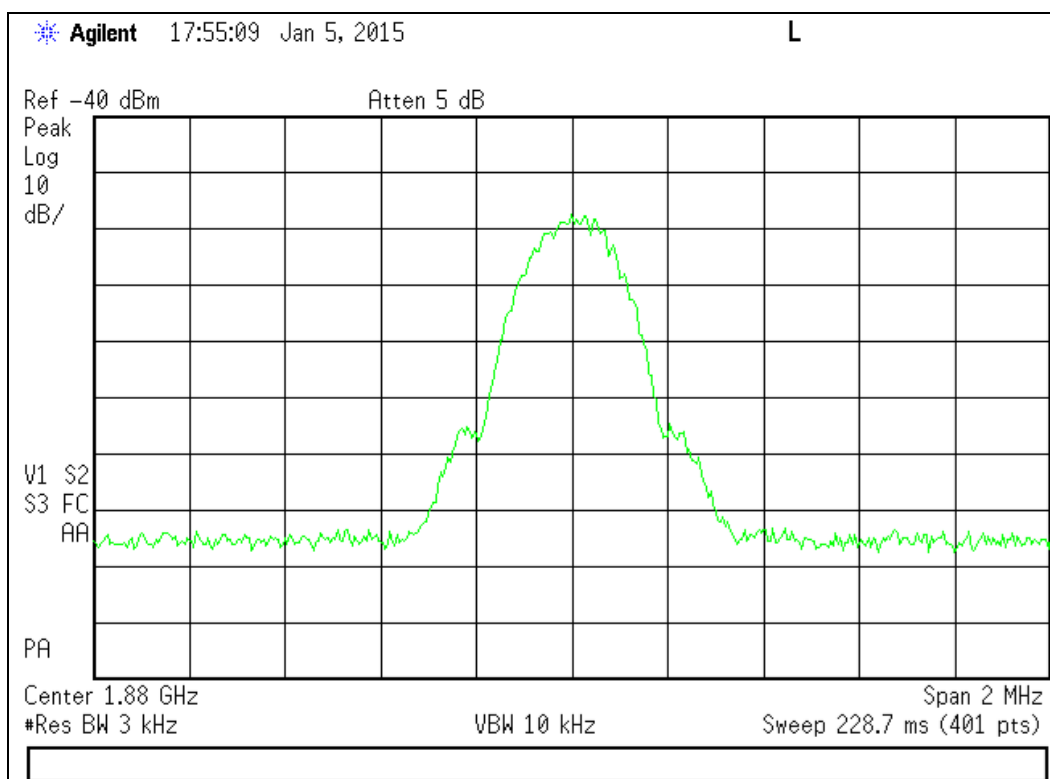

Output

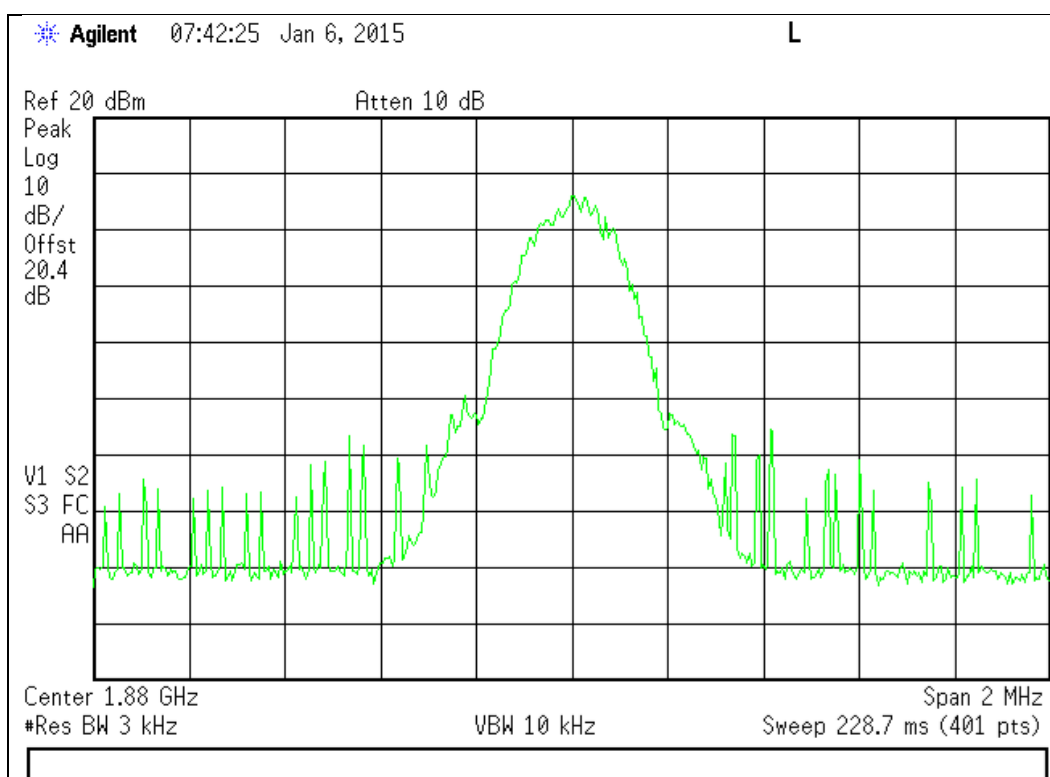





GSM Downlink Test Plots

869 - 894 MHz Band

Input

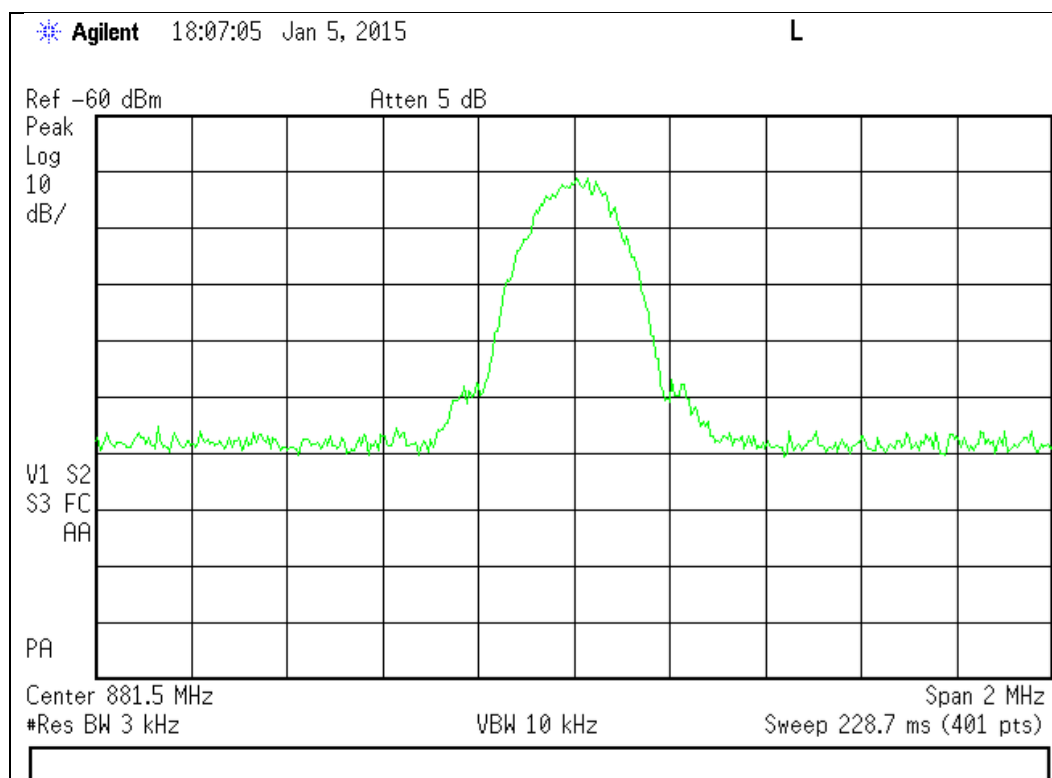


Output

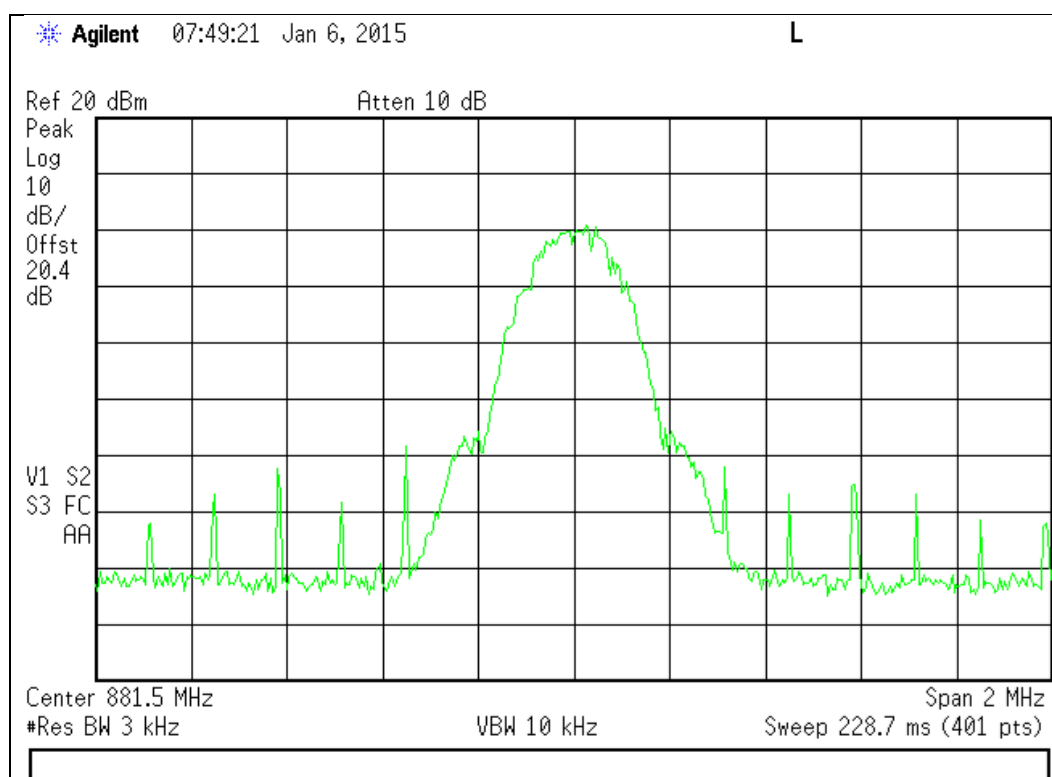




1930 - 1995 MHz Band

Input

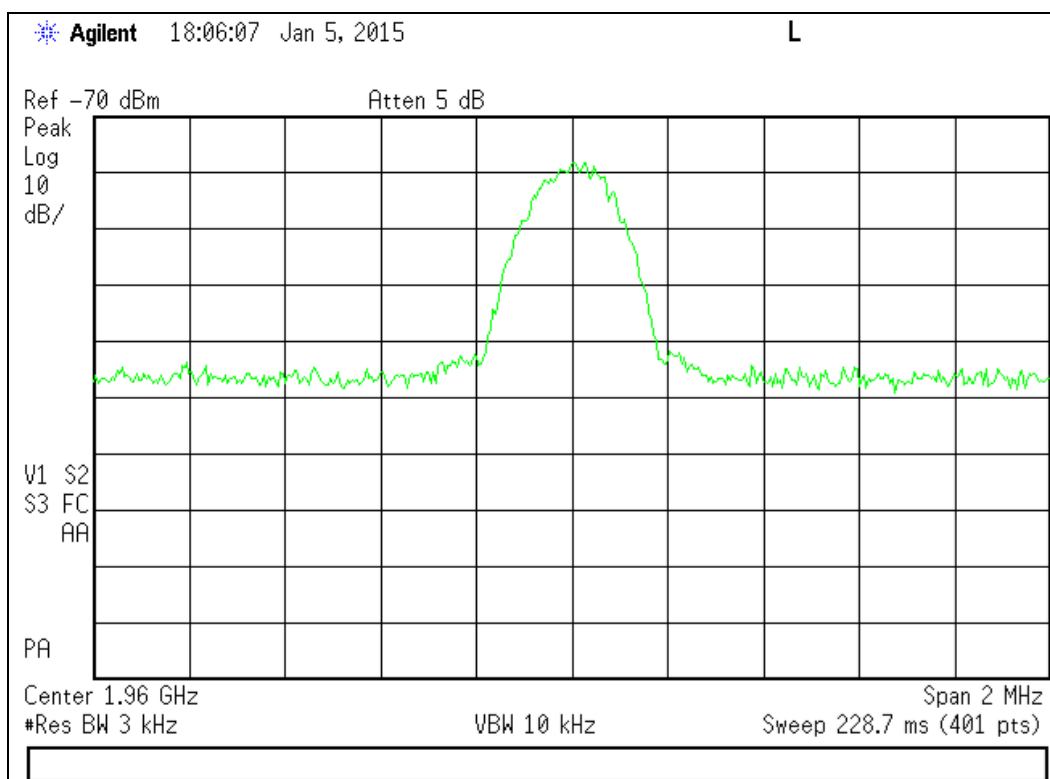

Output

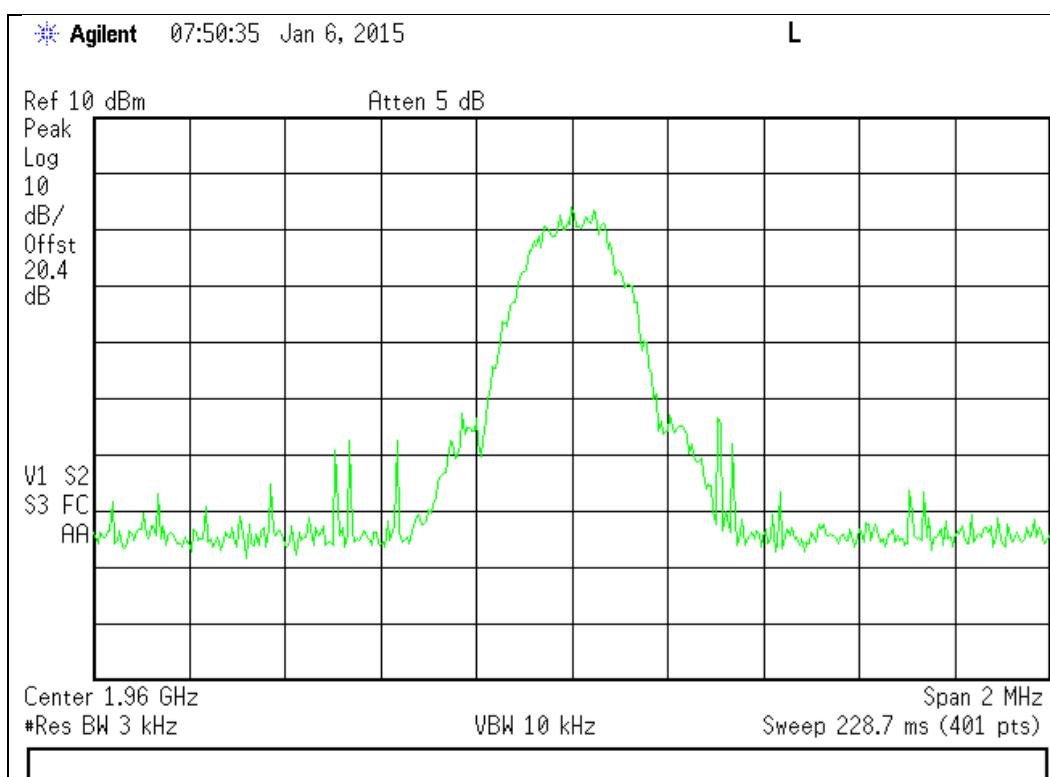





CDMA Uplink Test Plots

824-849 MHz Band

Input

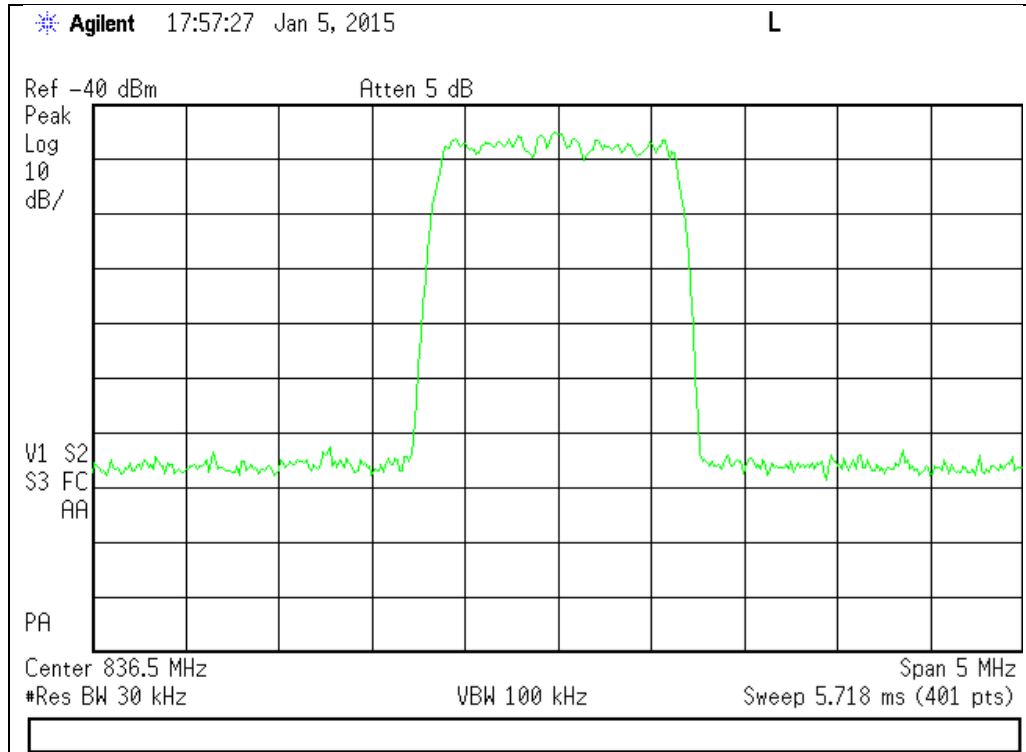


Output

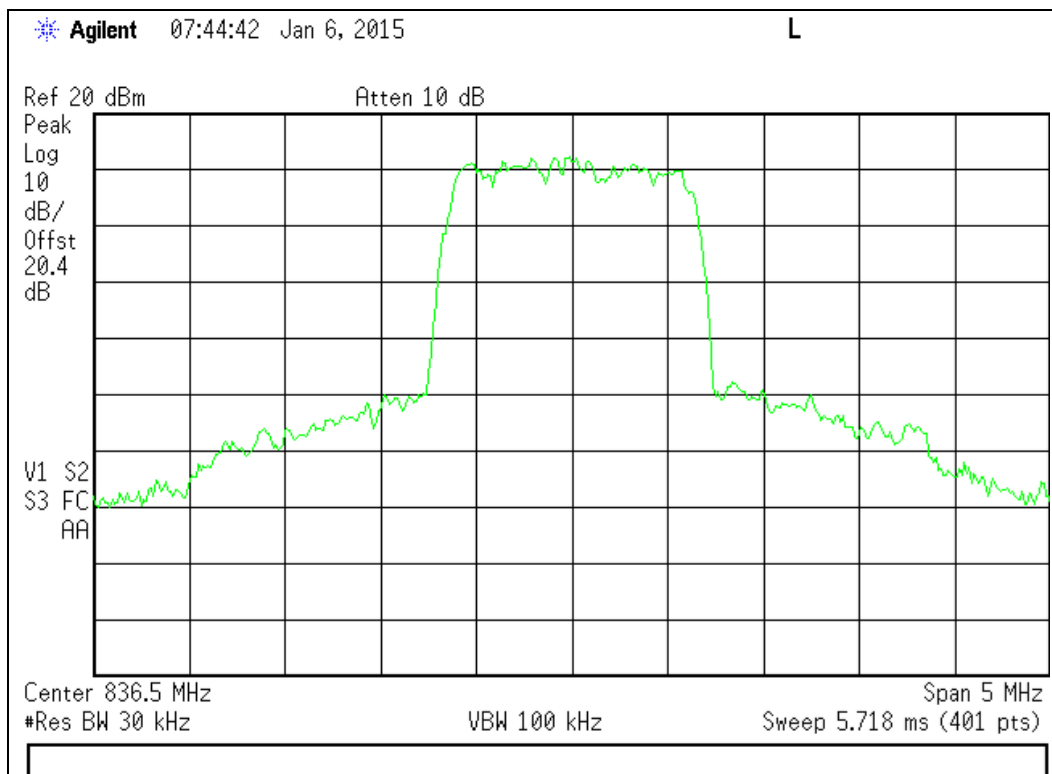




1850 - 1915 MHz Band

Input

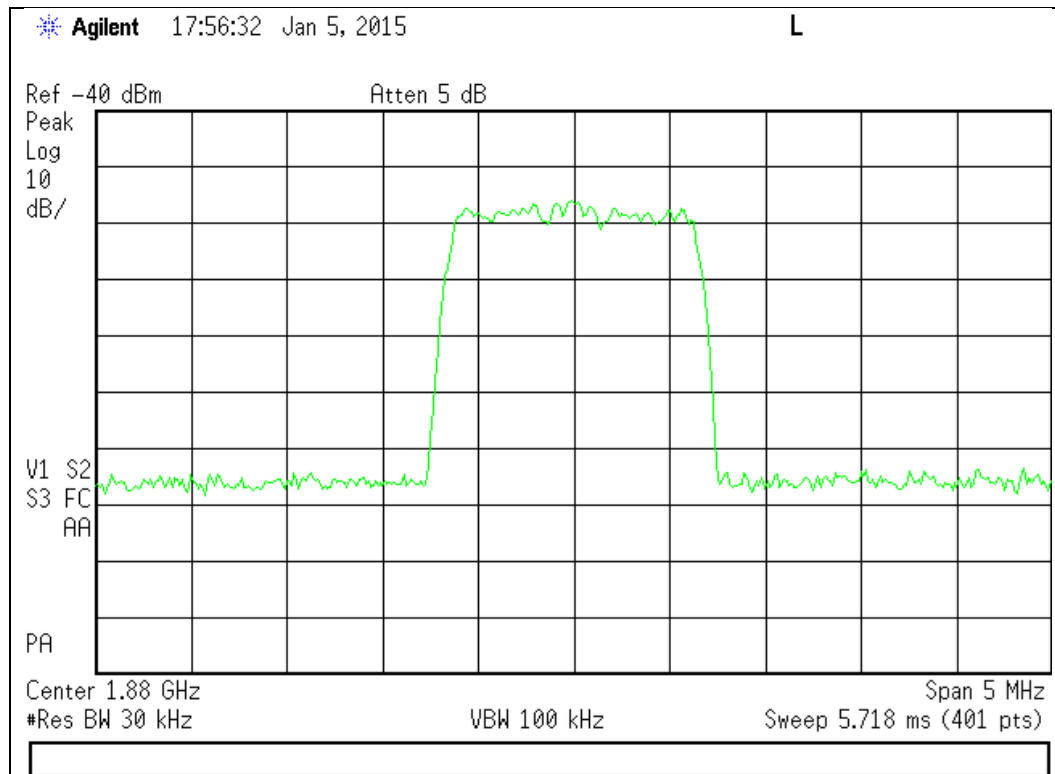

Output

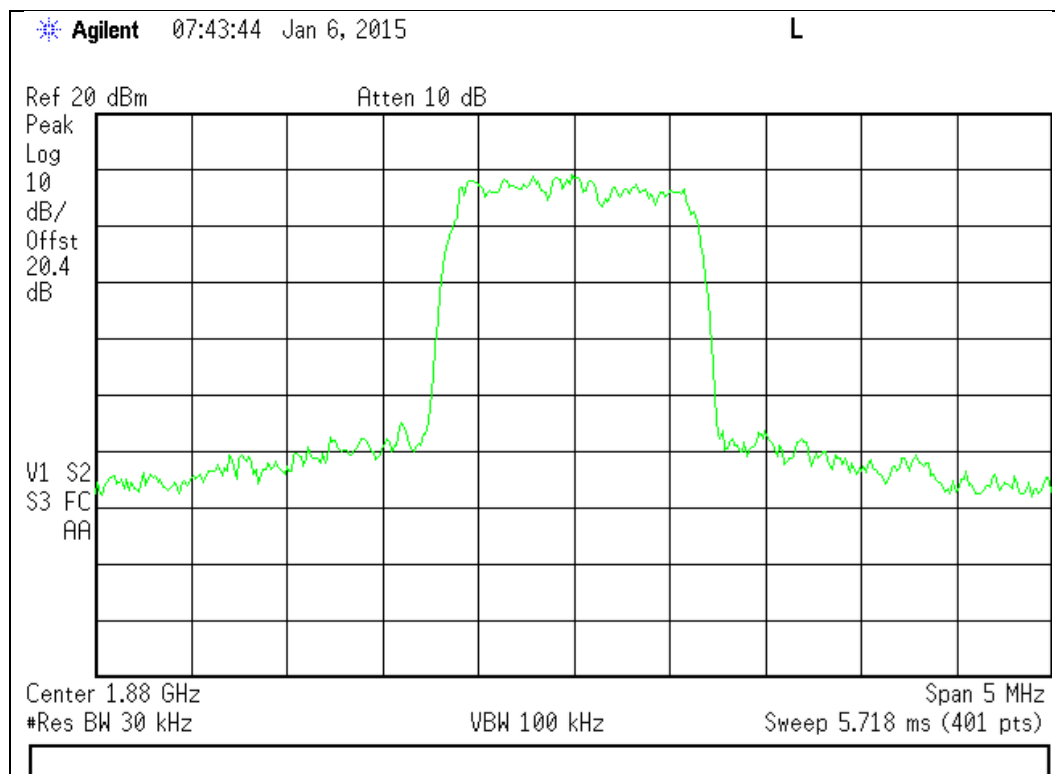





CDMA Downlink Test Plots

869 - 894 MHz Band

Input

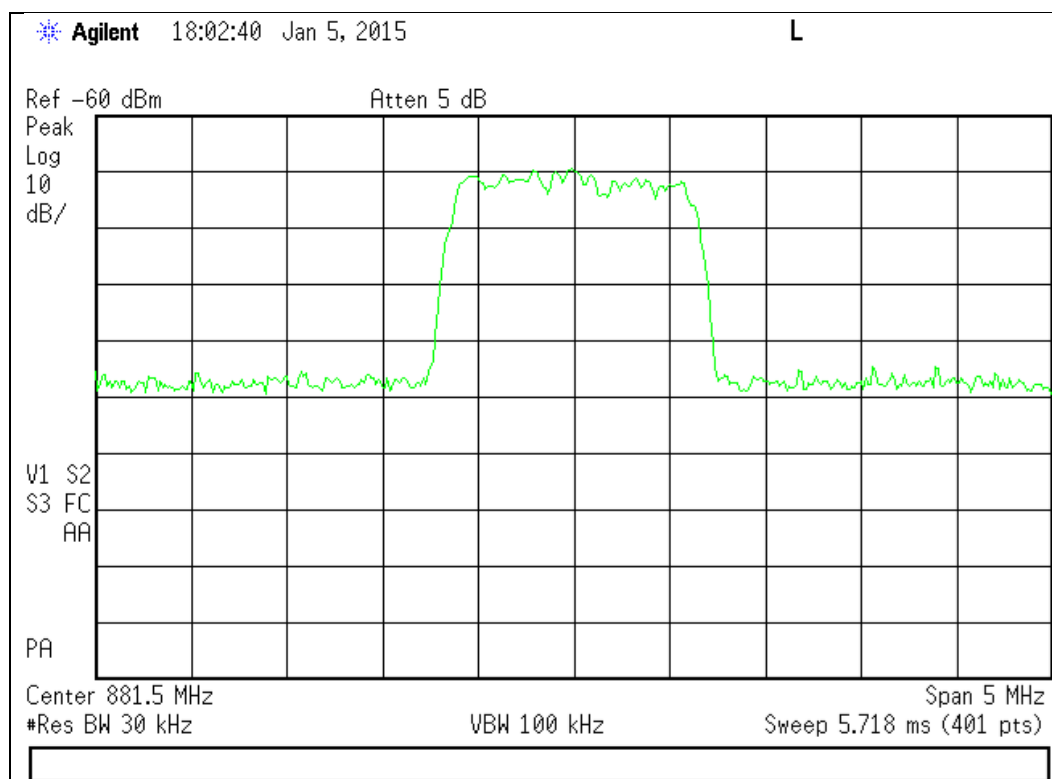


Output

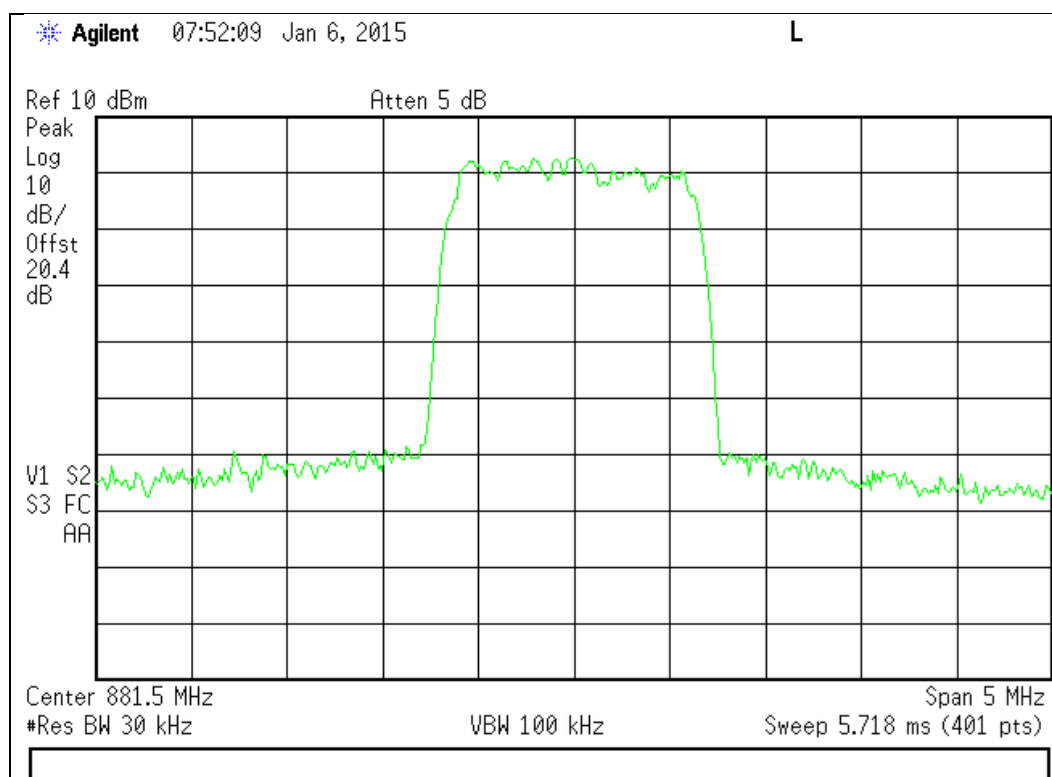




1930 - 1995 MHz Band

Input

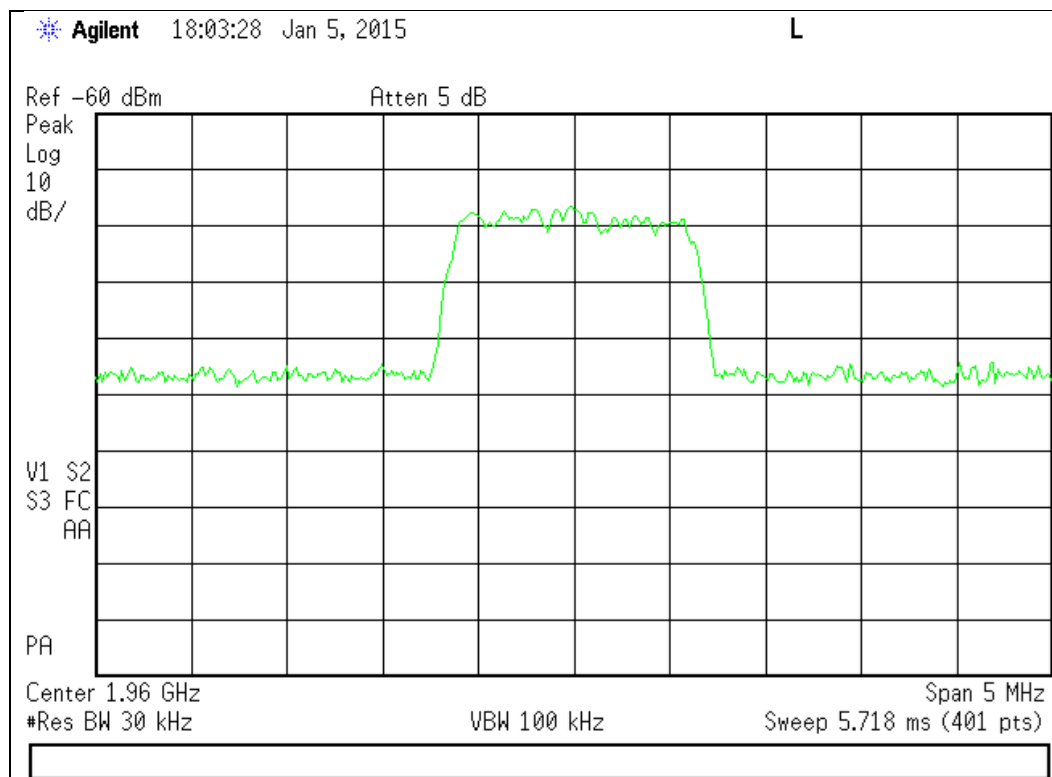

Output

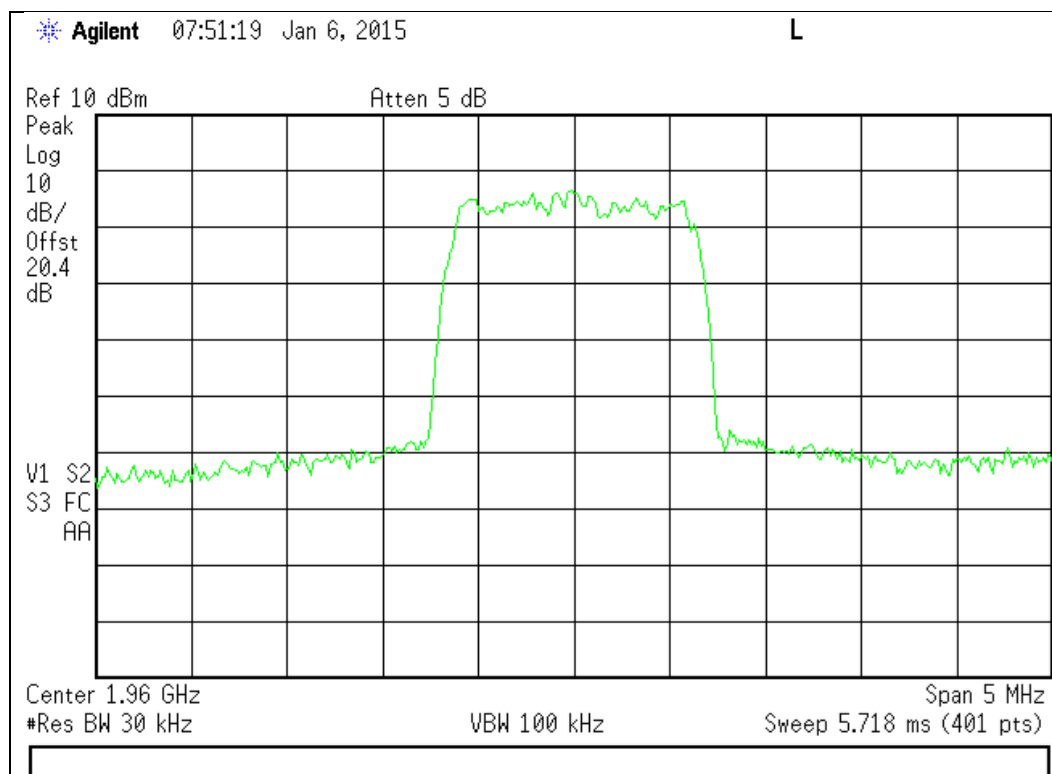





WCDMA Uplink Test Plots

824 – 849 MHz Band

Input

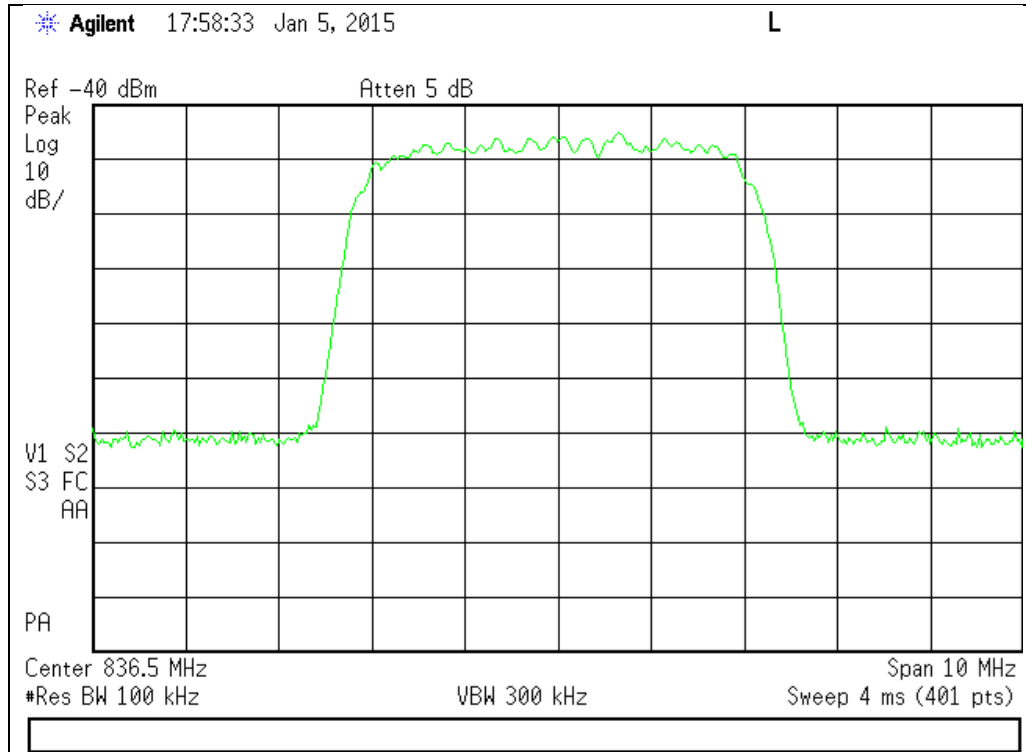


Output

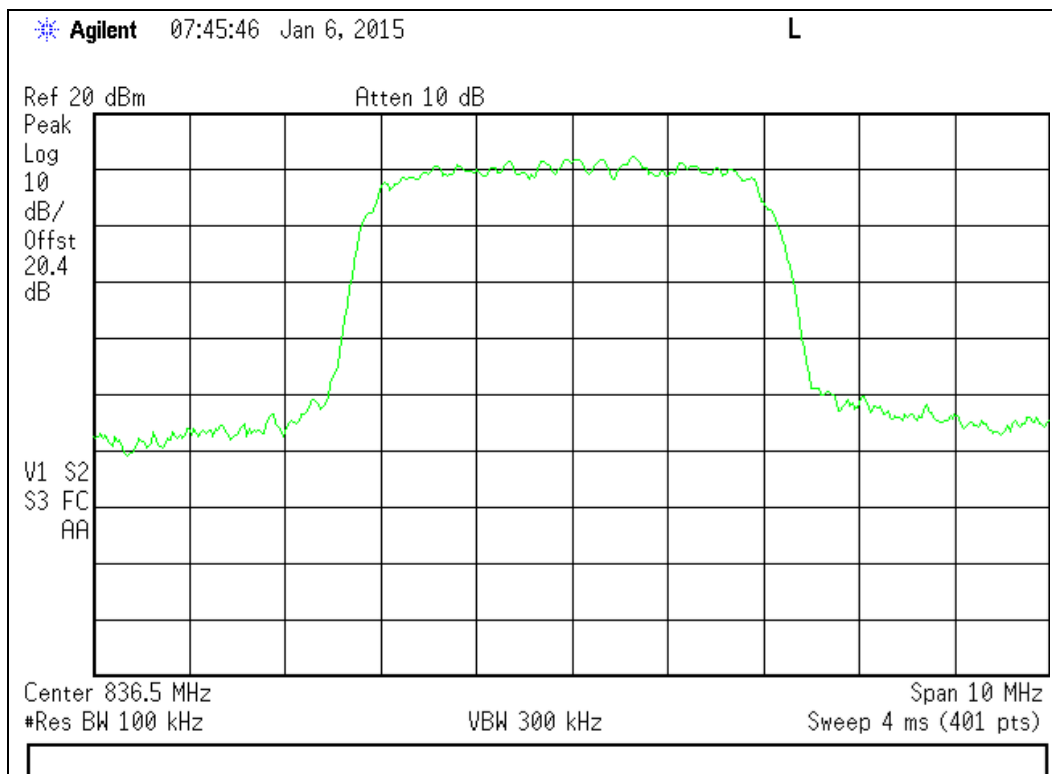




1850 - 1915 MHz Band

Input

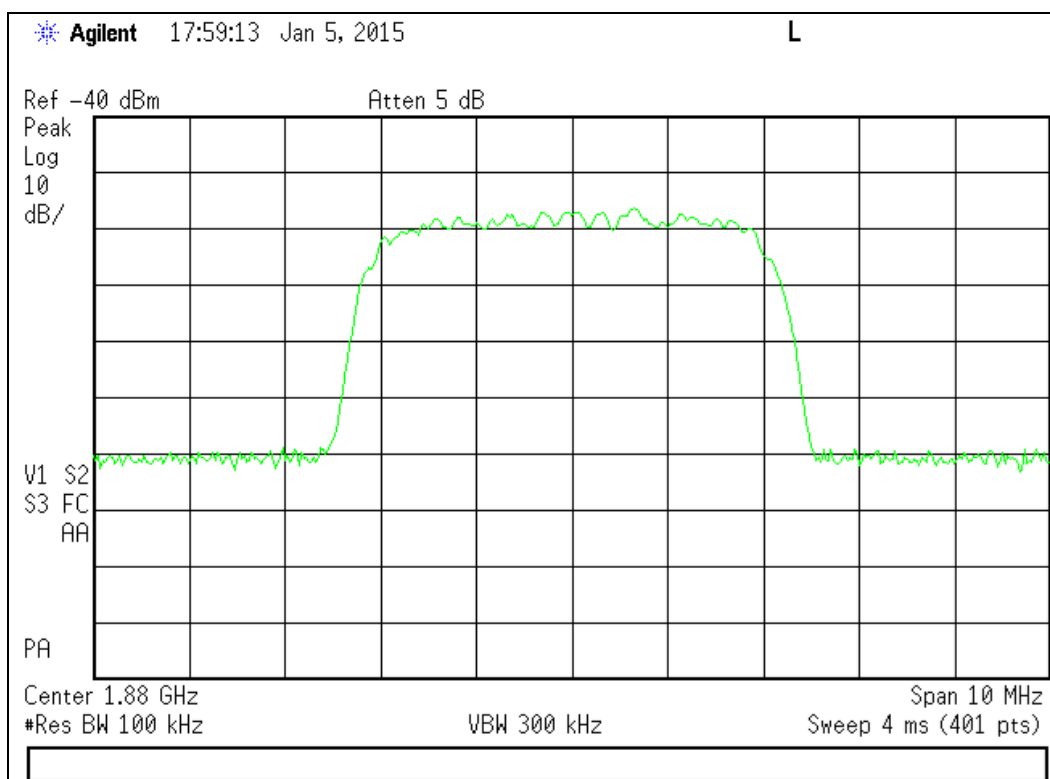

Output

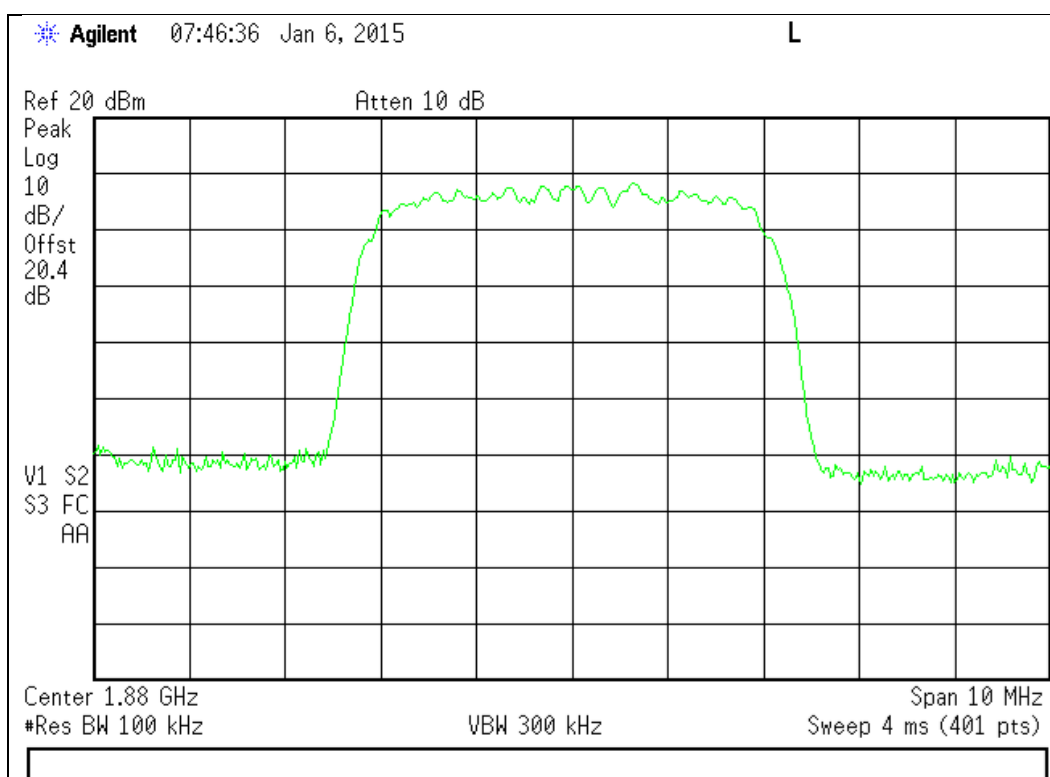





WCDMA Downlink Test Plots

869 - 894 MHz Band

Input

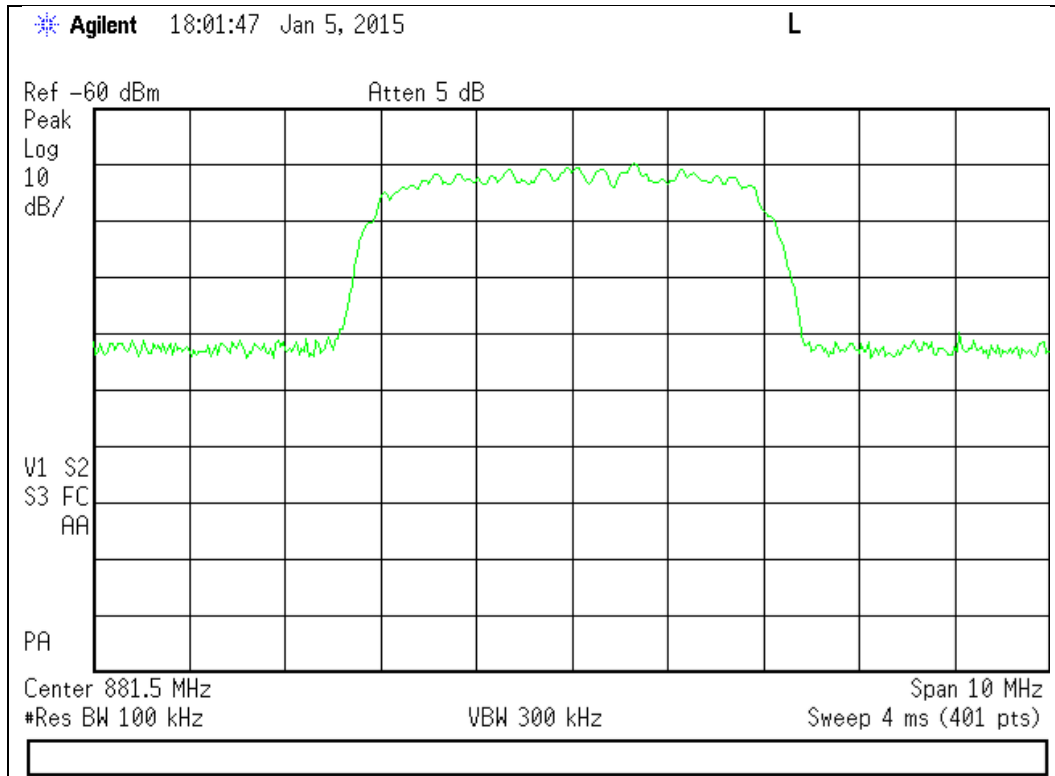


Output

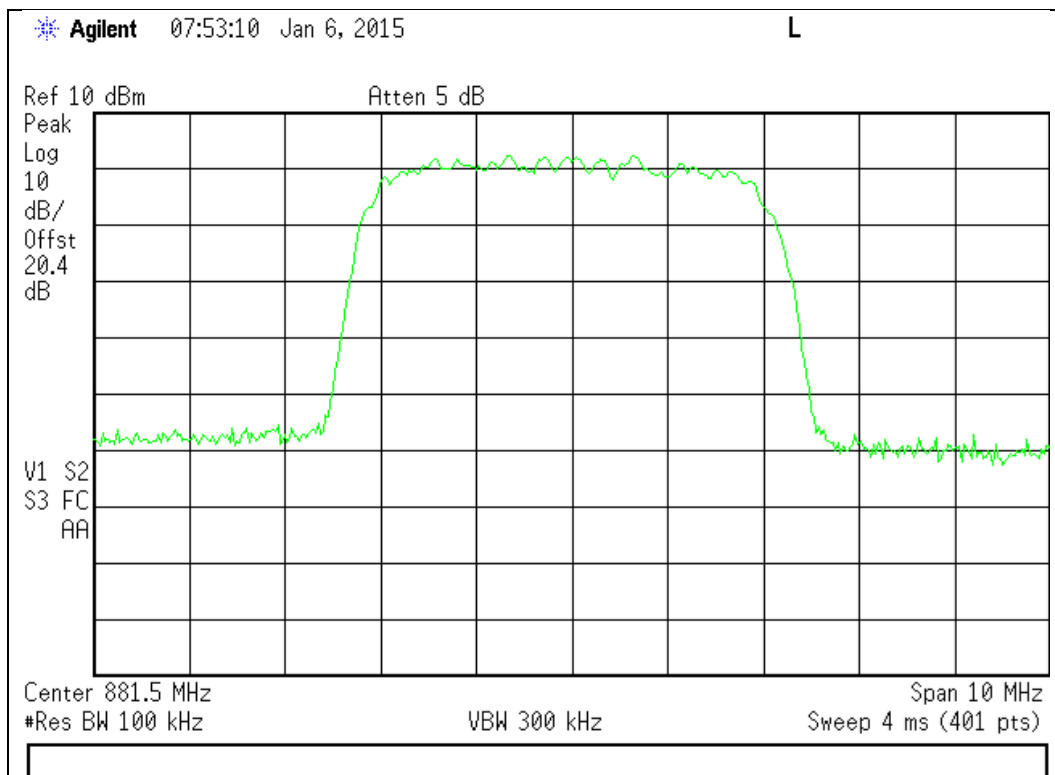




1930 - 1995 MHz Band

Input

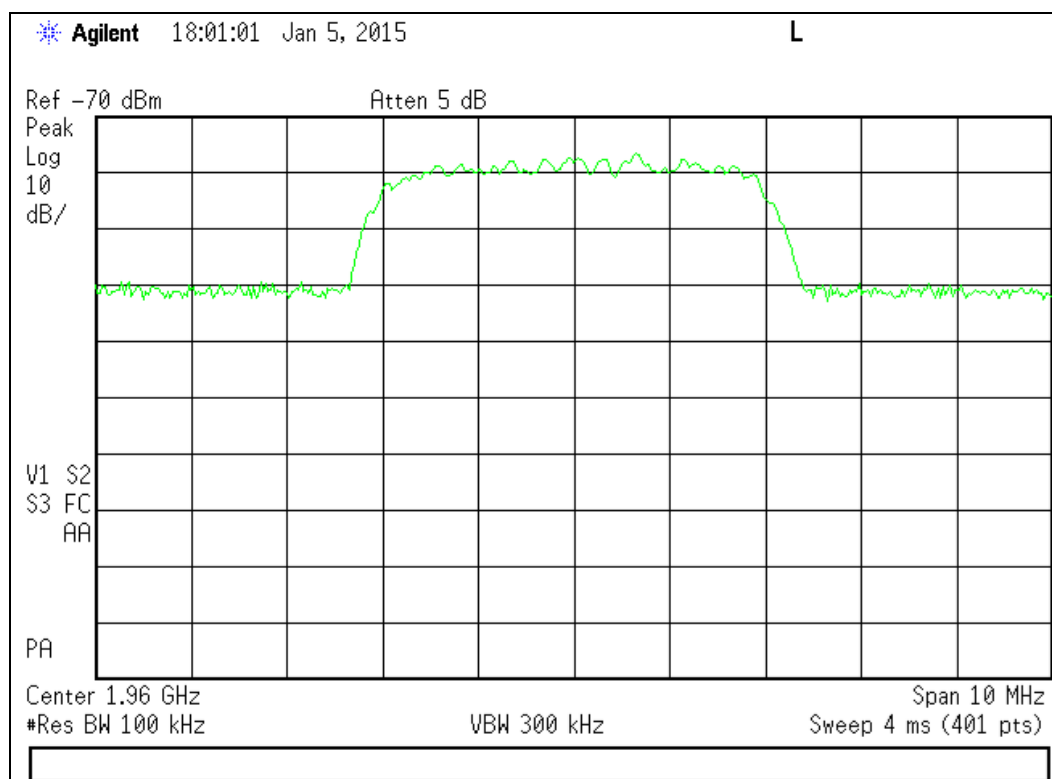

Output

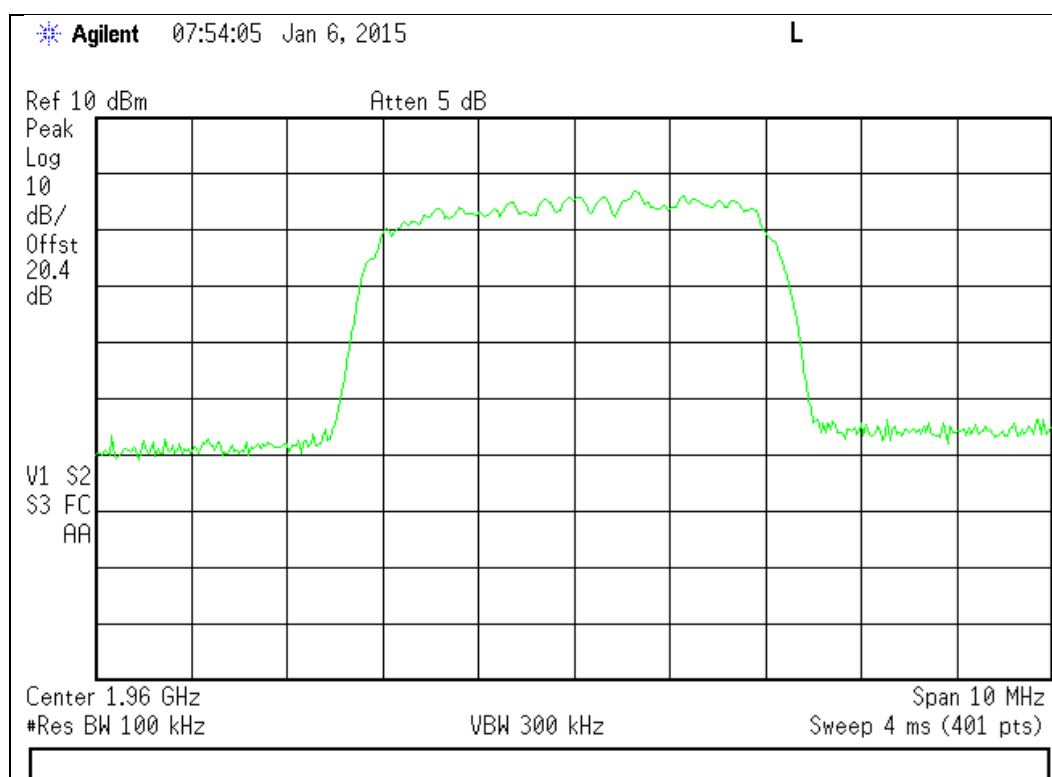



Oscillation Detection


Name of Test: Oscillation Detection
Test Equipment Utilized: i00379, i00405, i00412

Engineer: Mike Graffeo
Test Date: 1/6/15

Test Procedure

The EUT was connected to a spectrum analyzer set for 0 Hz operation. The EUT uplink and downlink were fed back upon each other through a selectable band pass filter and variable attenuator. The EUT uplink and downlink were tested to ensure that the presence of oscillation was detected and that the EUT output turned off within 300 mS for the Uplink and 1 second for the Downlink and remained off for 1 minute. A EUT with test software was utilized to ensure that the EUT only had a maximum of 5 attempts at restart from oscillation before permanently shutting off.

Test Setup

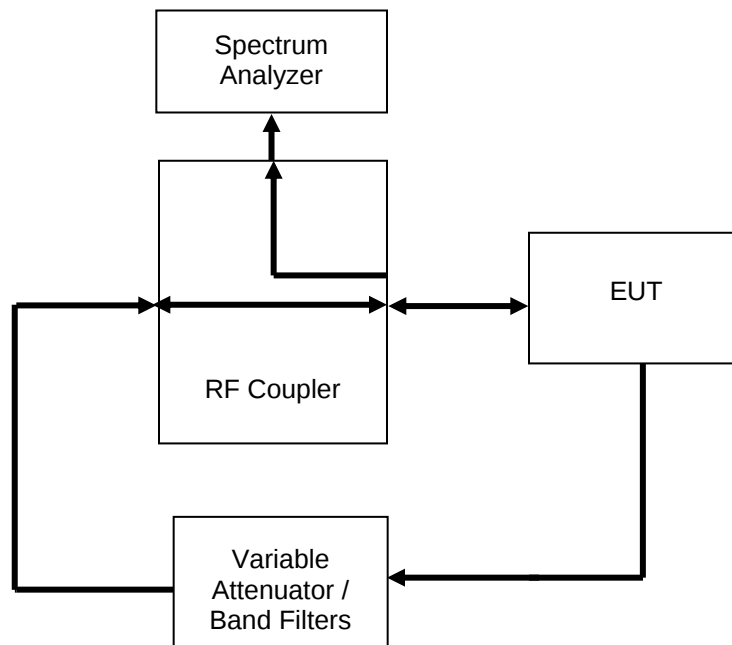



Uplink Detection Time Test Results

Frequency Band (MHz)	Measured Time (mS)	Limit (mS)	Result
824 - 849	51.3	300	Pass
1850 - 1915	63.9	300	Pass

Downlink Detection Time Test Results

Frequency Band (MHz)	Measured Time (mS)	Limit (mS)	Result
869 - 894	52.25	1000	Pass
1930 - 1995	41.25	1000	Pass

Uplink Restart Time Test Results

Frequency Band (MHz)	Measured Time (S)	Limit (S)	Result
824 - 849	70.20	≥60	Pass
1850 - 1915	69.97	≥60	Pass

Downlink Restart Time Test Results

Frequency Band (MHz)	Measured Time (S)	Limit (S)	Result
869 - 894	69.80	≥60	Pass
1930 - 1995	69.80	≥60	Pass

Uplink Restart Count Test Results

Frequency Band (MHz)	Restarts	Limit	Result
824 - 849	2	≤5	Pass
1850 - 1915	2	≤5	Pass


Downlink Restart Count Test Results

Frequency Band (MHz)	Restarts	Limit	Result
869 - 894	3	≤5	Pass
1930 - 1995	2	≤5	Pass




Uplink Detection Time Test Results

824 - 849 MHz Band

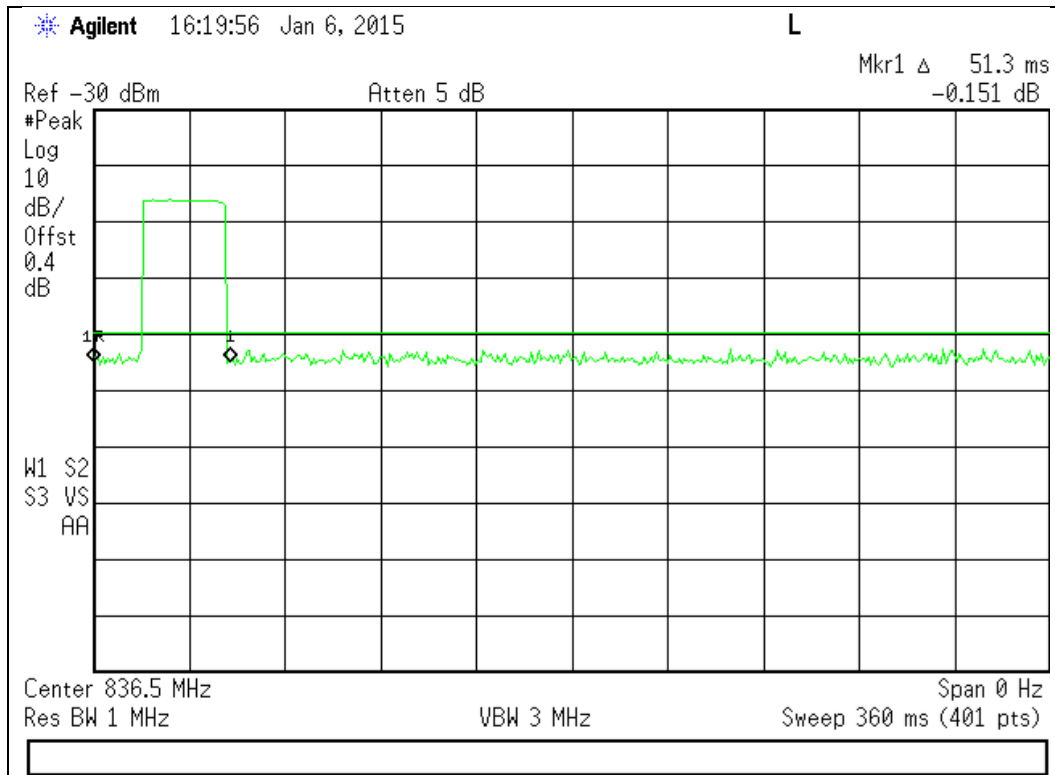


1850 - 1915 MHz Band

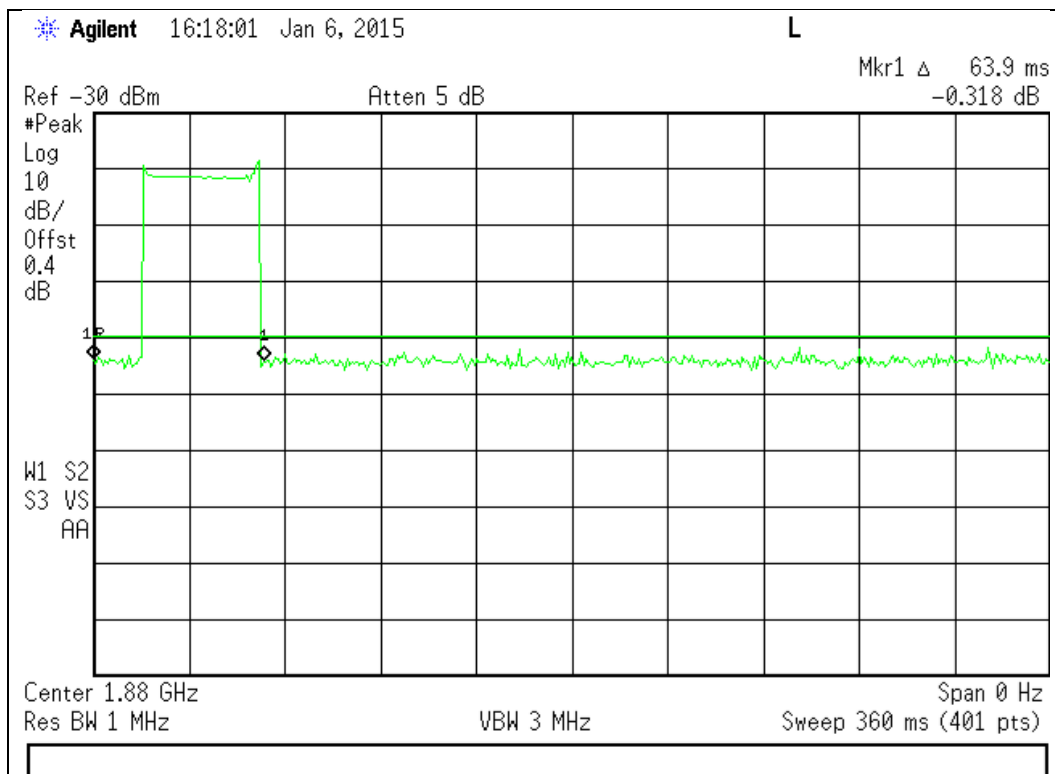




Uplink Restart Time Test Results 824 - 849 MHz Band

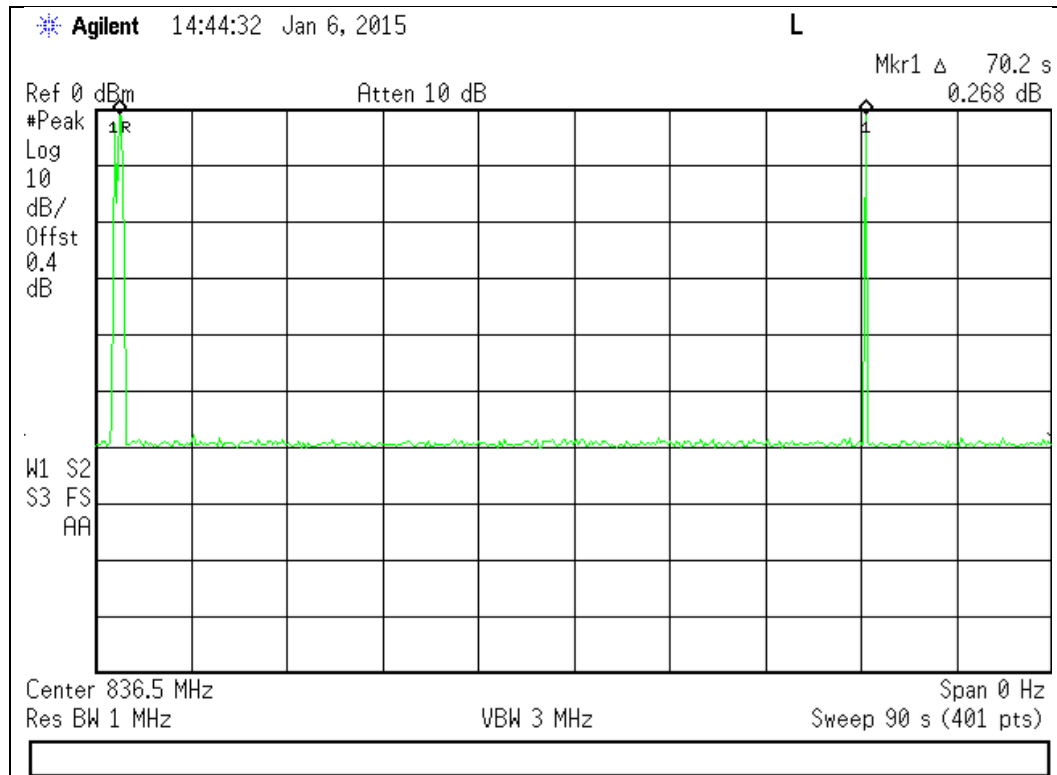


1850 - 1915 MHz Band

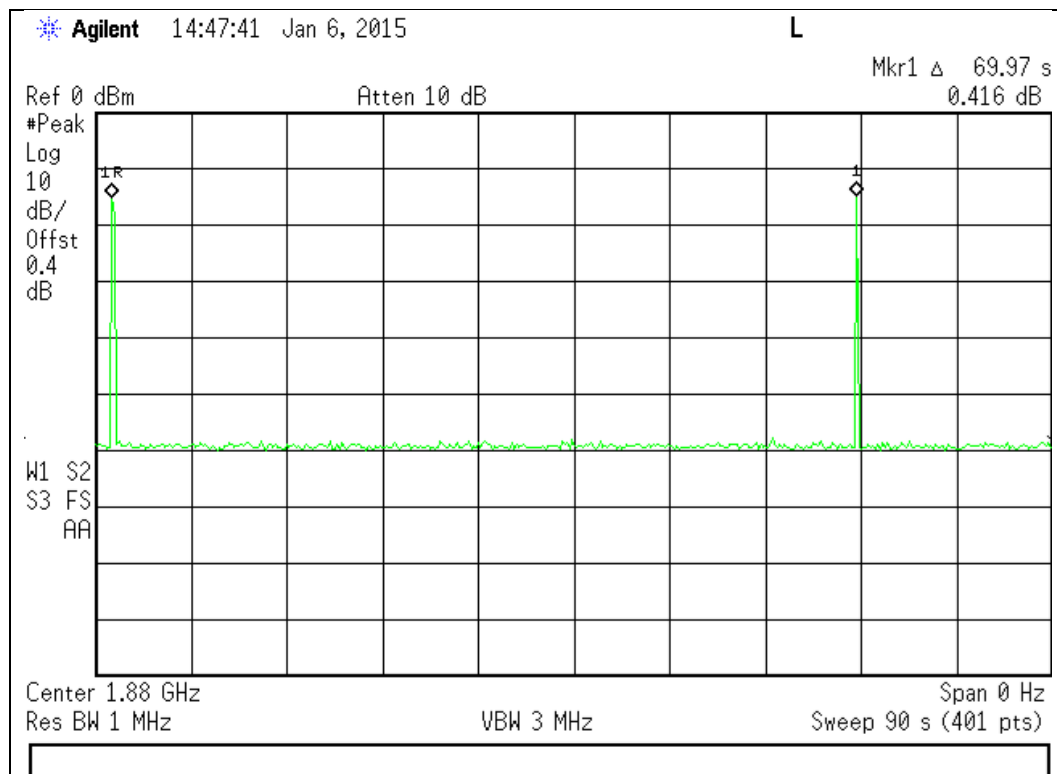




Uplink Restart Count Test Results 824 - 849 MHz Band

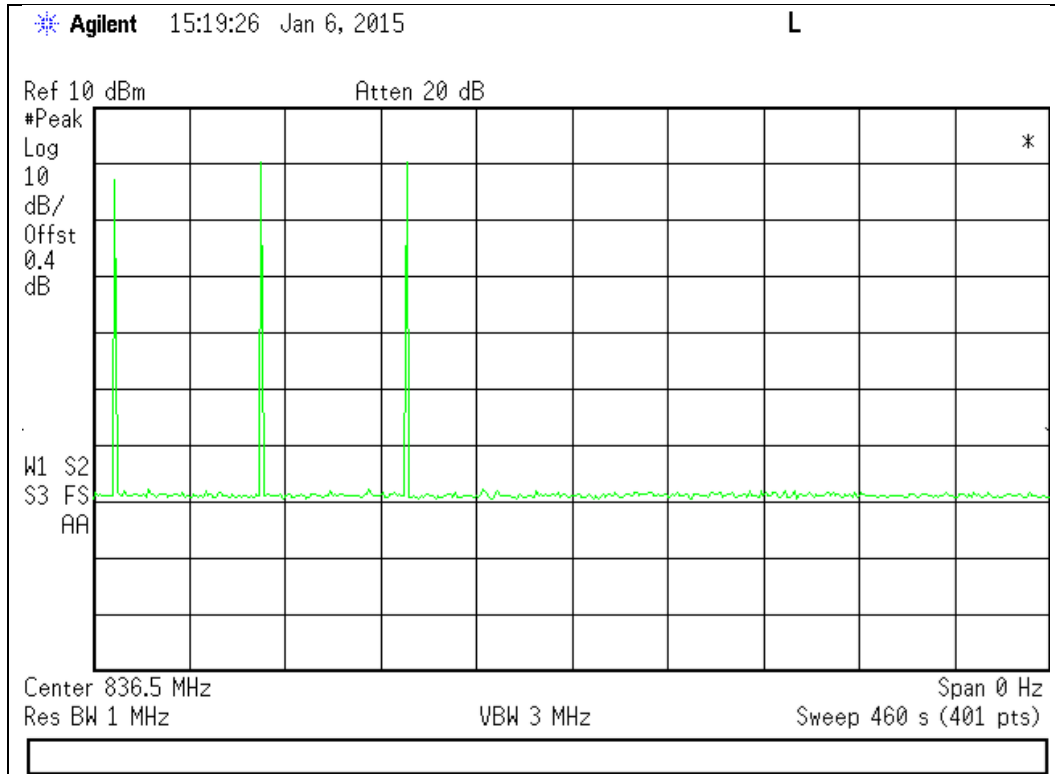


1850 - 1915 MHz Band

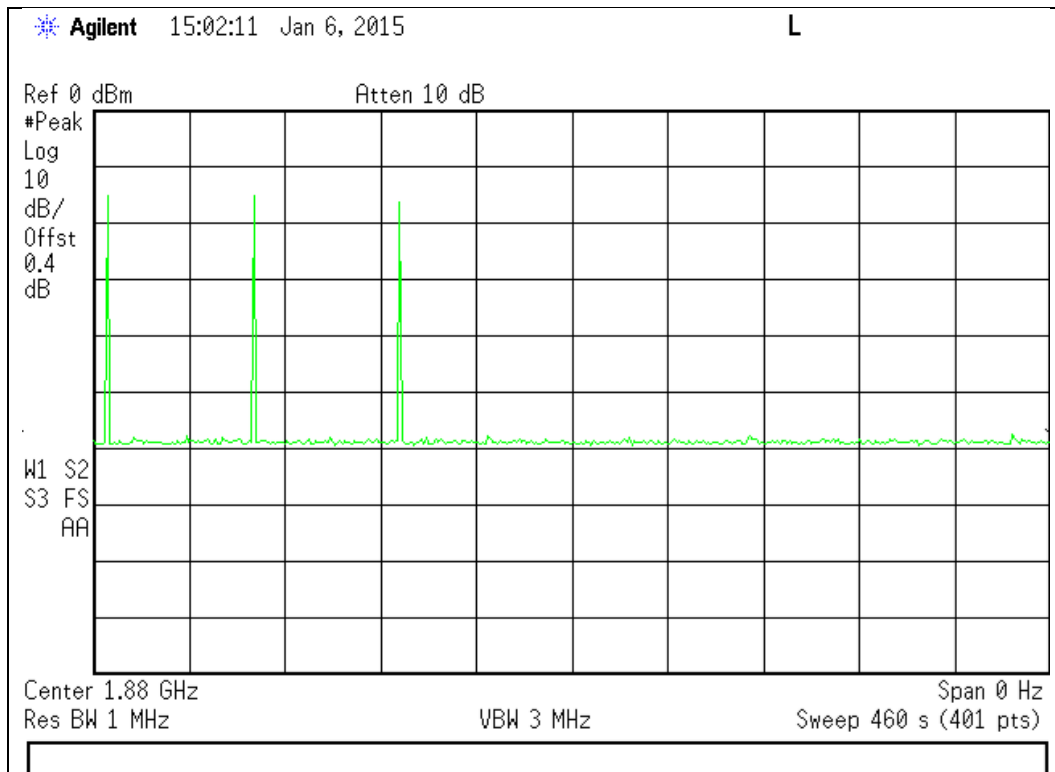




Downlink Detection Time Test Results

869 - 894 MHz Band

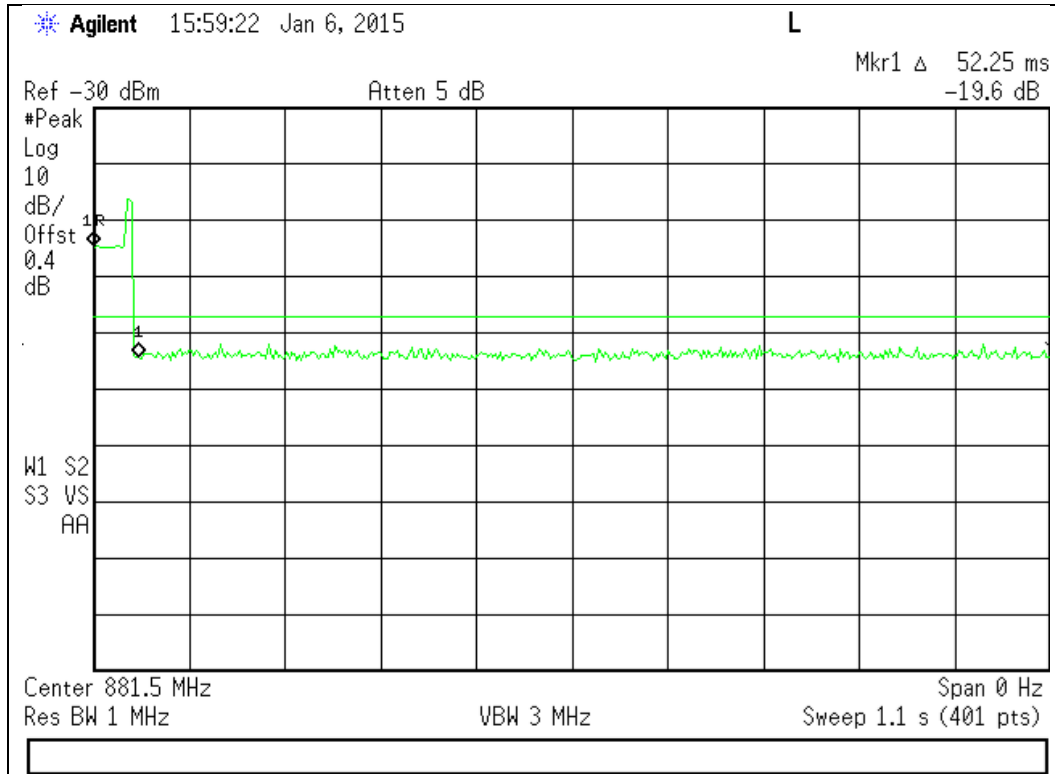


1930 - 1995 MHz Band

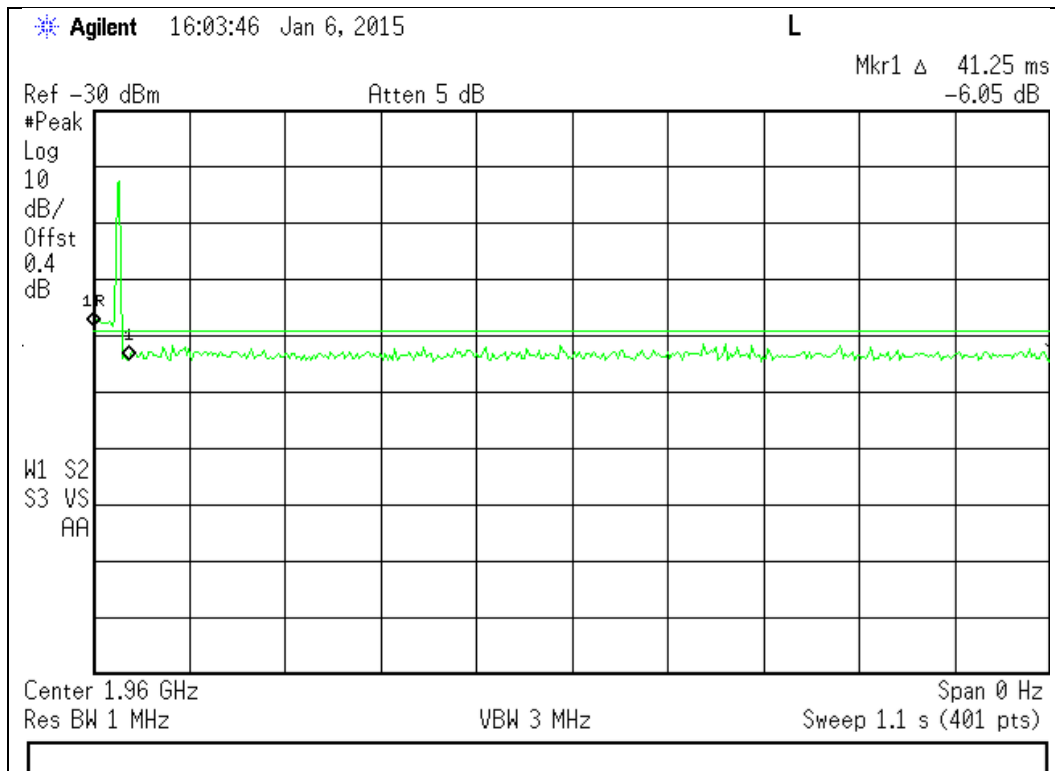




Downlink Restart Time Test Results

869 - 894 MHz Band

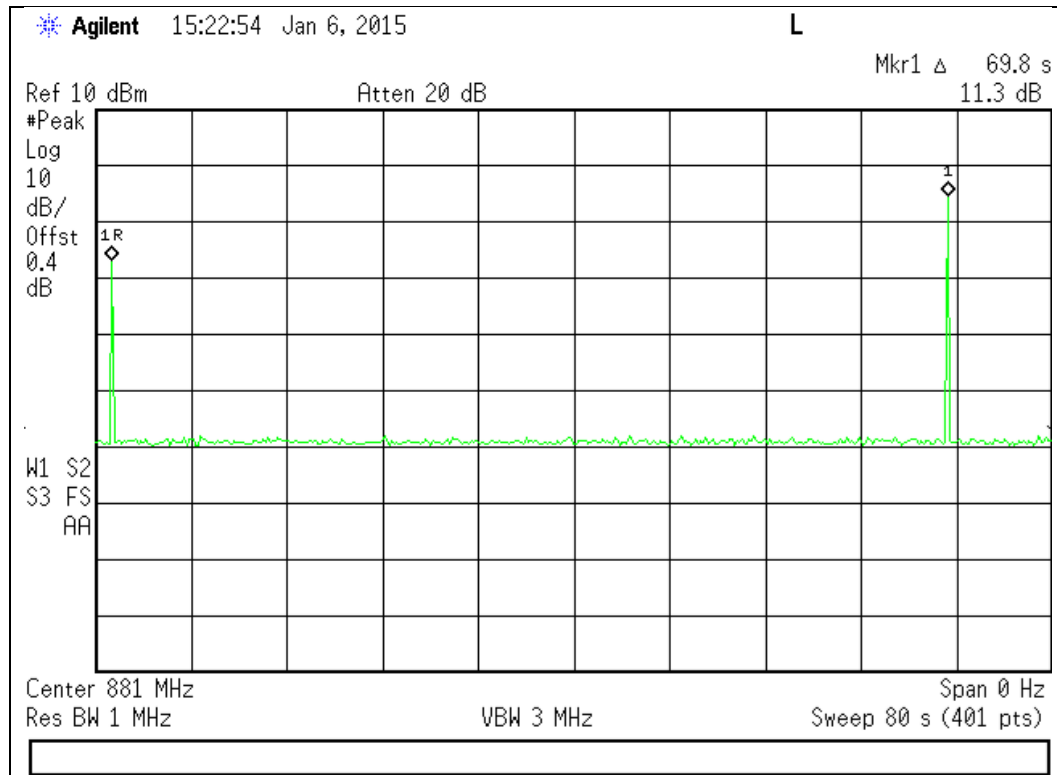


1930 - 1995 MHz Band

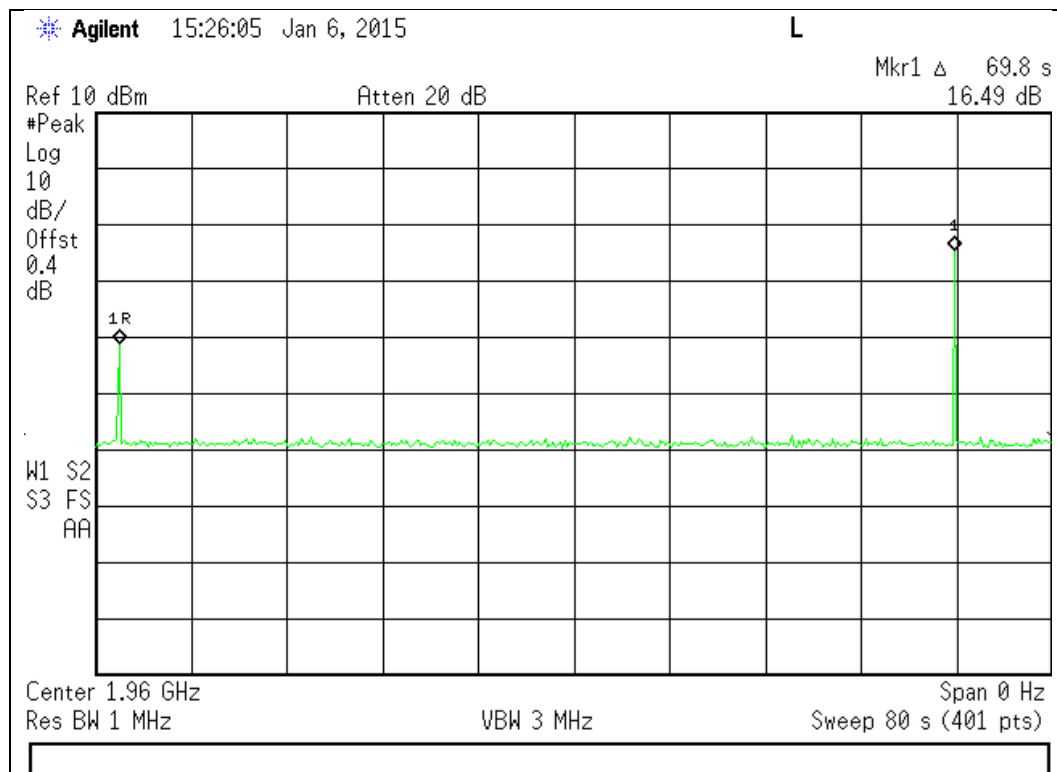




Downlink Restart Count Test Results

869 - 894 MHz Band

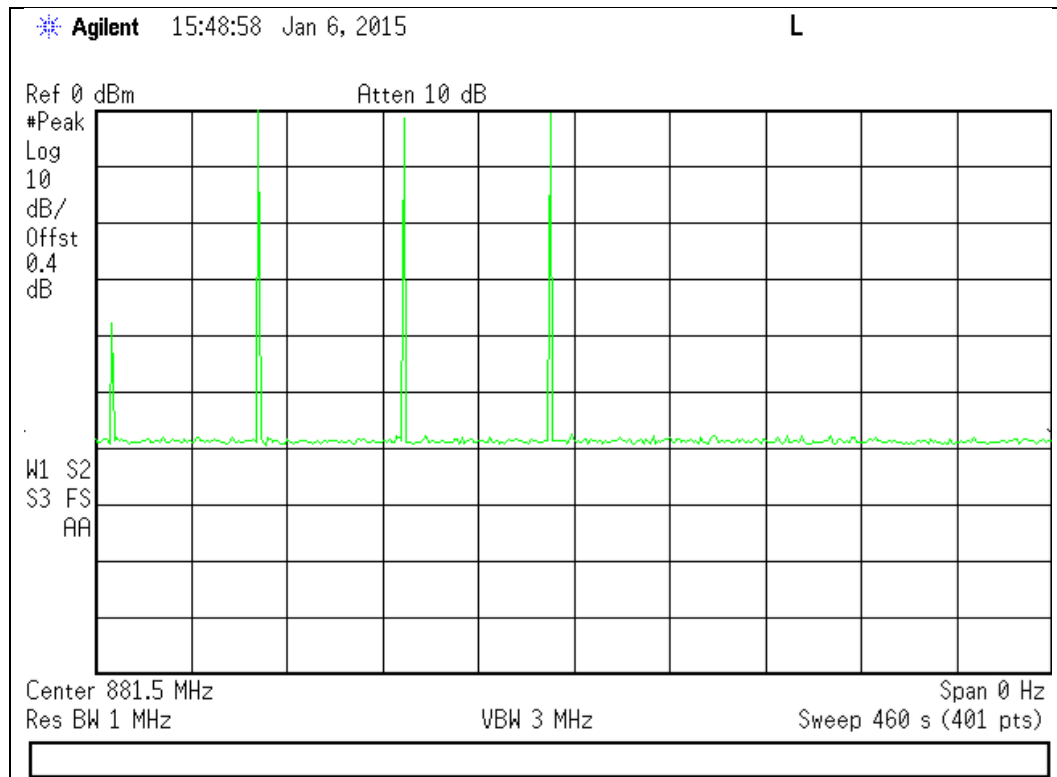

1930 - 1995 MHz Band

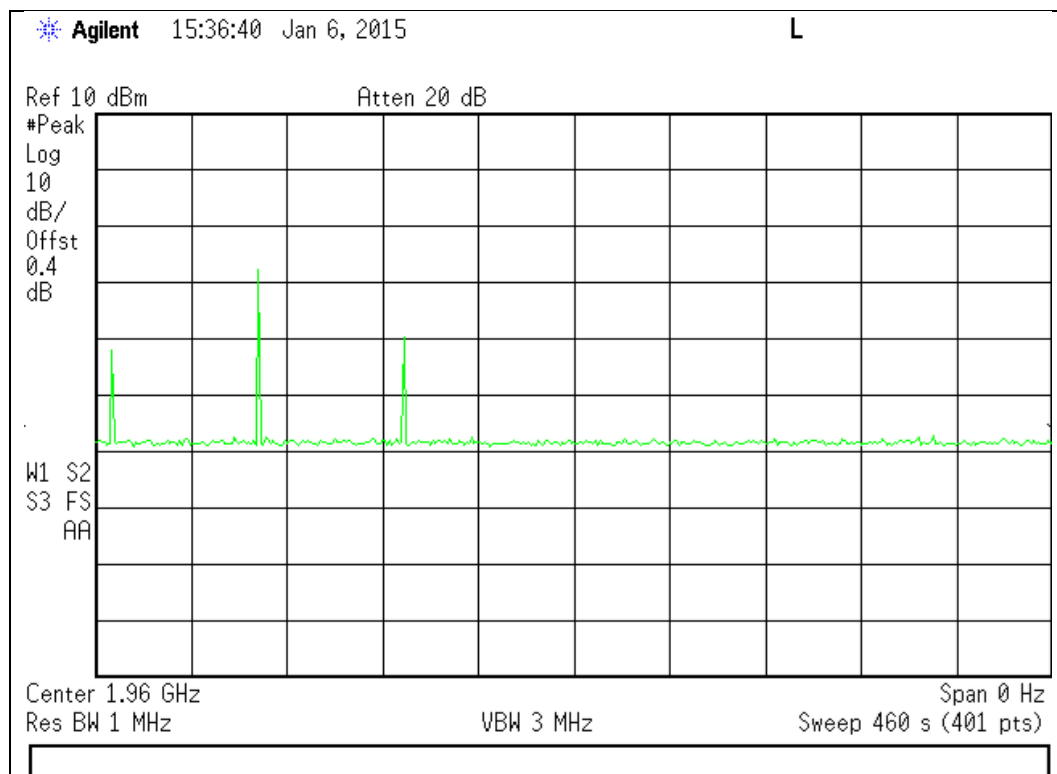



Radiated Spurious

Name of Test:

Radiated Spurious

Engineer: Mike Graffeo

Test Equipment Utilized: i00334, i00103, i00379, i00405

Test Date: 1/7/15

Test Procedure

The EUT was tested in a semi-anechoic chamber with the turntable set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by rotating it 360 degrees with the antenna in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure that the signal levels were maximized. All cable and antenna correction factors were input into the spectrum analyzer ensuring an accurate measurement in ERP/EIRP with the resultant power in dBm. A signal generator was used to provide a CW signal centered in each operational uplink and downlink band. The EUT output was terminated into a 50 Ohm non-radiating load.


The following formula was used for calculating the limits:

Radiated Spurious Emissions Limit = $P1 - (43 + 10\log(P2)) = -13\text{dBm}$

P1 = power in dBm

P2 = power in Watts

Test Setup

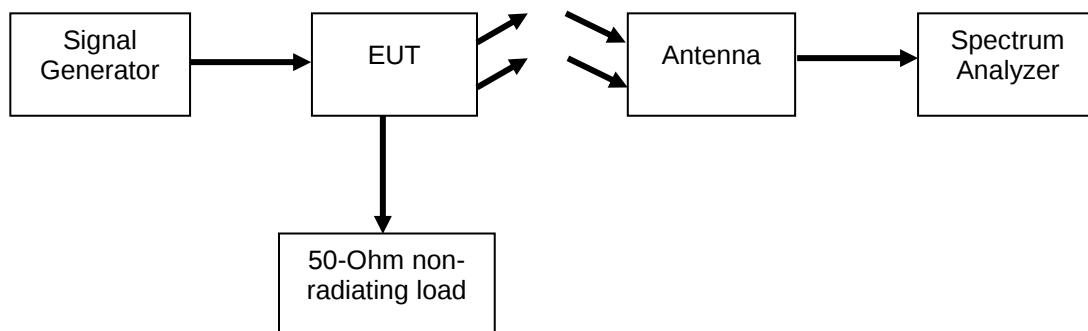



Uplink Test Results

824 - 849 MHz Band 836.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1673	-54.89	-13	Pass
2509.6	-49.17	-13	Pass
3346	-47.66	-13	Pass

1850 - 1915 MHz Band 1880 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
3760	-42.18	-13	Pass
5640	-40.38	-13	Pass
7520	-34.72	-13	Pass

Downlink Test Results

869 - 894 MHz Band 881.5 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
1763	-55.34	-13	Pass
2644.5	-47.56	-13	Pass
3526	-44.62	-13	Pass

1930 - 1995 MHz Band 1960 MHz Tuned Frequency

Measured Frequency (MHz)	Measured Level (dBm)	Limit (dBm)	Result
3920	-42.54	-13	Pass
5880	-40.51	-13	Pass
7840	-31.13	-13	Pass

No other emissions were detected. All emissions were lower than -13 dBm.
All emissions were system noise floor.



Test Equipment Utilized

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
* Horn Antenna	EMCO	3115	i00103	12/11/12	12/11/14
Bi-Log Antenna	Schaffner	CBL 6111D	i00349	10/8/13	10/8/15
Humidity / Temp Meter	Newport	IBTHX-W-5	i00282	3/24/14	3/24/15
Voltmeter	Fluke	75III	i00320	3/24/14	3/24/15
EMI Analyzer	Agilent	E7405A	i00379	1/14/14	1/14/15
Non-radiating load	Termaline	8201	i00334	Verified on: 1/5/15	
Power Supply (for EUT)	HP	6654A	i00350	Verified on: 1/5/15	
* Signal Generator	Rohde & Schwarz	SMU200A	i00405	12/11/13	12/11/14
RF Directional Coupler	Meca	CS06-1.500V	i00412	Verified on: 1/5/15	

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

* Lab manager has granted a 30 day calibration extension on this equipment.

END OF TEST REPORT