
Appendix for the Report

Dosimetric Assessment of the Siemens C70 (FCC ID: PWX-C65) According to the FCC Requirements

SAR Distribution Plots

October 20, 2004
IMST GmbH
Carl-Friedrich-Gauß-Str. 2
D-47475 Kamp-Lintfort

Customer
Siemens Information & Communication Mobile LLC
16475 West Bernado Drive, Suite 400
San Diego CA 92127

The test results only relate to the items tested.
This report shall not be reproduced except in full without the written
approval of the testing laboratory.

Table of Contents

1	SAR DISTRIBUTION PLOTS, PCS 1900 POC (PTT) CONFIGURATION.....	3
2	SAR Z-AXIS SCANS (VALIDATION).....	4
3	SAR Z-AXIS SCANS (MEASUREMENTS).....	5

1 SAR Distribution Plots, PCS 1900 PoC (PTT) configuration

Test Laboratory: IMST GmbH; File Name: [655yphm_2.da4](#)

DUT: Siemens; Type: C65; Serial: 004400005166655; Program Name: Body Worn

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.54$; mho/m, $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1579; ConvF(4.57, 4.57, 4.57); Calibrated: 01.09.2004

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn631; Calibrated: 23.07.2004

- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340

- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.173 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.18 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 0.246 W/kg

SAR(1 g) = 0.168 mW/g; SAR(10 g) = 0.110 mW/g

Maximum value of SAR (measured) = 0.182 mW/g

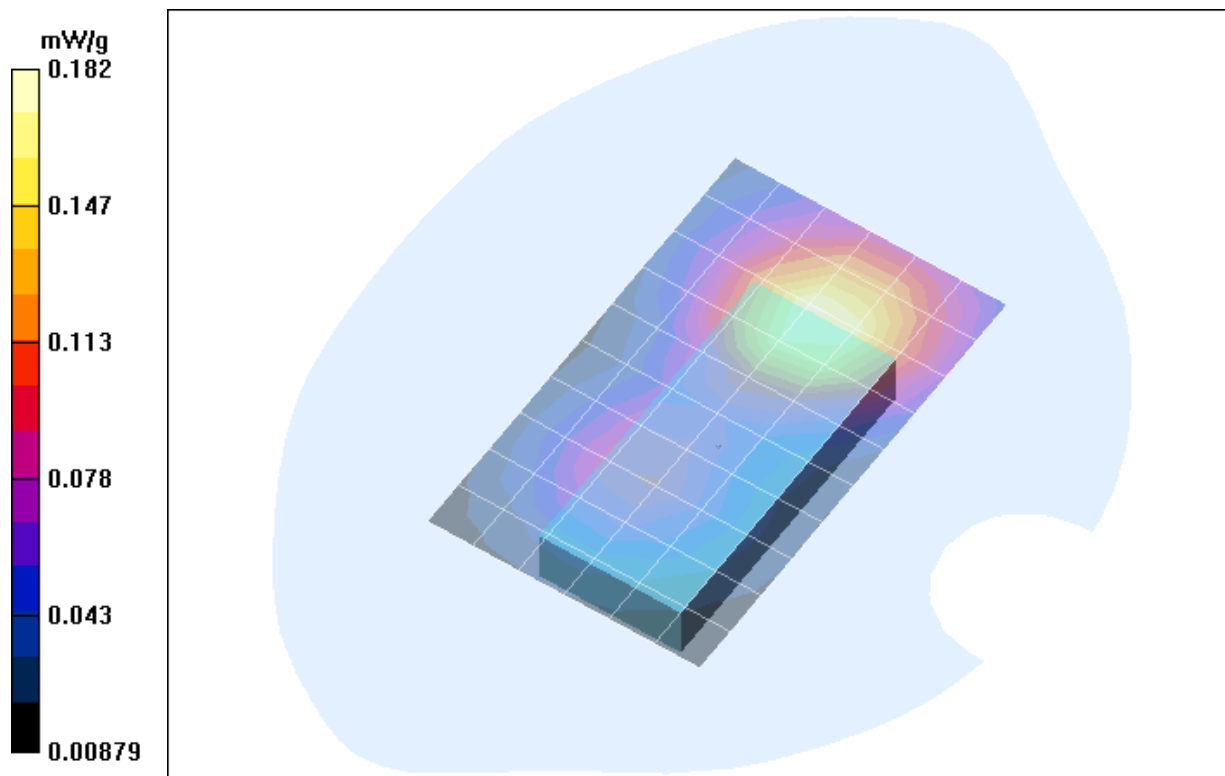


Fig. 1: SAR distribution for PCS 1900, channel 661, PoC (PTT) configuration, display towards the phantom, ARC cover, GPRS class 10 (18.10.2004; Ambient Temperature: 22.2° C; Liquid Temperature : 21.3° C).

2 SAR z-axis scans (Validation)

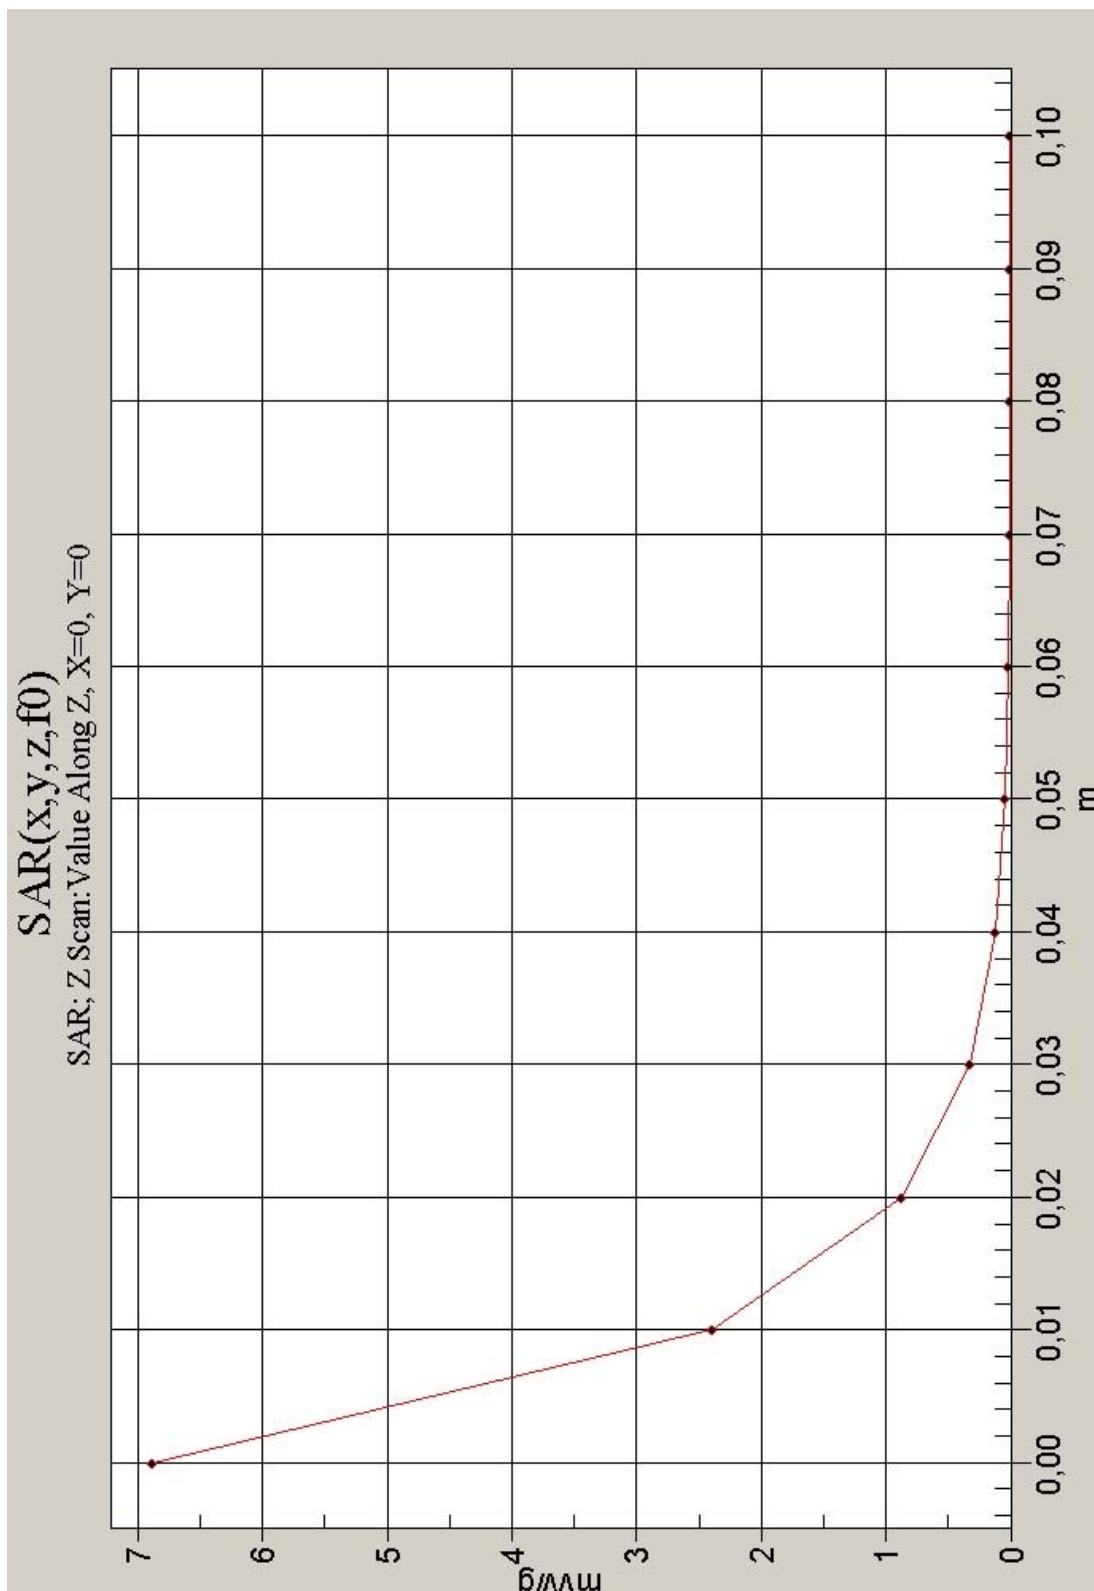


Fig. 2: SAR versus liquid depth, 1900 MHz, body (18.10.2004; Ambient Temperature: 21.8° C; Liquid Temperature : 21.1° C).

3 SAR z-axis scans (Measurements)

The following pictures show the plots of SAR versus liquid depth for the worst case values.

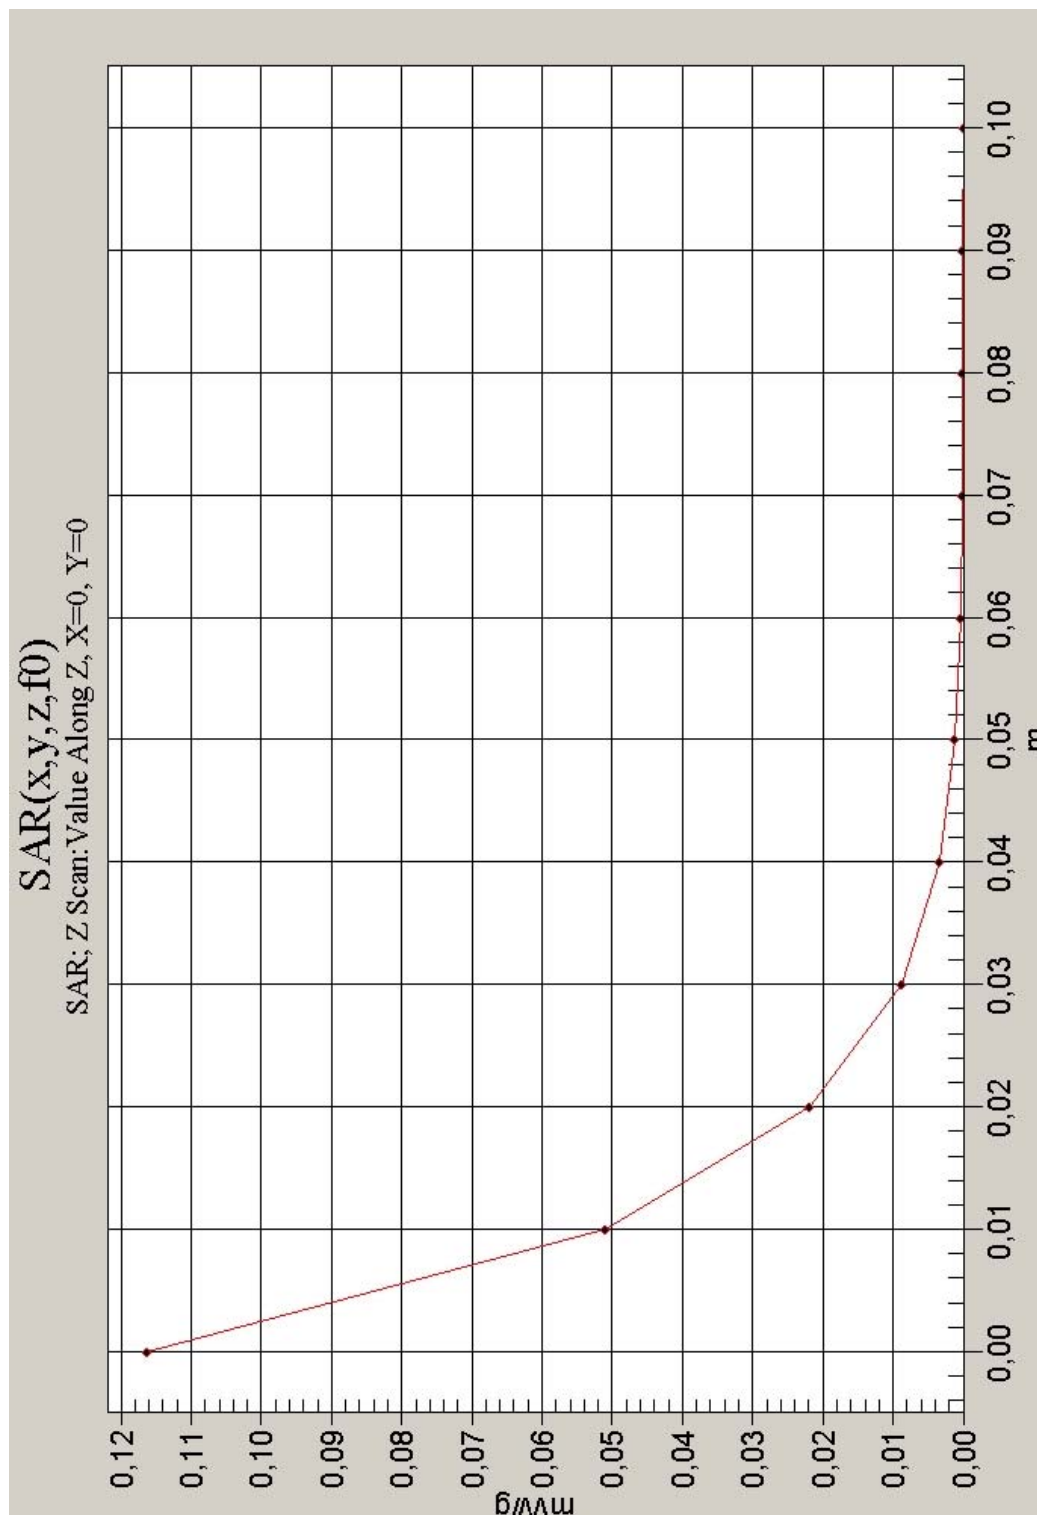


Fig. 3: SAR versus liquid depth, PCS 1900, channel 661, PoC (PTT) configuration, display towards the phantom, ARC cover, GPRS class 10 (18.10.2004; Ambient Temperature: 22.2° C; Liquid Temperature : 21.3° C).