

**All-Line, Inc.
FCC Part 15, Certification Application
Door Chime Transmitter, Model R14-2T**

October 24, 2001

MEASUREMENT/TECHNICAL REPORT

COMPANY NAME: **All-Line, Inc.**

MODEL: **R14-2T**

FCC ID: **PWZR142T**

DATE: **October 24, 2001**

This report concerns (check one): Original grant
Class II change_____

Equipment type: **Low Power Transmitter**

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes_____ No

If yes, defer until: _____
date

N.A. agrees to notify the Commission by N.A.
date

of the intended date of announcement of the product so that the grant can be issued
on that date.

Report prepared by:

United States Technologies, Inc.
3505 Francis Circle
Alpharetta, GA 30004

Phone Number: (770) 740-0717
Fax Number: (770) 740-1508

TABLE OF CONTENTS

AGENY AGREEMENT

SECTION 1

GENERAL INFORMATION

Product Description

SECTION 2

TESTS AND MEASUREMENTS

Configuration of Tested
Test Facility
Test Equipment
Modifications
Periodic Operation
Field Strength of Fundamental Emission
Field Strength of Spurious Emissions
20 dB Bandwidth of Fundamental Emission
Frequency Tolerance of Carrier Signal
Radiated Emissions
Power Line Conducted Emissions

SECTION 3

LABELING INFORMATION

SECTION 4

BLOCK DIAGRAM(S)

SECTION 5

PHOTOGRAPHS

SECTION 6

USER'S MANUAL

LIST OF FIGURES AND TABLES

FIGURES

Test Configuration
Photograph(s) for Spurious and Fundamental Emissions
Field Strength of Fundamental Emission
Field Strength of Spurious Emissions
Bandwidth of Fundamental Emission

TABLES

EUT And Peripherals
Test Instruments
Field Strength of Fundamental Emission
Field Strength of Spurious Emissions
Bandwidth of Fundamental Emission
Radiated Emissions
Power Line Conducted Emissions

SECTION 1

GENERAL INFORMATION

GENERAL INFORMATION

Product Description

The Equipment Under Test (EUT) is a All-Line, Inc., 314.0 MHz Wireless Door Chime, Model R14-2T. The EUT is part of a system including a door chime receiver.

This product was originally tested and approved in 1998. The EUT is being identified under a different trade name and model number, therefore the manufacturer has requested that the unit be re-certified.

Related Submittal(s)/Grant(s)

The EUT will be used with a DoC Approved receiver.

SECTION 2

TESTS AND MEASUREMENTS

TESTS AND MEASUREMENTS

Configuration of Tested System

The sample was tested per ANSI C63.4, Methods of Measurement from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (1992). Conducted and radiated emissions data were taken with the test receiver or spectrum analyzer's resolution bandwidth adjusted to 9 kHz and 120 kHz, respectively. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was off throughout the evaluation process. Interconnecting cables were manipulated as necessary to maximize emissions. A block diagram of the tested system is shown in Figure 1. Test configuration photographs for spurious and fundamental emissions are shown in Figure 2.

Since the EUT is a hand held device, it was placed into a continuous mode of transmit and rotated about all 3 axis to obtain worse case results.

Test Facility

Testing was performed at US Tech's measurement facility as described to the FCC and acknowledged in their letter marked 31040/SIT/USTECH.

Test Equipment

Table 2 describes test equipment used to evaluate this product.

UN-26 98 13:21 FROM: ALL LINE AMERICAS
JUN-25-98 THU 14:33 TRINE PRODUCTS CO
JUN-12-1998 15:57

TO: 770 552 1120 PAGE: 01
FAX NO. 7185187022 P. 02
317 703 2888 P. 02-03

PCTA RE: Remarks:

Modifications:

The following modifications were made by US Tech, to bring the EUT into compliance with FCC Part 15, Class B Requirements:

1. Changed R8 from 47kΩ to 67kΩ
2. Changed C6 from 8pF to 100pF
3. Added 20Ω between C4 and C9 bases
4. Added 10pF between Q2 emitter and collector
5. Used Telon #7704-108 choke instead of TND1 inductor

The modifications above will be implemented in all production models of this equipment.

Applicant: Trine Products Company Dated: 6/22/98
Signed: Daniel J. Wenzel Title: Design Development Mgr.

R
6-25-98

FIGURE 1
TEST CONFIGURATION



FIGURE 2

Photograph(s) for Spurious and Fundamental Emissions



FIGURE 2

Photograph(s) for Spurious and Fundamental Emissions

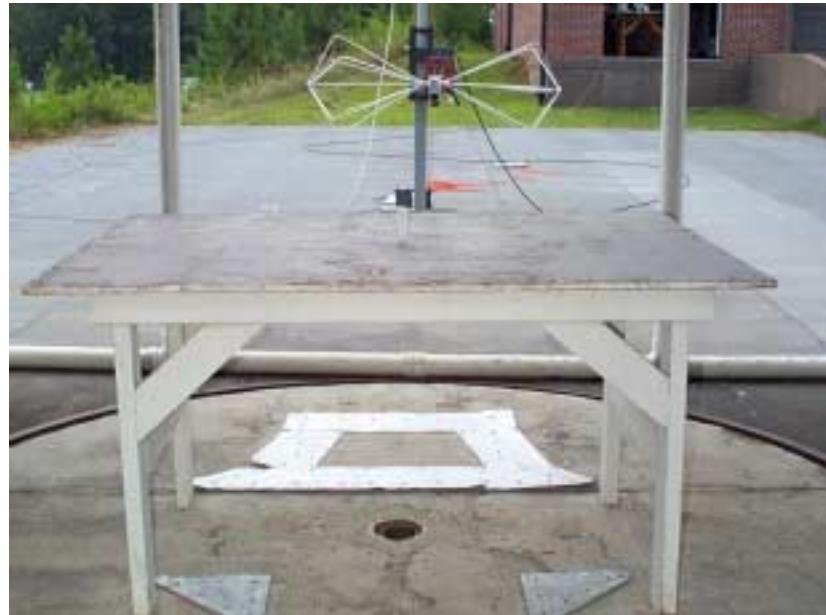


TABLE 1

EUT and Peripherals

PERIPHERAL MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID:	CABLES P/D
Door Chime Transmitter All-Line, Inc. (EUT)	R14-2T	None	PWZR142T (Pending)	None

TABLE 2


TEST INSTRUMENTS

TYPE	MANUFACTURER	MODEL	SN.
SPECTRUM ANALYZER	HEWLETT-PACKARD	8593E	3205A00124
SPECTRUM ANALYZER	HEWLETT-PACKARD	8558B	2332A09900
S A DISPLAY	HEWLETT-PACKARD	853A	2404A02387
COMB GENERATOR	HEWLETT-PACKARD	8406A	1632A01519
RF PREAMP	HEWLETT-PACKARD	8447D	1937A03355
RF PREAMP	HEWLETT-PACKARD	8449B	3008A00480
HORN ANTENNA	EMCO	3115	3723
ROBERTS ANTENNAS	COMPLIANCE DESIGN	A100	167
BICONICAL ANTENNA	EMCO	3110	9307-1431
LOG PERIODIC ANTENNA	EMCO	3146	9110-3600
LISN	SOLAR ELE.	8012-50	N/A
THERMOMETER	FLUKE	52	5215250
MULTIMETER	FLUKE	85	53710469
FUNCTION GENERATOR	TEKTRONIX	CFG250	CFG250TW1505 9
PLOTTER	HEWLETT-PACKARD	7475A	2325A65394
BILOG	CHASE	CBL6112A	2238

Periodic Operation (47 CFR 15.231(a1))

A transmitter manually activated must automatically deactivate within not more than 5 seconds of being released. The transmitter is a 1 button transmitter. The EUT continues to transmit while each button is being pressed. The EUT ceases transmission almost immediately upon being released and appears to finish the current packet being transmitted. Therefore the longest period of time the transmitter should take to deactivate is a packet length, or 15 ms as shown in Figure 3.

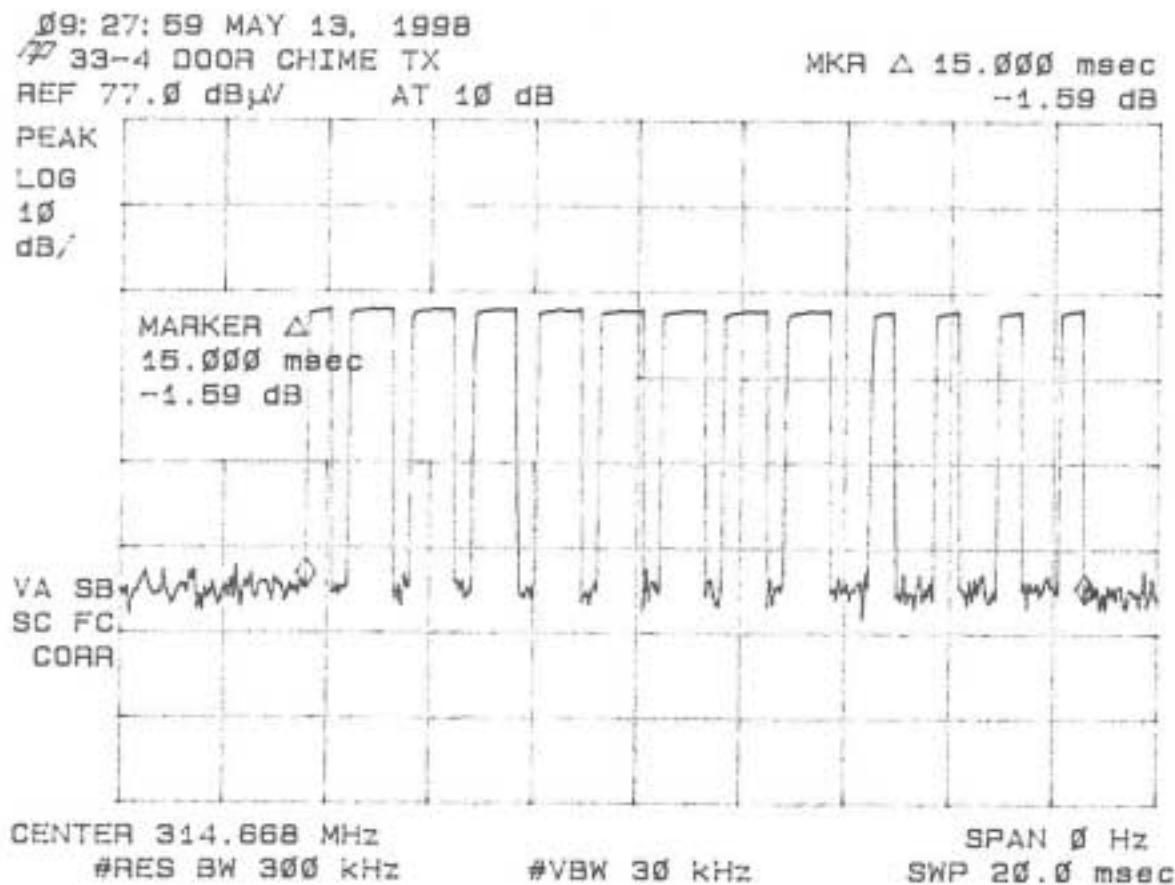FIGURE 3
Periodic Operation 15.231(a)(c1)



Field Strength of Fundamental Emission (47 CFR 15.231b)

Measurements were made using a peak detector. Field strength of the peak fundamental emission is shown in Table 3 and Figure 4.

Duty Cycle Correction During 100 msec:

Each function key sends a different series of characters, but each packet period (29.125 msec) never exceeds a series of 13 long (800 μ s) and short (400 μ s) pulses. Assuming any combination of short or long pulses may be obtained due to encoding the worse case transmit duty cycle would be considered $13 \times 800 \mu\text{s} / 29.125 \text{ msec} = 36\%$ duty cycle. Figures 5a through 5c show the characteristics of the pulse train for one of these functions.

$$\text{Duty Cycle Correction} = 20 \log(0.36) = -8.8\text{dB}$$

Field strength of the average fundamental emission is shown in Table 4.

TABLE 3
FIELD STRENGTH OF FUNDAMENTAL EMISSION

Test Date: March 21, 1998
UST Project: 01-0457
Customer: All-Line, Inc.
Model: R14-2T

FREQ. (MHz)	TEST DATA (dBm) @ 3m	ANTENNA FACTOR + CABLE ATTENUATION	RESULTS (uV/m) @ 3m	PEAK FCC LIMITS (uV/m) @ 3m
314.4	-59.8	19.0	2038.9	60,250

SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m = Antilog $((-59.8 + 19.0 + 107)/20) = 2038.9$
CONVERSION FROM dBm TO dBuV = 107 dB

Test ResultsReviewed by: Name: Timothy R. Johnson

FIGURE 4

FIELD STRENGTH OF FUNDAMENTAL EMISSION 15.231(b)

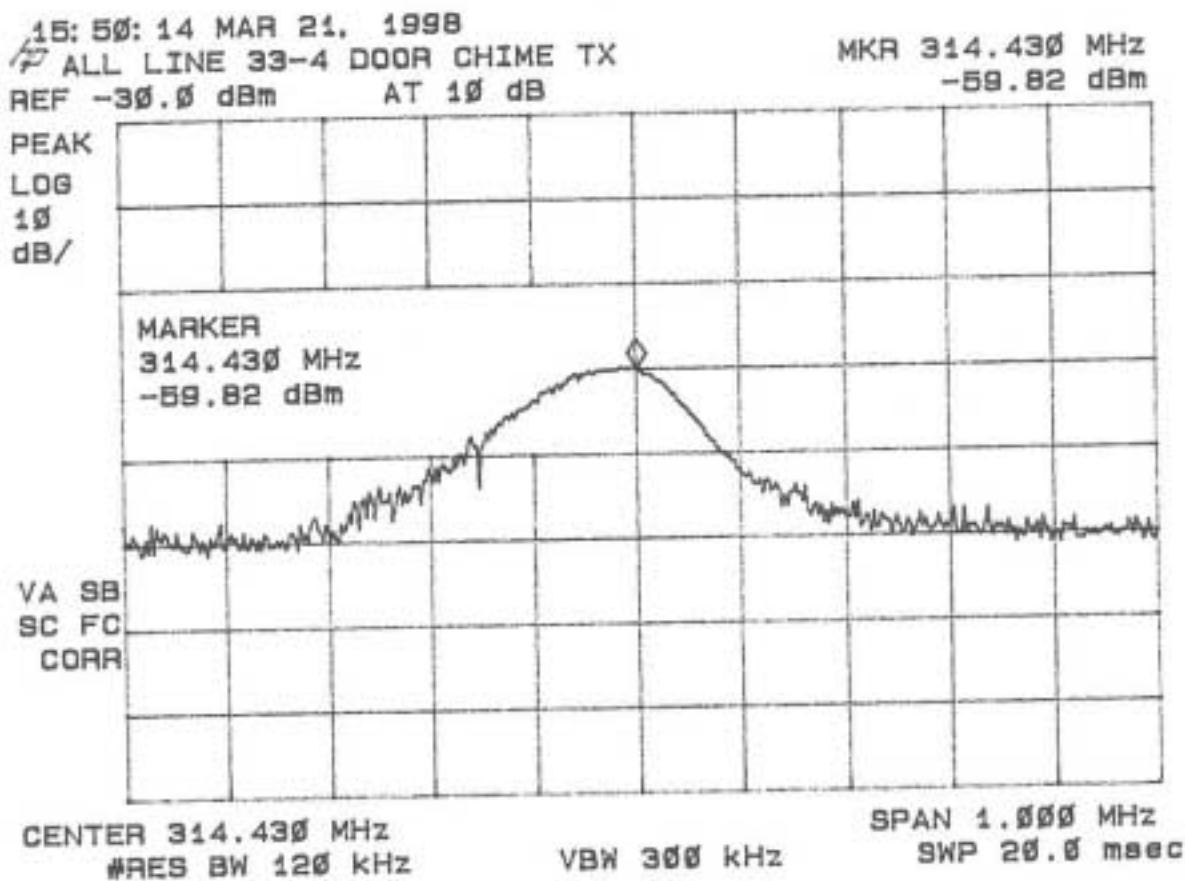


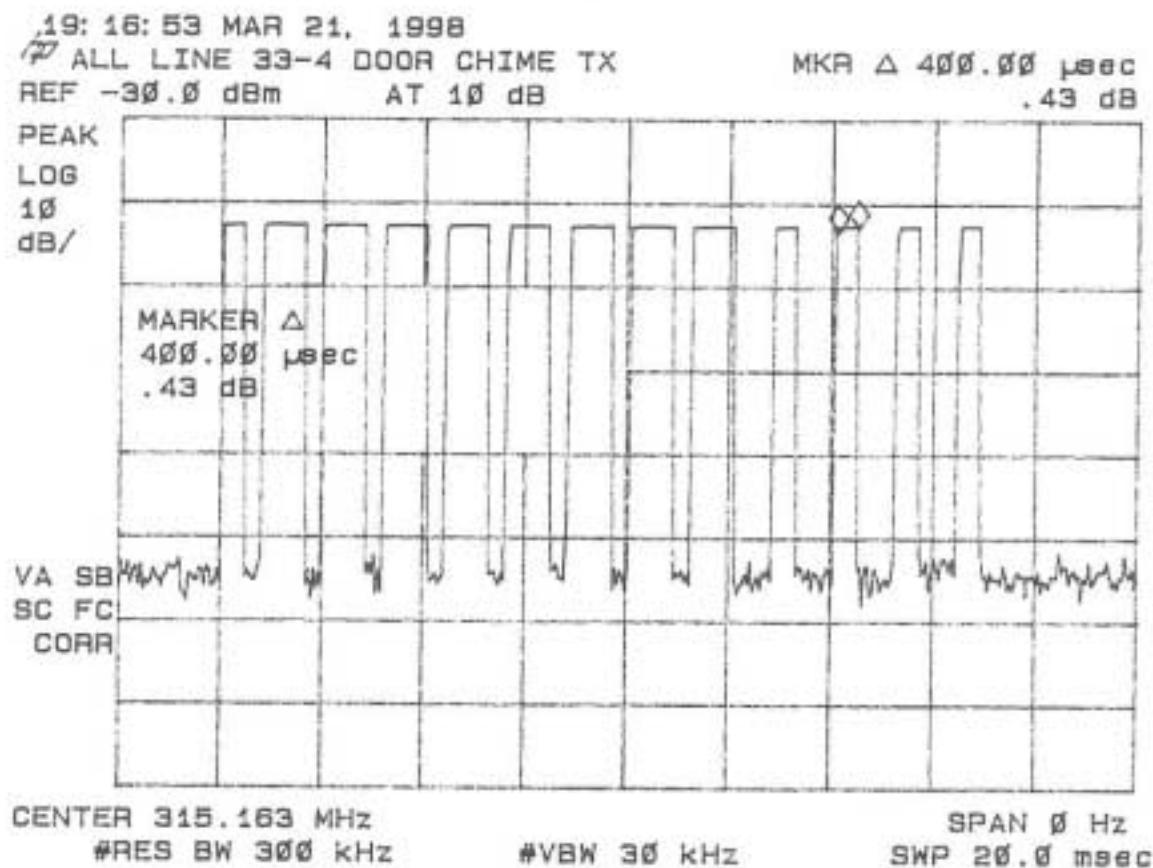
FIGURE 5a
DUTY CYCLE CHARACTERISTICS

FIGURE 5b
DUTY CYCLE CHARACTERISTICS

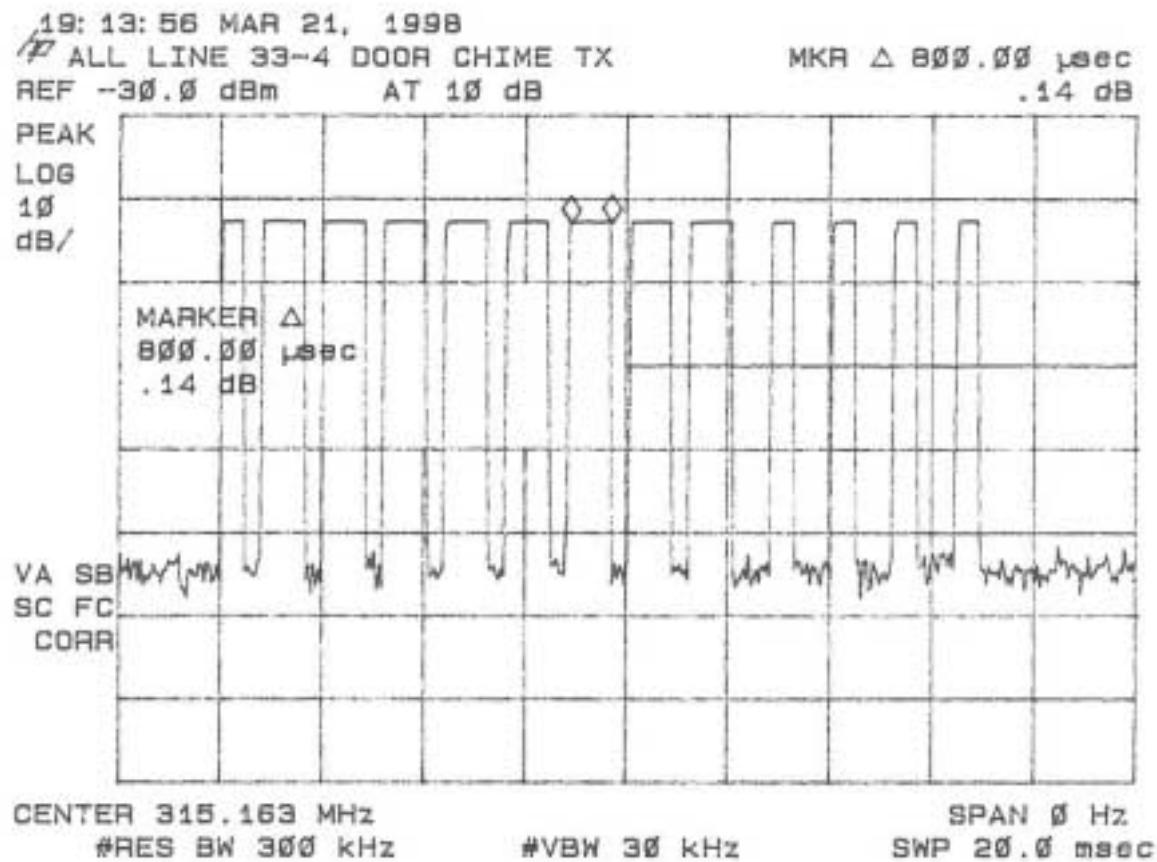


FIGURE 5c
DUTY CYCLE CHARACTERISTICS

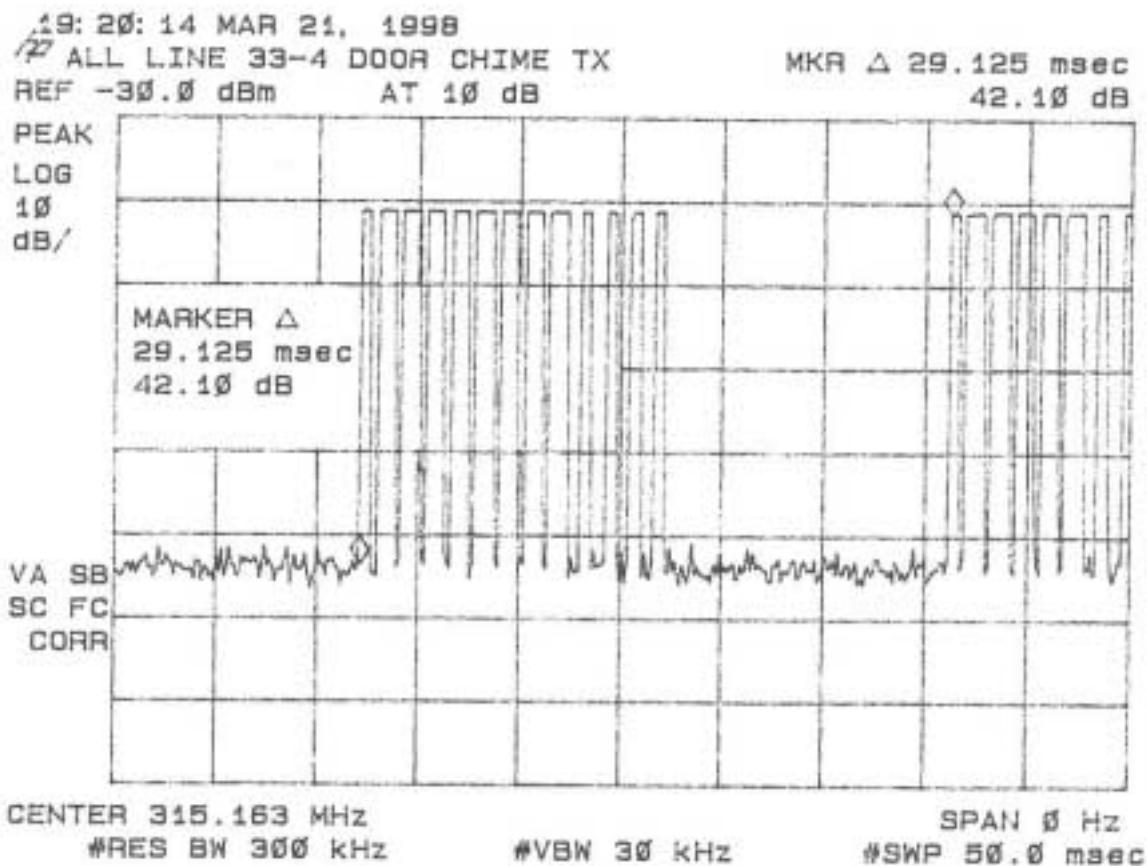


TABLE 4
FIELD STRENGTH OF FUNDAMENTAL EMISSION

Test Date: March 21, 1998
UST Project: 01-0457
Customer: All-Line, Inc.
Model: R14-2T

FREQ. (MHz)	TEST DATA (dBm) @ 3m	ANTENNA FACTOR + CABLE ATTENUATION	RESULTS (Uv/M) @ 3m	AVERAGE FCC LIMITS (uV/m) @ 3m
314.4	-68.6	19.0	740.3	6025

* Adjusted by duty cycle = $20 \log(0.36) = -8.8$ dB

SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m = Antilog $((-68.6 + 19.0 + 107)/20) = 740.3$
 CONVERSION FROM dBm TO dBuV = 107 dB

Test Results

Reviewed by: 

Name: Timothy R. Johnson

Field Strength Of Spurious Emissions (47 CFR 15.231b)

Measurements were made using a peak detector. Field strength of Spurious Emissions are shown in Table 5 and Figures 6. For comparison to the average limits, duty cycle corrections were made as given in the previous section. Any emission less than 1000 MHz and falling within the restricted bands of 15.205 were not adjusted for averaging and the limits of 15.209 were applied.

TABLE 5a
FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Date: March 21, 1998
UST Project: 01-0457
Customer: All-Line, Inc.
Model: R14-2T

FREQ. (MHz)	TEST DATA (dBm) @ 3m	ANTENNA FACTOR + CABLE ATTENUATION - AMP GAIN	RESULTS (uV/m) @ 3m	PEAK FCC LIMITS (uV/m) @ 3m
628.6	-72.6	25.7	1008.3	6025
942.9	-83.7	31.9	576.4	6025
1257.38	-61.4	-9.5	63.8	6025
1571.75**	-63.6	-7.8	60.3	5000

** Denotes restricted band of operation

SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m = Antilog $((-72.6 + 25.7 + 107)/20) = 1008.3$
CONVERSION FROM dBm TO dBuV = 107 dB

Test Results

Reviewed by: Timothy R. Johnson

Name: Timothy R. Johnson

TABLE 5b
FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Date: March 21, 1998
UST Project: 01-0457
Customer: All-Line, Inc.
Model: R14-2T

FREQ. (MHz)	TEST DATA (dBm) @ 3m	ANTENNA FACTOR + CABLE ATTENUATION - AMP GAIN	RESULTS (uV/m) @ 3m	AVERAGE FCC LIMITS (uV/m) @ 3m
628.6	-81.4	25.7	366.1	602.5
942.9	-92.5	31.9	209.3	602.5
1257.38	-70.2	-9.5	23.2	602.5
1571.75**	-72.4	-7.8	21.9	500.0

* Adjusted duty cycle = 20 Log (0.36) = -8.8dB

** Denotes restricted band of operation

SAMPLE CALCULATIONS:

RESULTS uV/m @ 3m = Antilog $((-81.4 + 25.7 + 107)/20)$ = 366.1
 CONVERSION FROM dBm TO dBuV = 107 dB

Test Results

Reviewed by: Timothy R. Johnson

Name: Timothy R. Johnson

FIGURE 6A

SPURIOUS EMISSIONS 15.231(b)

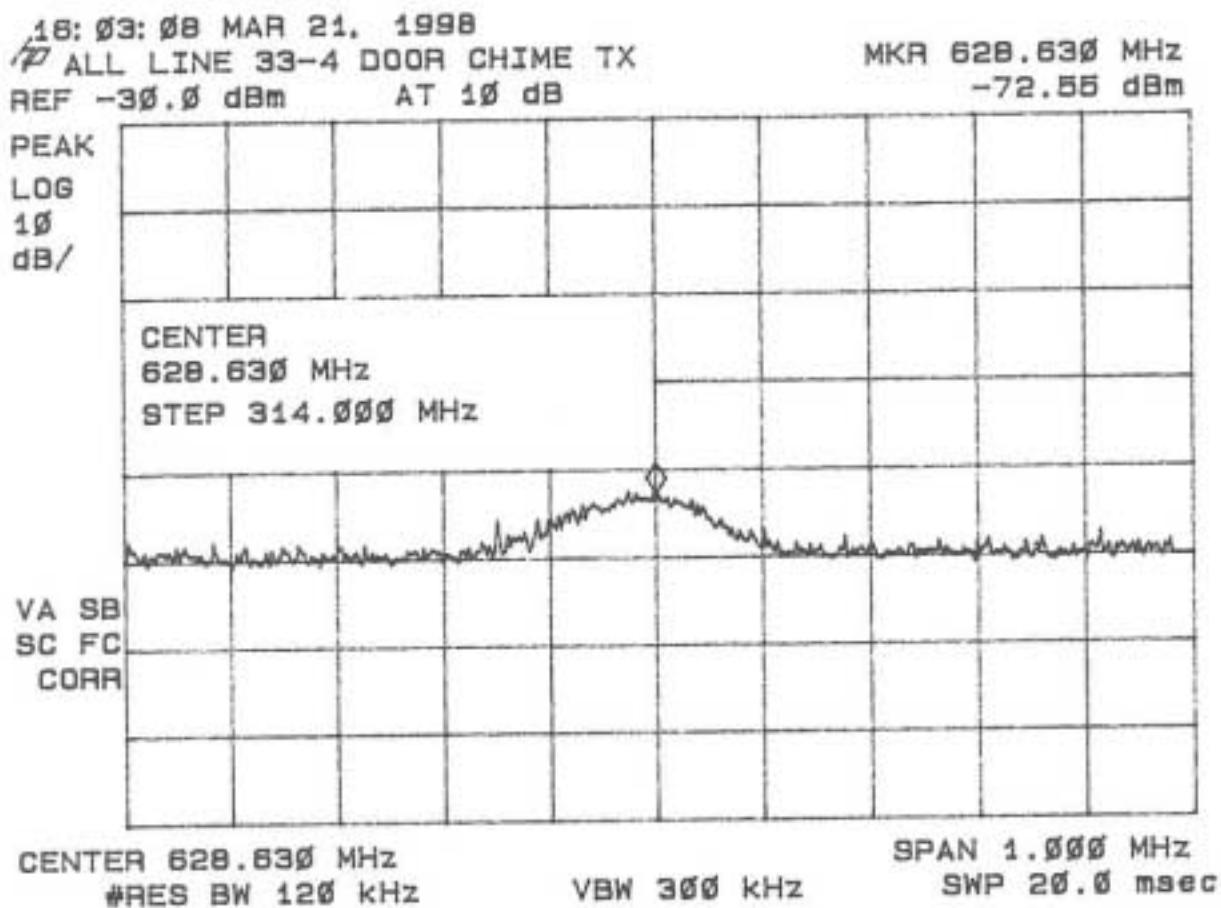


FIGURE 6B
SPURIOUS EMISSIONS 15.231(b)

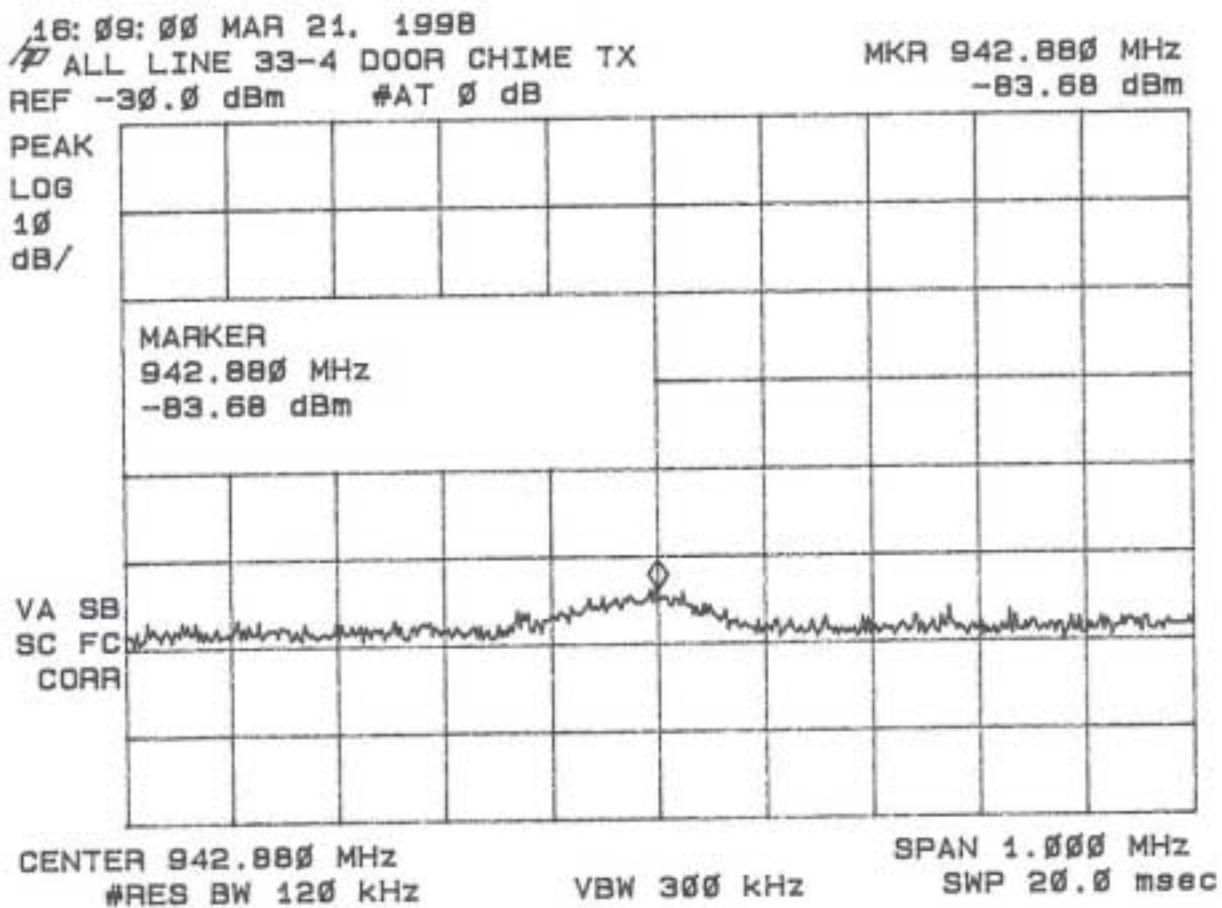


FIGURE 6C
SPURIOUS EMISSIONS 15.231(b)


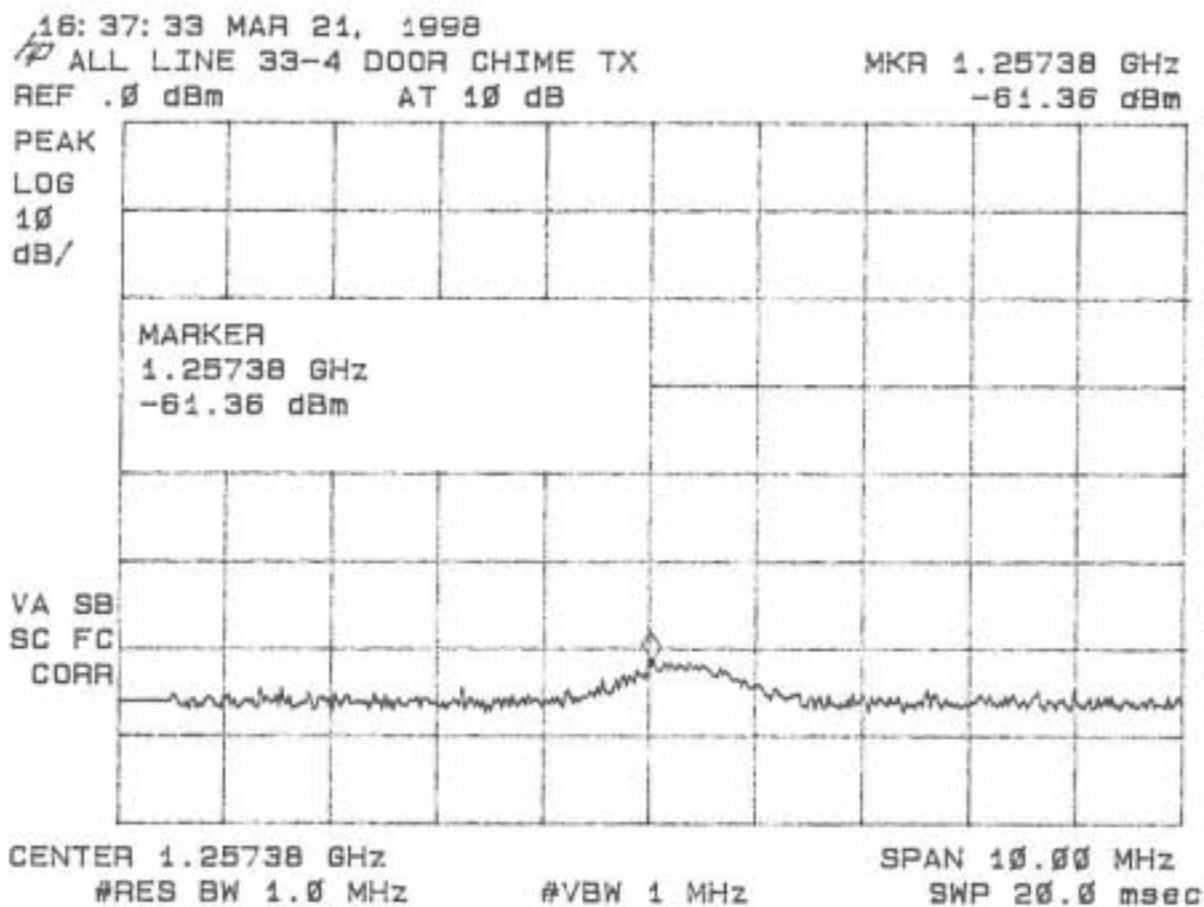


FIGURE 6D
SPURIOUS EMISSIONS 15.231(b)

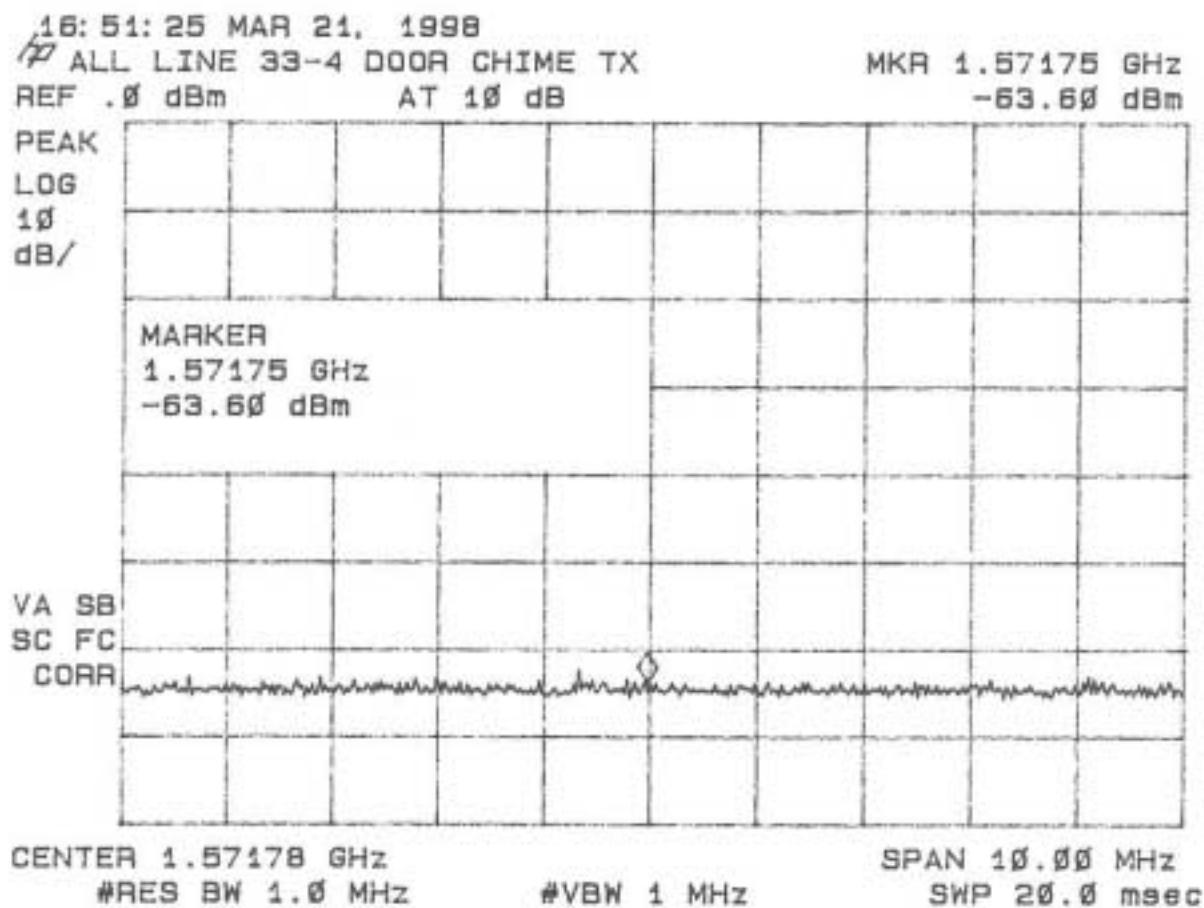

20 dB Bandwidth of Fundamental Emission (47 CFR 15.231c)

The peak 20 dB bandwidth measurement of the fundamental emission is shown in Table 6 and Figure 7.

TABLE 6
20 dB BANDWIDTH OF FUNDAMENTAL EMISSION

Test Date: March 21, 1998
UST Project: 01-0457
Customer: All-Line, Inc.
Model: R14-2T

FREQUENCY (MHz)	20 dB BANDWIDTH (KHz)	FCC LIMITS (KHz)
314.0	515.00	785

FCC Limit = (0.25%) (Center Frequency) = (0.0025)(314.0) = 785 KHz


Test Results

Reviewed by: 

Name: Timothy R. Johnson

FIGURE 7

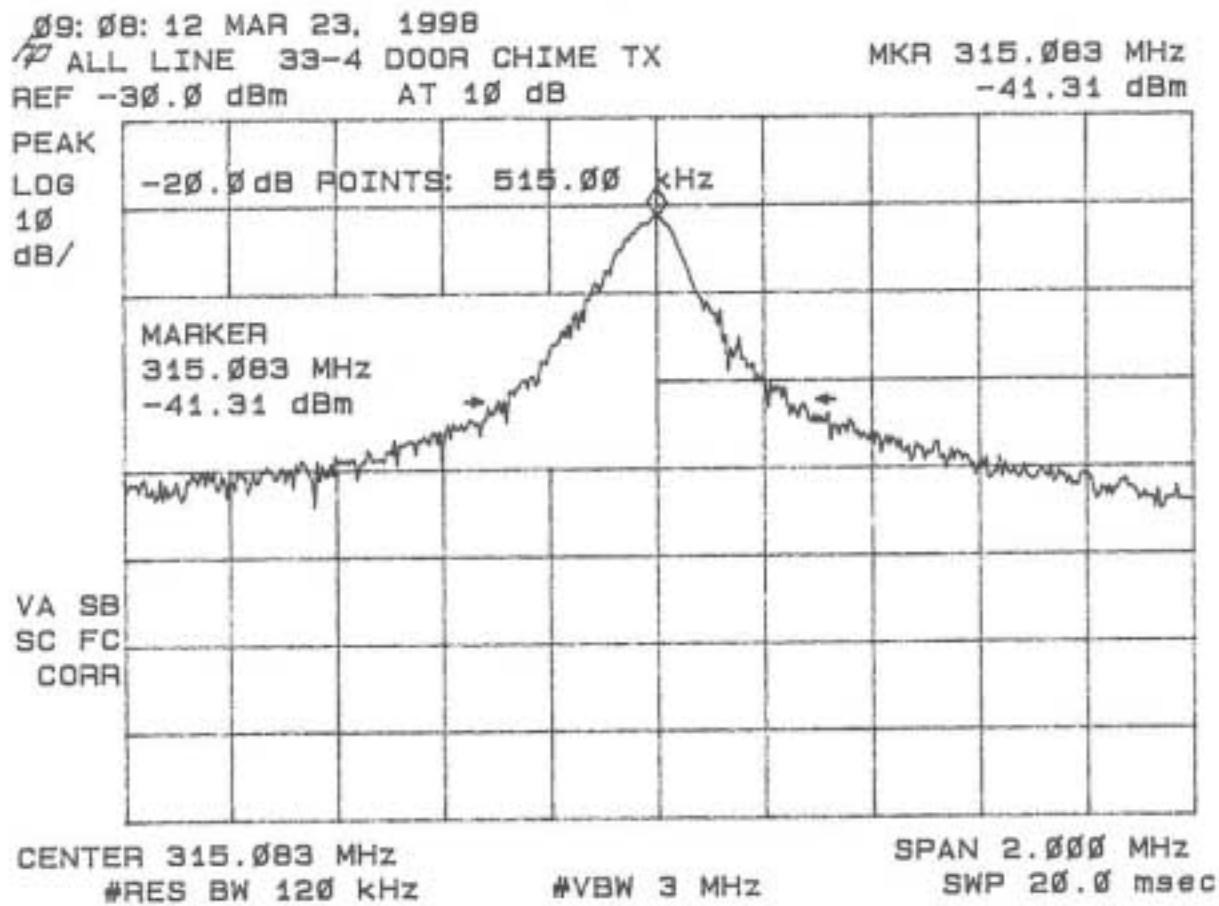20 dB BANDWIDTH OF FUNDAMENTAL EMISSION 15.231(c)



Frequency Tolerance of Carrier Signal (47 CFR 15.231d)

The EUT does not operate in the 40.66 - 40.70 MHz band, therefore frequency tolerance measurements were deemed unnecessary.

Radiated Emissions (47 CFR 15.109a)


Radiated emissions were evaluated from 30 to 1000 MHz. Measurements were made with the analyzer's bandwidth set to 120 kHz. Emissions are shown in Table 7.

TABLE 7

CLASS B
RADIATED EMISSIONS

Test Date: March 21, 1998
UST Project: 01-0457
Customer: All-Line, Inc.
Model: R14-2T

FREQ. (MHz)	TEST DATA (dBm) @ 3m	ANTENNA FACTOR + CABLE ATTENUATION	RESULTS (uV/m) @ 3m	FCC LIMITS (uV/m) @ 3m
NO EMISSIONS DETECTED WITHIN 10 dB OF THE FCC LIMITS				

Test Results
Reviewed by: 

Name: Timothy R. Johnson

Power Line Conducted Emissions (47 CFR 15.107a)

The EUT is operated by internal battery power only, therefore power line conducted emissions was deemed unnecessary.