

**CETECOM Inc.**



**CETECOM Inc.**

411 Dixon Landing Road, Milpitas, CA-95035, USA

Phone: +1 408 586 6200 Fax: +1 408 586 6299

www.cetecom.com

---

Issued test report consists of 51Pages

Page 1 (51)

---

<p><b>FCC LISTED, REG. NO.: 101450</b> <b>&amp;</b> <b>RECOGNIZED BY INDUSTRY CANADA</b> <b>IC – 3925</b></p>
---

**Test report no.:200FCC/2001**  
**FCC Part 15.247**  
**(SIMPLEFI)**

**Table of Contents****1 General information****1.1 Notes****1.2 Testing laboratory****1.3 Details of applicant****1.4 Application details****1.5 Test item****1.6 Test standards****2 Technical test****2.1 Summary of test results****2.2 Test report****1 General information****1.1 Notes**

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

**TEST REPORT PREPARED BY:**

**EMC & Radio Engineer: Harpreet Sidhu**

**1.2 Testing laboratory****CETECOM Inc.**

411 Dixon Landing Road, Milpitas, CA-95035, USA

Phone: +1 408 586 6200 Fax: +1 408 586 6299

E-mail: [lothar.schmidt@cetecomusa.com](mailto:lothar.schmidt@cetecomusa.com)

Internet: [www.cetecom.com](http://www.cetecom.com)

**1.3 Details of applicant**

**Name** : Simple Devices Inc.  
**Street** : 111 Anza Blvd, #120  
**City** : Burlingame, CA-94010  
**Country** : USA  
**Contact** : Nick Kalayjian  
**Telephone** : 650 373 7234  
**Telefax** : 650 342 7924  
**e-mail** : [nick@simpledevices.com](mailto:nick@simpledevices.com)

**1.4 Application details**

Date of receipt of application : 2001-10-12  
Date of receipt of test item : 2001-10-17  
Date of test : 2001-10-17

**1.5 Test item**

**Manufacturer** : Applicant  
**Name of EUT** : SIMPLEFI  
**Description** : [MP3 Player with wireless network](#)  
**Model No.** : SIMPLEFI  
**Serial No.** : SIMPLEFI-0069  
**FCC ID** :

**Additional informations**

**Frequency** : 2.4 – 2.48 GHz  
**Type of modulation** : Home RF  
**Number of channels** : 75  
**Antenna** : Internal Dipole  
**Power supply** : 6VDC  
**Output power** : 100mW

**1.6 Test standards: FCC Part 15 §15.247**

**2 Technical test****2.1 Summary of test results**

**No deviations from the technical specification(s) were ascertained in the course of the tests performed.**

**Technical responsibility for area of testing :**

**2001-10-31****EMC & Radio****Lothar Schmidt**

---

**Date****Section****Name****Signature**

**2.2 Testreport**

**TEST REPORT**

**Test report no. : 200FCC/2001  
(SIMPLEFI)**

**TEST REPORT REFERENCE****LIST OF MEASUREMENTS**

<b>Paragraph</b>	<b>PARAMETER TO BE MEASURED</b>	<b>PAGE</b>
	<b>Transmitter parameters</b>	
§ 15.204	Antenna gain	7
§ 15.247 (a)	Carrier frequency separation	8
§ 15.247 (a)	Number of hopping channels	9
§ 15.247 (a)	Time of occupancy (dwell time)	13
§ 15.247 (a)(1)	Spectrum Bandwidth of a FHSS System	14
§ 15.247 (b)(2)	Maximum peak output power	18
§15.247	Band edge compliance	23
§ 15.247 (c)(1)	Emission limitations	25
§ 15.107/207	AC Line Conducted Emission	41
	<b>Receiver parameters</b>	
§ 15.209	Spurious radiations - Radiated	43
	Test equipment listing	48

**Antenna Gain**

**SUBCLAUSE § 15.204**

**The max gain is +4.11dBi**

**(measured effective radiated power – measured conducted power with a temporary RF-connector)**

**§15.247(a)**




NUMBER OF HOPPING CHANNELS


§15.247(a)

The number of hopping channels is 75 (see next 4 plots)  
The right red line corresponds to the left red line from the next plot.


Plot 1: Total 22

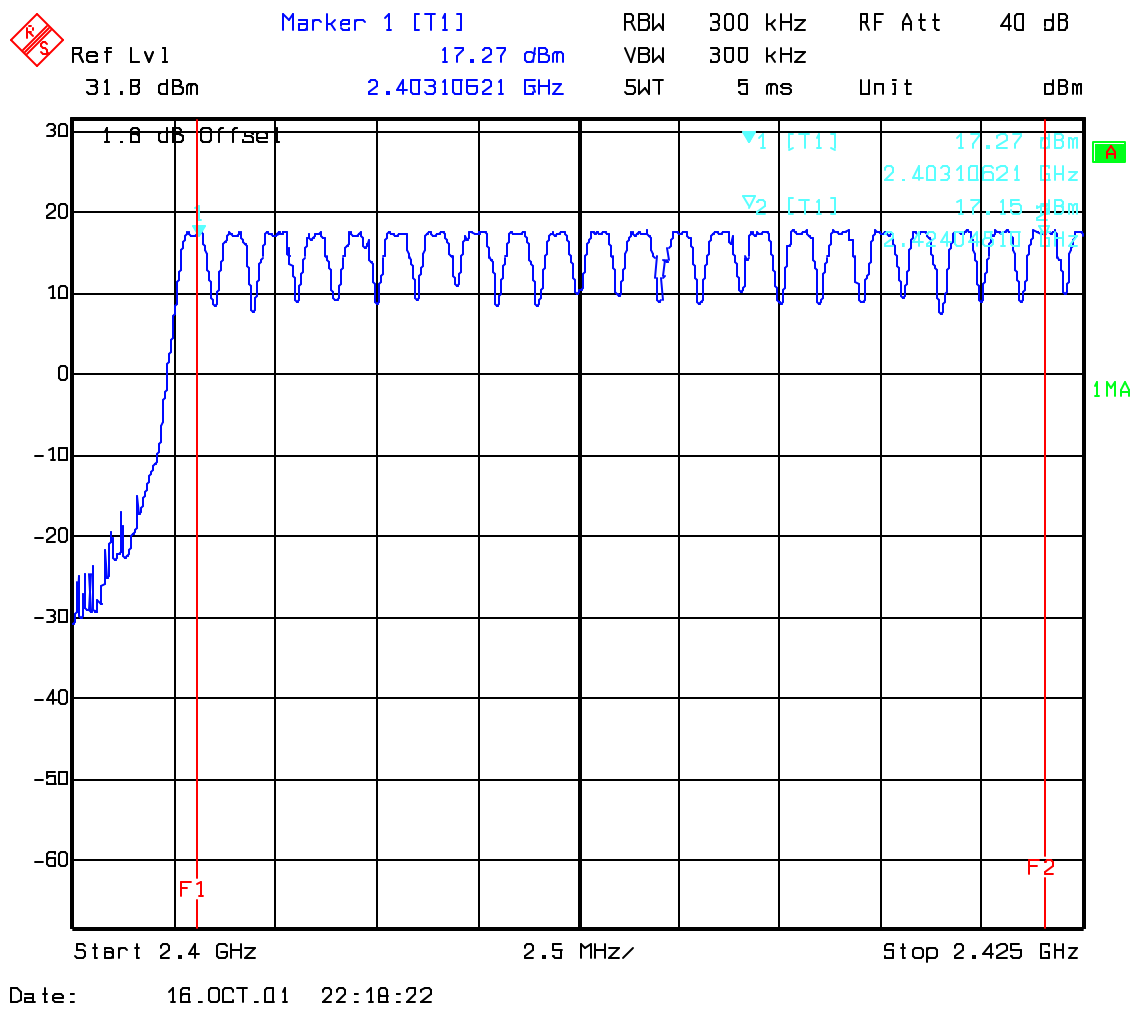


Plot 2: Total 25

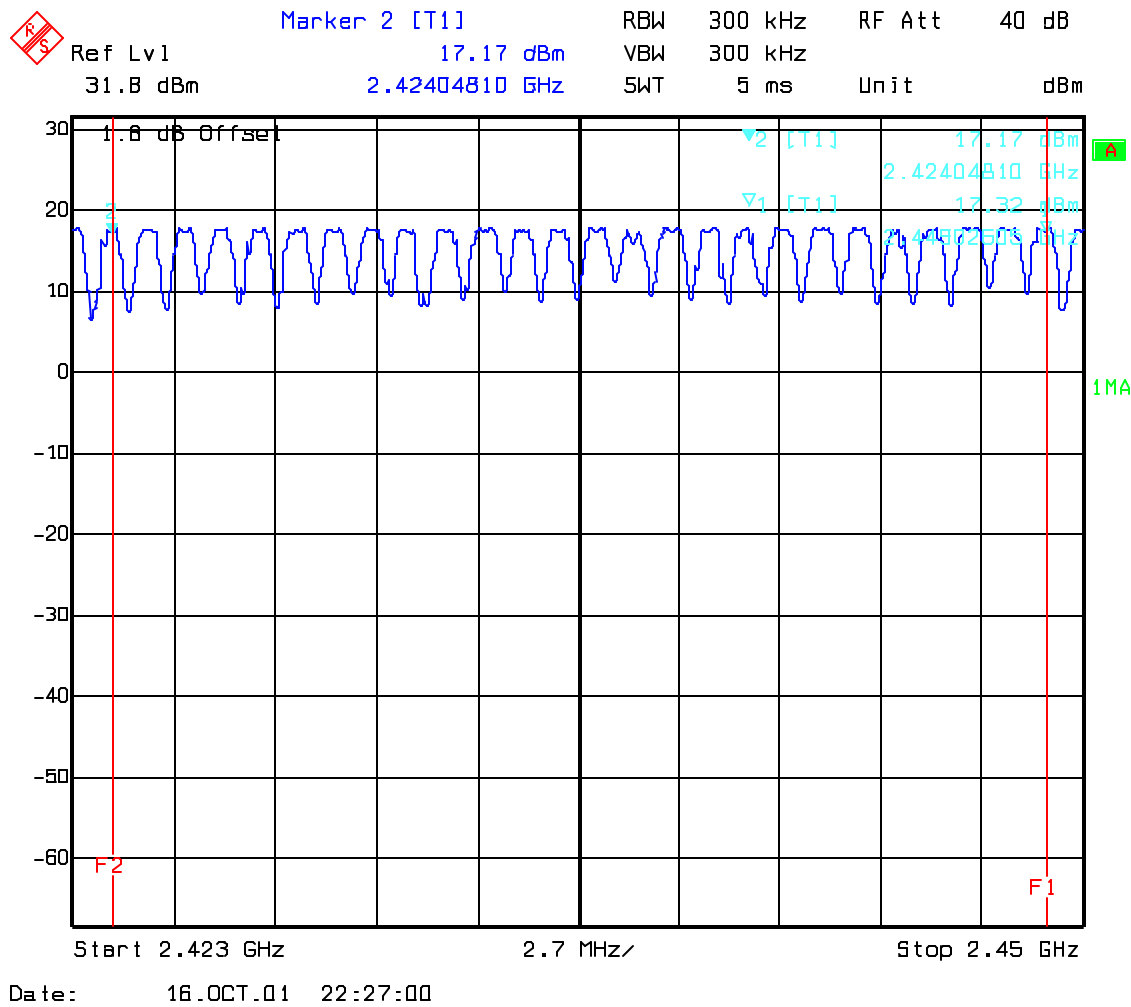

Plot 3: Total 19

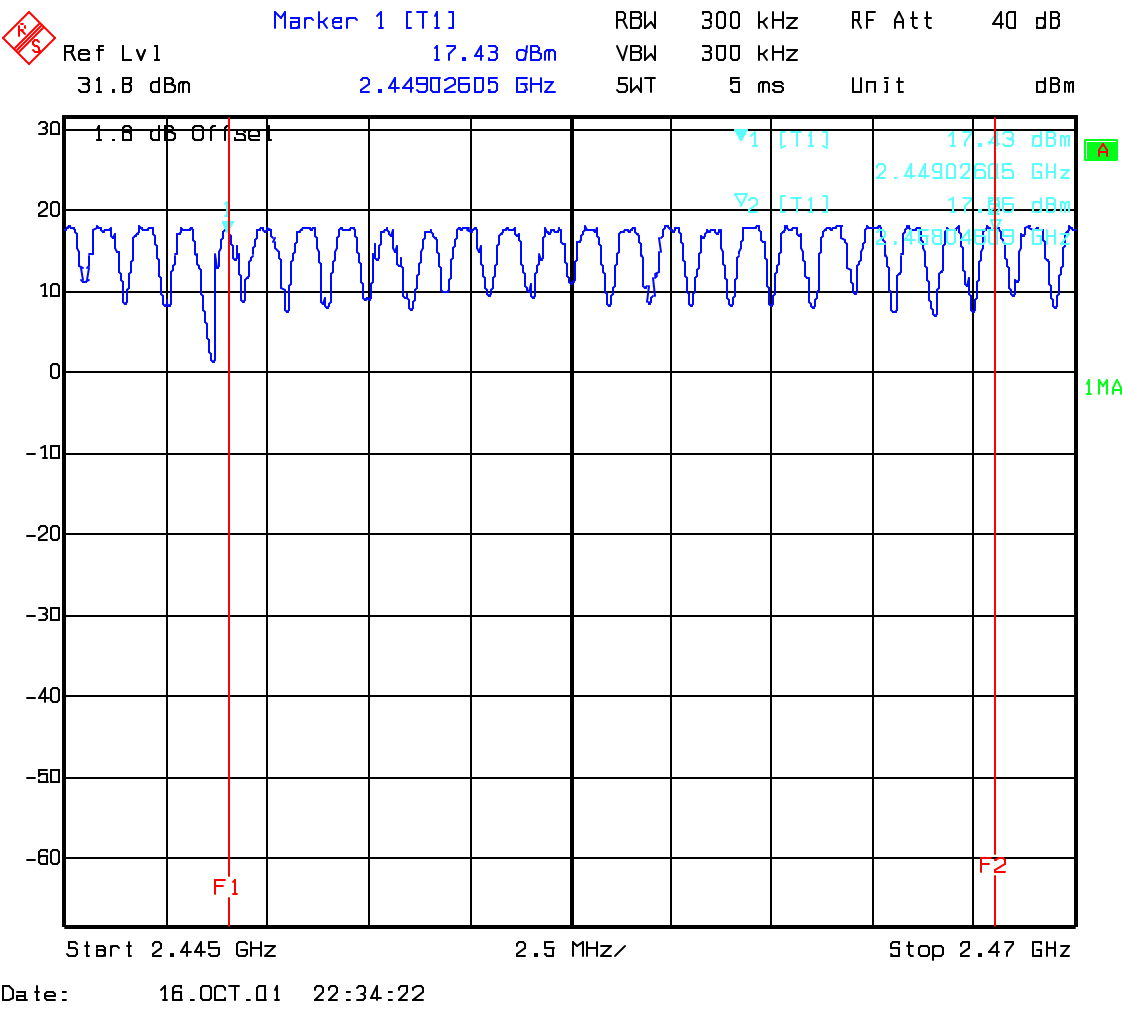

Plot 4: Total 9

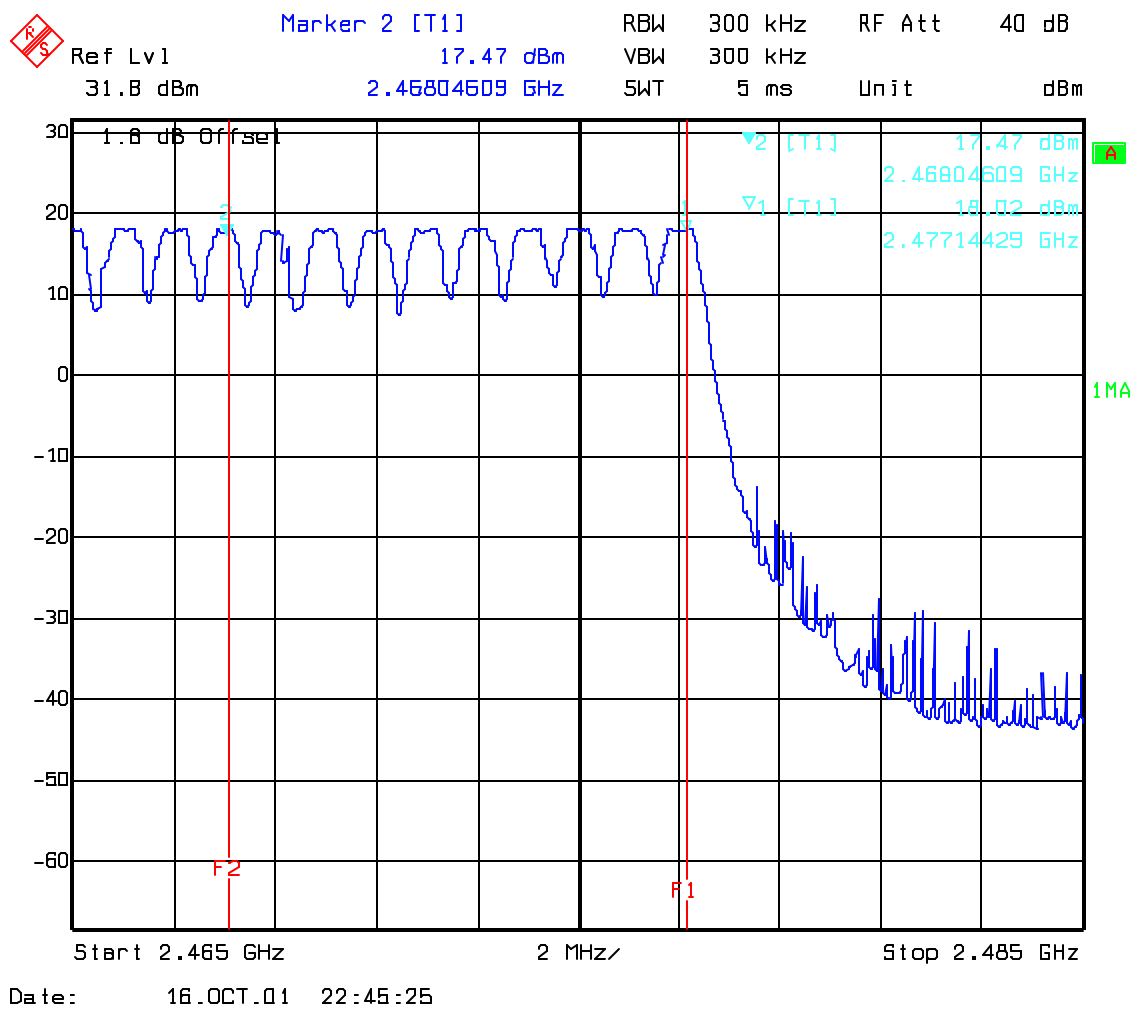


## TIME OF OCCUPANCY (DWELL TIME) FOR DH1

§15.247(a)

The system makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 75 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 800 hops per second with 75 channels. So you have each channel 10.66 times per second and so for 30 seconds you have 319.8 times of appearance .

Each Tx-time per appearance is 372.48 µs.

So we have  $319.8 * 372.48 \mu s = 119.12 \text{ ms}$  per 30 seconds.

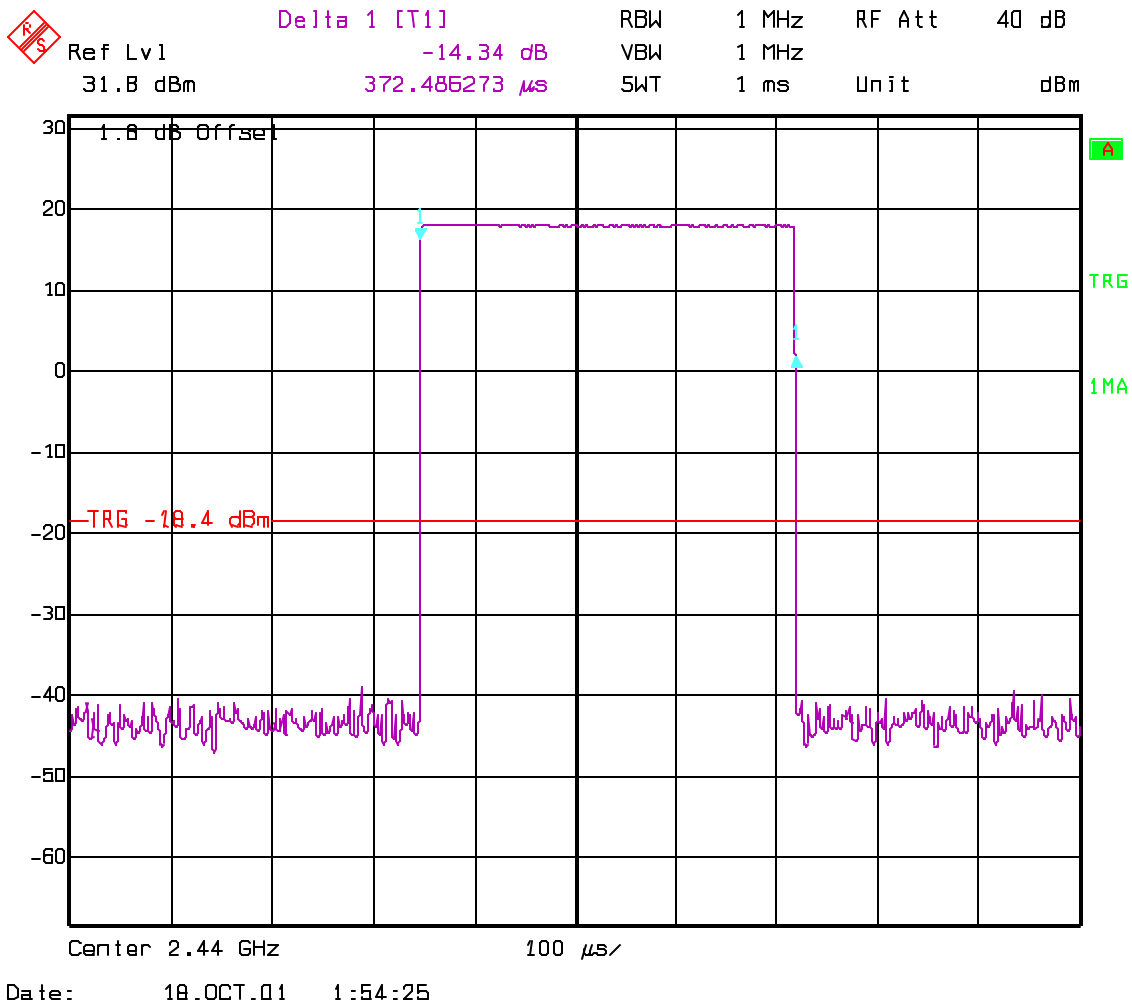

**SPECTRUM BANDWIDTH OF FHSS SYSTEM****§15.247(a)****20 dB bandwidth**

TEST CONDITIONS		20 dB BANDWIDTH ( kHz )		
Frequency (MHz)		2403	2440	2477
T <sub>nom</sub> ( 23 ) C	V <sub>nom</sub> (6)V	845.69	901.80	841.68
Measurement uncertainty		±3dB		


**RBW / VBW as provided in the "Measurement Guidelines" (DA 00-705, March 30, 2000)****LIMIT****SUBCLAUSE §15.247(a) (1)****The maximum 20dB bandwidth shall be at maximum 1000 KHz**

SPECTRUM BANDWIDTH OF FHSS SYSTEM

20 dB bandwidth

§15.247(a)


Lowest Channel: 2403MHz

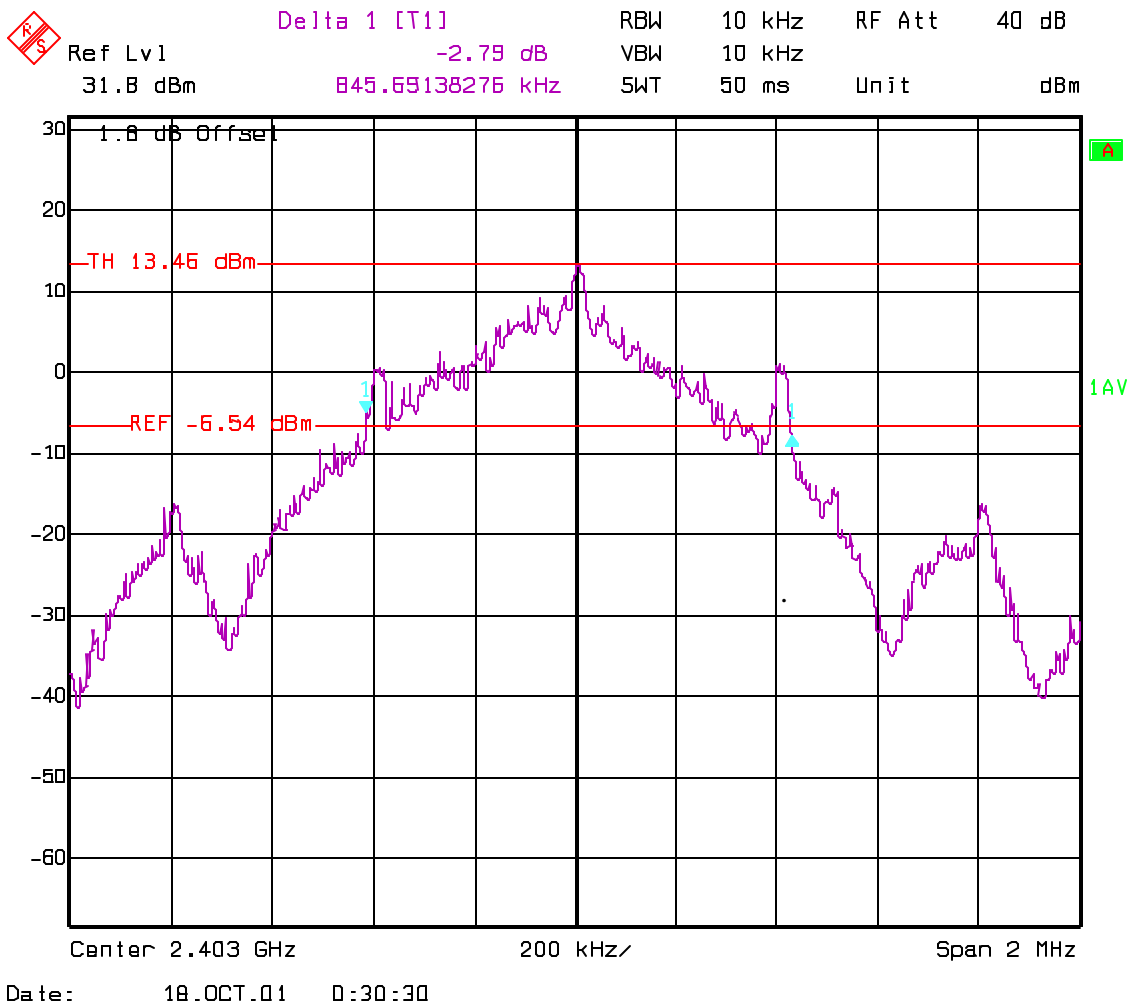

SPECTRUM BANDWIDTH OF FHSS SYSTEM  
20 dB bandwidth

§15.247(a)

Mid Channel: 2440MHz

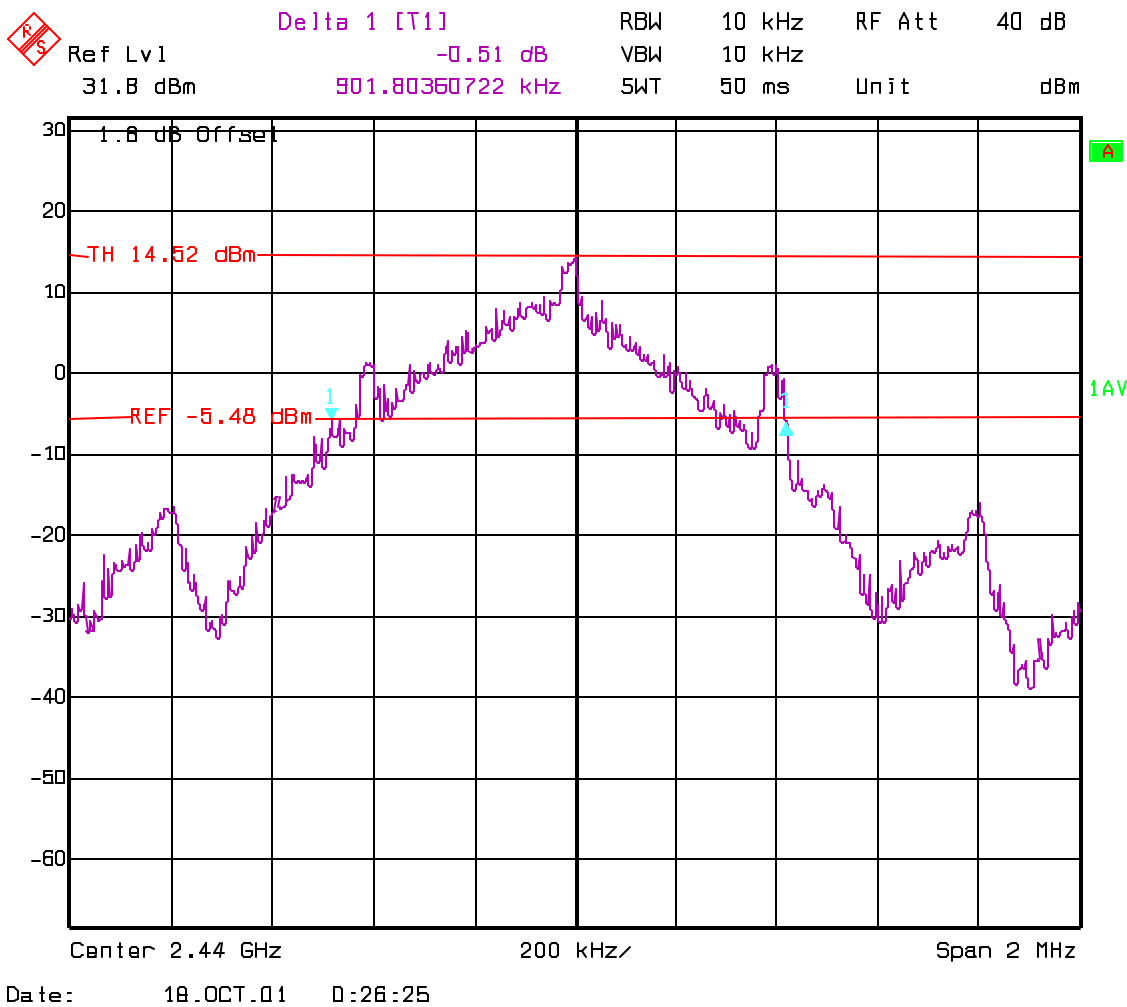


SPECTRUM BANDWIDTH OF FHSS SYSTEM

20 dB bandwidth

§15.247(a)

Highest Channel: 2477MHz

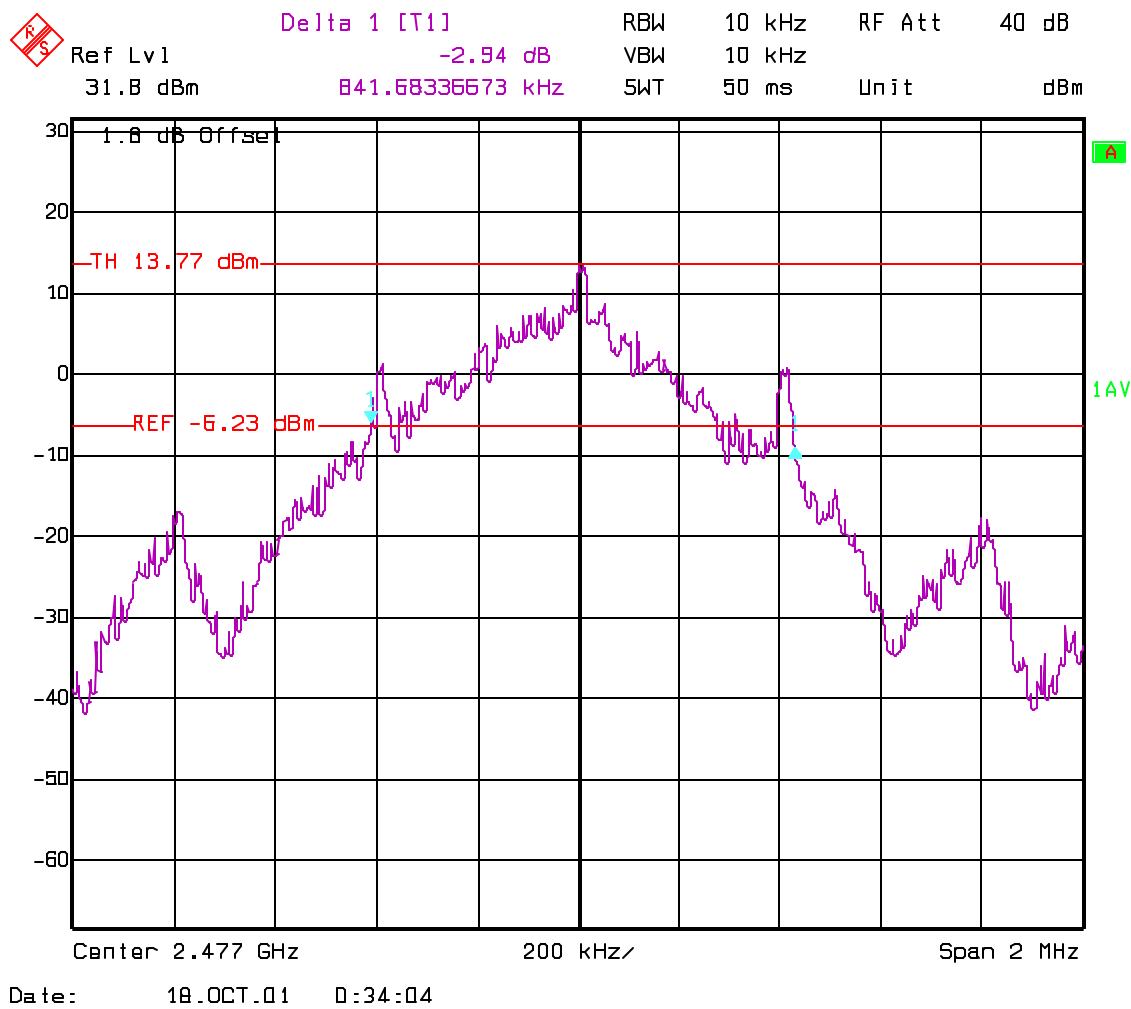

**MAXIMUM PEAK OUTPUT POWER  
(conducted)****SUBCLAUSE § 15.247 (b) (1)**

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)			
Frequency (MHz)			2403	2440	2477
T <sub>nom</sub> ( 23 ) C	V <sub>nom</sub> (6)V	PK	17.80	18.01	18.25
Measurement uncertainty		±3dB			

**RBW / VBW : 3 MHz****LIMIT****SUBCLAUSE § 15.247 (b) (1)**

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt

**§15.247 (b)**

Ref Lvl 31.8 dBm

Marker 1 [T1] 17.80 dBm

RBW 3 MHz

VBW 3 MHz

RF Att 40 dB

31.8 dBm

2.40290982 GHz

5W

5 ms

Unit dBm

1.8 dB Offset

17.80 dBm

2.403 GHz

1 MHz

Span 10 MHz

1.8 dB Offset

17.80 dBm

2.403 GHz

1 MHz

Span 10 MHz

Date: 18.OCT.01 0:03:57

**§15.247 (b)**

Ref Lvl 31.8 dBm  
Marker 1 [T1] 18.01 dBm  
2.43978958 GHz  
RBW 3 MHz  
VBW 3 MHz  
5WT 5 ms  
RF Att 40 dB  
Unit dBm

1.8 dB Offset


Center 2.44 GHz 1 MHz/ Span 10 MHz

Date: 18.OCT.01 0:18:32

PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b)

Highest Channel: 2477MHz

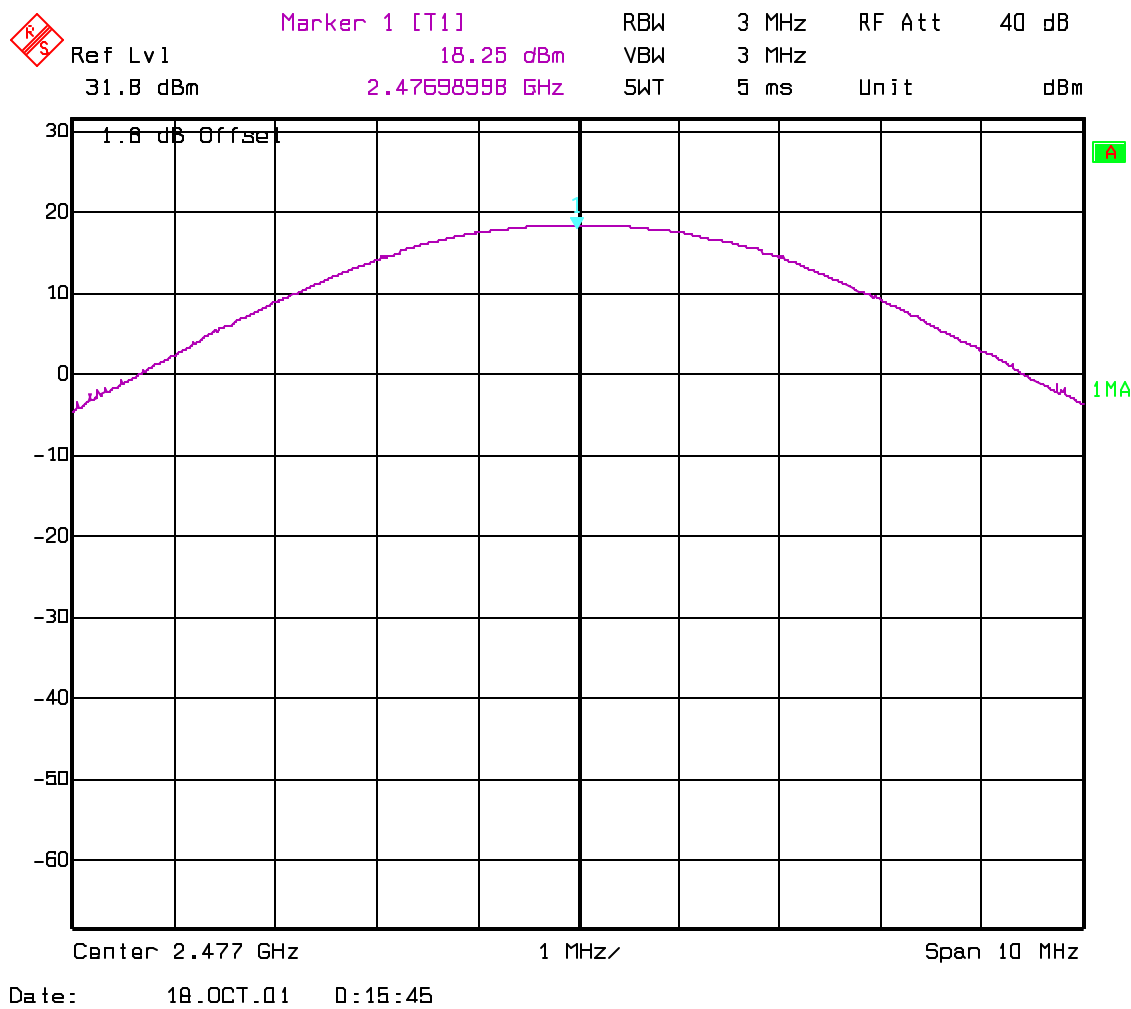

**MAXIMUM PEAK OUTPUT POWER  
(RADIATED)****SUBCLAUSE § 15.247 (b) (1)****EIRP:**

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2403	2440	2477
<b>T<sub>nom</sub>( 23 ) C</b>	<b>V<sub>nom</sub>(6)V</b>	<b>21.91</b>	<b>21.90</b>	<b>22.60</b>
Measurement uncertainty		±3dB		


**RBW/VBW : 1 MHz****LIMIT****SUBCLAUSE § 15.247 (b) (1)**

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt

BAND EDGE COMPLIANCE OF CONDUCTED EMISSIONS

§15.247 (c)

Low frequency section  
(valid for both hopping ON & OFF)

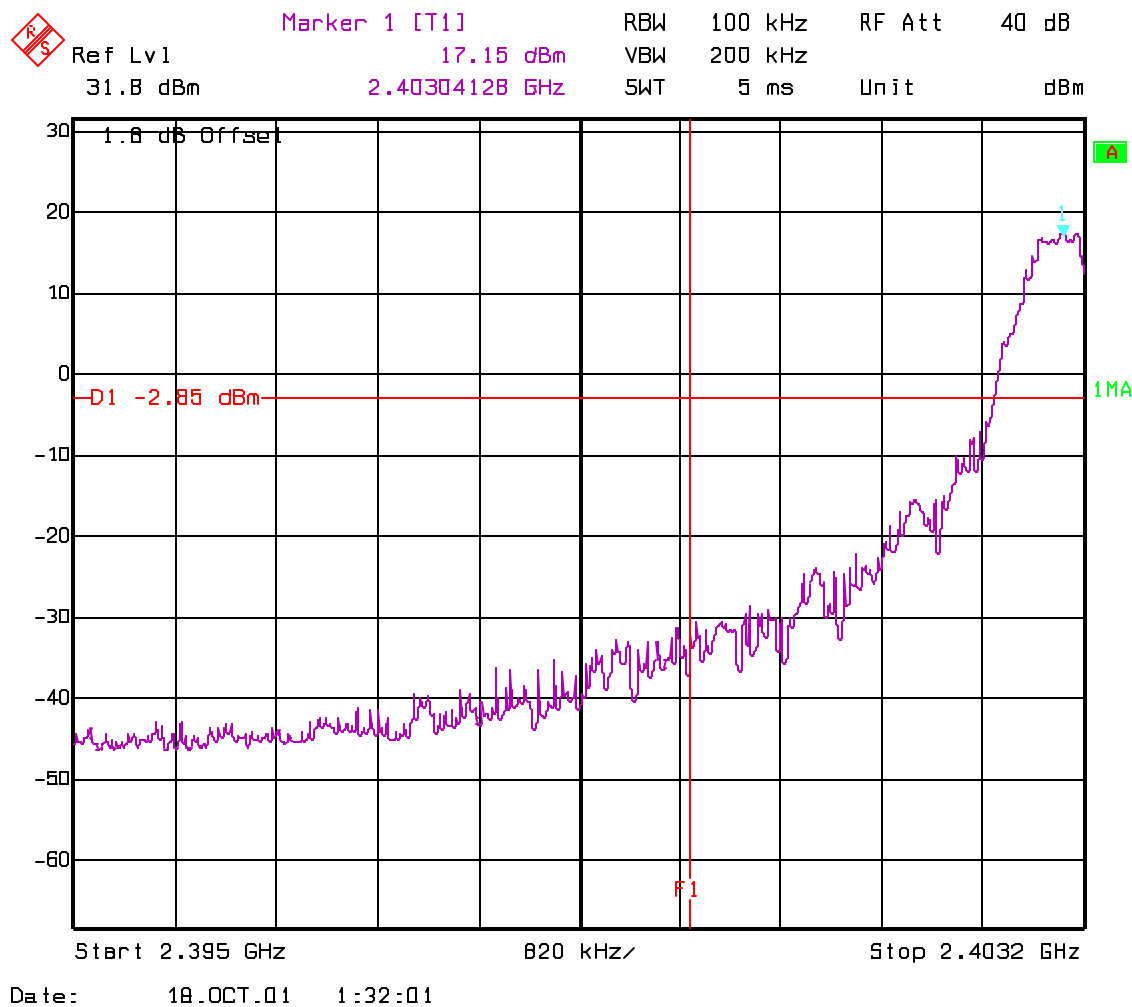


**BAND EDGE COMPLIANCE OF CONDUCTED EMISSIONS**

§15.247 (c)

**high frequency section**

**(valid for both hopping ON & OFF)**

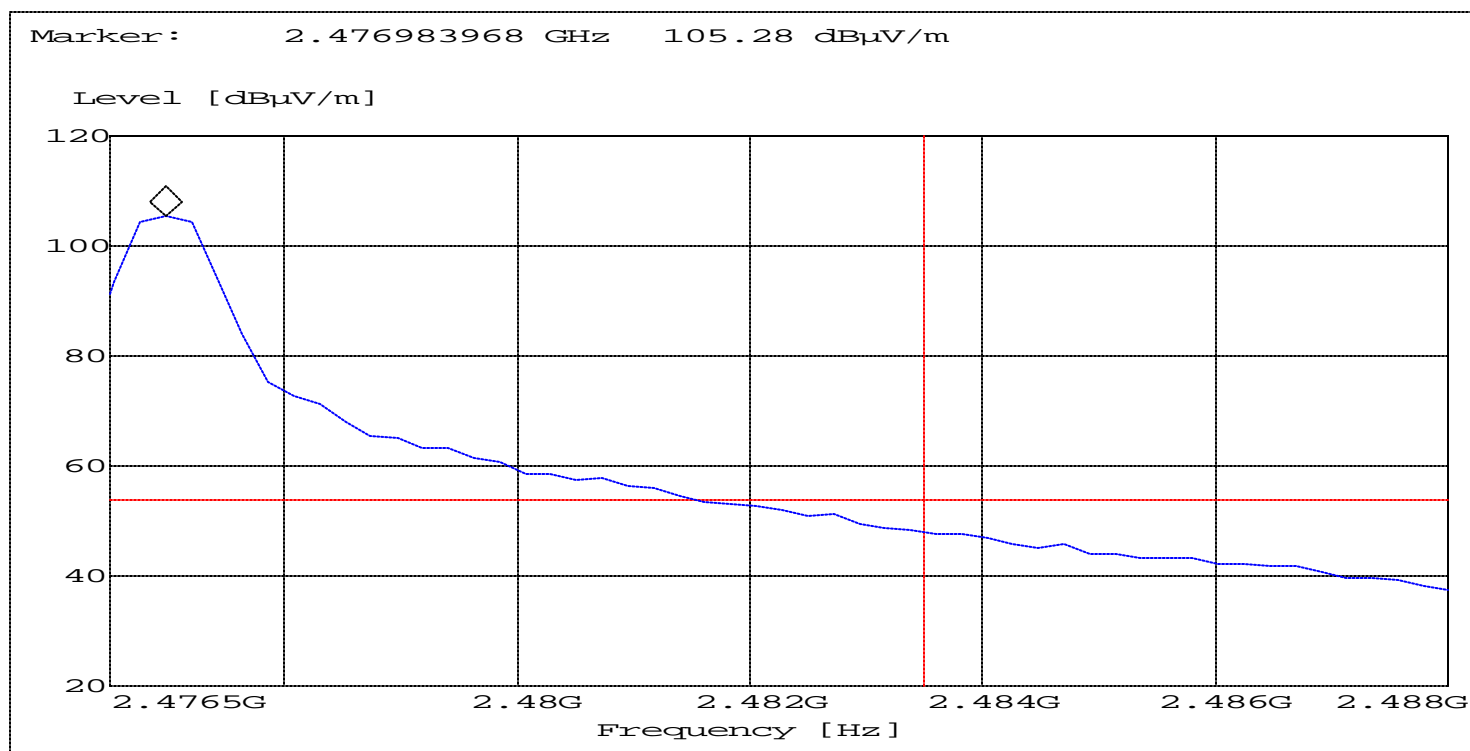

**EMISSION LIMITATIONS - Conducted (Transmitter)**

**§ 15.247 (c) (1)**

**LIMITS**

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**NOTE:** Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.

**§ 15.247 (c) (1)**

Ref Lvl 31.8 dBm  
 Marker 1 [T1] 4.09 dBm  
 RBW 100 kHz  
 VBW 100 kHz  
 5WT 6.4 s  
 RF Att 40 dB  
 Unit dBm

1.8 dB Offset  
 -D1 -15.91 dBm  
 1 mA

Start 30 MHz  
 2.497 GHz  
 Stop 25 GHz

Date: 18.OCT.01 1:27:43

**NOTE:** The peak above the limit line is the carrier frequency.

**§ 15.247 (c) (1)**

RBW 100 kHz RF Att 40 dB  
 Ref Lvl 31.8 dBm VBW 100 kHz  
 5WT 6.4 s Unit dBm

Marker 1 [T1]  
 15.34 dBm  
 2.43192385 GHz

1.6 dB Offset  
 -4.66 dBm

Start 30 MHz 2.497 GHz/ Stop 25 GHz

Date: 18.OCT.01 1:25:25

**NOTE: The peak above the limit line is the carrier frequency.**

**§ 15.247 (c) (1)**

Ref Lvl 31.8 dBm

Marker 1 [T1] 4.51 dBm

RBW 100 kHz

VBW 100 kHz

RF Att 40 dB

5WT 6.4 s

Unit dBm

1.8 dB Offset

D1 -15.49 dBm

Start 30 MHz

2.497 GHz

Stop 25 GHz

Date: 18.OCT.01 1:18:25

**NOTE:** The peak above the limit line is the carrier frequency.

**EMISSION LIMITATIONS - Radiated (Transmitter)****SUBCLAUSE § 15.247 (c) (1)****LIMITS**

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 18 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.
2. Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.


**Results for the radiated measurements below 30MHz according § 15.33**

Frequency	Measured values	Remarks
10KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels

## EMISSION LIMITATIONS - Radiated (Transmitter)

## SUBCLAUSE § 15.247 (c) (1)

Lowest Channel(2403MHz): 30MHz – 1GHz

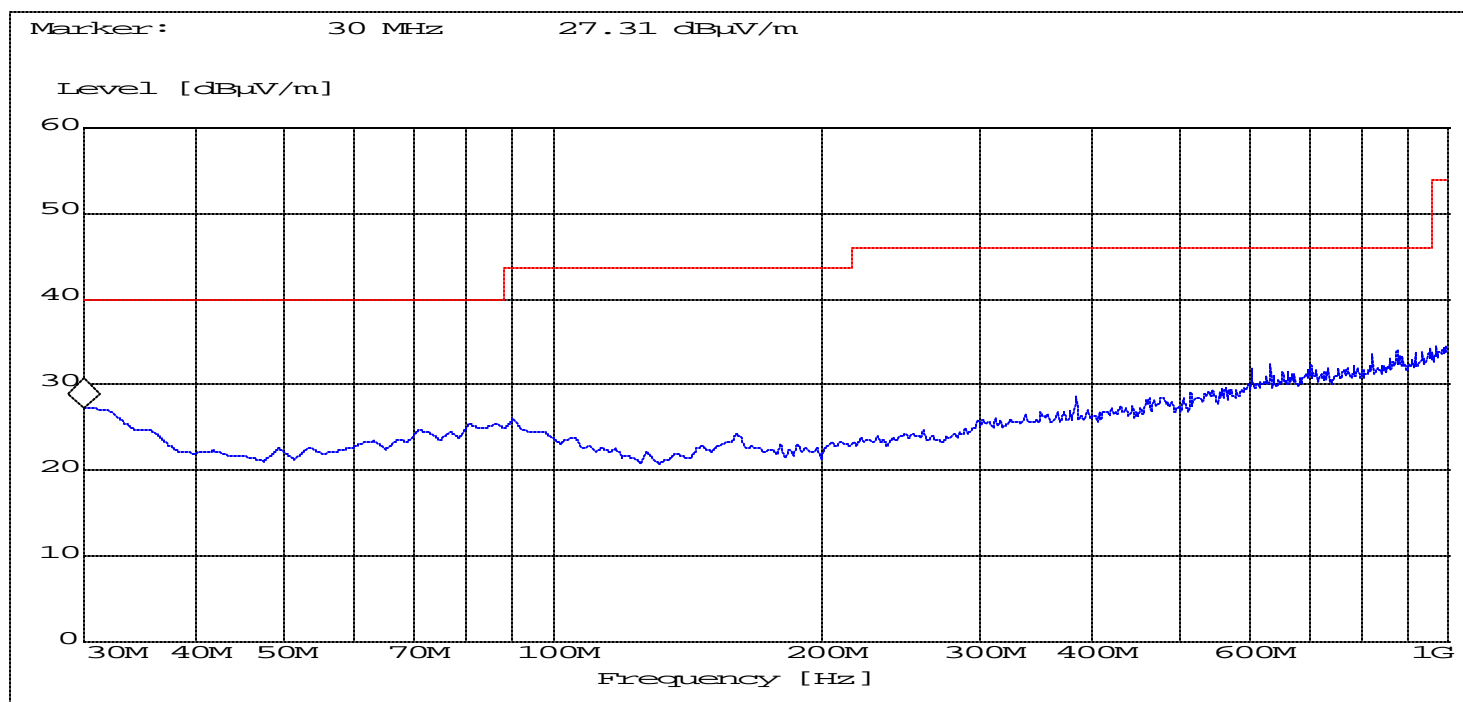


ANALYZER SETTINGS: RBW = 100KHz VBW = 100KHz

## EMISSION LIMITATIONS - Radiated (Transmitter)

## SUBCLAUSE § 15.247 (c) (1)

Lowest Channel(2403MHz): 1GHz – 3GHz

NOTE: The peak above the limit line is the carrier frequency.

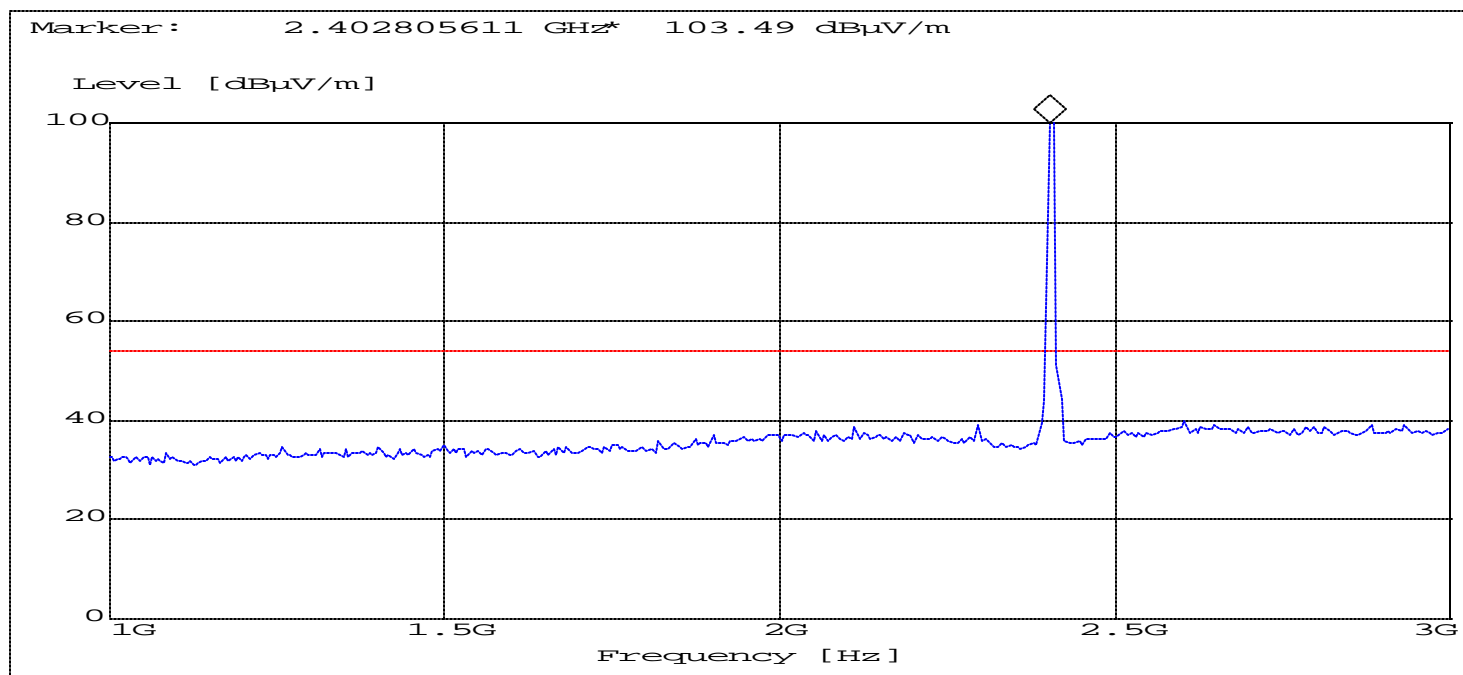


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

## EMISSION LIMITATIONS - Radiated (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

Lowest Channel(2403MHz): 3GHz – 8GHz

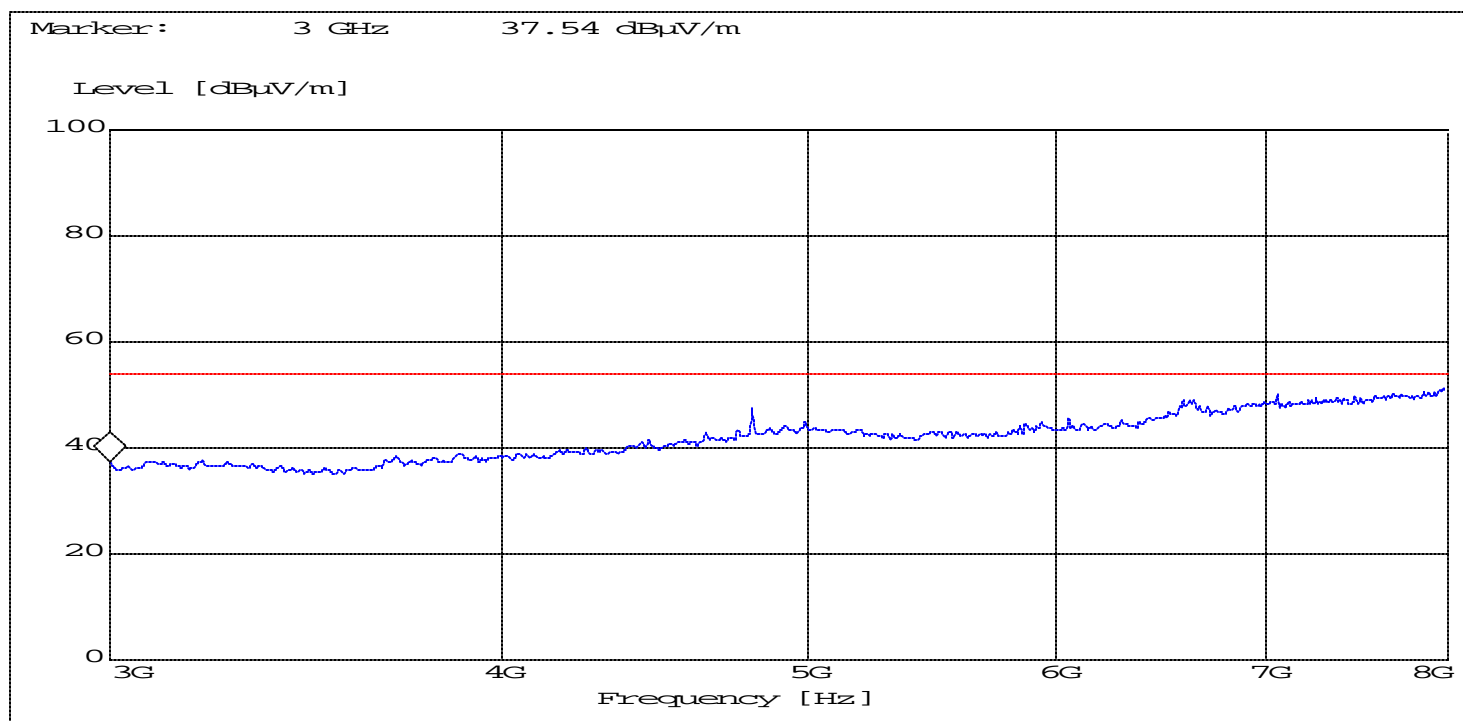


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

## EMISSION LIMITATIONS - Radiated (Transmitter)

## SUBCLAUSE § 15.247 (c) (1)

Mid Channel(2440MHz): 30MHz – 1GHz

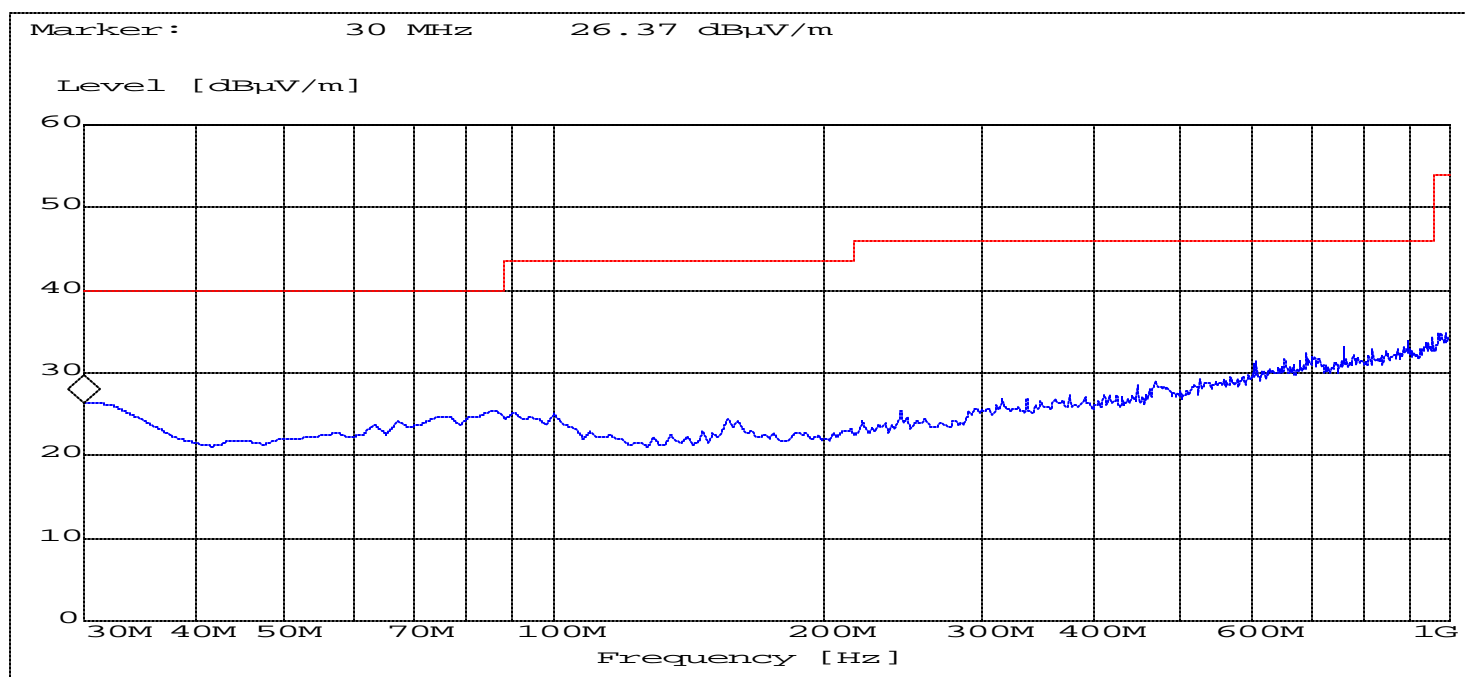


ANALYZER SETTINGS: RBW = 100KHz VBW = 100KHz

## EMISSION LIMITATIONS - Radiated (Transmitter)

## SUBCLAUSE § 15.247 (c) (1)

Mid Channel(2440MHz): 1GHz – 3GHz

NOTE: The peak above the limit line is the carrier frequency.

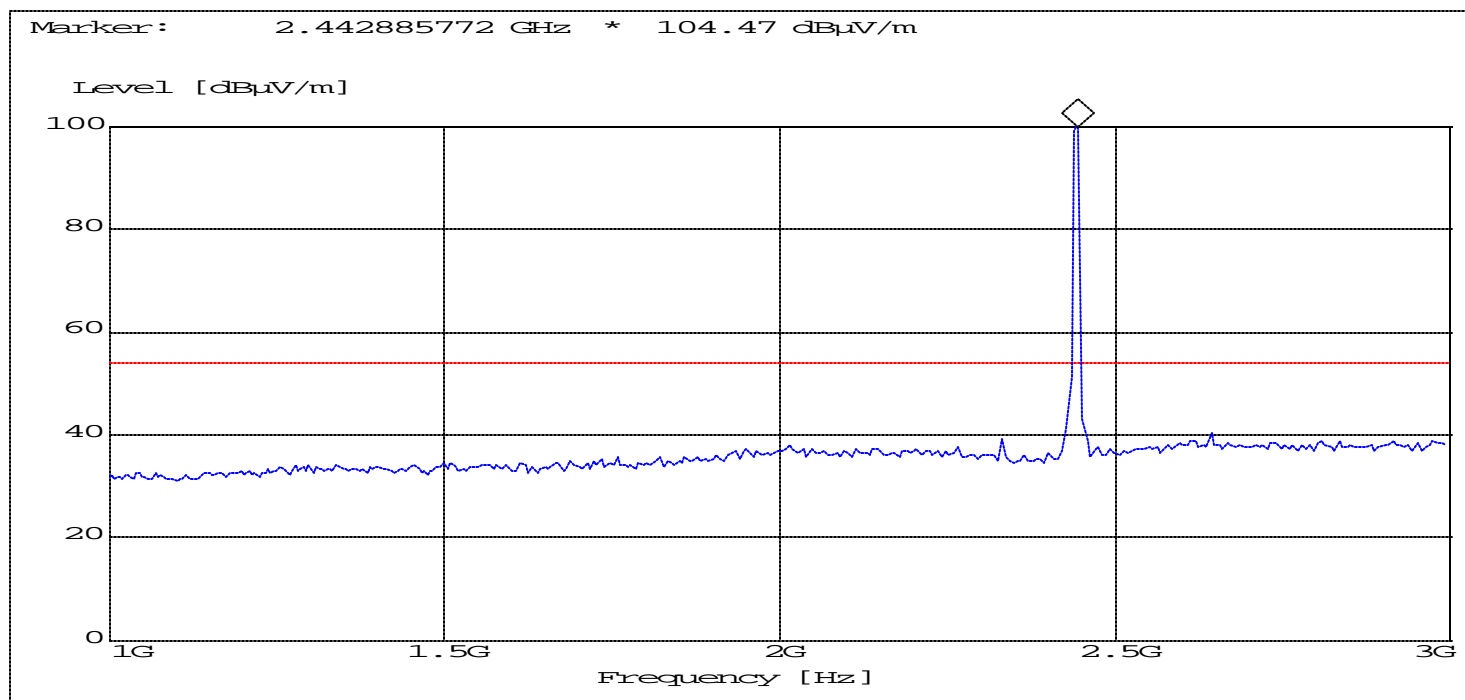


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

## EMISSION LIMITATIONS - Radiated (Transmitter)

## SUBCLAUSE § 15.247 (c) (1)

Mid Channel(2440MHz): 3GHz – 8GHz

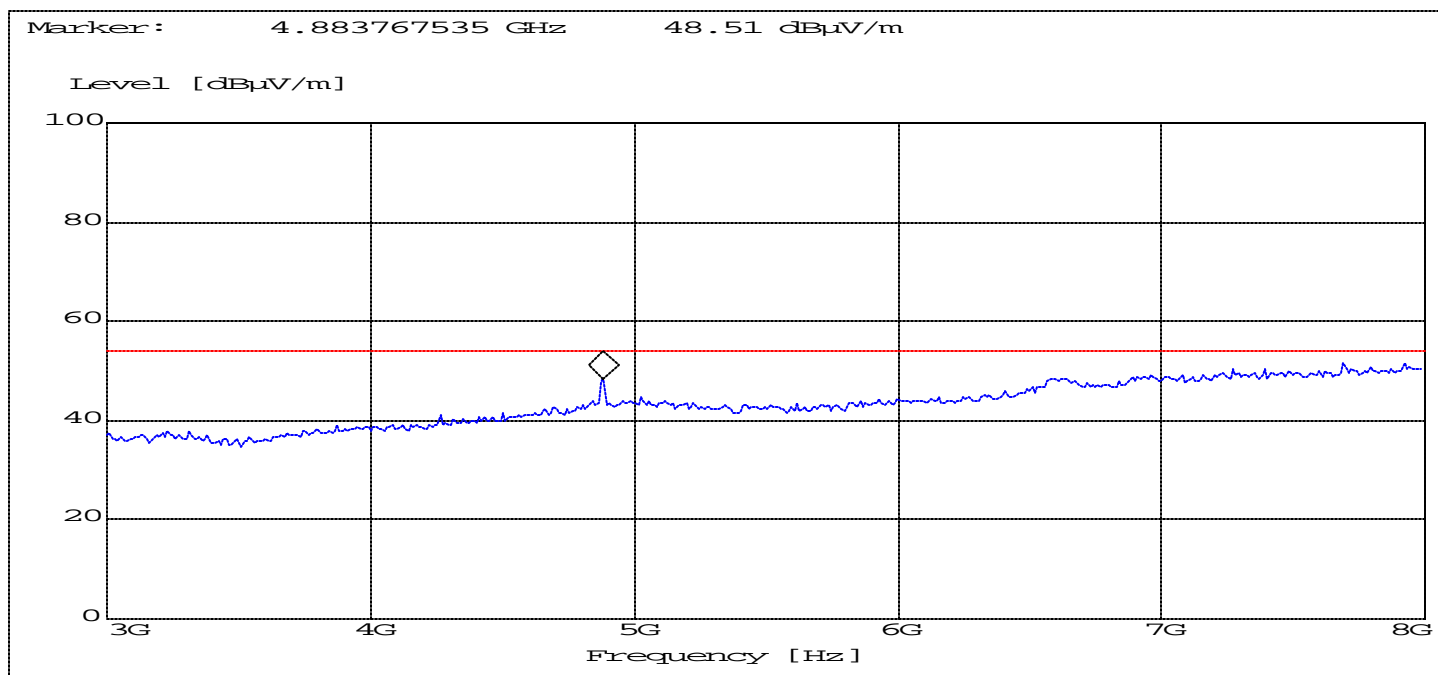


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

## EMISSION LIMITATIONS - Radiated (Transmitter)

SUBCLAUSE § 15.247 (c) (1)

Highest Channel(2477MHz): 30MHz – 1GHz

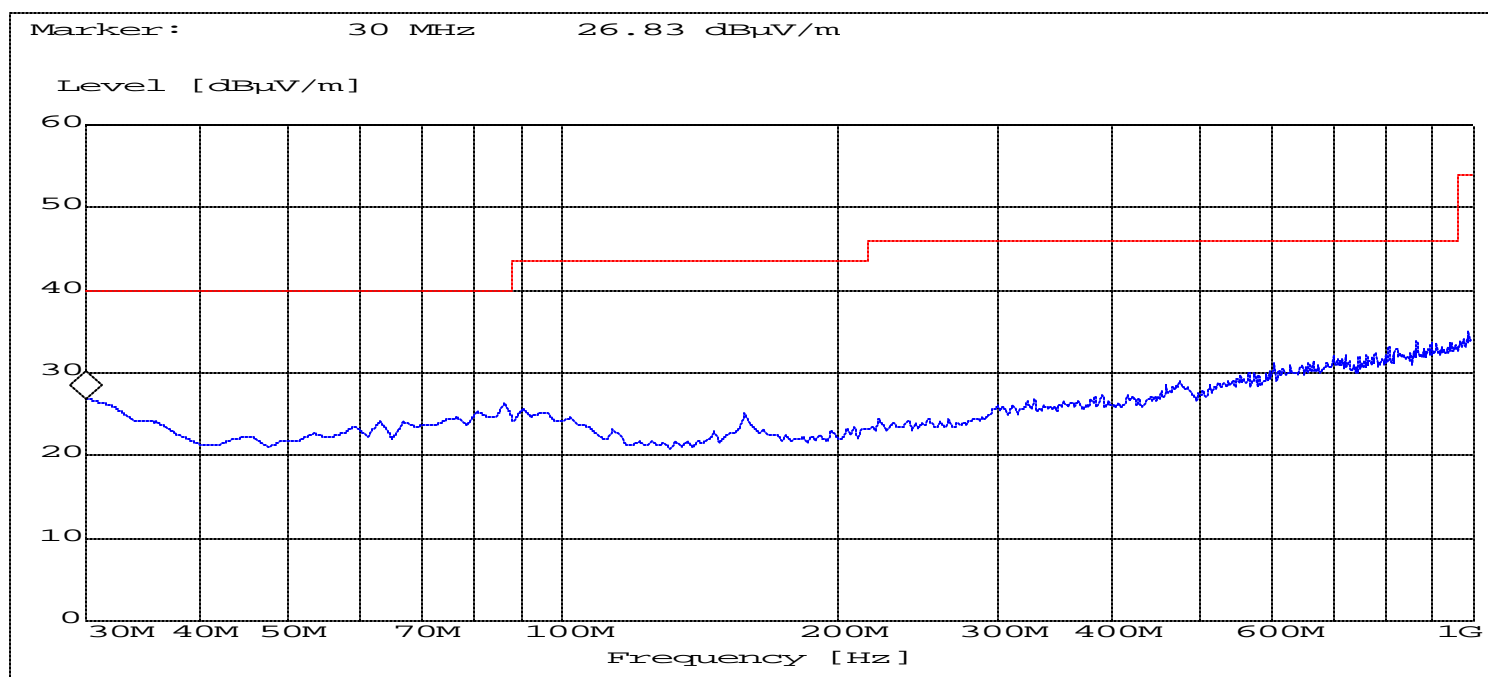


ANALYZER SETTINGS: RBW = 100KHz VBW = 100KHz

## EMISSION LIMITATIONS - Radiated (Transmitter)

## SUBCLAUSE § 15.247 (c) (1)

Highest Channel(2477MHz): 1GHz – 3GHz

NOTE: The peak above the limit line is the carrier frequency.

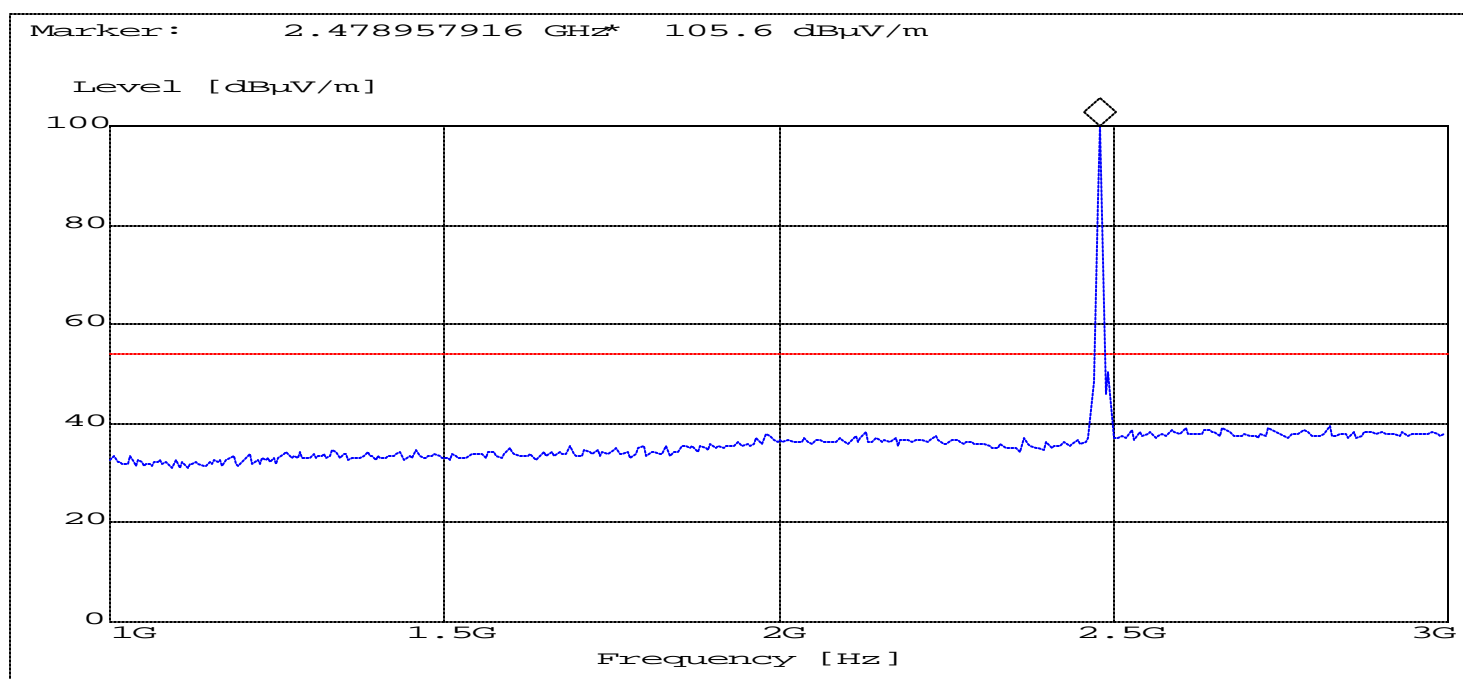


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

## EMISSION LIMITATIONS - Radiated (Transmitter)

## SUBCLAUSE § 15.247 (c) (1)

Highest Channel(2477MHz): 3GHz – 8GHz

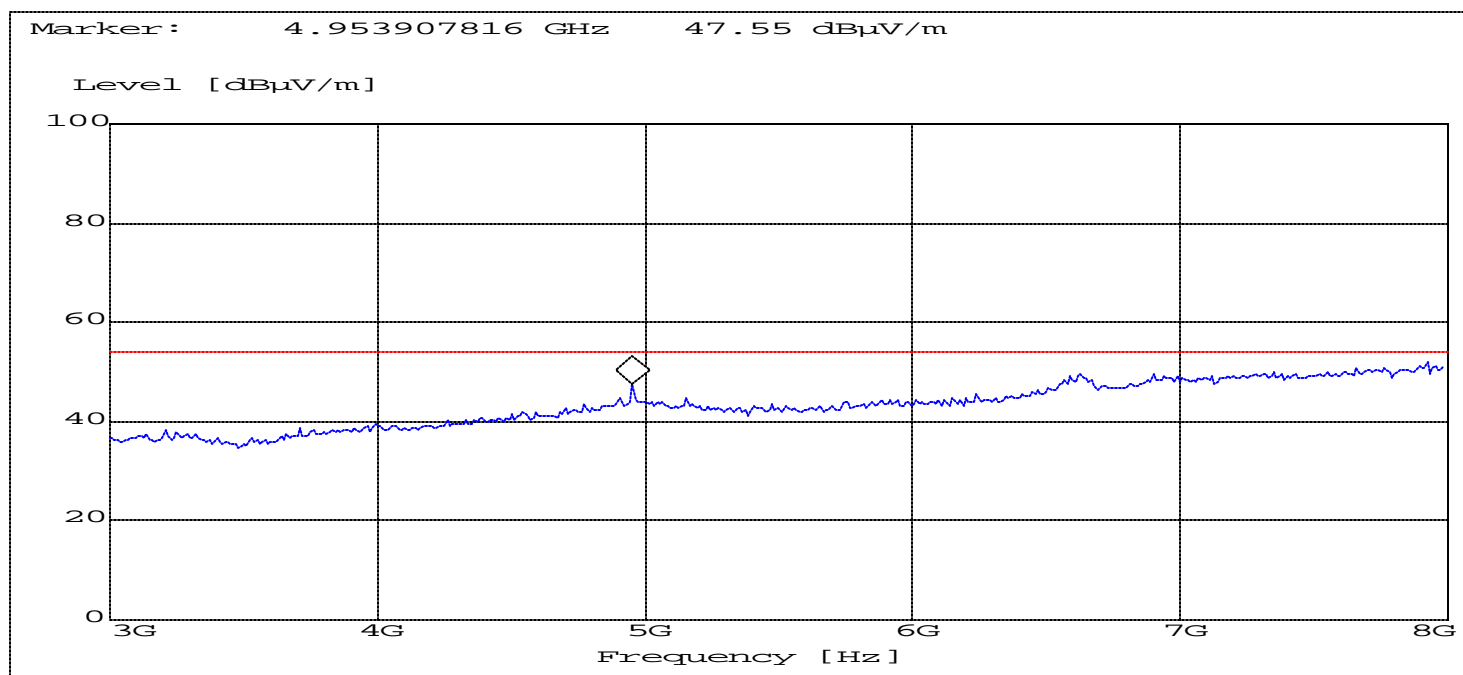


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

## EMISSION LIMITATIONS - Radiated (Transmitter)

## SUBCLAUSE § 15.247 (c) (1)

8GHz – 18GHz

(This plot is valid for all three channels)

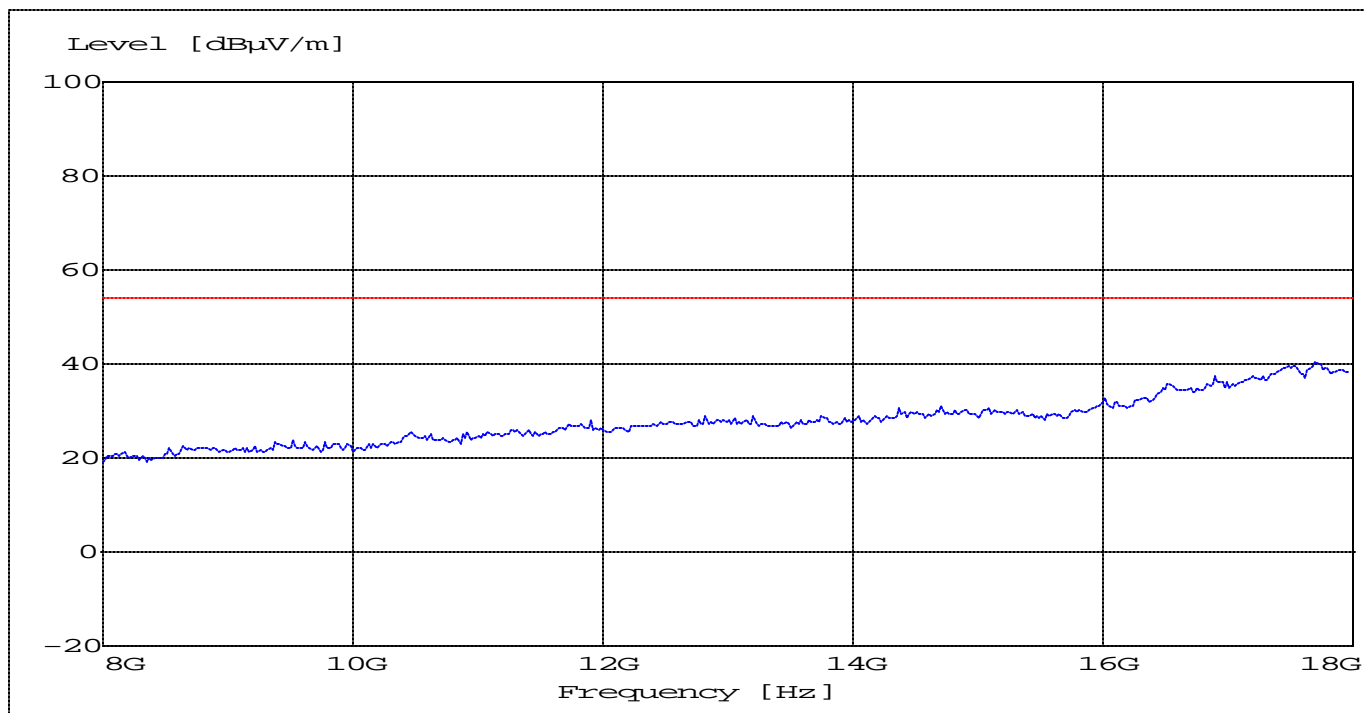


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

## EMISSION LIMITATIONS - Radiated (Transmitter)

## SUBCLAUSE § 15.247 (c) (1)

18GHz – 25GHz

(This plot is valid for all three channels)

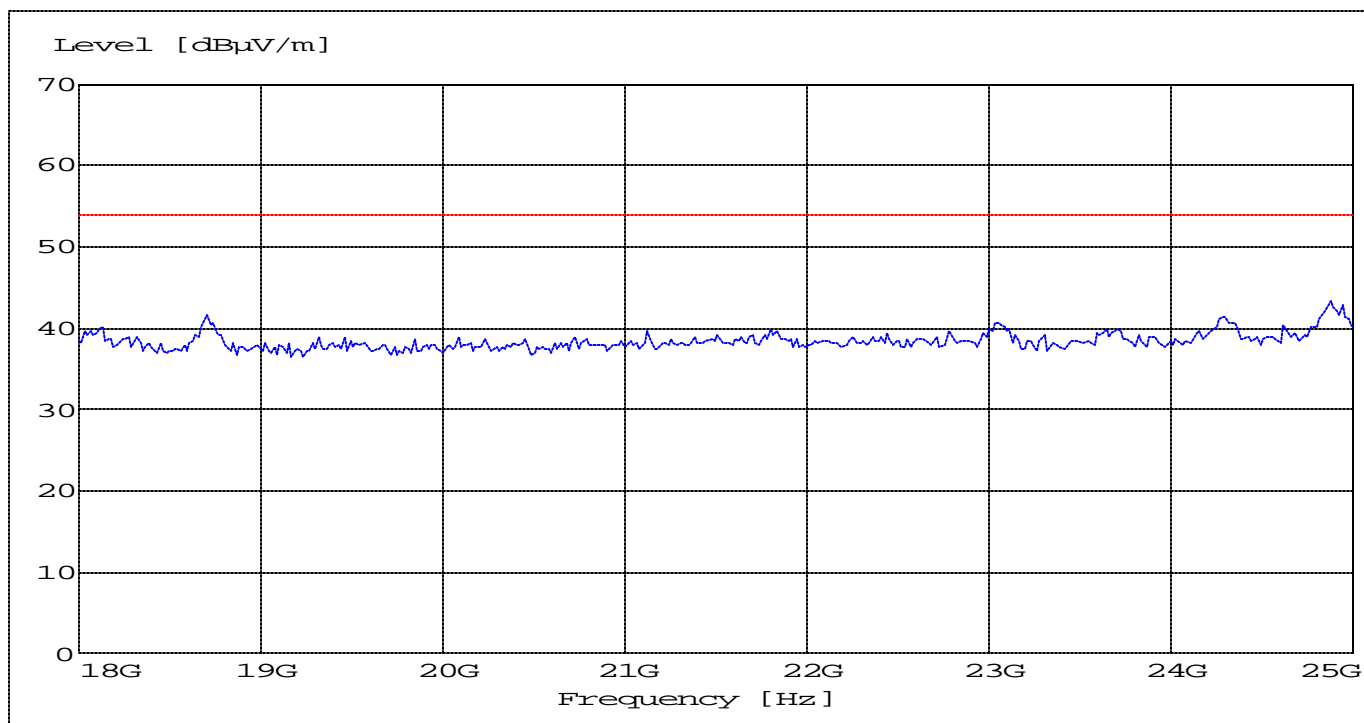


ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

CONDUCTED EMISSIONS

Measured with AC/DC power adapter

§ 15.107/207

Phase: Line

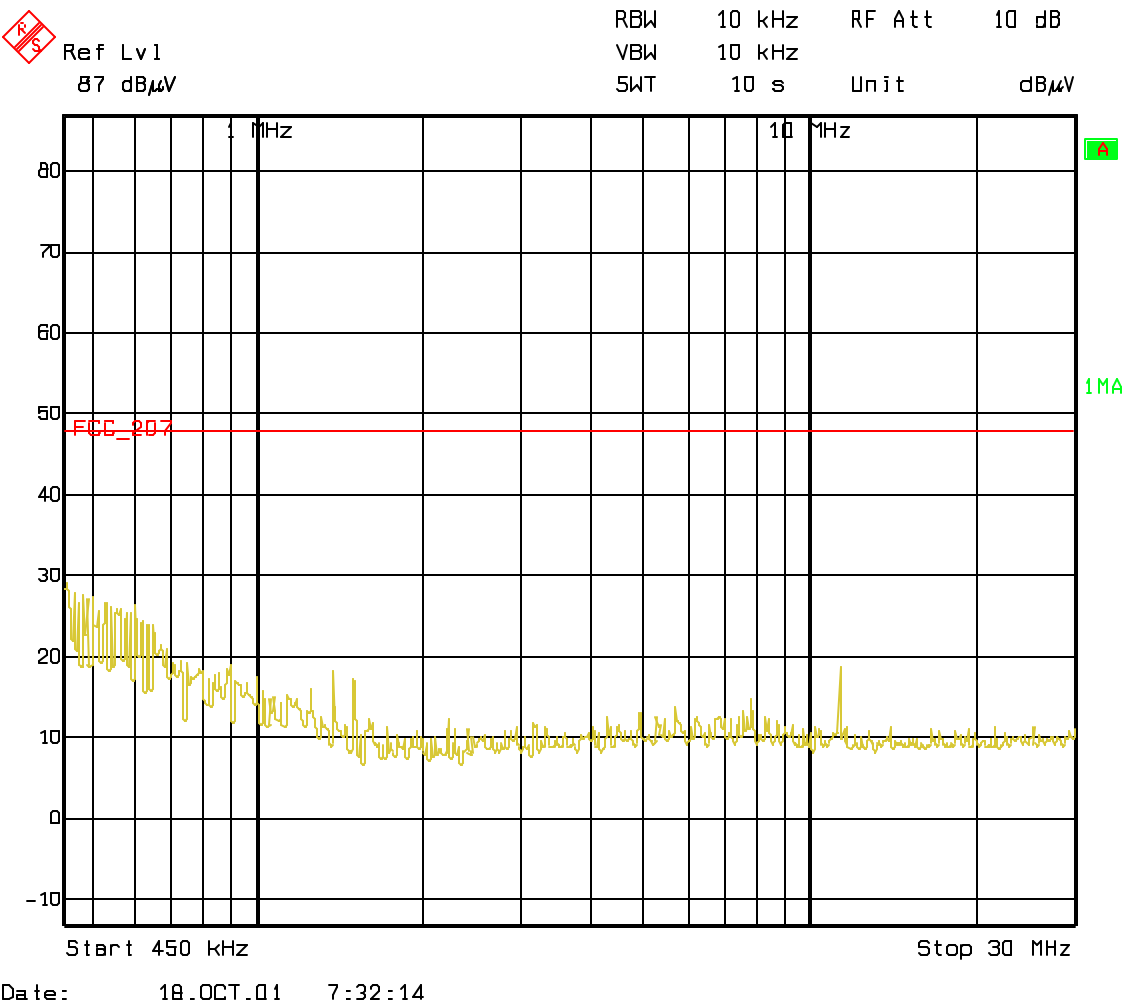


Technical specification: 15.107 / 15.207 (Revised as of October 1, 1991)

Limit

0.45 to 30 MHz	250 μV / 47.96dBμV
----------------	--------------------

ANALYZER SETTINGS: RBW = 10KHz VBW = 10KHz

Phase: Neutral

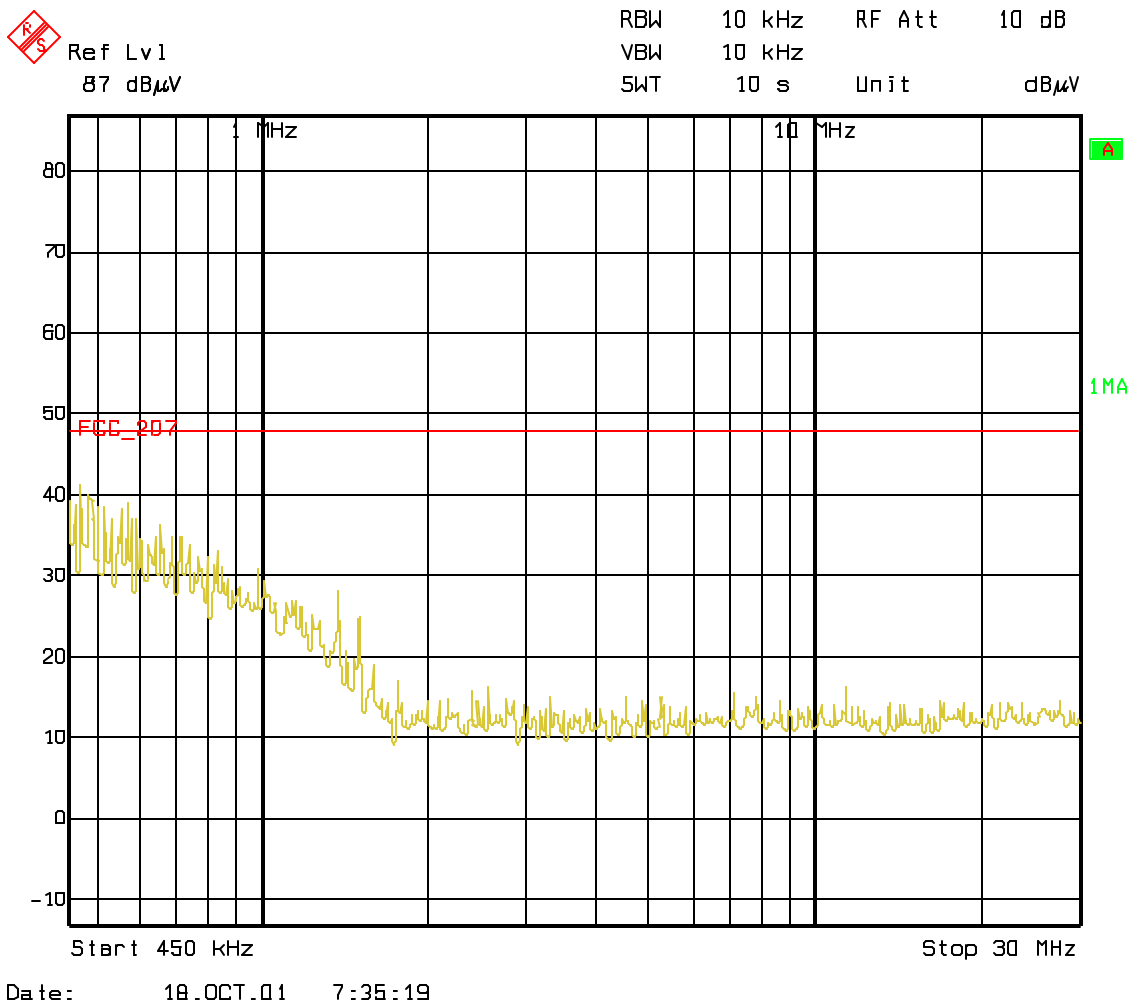

Technical specification: 15.107 / 15.207 (Revised as of October 1, 1991)  
Limit

0.45 to 30 MHz	250 μV / 47.96dBμV
ANALYZER SETTINGS: RBW = 10KHz VBW = 10KHz	

**RECEIVER SPURIOUS RADIATION****§ 15.209****Limits**

<b>Frequency (MHz)</b>	<b>Field strength (µV/m)</b>	<b>Measurement distance (m)</b>
<b>0.009 - 0.490</b>	<b>2400/F(kHz)</b>	<b>300</b>
<b>0.490 - 1.705</b>	<b>24000/F(kHz)</b>	<b>30</b>
<b>1.705 - 30.0</b>	<b>30</b>	<b>30</b>
<b>30 - 88</b>	<b>100</b>	<b>3</b>
<b>88 - 216</b>	<b>150</b>	<b>3</b>
<b>216 - 960</b>	<b>200</b>	<b>3</b>
<b>above 960</b>	<b>500</b>	<b>3</b>

**NOTE:**


1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 18 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.
2. Measurements were done on low, mid & high channels, but plots depicting the worst case are submitted in the test report.

## RECEIVER SPURIOUS RADIATION

§ 15.209

30MHz – 1GHz

(This plot is valid for all three channels)

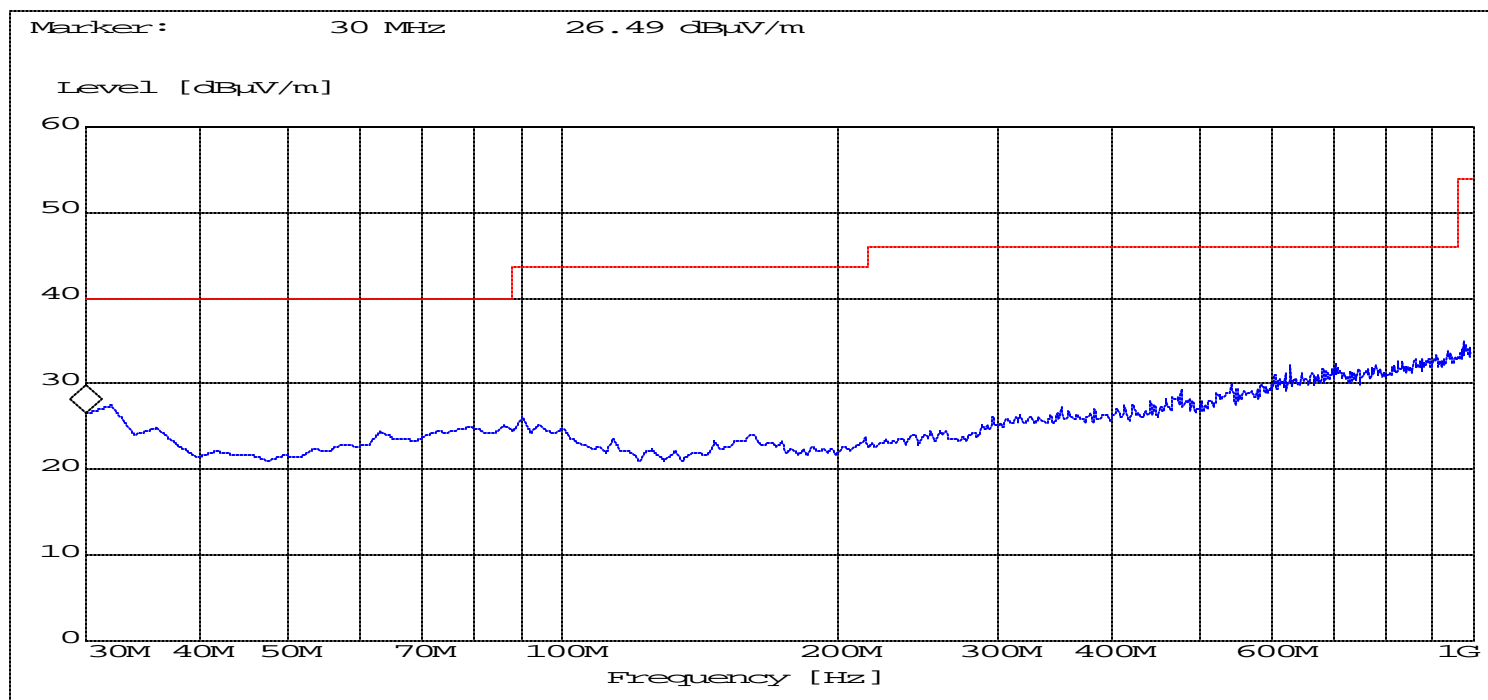


ANALYZER SETTINGS: RBW = 100KHz VBW = 100KHz

## RECEIVER SPURIOUS RADIATION


§ 15.209

1GHz – 8GHz

(This plot is valid for all three channels)

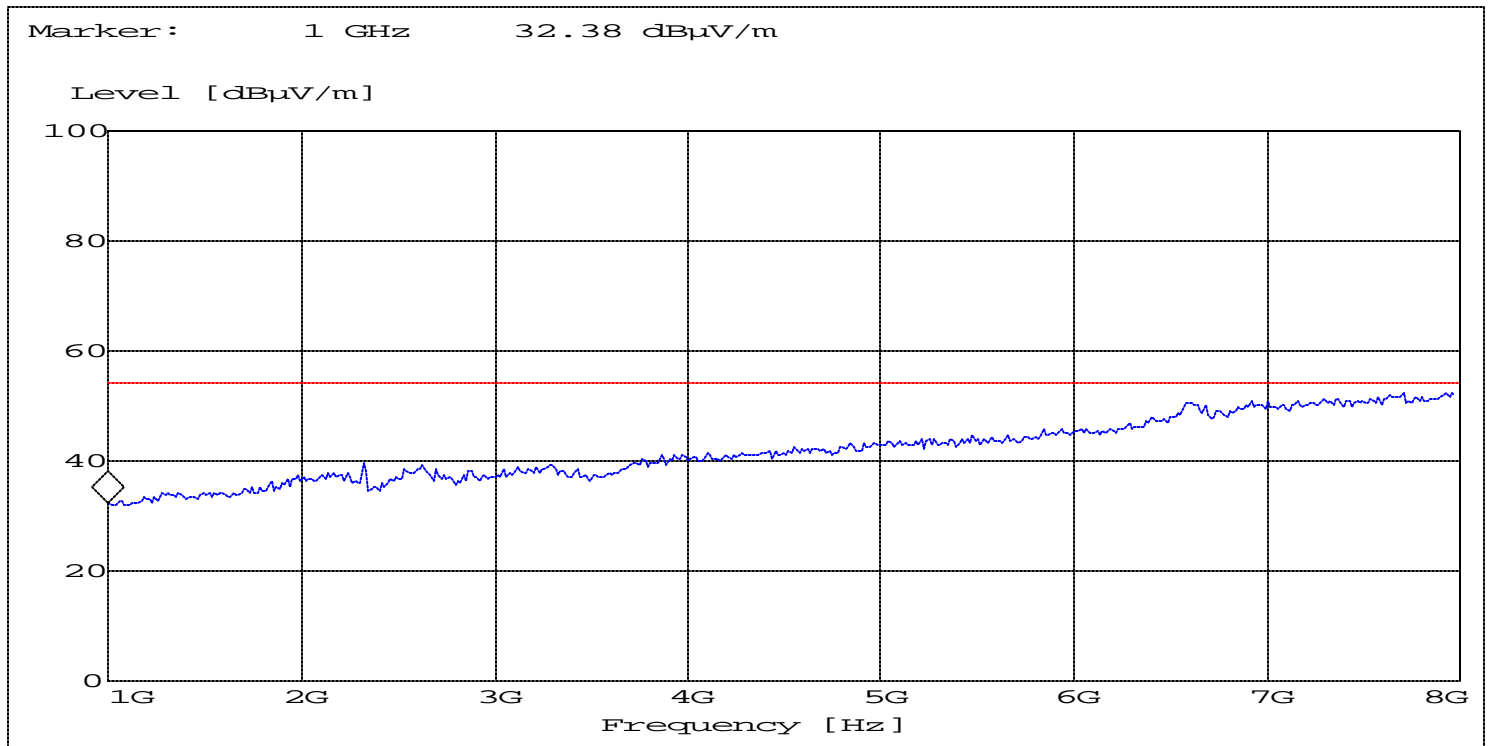

ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

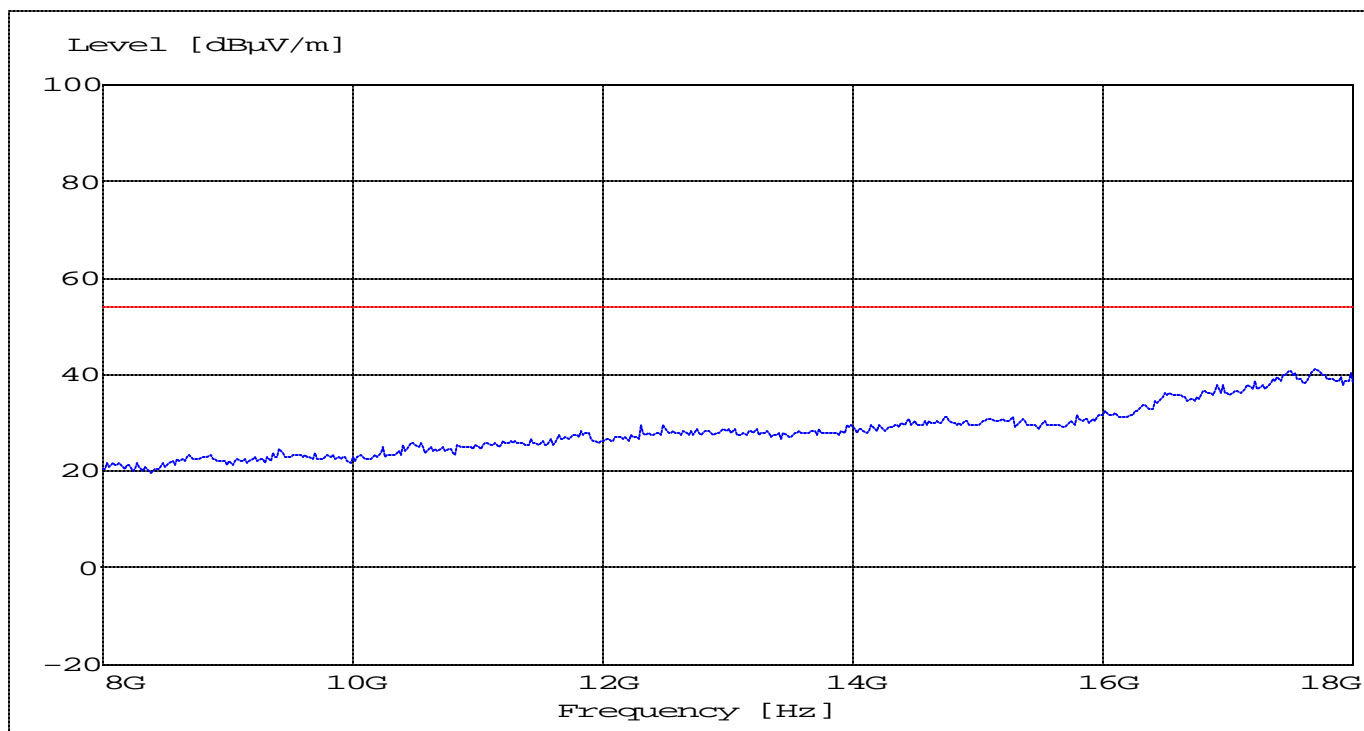
**RECEIVER SPURIOUS RADIATION****§ 15.209****8GHz – 18GHz****(This plot is valid for all three channels)****ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz**

## RECEIVER SPURIOUS RADIATION

§ 15.209

18GHz – 25GHz

(This plot is valid for all three channels)

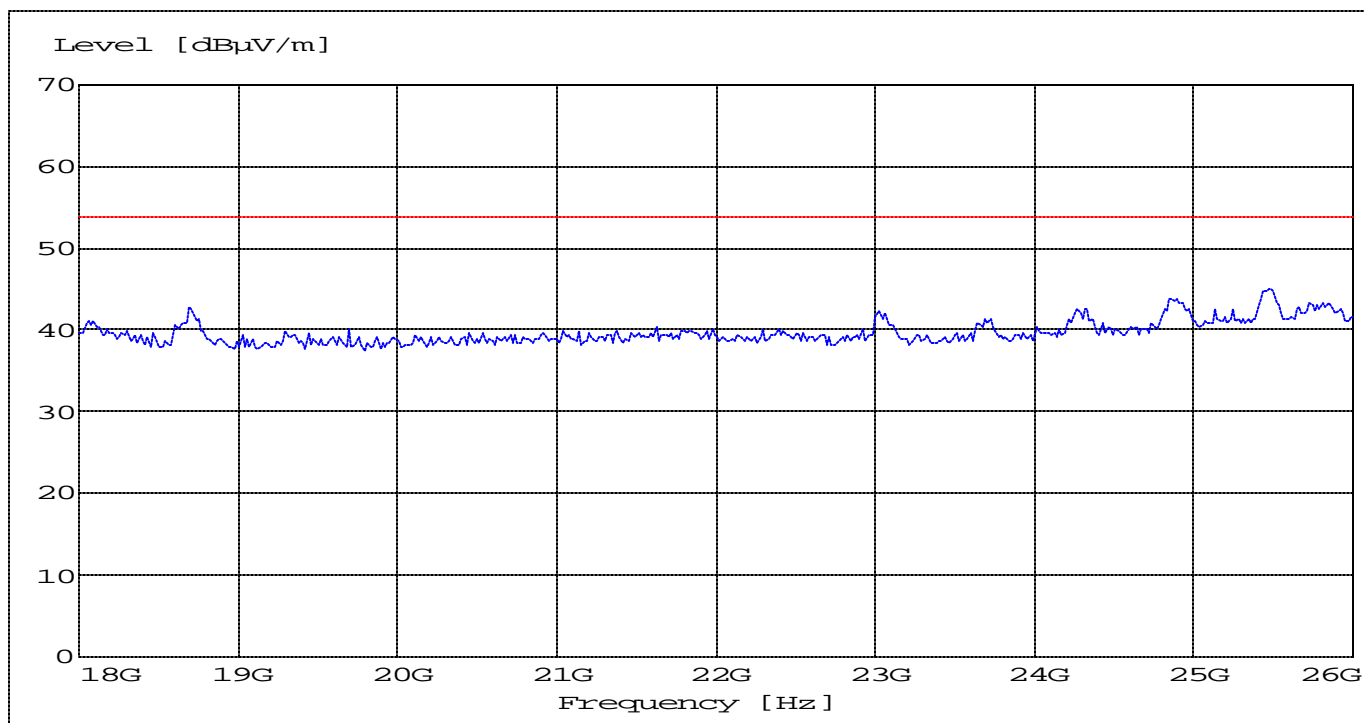

ANALYZER SETTINGS: RBW = 1MHz VBW = 1MHz

[illegible]