

TEST REPORT

Application No.: GZCR2410001162AT
Applicant: Comba Telecom Network Systems Limited
Address of Applicant: Flat/Rm 10, 3/F, Bio-Informatics Ctr, 2 Science Park West Avenue, HK Science Park, Pak Shek Kok, N.T. Hong Kong
Manufacturer: Comba Network Systems Company Limited
Address of Manufacturer: No. 10 Shenzhou Road, Guangzhou Science City, Guangzhou 510663, Guangdong, P.R.China
Factory: Comba Telecom Technology (Guangzhou) Ltd.
Address of Factory: No. 6 Jinbi Road, Economics and Technology Development District, Guangzhou, Guangdong, China
Product Name: SailaJoint
Model No.: SW-J
Trade Mark: SailaWave
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2024-10-08
Date of Test: 2024-11-12 to 2024-11-19
Date of Issue: 2024-11-28

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Ricky Liu

Ricky Liu
Manager



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, Testing Center EEC Laboratory.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663 t (86-20) 82155555 www.sgs.com.cn
 中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 sgs.china@sgs.com

Revision Record			
Version	Report No.	Date	Remark
01	GZCR241000116201	2024-11-28	Original

Authorized for issue by:			
		Jim Li	
		Jim Li/Project Engineer	
		Vico Cui	
		Vico Cui/Reviewer	



2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 11.12	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2013) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Conducted Peak Output Power		ANSI C63.10 (2013) Section 11.9.2	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth		ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectrum Density		ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (EMC) EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

3 Contents

	Page
1 Cover Page.....	1
2 Test Summary.....	3
3 Contents.....	4
4 General Information.....	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units.....	6
4.3 Measurement Uncertainty	7
4.4 Test Location.....	7
4.5 Test Facility.....	8
4.6 Deviation from Standards.....	8
4.7 Abnormalities from Standard Conditions	8
5 Equipment List.....	9
6 Radio Spectrum Technical Requirement	11
6.1 Antenna Requirement	11
6.1.1 Test Requirement:	11
6.1.2 Conclusion	11
7 Radio Spectrum Matter Test Results.....	12
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	12
7.1.1 E.U.T. Operation	12
7.1.2 Test Mode Description	12
7.1.3 Test Setup Diagram	13
7.1.4 Measurement Procedure and Data	13
7.2 Radiated Emissions which fall in the restricted bands	20
7.2.1 E.U.T. Operation	20
7.2.2 Test Mode Description	20
7.2.3 Test Setup Diagram	21
7.2.4 Measurement Procedure and Data	22
7.3 Radiated Spurious Emissions Below 1GHz	39
7.3.1 E.U.T. Operation	39
7.3.2 Test Mode Description	39
7.3.3 Test Setup Diagram	40
7.3.4 Measurement Procedure and Data	40
7.4 Radiated Spurious Emissions Above 1GHz.....	47
7.4.1 E.U.T. Operation	47
7.4.2 Test Mode Description	47
7.4.3 Test Setup Diagram	47
7.4.4 Measurement Procedure and Data	48
7.5 Conducted Peak Output Power	73
7.5.1 E.U.T. Operation	73
7.5.2 Test Mode Description	73
7.5.3 Test Setup Diagram	73



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.5.4	Measurement Procedure and Data	74
7.6	Minimum 6dB Bandwidth.....	75
7.6.1	E.U.T. Operation	75
7.6.2	Test Mode Description	75
7.6.3	Test Setup Diagram	75
7.6.4	Measurement Procedure and Data	75
7.7	Power Spectrum Density	76
7.7.1	E.U.T. Operation	76
7.7.2	Test Mode Description	76
7.7.3	Test Setup Diagram	76
7.7.4	Measurement Procedure and Data	76
7.8	Conducted Band Edges Measurement.....	77
7.8.1	E.U.T. Operation	77
7.8.2	Test Mode Description	77
7.8.3	Test Setup Diagram	78
7.8.4	Measurement Procedure and Data	78
7.9	Conducted Spurious Emissions.....	79
7.9.1	E.U.T. Operation	79
7.9.2	Test Mode Description	79
7.9.3	Test Setup Diagram	80
7.9.4	Measurement Procedure and Data	80
8	Test Setup Photo	81
9	EUT Constructional Details (EUT Photos)	82
10	Appendix	83



4 General Information

4.1 Details of E.U.T.

Power supply: DC 12V
Cable(s): RJ45 Port/PoE Port x1
RJ45 Port x3
DC 9V-36V x2
Test Voltage: AC 120 V, 60 Hz
Operation Frequency: 802.11b/g/n/ax(HT20): 2412MHz to 2462MHz
802.11n/ax(HT40): 2422MHz to 2452MHz
802.11b: DSSS (CCK, DQPSK, DBPSK)
Modulation Type: 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
802.11ax: OFDM (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Number of Channels: 802.11b/g/n/ax(HT20):11; 802.11n/ax(HT40):7
Channel Spacing: 5MHz
Antenna Type: IPEX Antenna
Antenna Number: 2
Antenna Gain: Antenna 1: 2.98 dBi and Antenna 2: 2.98 dBi
Remark: Two antennas can simultaneous transmission

Remark: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Note Book Computer	LENOVO	ThinkPad T490	PF1D1MVJ
DC Power Supply	GWINSTEK	GPS-3030DD (Input: AC100-240V, 50/60Hz; Output: DC Max.30V, 3A)	EMC0008
AC ADAPTER	CHANNEL WELL TECHNOLOGY	P030U05 (Input: AC100-240V, 0.7A, 50/60Hz; Output: 56V, 0.54A, 30.0W)	13-20060000-00281
AC ADAPTER	HuntKey	HKA06012050 (Input: AC100-240V, 50/60Hz, 1.5A; Output: 12V, 5A, 60.0W)	Y60Z2J229F002763



4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	±3.22dB
Radiated Emissions which fall in the restricted bands	±5.14dB (3m); ±4.90dB (10m); ±4.88dB (1GHz-6GHz); ±5.06dB (6GHz-18GHz); ±5.30dB (18GHz-40GHz)
Radiated Spurious Emissions Below 1GHz	±3.08dB (9kHz to 150kHz); ±3.19dB (150kHz to 30MHz); ±5.14dB (30MHz-1GHz) (3m); ±4.90dB (30MHz-1GHz) (10m)
Radiated Spurious Emissions Above 1GHz	±4.88dB (1GHz-6GHz); ±5.06dB (6GHz-18GHz); ±5.30dB (18GHz-40GHz)
Conducted Peak Output Power	± 0.75dB
Minimum 6dB Bandwidth	± 0.274%
Power Spectrum Density	± 2.84dB
Conducted Band Edges Measurement	± 0.75dB
Conducted Spurious Emissions	± 0.75dB
<p>Remark:</p> <p>The U_{lab} (lab Uncertainty) is less than U_{CISPR} (CISPR Uncertainty) or U_{ETSI} (ETSI Uncertainty).</p> <p>Emission decision rule:</p> <ul style="list-style-type: none"> – Compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit, marked as Pass in the report. – Non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit, marked as Fail in the report. 	

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou,
Guangdong, China 510663

Tel: +86 20 82155555

No tests were sub-contracted.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● ACMA

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

● SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

● FCC Recognized Accredited Test Firm(Registration No.: 486818)

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

● ISED (Registration No.: 4620B, CAB identifier: CN0052)

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

● VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

● CBTL (Lab Code: TL129)

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch EMC Testing Services, EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Coaxial Cable	HangTianXing	2m	EMC0107	2023-08-24	2025-08-23
Shielding Room	ChangZhou ZhongYu	8m x 3m x 3.8m	EMC0306	2022-10-16	2025-10-15
Two-Line V-Network-GZ	Rohde & Schwarz	ENV216	EMC2135	2024-09-02	2025-09-01
EMI Test Receiver (9kHz-3.6GHz)	Rohde & Schwarz	ESR3	EMC2221	2024-05-13	2025-05-12
Test Software E3r	Audix	Ver.6.191211	GZE100-77	N/A	N/A

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2024-10-14	2025-10-13
EMI Test Receiver (10Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2024-09-02	2025-09-01
Chamber cable (Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2024-08-19	2026-08-18
Horn Antenna (1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2022-09-23	2025-09-22
Horn Antenna (14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2023-06-18	2026-06-17
EXA Signal Analyzer (10Hz-44GHz)	Keysight	N9010A	EMC2138	2024-08-19	2025-08-18
MXE EMI Receiver (10Hz-8.4GHz)	Keysight	N9038A	EMC2139	2024-10-14	2025-10-13
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2023-12-20	2026-12-19
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A

RF Conducted Test					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
MI CABLE	SGS-EMC	0.8M	EMC2136	2023-11-02	2025-11-01
4X4 Power sensor Unit	TST	TSPS2023R	EMC2257	2024-08-19	2025-08-18
MXG Vector Signal Generator	Keysight	N5182B	EMC2258	2024-08-19	2025-08-18
Test Software	TST	V2.0	GZE100-82	N/A	N/A
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2222	2024-06-17	2025-06-16



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (EMC) EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Radiated Spurious Emissions Below 1GHz

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
966 Anechoic Chamber	Shenzhen C.R.T	CRTSGSSAC966	EMC2230	2022-04-12	2025-04-11
EMI Test Receiver(1Hz-8GHz)	Rohde & Schwarz	ESW8	EMC2229	2024-02-19	2025-02-18
Amplifier(9k-1000MHz)	SONOMA	310	EMC2237	2024-03-22	2025-03-21
Trilog Broadband Antenna (25MHz-2GHz)	Schwarzbeck Mess-Elektronik	VULB 9168	EMC2238	2022-04-20	2025-04-19
Coaxial Cable	Mirco-COAX UTIFLEX ve	LA2-C125-8000	EMC2239	2023-06-14	2025-06-13
Test Software E3	Audix	Ver.6.191211	GZE100-81	N/A	N/A
Active Loop Antenna-RED	ETS-Lindgren	6502	EMC2190	2024-04-08	2026-04-07

Radiated Spurious Emissions Above 1GHz

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2024-10-14	2025-10-13
EMI Test Receiver (10Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2024-09-02	2025-09-01
Chamber cable (Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2024-08-19	2026-08-18
Horn Antenna (1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2022-09-23	2025-09-22
Horn Antenna (14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2023-06-18	2026-06-17
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2024-10-14	2025-10-13
EXA Signal Analyzer (10Hz-44GHz)	Keysight	N9010A	EMC2138	2024-08-19	2025-08-18
MXE EMI Receiver (10Hz-8.4GHz)	Keysight	N9038A	EMC2139	2024-10-14	2025-10-13
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2023-12-20	2026-12-19
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A

General used equipment

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2024-06-13	2025-06-12



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (EMC) EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is Ant1: 2.98 dBi; Ant2: 2.98 dBi; the directional gain is: 5.99 dBi.

$$\text{Directional gain} = G_{\text{ANT}} + 10 \log (N_{\text{ANT}}) \text{ dBi}$$

Antenna location:

Refer to internal photo.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C

Humidity: 52.3 % RH


Atmospheric Pressure: 1013 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	Operation(2.4G Wi-Fi):Keep the EUT communication with the companion device via 2.4G Wi-Fi(Powered by DC source).
Final test	07	Operation(2.4G Wi-Fi):Keep the EUT communication with the companion device via 2.4G Wi-Fi(Powered by ac adapter: model:HKA06012050).
Final test	09	Operation(2.4G Wi-Fi):Keep the EUT communication with the companion device via 2.4G Wi-Fi(Powered by PoE adapter: model:P030U05).



7.1.3 Test Setup Diagram

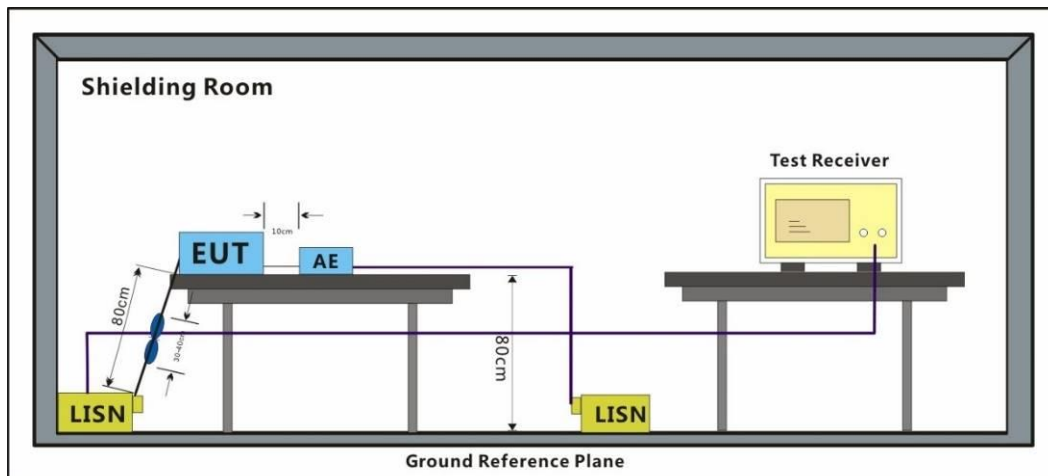


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor

Test Mode: 05; Line: Live line

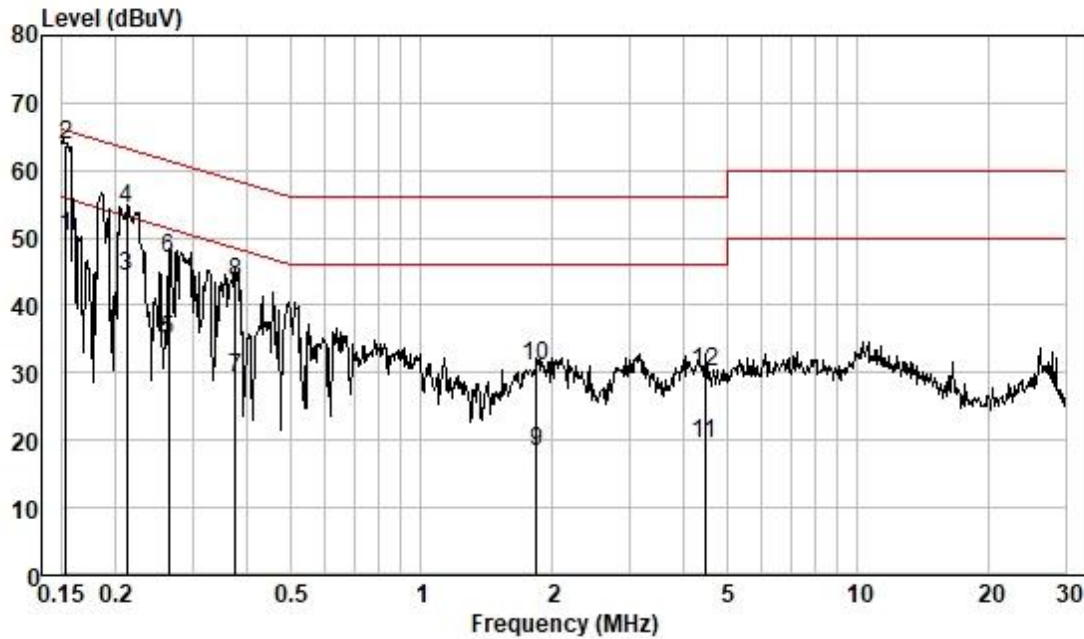


Pol : LINE
Mode :
Model :
Power :

	Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
1	0.153	40.60	0.04	9.57	50.21	55.82	-5.61	Average
2	0.153	54.19	0.04	9.57	63.80	65.82	-2.02	QP
3	0.212	34.72	0.04	9.56	44.32	53.14	-8.82	Average
4	0.212	44.75	0.04	9.56	54.35	63.14	-8.79	QP
5	0.264	25.09	0.04	9.58	34.71	51.29	-16.58	Average
6	0.264	37.40	0.04	9.58	47.02	61.29	-14.27	QP
7	0.375	19.50	0.05	9.56	29.11	48.39	-19.28	Average
8	0.375	33.68	0.05	9.56	43.29	58.39	-15.10	QP
9	1.839	8.60	0.12	9.61	18.33	46.00	-27.67	Average
10	1.839	21.37	0.12	9.61	31.10	56.00	-24.90	QP
11	4.454	9.64	0.19	9.62	19.45	46.00	-26.55	Average
12	4.454	20.19	0.19	9.62	30.00	56.00	-26.00	QP



Test Mode: 05; Line: Neutral Line

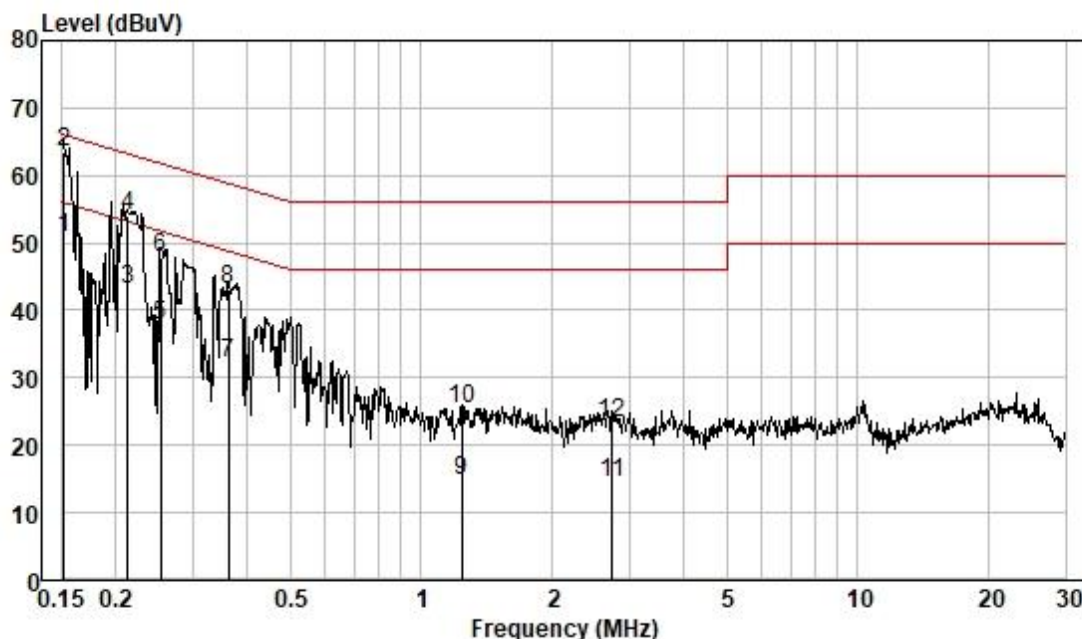


Pol : NEUTRAL
Mode :
Model :
Power :

	Frequency MHz	Read Level dBUV	Cable Loss dB	LISN Factor dB	Measured Level dBUV	Limit Line dBUV	Over Limit dB	Remark
1	0.152	41.27	0.04	9.51	50.82	55.91	-5.09	Average
2	0.152	53.83	0.04	9.51	63.38	65.91	-2.53	QP
3	0.213	33.39	0.04	9.54	42.97	53.10	-10.13	Average
4	0.213	44.52	0.04	9.54	54.10	63.10	-9.00	QP
5	0.253	28.13	0.04	9.53	37.70	51.64	-13.94	Average
6	0.253	38.14	0.04	9.53	47.71	61.64	-13.93	QP
7	0.361	22.63	0.05	9.52	32.20	48.69	-16.49	Average
8	0.361	33.44	0.05	9.52	43.01	58.69	-15.68	QP
9	1.236	5.16	0.09	9.56	14.81	46.00	-31.19	Average
10	1.236	15.82	0.09	9.56	25.47	56.00	-30.53	QP
11	2.736	4.62	0.15	9.57	14.34	46.00	-31.66	Average
12	2.736	13.64	0.15	9.57	23.36	56.00	-32.64	QP



Test Mode: 07; Line: Live line

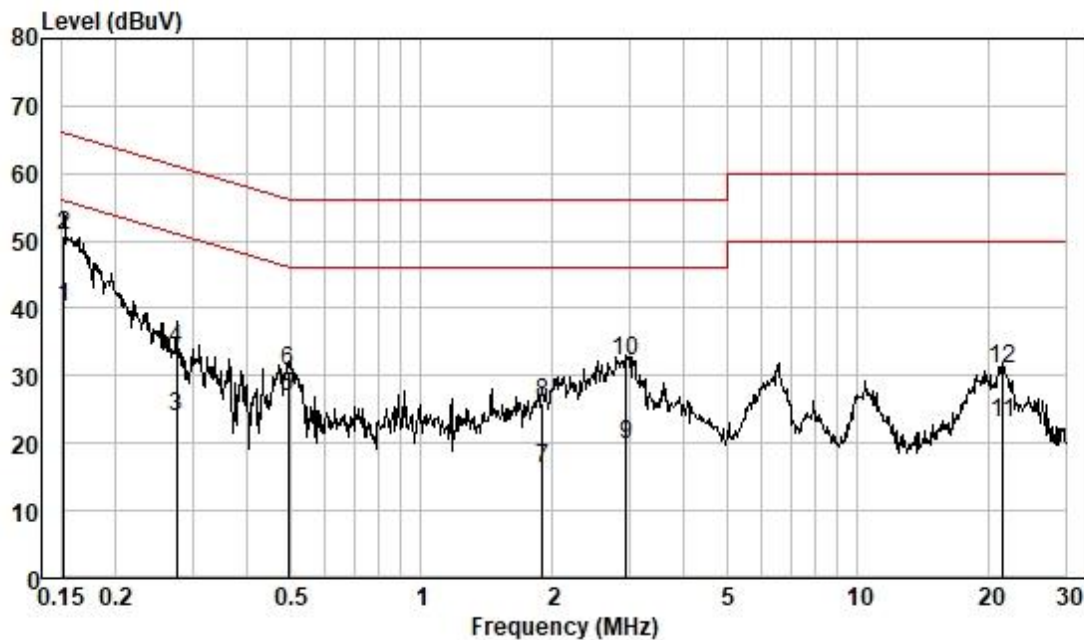


Pol : LINE
Mode :
Model :
Power :

	Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
1	0.152	30.48	0.04	9.57	40.09	55.91	-15.82	Average
2	0.152	41.15	0.04	9.57	50.76	65.91	-15.15	QP
3	0.274	14.24	0.04	9.57	23.85	50.98	-27.13	Average
4	0.274	24.36	0.04	9.57	33.97	60.98	-27.01	QP
5	0.497	17.10	0.05	9.59	26.74	46.05	-19.31	Average
6	0.497	21.02	0.05	9.59	30.66	56.05	-25.39	QP
7	1.898	6.47	0.12	9.61	16.20	46.00	-29.80	Average
8	1.898	16.38	0.12	9.61	26.11	56.00	-29.89	QP
9	2.946	10.07	0.15	9.55	19.77	46.00	-26.23	Average
10	2.946	22.33	0.15	9.55	32.03	56.00	-23.97	QP
11	21.486	12.82	0.40	9.83	23.05	50.00	-26.95	Average
12	21.486	20.86	0.40	9.83	31.09	60.00	-28.91	QP



Test Mode: 07; Line: Neutral Line

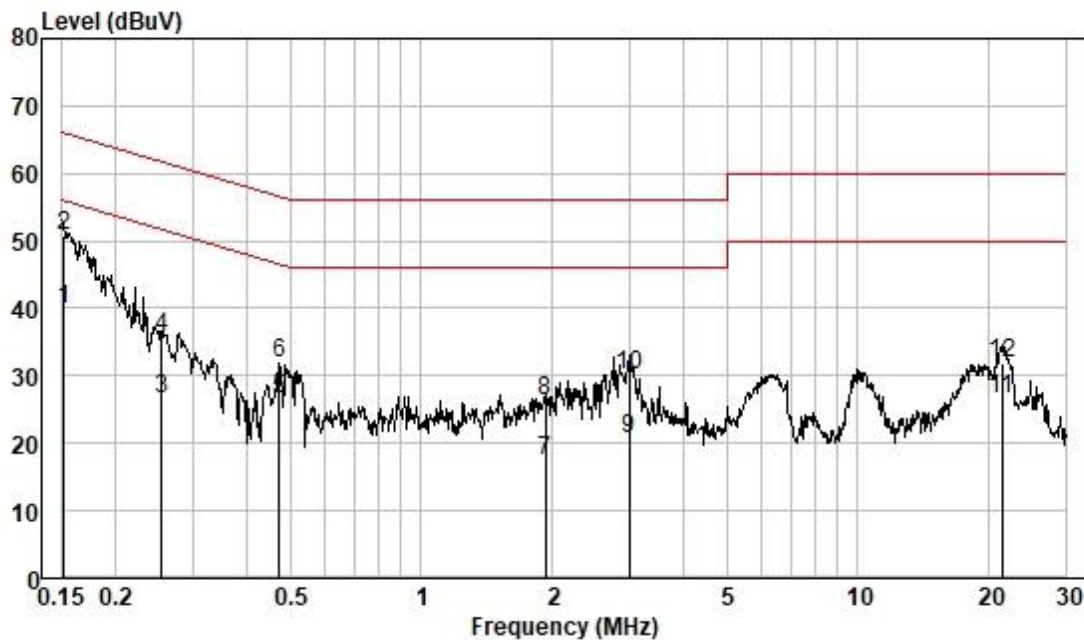


Pol : NEUTRAL
Mode :
Model :
Power :

	Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
1	0.152	30.33	0.04	9.51	39.88	55.91	-16.03	Average
2	0.152	41.09	0.04	9.51	50.64	65.91	-15.27	QP
3	0.255	17.00	0.04	9.53	26.57	51.60	-25.03	Average
4	0.255	26.04	0.04	9.53	35.61	61.60	-25.99	QP
5	0.474	17.08	0.05	9.57	26.70	46.45	-19.75	Average
6	0.474	22.17	0.05	9.57	31.79	56.45	-24.66	QP
7	1.928	7.72	0.12	9.52	17.36	46.00	-28.64	Average
8	1.928	16.51	0.12	9.52	26.15	56.00	-29.85	QP
9	2.993	10.88	0.16	9.56	20.60	46.00	-25.40	Average
10	2.993	20.43	0.16	9.56	30.15	56.00	-25.85	QP
11	21.373	16.32	0.40	9.92	26.64	50.00	-23.36	Average
12	21.373	21.47	0.40	9.92	31.79	60.00	-28.21	QP



Test Mode: 09; Line: Live line

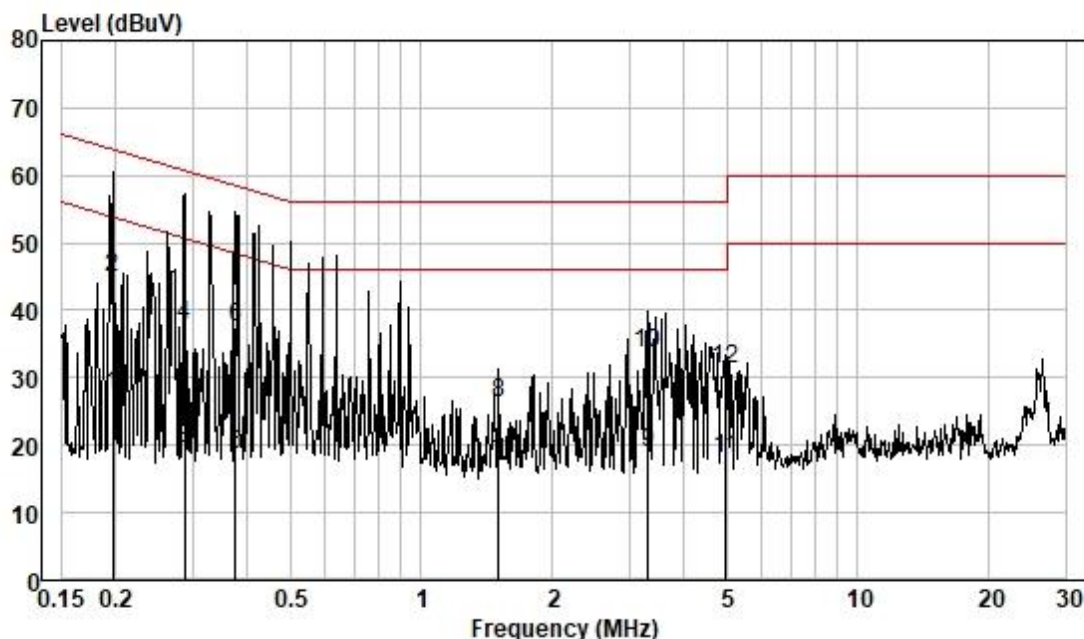


Pol : LINE
Mode :
Model :
Power :

	Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
1	0.197	17.75	0.04	9.55	27.34	53.76	-26.42	Average
2	0.197	35.20	0.04	9.55	44.79	63.76	-18.97	QP
3	0.286	9.75	0.04	9.55	19.34	50.63	-31.29	Average
4	0.286	28.15	0.04	9.55	37.74	60.63	-22.89	QP
5	0.375	8.94	0.05	9.56	18.55	48.39	-29.84	Average
6	0.375	27.82	0.05	9.56	37.43	58.39	-20.96	QP
7	1.503	7.51	0.10	9.60	17.21	46.00	-28.79	Average
8	1.503	16.68	0.10	9.60	26.38	56.00	-29.62	QP
9	3.310	9.23	0.16	9.58	18.97	46.00	-27.03	Average
10	3.310	23.95	0.16	9.58	33.69	56.00	-22.31	QP
11	4.978	8.11	0.20	9.60	17.91	46.00	-28.09	Average
12	4.978	21.47	0.20	9.60	31.27	56.00	-24.73	QP



Test Mode: 09; Line: Neutral Line

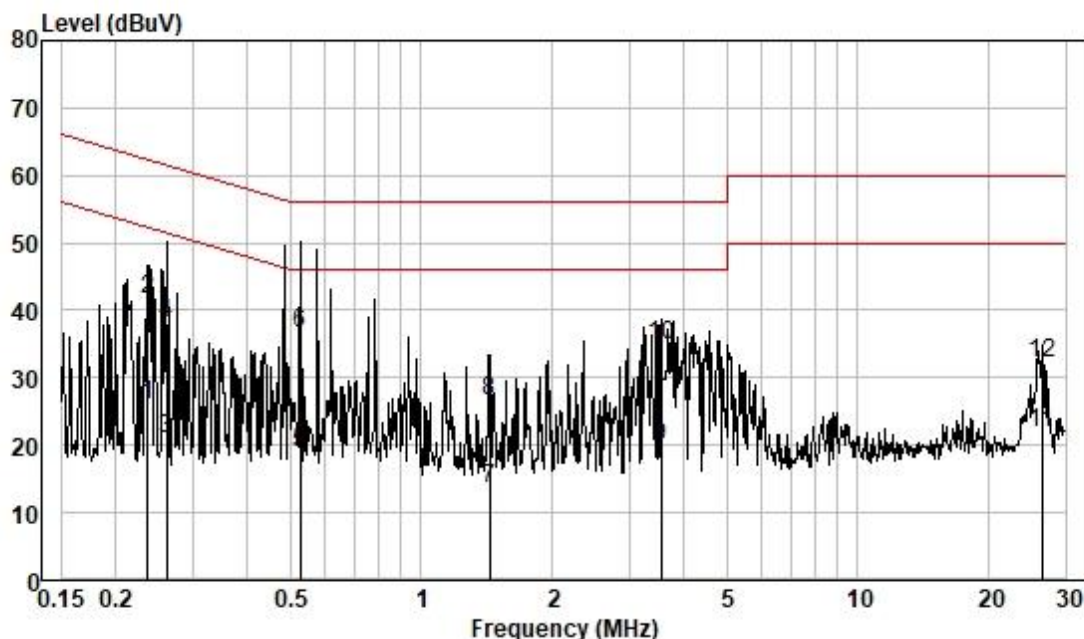

Pol : NEUTRAL
Mode :
Model :
Power :

	Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
1	0.237	16.50	0.04	9.53	26.07	52.22	-26.15	Average
2	0.237	32.05	0.04	9.53	41.62	62.22	-20.60	QP
3	0.262	11.47	0.04	9.53	21.04	51.38	-30.34	Average
4	0.262	28.54	0.04	9.53	38.11	61.38	-23.27	QP
5	0.529	9.40	0.05	9.58	19.03	46.00	-26.97	Average
6	0.529	26.92	0.05	9.58	36.55	56.00	-19.45	QP
7	1.433	4.07	0.10	9.54	13.71	46.00	-32.29	Average
8	1.433	16.92	0.10	9.54	26.56	56.00	-29.44	QP
9	3.547	10.08	0.17	9.58	19.83	46.00	-26.17	Average
10	3.547	25.20	0.17	9.58	34.95	56.00	-21.05	QP
11	26.418	11.36	0.44	10.01	21.81	50.00	-28.19	Average
12	26.418	21.69	0.44	10.01	32.14	60.00	-27.86	QP



7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 11.12

Limit:

Test Distance: 3 m

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 24.7 °C

Humidity: 50.6 % RH

Atmospheric Pressure: 1013 mbar

7.2.2 Test Mode Description

Pre-scan / Mode
Final test Code Description

TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40). Only the data of worst case is recorded in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (EMC) EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

7.2.3 Test Setup Diagram

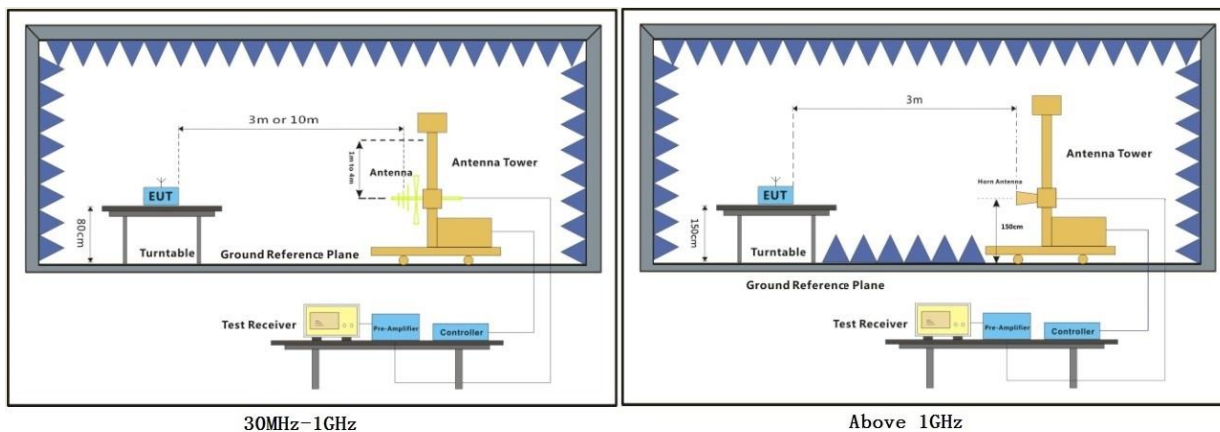

7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 4: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663


t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

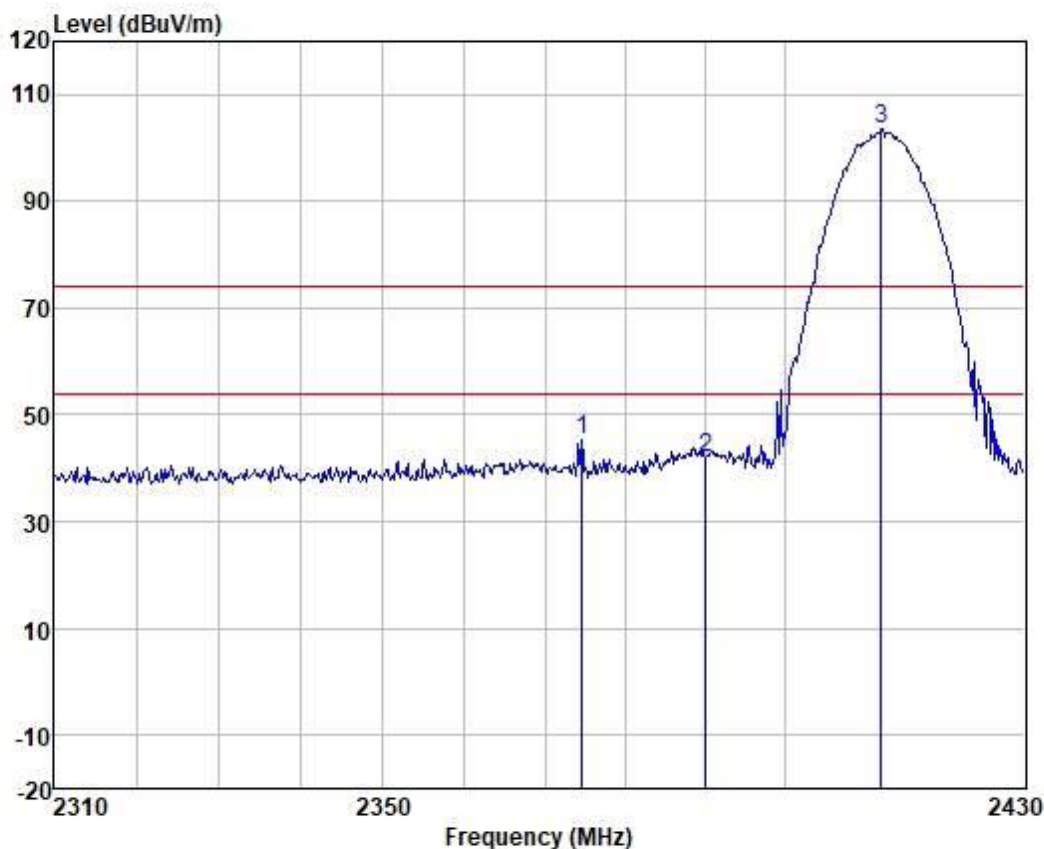


	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Loss	Factor	Line	Limit	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	2374.646	52.12	27.66	3.44	37.77	45.45	74.00	-28.55	VERTICAL peak
2	2390.000	48.80	27.68	3.44	37.77	42.15	74.00	-31.85	VERTICAL peak
3 *	2412.000	110.05	27.74	3.46	37.77	103.48	74.00	29.48	VERTICAL peak

Test Mode: 00; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

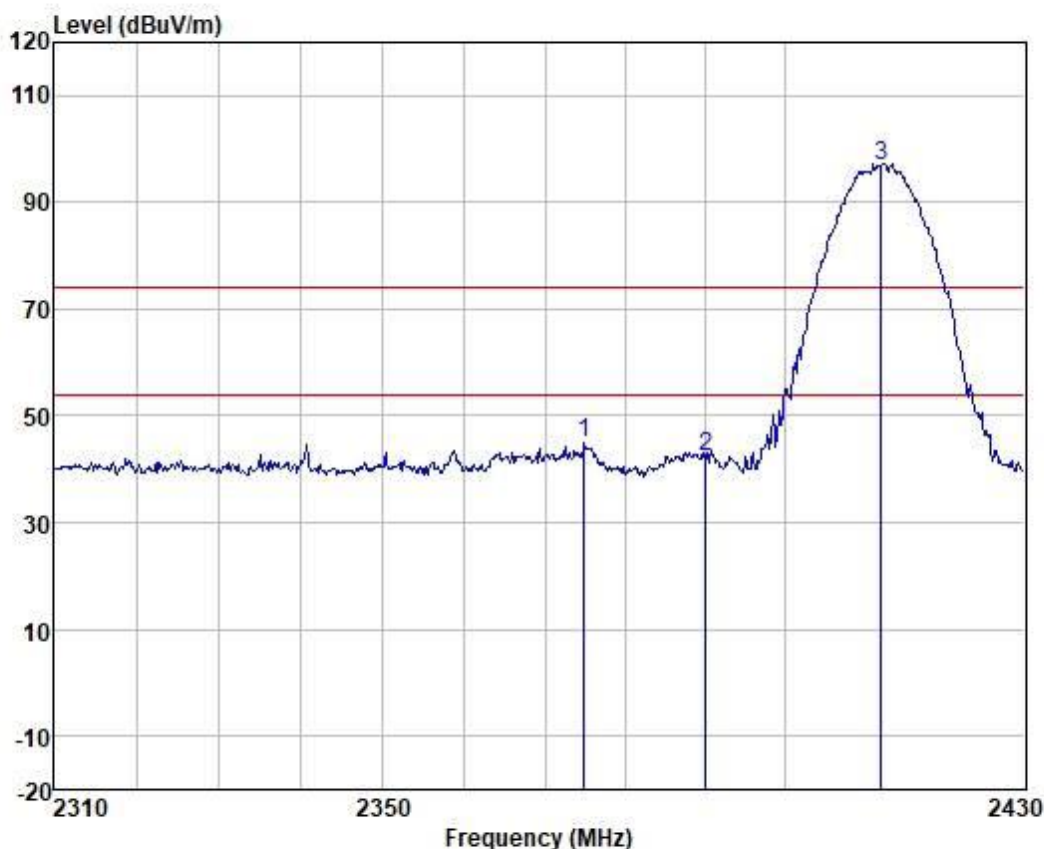


	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Loss	Factor	dBuV/m	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dB		
1	2374.886	51.45	27.66	3.44	37.77	44.78	74.00	-29.22	HORIZONTAL peak
2	2390.000	49.11	27.68	3.44	37.77	42.46	74.00	-31.54	HORIZONTAL peak
3 *	2412.000	103.41	27.74	3.46	37.77	96.84	74.00	22.84	HORIZONTAL peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

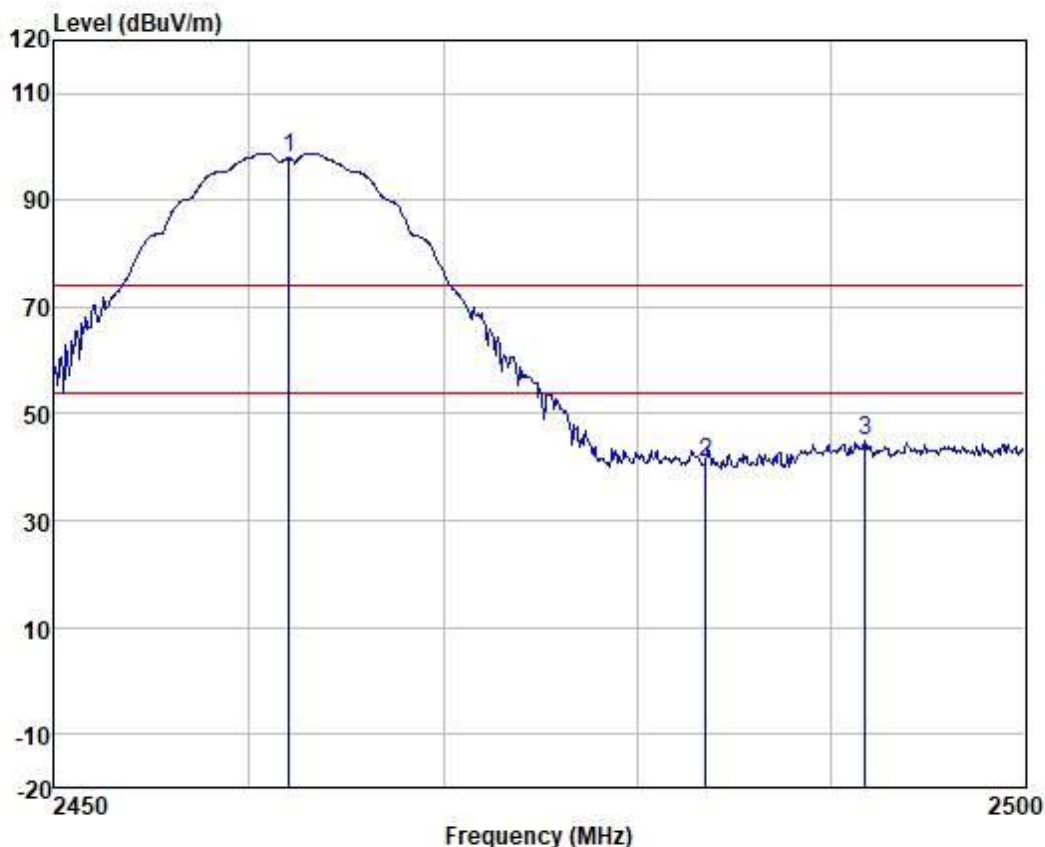

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 *	2462.000	104.30	27.82	3.48	37.76	97.84	74.00	23.84	VERTICAL peak
2	2483.500	47.38	27.85	3.49	37.76	40.96	74.00	-33.04	VERTICAL peak
3	2491.781	51.49	27.86	3.49	37.76	45.08	74.00	-28.92	VERTICAL peak


Test Mode: 00; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

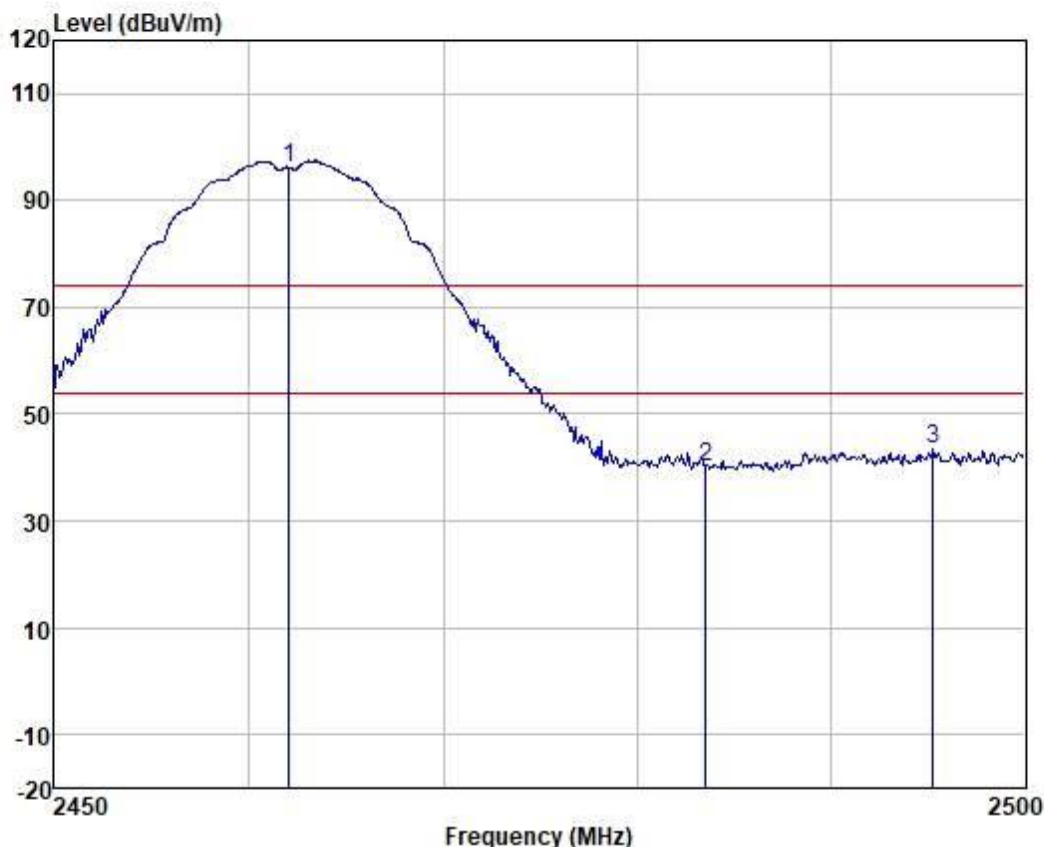

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Loss	Factor	dBuV/m	Line	Limit		
		dBuV	dB	dB		dBuV/m	dB		
1 *	2462.000	102.74	27.82	3.48	37.76	96.28	74.00	22.28	HORIZONTAL peak
2	2483.500	46.62	27.85	3.49	37.76	40.20	74.00	-33.80	HORIZONTAL peak
3	2495.307	49.76	27.86	3.49	37.76	43.35	74.00	-30.65	HORIZONTAL peak




Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

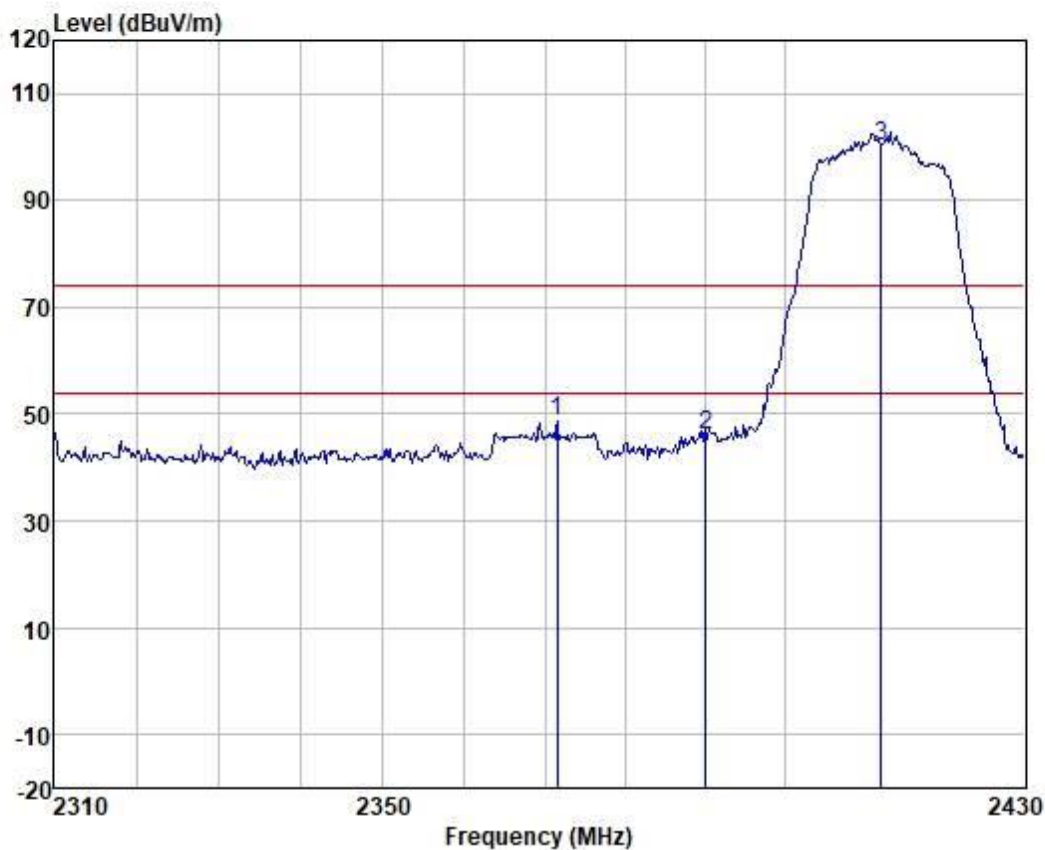

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2371.521	55.51	27.66	3.44	37.77	48.84	74.00	-25.16	VERTICAL peak
2	2390.000	52.87	27.68	3.44	37.77	46.22	74.00	-27.78	VERTICAL peak
3 *	2412.000	106.69	27.74	3.46	37.77	100.12	74.00	26.12	VERTICAL peak


Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

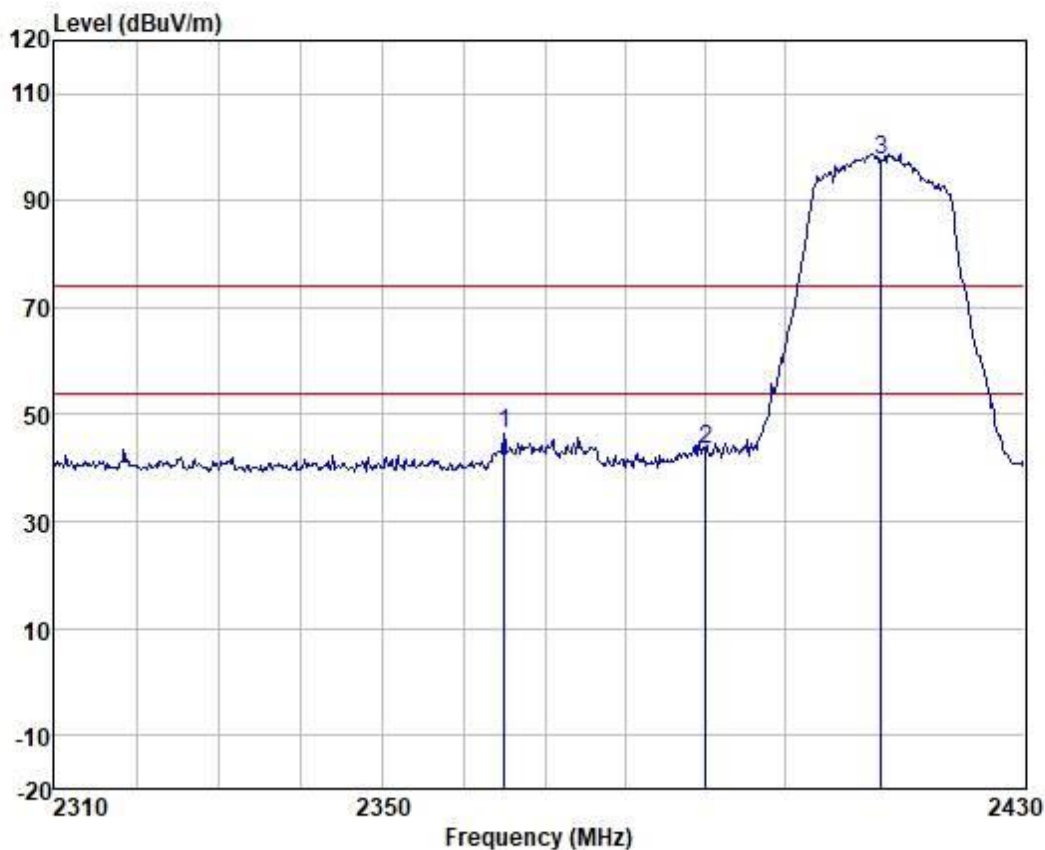

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Level	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2365.044	52.97	27.64	3.43	37.77	46.27	74.00	-27.73	HORIZONTAL peak
2	2390.000	50.28	27.68	3.44	37.77	43.63	74.00	-30.37	HORIZONTAL peak
3 *	2412.000	104.13	27.74	3.46	37.77	97.56	74.00	23.56	HORIZONTAL peak



Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

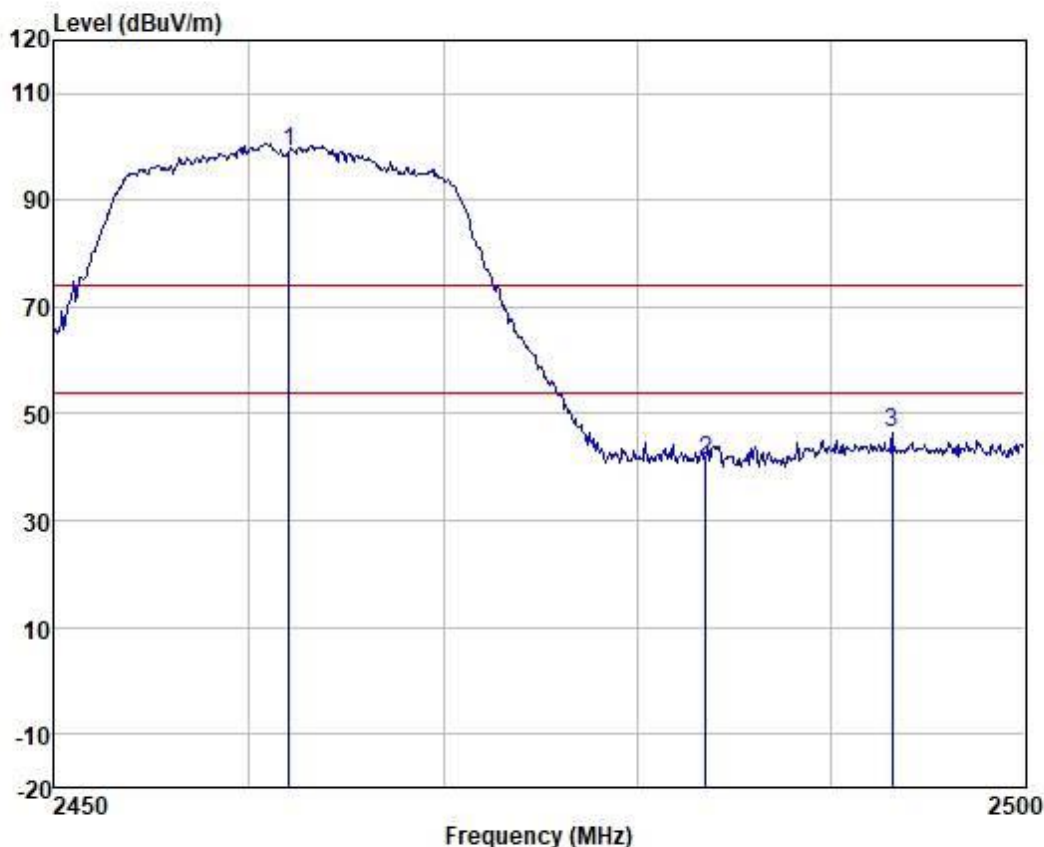

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 *	2462.000	105.68	27.82	3.48	37.76	99.22	74.00	25.22	VERTICAL peak
2	2483.500	47.57	27.85	3.49	37.76	41.15	74.00	-32.85	VERTICAL peak
3	2493.191	52.96	27.86	3.49	37.76	46.55	74.00	-27.45	VERTICAL peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (Inspection & Testing Services)

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

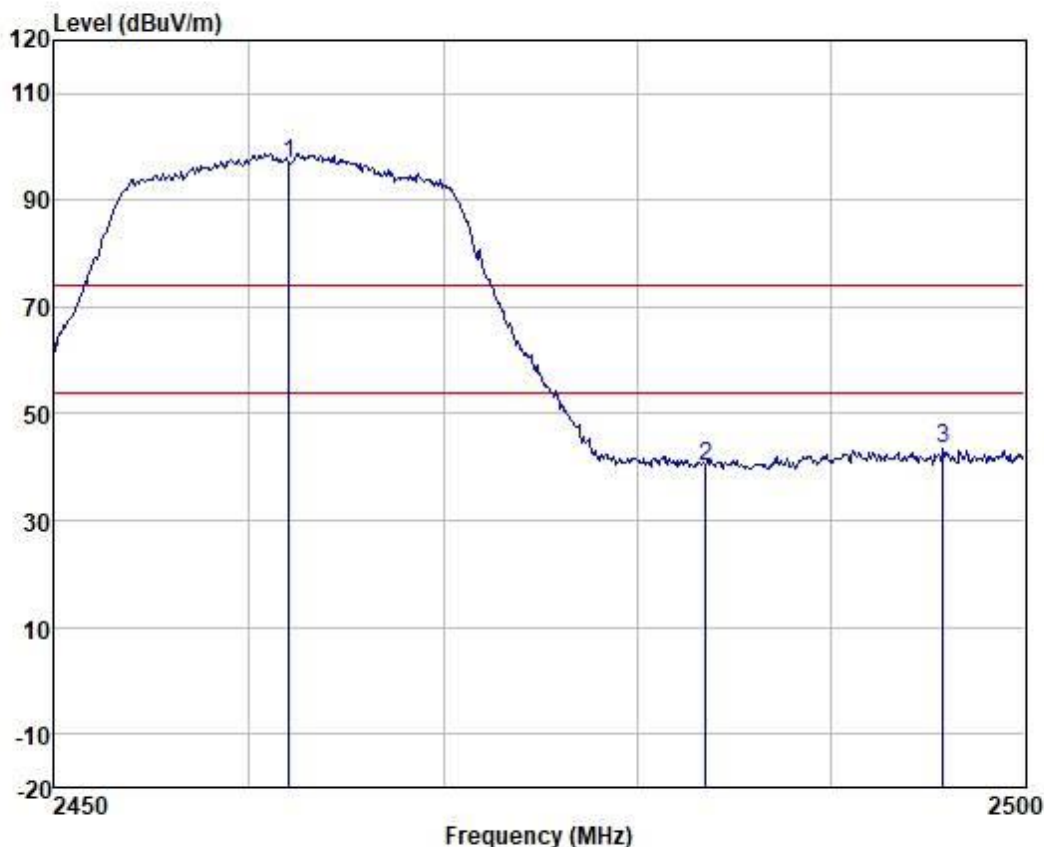

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 *	2462.000	103.37	27.82	3.48	37.76	96.91	74.00	22.91	HORIZONTAL peak
2	2483.500	46.67	27.85	3.49	37.76	40.25	74.00	-33.75	HORIZONTAL peak
3	2495.812	49.78	27.86	3.49	37.76	43.37	74.00	-30.63	HORIZONTAL peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (Inspection & Testing Services)

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663


t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

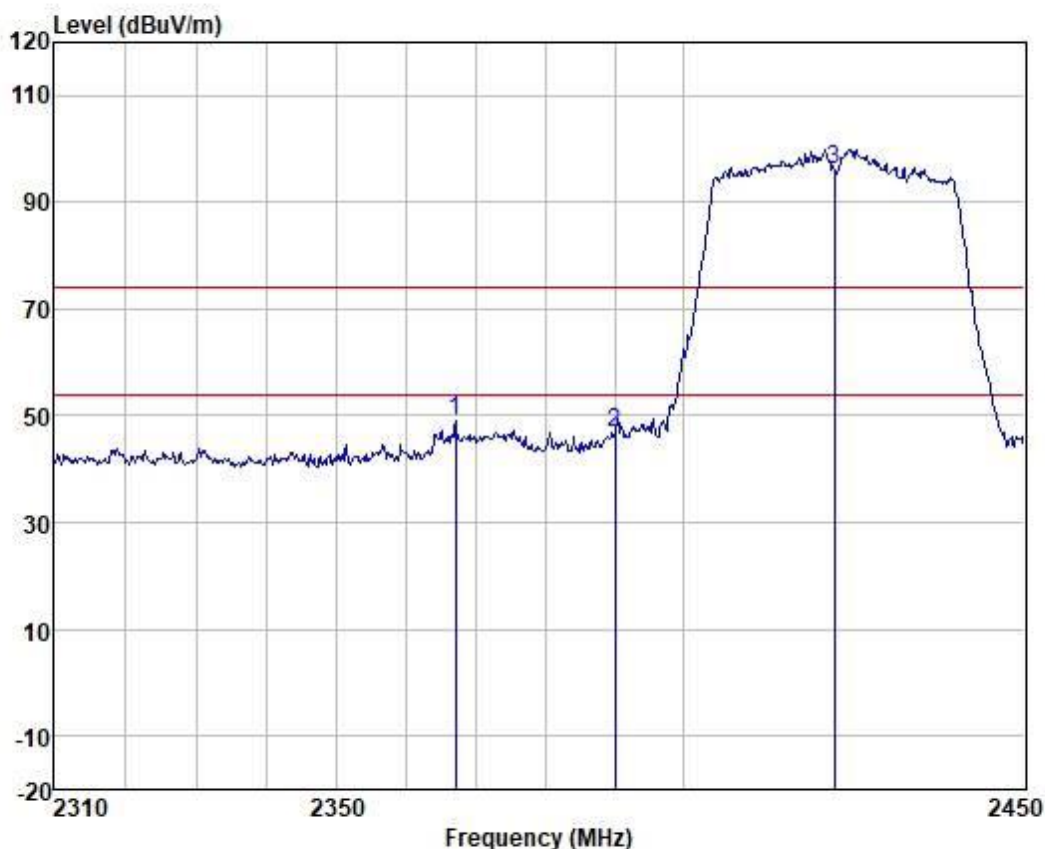

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2366.962	55.64	27.64	3.43	37.77	48.94	74.00	-25.06	VERTICAL peak
2	2390.000	53.55	27.68	3.44	37.77	46.90	74.00	-27.10	VERTICAL peak
3 *	2422.000	102.58	27.75	3.46	37.77	96.02	74.00	22.02	VERTICAL peak


Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

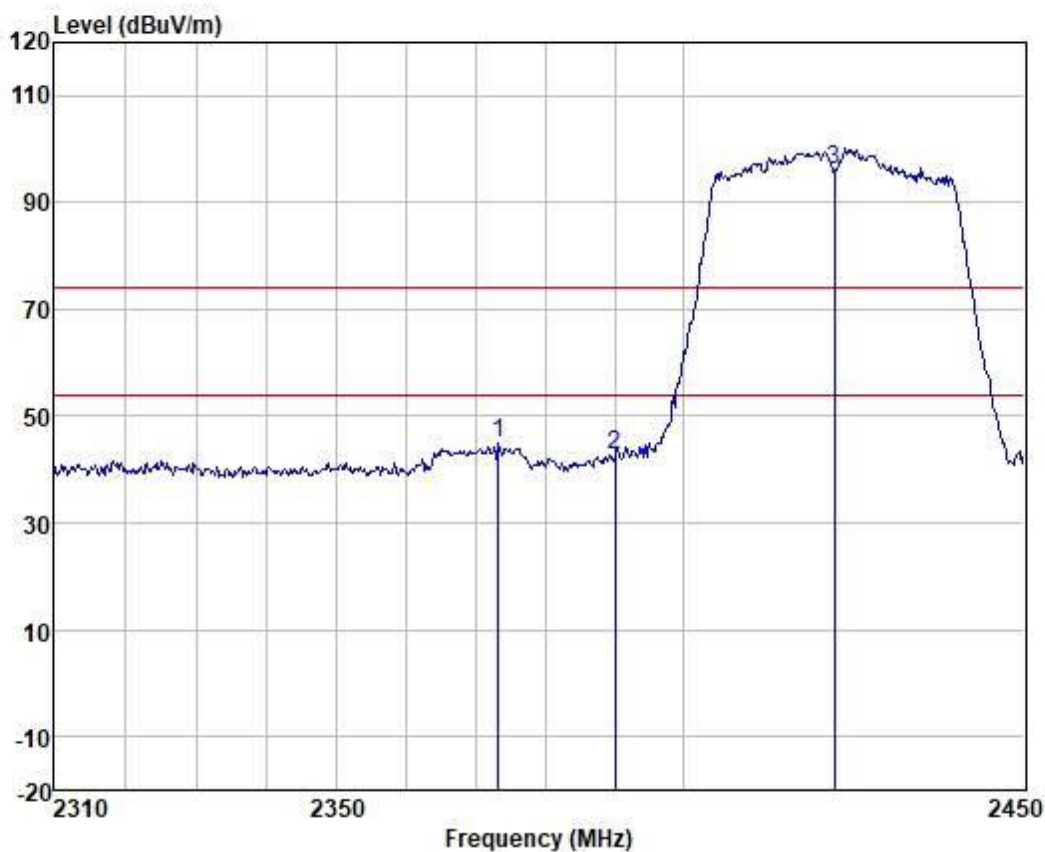

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2373.098	51.71	27.66	3.44	37.77	45.04	74.00	-28.96	HORIZONTAL peak
2	2390.000	49.41	27.68	3.44	37.77	42.76	74.00	-31.24	HORIZONTAL peak
3 *	2422.000	102.55	27.75	3.46	37.77	95.99	74.00	21.99	HORIZONTAL peak




Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

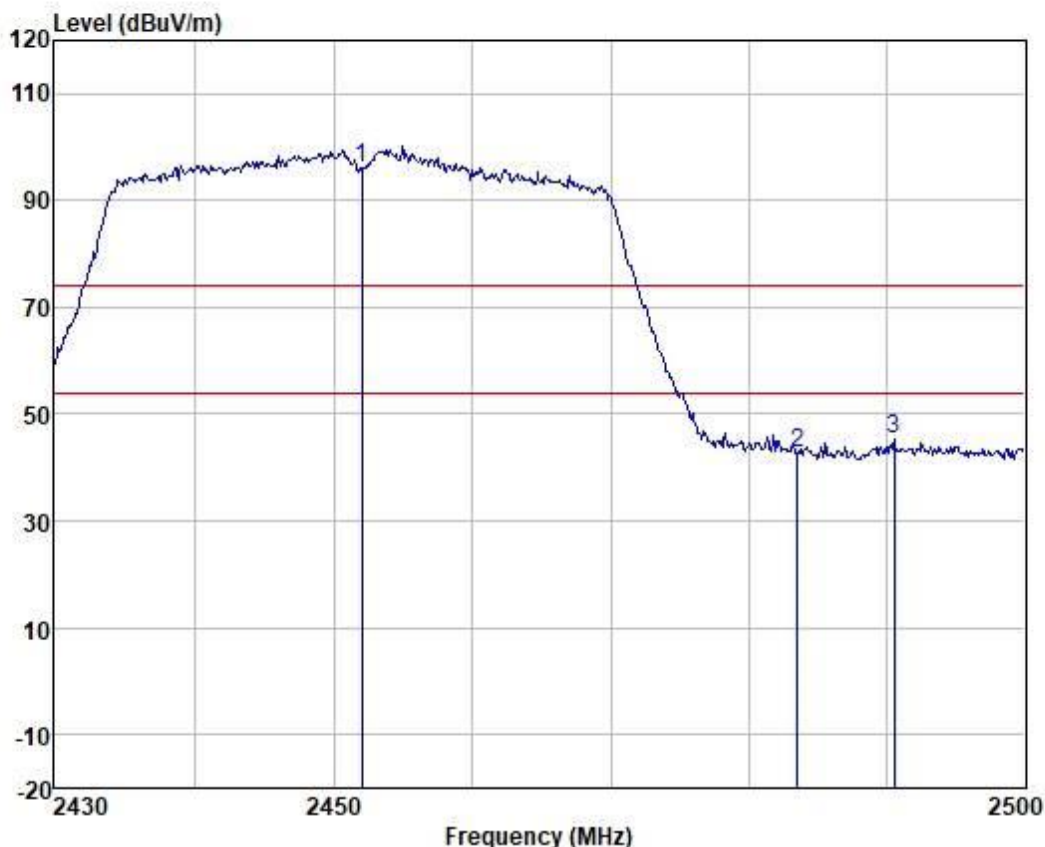

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 *	2452.000	102.43	27.80	3.47	37.76	95.94	74.00	21.94	VERTICAL peak
2	2483.500	49.11	27.85	3.49	37.76	42.69	74.00	-31.31	VERTICAL peak
3	2490.575	51.56	27.86	3.49	37.76	45.15	74.00	-28.85	VERTICAL peak




Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

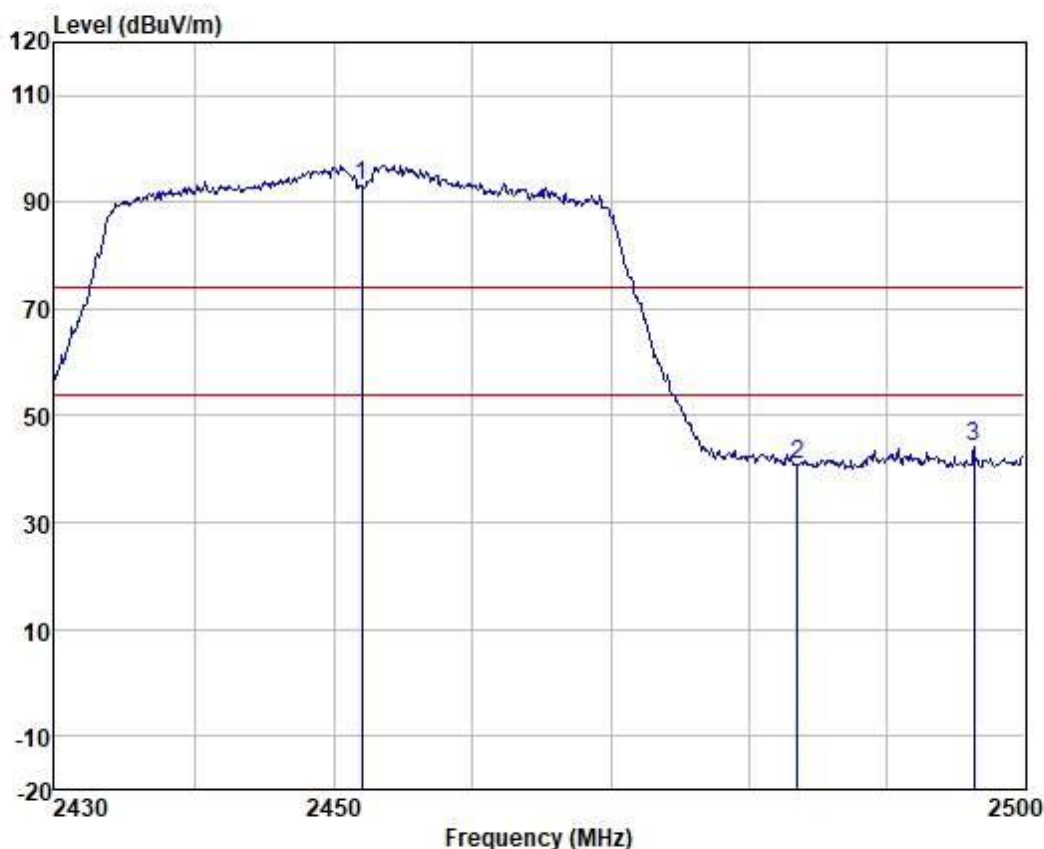


	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 *	2452.000	99.52	27.80	3.47	37.76	93.03	74.00	19.03	HORIZONTAL peak
2	2483.500	47.20	27.85	3.49	37.76	40.78	74.00	-33.22	HORIZONTAL peak
3	2496.382	50.57	27.87	3.49	37.76	44.17	74.00	-29.83	HORIZONTAL peak

Test Mode: 00; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

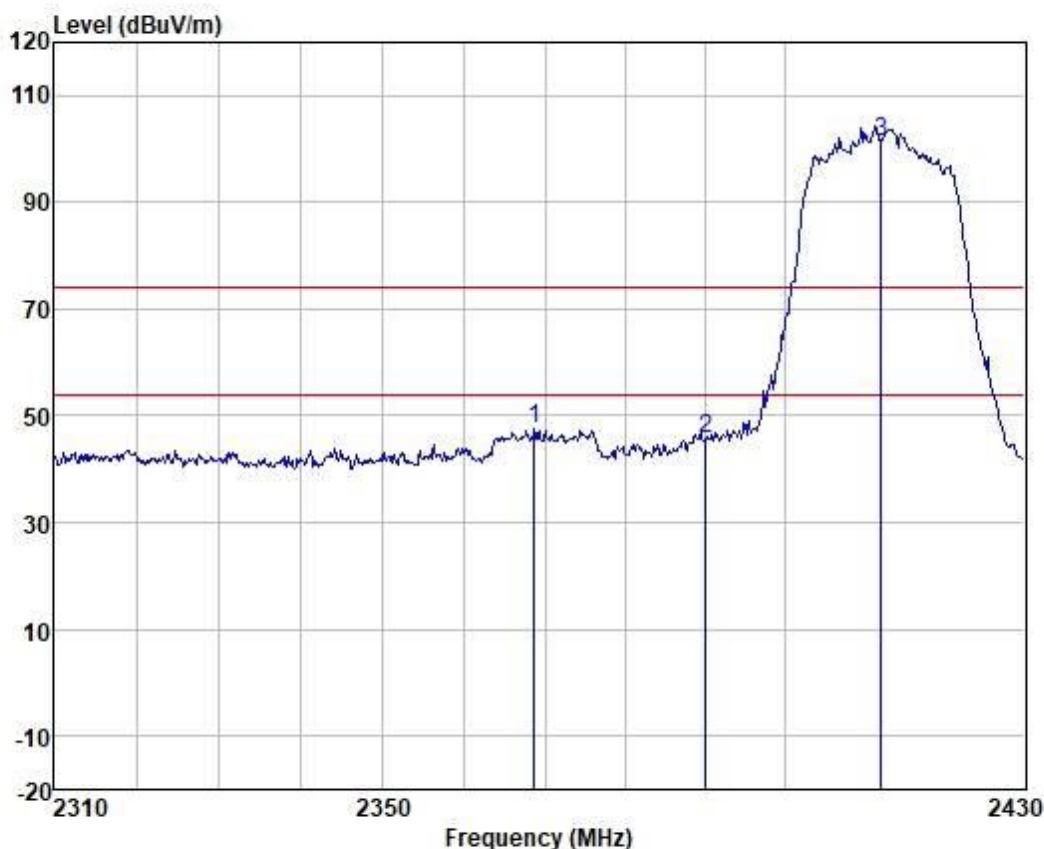

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2368.641	54.41	27.64	3.43	37.77	47.71	74.00	-26.29	VERTICAL peak
2	2390.000	52.18	27.68	3.44	37.77	45.53	74.00	-28.47	VERTICAL peak
3 *	2412.000	107.99	27.74	3.46	37.77	101.42	74.00	27.42	VERTICAL peak


Test Mode: 00; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

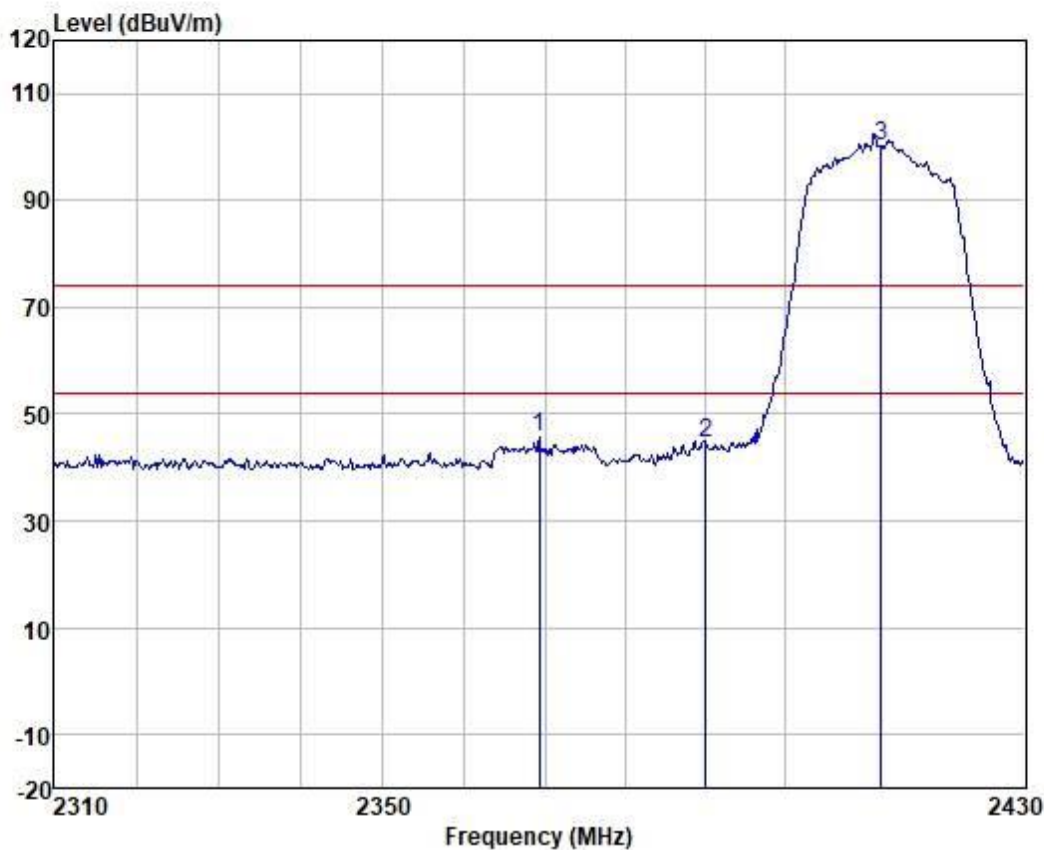

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Loss	Factor	dBuV/m	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dB		
1	2369.360	52.42	27.64	3.43	37.77	45.72	74.00	-28.28	HORIZONTAL peak
2	2390.000	51.21	27.68	3.44	37.77	44.56	74.00	-29.44	HORIZONTAL peak
3 *	2412.000	106.93	27.74	3.46	37.77	100.36	74.00	26.36	HORIZONTAL peak



Test Mode: 00; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

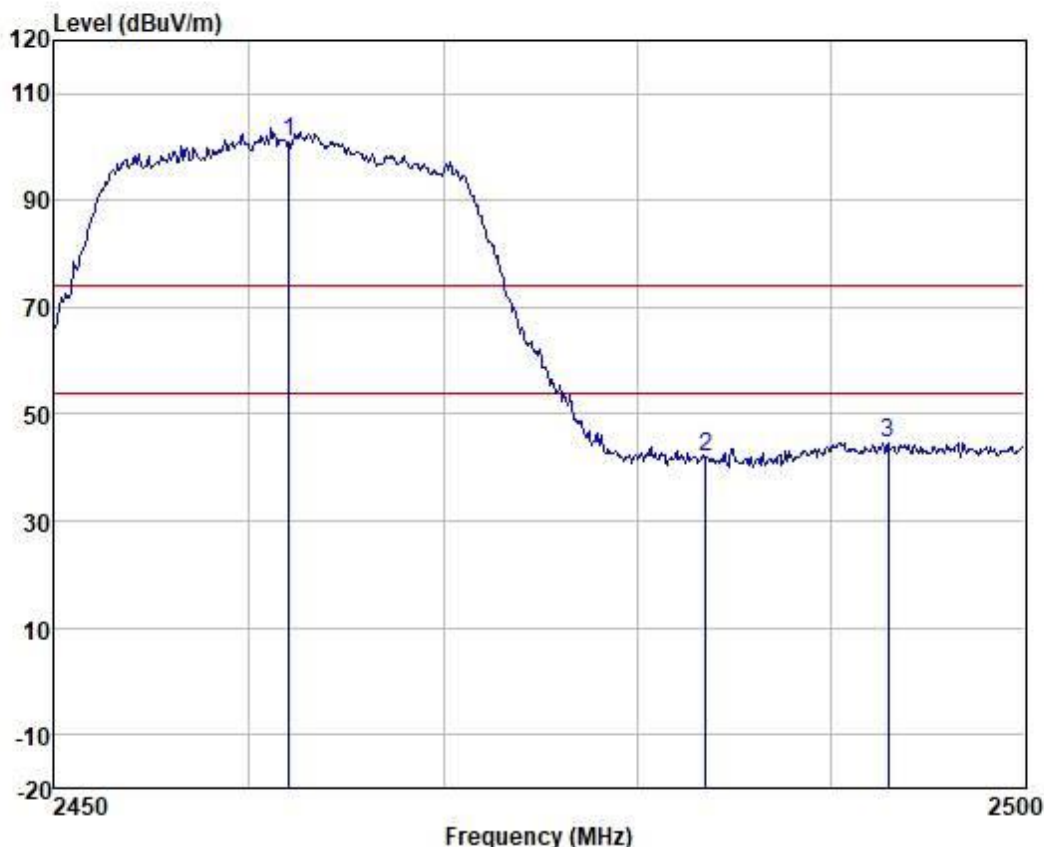

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Loss	Factor	dBuV/m	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dB		
1 *	2462.000	107.55	27.82	3.48	37.76	101.09	74.00	27.09	VERTICAL peak
2	2483.500	48.27	27.85	3.49	37.76	41.85	74.00	-32.15	VERTICAL peak
3	2492.990	51.17	27.86	3.49	37.76	44.76	74.00	-29.24	VERTICAL peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (EMC) EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Test Mode: 00; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

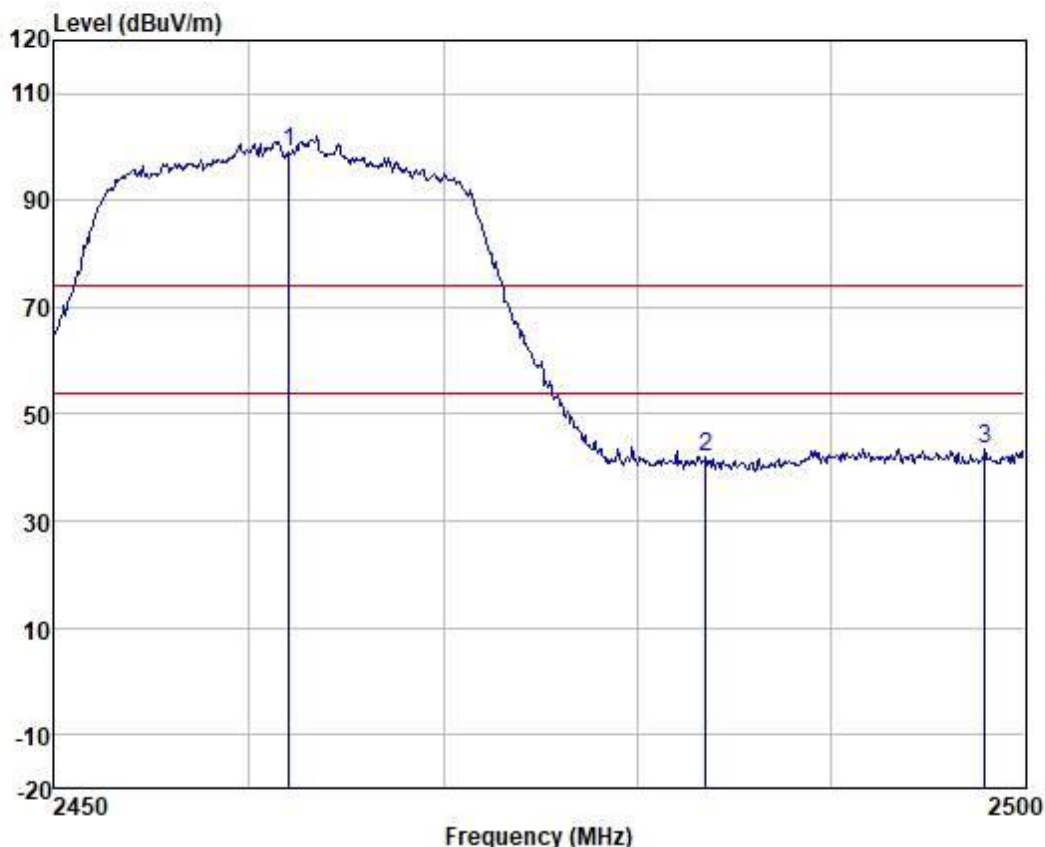

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Loss	Factor	dBuV/m	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dB		
1 *	2462.000	105.51	27.82	3.48	37.76	99.05	74.00	25.05	HORIZONTAL peak
2	2483.500	48.34	27.85	3.49	37.76	41.92	74.00	-32.08	HORIZONTAL peak
3	2497.980	49.95	27.87	3.49	37.76	43.55	74.00	-30.45	HORIZONTAL peak



7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Limit:

Test Distance: 3 m

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23.9 °C


Humidity: 60.8 % RH

Atmospheric Pressure: 1013 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	Operation(2.4G Wi-Fi):Keep the EUT communication with the companion device via 2.4G Wi-Fi(Powered by DC source).
Final test	07	Operation(2.4G Wi-Fi):Keep the EUT communication with the companion device via 2.4G Wi-Fi(Powered by ac adapter: model:HKA06012050).
Final test	09	Operation(2.4G Wi-Fi):Keep the EUT communication with the companion device via 2.4G Wi-Fi(Powered by PoE adapter: model:P030U05).

7.3.3 Test Setup Diagram

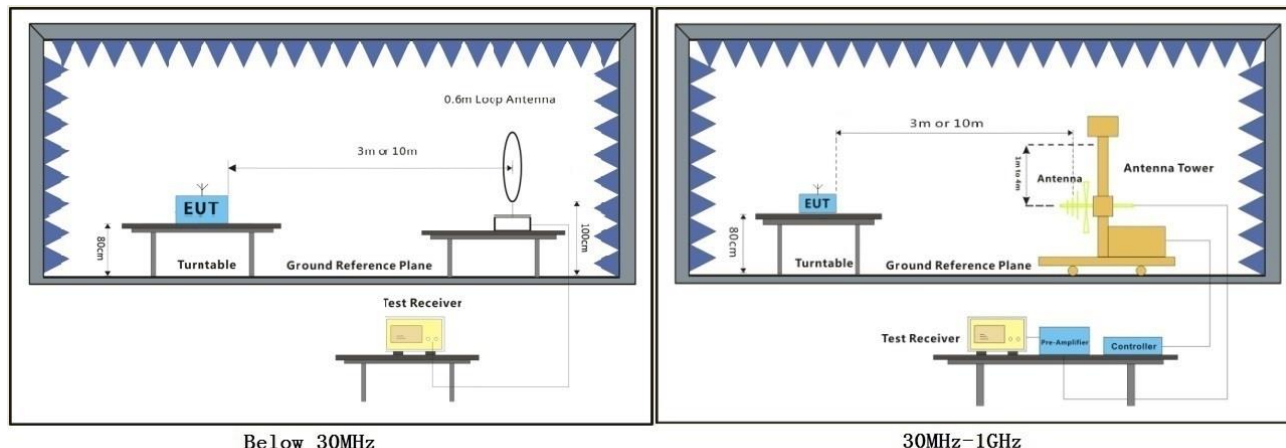

7.3.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Test Mode: 05; Polarity: Horizontal

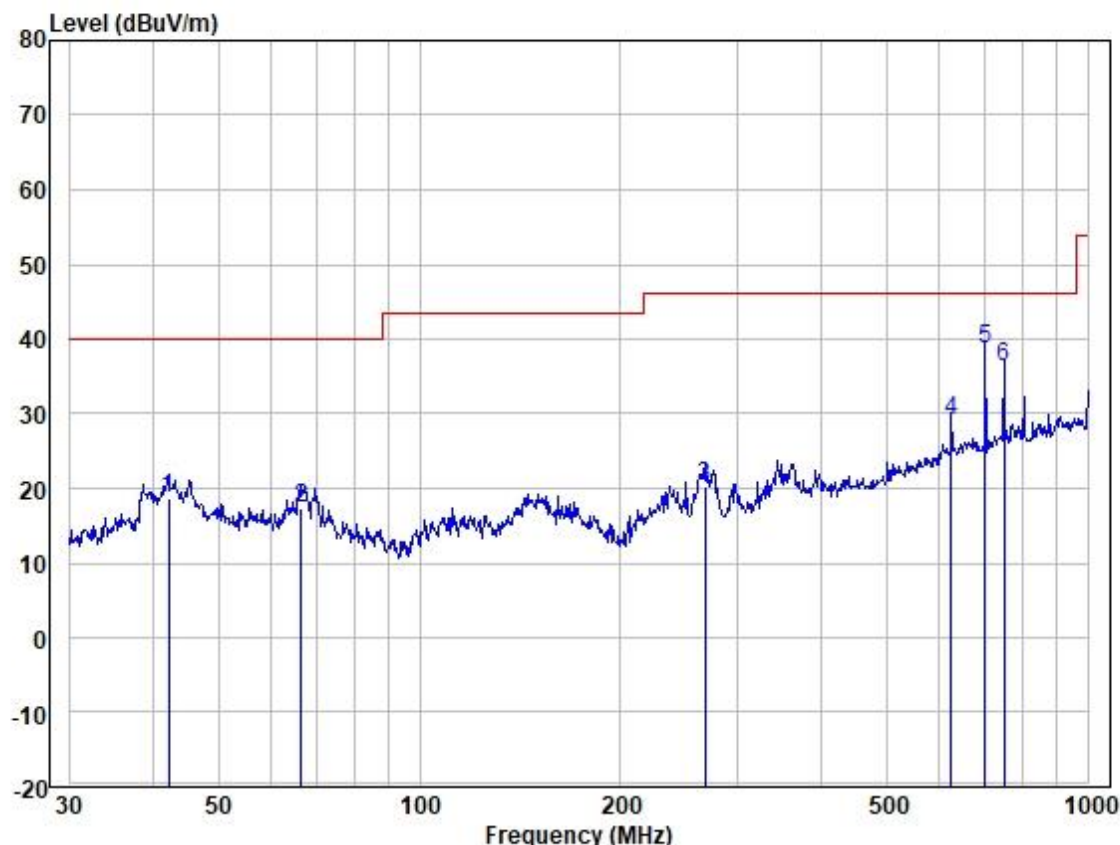


Site : 966 Chamber
Job :
Model :
Power :
Test Mode : GP304C-120-200

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	42.154	31.94	19.31	0.36	32.87	18.74	40.00	-21.26	HORIZONTAL	QP
2	66.499	32.13	17.68	0.44	32.86	17.39	40.00	-22.61	HORIZONTAL	QP
3	267.546	33.95	18.15	0.94	32.87	20.17	46.02	-25.85	HORIZONTAL	QP
4	625.078	34.19	26.20	1.45	32.84	29.00	46.02	-17.02	HORIZONTAL	QP
5	701.761	42.79	26.90	1.54	32.53	38.70	46.02	-7.32	HORIZONTAL	QP
6	750.108	38.82	28.23	1.60	32.47	36.18	46.02	-9.84	HORIZONTAL	QP



Test Mode: 05; Polarity: Vertical

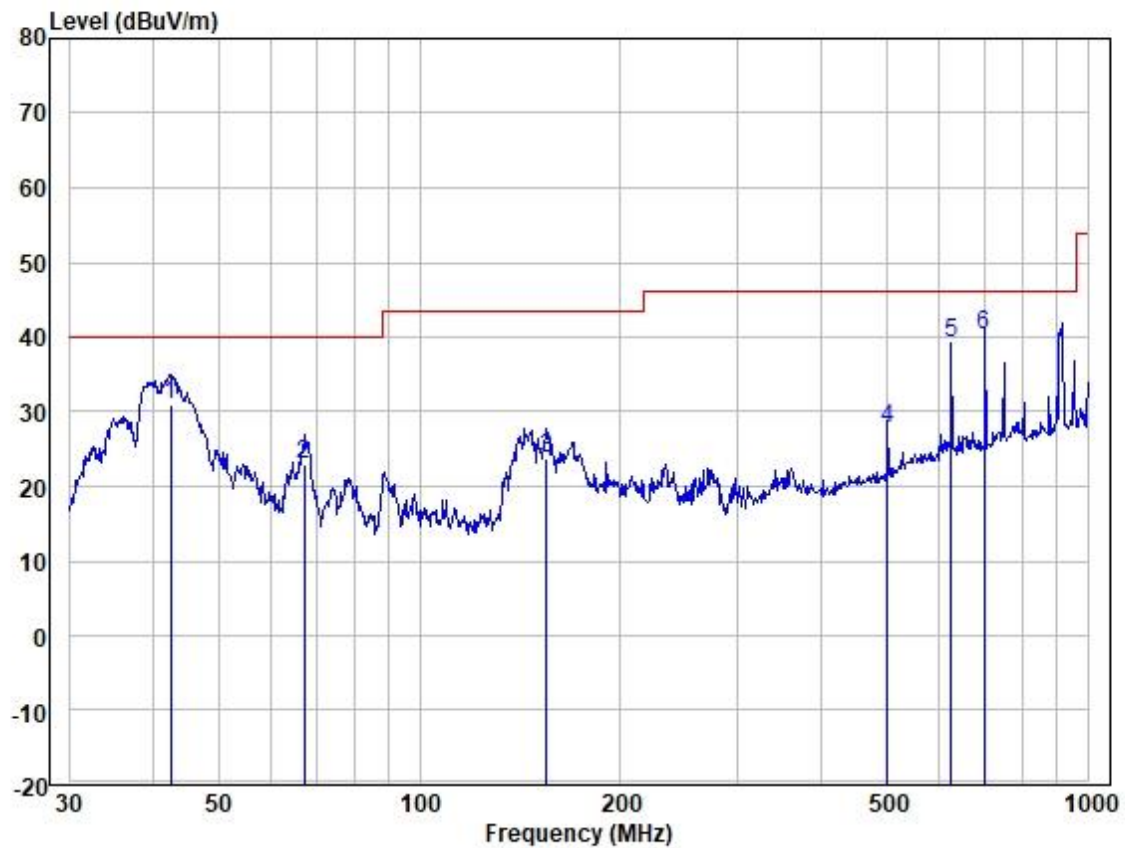


Site : 966 Chamber
Job :
Model :
Power :
Test Mode : GP304C-120-200

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	42.451	44.02	19.31	0.36	32.87	30.82	40.00	-9.18	VERTICAL	QP
2	67.202	37.62	17.68	0.45	32.86	22.89	40.00	-17.11	VERTICAL	QP
3	154.821	36.77	19.16	0.69	32.82	23.80	43.52	-19.72	VERTICAL	QP
4	501.179	35.95	23.58	1.29	32.99	27.83	46.02	-18.19	VERTICAL	QP
5	625.078	44.31	26.20	1.45	32.84	39.12	46.02	-6.90	VERTICAL	QP
6	700.000	44.50	26.87	1.54	32.53	40.38	46.02	-5.64	VERTICAL	QP



Test Mode: 07; Polarity: Horizontal

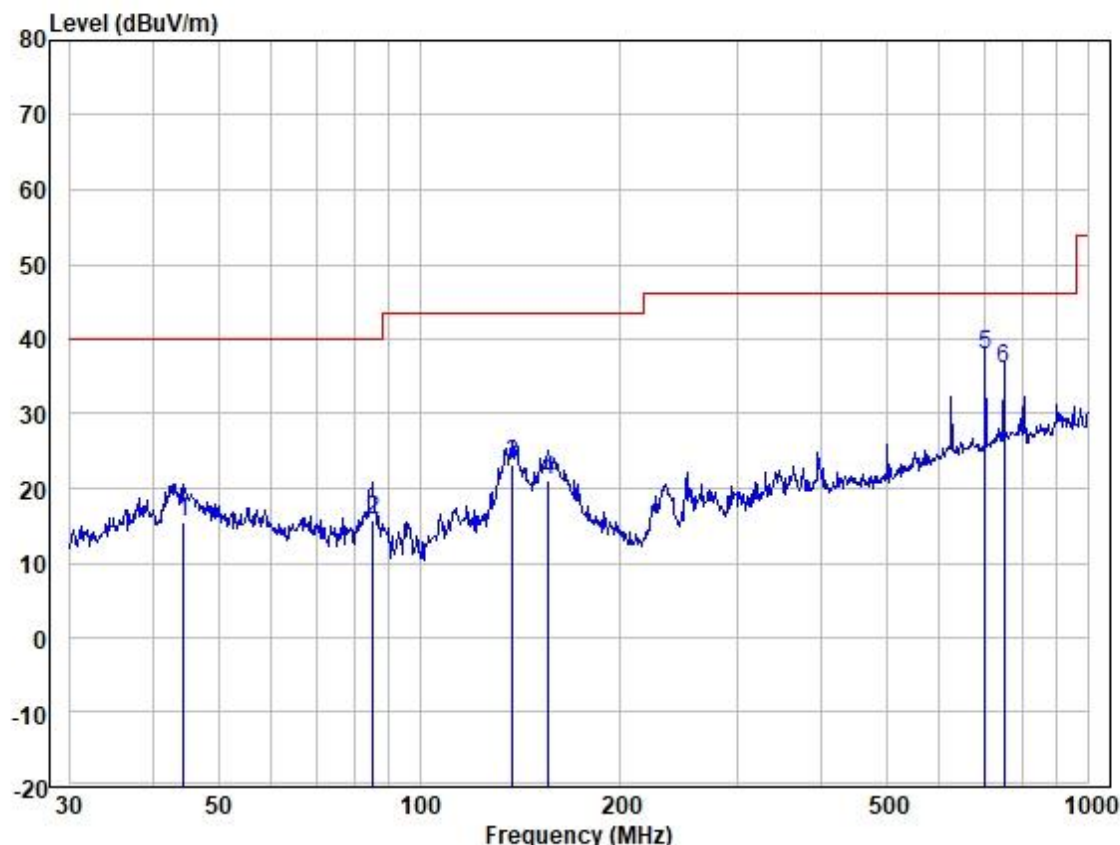


Site : 966 Chamber
Job :
Model :
Power :
Test Mode : HKA06012050-7F

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	44.431	28.62	19.45	0.37	32.87	15.57	40.00	-24.43	HORIZONTAL	QP
2	85.298	33.84	14.23	0.51	32.82	15.76	40.00	-24.24	HORIZONTAL	QP
3	137.903	36.73	18.55	0.64	32.81	23.11	43.52	-20.41	HORIZONTAL	QP
4	155.910	34.01	19.17	0.69	32.83	21.04	43.52	-22.48	HORIZONTAL	QP
5	701.761	42.02	26.90	1.54	32.53	37.93	46.02	-8.09	HORIZONTAL	QP
6	750.108	38.76	28.23	1.60	32.47	36.12	46.02	-9.90	HORIZONTAL	QP



Test Mode: 07; Polarity: Vertical

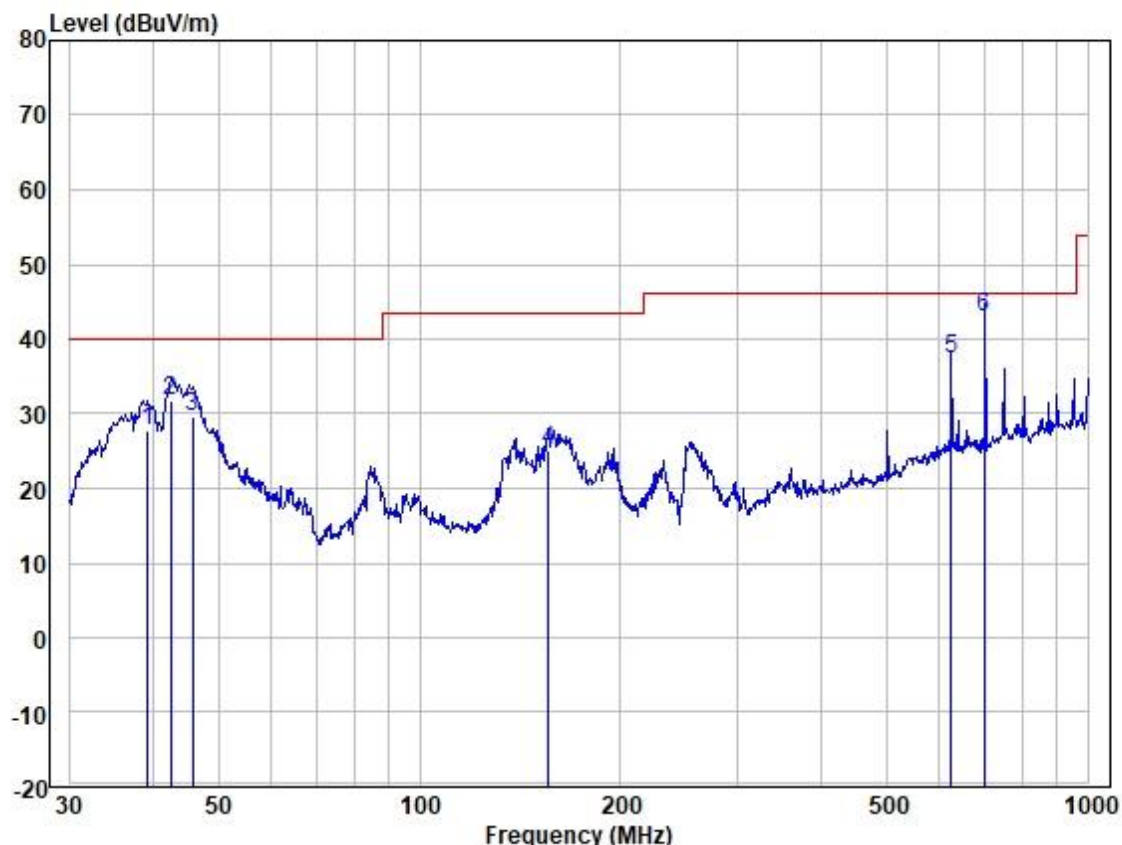


Site : 966 Chamber
 Job :
 Model :
 Power :
 Test Mode : HKA06012050-7F

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	39.162	41.30	18.93	0.35	32.86	27.72	40.00	-12.28	VERTICAL	QP
2	42.451	44.97	19.31	0.36	32.87	31.77	40.00	-8.23	VERTICAL	QP
3	45.855	42.65	19.47	0.37	32.87	29.62	40.00	-10.38	VERTICAL	QP
4	155.910	37.99	19.17	0.69	32.83	25.02	43.52	-18.50	VERTICAL	QP
5	625.078	42.47	26.20	1.45	32.84	37.28	46.02	-8.74	VERTICAL	QP
6	700.000	47.10	26.87	1.54	32.53	42.98	46.02	-3.04	VERTICAL	QP



Test Mode: 09; Polarity: Horizontal

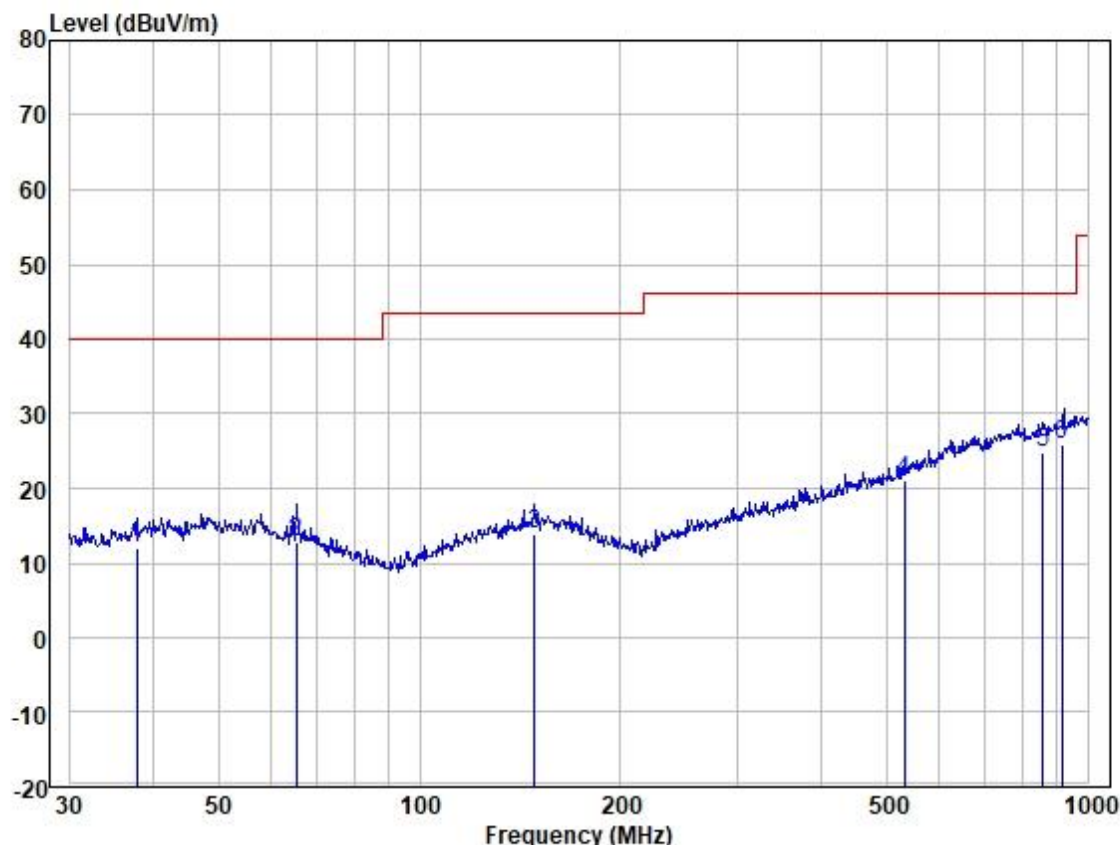


Site : 966 Chamber
Job :
Model :
Power :
Test Mode : P030U05

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	37.812	25.76	18.73	0.34	32.86	11.97	40.00	-28.03	HORIZONTAL	QP
2	65.343	27.35	17.98	0.44	32.86	12.91	40.00	-27.09	HORIZONTAL	QP
3	148.441	27.19	18.96	0.66	32.82	13.99	43.52	-29.53	HORIZONTAL	QP
4	531.964	28.46	24.26	1.32	32.97	21.07	46.02	-24.95	HORIZONTAL	QP
5	857.025	26.46	28.95	1.72	32.31	24.82	46.02	-21.20	HORIZONTAL	QP
6	912.862	26.50	29.51	1.77	31.90	25.88	46.02	-20.14	HORIZONTAL	QP



Test Mode: 09; Polarity: Vertical

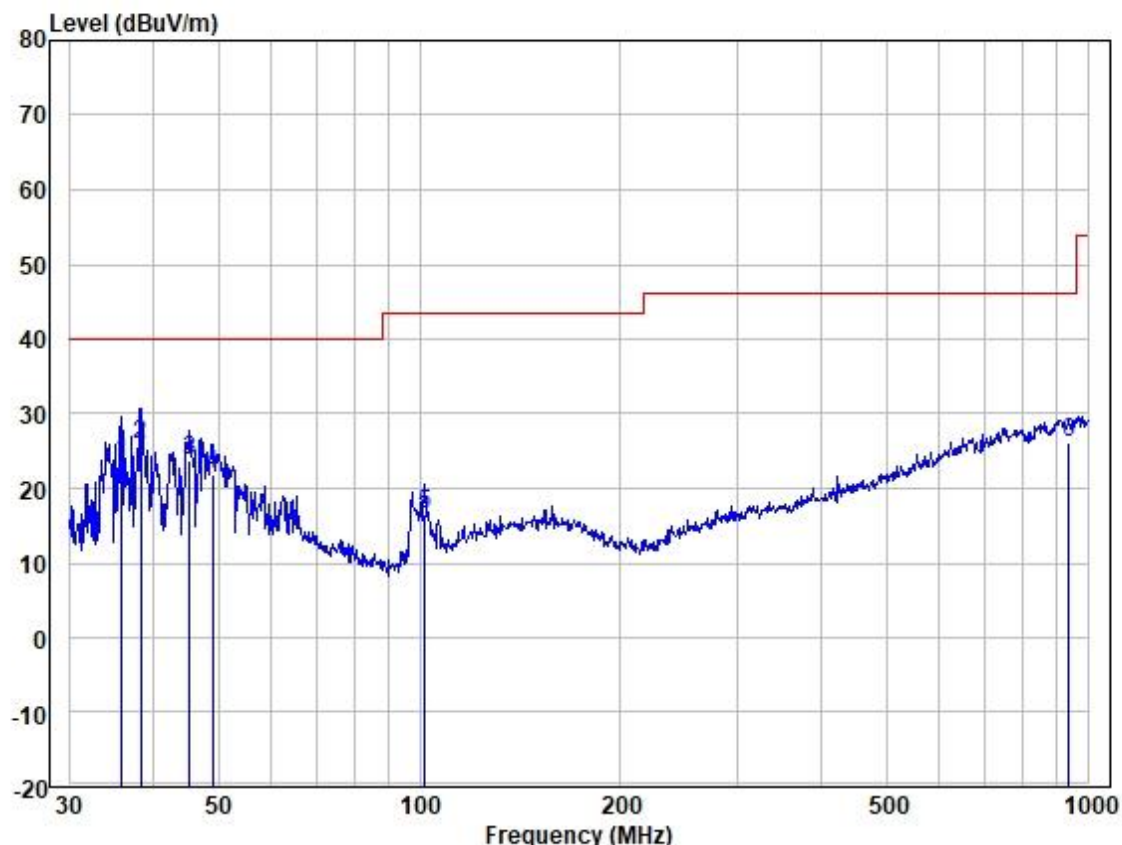

Site : 966 Chamber
Job :
Model :
Power :
Test Mode : P030U05

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	35.875	37.70	18.39	0.33	32.86	23.56	40.00	-16.44	VERTICAL	QP
2	38.346	39.34	18.93	0.34	32.86	25.75	40.00	-14.25	VERTICAL	QP
3	45.375	36.88	19.47	0.37	32.87	23.85	40.00	-16.15	VERTICAL	QP
4	49.014	34.90	19.53	0.39	32.88	21.94	40.00	-18.06	VERTICAL	QP
5	102.001	34.00	14.87	0.54	32.80	16.61	43.52	-26.91	VERTICAL	QP
6	935.546	26.42	29.78	1.78	31.78	26.20	46.02	-19.82	VERTICAL	QP



7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Limit:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 24.7 °C Humidity: 50.6 % RH Atmospheric Pressure: 1013 mbar


7.4.2 Test Mode Description

Pre-scan / Mode
Final test Code Description

TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40). Only the data of worst case is recorded in the report.

Final test 00

7.4.3 Test Setup Diagram

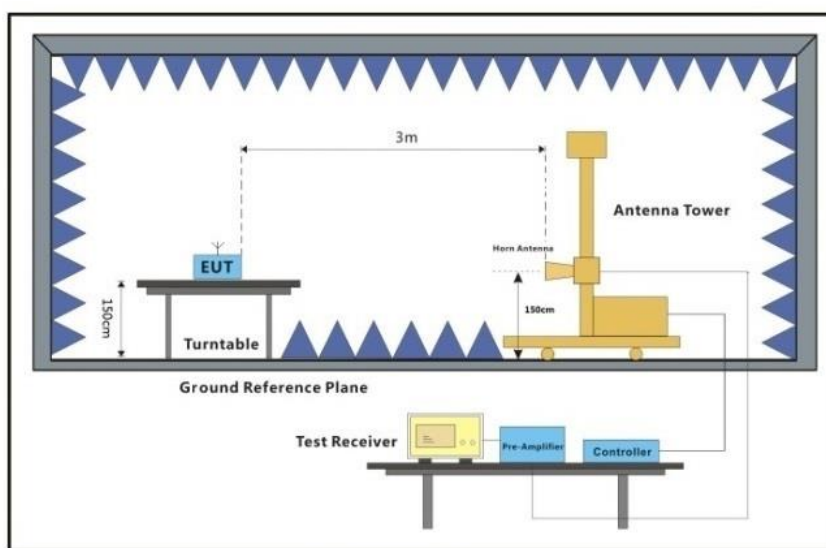

Above 1GHz



7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
- 4: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
- 5:For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $\leq 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (EMC) EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com


Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

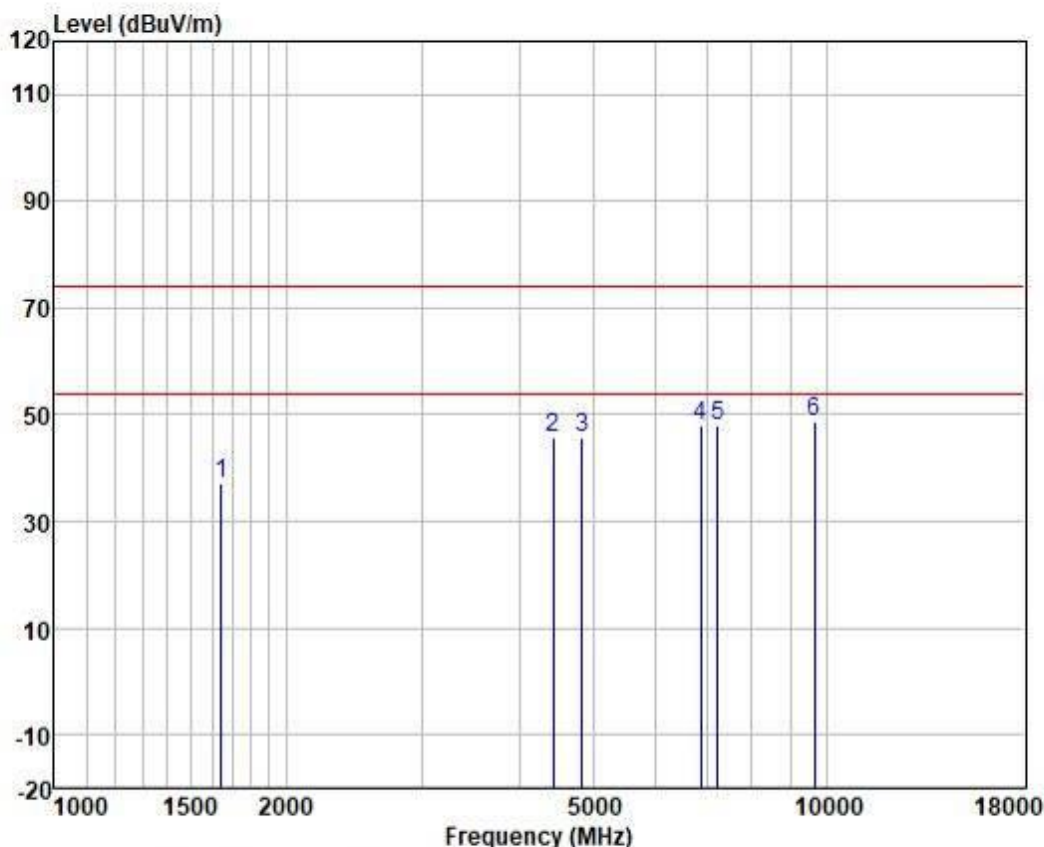

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
		dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1644.019	47.65	24.84	2.79	38.08	37.20	74.00	-36.80	VERTICAL peak
2	4430.628	44.65	33.87	4.61	37.45	45.68	74.00	-28.32	VERTICAL peak
3	4824.000	44.27	34.16	4.82	37.37	45.88	74.00	-28.12	VERTICAL peak
4	6874.906	44.50	34.88	5.83	37.14	48.07	74.00	-25.93	VERTICAL peak
5	7236.000	43.25	35.78	5.95	37.17	47.81	74.00	-26.19	VERTICAL peak
6	9648.000	39.97	38.70	7.05	37.11	48.61	74.00	-25.39	VERTICAL peak




Test Mode: 00; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

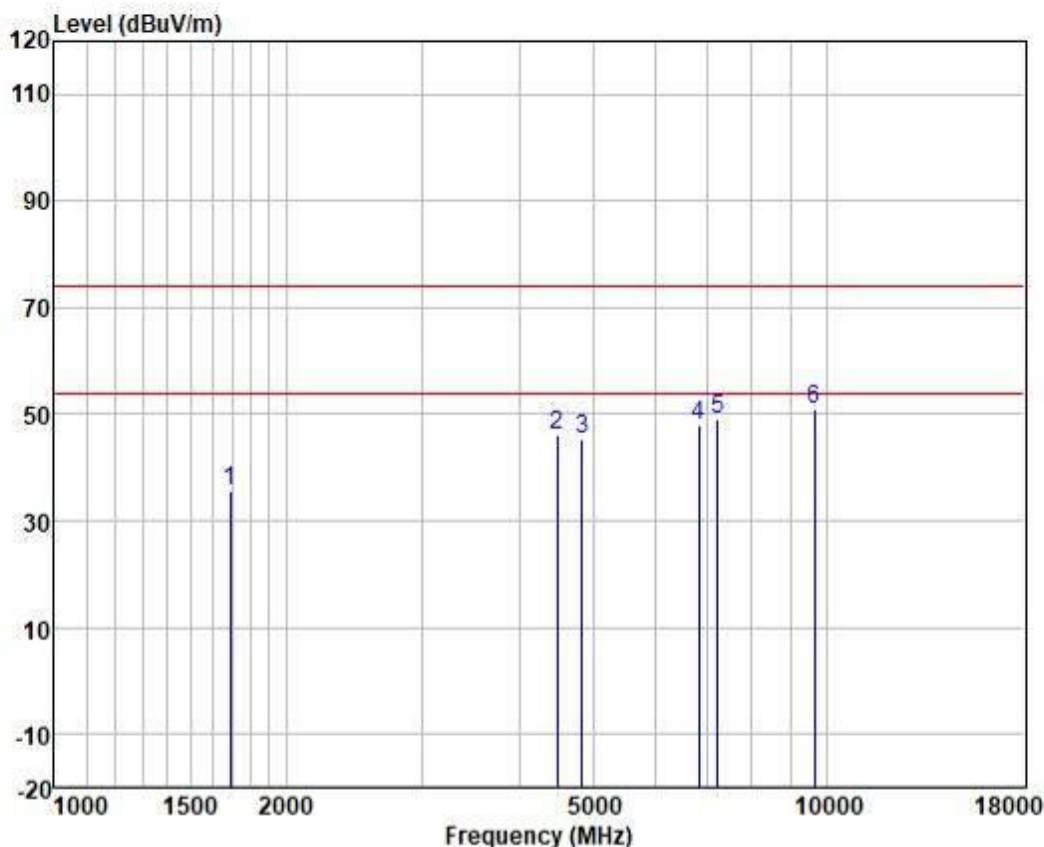

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
		dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1692.231	45.81	25.09	2.84	38.03	35.71	74.00	-38.29	HORIZONTAL peak
2	4482.150	44.75	34.12	4.62	37.44	46.05	74.00	-27.95	HORIZONTAL peak
3	4824.000	43.76	34.16	4.82	37.37	45.37	74.00	-28.63	HORIZONTAL peak
4	6835.278	44.60	34.79	5.81	37.13	48.07	74.00	-25.93	HORIZONTAL peak
5	7236.000	44.42	35.78	5.95	37.17	48.98	74.00	-25.02	HORIZONTAL peak
6	9648.000	42.17	38.70	7.05	37.11	50.81	74.00	-23.19	HORIZONTAL peak




Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

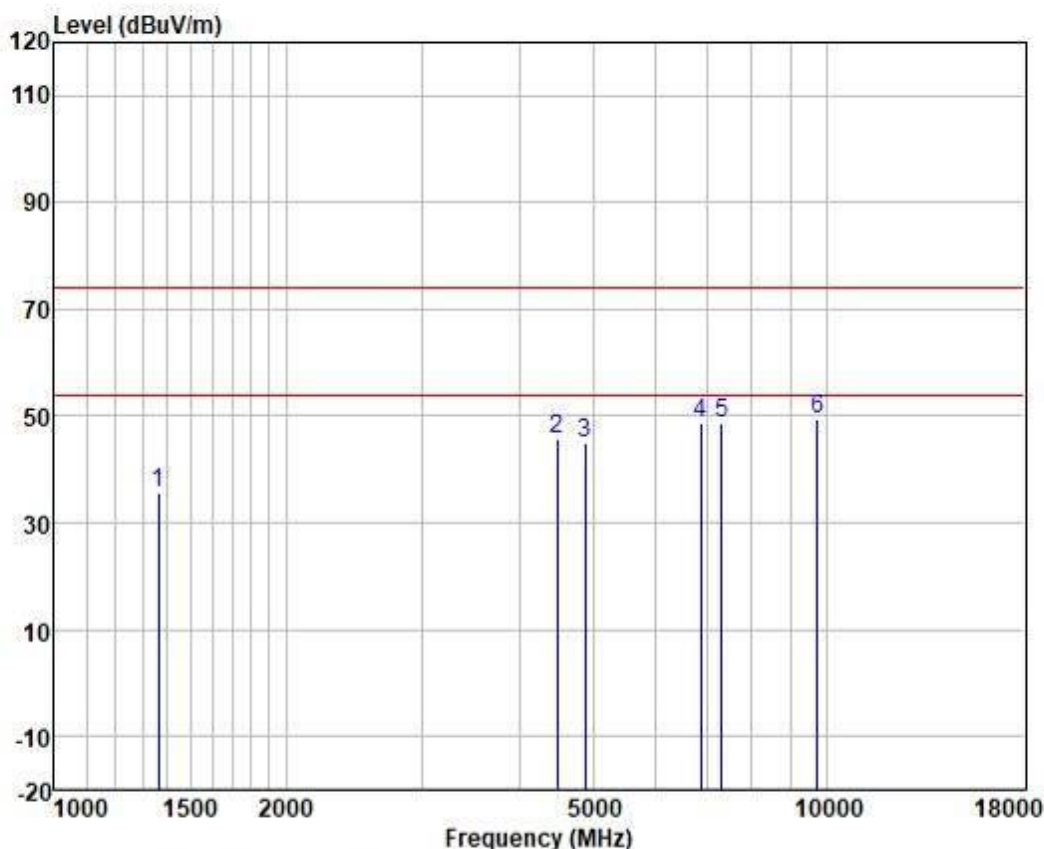

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1366.374	47.22	24.18	2.64	38.51	35.53	74.00	-38.47	VERTICAL peak
2	4482.150	44.25	34.12	4.62	37.44	45.55	74.00	-28.45	VERTICAL peak
3	4874.000	43.36	34.15	4.85	37.35	45.01	74.00	-28.99	VERTICAL peak
4	6874.906	45.02	34.88	5.83	37.14	48.59	74.00	-25.41	VERTICAL peak
5	7311.000	43.99	36.00	5.98	37.18	48.79	74.00	-25.21	VERTICAL peak
6	9748.000	40.64	38.81	7.11	37.11	49.45	74.00	-24.55	VERTICAL peak




Test Mode: 00; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

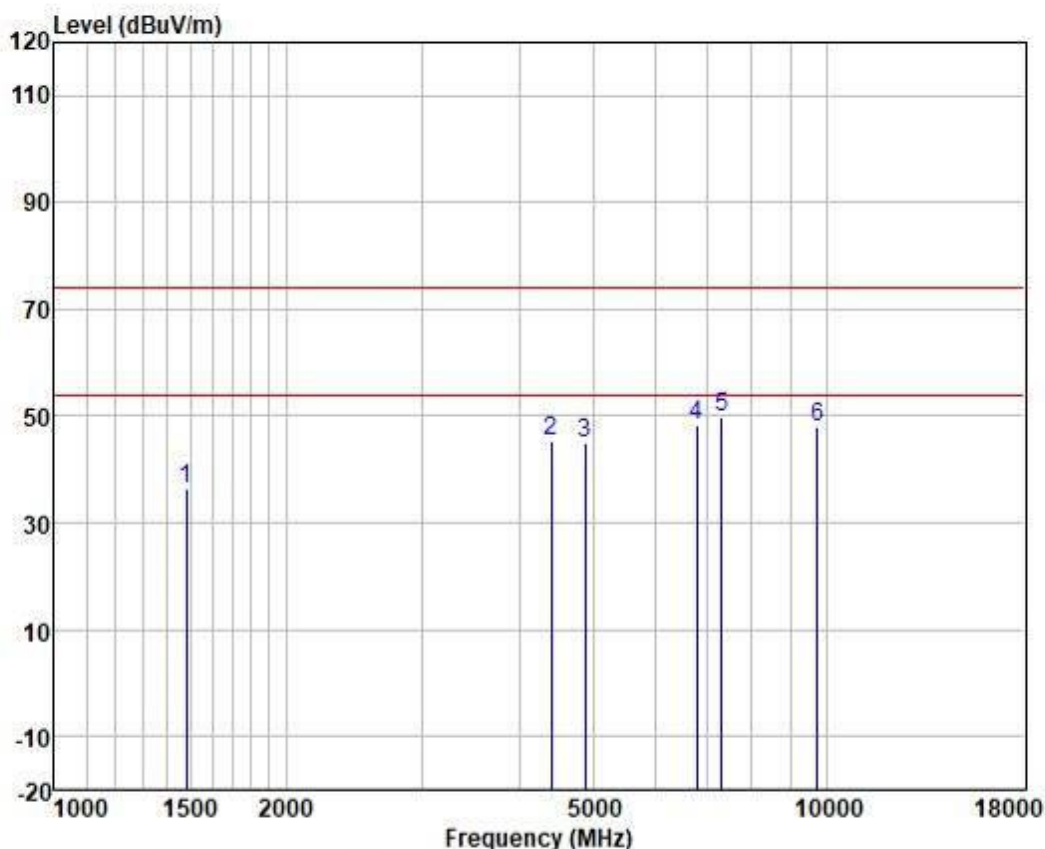

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1481.553	47.55	24.41	2.69	38.37	36.28	74.00	-37.72	HORIZONTAL peak
2	4405.090	44.43	33.74	4.61	37.46	45.32	74.00	-28.68	HORIZONTAL peak
3	4874.000	43.35	34.15	4.85	37.35	45.00	74.00	-29.00	HORIZONTAL peak
4	6795.879	44.84	34.69	5.79	37.13	48.19	74.00	-25.81	HORIZONTAL peak
5	7311.000	45.20	36.00	5.98	37.18	50.00	74.00	-24.00	HORIZONTAL peak
6	9748.000	39.19	38.81	7.11	37.11	48.00	74.00	-26.00	HORIZONTAL peak




Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

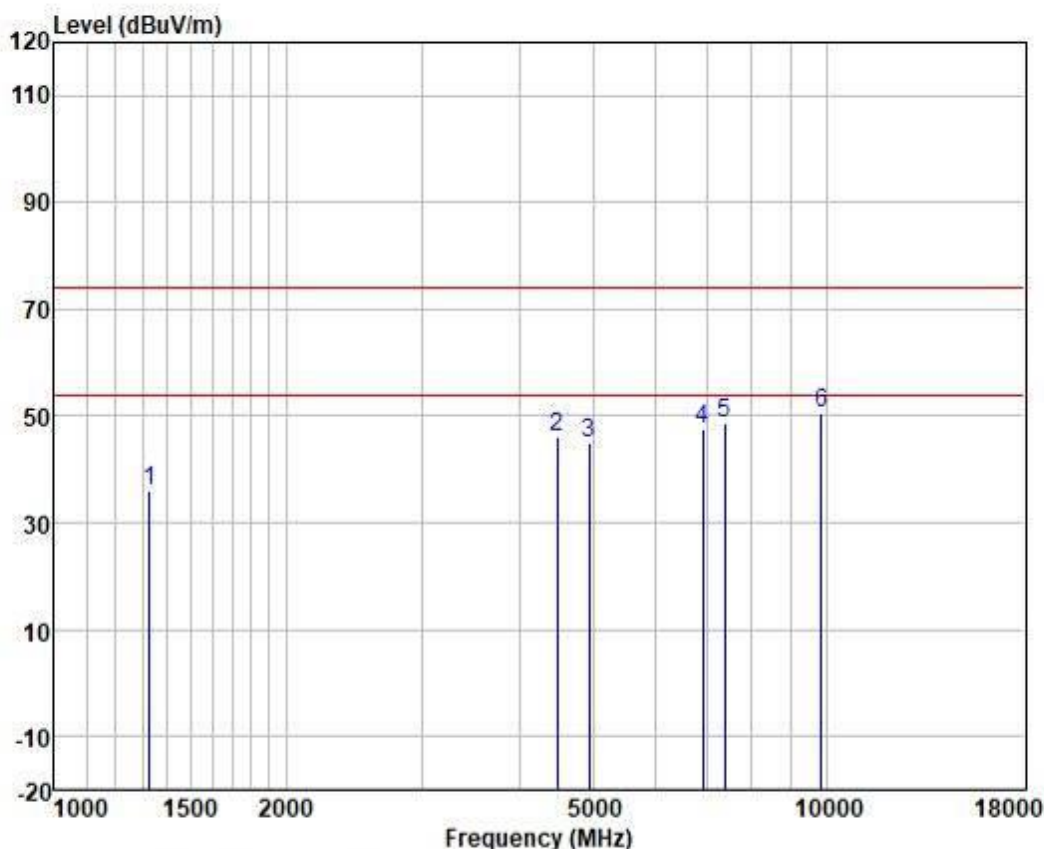

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1327.446	48.04	24.07	2.61	38.57	36.15	74.00	-37.85	VERTICAL	peak
2	4482.150	44.68	34.12	4.62	37.44	45.98	74.00	-28.02	VERTICAL	peak
3	4924.000	43.32	34.15	4.88	37.33	45.02	74.00	-28.98	VERTICAL	peak
4	6914.763	44.09	34.97	5.84	37.14	47.76	74.00	-26.24	VERTICAL	peak
5	7386.000	43.63	36.23	6.00	37.18	48.68	74.00	-25.32	VERTICAL	peak
6	9848.000	41.63	38.88	7.15	37.10	50.56	74.00	-23.44	VERTICAL	peak




Test Mode: 00; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

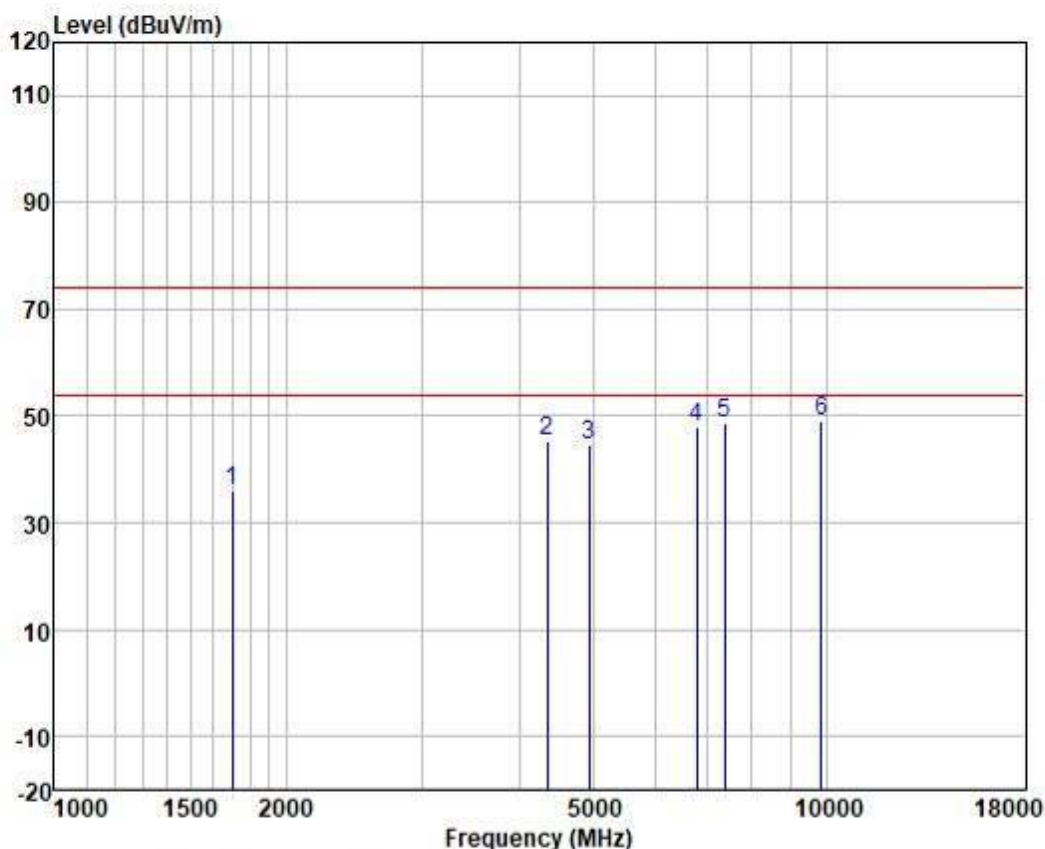

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1702.042	45.90	25.15	2.85	38.03	35.87	74.00	-38.13	HORIZONTAL peak
2	4354.454	44.84	33.43	4.60	37.46	45.41	74.00	-28.59	HORIZONTAL peak
3	4924.000	42.83	34.15	4.88	37.33	44.53	74.00	-29.47	HORIZONTAL peak
4	6795.879	44.53	34.69	5.79	37.13	47.88	74.00	-26.12	HORIZONTAL peak
5	7386.000	43.66	36.23	6.00	37.18	48.71	74.00	-25.29	HORIZONTAL peak
6	9848.000	40.10	38.88	7.15	37.10	49.03	74.00	-24.97	HORIZONTAL peak




Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

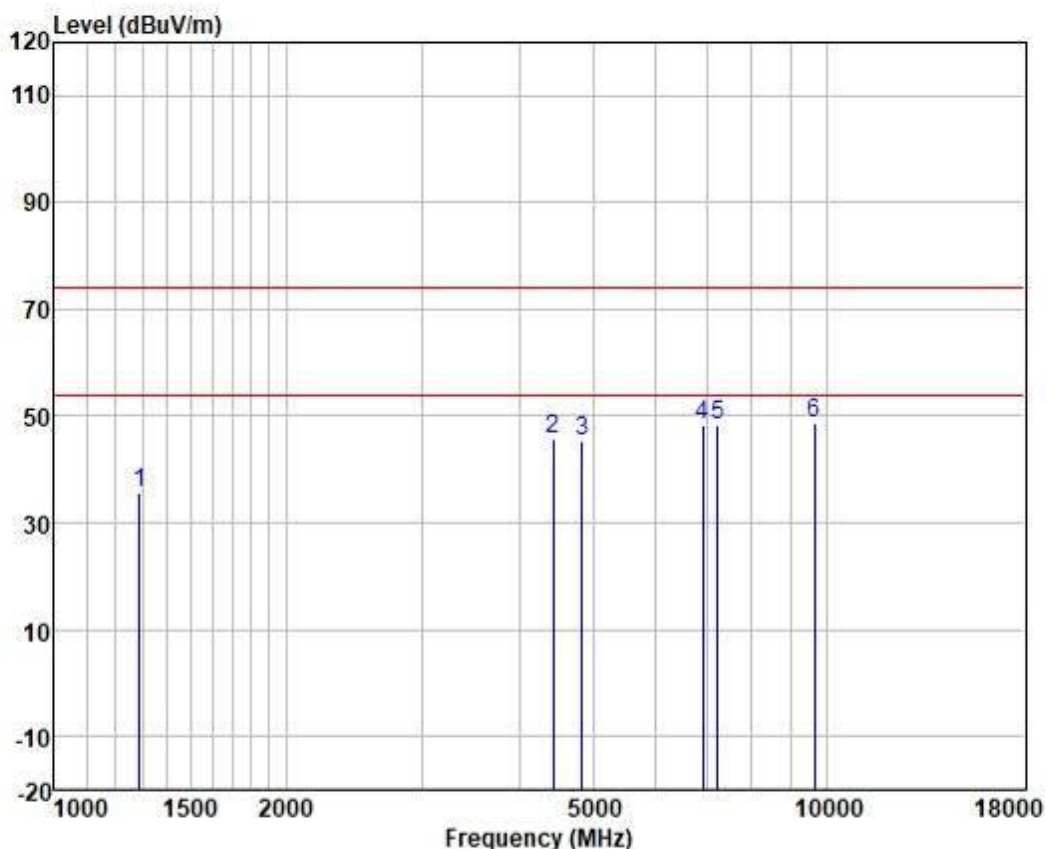

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1289.627	47.72	23.92	2.58	38.60	35.62	74.00	-38.38	VERTICAL	peak
2	4430.628	44.49	33.87	4.61	37.45	45.52	74.00	-28.48	VERTICAL	peak
3	4824.000	43.81	34.16	4.82	37.37	45.42	74.00	-28.58	VERTICAL	peak
4	6914.763	44.60	34.97	5.84	37.14	48.27	74.00	-25.73	VERTICAL	peak
5	7236.000	43.92	35.78	5.95	37.17	48.48	74.00	-25.52	VERTICAL	peak
6	9648.000	40.15	38.70	7.05	37.11	48.79	74.00	-25.21	VERTICAL	peak




Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

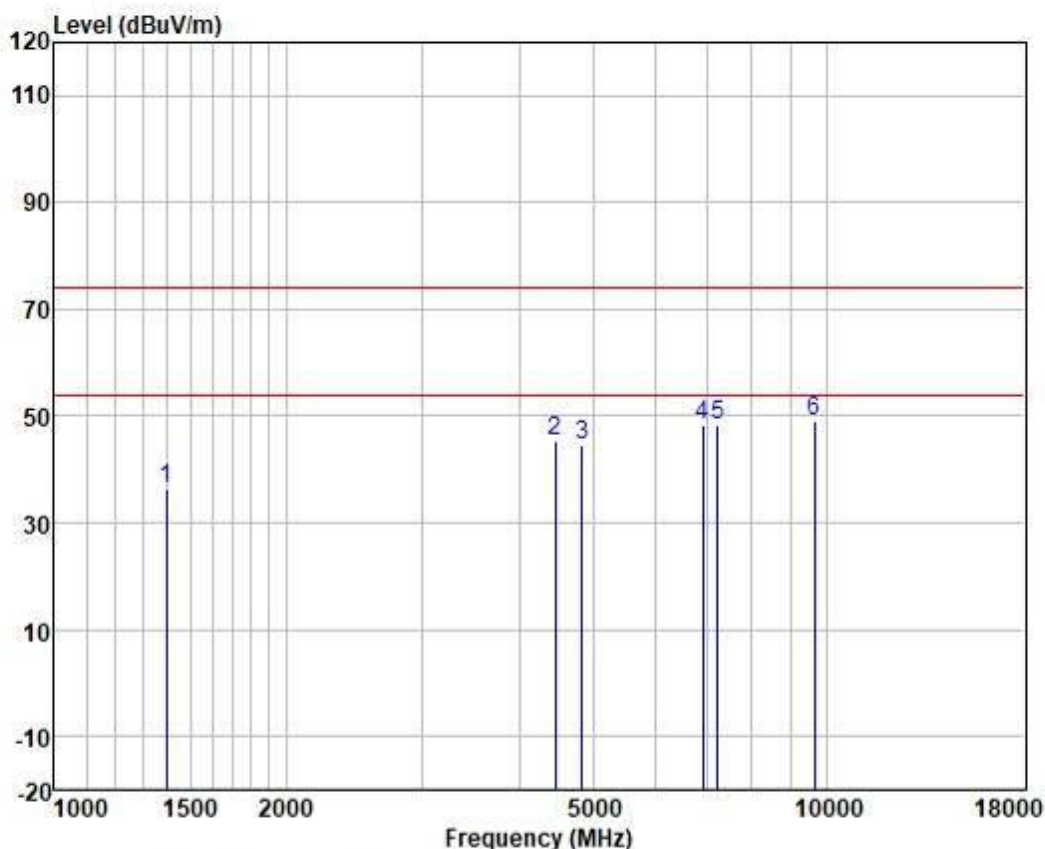

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1398.336	47.78	24.26	2.66	38.49	36.21	74.00	-37.79	HORIZONTAL	peak
2	4456.315	44.31	34.00	4.61	37.45	45.47	74.00	-28.53	HORIZONTAL	peak
3	4824.000	43.04	34.16	4.82	37.37	44.65	74.00	-29.35	HORIZONTAL	peak
4	6914.763	44.53	34.97	5.84	37.14	48.20	74.00	-25.80	HORIZONTAL	peak
5	7236.000	43.88	35.78	5.95	37.17	48.44	74.00	-25.56	HORIZONTAL	peak
6	9648.000	40.45	38.70	7.05	37.11	49.09	74.00	-24.91	HORIZONTAL	peak




Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

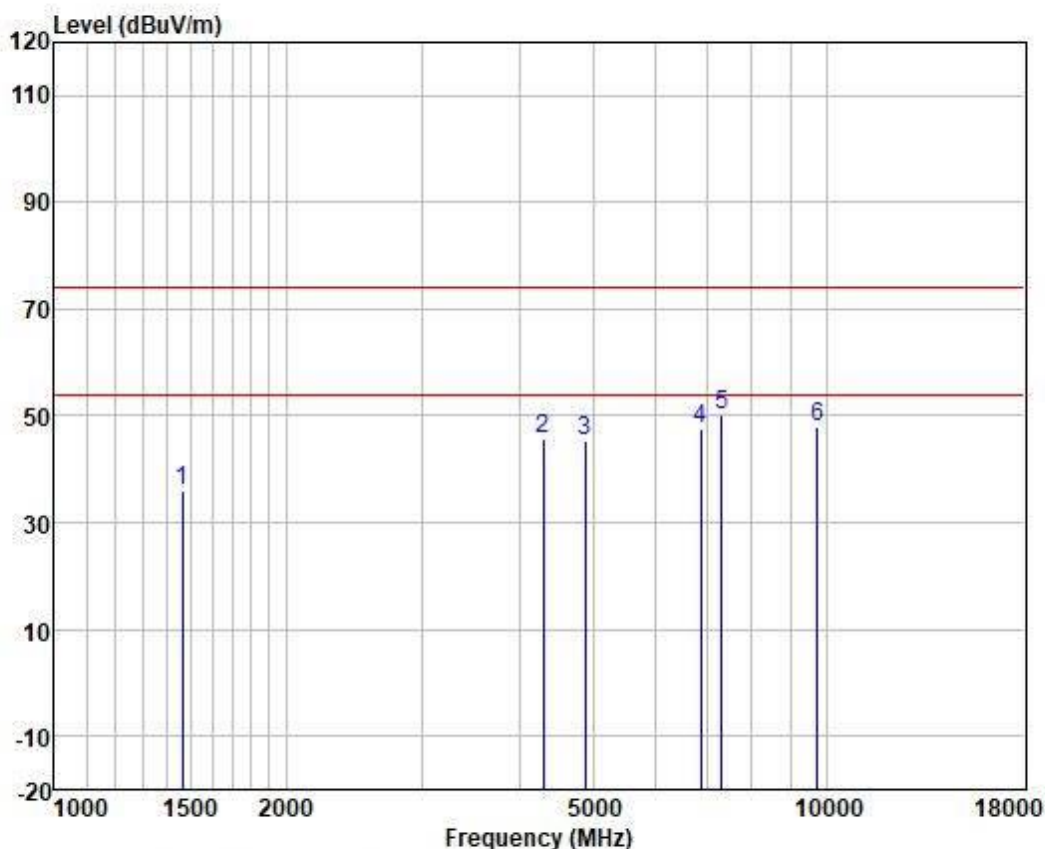

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1464.522	47.38	24.38	2.69	38.39	36.06	74.00	-37.94	VERTICAL	peak
2	4304.400	45.48	33.05	4.58	37.47	45.64	74.00	-28.36	VERTICAL	peak
3	4874.000	43.64	34.15	4.85	37.35	45.29	74.00	-28.71	VERTICAL	peak
4	6874.906	43.90	34.88	5.83	37.14	47.47	74.00	-26.53	VERTICAL	peak
5	7311.000	45.50	36.00	5.98	37.18	50.30	74.00	-23.70	VERTICAL	peak
6	9748.000	39.15	38.81	7.11	37.11	47.96	74.00	-26.04	VERTICAL	peak




Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

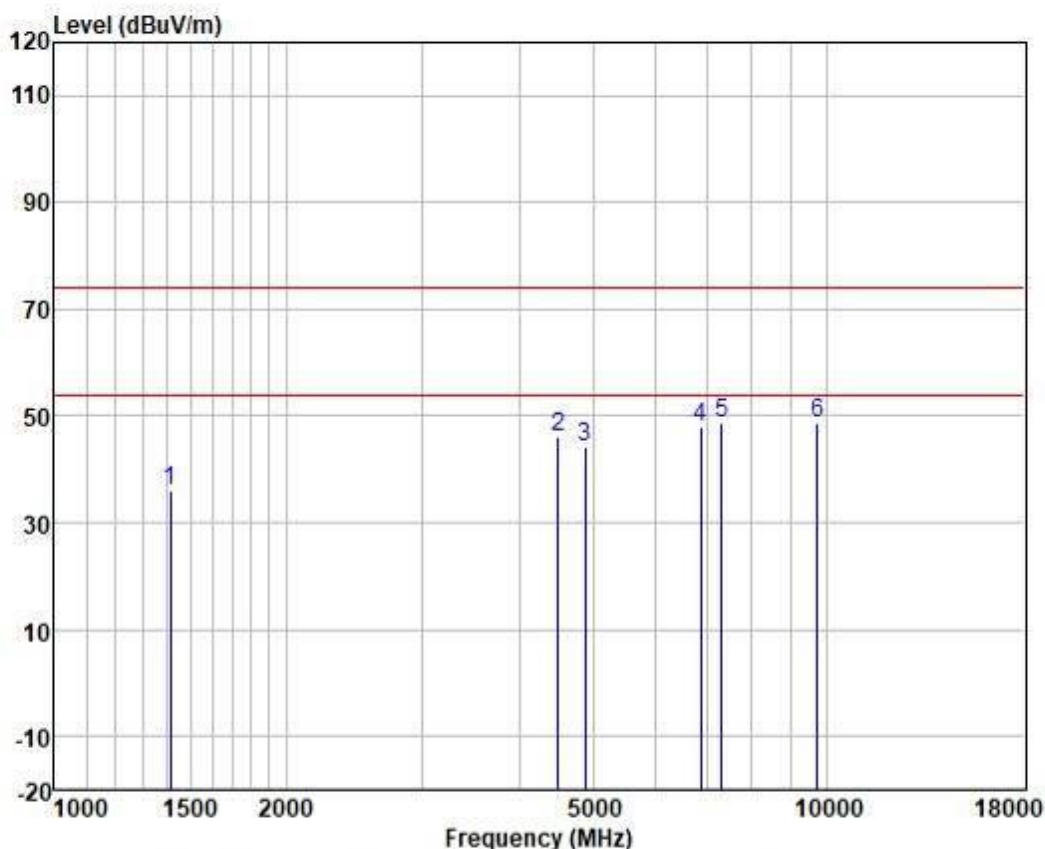

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1414.597	47.45	24.29	2.67	38.47	35.94	74.00	-38.06	HORIZONTAL	peak
2	4495.125	44.63	34.17	4.62	37.44	45.98	74.00	-28.02	HORIZONTAL	peak
3	4874.000	42.70	34.15	4.85	37.35	44.35	74.00	-29.65	HORIZONTAL	peak
4	6874.906	44.49	34.88	5.83	37.14	48.06	74.00	-25.94	HORIZONTAL	peak
5	7311.000	43.98	36.00	5.98	37.18	48.78	74.00	-25.22	HORIZONTAL	peak
6	9748.000	39.83	38.81	7.11	37.11	48.64	74.00	-25.36	HORIZONTAL	peak




Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

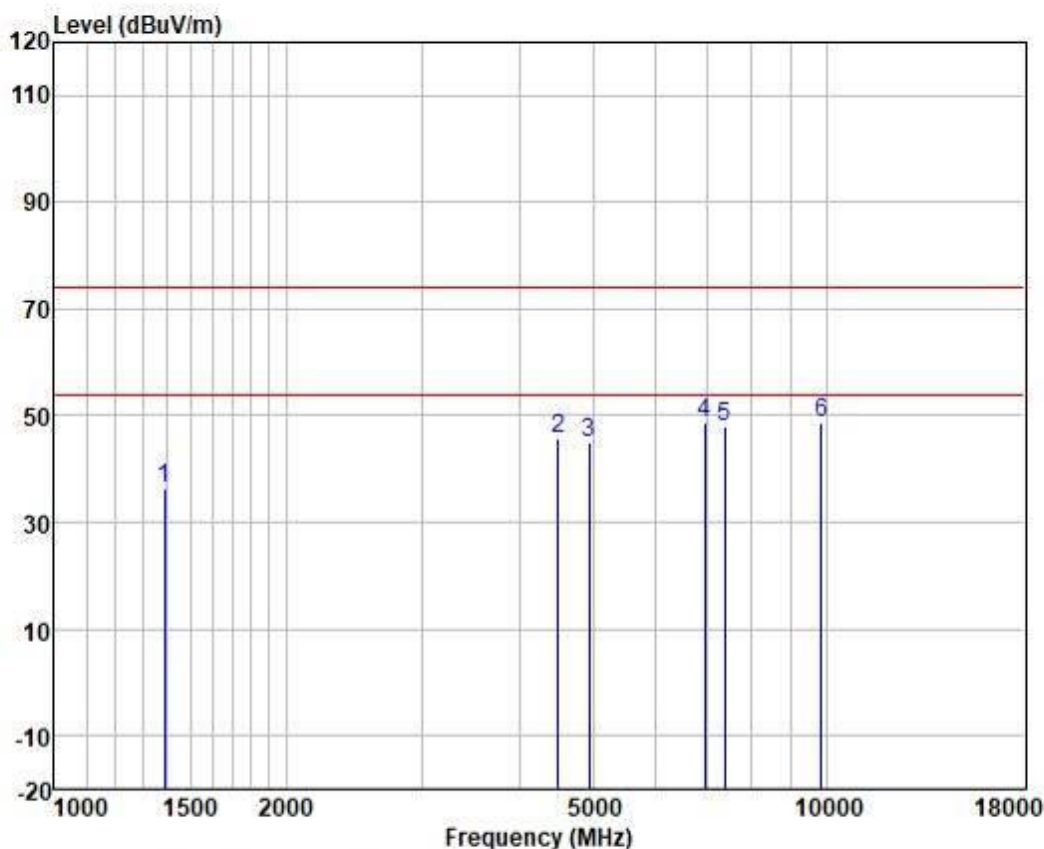

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	dBuV/m	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1390.276	48.11	24.24	2.65	38.49	36.51	74.00	-37.49	VERTICAL	peak
2	4495.125	44.53	34.17	4.62	37.44	45.88	74.00	-28.12	VERTICAL	peak
3	4924.000	43.17	34.15	4.88	37.33	44.87	74.00	-29.13	VERTICAL	peak
4	6954.852	44.75	35.04	5.86	37.14	48.51	74.00	-25.49	VERTICAL	peak
5	7386.000	43.04	36.23	6.00	37.18	48.09	74.00	-25.91	VERTICAL	peak
6	9848.000	39.82	38.88	7.15	37.10	48.75	74.00	-25.25	VERTICAL	peak




Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

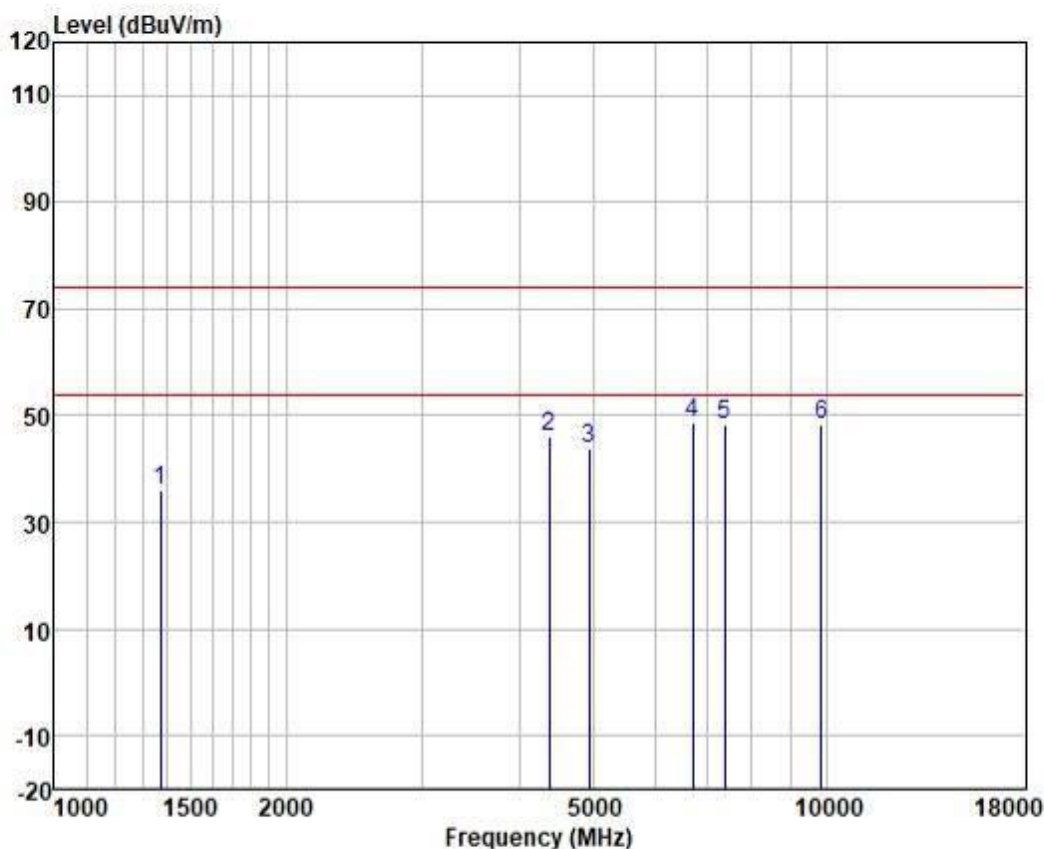

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1374.295	47.52	24.20	2.64	38.51	35.85	74.00	-38.15	HORIZONTAL peak
2	4379.699	45.29	33.59	4.60	37.46	46.02	74.00	-27.98	HORIZONTAL peak
3	4924.000	42.14	34.15	4.88	37.33	43.84	74.00	-30.16	HORIZONTAL peak
4	6717.762	45.72	34.42	5.75	37.12	48.77	74.00	-25.23	HORIZONTAL peak
5	7386.000	43.43	36.23	6.00	37.18	48.48	74.00	-25.52	HORIZONTAL peak
6	9848.000	39.35	38.88	7.15	37.10	48.28	74.00	-25.72	HORIZONTAL peak




Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

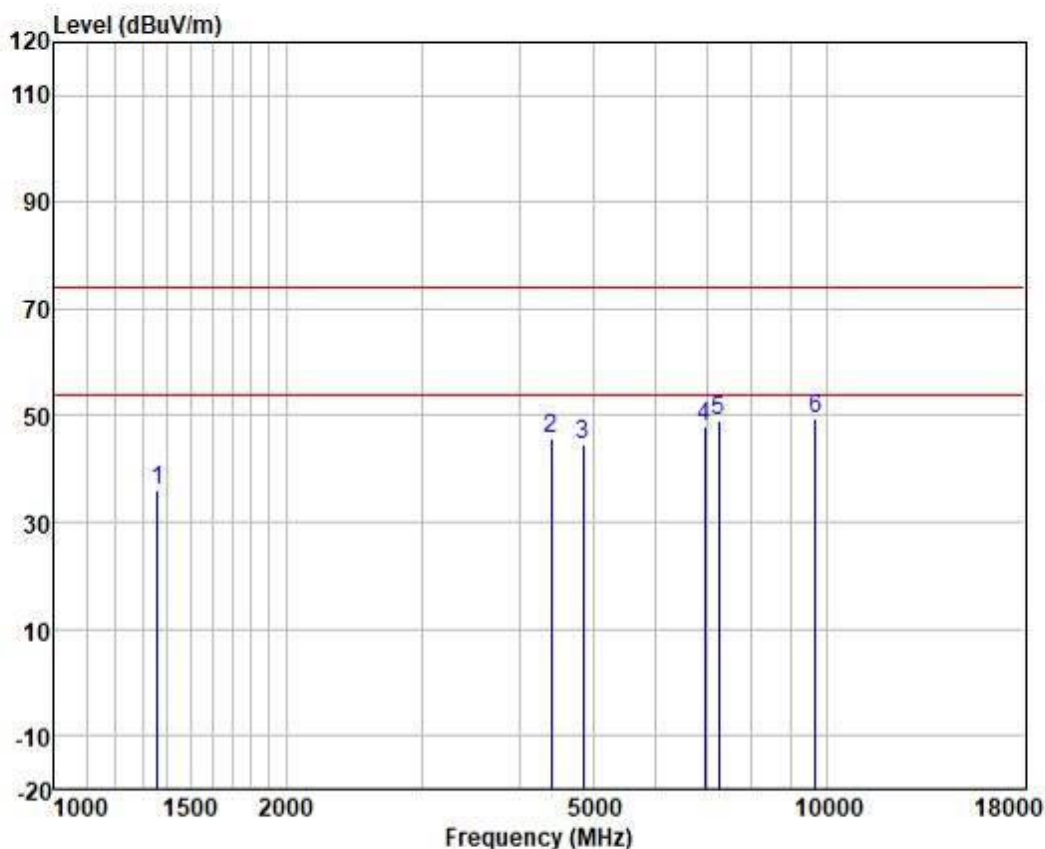

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1358.498	47.59	24.16	2.63	38.53	35.85	74.00	-38.15	VERTICAL peak
2	4405.090	44.77	33.74	4.61	37.46	45.66	74.00	-28.34	VERTICAL peak
3	4844.000	43.01	34.15	4.84	37.37	44.63	74.00	-29.37	VERTICAL peak
4	6954.852	44.32	35.04	5.86	37.14	48.08	74.00	-25.92	VERTICAL peak
5	7266.000	44.41	35.86	5.96	37.17	49.06	74.00	-24.94	VERTICAL peak
6	9688.000	40.87	38.75	7.08	37.11	49.59	74.00	-24.41	VERTICAL peak




Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

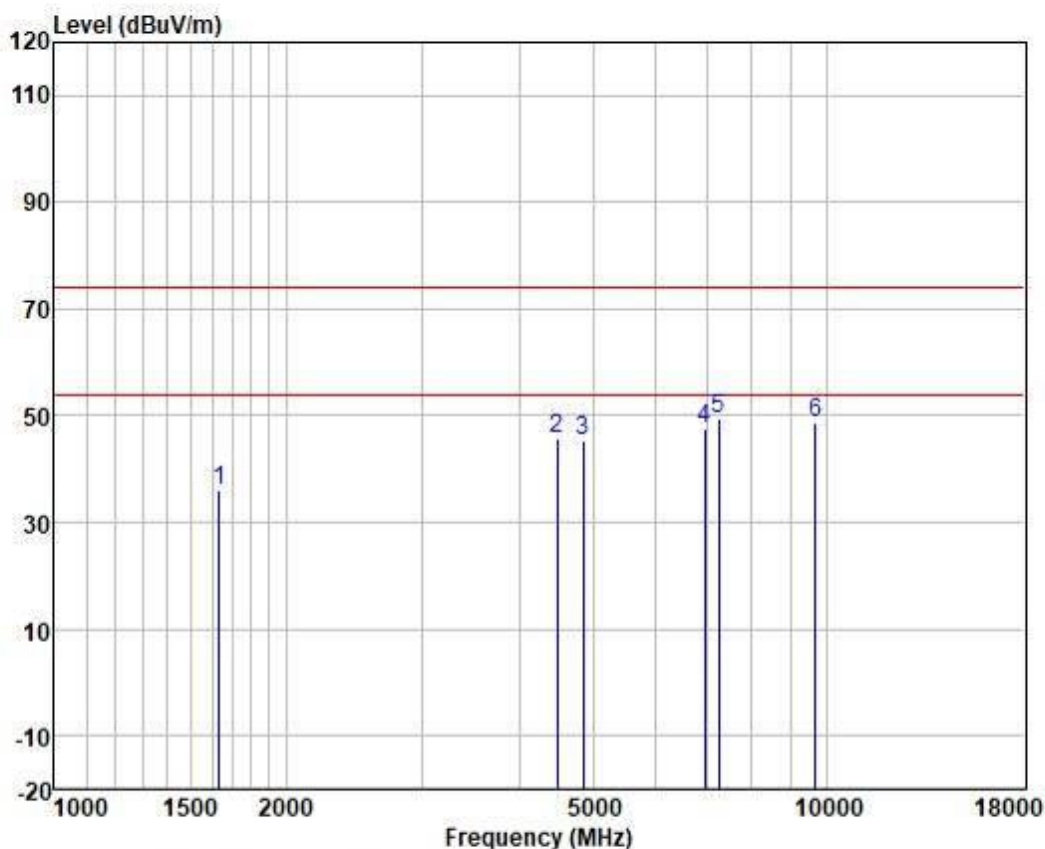

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1634.543	46.65	24.81	2.78	38.11	36.13	74.00	-37.87	HORIZONTAL peak
2	4482.150	44.24	34.12	4.62	37.44	45.54	74.00	-28.46	HORIZONTAL peak
3	4844.000	43.80	34.15	4.84	37.37	45.42	74.00	-28.58	HORIZONTAL peak
4	6954.852	43.88	35.04	5.86	37.14	47.64	74.00	-26.36	HORIZONTAL peak
5	7266.000	44.95	35.86	5.96	37.17	49.60	74.00	-24.40	HORIZONTAL peak
6	9688.000	39.79	38.75	7.08	37.11	48.51	74.00	-25.49	HORIZONTAL peak




Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

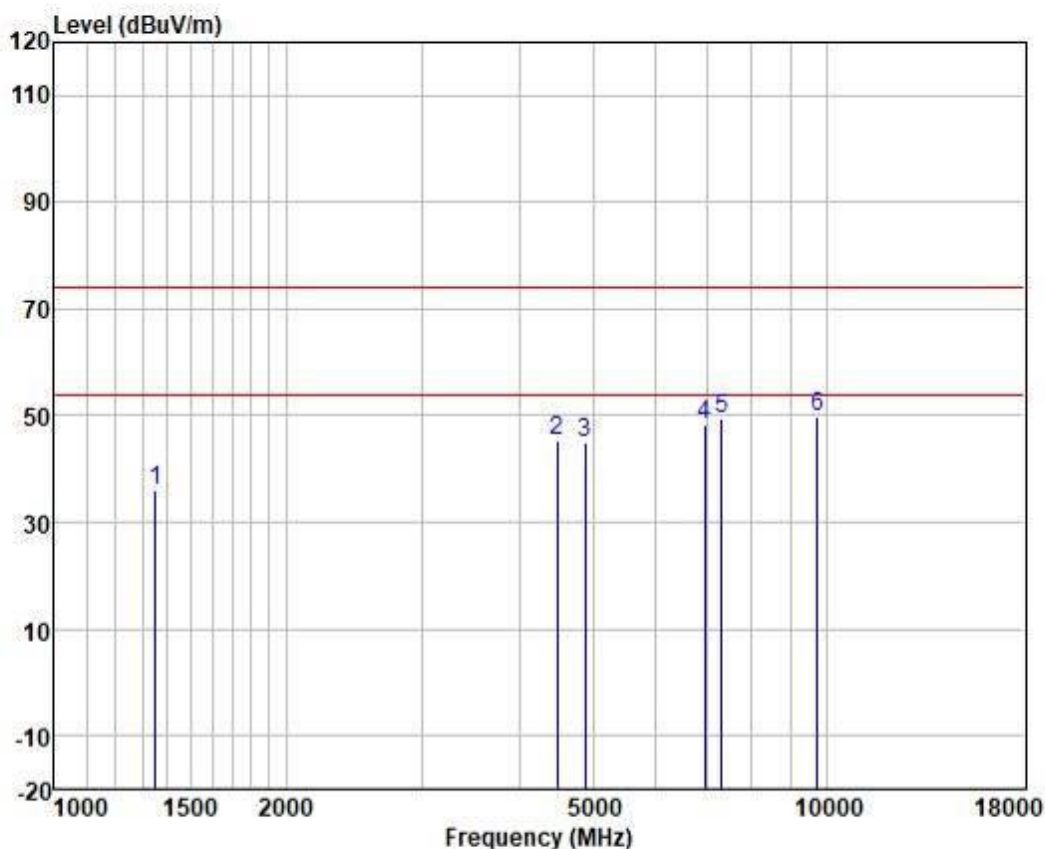

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1350.667	47.77	24.14	2.63	38.53	36.01	74.00	-37.99	VERTICAL peak
2	4482.150	44.01	34.12	4.62	37.44	45.31	74.00	-28.69	VERTICAL peak
3	4874.000	43.36	34.15	4.85	37.35	45.01	74.00	-28.99	VERTICAL peak
4	6954.852	44.59	35.04	5.86	37.14	48.35	74.00	-25.65	VERTICAL peak
5	7311.000	44.50	36.00	5.98	37.18	49.30	74.00	-24.70	VERTICAL peak
6	9748.000	40.92	38.81	7.11	37.11	49.73	74.00	-24.27	VERTICAL peak




Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

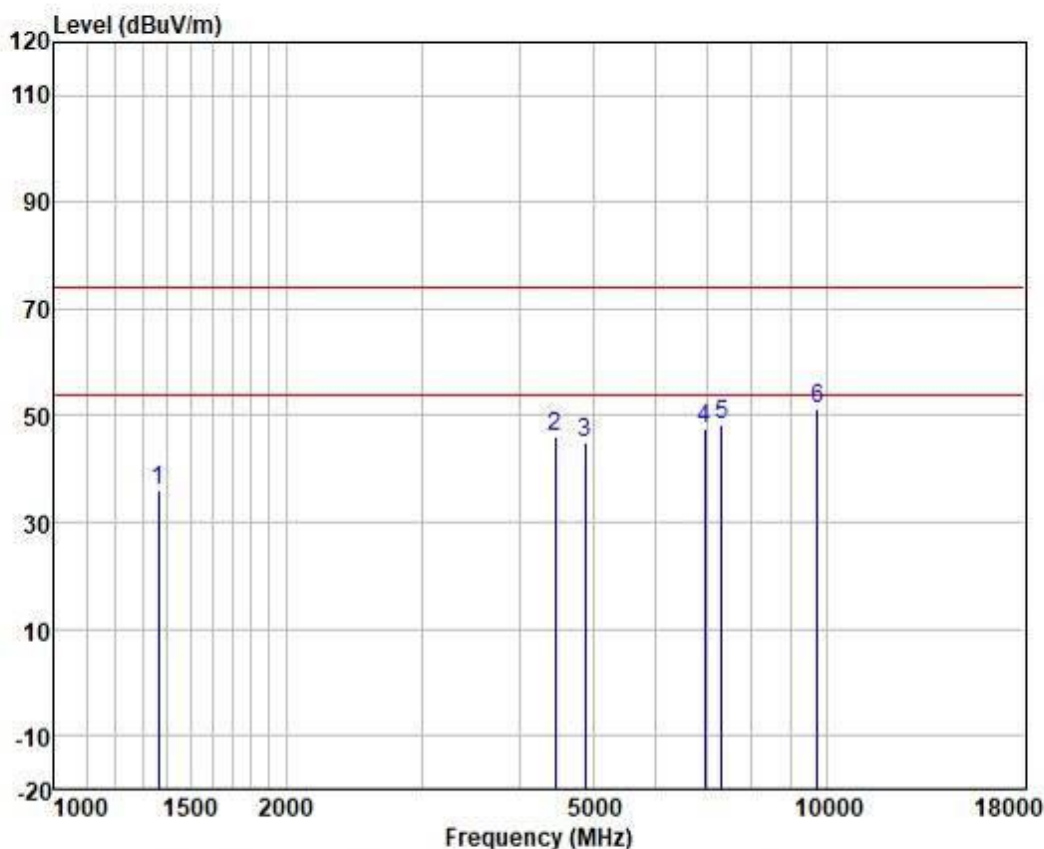

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1366.374	47.65	24.18	2.64	38.51	35.96	74.00	-38.04	HORIZONTAL peak
2	4456.315	44.90	34.00	4.61	37.45	46.06	74.00	-27.94	HORIZONTAL peak
3	4874.000	43.32	34.15	4.85	37.35	44.97	74.00	-29.03	HORIZONTAL peak
4	6954.852	43.86	35.04	5.86	37.14	47.62	74.00	-26.38	HORIZONTAL peak
5	7311.000	43.69	36.00	5.98	37.18	48.49	74.00	-25.51	HORIZONTAL peak
6	9748.000	42.34	38.81	7.11	37.11	51.15	74.00	-22.85	HORIZONTAL peak




Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

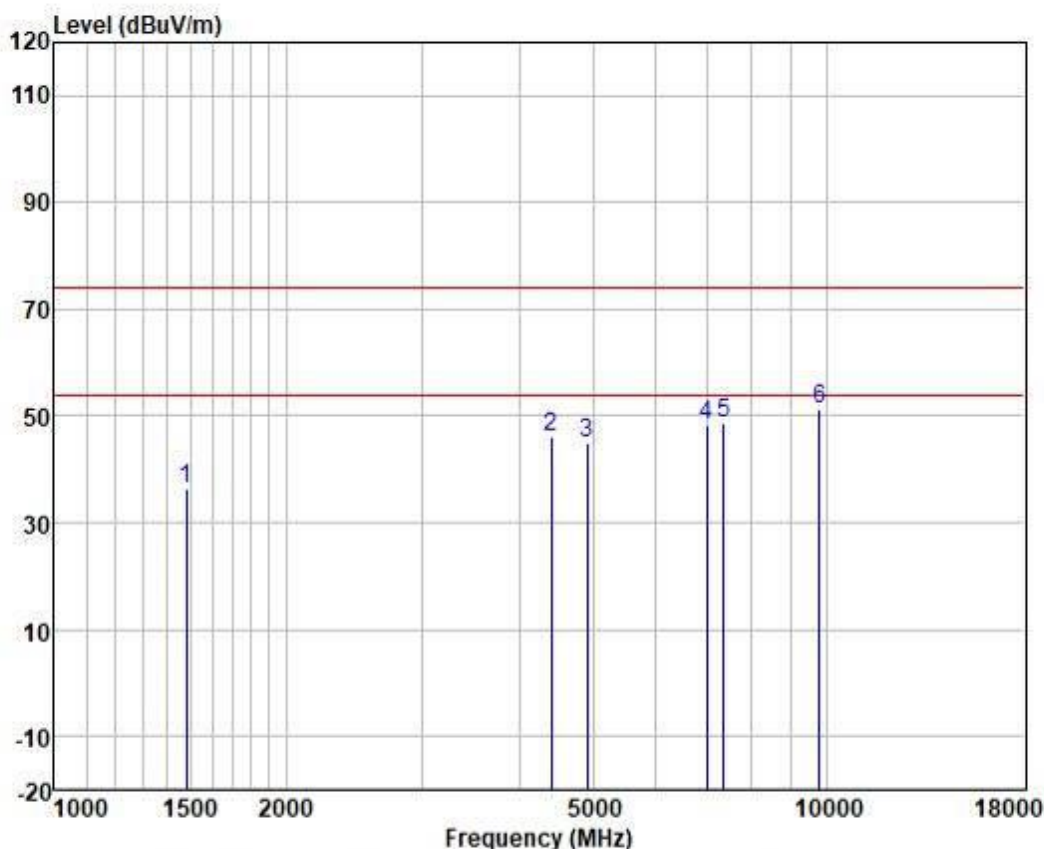

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1481.553	47.55	24.41	2.69	38.37	36.28	74.00	-37.72	VERTICAL	peak
2	4405.090	45.02	33.74	4.61	37.46	45.91	74.00	-28.09	VERTICAL	peak
3	4904.000	43.12	34.15	4.86	37.34	44.79	74.00	-29.21	VERTICAL	peak
4	6995.172	44.54	35.11	5.87	37.15	48.37	74.00	-25.63	VERTICAL	peak
5	7356.000	43.74	36.12	5.99	37.18	48.67	74.00	-25.33	VERTICAL	peak
6	9808.000	42.27	38.86	7.14	37.10	51.17	74.00	-22.83	VERTICAL	peak




Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

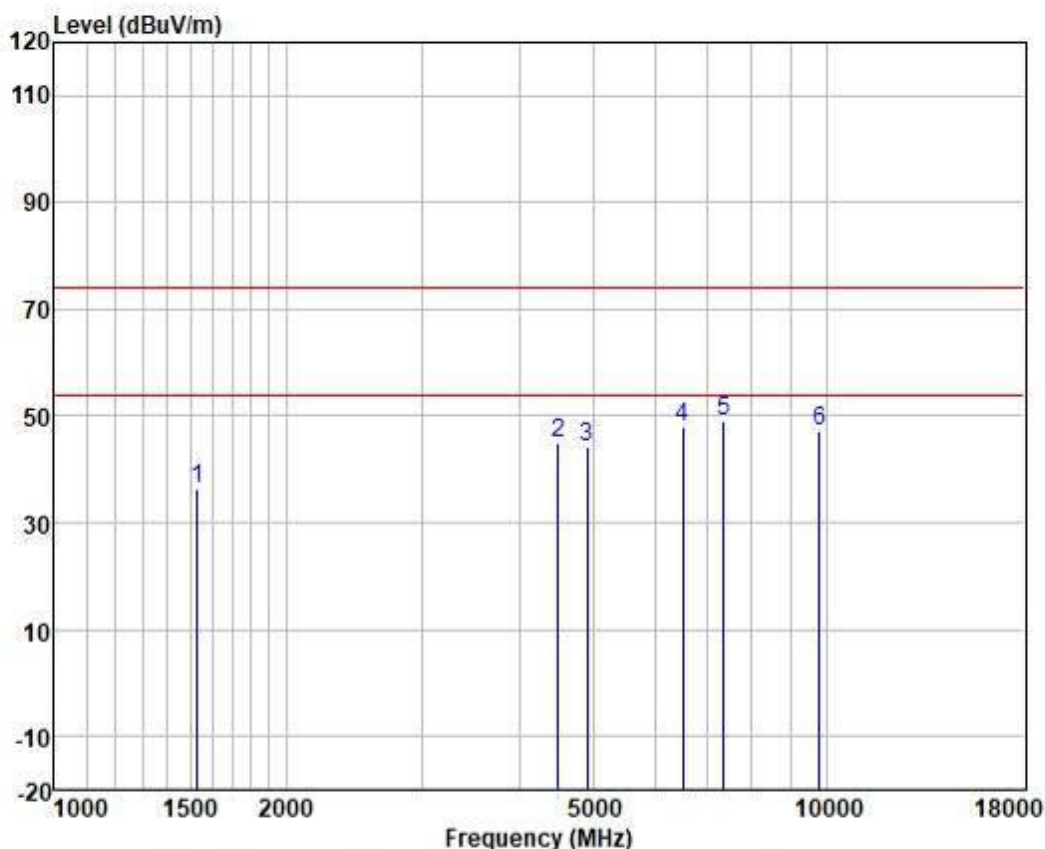

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1533.841	47.42	24.51	2.72	38.26	36.39	74.00	-37.61	HORIZONTAL	peak
2	4495.125	43.48	34.17	4.62	37.44	44.83	74.00	-29.17	HORIZONTAL	peak
3	4904.000	42.51	34.15	4.86	37.34	44.18	74.00	-29.82	HORIZONTAL	peak
4	6526.373	45.32	33.91	5.66	37.12	47.77	74.00	-26.23	HORIZONTAL	peak
5	7356.000	44.02	36.12	5.99	37.18	48.95	74.00	-25.05	HORIZONTAL	peak
6	9808.000	38.18	38.86	7.14	37.10	47.08	74.00	-26.92	HORIZONTAL	peak




Test Mode: 00; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

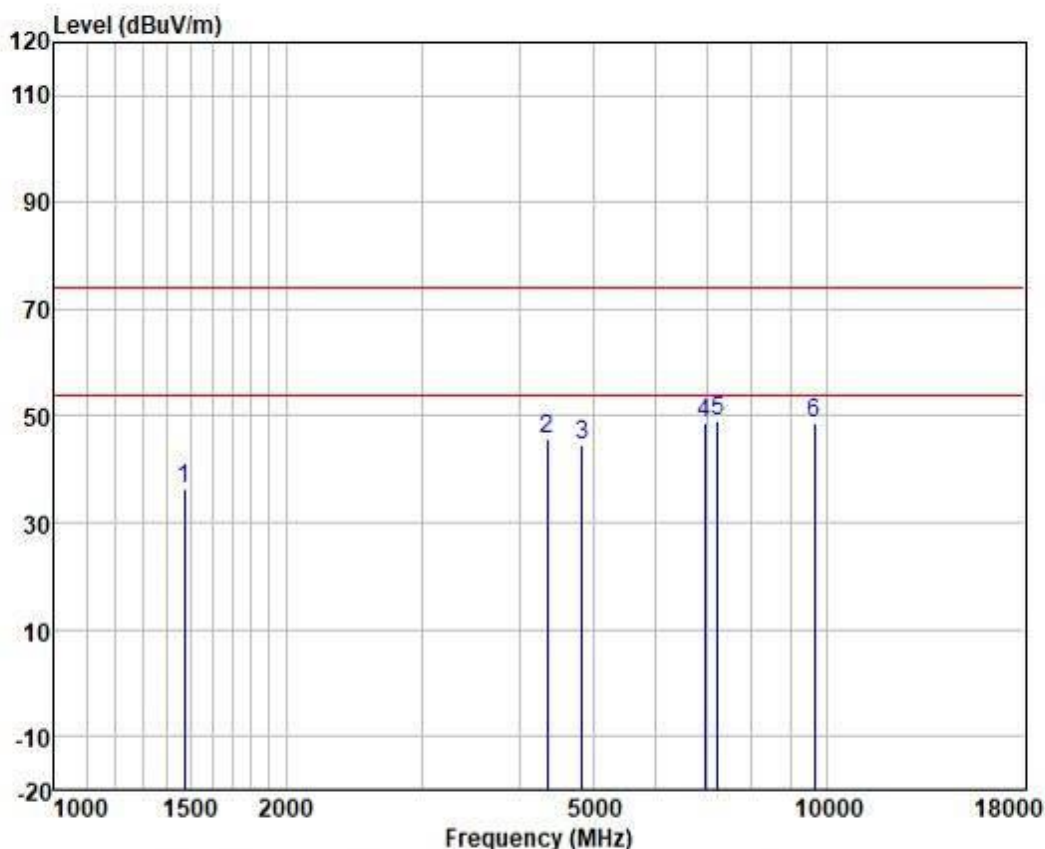

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1473.013	47.79	24.39	2.69	38.37	36.50	74.00	-37.50	VERTICAL	peak
2	4354.454	45.15	33.43	4.60	37.46	45.72	74.00	-28.28	VERTICAL	peak
3	4824.000	42.90	34.16	4.82	37.37	44.51	74.00	-29.49	VERTICAL	peak
4	6954.852	44.79	35.04	5.86	37.14	48.55	74.00	-25.45	VERTICAL	peak
5	7236.000	44.38	35.78	5.95	37.17	48.94	74.00	-25.06	VERTICAL	peak
6	9648.000	39.99	38.70	7.05	37.11	48.63	74.00	-25.37	VERTICAL	peak




Test Mode: 00; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

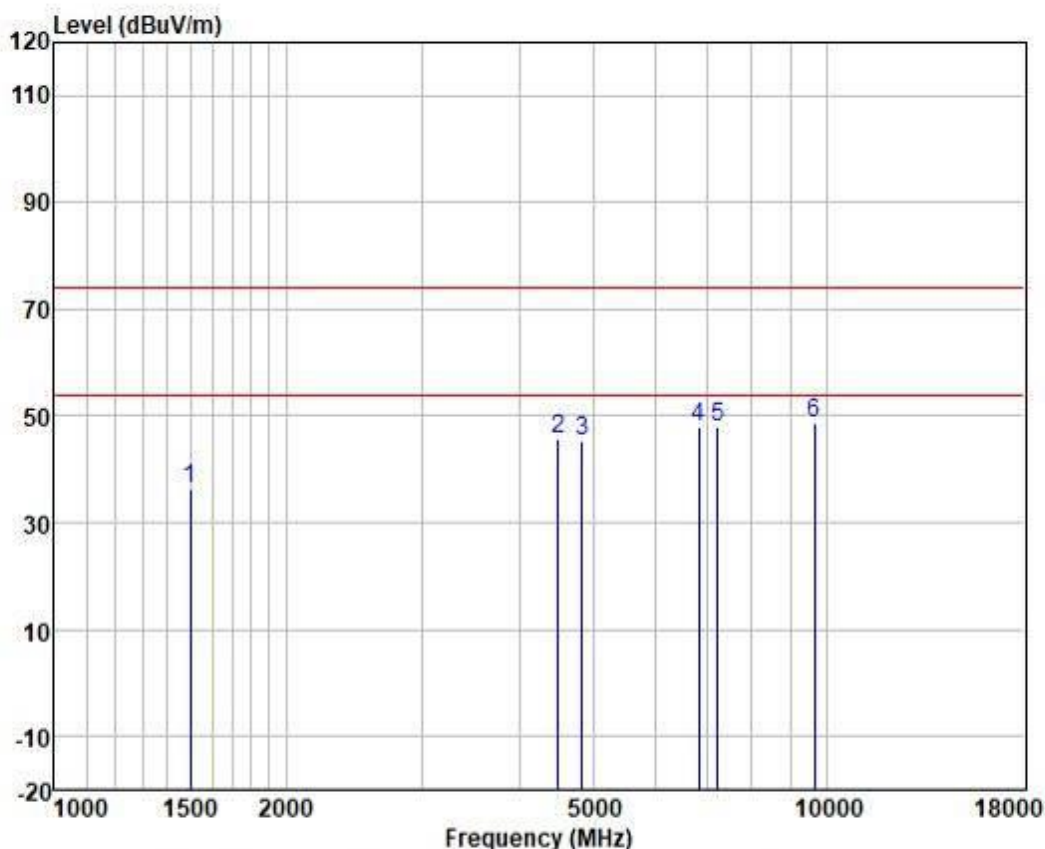

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1498.781	47.44	24.43	2.70	38.33	36.24	74.00	-37.76	HORIZONTAL peak
2	4495.125	44.44	34.17	4.62	37.44	45.79	74.00	-28.21	HORIZONTAL peak
3	4824.000	43.66	34.16	4.82	37.37	45.27	74.00	-28.73	HORIZONTAL peak
4	6835.278	44.49	34.79	5.81	37.13	47.96	74.00	-26.04	HORIZONTAL peak
5	7236.000	43.25	35.78	5.95	37.17	47.81	74.00	-26.19	HORIZONTAL peak
6	9648.000	40.06	38.70	7.05	37.11	48.70	74.00	-25.30	HORIZONTAL peak




Test Mode: 00; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

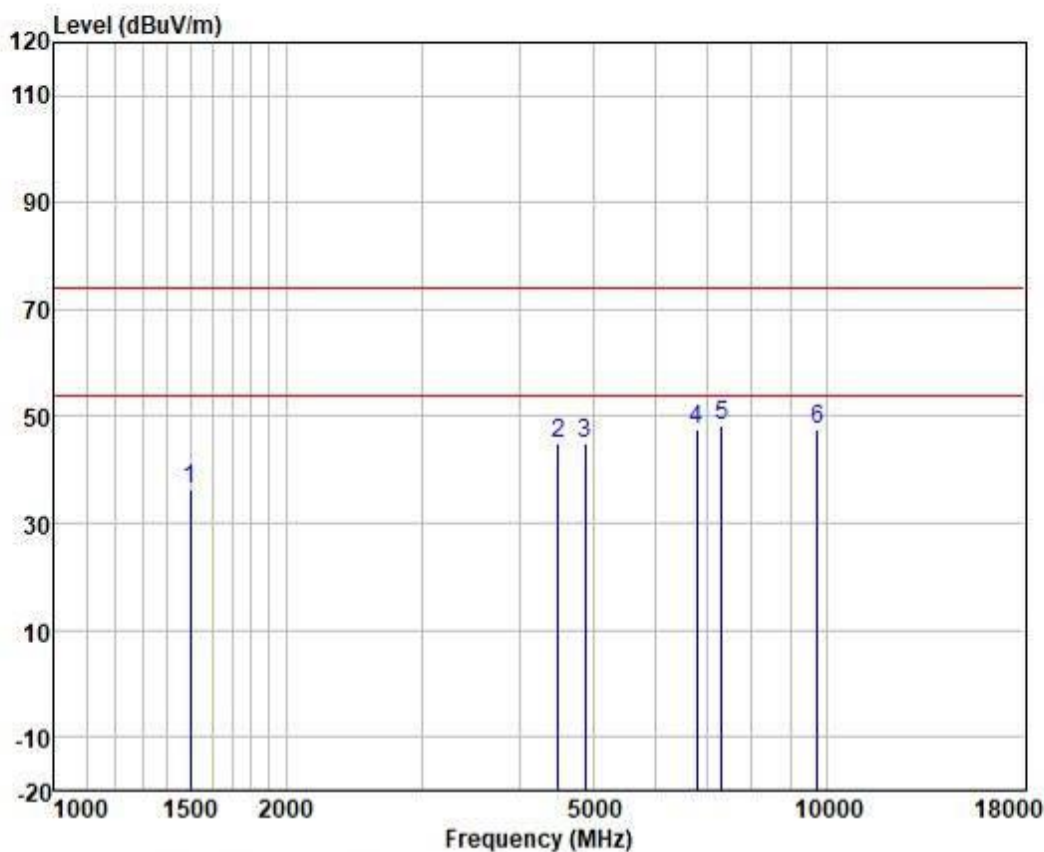

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1498.781	47.50	24.43	2.70	38.33	36.30	74.00	-37.70	VERTICAL	peak
2	4495.125	43.74	34.17	4.62	37.44	45.09	74.00	-28.91	VERTICAL	peak
3	4874.000	43.45	34.15	4.85	37.35	45.10	74.00	-28.90	VERTICAL	peak
4	6795.879	44.36	34.69	5.79	37.13	47.71	74.00	-26.29	VERTICAL	peak
5	7311.000	43.70	36.00	5.98	37.18	48.50	74.00	-25.50	VERTICAL	peak
6	9748.000	38.65	38.81	7.11	37.11	47.46	74.00	-26.54	VERTICAL	peak




Test Mode: 00; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

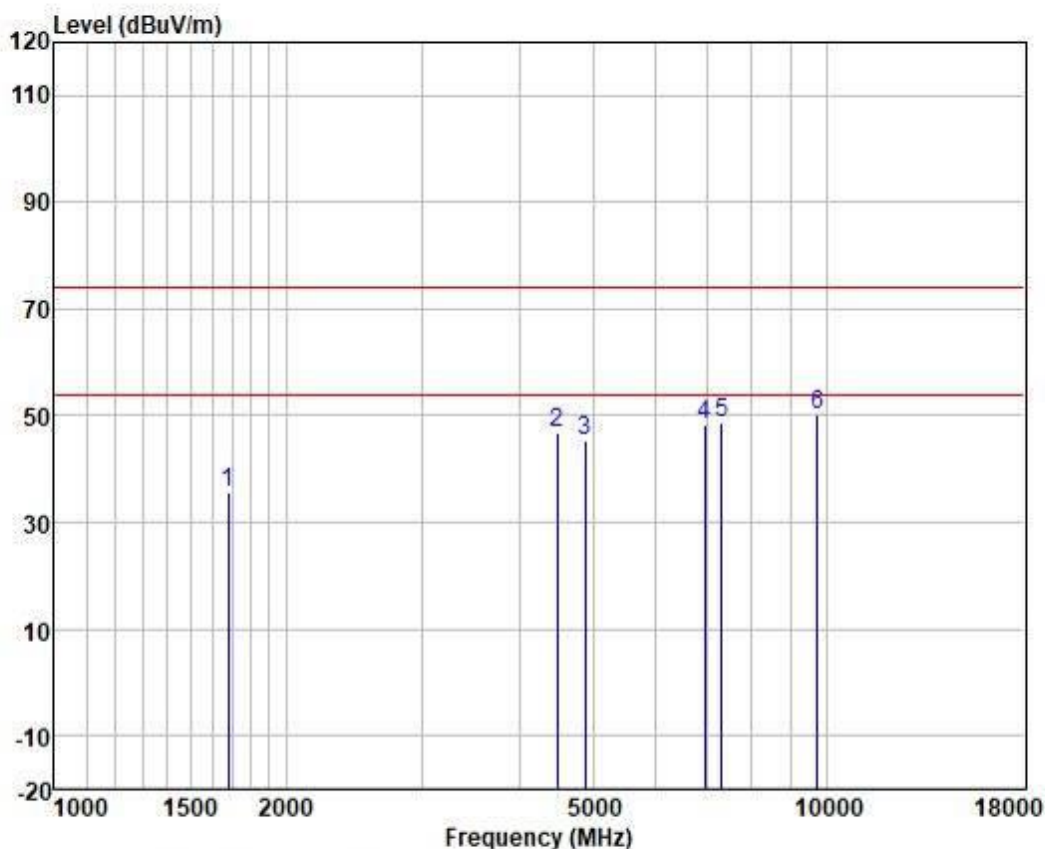

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1682.477	45.98	25.03	2.83	38.05	35.79	74.00	-38.21	HORIZONTAL peak
2	4482.150	45.48	34.12	4.62	37.44	46.78	74.00	-27.22	HORIZONTAL peak
3	4874.000	43.59	34.15	4.85	37.35	45.24	74.00	-28.76	HORIZONTAL peak
4	6954.852	44.61	35.04	5.86	37.14	48.37	74.00	-25.63	HORIZONTAL peak
5	7311.000	44.05	36.00	5.98	37.18	48.85	74.00	-25.15	HORIZONTAL peak
6	9748.000	41.37	38.81	7.11	37.11	50.18	74.00	-23.82	HORIZONTAL peak




Test Mode: 00; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

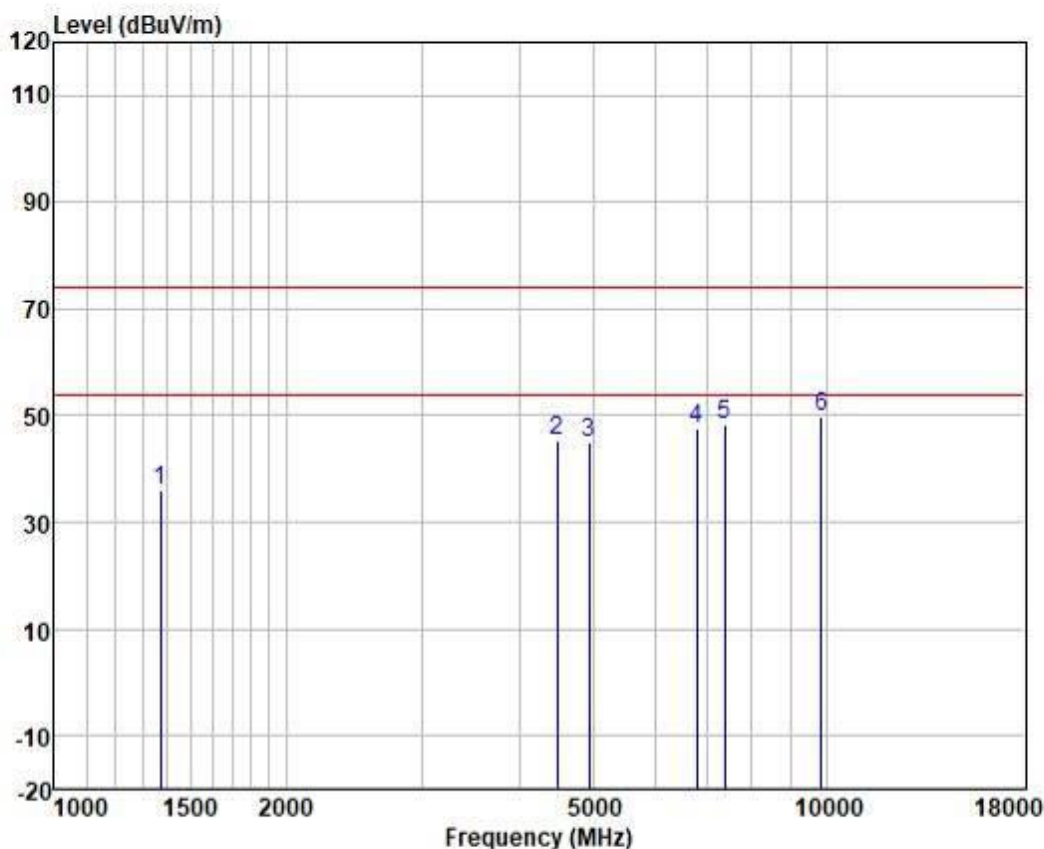

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1374.295	47.64	24.20	2.64	38.51	35.97	74.00	-38.03	VERTICAL peak
2	4482.150	44.13	34.12	4.62	37.44	45.43	74.00	-28.57	VERTICAL peak
3	4924.000	43.27	34.15	4.88	37.33	44.97	74.00	-29.03	VERTICAL peak
4	6795.879	44.32	34.69	5.79	37.13	47.67	74.00	-26.33	VERTICAL peak
5	7386.000	43.11	36.23	6.00	37.18	48.16	74.00	-25.84	VERTICAL peak
6	9848.000	40.74	38.88	7.15	37.10	49.67	74.00	-24.33	VERTICAL peak



Test Mode: 00; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

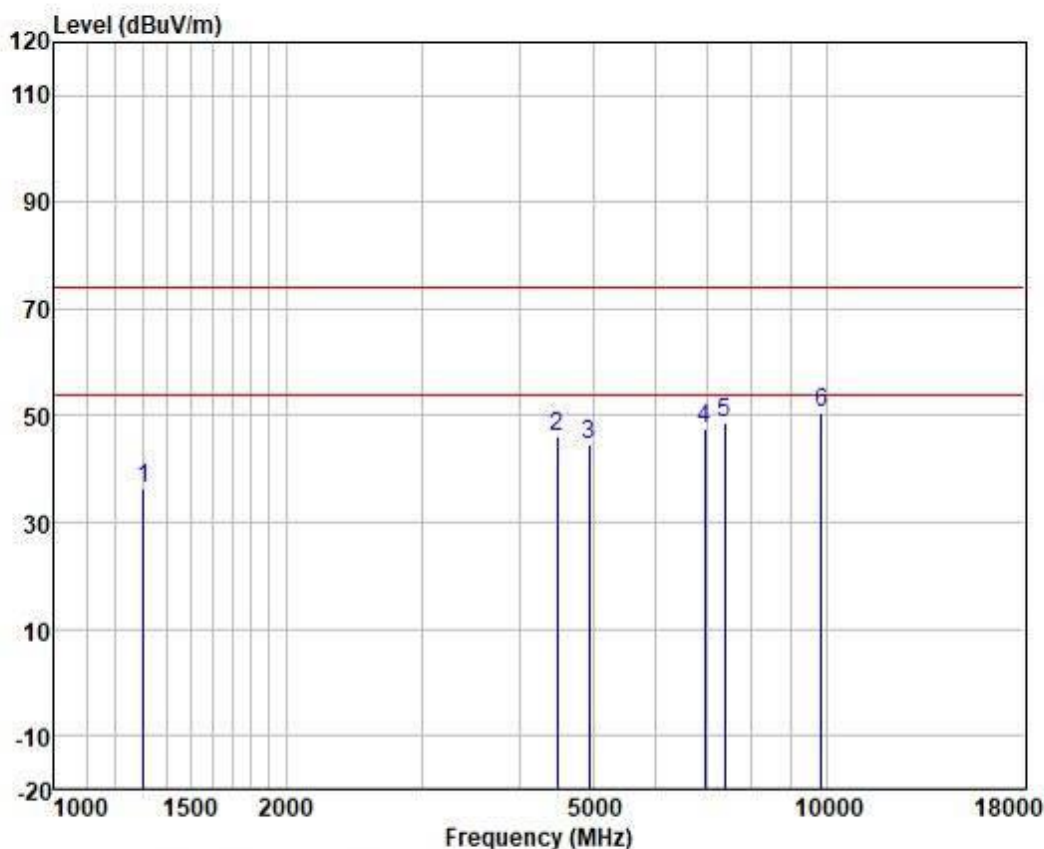

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1304.623	48.48	23.99	2.59	38.58	36.48	74.00	-37.52	HORIZONTAL peak
2	4482.150	44.76	34.12	4.62	37.44	46.06	74.00	-27.94	HORIZONTAL peak
3	4924.000	42.90	34.15	4.88	37.33	44.60	74.00	-29.40	HORIZONTAL peak
4	6954.852	43.88	35.04	5.86	37.14	47.64	74.00	-26.36	HORIZONTAL peak
5	7386.000	43.75	36.23	6.00	37.18	48.80	74.00	-25.20	HORIZONTAL peak
6	9848.000	41.62	38.88	7.15	37.10	50.55	74.00	-23.45	HORIZONTAL peak



7.5 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.2

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 21.8 °C

Humidity: 61.0 % RH


Atmospheric Pressure: 1013 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40). Only the data of worst case is recorded in the report.

TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40). Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

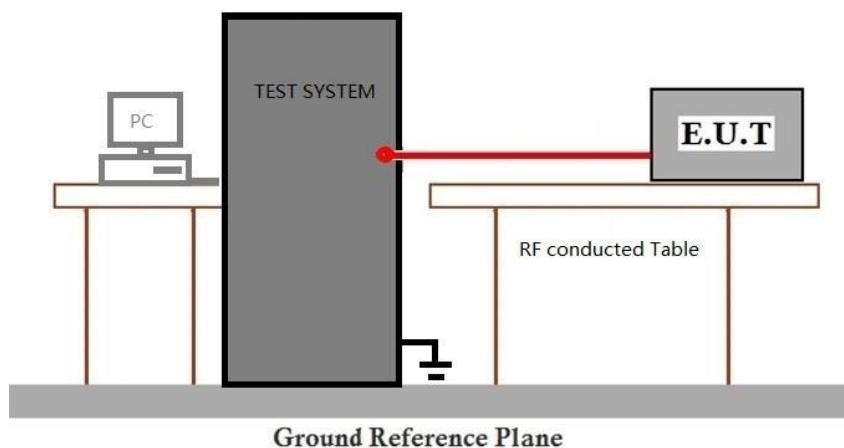

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.6 Minimum 6dB Bandwidth

Test Requirement	47 CFR Part 15, Subpart C 15.247a(2)
Test Method:	ANSI C63.10 (2013) Section 11.8.1
Limit:	≥500 kHz

7.6.1 E.U.T. Operation


Operating Environment:

Temperature: 21.8 °C Humidity: 61.0 % RH Atmospheric Pressure: 1013 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
		TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40). Only the data of worst case is recorded in the report.
Final test	00	

7.6.3 Test Setup Diagram

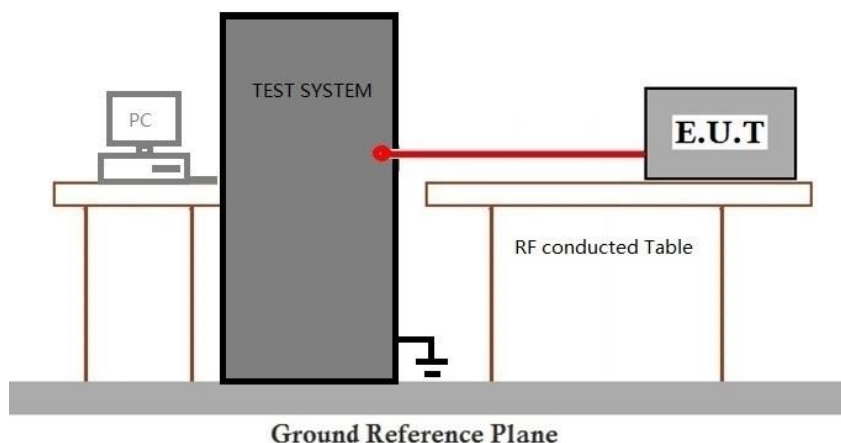

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 21.8 °C

Humidity: 61.0 % RH

Atmospheric Pressure: 1013 mbar


7.7.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	

Final test	00
------------	----

TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40). Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

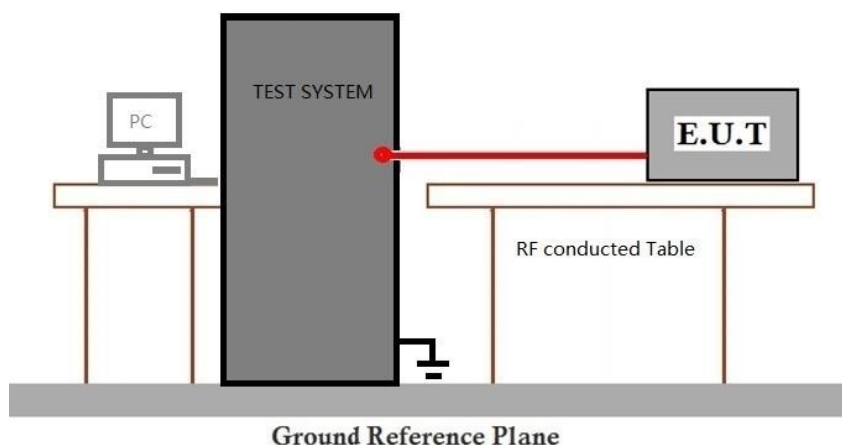

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation

Operating Environment:


Temperature: 21.8 °C Humidity: 61.0 % RH Atmospheric Pressure: 1013 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40). Only the data of worst case is recorded in the report.



7.8.3 Test Setup Diagram

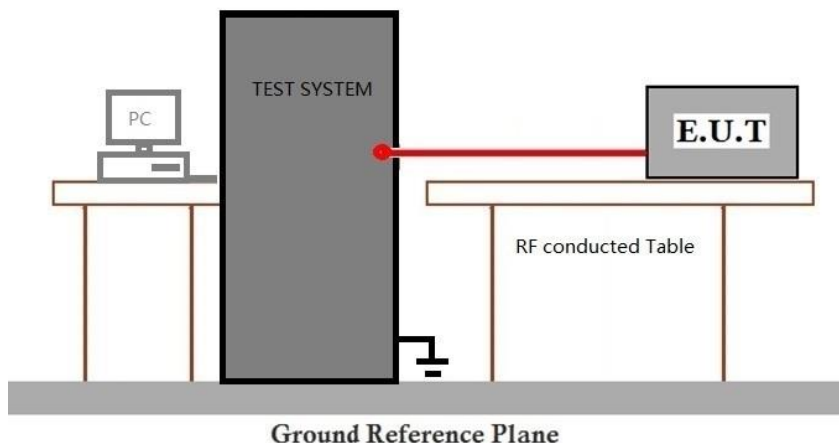

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 21.8 °C

Humidity: 61.0 % RH

Atmospheric Pressure: 1013 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
--------------------------	--------------	-------------

Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40). Only the data of worst case is recorded in the report.
------------	----	--



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (EMC) EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

7.9.3 Test Setup Diagram

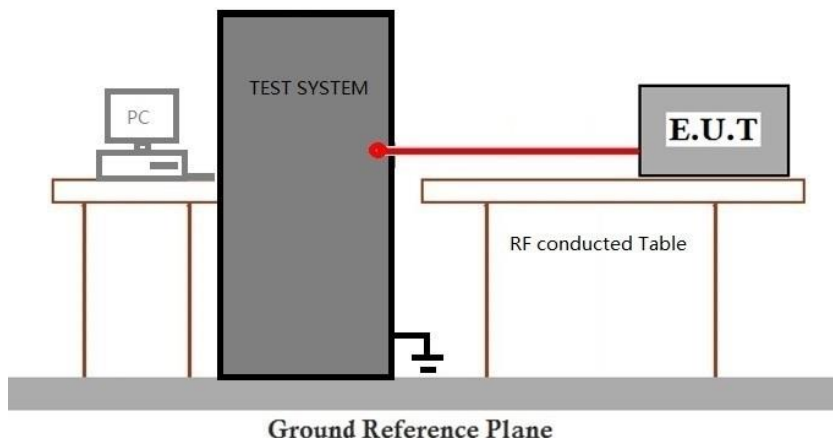

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for GZCR241000116201



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

9 EUT Constructional Details (EUT Photos)

Refer to Appendix - External and Internal Photos for GZCR2410001162AT

10 Appendix

1. Duty Cycle

1.1 Test Result


1.1.1 Ant1

Ant1									
Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	SISO	2412	/	/	0.418	1.452	28.79	5.41	27.64
		2437	/	/	0.414	1.425	29.05	5.37	26.86
		2462	/	/	0.414	1.443	28.69	5.42	27.21
802.11g	SISO	2412	/	/	1.977	2.146	92.12	0.36	3.60
		2437	/	/	1.976	2.145	92.12	0.36	3.57
		2462	/	/	1.977	2.155	91.74	0.37	3.60
802.11n (HT20)	MIMO	2412	/	/	0.433	1.421	30.47	5.16	26.23
		2437	/	/	0.433	1.430	30.28	5.19	25.10
		2462	/	/	0.433	1.421	30.47	5.16	25.56
802.11n (HT40)	MIMO	2422	/	/	5.430	5.904	91.97	0.36	0.85
		2437	/	/	5.430	5.905	91.96	0.36	0.87
		2452	/	/	5.429	5.922	91.68	0.38	1.27
802.11ax (HEW20)	MIMO	2412	RU242	Left	5.446	5.913	92.10	0.36	1.14
		2437	RU242	Left	5.446	5.903	92.26	0.35	0.98
		2462	RU242	Left	5.444	5.903	92.22	0.35	1.01
802.11ax (HEW40)	MIMO	2422	RU484	Left	5.446	5.903	92.26	0.35	0.88
		2437	RU484	Left	5.446	5.911	92.13	0.36	0.97
		2452	RU484	Left	5.447	5.903	92.28	0.35	0.84


1.2 Test Graph

1.2.1 Ant1

802.11b_LCH_2412MHz_Ant1 (SISO)_NTNV

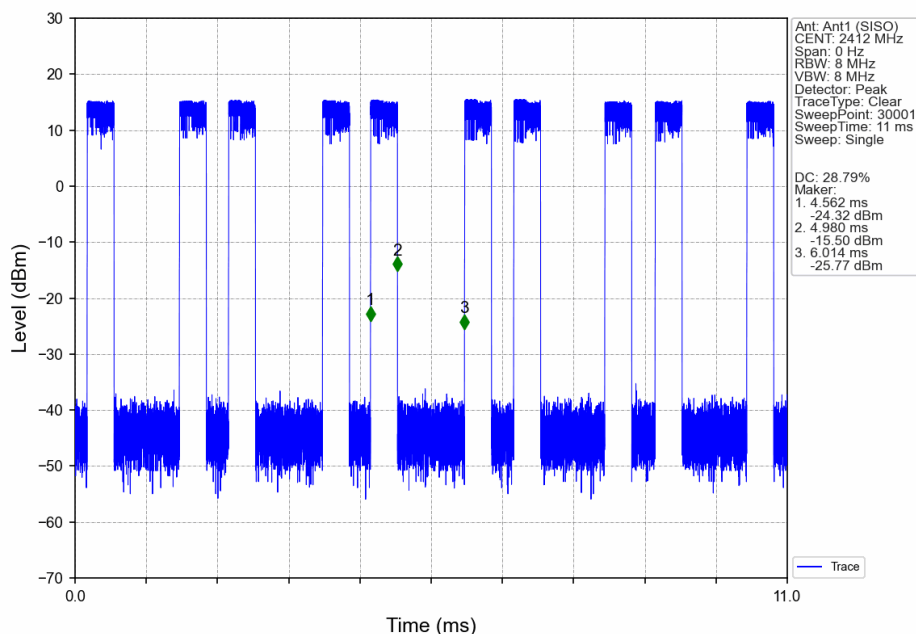

802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

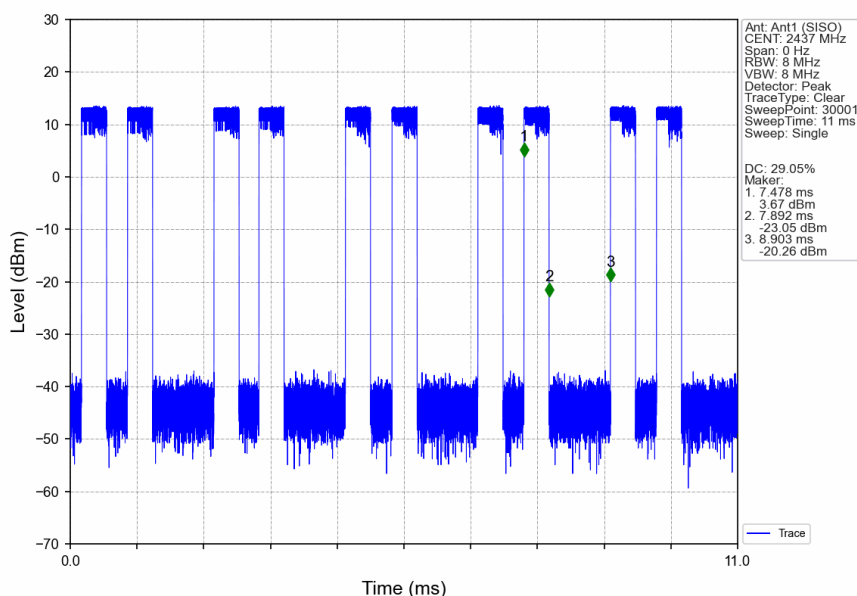

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (CMA, CNAS, EEC Laboratory)


No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

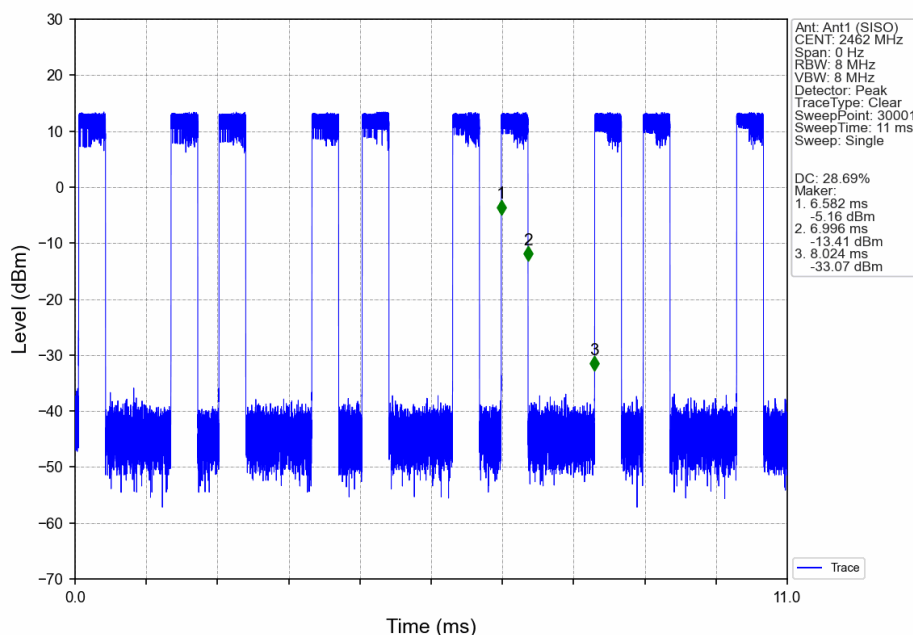


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

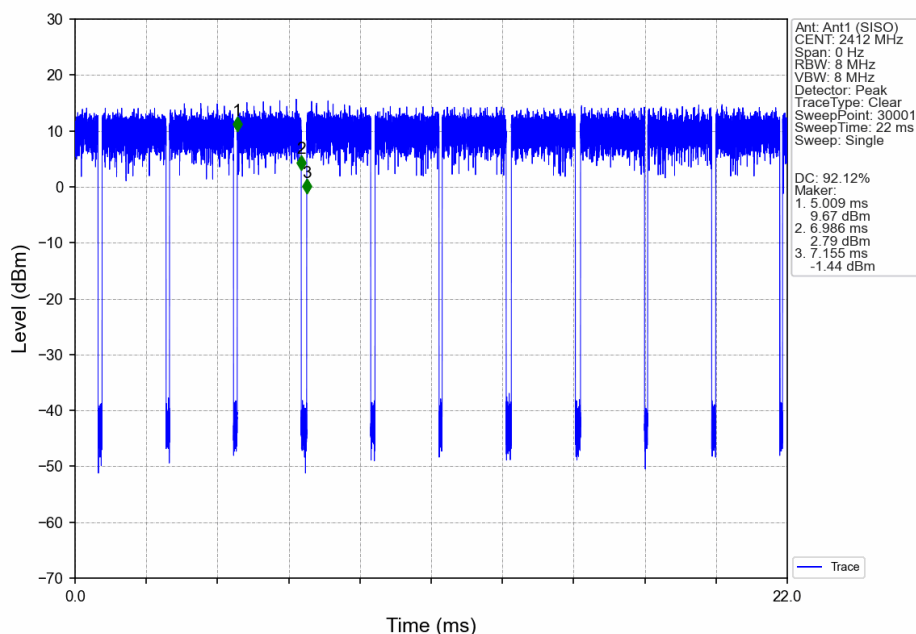


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

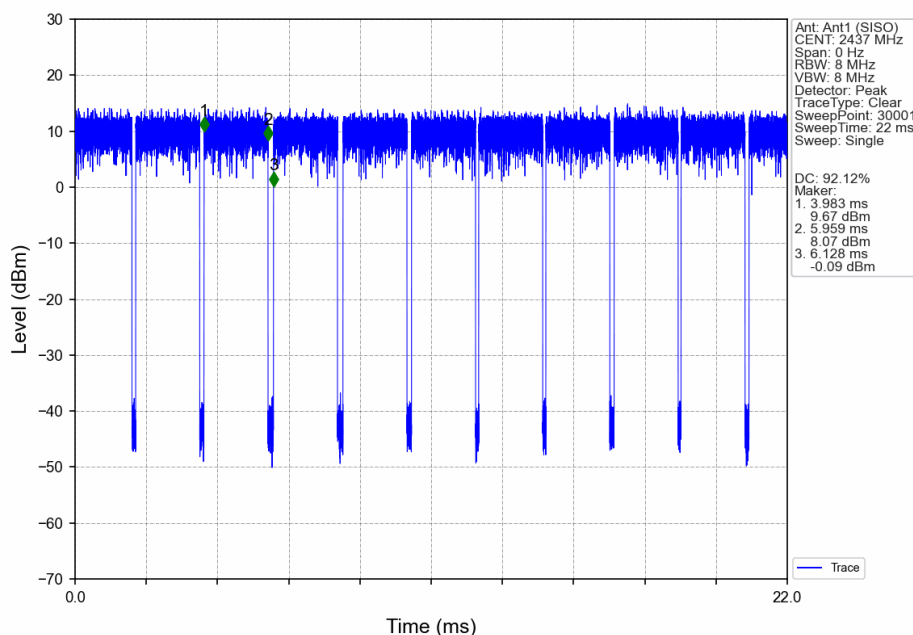


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

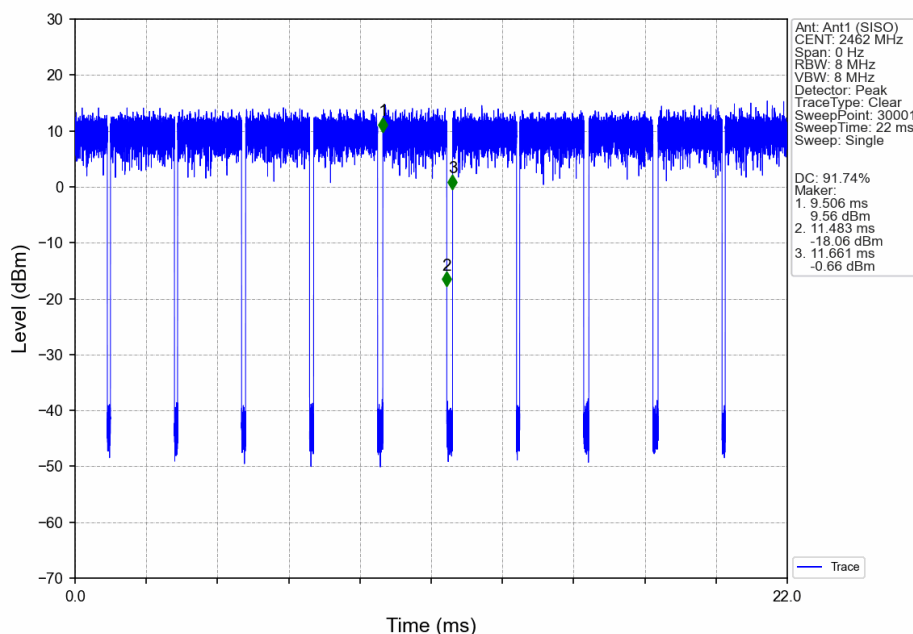


802.11n(HT20)_LCH_2412MHz_Ant1 (MIMO)_NTNV

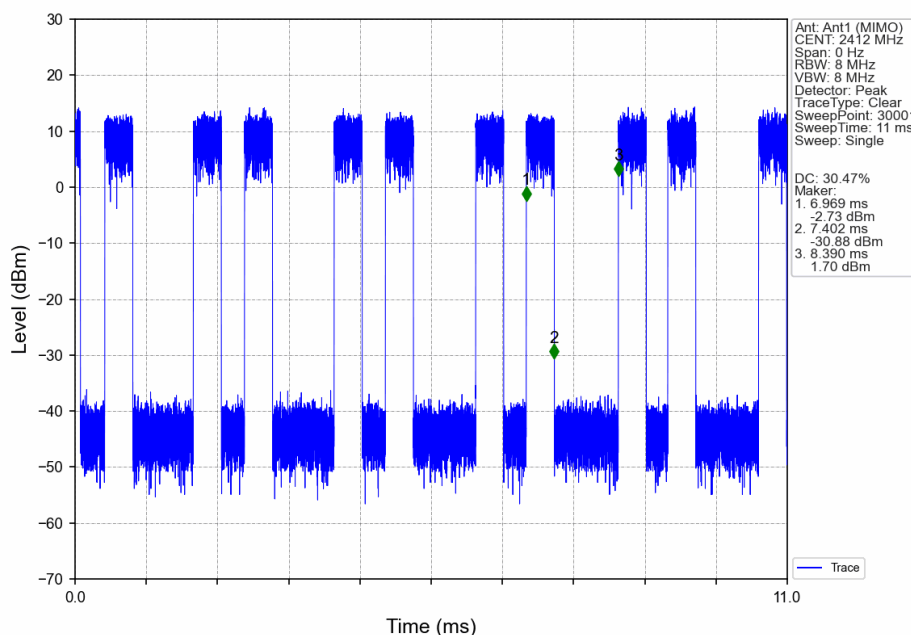


802.11n(HT20)_MCH_2437MHz_Ant1 (MIMO)_NTNV

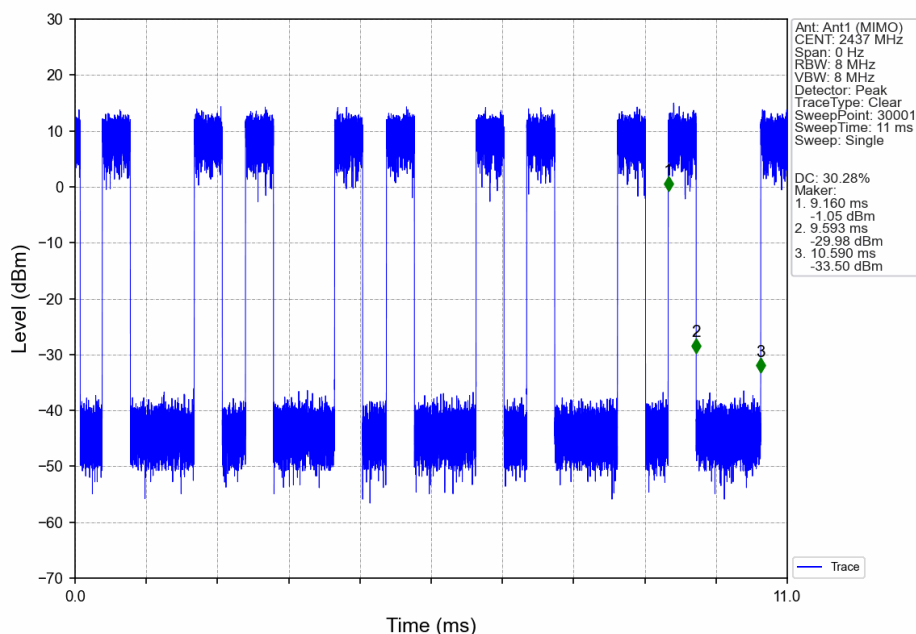


802.11n(HT20)_HCH_2462MHz_Ant1 (MIMO)_NTNV

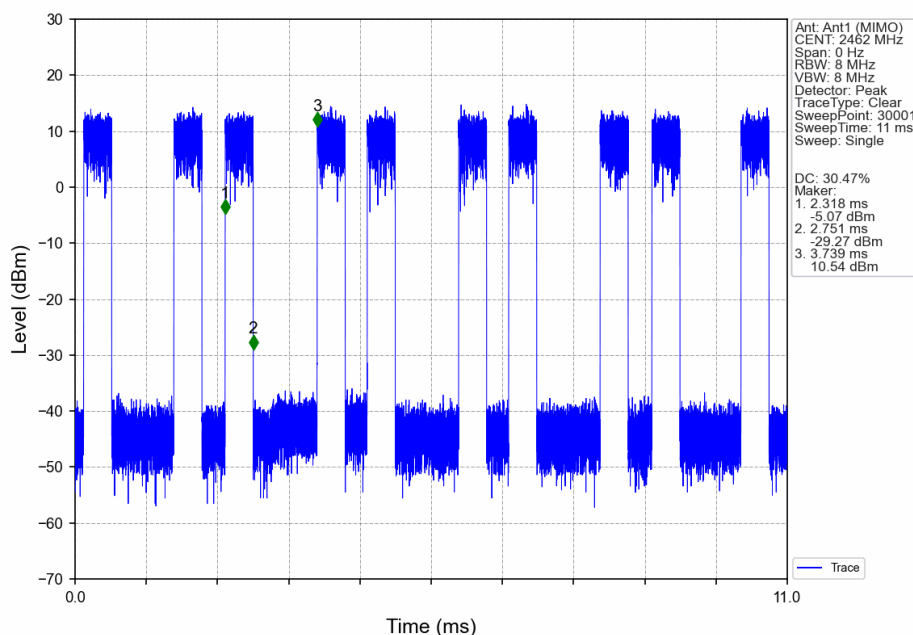


802.11n(HT40)_LCH_2422MHz_Ant1 (MIMO)_NTNV

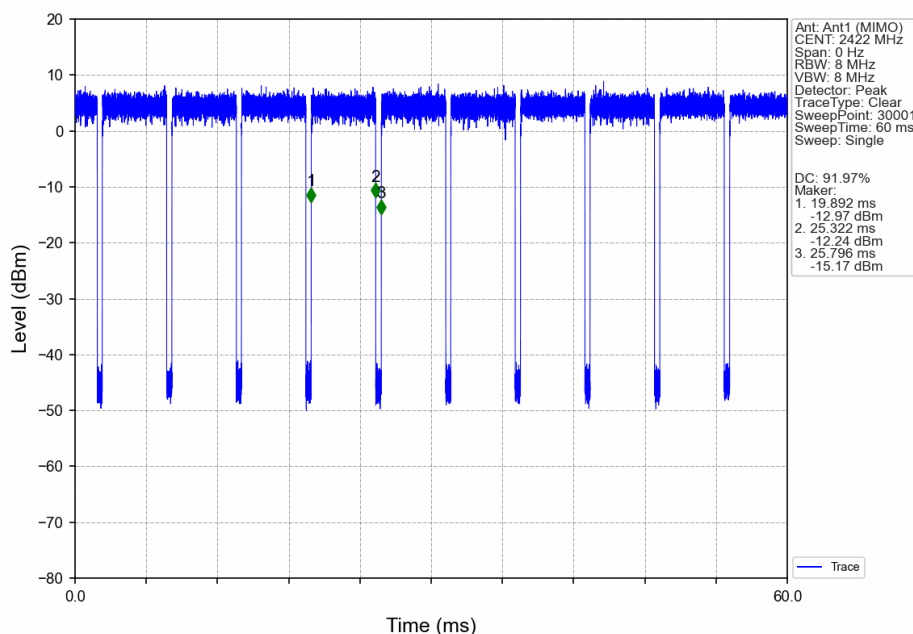


802.11n(HT40)_MCH_2437MHz_Ant1 (MIMO)_NTNV

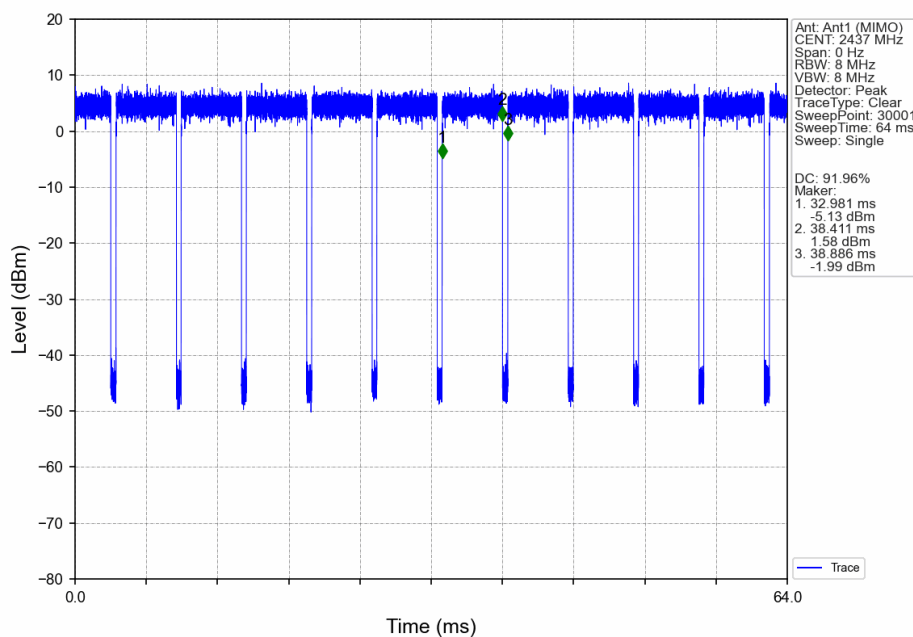


802.11n(HT40)_HCH_2452MHz_Ant1 (MIMO)_NTNV

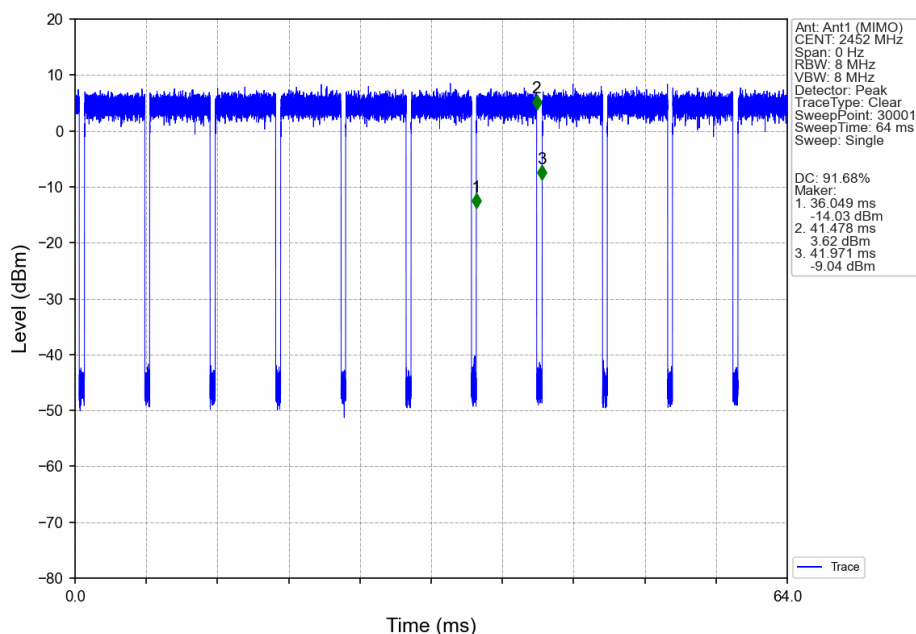


802.11ax(HEW20)_LCH_2412MHz_RU242_Left_Ant1 (MIMO)_NTNV

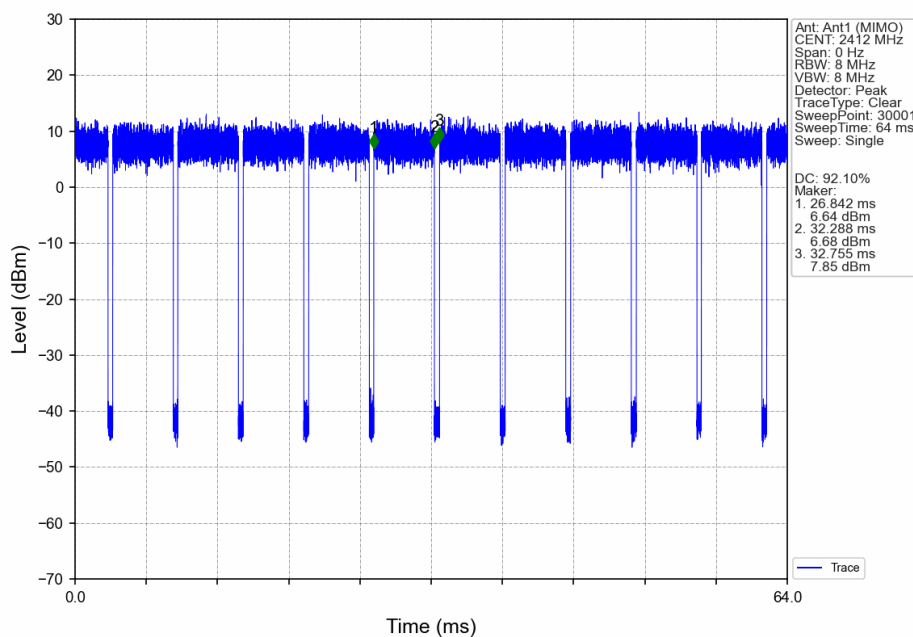


802.11ax(HEW20)_MCH_2437MHz_RU242_Left_Ant1 (MIMO)_NTNV

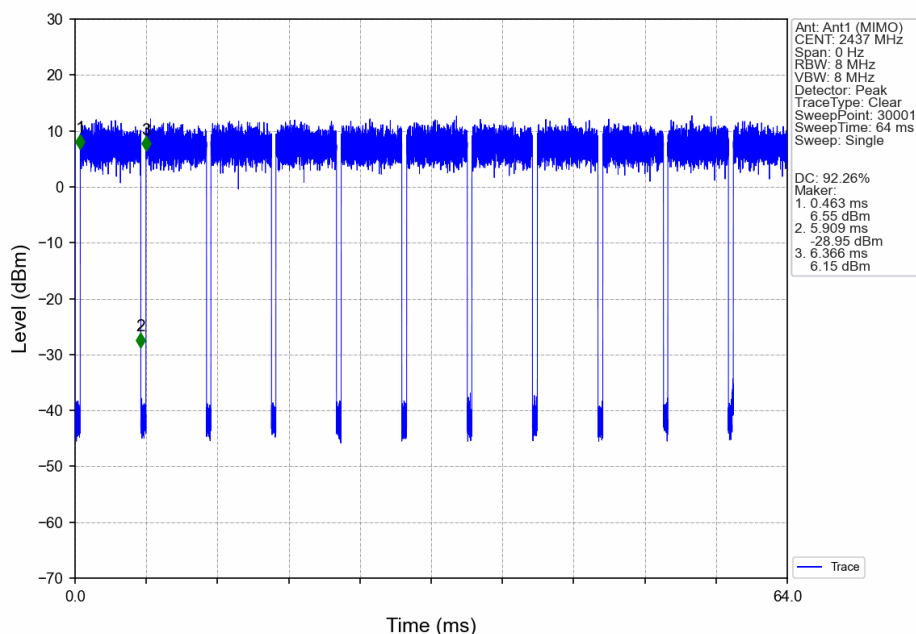


802.11ax(HEW20)_HCH_2462MHz_RU242_Left_Ant1 (MIMO)_NTNV

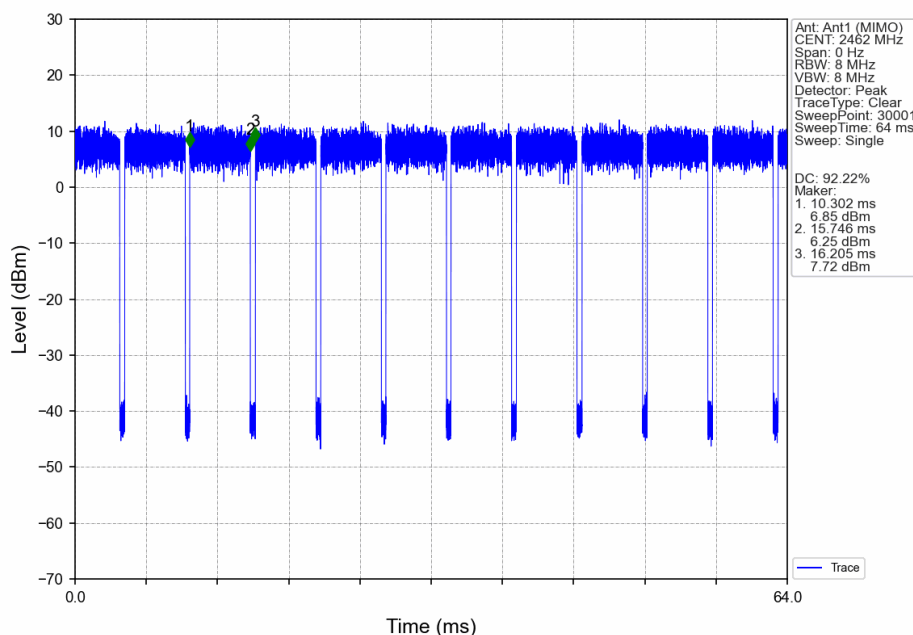


802.11ax(HEW40)_LCH_2422MHz_RU484_Left_Ant1 (MIMO)_NTNV

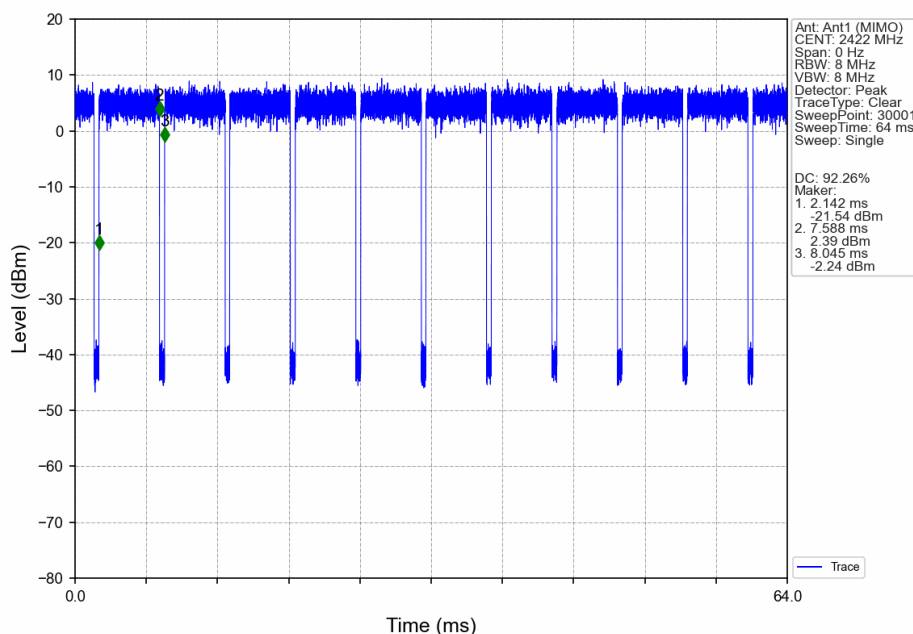

802.11ax(HEW40)_MCH_2437MHz_RU484_Left_Ant1 (MIMO)_NTNV

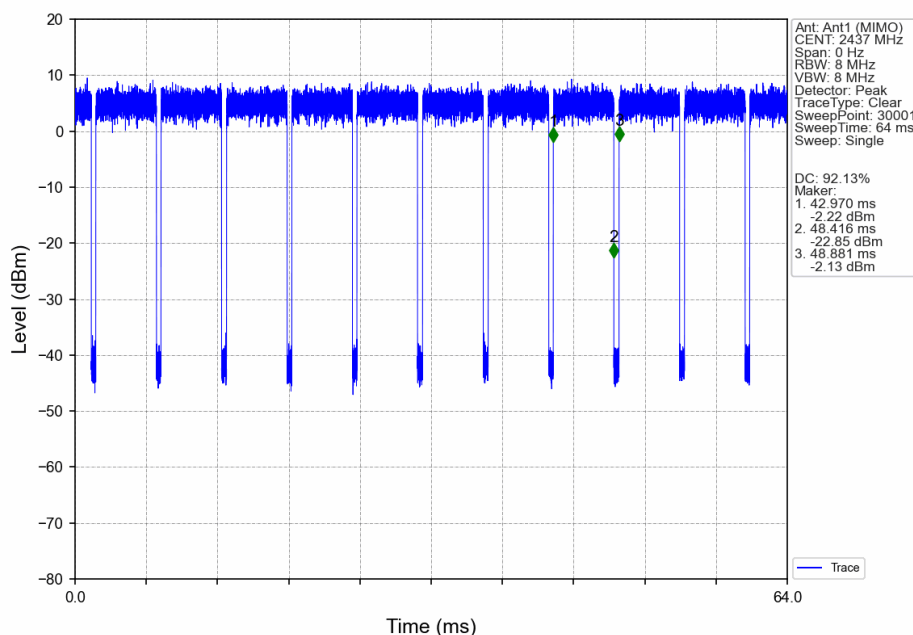

802.11ax(HEW40)_HCH_2452MHz_RU484_Left_Ant1 (MIMO)_NTNV

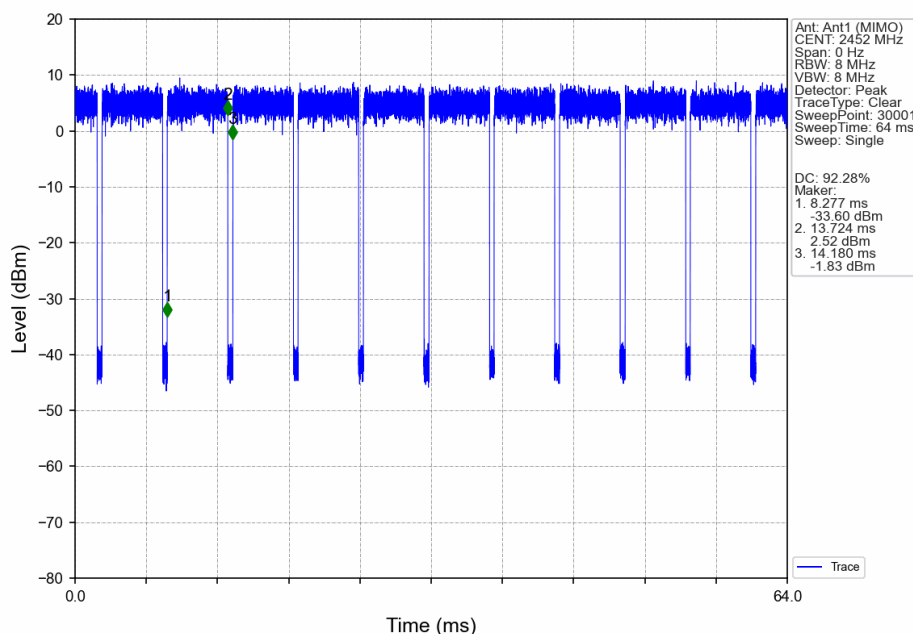

2. Bandwidth

2.1 Test Result

2.1.1 6dB BW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	6dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	SISO	2412	/	/	1	7.385	≥ 0.5	Pass
		2437	/	/	1	7.677	≥ 0.5	Pass
		2462	/	/	1	7.636	≥ 0.5	Pass
802.11g	SISO	2412	/	/	1	15.048	≥ 0.5	Pass
		2437	/	/	1	15.070	≥ 0.5	Pass
		2462	/	/	1	15.091	≥ 0.5	Pass
802.11n (HT20)	MIMO	2412	/	/	1	15.107	≥ 0.5	Pass
		2437	/	/	1	15.097	≥ 0.5	Pass
		2462	/	/	1	15.077	≥ 0.5	Pass
802.11n (HT40)	MIMO	2422	/	/	1	31.343	≥ 0.5	Pass
		2437	/	/	1	31.375	≥ 0.5	Pass
		2452	/	/	1	31.317	≥ 0.5	Pass
802.11ax (HEW20)	MIMO	2412	RU242	Left	1	15.110	≥ 0.5	Pass
		2437	RU242	Left	1	15.041	≥ 0.5	Pass
		2462	RU242	Left	1	15.073	≥ 0.5	Pass
802.11ax (HEW40)	MIMO	2422	RU484	Left	1	33.823	≥ 0.5	Pass
		2437	RU484	Left	1	33.810	≥ 0.5	Pass
		2452	RU484	Left	1	33.828	≥ 0.5	Pass