

## FCC PART 90S

## TEST REPORT

For

### Comba Telecom Ltd.

611 East Wing, No. 8 Science Park West Avenue, Hk

**FCC ID: PX8RH-7W22B-D**

|                                                                                                                                                                                                                                                                                                                             |                                                                                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                                                                                                                                                                                                      | <b>Product Type:</b><br>700/800MHz Public Safety<br>Distributed Antenna System |
| <b>Report Number:</b> RSZ171031010-00D                                                                                                                                                                                                                                                                                      |                                                                                |
| <b>Report Date:</b> 2018-03-14                                                                                                                                                                                                                                                                                              |                                                                                |
| <b>Reviewed By:</b> RF Engineer                                                                                                                                                                                                                                                                                             | Rocky Kang<br><i>Rocky Kang</i>                                                |
| <b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen)<br>6/F., West Wing, Third Phase of Wanli Industrial Building,<br>Shihua Road, Futian Free Trade Zone, Shenzhen,<br>Guangdong, China<br>Tel: +86-755-33320018<br>Fax: +86-755-33320008<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |                                                                                |

**Note:** This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP\* or any agency of the Federal Government. \* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk “\*”.

## **TABLE OF CONTENTS**

|                                                                                  |           |
|----------------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                                  | <b>3</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                         | 3         |
| OBJECTIVE .....                                                                  | 3         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                               | 3         |
| TEST METHODOLOGY .....                                                           | 3         |
| MEASUREMENT UNCERTAINTY .....                                                    | 4         |
| TEST FACILITY .....                                                              | 4         |
| <b>SYSTEM TEST CONFIGURATION .....</b>                                           | <b>5</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....                                          | 5         |
| EUT EXERCISE SOFTWARE .....                                                      | 5         |
| SPECIAL ACCESSORIES.....                                                         | 5         |
| EQUIPMENT MODIFICATIONS .....                                                    | 5         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                                         | 5         |
| EXTERNAL I/O CABLE.....                                                          | 5         |
| BLOCK DIAGRAM OF TEST SETUP .....                                                | 6         |
| <b>SUMMARY OF TEST RESULTS .....</b>                                             | <b>7</b>  |
| <b>TEST EQUIPMENT LIST .....</b>                                                 | <b>8</b>  |
| <b>FCC§1.1307 (b)(1) &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE) .....</b> | <b>9</b>  |
| APPLICABLE STANDARD .....                                                        | 9         |
| RESULT .....                                                                     | 9         |
| <b>FCC §90.219(e)(1) - INPUT/OUTPUT POWER AND AMPLIFIER GAIN .....</b>           | <b>10</b> |
| APPLICABLE STANDARD .....                                                        | 10        |
| TEST PROCEDURE .....                                                             | 10        |
| TEST DATA .....                                                                  | 10        |
| <b>FCC §2.1049 – OCCUPIED BANDWIDTH .....</b>                                    | <b>12</b> |
| APPLICABLE STANDARD .....                                                        | 12        |
| TEST PROCEDURE .....                                                             | 12        |
| TEST DATA .....                                                                  | 12        |
| <b>FCC §90.219(e)(3) - RADIATED SPURIOUS EMISSIONS .....</b>                     | <b>17</b> |
| APPLICABLE STANDARD .....                                                        | 17        |
| TEST PROCEDURE .....                                                             | 17        |
| TEST DATA .....                                                                  | 17        |
| <b>FCC §90.219(e)(3) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....</b>         | <b>19</b> |
| APPLICABLE STANDARD .....                                                        | 19        |
| TEST PROCEDURE .....                                                             | 19        |
| TEST DATA .....                                                                  | 20        |
| <b>FCC §90.219(e)(3)– INTERMODULATION &amp; BAND EDGES .....</b>                 | <b>30</b> |
| APPLICABLE STANDARD .....                                                        | 30        |
| TEST PROCEDURE .....                                                             | 30        |
| TEST DATA .....                                                                  | 31        |
| <b>FCC §90.219, KDB 935210 D05 – OUT-OF-BAND REJECTION .....</b>                 | <b>40</b> |
| APPLICABLE STANDARD .....                                                        | 40        |
| TEST PROCEDURE .....                                                             | 40        |
| TEST DATA .....                                                                  | 40        |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The Comba Telecom Ltd.'s product, model number: RH-7W22B-D, RH-7W22B-D-AC (FCC ID: PX8RH-7W22B-D) in this report is a 700/800MHz Public Safety Distributed Antenna System, which was measured approximately: 570 mm (L)\*390 mm (W)\*215 mm (H), rated with input voltage: DC -48 V with RH-7W22B-D and AC 120V/60Hz with RH-7W22B-D-AC.

Note: This series products model: RH-7W22B-D-AC and RH-7W22B-D are identical; they have the same or similar appearance, structure, PCB, Material and function to the testing products, Model RH-7W22B-D was selected for fully testing, the detailed information can be referred to the attached declaration which was stated and guaranteed by the applicant.

Operating Frequency Range for MU:

| Testing Signal Type | Uplink (MU) | Equipment Class |
|---------------------|-------------|-----------------|
| AWGN                | 817-824 MHz | B2I             |
| GSM                 | 817-824 MHz | B2I             |

\* All measurement and test data in this report was gathered from production sample serial number: 1702376. (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2017-10-31.

### Objective

This test report is prepared on behalf of Comba Telecom Ltd. in accordance with Part 2, and Part 90-S of the Federal Communication Commissions rules.

### Related Submittal(s)/Grant(s)

FCC Part 90 B9B submissions with FCC ID: PX8RH-7W22B-D.  
FCC Part 90 B9B/B2I, Part of system submissions with FCC ID: PX8RH-7W22B-R.

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as Part 90-S –Regulations Governing Licensing and Use of Frequencies in the 806-824, 851-869, 896-901, and 935-940 MHz Bands, and KDB 935210 D05 Indus Booster Basic Meas v01r02 Measurement Guidance for Industrial and Non-consumer Signal Booster, Repeater, and Amplifier Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

| Parameter                             | uncertainty |
|---------------------------------------|-------------|
| Occupied Channel Bandwidth            | ±5%         |
| Input/output power and amplifier gain | ±1.5dB      |
| Unwanted Emission, conducted          | ±1.5dB      |
| Radiated Emissions Below 1GHz         | ±4.70dB     |
| Radiated Emissions Above 1GHz         | ±4.80dB     |
| Internodulation                       | ±1.5dB      |
| Noise Figure Measurements             | ±1.5dB      |
| Temperature                           | ±1 °C       |
| Supply voltages                       | ±0.4%       |

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 382179, the FCC Designation No. : CN5001.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

### EUT Exercise Software

No exercise software was used.

### Special Accessories

No special accessory was used.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


| Manufacturer    | Description                                            | Model      | Serial Number         |
|-----------------|--------------------------------------------------------|------------|-----------------------|
| GW instek       | DC power supply                                        | GPS-3030DD | EM832096              |
| Rohde & Schwarz | Wideband Radio Communication Tester                    | CMW500     | 1201.002K50-146520-wh |
| Agilent         | MXG Vector Signal Generator                            | N5182B     | MY53051503            |
| N/A             | Load                                                   | N/A        | N/A                   |
| Comba           | 700/800MHz Public Safety Distributed Antenna System-RU | RH-7W22B-D | N/A                   |

### External I/O Cable

| Cable Description                 | Length (m) | From Port       | To   |
|-----------------------------------|------------|-----------------|------|
| Unshielded Un-Detachable DC Cable | 1.5        | DC Power Supply | EUT  |
| Unshielded Detachable AC Cable    | 1.0        | EUT             | LISN |
| Fiber Optic Cable                 | 2.0        | MU              | RU   |
| Shielded Detachable RF Cable      | 1.2        | MU              | Load |

## Block Diagram of Test Setup

For DC power supply:

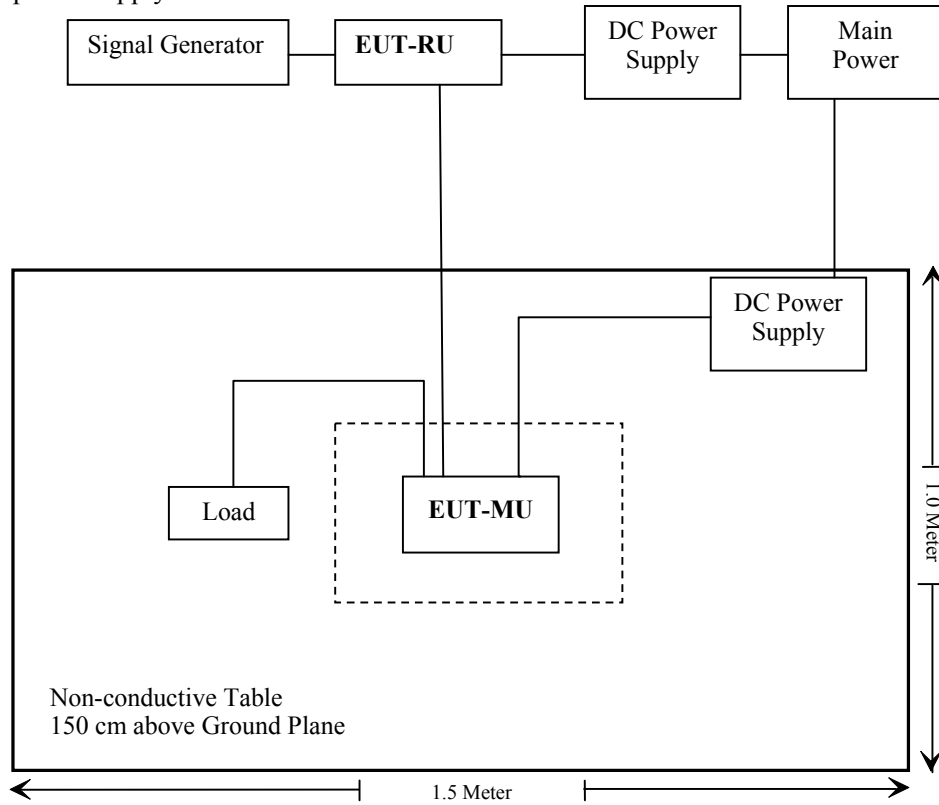

**SUMMARY OF TEST RESULTS**

| FCC Rules                 | Description of Test                     | Results    |
|---------------------------|-----------------------------------------|------------|
| §1.1307 (b)(1), §2.1091   | Maximum Permissible Exposure (MPE)      | Compliance |
| §90.219(e)(1)             | Input/output power and amplifier gain   | Compliance |
| §2.1049                   | Occupied Bandwidth                      | Compliance |
| §90.219(e)(3)             | Intermodulation& Band Edge              | Compliance |
| §90.219(e)(3)             | Spurious emissions at antenna terminals | Compliance |
| §90.219(e)(3)             | Radiated spurious emission              | Compliance |
| §90.219<br>KDB 935210 D05 | Out-of-band rejection                   | Compliance |

**TEST EQUIPMENT LIST**

| Manufacturer           | Description                         | Model                 | Serial Number          | Calibration Date | Calibration Due Date |
|------------------------|-------------------------------------|-----------------------|------------------------|------------------|----------------------|
| Radiated Emission Test |                                     |                       |                        |                  |                      |
| Sunol Sciences         | Horn Antenna                        | DRH-118               | A052604                | 2017-12-22       | 2020-12-21           |
| Rohde & Schwarz        | Signal Analyzer                     | FSIQ26                | 8386001028             | 2017-04-24       | 2018-04-24           |
| Sunol Sciences         | Bi-log Antenna                      | JB1                   | A040904-2              | 2017-12-17       | 2020-12-16           |
| Mini                   | Pre-amplifier                       | ZVA-183-S+            | 5969001149             | 2017-05-21       | 2018-05-21           |
| HP                     | Amplifier                           | HP8447E               | 1937A01046             | 2017-11-19       | 2018-05-21           |
| Anritsu                | Signal Generator                    | 68369B                | 004114                 | 2017-12-05       | 2018-12-05           |
| Rohde & Schwarz        | EMI Test Receiver                   | ESCI                  | 101120                 | 2018-01-11       | 2019-01-11           |
| COM POWER              | Dipole Antenna                      | AD-100                | 041000                 | NCR              | NCR                  |
| A.H. System            | Horn Antenna                        | SAS-200/571           | 135                    | 2015-08-18       | 2018-08-17           |
| Ducommun technologies  | RF Cable                            | UFA210A-1-4724-30050U | MFR64369<br>223410-001 | 2017-11-19       | 2018-05-21           |
| Ducommun technologies  | RF Cable                            | 104PEA                | 218124002              | Each time        |                      |
| Ducommun technologies  | RF Cable                            | RG-214                | 1                      | Each time        |                      |
| Ducommun technologies  | RF Cable                            | RG-214                | 2                      | Each time        |                      |
| RF Conducted Test      |                                     |                       |                        |                  |                      |
| Rohde & Schwarz        | SPECTRUM ANALYZER                   | FSU26                 | 200120                 | 2017-12-05       | 2018-12-05           |
| Long Wei               | DC Power Supply                     | TPR-6420D             | 398363                 | NCR              | NCR                  |
| R&S                    | Wideband Radio Communication tester | CMW500                | 1201.002K50-146520-wh  | 2017-04-24       | 2018-04-24           |
| Agilent                | MXG Vector Signal Generator         | N5182B                | MY53051503             | 2017-05-04       | 2018-05-04           |
| Ducommun technologies  | RF Cable                            | RG-214                | 3                      | Each time        |                      |
| Ducommun technologies  | RF Cable                            | 104PEA                | 218124002              | Each time        |                      |
| WEINSCHL               | 10dB Attenuator                     | 5324                  | AU0709                 | 2017-06-15       | 2018-06-15           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**FCC§1.1307 (b)(1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)****Applicable Standard**

According to subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

**TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

| Frequency range (MHz)                                          | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm <sup>2</sup> ) | Averaging time (minutes) |
|----------------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| <b>(A) Limits for Occupational/Controlled Exposure</b>         |                               |                               |                                     |                          |
| 0.3-3.0                                                        | 614                           | 1.63                          | *100                                | 6                        |
| 3.0-30                                                         | 1842/f                        | 4.89/f                        | *900/f <sup>2</sup>                 | 6                        |
| 30-300                                                         | 61.4                          | 0.163                         | 1.0                                 | 6                        |
| 300-1,500                                                      |                               |                               | f/300                               | 6                        |
| 1,500-100,000                                                  |                               |                               | 5                                   | 6                        |
| <b>(B) Limits for General Population/Uncontrolled Exposure</b> |                               |                               |                                     |                          |
| 0.3-1.34                                                       | 614                           | 1.63                          | *100                                | 30                       |
| 1.34-30                                                        | 824/f                         | 2.19/f                        | *180/f <sup>2</sup>                 | 30                       |
| 30-300                                                         | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300-1,500                                                      |                               |                               | f/1500                              | 30                       |
| 1,500-100,000                                                  |                               |                               | 1.0                                 | 30                       |

f = frequency in MHz \* = Plane-wave equivalent power density

**Result****Calculated Formulary:**

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm<sup>2</sup>)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For Occupational/controlled exposure:

| Frequency (MHz) | Antenna Gain |           | Max Tune-up Power |        | Evaluation Distance (cm) | Power Density (mW/cm <sup>2</sup> ) | MPE Limit (mW/cm <sup>2</sup> ) |
|-----------------|--------------|-----------|-------------------|--------|--------------------------|-------------------------------------|---------------------------------|
|                 | (dBi)        | (numeric) | (dBm)             | (mW)   |                          |                                     |                                 |
| 817-824         | 9            | 7.94      | 28                | 630.96 | 20                       | 1.0                                 | 2.72                            |

**Radiation Exposure Statement:**

To comply with FCC RF exposure requirements, a minimum separation distance of 20cm is required between the antenna and the persons, and the available max antenna gain must not exceed 9 dBi.

**FCC §90.219(e)(1) - INPUT/OUTPUT POWER AND AMPLIFIER GAIN****Applicable Standard**

According to FCC part 90.219(e)(1), The output power capability of a signal booster must be designed for deployments providing a radiated power not exceeding 5 Watts ERP for each retransmitted channel.

**Test Procedure**

Conducted RF Output Power:

According to KDB 935210 D05 v01r02 section 3.5.2:

- a) Connect a signal generator to the input of the EUT.
- b) Configure to generate the AWGN (broadband) test signal.
- c) The frequency of the signal generator shall be set to the frequency  $f_0$  as determined from 3.3.
- d) Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.
- e) Set the signal generator output power to a level that produces an EUT output level that is just below the AGC threshold (see 3.2), but not more than 0.5 dB below.
- f) Measure and record the output power of the EUT; use 3.5.3 or 3.5.4 for power measurement.
- g) Remove the EUT from the measurement setup. Using the same signal generator settings, repeat the power measurement at the signal generator port, which was used as the input signal to the EUT, and record as the input power. EUT gain may be calculated as described in 3.5.5.
- h) Repeat steps f) and g) with input signal amplitude set to 3 dB above the AGC threshold level.
- i) Repeat steps e) to h) with the narrowband test signal.
- j) Repeat steps e) to i) for all frequency bands authorized for use by the EUT.

**Test Data****Environmental Conditions**

|                    |           |
|--------------------|-----------|
| Temperature:       | 26 °C     |
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.5 kPa |

*The testing was performed by Tracy Hu on 2018-02-28.*

*Test Mode: Transmitting*

**Test Result:** Compliance. Please refer to following table.

| Band (MHz) | Signal Type | Signal Level  | Input Power (dBm) | Conducted Output Power (dBm) | Max Gain (dBi) | Max Antenna Gain (dBi) | ERP (dBm) | Limit (dBm) | Results |
|------------|-------------|---------------|-------------------|------------------------------|----------------|------------------------|-----------|-------------|---------|
| 820.5      | GSM         | Pre-AGC       | -67               | 26.93                        | 93.93          | 9                      | 33.78     | 37          | Pass    |
|            |             | 3dB above AGC | -64               | 27.10                        | 91.10          | 9                      | 33.95     | 37          | Pass    |
|            | AWGN        | Pre-AGC       | -67               | 26.26                        | 93.26          | 9                      | 33.11     | 37          | Pass    |
|            |             | 3dB above AGC | -64               | 26.32                        | 90.32          | 9                      | 33.17     | 37          | Pass    |

Note: Max Gain= Conducted output power – Input power

ERP= Measured Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15 (dB)

The limit is 5Watts (37dBm)

## FCC §2.1049 – OCCUPIED BANDWIDTH

### Applicable Standard

FCC §2.1049.

### Test Procedure

Test Method: KDB 935210 D05 Indus Booster Basic Meas v01r02 section 3.4

A 26 dB bandwidth measurement shall be performed on the input signal and the output signal; alternatively, the 99% OBW can be measured and used. See KDB Publication 971168 [R8] for more information on measuring OBW



### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 26 °C     |
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.5 kPa |

The testing was performed by Tracy Hu on 2018-02-28.

Test Mode: Transmitting


Please refer to the following tables and plots.

| Signal Type | Frequency (MHz) | Input Signal Level | Input         |                       | Output        |                       |
|-------------|-----------------|--------------------|---------------|-----------------------|---------------|-----------------------|
|             |                 |                    | 99% OBW (MHz) | 26dB Band width (MHz) | 99% OBW (MHz) | 26dB Band width (MHz) |
| GSM         | 820.5           | AGC                | 0.245         | 0.315                 | 0.263         | 0.327                 |
|             |                 | AGC+3 dB           | 0.245         | 0.314                 | 0.250         | 0.324                 |
| AWGN        |                 | AGC                | 4.503         | 4.929                 | 4.543         | 4.976                 |
|             |                 | AGC+3 dB           | 4.519         | 4.945                 | 4.519         | 4.952                 |

Note: Input signal level refer to the result of item: Input/output power and amplifier gain


AWGN:

## Frequency: 820.5 MHz, 99% Occupied &amp; 26 dB Bandwidth AGC Input

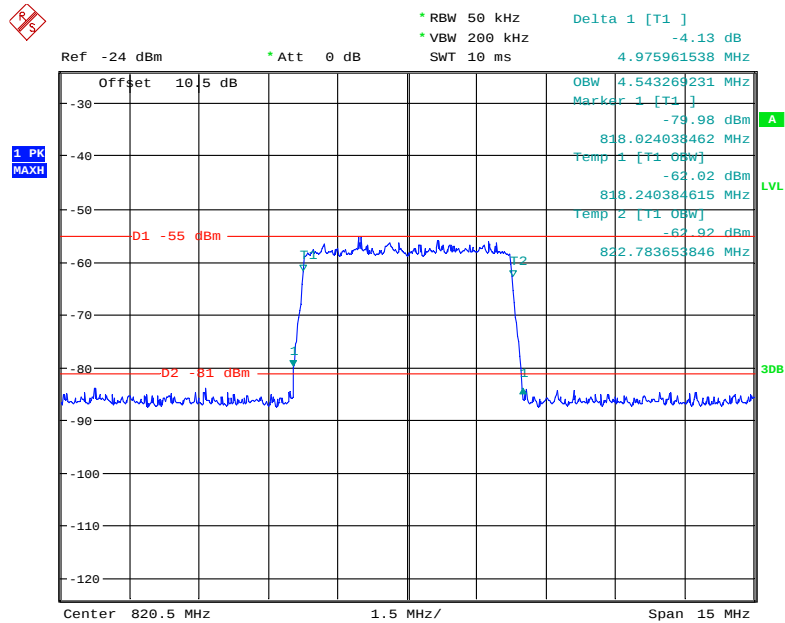


Date: 28.FEB.2018 16:01:43


## Frequency: 820.5 MHz, 99% Occupied &amp; 26 dB Bandwidth AGC Output

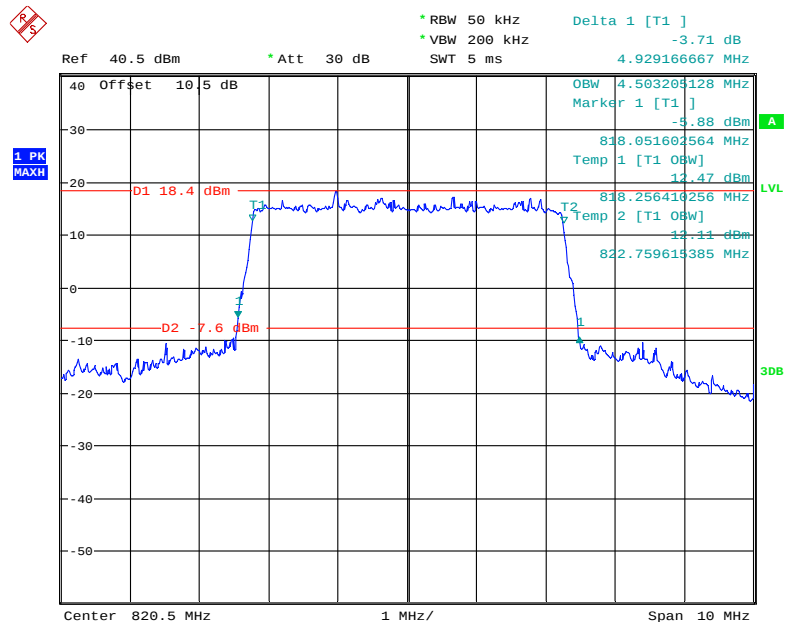


Date: 28.FEB.2018 15:10:06

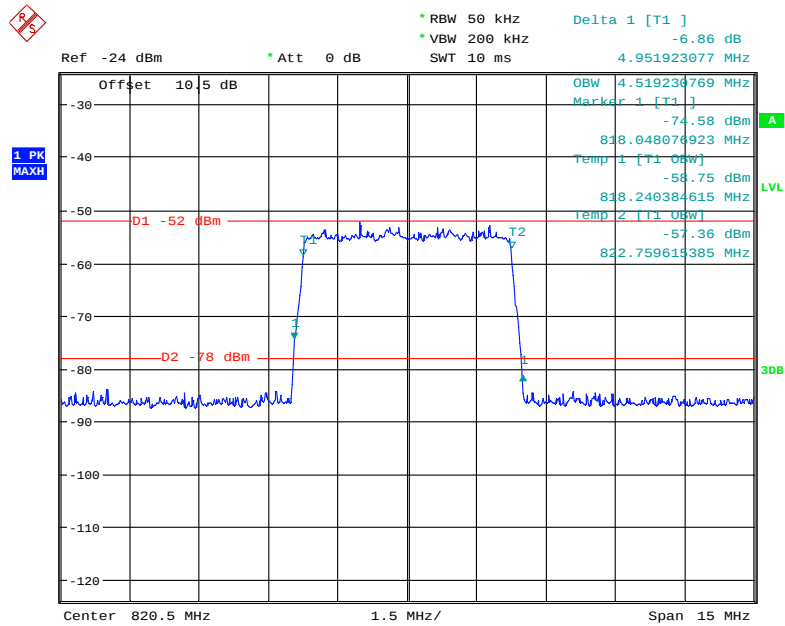**Frequency: 820.5 MHz, 99% Occupied & 26 dB Bandwidth AGC+3 Input**


Date: 28.FEB.2018 16:02:47

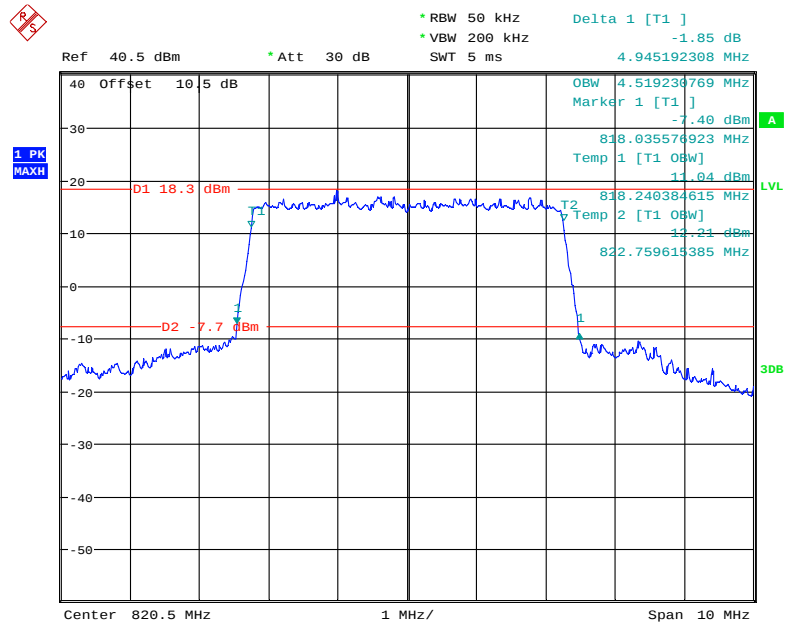**Frequency: 820.5 MHz, 99% Occupied & 26 dB Bandwidth AGC+3 Output**

Date: 28.FEB.2018 15:11:01

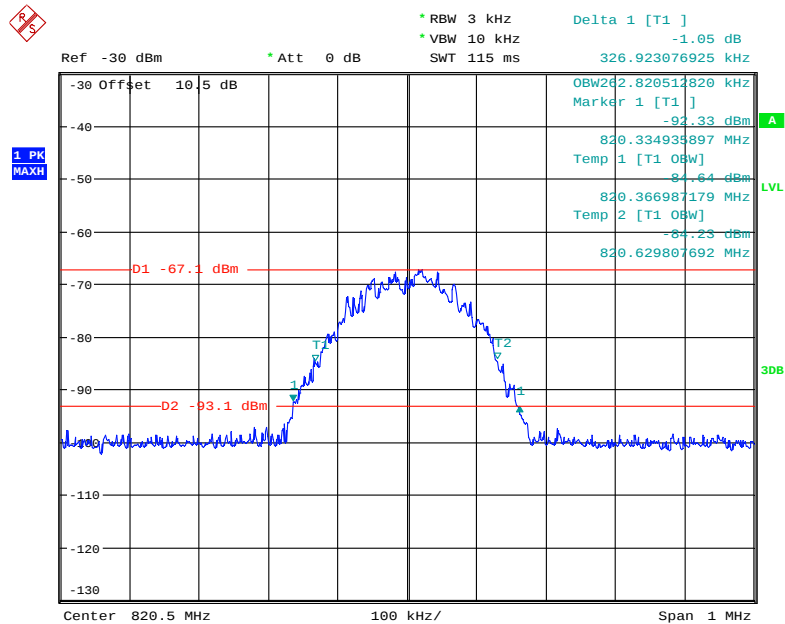
**GSM:****Frequency: 820.5 MHz, 99% Occupied & 26 dB Bandwidth AGC Input**

Date: 28.FEB.2018 15:37:05

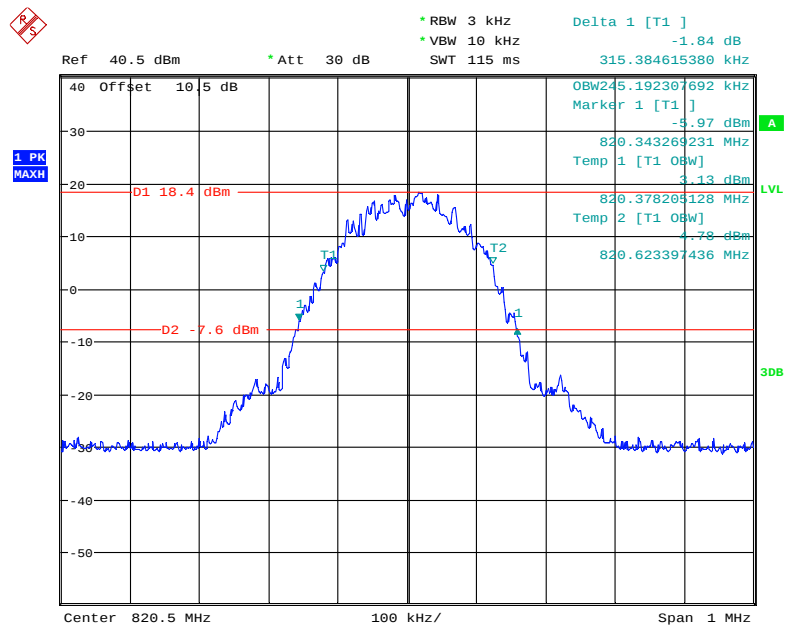**Frequency: 820.5 MHz, 99% Occupied & 26 dB Bandwidth AGC Output**


Date: 28.FEB.2018 15:05:49

**Frequency: 820.5 MHz, 99% Occupied & 26 dB Bandwidth AGC+3 Input**

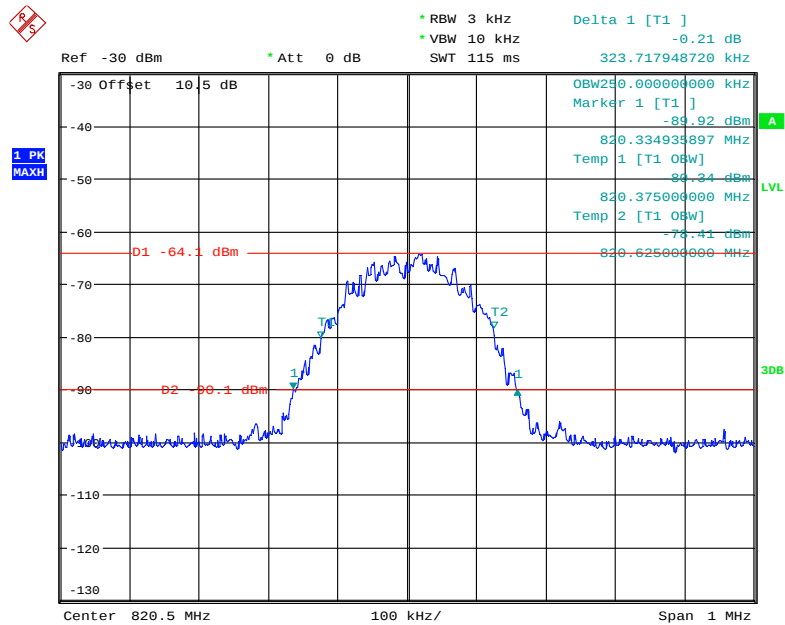

Date: 28.FEB.2018 15:38:15

**Frequency: 820.5 MHz, 99% Occupied & 26 dB Bandwidth AGC+3 Output**

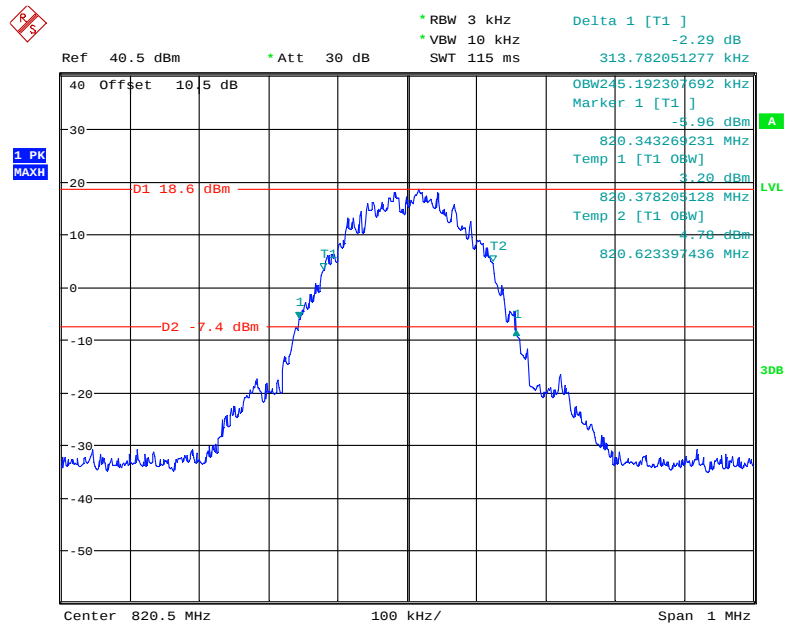

Date: 28.FEB.2018 15:08:11

## FCC §90.219(e)(3) - RADIATED SPURIOUS EMISSIONS

### Applicable Standard

According to FCC §90.219(e)(3), Spurious emissions from a signal booster must not exceed –13 dBm within any 100 kHz measurement bandwidth.

### Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level

### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Tracy Hu on 2018-01-18.*

Test Mode: Transmitting(pre-scan the low, middle and high channel, the worst case was middle channel)

Model: RH-7W22B-D

30MHz - 10GHz:

| Frequency<br>(MHz) | Receiver<br>Reading<br>(dBμV) | Turn<br>Table<br>Angle<br>Degree | Rx Antenna    |                | Substituted    |                       |                         | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|--------------------|-------------------------------|----------------------------------|---------------|----------------|----------------|-----------------------|-------------------------|----------------------------|----------------|----------------|
|                    |                               |                                  | Height<br>(m) | Polar<br>(H/V) | Level<br>(dBm) | Cable<br>Loss<br>(dB) | Antenna<br>Gain<br>(dB) |                            |                |                |
| 820.5 MHz          |                               |                                  |               |                |                |                       |                         |                            |                |                |
| 218.25             | 36.69                         | 1                                | 2.1           | H              | -60.3          | 0.30                  | 0                       | -60.60                     | -13            | 47.60          |
| 218.25             | 36.89                         | 350                              | 1.6           | V              | -60.1          | 0.30                  | 0                       | -60.40                     | -13            | 47.40          |
| 1641.00            | 48.36                         | 140                              | 2.3           | H              | -60.0          | 1.40                  | 8.70                    | -52.70                     | -13            | 39.70          |
| 1641.00            | 47.98                         | 330                              | 1.6           | V              | -60.1          | 1.40                  | 8.70                    | -52.80                     | -13            | 39.80          |

Model: RH-7W22B-D-AC

30MHz - 10GHz:

| Frequency<br>(MHz) | Receiver<br>Reading<br>(dBμV) | Turn<br>Table<br>Angle<br>Degree | Rx Antenna    |                | Substituted    |                       |                         | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|--------------------|-------------------------------|----------------------------------|---------------|----------------|----------------|-----------------------|-------------------------|----------------------------|----------------|----------------|
|                    |                               |                                  | Height<br>(m) | Polar<br>(H/V) | Level<br>(dBm) | Cable<br>Loss<br>(dB) | Antenna<br>Gain<br>(dB) |                            |                |                |
| 820.5 MHz          |                               |                                  |               |                |                |                       |                         |                            |                |                |
| 218.25             | 38.91                         | 262                              | 2.3           | H              | -58.1          | 0.30                  | 0                       | -58.40                     | -13            | 45.40          |
| 218.25             | 39.73                         | 176                              | 2.4           | V              | -57.3          | 0.30                  | 0                       | -57.60                     | -13            | 44.60          |
| 1641.00            | 48.52                         | 341                              | 2.4           | H              | -59.8          | 1.40                  | 8.70                    | -52.50                     | -13            | 39.50          |
| 1641.00            | 47.43                         | 326                              | 1.5           | V              | -60.7          | 1.40                  | 8.70                    | -53.40                     | -13            | 40.40          |

**Note:**

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

---

**FCC §90.219(e)(3) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS**

---

**Applicable Standard**

According to FCC §90.219(e)(3), Spurious emissions from a signal booster must not exceed –13 dBm within any 100 kHz measurement bandwidth.

**Test Procedure**

Test Method: KDB 935210 D05 Indus Booster Basic Meas v01r02 section 3.6.3

- a) Connect a signal generator to the input of the EUT.
- b) Set the signal generator to produce the broadband test signal as previously described (i.e., 4.1 MHz OBW AWGN).
- c) Set the center frequency of the test signal to the lowest available channel within the frequency band or block.
- d) Set the EUT input power to a level that is just below the AGC threshold (see 3.2), but not more than 0.5 dB below.
- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band of operation (e.g., reference bandwidth is typically 100 kHz or 1 MHz).
- g) Set the VBW  $\geq 3 \times$  RBW.
- h) Set the Sweep time = auto-couple.
- i) Set the spectrum analyzer start frequency to the lowest RF signal generated in the equipment, without going below 9 kHz, and the stop frequency to the lower band/block edge frequency minus 100 kHz or 1 MHz, as specified in the applicable rule part.  
The number of measurement points in each sweep must be  $\geq (2 \times \text{span}/\text{RBW})$ , which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer. 4
- j) Select the power averaging (rms) detector function.
- k) Trace average at least 10 traces in power averaging (rms) mode.
- l) Use the peak marker function to identify the highest amplitude level over each measured frequency range. Record the frequency and amplitude and capture a plot for inclusion in the test report.
- m) Reset the spectrum analyzer start frequency to the upper band/block edge frequency plus 100 kHz or 1 MHz, as specified in the applicable rule part, and the spectrum analyzer stop frequency to 10 times the highest frequency of the fundamental emission (see Section 2.1057). The number of measurement points in each sweep must be  $\geq (2 \times \text{span}/\text{RBW})$ , which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.
- n) Trace average at least 10 traces in power averaging (rms) mode.
- o) Use the peak marker function to identify the highest amplitude level over each of the measured frequency ranges. Record the frequency and amplitude and capture a plot for inclusion in the test report; also provide tabular data, if required.
- p) Repeat steps i) to o) with the input test signals firstly tuned to a middle band/block frequency/channel, and then tuned to a high band/block frequency/channel.
- q) Repeat steps b) to p) with the narrowband test signal.
- r) Repeat steps b) to q) for all authorized frequency bands/blocks used by the EUT.


**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 26 °C     |
| <b>Relative Humidity:</b> | 55 %      |
| <b>ATM Pressure:</b>      | 101.5 kPa |

*The testing was performed by Tracy Hu on 2018-02-28.*


*Test Mode: Transmitting, please refer to the following plots.*

### AWGN, 30MHz – 816.9 MHz, Low Channel

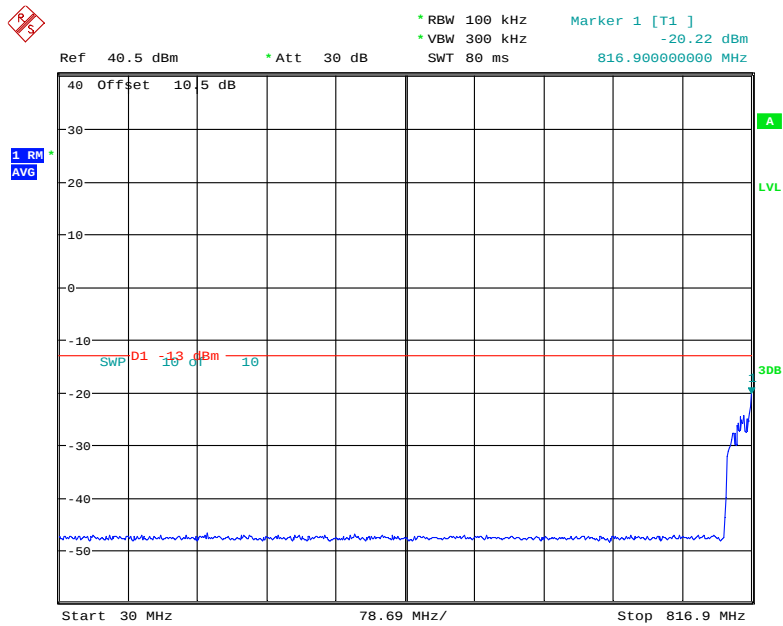


Date: 28.FEB.2018 17:16:02

### AWGN, 824.1 MHz – 1GHz, Low Channel

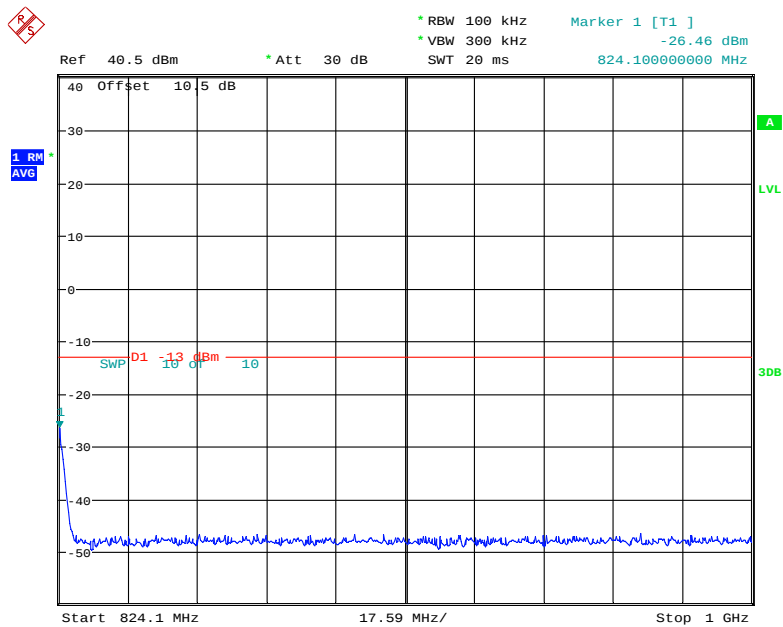


Date: 28.FEB.2018 17:15:06

### AWGN, 1GHz – 10GHz, Low Channel

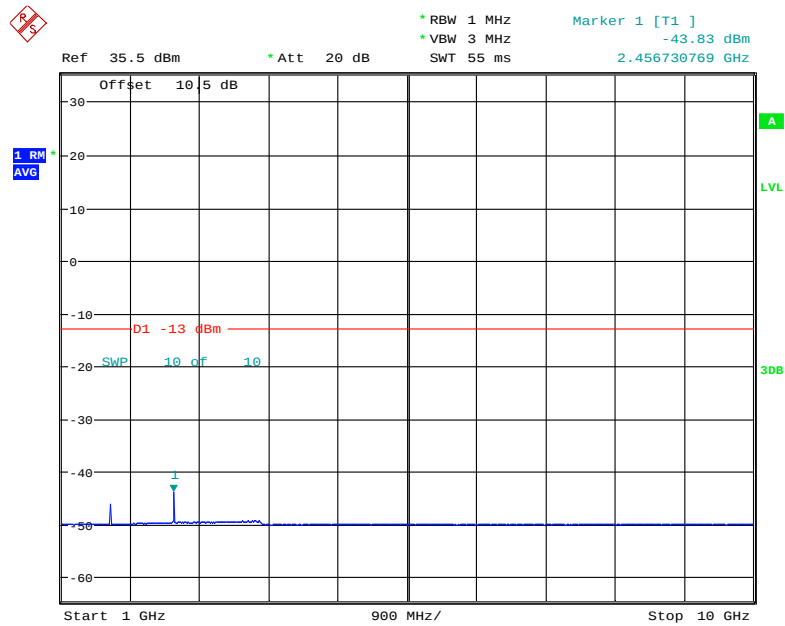


Date: 28.FEB.2018 16:47:30

### AWGN, 30MHz – 816.9 MHz, Middle Channel

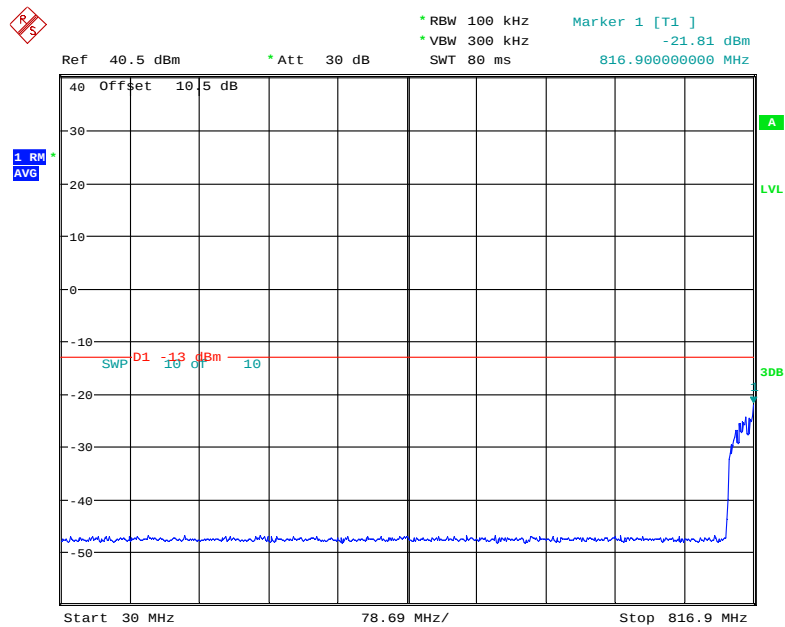


Date: 28.FEB.2018 17:16:43

### AWGN, 824.1 MHz – 1GHz, Middle Channel

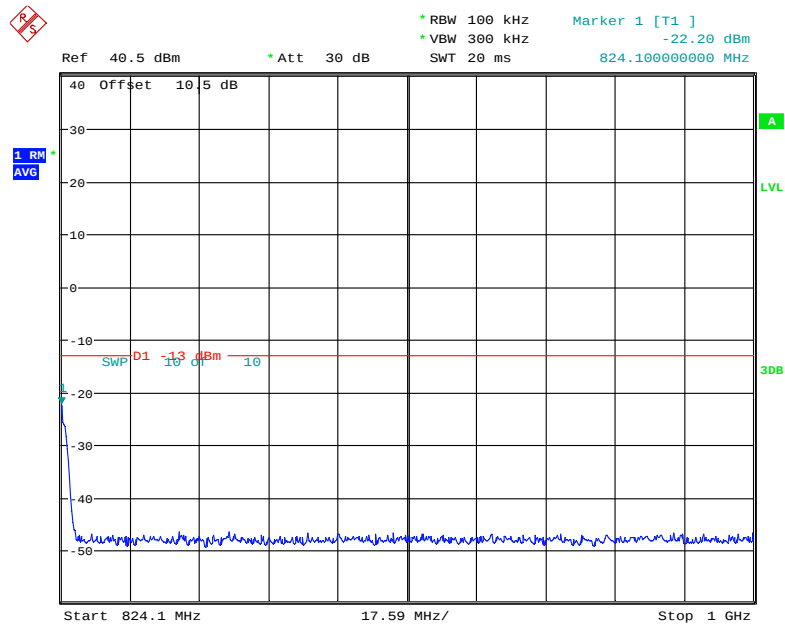


Date: 28.FEB.2018 17:14:39

### AWGN, 1GHz – 10GHz, Middle Channel

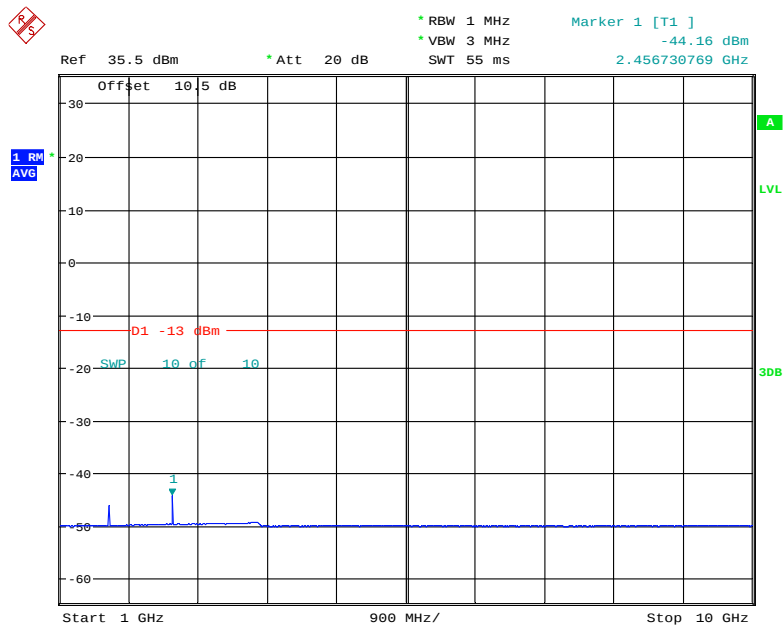


Date: 28.FEB.2018 16:48:05

### AWGN, 30MHz – 816.9 MHz, High Channel

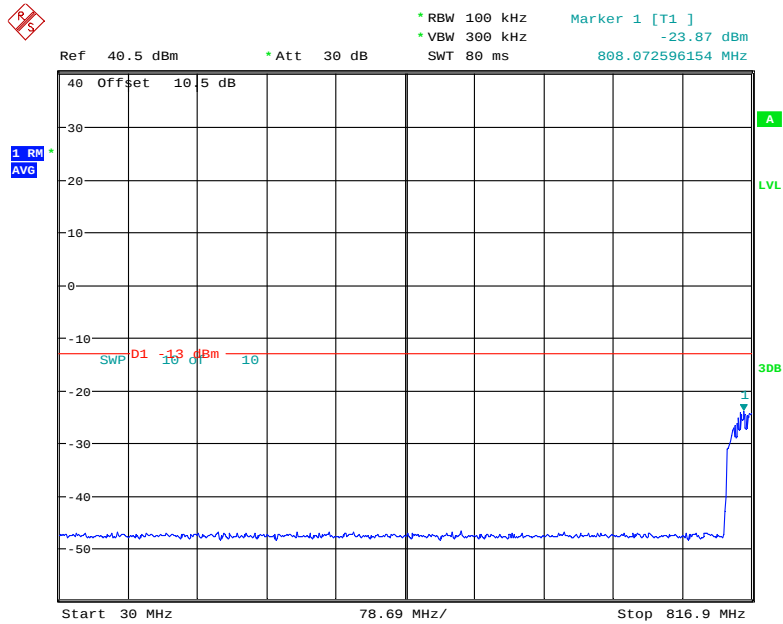


Date: 28.FEB.2018 17:17:21

### AWGN, 824.1 MHz – 1GHz, High Channel

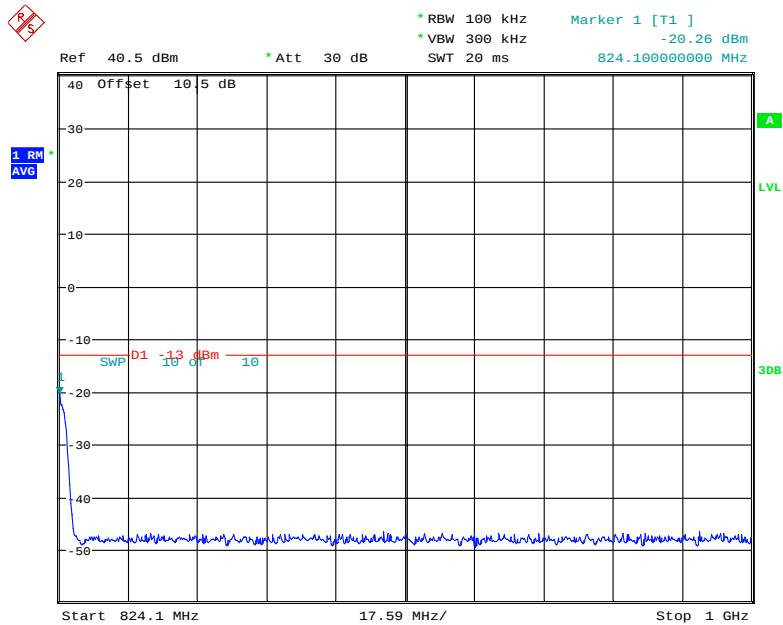


Date: 28.FEB.2018 17:13:48

### AWGN, 1GHz – 10GHz, High Channel

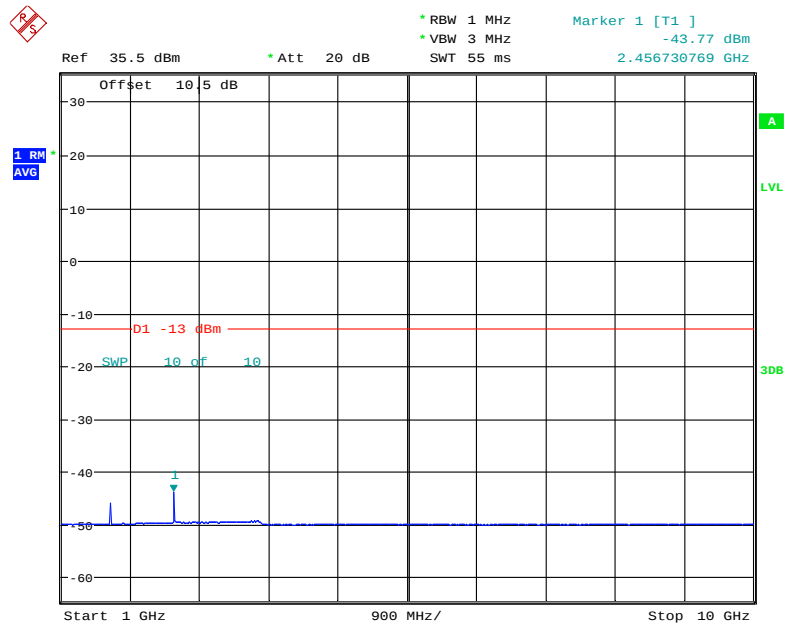


Date: 28.FEB.2018 16:48:26

### GSM, 30MHz – 816.9 MHz, Low Channel

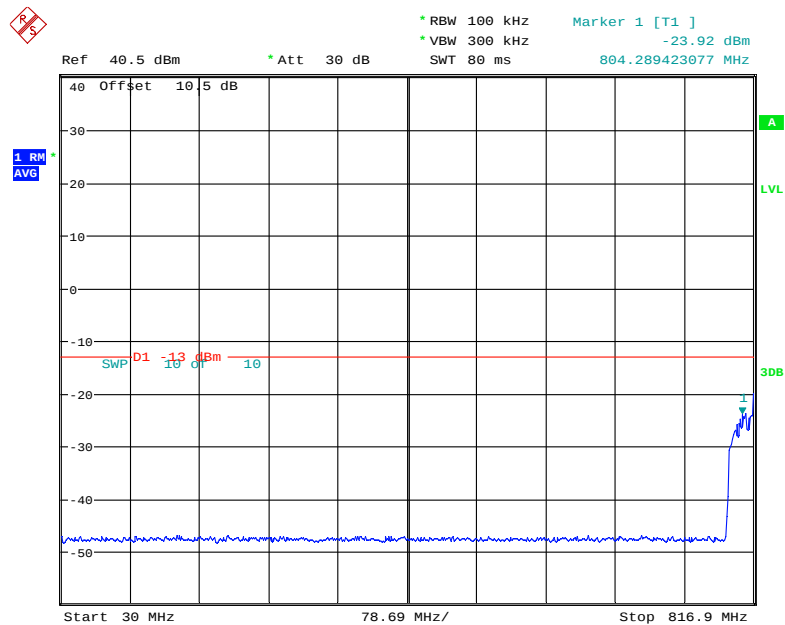


Date: 28.FEB.2018 17:11:43

### GSM, 824.1 MHz – 1GHz, Low Channel

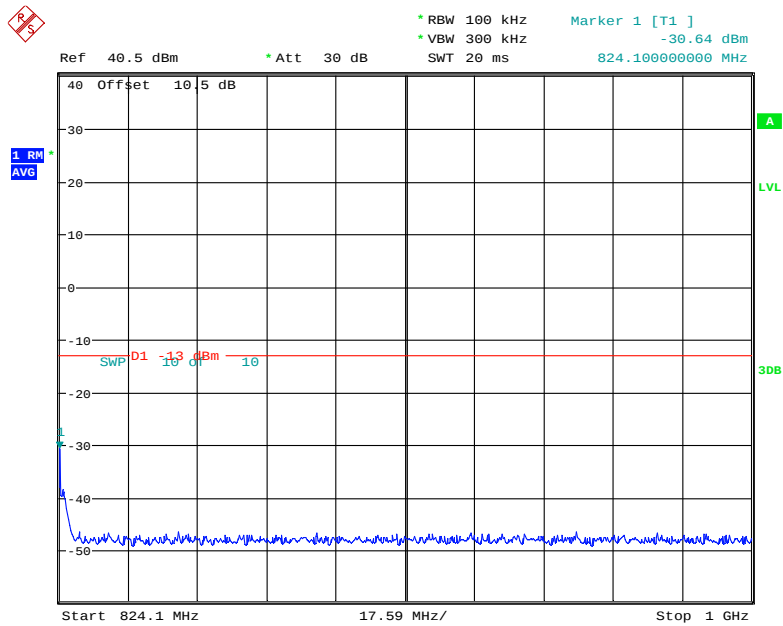


Date: 28.FEB.2018 17:12:11

### GSM, 1GHz – 10GHz, Low Channel

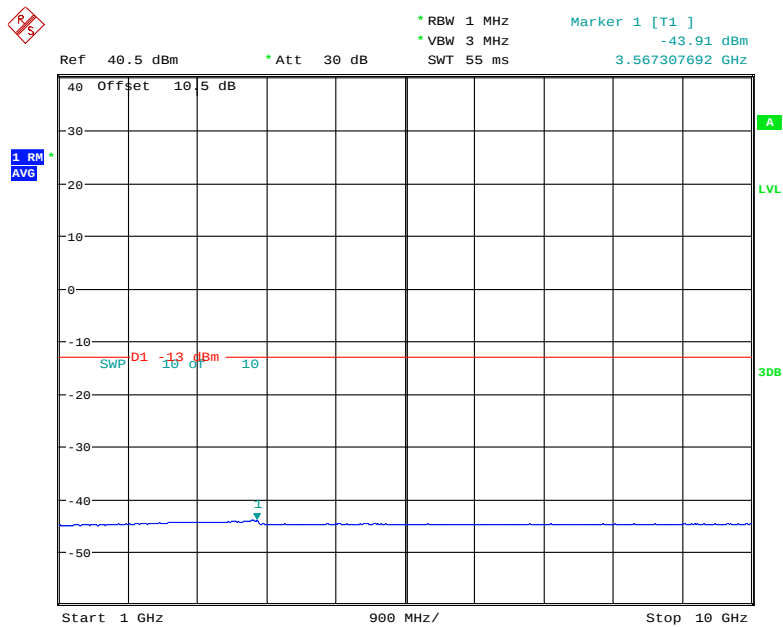


Date: 28.FEB.2018 16:58:41

### GSM, 30MHz – 816.9 MHz, Middle Channel

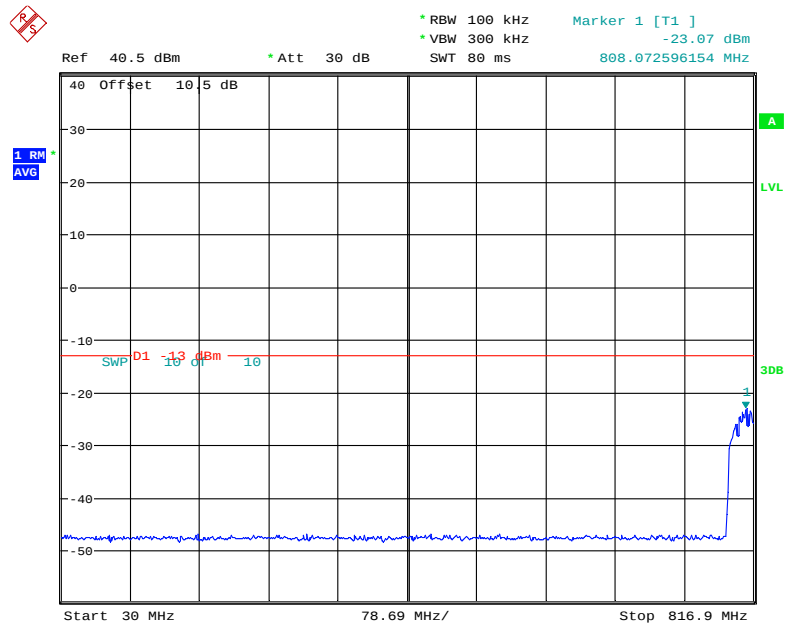


Date: 28.FEB.2018 17:11:14

### GSM, 824.1 MHz – 1GHz, Middle Channel

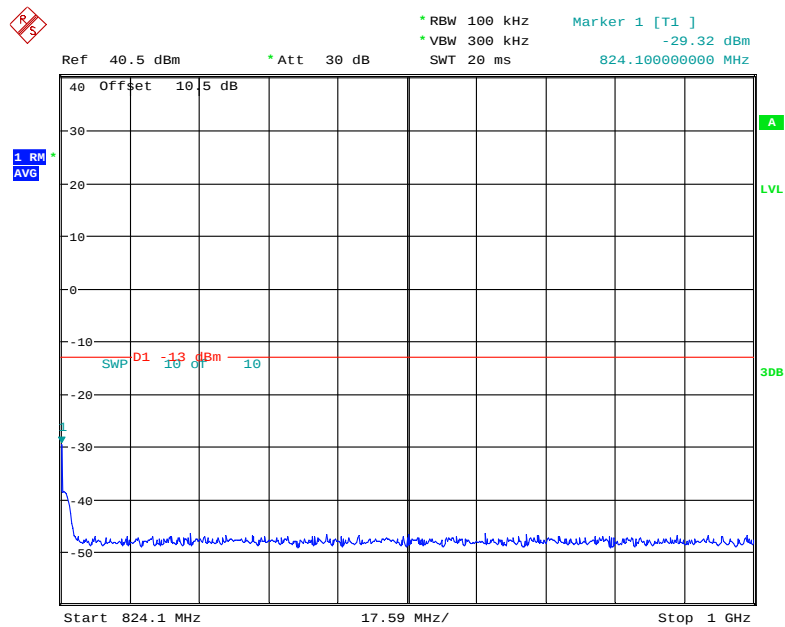


Date: 28.FEB.2018 17:12:38

### GSM, 1GHz – 10GHz, Middle Channel

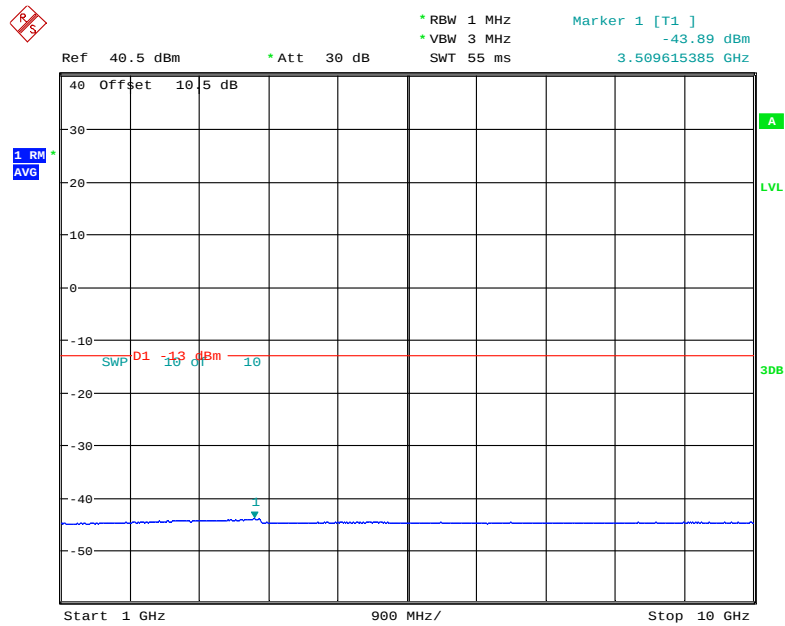


Date: 28.FEB.2018 16:59:03

### GSM, 30MHz – 816.9 MHz, High Channel

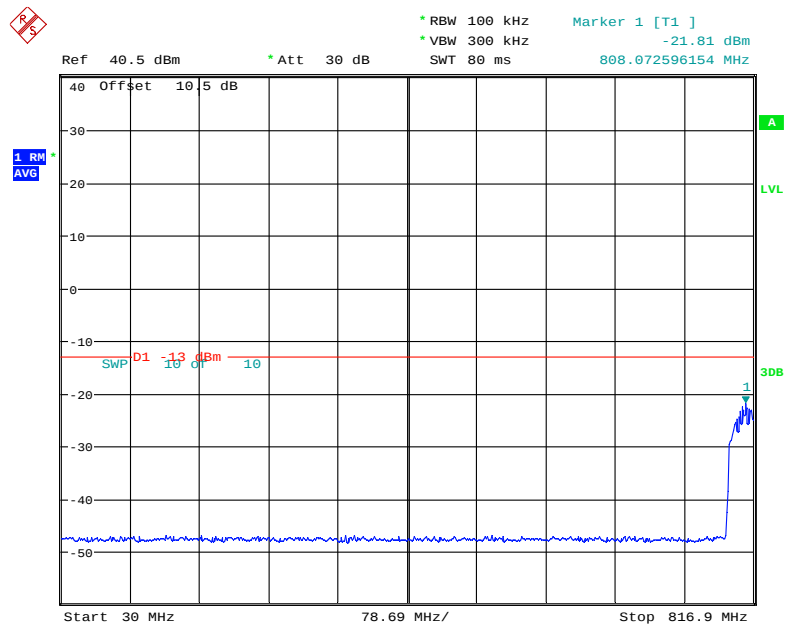


Date: 28.FEB.2018 17:10:05

### GSM, 824.1 MHz – 1GHz, High Channel

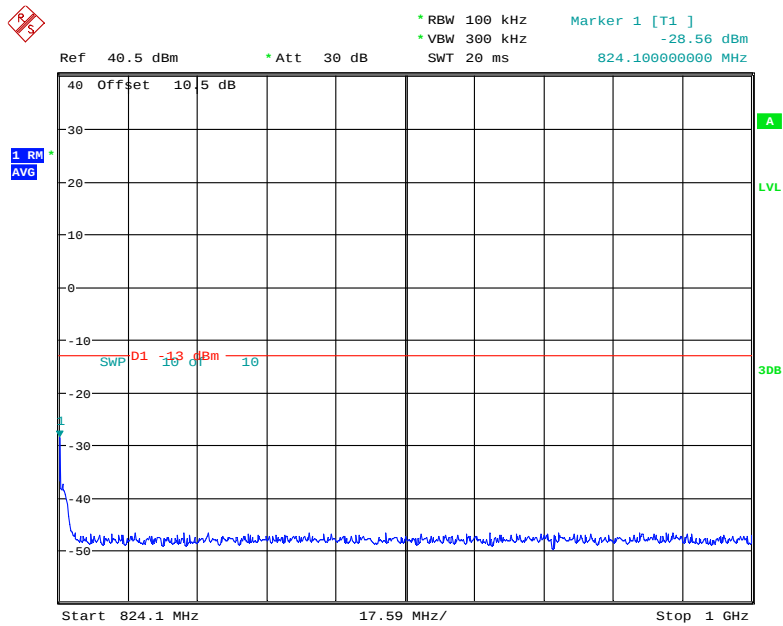

Date: 28.FEB.2018 17:12:58

### GSM, 1GHz – 10GHz, High Channel

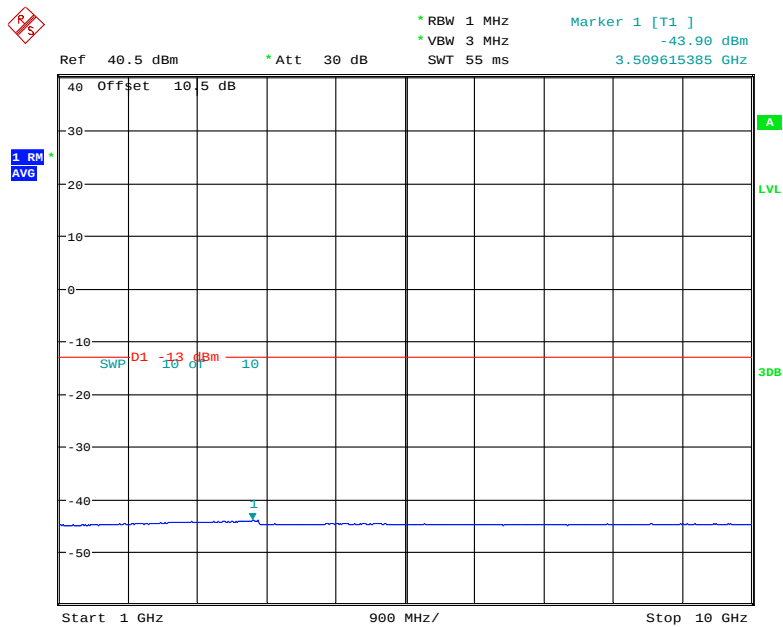

Date: 28.FEB.2018 16:59:28

## FCC §90.219(e)(3)– INTERMODULATION & BAND EDGES

### Applicable Standard

According to FCC §90.219(e)(3), Spurious emissions from a signal booster must not exceed –13 dBm within any 100 kHz measurement bandwidth.

### Test Procedure

Test Method: KDB 935210 D05 Indus Booster Basic Meas v01r02 section 3.6.2

- a) Connect a signal generator to the input of the EUT.  
If the signal generator is not capable of generating two modulated carriers simultaneously, then two discrete signal generators can be connected with an appropriate combining network to support this two-signal test.
- b) Set the signal generator to produce two AWGN signals as previously described (e.g., 4.1 MHz OBW).
- c) Set the center frequencies such that the AWGN signals occupy adjacent channels, as defined by industry standards such as 3GPP or 3GPP2, at the upper edge of the frequency band or block under test.
- d) Set the composite power levels such that the input signal is just below the AGC threshold (see 3.2), but not more than 0.5 dB below. The composite power can be measured using the procedures provided in KDB Publication 971168 [R8], but it will be necessary to expand the power integration bandwidth so as to include both of the transmit channels. Alternatively, the composite power can be measured using an average power meter as described in KDB Publication 971168 [R8].
- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band (typically 1 % of the EBW or 100 kHz or 1 MHz)
- g) Set the VBW =  $3 \times \text{RBW}$ .
- h) Set the detector to power averaging (rms) detector.
- i) Set the Sweep time = auto-couple.
- j) Set the spectrum analyzer start frequency to the upper block edge frequency, and the stop frequency to the upper block edge frequency plus 300 kHz or 3 MHz, for frequencies below and above 1 GHz, respectively.
- k) Trace average at least 100 traces in power averaging (rms) mode.
- l) Use the marker function to find the maximum power level.
- m) Capture the spectrum analyzer trace of the power level for inclusion in the test report.
- n) Repeat steps k) to m) with the composite input power level set to 3 dB above the AGC threshold.
- o) Reset the frequencies of the input signals to the lower edge of the frequency block or band under test.
- p) Reset the spectrum analyzer start frequency to the lower block edge frequency minus 300 kHz or 3 MHz, for frequencies below and above 1 GHz, respectively, and the stop frequency to the lower band or block edge frequency.
- q) Repeat steps k) to n).
- r) Repeat steps a) to q) with the signal generator configured for a single test signal tuned as close as possible to the block edges.
- s) Repeat steps a) to r) with the narrowband test signal.
- t) Repeat steps a) to s) for all authorized frequency bands or blocks used by the EUT.

**Test Data****Environmental Conditions**

|                           |                 |
|---------------------------|-----------------|
| <b>Temperature:</b>       | 25~26 °C        |
| <b>Relative Humidity:</b> | 54~55 %         |
| <b>ATM Pressure:</b>      | 101.0~101.5 kPa |


*The testing was performed by Tracy Hu from 2018-02-28 to 2018-03-01.*

*Test Mode: Transmitting*

**Test Result:** Compliance. Please refer to following plots.


# Intermodulation:

## AWGN, Left Band Edge, AGC

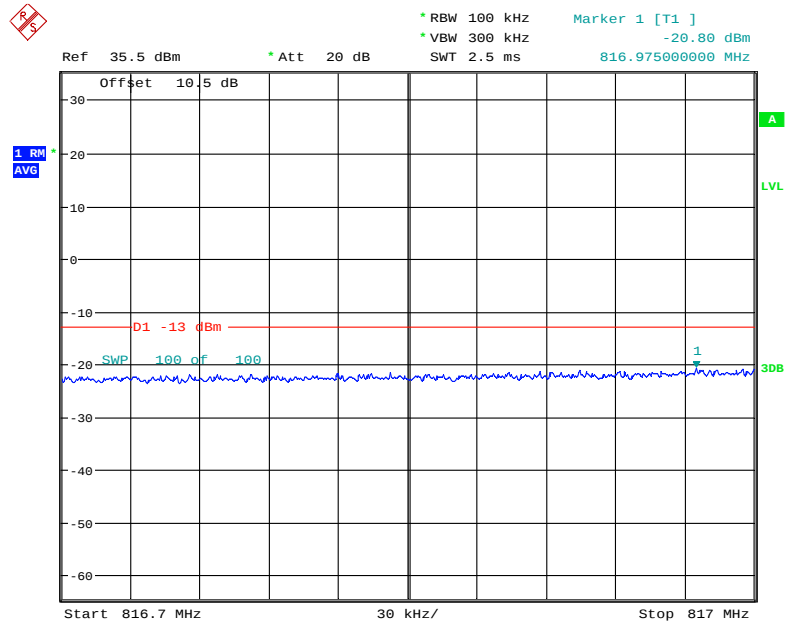


Date: 1.MAR.2018 09:45:09

## AWGN, Left Band Edge, AGC+3

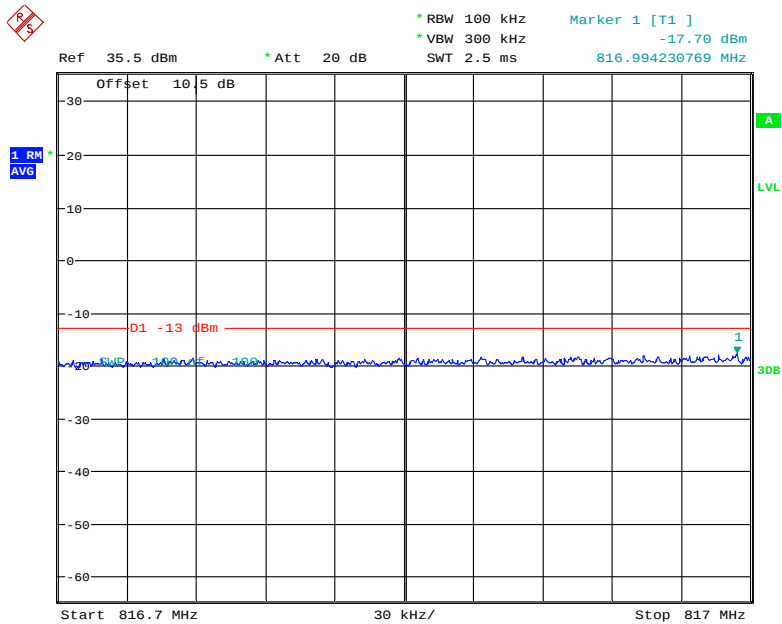


Date: 1.MAR.2018 09:44:41

### AWGN, Right Band Edge, AGC

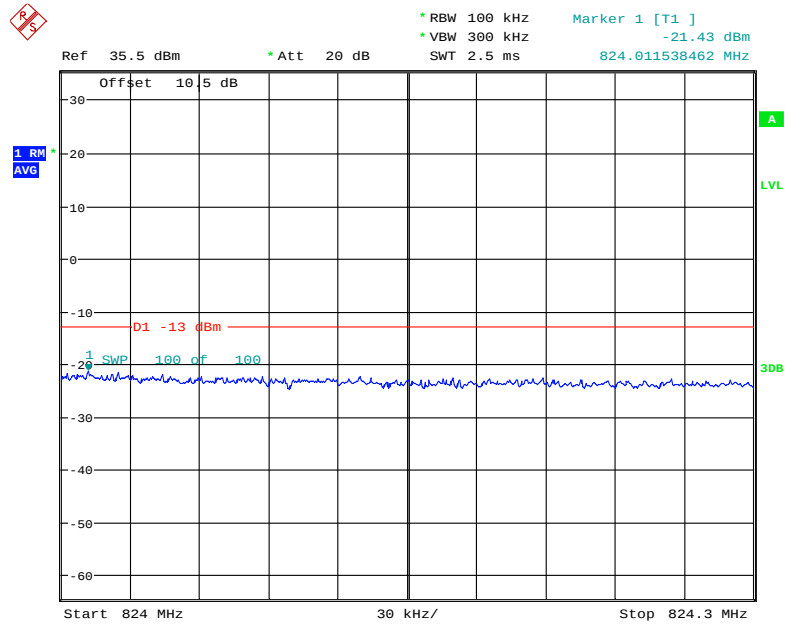


Date: 1.MAR.2018 09:41:48

### AWGN, Right Band Edge, AGC+3

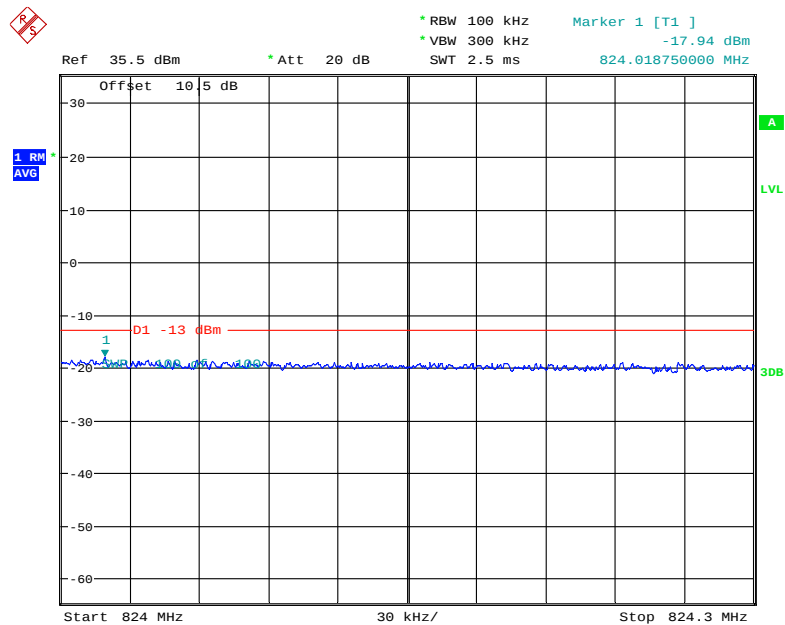


Date: 1.MAR.2018 09:42:59

### GSM, Left Band Edge, AGC

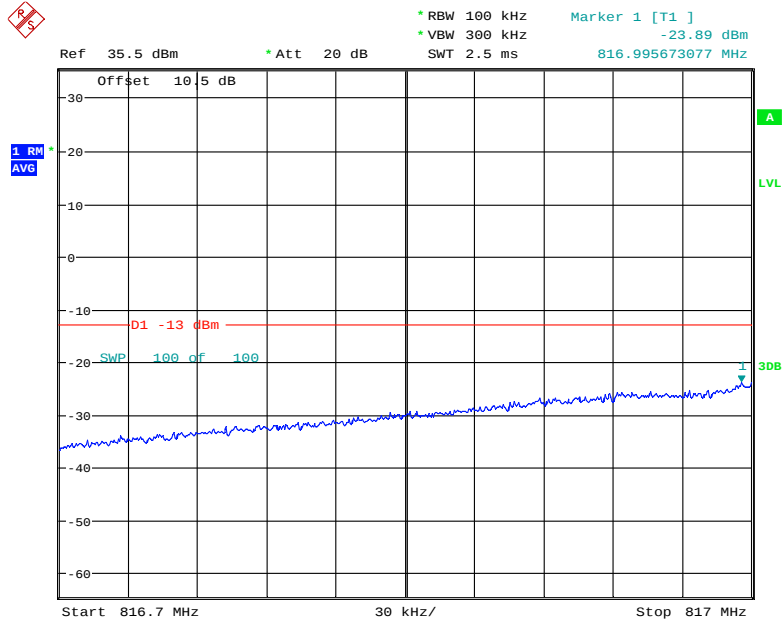


Date: 1.MAR.2018 09:29:14

### GSM, Left Band Edge, AGC+3

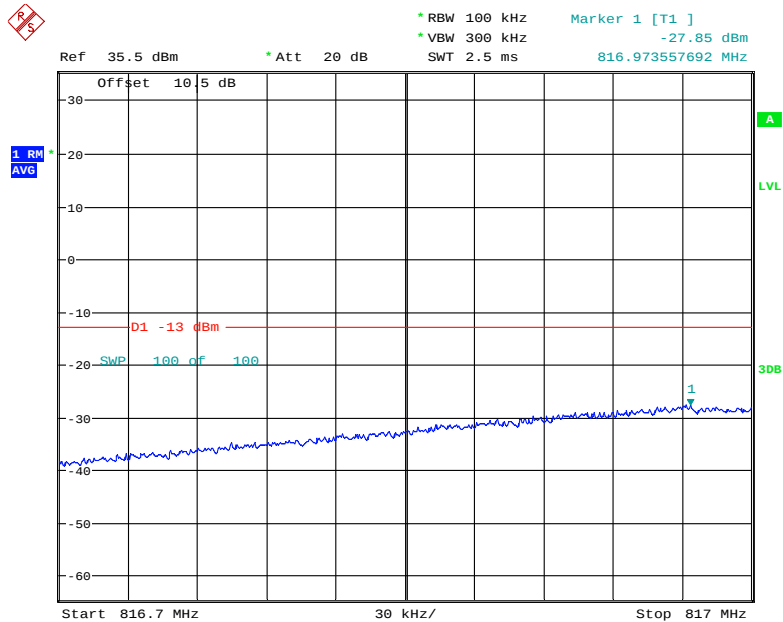


Date: 1.MAR.2018 09:37:39

### GSM, Right Band Edge, AGC

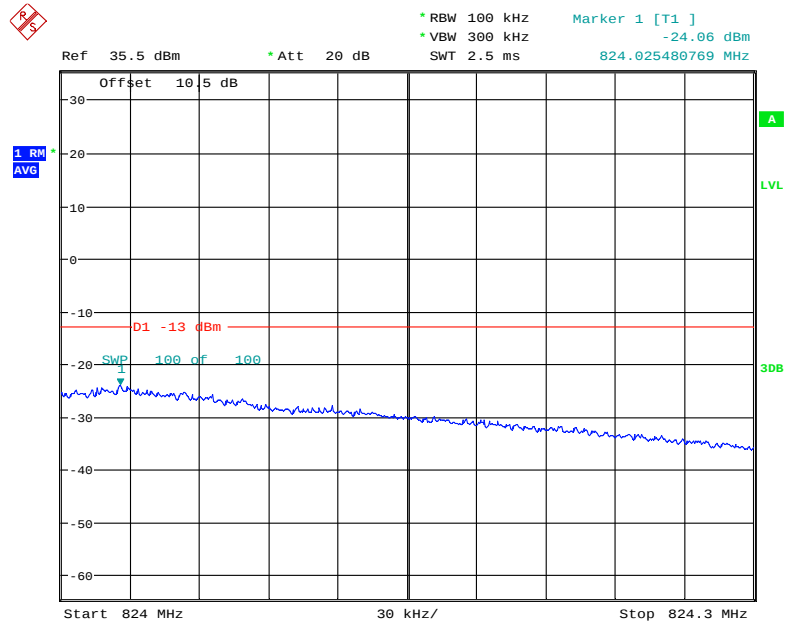

Date: 1.MAR.2018 09:39:32


### GSM, Right Band Edge, AGC+3

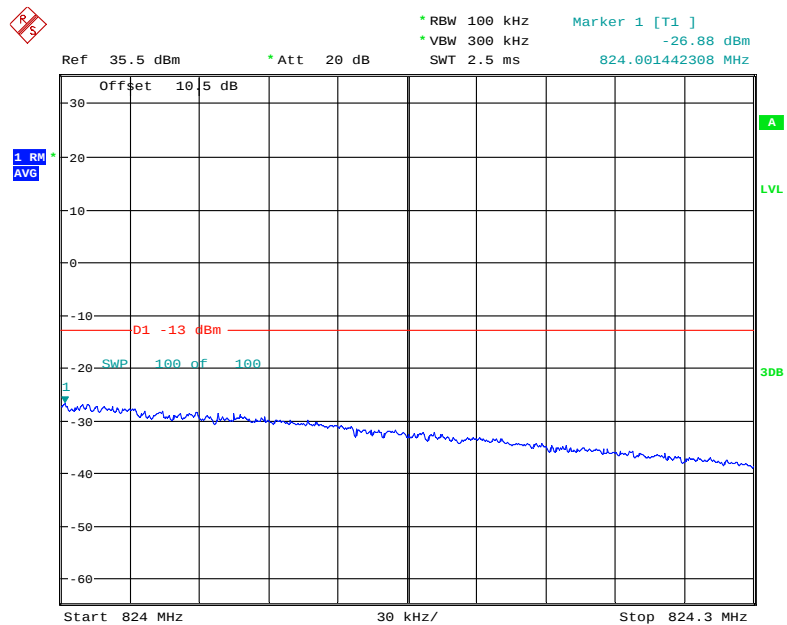

Date: 1.MAR.2018 09:38:51


# Band Edge:

## AWGN, Left Band Edge, AGC

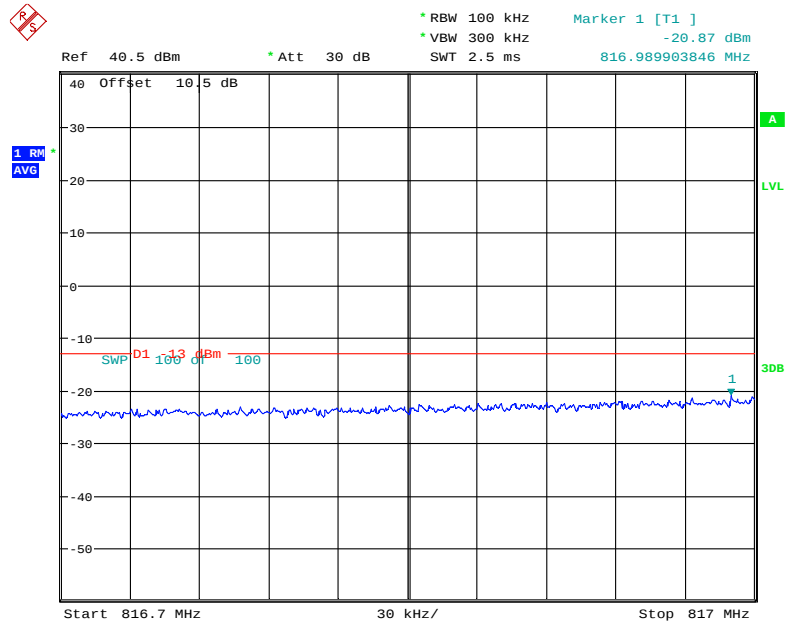


Date: 28.FEB.2018 19:27:45

## AWGN, Left Band Edge, AGC+3

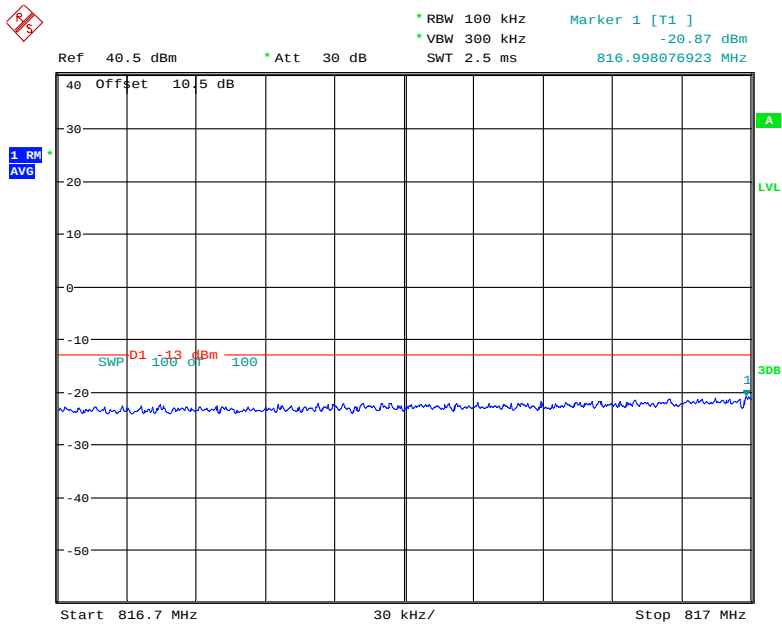


Date: 28.FEB.2018 19:27:25

### AWGN, Right Band Edge, AGC

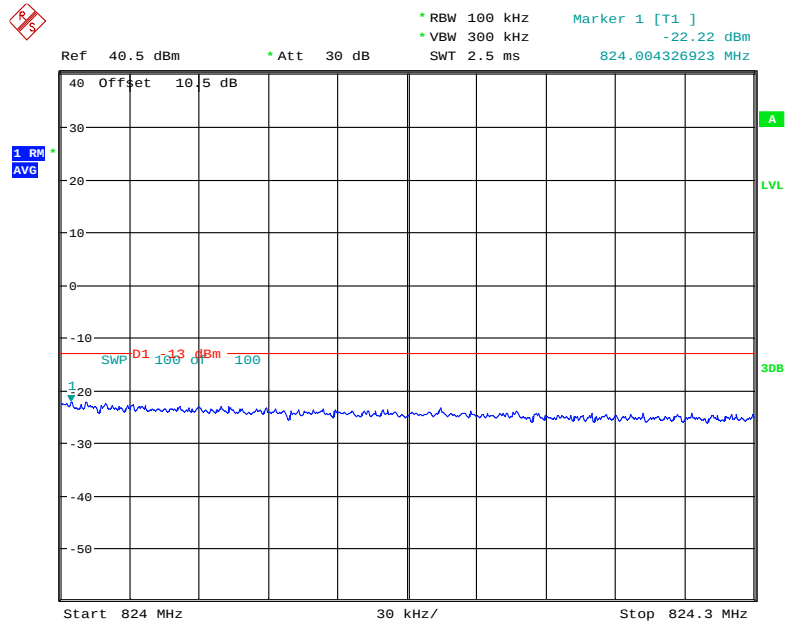


Date: 28.FEB.2018 19:26:00

### AWGN, Right Band Edge, AGC+3

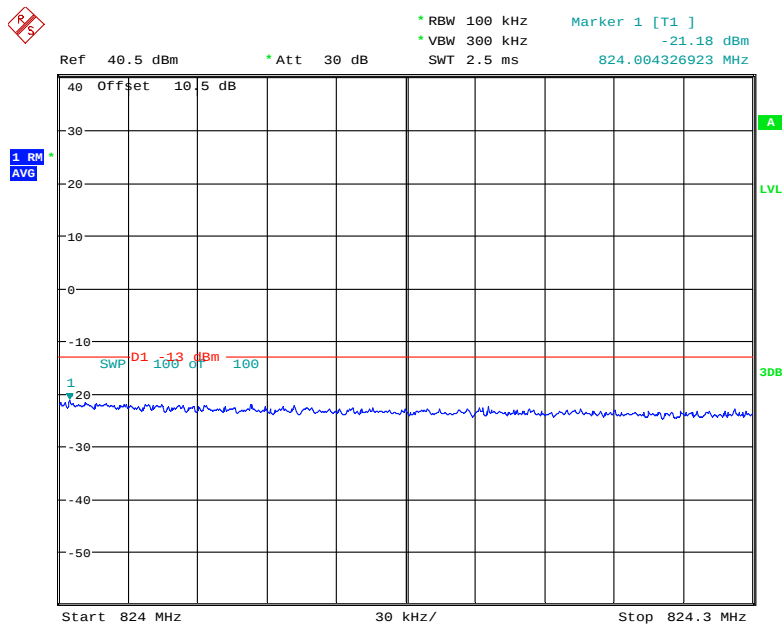


Date: 28.FEB.2018 19:26:49

### GSM, Left Band Edge, AGC

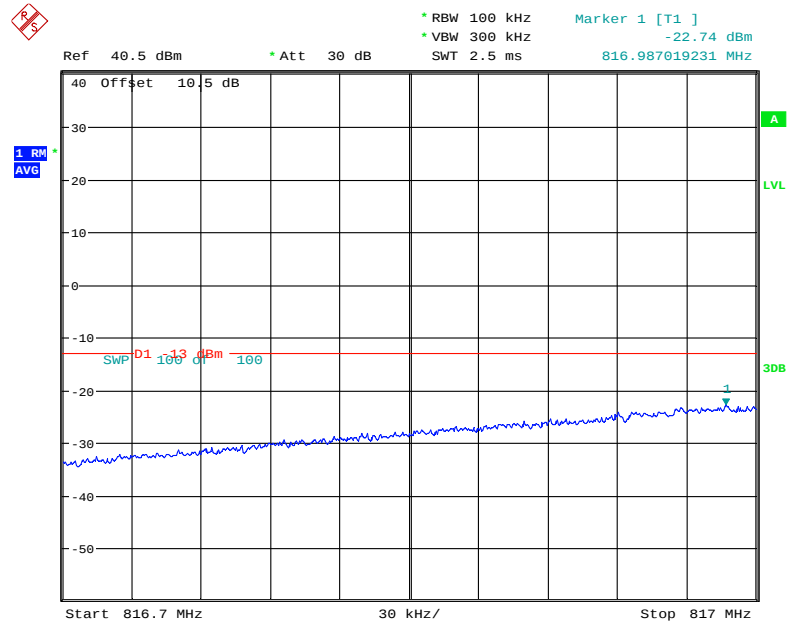


Date: 28.FEB.2018 19:22:31

### GSM, Left Band Edge, AGC+3

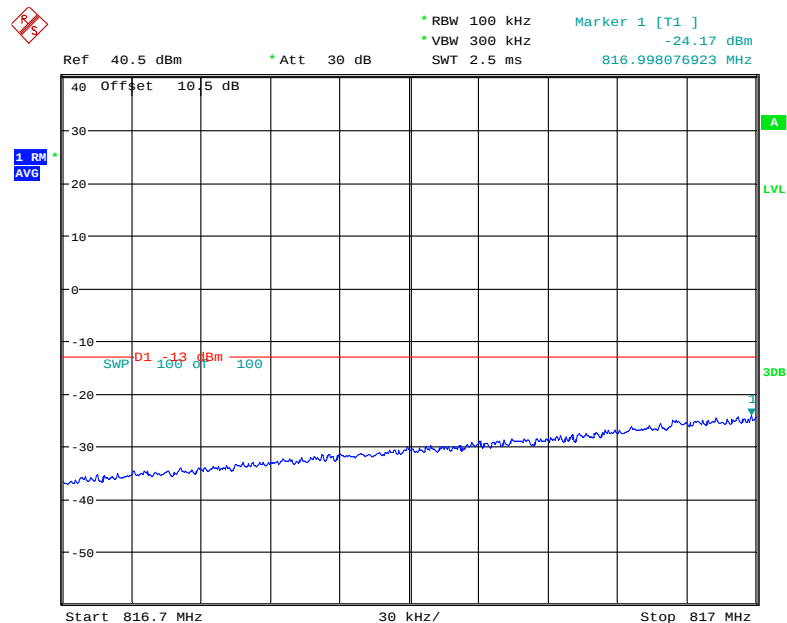


Date: 28.FEB.2018 19:23:00

### GSM, Right Band Edge, AGC

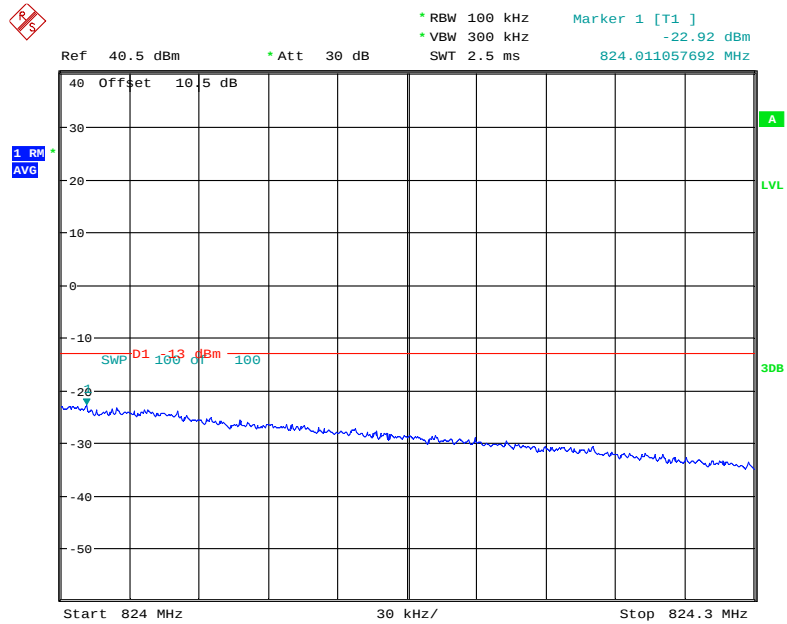

Date: 28.FEB.2018 19:24:29

### GSM, Right Band Edge, AGC+3

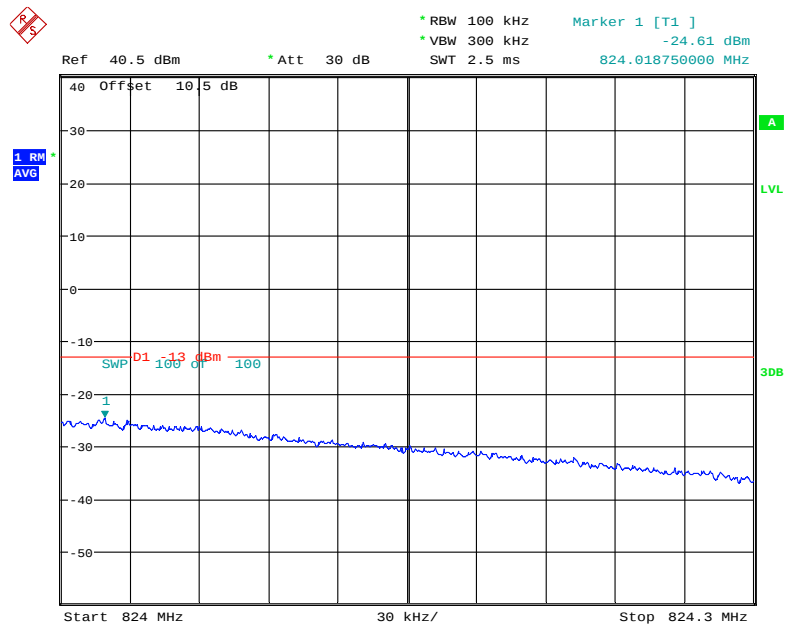

Date: 28.FEB.2018 19:23:57

**FCC §90.219, KDB 935210 D05 – OUT-OF-BAND REJECTION****Applicable Standard**

KDB 935210 D05 section 3.3

**Test Procedure**


Test Method: KDB 935210 D05 Indus Booster Basic Meas v01r02 section 3.3

- a) Connect a signal generator to the input of the EUT.
- b) Configure a swept CW signal with the following parameters:
  - 1) Frequency range =  $\pm 250\%$  of the passband, for each applicable CMRS band (see also KDB Publication 935210 D02 [R7] and KDB Publication 634817 [R5] about selection of frequencies for testing and for grant listings).
  - 2) Level = a sufficient level to affirm that the out-of-band rejection is  $> 20$  dB above the noise floor and will not engage the AGC during the entire sweep.
  - 3) Dwell time = approximately 10 ms.
  - 4) Number of points =  $\text{SPAN}/(\text{RBW}/2)$ .
- c) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- d) Set the span of the spectrum analyzer to the same as the frequency range of the signal generator.
- e) Set the resolution bandwidth (RBW) of the spectrum analyzer to be 1 % to 5 % of the EUT passband, and the video bandwidth (VBW) shall be set to  $\geq 3 \times \text{RBW}$ .
- f) Set the detector to Peak Max-Hold and wait for the spectrum analyzer's spectral display to fill.
- g) Place a marker to the peak of the frequency response and record this frequency as  $f_0$ .
- h) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the  $-20$  dB down amplitude, to determine the 20 dB bandwidth.
- i) Capture the frequency response of the EUT.
- j) Repeat for all frequency bands applicable for use by the EUT.

**Test Data****Environmental Conditions**

|                    |           |
|--------------------|-----------|
| Temperature:       | 26 °C     |
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.5 kPa |

*The testing was performed by Tracy Hu on 2018-02-28.**Test Mode: Transmitting, please refer to the following plots.*

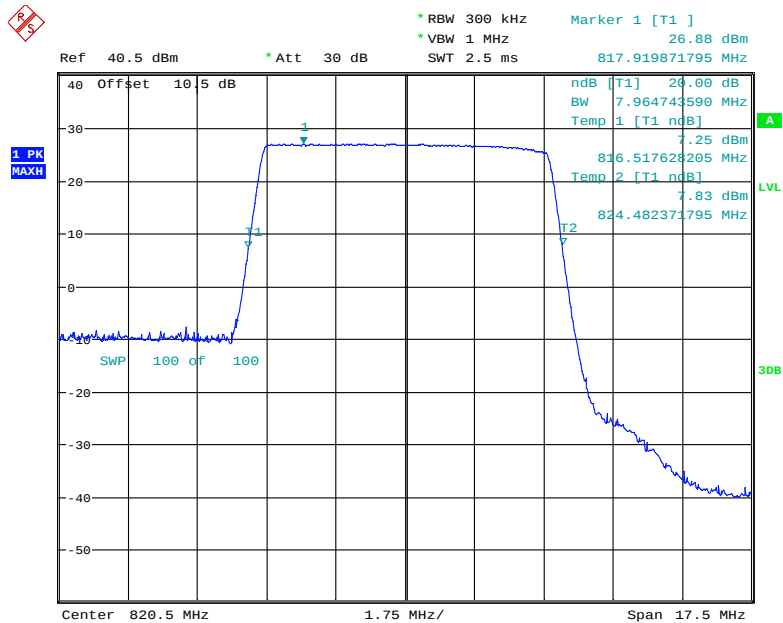

Date: 28.FEB.2018 19:51:18

\*\*\*\*\* END OF REPORT \*\*\*\*\*