



Report No.: SZEM200500399602

Page: 1 of 174

FCC ID: PX8RXB37

FCC ID: PX8RXA37

TEST REPORT

Application No.: SZEM2005003996CR (GZEM2001010291CR)
Applicant: Comba Telecom Ltd.
Address of Applicant: 611 East Wing, No. 8 Science Park West Avenue, Hong Kong Science Park, Tai Po, Hong Kong
Manufacturer: Comba Telecom Systems (China) Ltd.
Address of Manufacturer: No.10 Shenzhou Road, Guangzhou Science City, Guangzhou 510663, Guangdong, P.R. China
Factory: Comba Telecom Technology (Guangzhou) Ltd.
Address of Factory: No. 6 Jinbi Road, Economics and Technology Development District, Guangzhou, Guangdong, P.R.China
Equipment Under Test (EUT):
EUT Name: 700MHz/800MHz Public Safety Bi-directional Amplifier
FCC ID: PX8RXB37/ PX8RXA37
Model No.: RXB3748, RXB3792, RXA3748, RXA3792
☐ Please refer to section 2 of this report for further details.
Standard(s): FCC CRF 47 Part 2, FCC Part 90.219; FCC Part 90-R.
KDB 935210 D02 General requirement for all Signal Boosters V04r02
KDB 935210 D05 Indus Booster Basic Meas V01r04
Date of Receipt: 2020-01-17
Date of Test: 2020-04-01 to 2020-04-16
Date of Issue: 2020-05-27

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EU Declaration of Conformity and compliance with all relevant EU Directives.

Keny Xu

Keny Xu
EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing (inspection report & certificate), please contact us at telephone: (86-755) 8387 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch, EMC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 1 (86-755) 26012053 1 (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10楼一号厂房 邮编: 518057 1 (86-755) 26012053 1 (86-755) 26710594 sgs.china@sgs.com



Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2020-05-27		Original

Authorized for issue by:			
Tested By			2020-04-01 to 2020-04-16
	Lily_Kuang /Project Engineer		Date
Checked By			2020-05-27
	Eric Fu /Reviewer		Date



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 1 (86-755) 26012053 1 (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 1 (86-755) 26012053 1 (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Test Item	Test Requirement	Test Method	Result
Output Power	90.541/90.543	FCC part 2.1037	PASS
Conducted Spurious Emissions	90.543	KDB935210 D05v01r04	PASS
Input-versus-output signal comparison Emission mask (Emission mask)	FCC part90.210	FCC part 2.1051	PASS
Band Edge& Intermodulation	90.543	KDB935210 D05v01r04	PASS
Noise figure	FCC part90.219(e)	KDB935210 D05v01r04	PASS
Radiated Spurious Emissions	FCC part90.219e(1)	KDB935210 D05v01r04	PASS
Occupied Bandwidth	FCC part 2.1049	KDB935210 D05v01r04	PASS
Frequency Stability	FCC part90.539	FCC part 2.1055	PASS

■ **Model No:** RXA3748, RXA3792, RXB3748, RXB3792

According to the confirmation from the applicant, all above model numbers with identical hardware except the power supply unit(PSU) and supported operation frequency bands, the different frequency was disabled by software when factory production. The detailed power supply unit and frequency band information as below:

DC -48V for RXA3748,RXB3748, AC 100-240VAC for RXA3792,RXB3792

1.For FCC PART 90 Class A model number:

Model number: RXA3748, RXA3792 (FCC ID: PX8RXA37), Operation frequency band:

Band 700MHz:

Downlink: 769MHz to 775MHz, Uplink: 799MHz to 805MHz

Band 800MHz:

Downlink: 851MHz to 862MHz, Uplink: 806MHz to 817MHz

2.For FCC PART 90 Class B model number:

Model number: RXB3748, RXB3792 (FCC ID: PX8RXB37), Operation frequency band:

Band 700MHz:

Downlink: 758MHz to 768MHz,Uplink: 788MHz to 798MHz; (LTE Broadband)

Downlink: 769MHz to 775MHz,Uplink: 799MHz to 805MHz;(Narrow band)

Band 800MHz:

Downlink: 851MHz to 862MHz,Uplink: 806MHz to 817MHz

According to the above differences , the RXB3748 & RXA3748 were performed full tests and the model RXB3792 & RXA3792 were tested the Radiated Emission in this report.





3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	5
4.1 General Description of E.U.T.	5
4.2 Details of E.U.T.	5
4.3 Product Description	6
4.4 Standards Applicable for Testing	6
4.5 Test Location	7
4.6 Other Information Requested by the Customer	7
4.7 Test Facility	8
5 Equipment Used during Test	9
6 Test Results	10
6.1 E.U.T. test conditions	10
6.2 Test Procedure & Measurement Data	12
6.2.1 AGC Threshold level	13
6.2.2 Conducted Output Power and Amplifier Gain	17
6.2.3 Conducted Spurious Emissions	22
6.2.4 Emission Mask	61
6.2.5 Intermodulation & Band edge	75
6.2.6 Noise Figure	88
6.2.7 Radiated Spurious Emissions	91
6.2.8 Occupied Bandwidth	105
6.2.9 Out of Band Rejection	159
6.2.10 Frequency Stability	168



4 General Information

4.1 General Description of E.U.T.

DUT power supply: DC -40V~-58V
Test voltage: DC -48V
Operating Temperature: -33 °C to +60°C
Operating Humidity: ≤ 95%

4.2 Details of E.U.T.

Modulation type
for support input signal: P25 Phase I: C4FM ;
P25 Phase II: H-DQPSK
Analog FM

Emission Designator:
: F1D, F1E, F3E,

Operation frequency for class B **Band 700MHz:**
Model number RXB3748, RXB3792: Downlink: 758MHz to 768MHz
Uplink: 788MHz to 798MHz;
Downlink: 769MHz to 775MHz
Uplink: 799MHz to 805MHz
Band 800MHz:
Downlink: 851MHz to 862MHz, Uplink: 806MHz to 817MHz

Operation frequency for class A **Band 700MHz:**
Model number RXA3748, RXA3792: Downlink: 769MHz to 775MHz
Uplink: 799MHz to 805MHz
Band 800MHz:
Downlink: 851MHz to 862MHz, Uplink: 806MHz to 817MHz

Modulation type: LTE in 758Mhz to 768MHz and 788MHz to 798MHz;
C4FM/HDQPSK/FM in 769MHz to 775MHz and 799MHz to 805MHz;
C4FM/HDQPSK/FM in 851MHz to 862MHz and 806MHz to 817MHz;

Channel spacing: 12.5kHz for C4FM;
12.5kHz for HDQPSK;
12.5kHz for FM; 25kHz for FM
10MHz for LTE

Nominal Power Output: 37dBm for downlink
30dBm for uplink

Nominal System Gain: 100dB

EUT function description:

700MHz /800Mhz Public Safety signal booster

Remark:

This report is only for 700Mhz Band.

4.3 Product Description

The EUT is a Class A and B public Safety Bi-Directional Amplifier which is a wireless enhanced solution where high-quality voice or high-speed data service is not available between a mobile and a base station. BDA is ideal for the first phase of the network rollout and for any subsequent phase where cost, coverage, and quality need to be optimized.

BDA offers a modular, robust design that is easy to install, manage an upgrade. It supports three individually adjustable sub-bands for flexibility and high RF performance, supports multi-band operation.

Remote configuration and surveillance is possible through Comba's remote and monitoring system via PC or wireless modem to the OMT/OMC.

4.4 Standards Applicable for Testing

The standard used was FCC part 2 & FCC part 90

According the definition of KDB935210, the product belongs to the industrial Signal Booster.

Definition of Industrial signal booster(Part 20)
<p>KDB 935210 D02 Signal Booster Certification v04</p> <p>An Industrial Signal Booster (Part 20) is any signal booster that is not a Consumer Signal Booster (Part 20) [i.e., CMRS parts 22, 24, 27, 90 (ESMR)]. 10 [Section 20.3]</p> <p>Industrial Signal Boosters are designed to serve multiple users simultaneously. [Order, ¶ 16 and fn 31]</p> <p>Industrial Signal Boosters may be fixed-station equipment or mobile-station equipment, and are designed for installation by licensees or qualified installers. Unlike Consumer Signal Boosters, industrial signal boosters used in the CMRS bands are not distinguished as wideband or provider-specific. Part 90 Signal Boosters, other than Consumer Signal Boosters, are a type of Industrial Signal Booster—see also other specific part 90 terms and definitions below. [Order, ¶ 15]</p>
<p>Remark :</p> <p>10 Industrial Signal Boosters include large, high powered devices intended for professional or enterprise use. These devices tend to have more expansive functionality than Consumer Signal Boosters. For example, unlike Consumer Signal Boosters, many Industrial Signal Boosters incorporate remote monitoring capability to allow the operator to use a graphical user interface to control the device's functions, including remote power control, turn-on, and turn-off. The output power and gain for Industrial Signal Boosters are typically multiple times the power and gain of Consumer Signal Boosters. These devices are designed to serve multiple users simultaneously and cover larger areas such as stadiums, shopping malls, office buildings, tunnels, and campuses. An Industrial Signal Booster installation may support a single wireless provider or multiple wireless providers. In addition, such an installation may utilize a greater number of antennas, amplifiers, and other components, compared to Consumer Signal Boosters. [Order, ¶ 16]</p>

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

No tests were sub-contracted.

4.6 Other Information Requested by the Customer

None.

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

• **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

5 Equipment Used during Test

RF conducted test						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	DC Power Supply	ZhaoXin	PS-3005D	SEM011-05	2019-09-27	2020-09-26
2	Spectrum Analyzer (20Hz-43GHz)	Rohde & Schwarz	FSU43	SEM004-08	2020-04-13	2021-04-12
3	Signal Generator (9kHz-40GHz)	KEYSIGHT	N5173B	SEM006-05	2019-09-27	2020-09-26
4	Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.6	N/A	N/A	N/A
5	Coaxial Cable	SGS	N/A	SEM031-01	2019-07-13	2020-07-12
6	Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2017-08-05	2020-08-04
2	MXE EMI Receiver (20Hz-8.4GHz)	Agilent Technologies	N9038A	SEM004-05	2019-09-27	2020-09-26
3	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2017-06-27	2020-06-26
4	Horn Antenna 1GHz-18GHz	R & S	HF906	EMC0518	2018-09-02	2021-09-01
5	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2020-04-02	2021-04-01
6	Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
7	Coaxial Cable	SGS	N/A	SEM025-01	2019-07-13	2020-07-12

General used equipment						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	Humidity/Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2019-09-29	2020-09-28
2	Humidity/Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2019-09-29	2020-09-28
3	Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2020-04-08	2021-04-07

6 Test Results

6.1 E.U.T. test conditions

Temperature: 22°C ~26°C
Humidity: 37%~56% RH
Atmospheric Pressure: 990~1005mbar
Test Requirement:

The RF output power of the EUT was measured at the antenna port, by adjusting the input power of signal generator to drive the EUT to get to maximum output power point and keep the EUT at maximum gain setting for all tests. The device should be tested on downlink.

For detail test Modulation and Frequency, please refer to 6.2.

Remark:

Synonyms and related terms: in-building radiation system, coverage enhancer, distributed antenna system, fiber-optic distribution system, converter, donor antenna

Typical in-building or distributed antenna systems can consist of five different components (enclosures), not counting antennas:

1) host unit

- a) transmits uplink to base station via antenna thru coax, **passive interface unit**, or **active interface unit** (amplifier)
- b) sends base-station downlink via fiber-optic or coax to **remote**
- c) receives handset uplink via fiber-optic or coax from **remote**
- d) optional connection to **expansion unit** via fiber-optic
- e) separate FCC ID from **remote**, unless electrically identical
- f) **non-transmitting host unit**
- i) connects directly to a base station via coax cable but does not connect to antenna or amplifier
- ii) Part 15 digital device subject to Verification, no FCC ID

2) remote unit

- a) receives base-station downlink via fiber-optic or coax from **host**, transmits via antenna to handsets
- b) returns handset uplink via fiber-optic or coax to **host**
- c) separate FCC ID from **remote**, unless electrically identical

3) expansion unit

- a) fiber-optic or coax from **host**
- b) fiber-optic or coax fan-out to **remote(s)**
- c) Part 15 digital device subject to Verification, no FCC ID

4) passive interface unit

- a) contains attenuators, splitters, combiners
- b) coax cable connection between **host** and base-station
- c) passive device, no FCC ID

5) active interface unit

- a) amplifies uplink signal from **host unit** for transmit by donor antenna
- b) attenuates downlink from donor antenna
- c) coax cable connection between **host** and **active interface unit**
- d) usually has separate FCC ID; in some cases could be combined/included with **host** as one enclosure

General Definitions for Certification Purposes:

The following three general definitions follow from those stated in the Part 22, 24, and 90 rule sections as listed above. Two of the definitions replace previous EAB internal definitions given for booster, repeater and extender. The general term "extender" is the same as booster, but booster should be used rather than extender. The general term "translator" is the same as repeater, but repeater should be used rather than translator.

External radio frequency power amplifier (ERFPA) - any device which, (1) when used in conjunction with a radio transmitter signal source, is capable of amplification of that signal, and (2) is not an integral part of a radio transmitter as manufactured. The EAS equipment class AMP is used only for an ERFPA device inserted between a transmitter (TNB/PCB) and an antenna (has only one antenna port)

Booster is a device that automatically reradiates signals from base transmitters without channel translation, for the purpose of improving the reliability of existing service by increasing the signal strength in dead spots. An "in-building radiation system" is a signal booster. These devices are not intended to extend the size of coverage from the originating base station. A booster can be either single or multiple channels.

Repeater is a device that retransmits the signals of other stations. Repeaters are different from boosters in that they can include frequency translation and can extend coverage beyond the design of the original base station. A repeater is typically single channel but can also be multiple channels.

ERFPA (AMP) and boosters/repeaters (TNB/PCB) can generally be authorized for all rule parts except 15 and 18.

Tests should be done with each typical signal. e.g., for F3E emissions use 2500 Hz with 2.5 or 5 kHz deviation. Use of CW signal for some tests is acceptable in lieu of actual emission, in some cases when CW signal gives worst case.

So the Equipment belongs to the booster.

6.2 Test Procedure & Measurement Data

Downlink: 758MHz to 768MHz

Modulation	Middle frequency(MHz)
LTE	763

Uplink: 788MHz to 798MHz

Modulation	Middle frequency(MHz)
LTE	793

Downlink: 769MHz to 775MHz

Modulation	Lowest frequency	Middle frequency	Highest frequency
C4FM(12.5k)	769.00625	772.00625	774.99375
HDQPSK(12.5k)	769.00625	772.00625	774.99375
FM(12.5k)	769.00625	772.00625	774.99375
FM(25k)	769.0125	772.0125	774.9875


Uplink: 799MHz to 805MHz

Modulation	Lowest frequency	Middle frequency	Highest frequency
C4FM(12.5k)	799.00625	802.00625	804.99375
HDQPSK(12.5k)	799.00625	802.00625	804.99375
FM(12.5k)	799.00625	802.00625	804.99375
FM(25k)	799.0125	802.0125	804.9875



6.2.1 AGC Threshold level

Test Method: KDB935210 D05
 Test Requirement: Not specified
 EUT Operation:
 Status: Drive the EUT to maximum output power. Pretest was performed in both channels, only kept the final measurement data of worse case.
 Conditions: Normal conditions
 Application: Cellular Band RF output ports
 Test Configuration:

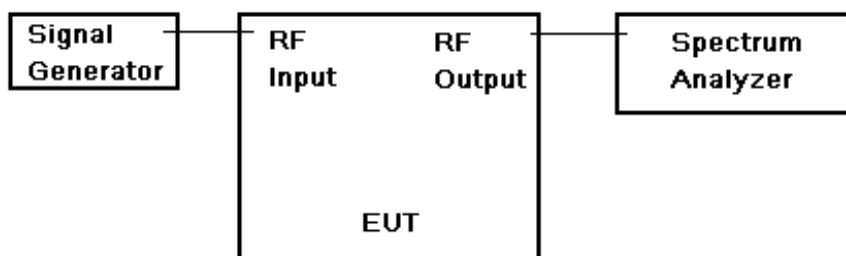

AGC threshold test configuration

Test Procedure:

- a) Connect a signal generator to the input of the EUT.
- b) Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.
- c) The signal generator should initially be configured to produce either of the required test signals (i.e., broadband or narrowband).
- d) Set the signal generator frequency to the center frequency of the EUT operating band.
- e) While monitoring the output power of the EUT, measured using the methods of 3.5.3 or 3.5.4, increase the input level until a 1 dB increase in the input signal power no longer causes a 1 dB increase in the output signal power.
- f) Record this level as the AGC threshold level.
- g) Repeat the procedure with the remaining test signal.

6.2.1.1 Measurement Record:

Class A Model number:

Downlink: 769MHz ~ 775MHz

Test items	Modulation	Carrier frequency(MHz)	Level(dBm)
AGC Threshold	C4FM	769.00625	-62.5
AGC Threshold	C4FM	772.00625	-62.8
AGC Threshold	C4FM	774.99735	-62.5
AGC Threshold	HDQPSK	769.00625	-62.3
AGC Threshold	HDQPSK	772.00625	-62.8
AGC Threshold	HDQPSK	774.99735	-62.6
AGC Threshold	FM(12.5k)	769.00625	-62.3
AGC Threshold	FM(12.5k)	772.00625	-62.8
AGC Threshold	FM(12.5k)	774.99375	-62.6
AGC Threshold	FM(25k)	769.0125	-62.3
AGC Threshold	FM(25k)	772.0125	-62.8
AGC Threshold	FM(25k)	774.9875	-62.6

Uplink: 799MHz ~ 805MHz

Test items	Modulation	Carrier frequency(MHz)	Level(dBm)
AGC Threshold	C4FM	799.00625	-69.7
AGC Threshold	C4FM	802.00625	-69.6
AGC Threshold	C4FM	804.99735	-69.9
AGC Threshold	HDQPSK	799.00625	-69.8
AGC Threshold	HDQPSK	802.00625	-69.8
AGC Threshold	HDQPSK	804.99735	-69.9
AGC Threshold	FM(12.5k)	799.00625	-69.7
AGC Threshold	FM(12.5k)	802.00625	-69.4
AGC Threshold	FM(12.5k)	804.99735	-69.9
AGC Threshold	FM(25k)	799.0125	-69.7
AGC Threshold	FM(25k)	802.0125	-69.5
AGC Threshold	FM(25k)	804.9875	-69.9



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing (inspection) report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 1 (86-755) 26012053 1 (86-755) 26710594 www.sgs.com
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 1 (86-755) 26012053 1 (86-755) 26710594 sgs.china@sgs.com

Class B model number:

Downlink: 758MHz ~ 768MHz

Test items	Modulation	Carrier frequency(MHz)	Level(dBm)
AGC Threshold	LTE	763	-63.5

Downlink: 788MHz ~ 798MHz

Test items	Modulation	Carrier frequency(MHz)	Level(dBm)
AGC Threshold	LTE	793	-63.2

Downlink: 769MHz ~ 775MHz

Test items	Modulation	Carrier frequency(MHz)	Level(dBm)
AGC Threshold	C4FM	769.00625	-63.3
AGC Threshold	C4FM	772.00625	-63.5
AGC Threshold	C4FM	774.99735	-63.2
AGC Threshold	HDQPSK	769.00625	-63.3
AGC Threshold	HDQPSK	772.00625	-63.1
AGC Threshold	HDQPSK	774.99735	-63.2
AGC Threshold	FM(12.5k)	769.00625	-63.3
AGC Threshold	FM(12.5k)	772.00625	-63.2
AGC Threshold	FM(12.5k)	774.99375	-63.4
AGC Threshold	FM(25k)	769.0125	-63.3
AGC Threshold	FM(25k)	772.0125	-63.4
AGC Threshold	FM(25k)	774.9875	-63.3

Uplink: 799MHz ~ 805MHz

Test items	Modulation	Carrier frequency(MHz)	Level(dBm)
AGC Threshold	C4FM	799.00625	-70.2
AGC Threshold	C4FM	802.00625	-70.3
AGC Threshold	C4FM	804.99735	-70.4
AGC Threshold	HDQPSK	799.00625	-70.1
AGC Threshold	HDQPSK	802.00625	-70.2
AGC Threshold	HDQPSK	804.99735	-70.3
AGC Threshold	FM(12.5k)	799.00625	-70.3
AGC Threshold	FM(12.5k)	802.00625	-70.5
AGC Threshold	FM(12.5k)	804.99735	-69.9
AGC Threshold	FM(25k)	799.0125	-70.5
AGC Threshold	FM(25k)	802.0125	-70.1
AGC Threshold	FM(25k)	804.9875	-70.3



6.2.2 Conducted Output Power and Amplifier Gain

Test Requirement: FCC part 90.541(b)/ 90.542(a)

FCC part 90.541(b):

The transmitting power and antenna height of base, mobile, portable and control stations operating in the 769-775 MHz and 799-805 MHz frequency bands must not exceed the maximum limits in this section. Power limits are listed in effective radiated power (ERP).

(b) The transmitting power of a control station must not exceed 200 watts ERP 90.542(a):

a) The following power limits apply to the 758-768/788-798 MHz band:

(1) Fixed and base stations transmitting a signal in the 758-768 MHz band with an emission bandwidth of 1 MHz or less

must not exceed an ERP of 1000 watts and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m

HAAT are permitted if power levels are reduced below 1000 watts ERP in accordance with Table 1 of 90.542 this section

EUT Operation:

Status: Drive the EUT to maximum output power.

Conditions: Normal conditions

Application: Cellular Band RF output ports

Test Configuration:

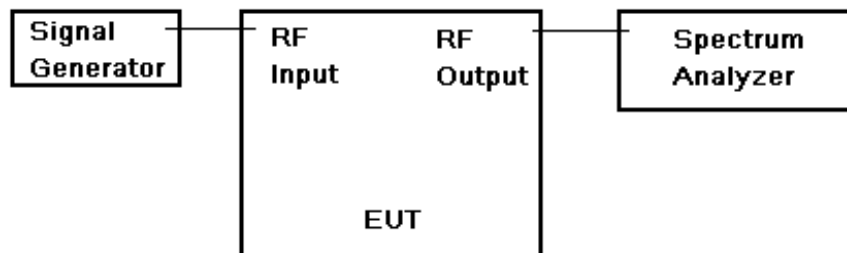


Fig.1 RF Output Power test configuration

Test Procedure: RF output power test procedure:

1.
 - a) Connect the equipment as illustrated, when the output power is over the max value of the Spectrum Analyzer, add the attenuator to avoid destroying the facility.
 - b) Set the center frequency of the spectrum analyzer to the assigned transmitter frequency, key the transmitter, and set the level of the carrier to the full scale reference line.
 - c) do not apply any tone to modulate the EUT.
 - d1) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth >> the carrier bandwidth,
 - 2) Video Bandwidth refer to standard requirement.
 - d2) Use spectrum analyzer channel power measurement function;
 - e) Record the frequencies and levels of carrier power;
 - f) Calculate the signal link way loss and final power value.
- Or 2.
 - a) Connect the equipment as illustrated;
 - b) Read the value from the power meter;
 - c) Calculate the signal link way loss and final power value.

RF gain test procedure:

The EUT was connected to a spectrum analyzer through a 40dB power attenuator. All cable and attenuator losses were input into the spectrum analyzer

As a reference level offset to ensure accurate readings were obtained.

A CW signal was utilized, set to the frequency of the peak amplitude measured in the Out of Band Rejection test.

The RF input signal level was set to 0.2dB below the AGC Threshold.

Gain(dB) = Output Power(dBm) - Input Power(dBm)

Remark: Output power –

Power on Form 731 should be clearly understood as either composite of multichannels or per carrier. If power is composite include in comments field: "Power output listed is composite for multi-channel operation."

Check that the input drive level is at maximum input rating and maximum gain settings for all tests. Check both uplink and downlink input levels. See manual or brochures/technical description for maximum rating. May need to check FCC identifier of transmitter used for tests.

Confirm device can not operate in saturation. Are there means to control maximum power and to assure linear operation (use in system configuration may be necessary)? How is saturation or over-modulation prevented for pulsed signal inputs?

Measurement Record:

FCC regulation mandate that the ERP of type B signal boosters should not exceed 5W, this booster has a maximum programmable composite output power of 5W(37dBm) for Downlink, 1W(30dBm) for uplink. Therefore, the gain of the antenna should be 0dBi or less. Below test was just performed the conducted method, and caculated the max ERP with antenna gain is 0dBi.

Class A Model number:

700M band Downlink: 769MHz ~ 775MHz

Modulation	Carrier frequency(MHz)	Maximum Output power(dBm)	Antenna Gain(dBi)	Limit: ERP (i.e. 200W) dBm	Result
C4FM	769.00625	36.0	0	53	Pass
C4FM	772.00625	36.3	0	53	Pass
C4FM	774.99735	36.3	0	53	Pass
HDQPSK	769.00625	36.5	0	53	Pass
HDQPSK	772.00625	36.5	0	53	Pass
HDQPSK	774.99735	36.4	0	53	Pass
FM(12.5k)	769.00625	36.4	0	53	Pass
FM(12.5k)	772.00625	36.4	0	53	Pass
FM(12.5k)	774.99375	36.3	0	53	Pass
FM(25k)	769.0125	35.8	0	53	Pass
FM(25k)	772.0125	36.5	0	53	Pass
FM(25k)	774.9875	36.4	0	53	Pass

700M band Uplink: 799MHz ~ 805MHz

Modulation	Carrier frequency(MHz)	Maximum Output power(dBm)	Antenna Gain(dBi)	Limit: ERP (i.e. 200W) dBm	Result
C4FM	799.00625	30.6	0	53	Pass
C4FM	802.00625	30.6	0	53	Pass
C4FM	804.99735	30.3	0	53	Pass
HDQPSK	799.00625	30.0	0	53	Pass
HDQPSK	802.00625	30.3	0	53	Pass
HDQPSK	804.99735	29.8	0	53	Pass
FM(12.5k)	799.00625	30.8	0	53	Pass
FM(12.5k)	802.00625	30.7	0	53	Pass
FM(12.5k)	804.99735	30.3	0	53	Pass
FM(25k)	799.0125	30.6	0	53	Pass
FM(25k)	802.0125	30.5	0	53	Pass
FM(25k)	804.9875	30.4	0	53	Pass



Class B model number:

700M band Downlink: 758MHz ~ 768MHz

Modulation	Carrier frequency(MHz)	Maximum Output power(dBm)	Antenna Gain(dBi)	Limit: ERP (i.e. 1000W) dBm	Result
LTE 10MHz	763	36.2	0	60	Pass

700M band Uplink: 788MHz ~ 798MHz

Modulation	Carrier frequency(MHz)	Maximum Output power(dBm)	Antenna Gain(dBi)	Limit: ERP (i.e. 1000W) dBm	Result
LTE 10MHz	793	30.2	0	60	Pass

Downlink: 769MHz ~ 775MHz

Modulation	Carrier frequency(MHz)	Maximum Output power(dBm)	Antenna Gain(dBi)	Limit: ERP (i.e. 200W) dBm	Result
C4FM	769.00625	36.4	0	53	Pass
C4FM	772.00625	36.2	0	53	Pass
C4FM	774.99735	36.4	0	53	Pass
HDQPSK	769.00625	36.4	0	53	Pass
HDQPSK	772.00625	36.3	0	53	Pass
HDQPSK	774.99735	36.4	0	53	Pass
FM(12.5k)	769.00625	36.4	0	53	Pass
FM(12.5k)	772.00625	36.3	0	53	Pass
FM(12.5k)	774.99375	36.2	0	53	Pass
FM(25k)	769.0125	36.2	0	53	Pass
FM(25k)	772.0125	36.4	0	53	Pass
FM(25k)	774.9875	36.2	0	53	Pass



700M band Uplink: 799MHz ~ 805MHz

Modulation	Carrier frequency(MHz)	Maximum Output power(dBm)	Antenna Gain(dBi)	Limit: ERP (i.e. 200W) dBm	Result
C4FM	799.00625	30.6	0	53	Pass
C4FM	802.00625	30.6	0	53	Pass
C4FM	804.99735	30.3	0	53	Pass
HDQPSK	799.00625	30.1	0	53	Pass
HDQPSK	802.00625	30.3	0	53	Pass
HDQPSK	804.99735	29.4	0	53	Pass
FM(12.5k)	799.00625	30.7	0	53	Pass
FM(12.5k)	802.00625	30.6	0	53	Pass
FM(12.5k)	804.99735	30.2	0	53	Pass
FM(25k)	799.0125	30.6	0	53	Pass
FM(25k)	802.0125	30.7	0	53	Pass
FM(25k)	804.9875	30.0	0	53	Pass



6.2.3 Conducted Spurious Emissions

- Test Requirement:** 90.543 (c)(e)(f)
- (c) Out-of-band emission limit. On any frequency outside of the frequency ranges covered by the ACP tables in this section, the power of any emission must be reduced below the mean output power (P) by at least $43 + 10\log(P)$ dB measured in a 100 kHz bandwidth for frequencies less than 1 GHz, and in a 1 MHz bandwidth for frequencies greater than 1 GHz.
- (e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:
- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10\log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
 - (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10\log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
 - (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10\log(P)$ dB.
 - (4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.
 - (5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.
 - (f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610MHz shall be limited to – 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and – 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.
- Test Method:** KDB 935210 D05 V01r04
- EUT Operation:**
- Status:** Drive the EUT to maximum output power.
- Conditions:** Normal conditions
- Application:** Cellular Band RF output ports
- Test Configuration:**


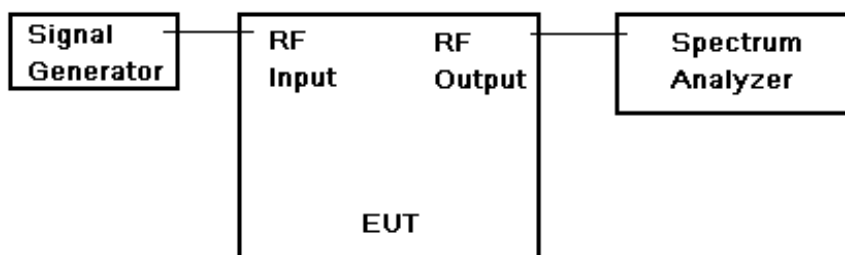


Fig.2. Conducted Spurious Emissions test configuration

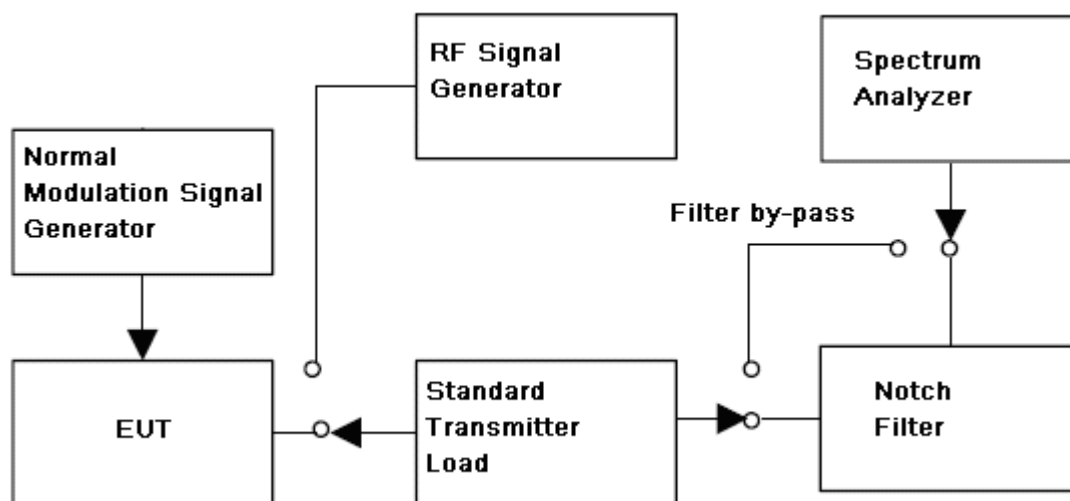

Test Procedure:

Conducted Emissions test procedure:

- Connect the equipment as illustrated, with the notch filter by-passed, when the output power is over the max value of the Spectrum Analyzer, add the attenuator to avoid destroying the facility.
- Set the center frequency of the spectrum analyzer to the assigned transmitter frequency, key the transmitter, and set the level of the carrier to the full scale reference line.
- do not apply any tone to modulate the EUT.
- Adjust the spectrum analyzer for the following settings:
 - Resolution Bandwidth,(base the standard, apply the different set),her is 100KHz for frequency band less than 1GHz, 1MHz for frequency over 1GHz;
 - Video Bandwidth refer to standard requirement.
- Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
 - the lowest radio frequency generated in the equipment, it can be 9KHz base the test method, here select 30MHz as lowest frequency start point;
 - the highest radion frequency shall higher than 10 times of carrier frequency;
- Record the frequencies and levels of spurious emissions from step e)

Remark:

The notch filter is used for avoid the EUT fundamental carrier output power making the spectrum overload and the harmonic spurious brought by it.

When the EUT fundamental carrier is not enough to make the status, the notch filter could be not used.

Measurement Record:

700Mhz Narrow band :

The limit for 700Mhz narrow band according to part **90.543 (c)**

Take the rated max power 37dBm(i.e. 5W) for DL and 1W for UL as worst case calculate the emission limit. $43+10\log(P)$, the dBc based on the fundamental emission is :

$$37\text{dBm}-(43+10\log(5))=37\text{dBm}-49.9\text{dB}=-13\text{dBm for DL}$$

$$30\text{dBm}-(43+10\log(1))=30\text{dBm}-43\text{dB}=-13\text{dBm for DL}$$

RBW=100Khz for below 1Ghz, RBW=1Mhz for above 1Ghz.

The limit for 700Mhz narrow band according to part **90.543 (f)**

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610MHz shall be limited to – **70 dBW/MHz(i.e. -40dBm)** equivalent isotropically radiated power (EIRP)

for wideband signals, and – **80 dBW(i.e. -50dBm)** EIRP for discrete emissions of less than 700 Hz bandwidth.

700Mhz broad band :

The limit for 700Mhz broad band:according to part 90.543 (e)(1)

On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations. Take the rated max power 37dBm(i.e. 5W) for DL and 1W for UL as worst case for limit calculation attanucation. $76 + 10 \log (P)$ dB in a 6.25 kHz band segment. the absolute limit is

$$37\text{dBm}-(76+10\log(5))\text{dB}=37\text{dBm}-82.9\text{dB}=-46\text{dBm in a 6.25 kHz band segment for DL.}$$

$$30\text{dBm}-(76+10\log(1))\text{dB}=30\text{dBm}-76\text{dB}=-46\text{dBm in a 6.25 kHz band segment for UL}$$

according to part 90.543 (e)(3)

On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

Take the rated max power 37dBm(i.e. 5W) for DL and 1W for UL as worst case for limit calculation attanucation. $43 + 10 \log (P)$ dB = 49.9dB in a 100kHz RBW. the absolute limit is

$$37\text{dBm}-(43+10\log(5))\text{dB}=-13\text{dBm for DL.}$$

$$30\text{dBm}-(43+10\log(1))\text{dB}=-13\text{dBm for UL}$$

The limit for 700Mhz narrow band according to part **90.543 (f)**

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610MHz shall be limited to – **70 dBW/MHz(i.e. -40dBm)** equivalent isotropically radiated power (EIRP)

for wideband signals, and – **80 dBW(i.e. -50dBm)** EIRP for discrete emissions of less than 700 Hz bandwidth.

Remark: this booster has a maximum programmable composite output power of 5W(37dBm) for Downlink, 1W(30dBm) for uplink. Therefore, the gain of the antenna should be of 0dBi or less. Below test was just performed the conducted method, and caculated the max ERP with antenna gain is 0dBi.

The data of the C4FM mode and HDQPSK/FM(12.5k) is almost the same with FM(25k)mode, so we only show the plot with the FM(25k) mode, others record the worst data in report.


Class A Model number:

1.700MHz band Downlink: 769MHz ~ 775MHz


For FM(25k)mode:

1)Lowest frequency


30MHz to 1GHz

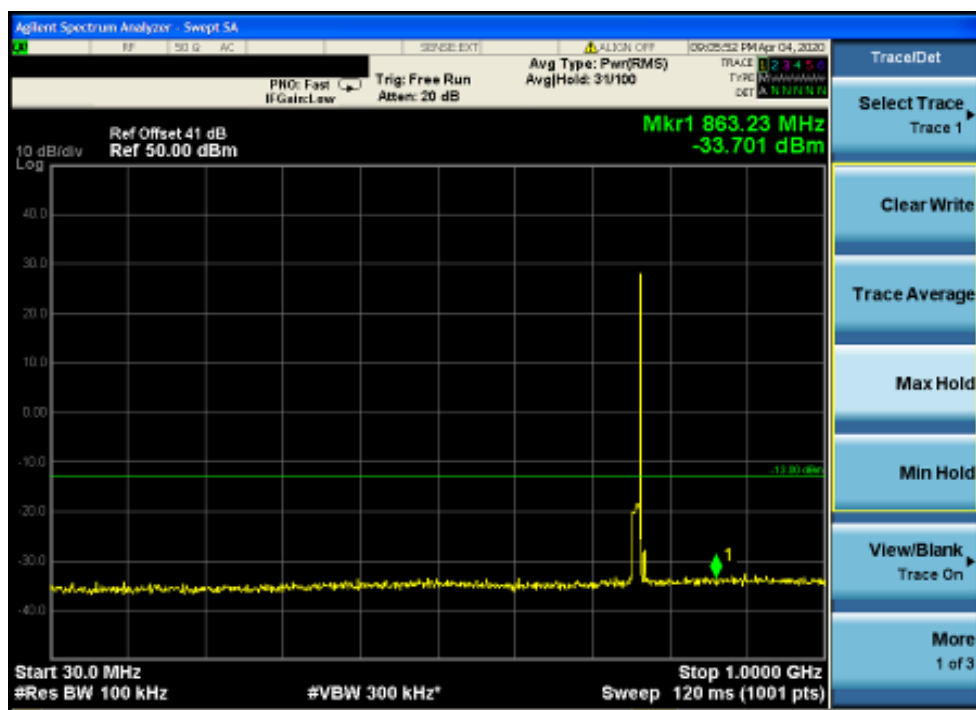

1GHz to 3.7GHz

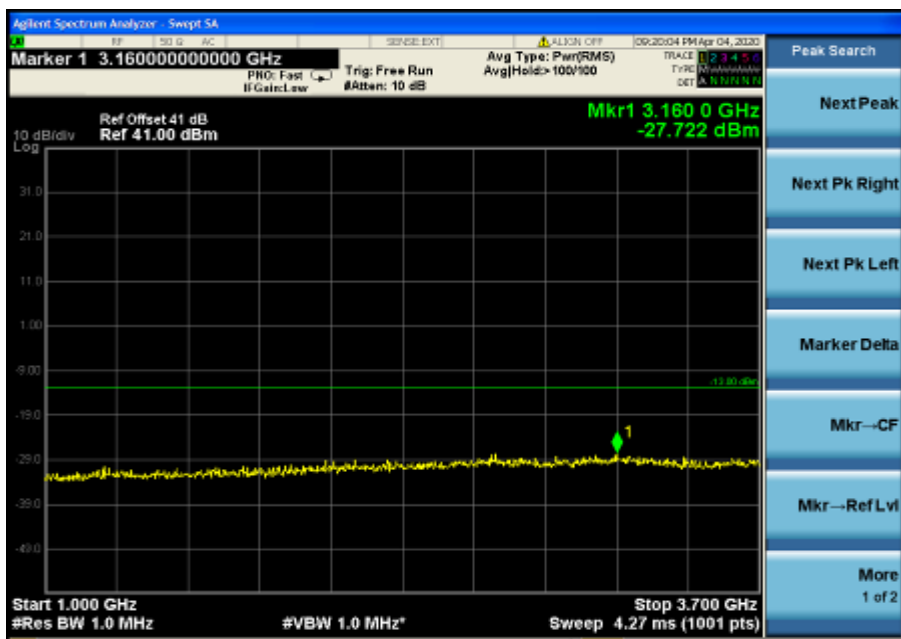


3.7GHz to 10GHz

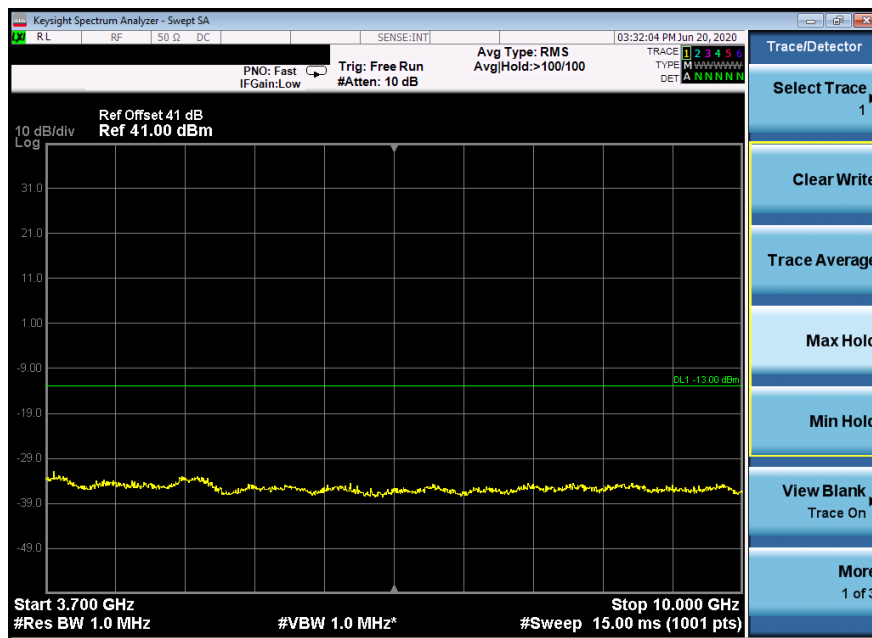


2) Middle frequency


30MHz to 1GHz

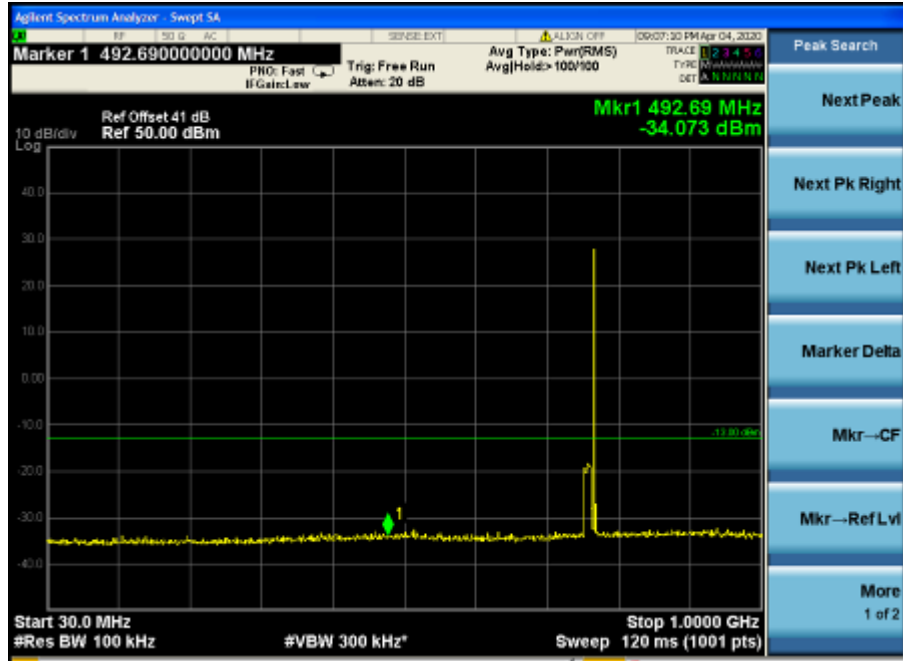

1GHz to 3.7GHz

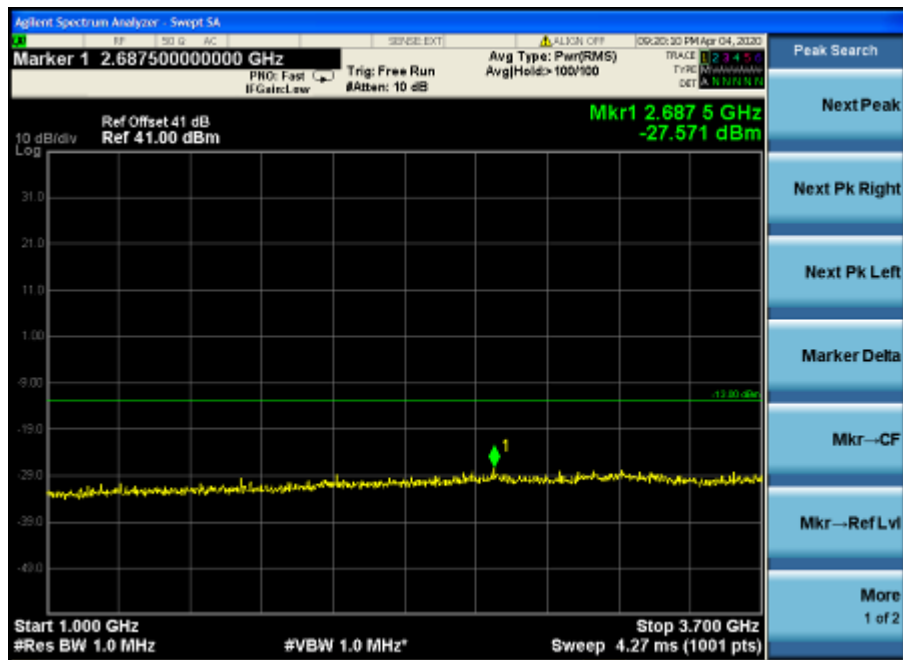

3.7G-10G :

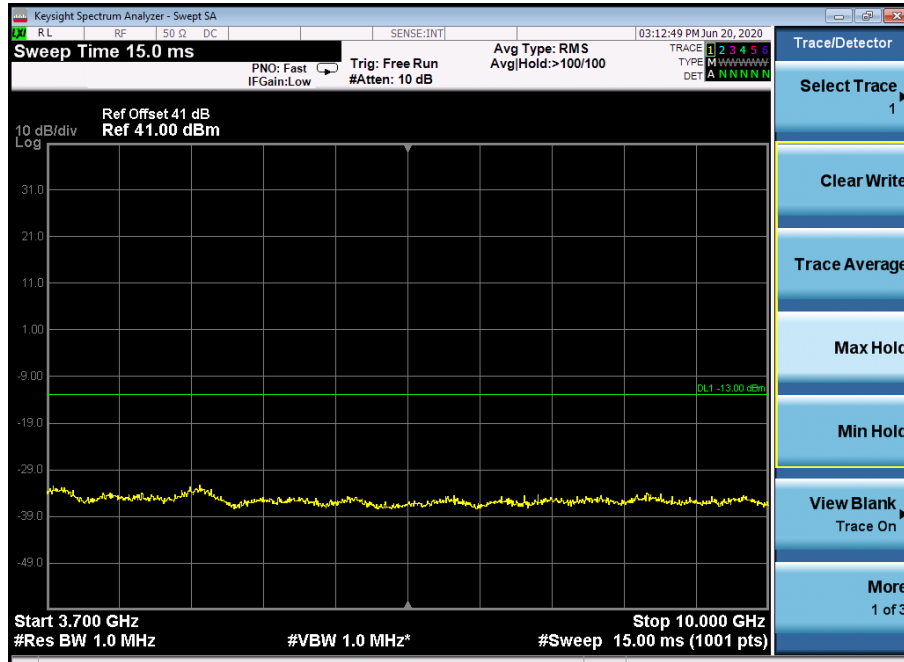


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing (inspection) report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sgs.com


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 1 (86-755) 26012053 1 (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 1 (86-755) 26012053 1 (86-755) 26710594 sgs.china@sgs.com

3)highest frequency


30MHz to 1GHz

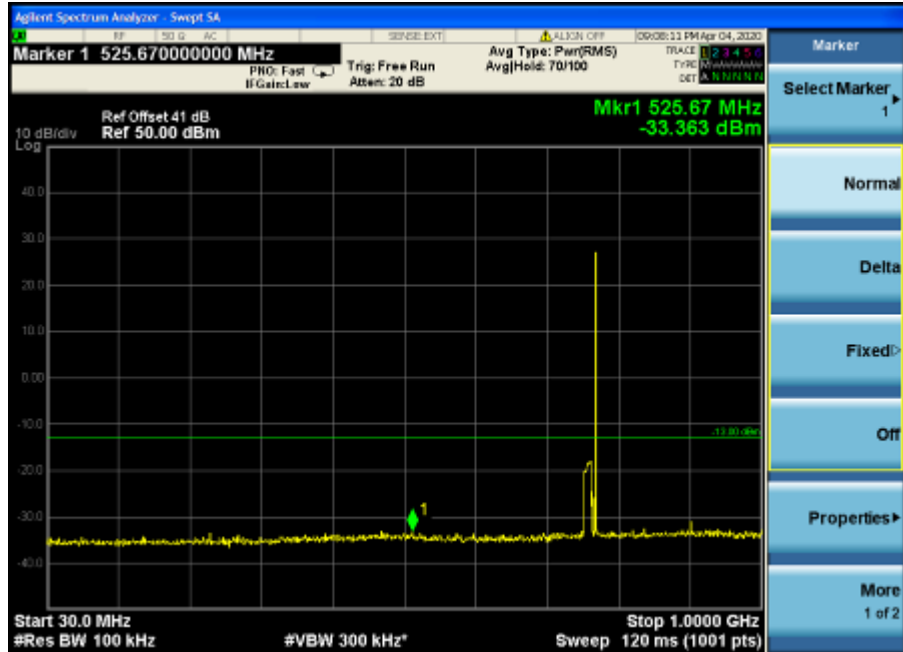

1GHz to 3.7GHz

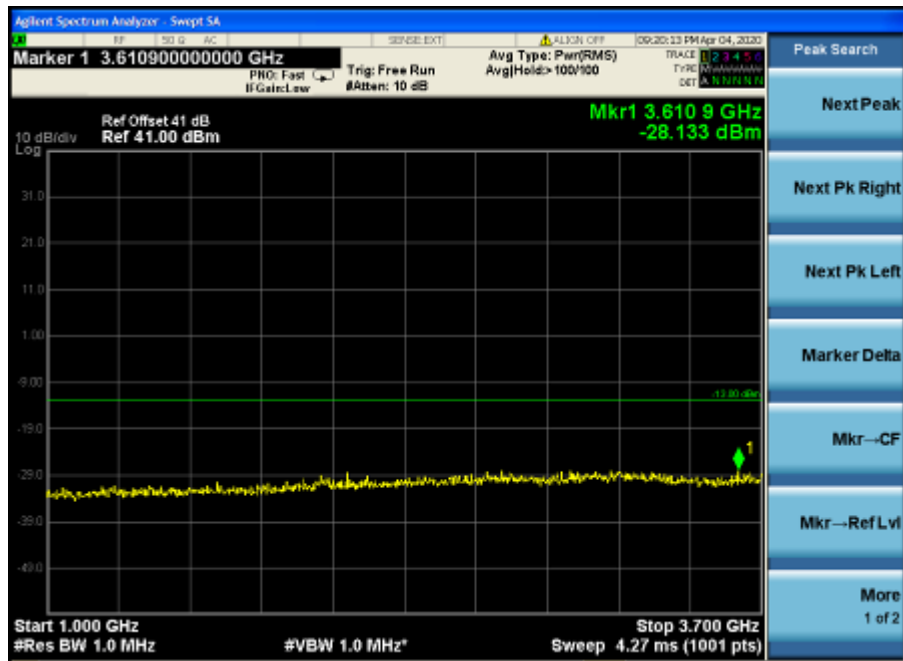

3.7G-10G :

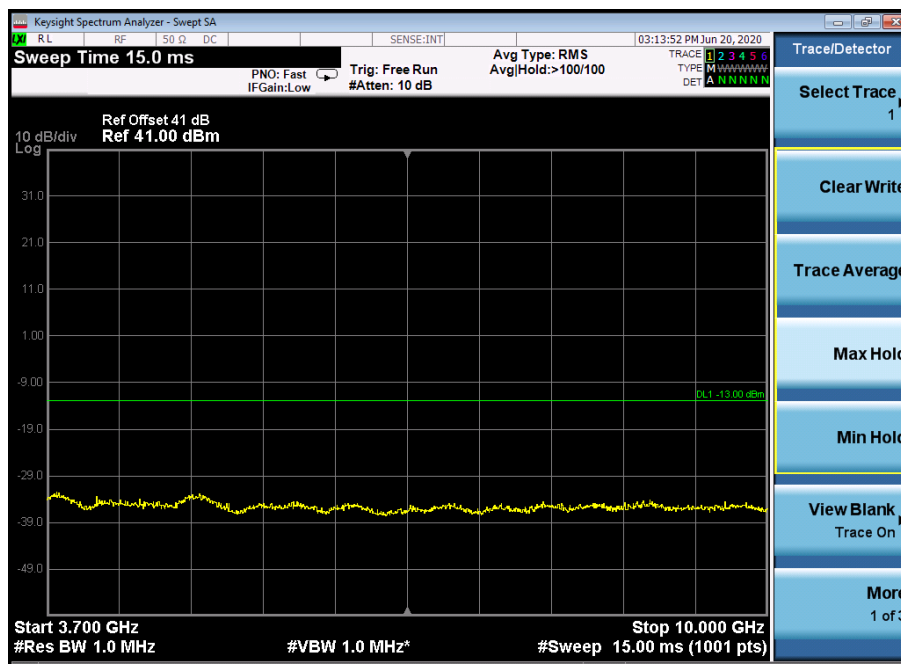

For C4FM mode:

1) lowest frequency:

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
30MHz to 1GHz	RBW=100KHz	-27.43	-13.0	-14.43
1GHz to 3.7GHz	RBW=1MHz	-26.45	-13.0	-13.45
3.7GHz to 10GHz	RBW=1MHz	-23.73	-13.0	-10.73

2) Middle frequency:

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
30MHz to 1GHz	RBW=100KHz	-28.36	-13.0	-15.36
1GHz to 3.7GHz	RBW=1MHz	-27.95	-13.0	-14.95
3.7GHz to 10GHz	RBW=1MHz	-26.82	-13.0	-13.82

3) highest frequency

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
30MHz to 1GHz	RBW=100KHz	-27.85	-13.0	-14.85
1GHz to 3.7GHz	RBW=1MHz	-25.28	-13.0	-12.28

3.7GHz to 10GHz	RBW=1MHz	-25.49	-13.0	-12.49
-----------------	----------	--------	-------	--------

For HDQPSK mode:

1) lowest frequency:

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
30MHz to 1GHz	RBW=100KHz	-27.29	-13.0	-14.29
1GHz to 3.7GHz	RBW=1MHz	-26.48	-13.0	-13.48
3.7GHz to 10GHz	RBW=1MHz	-25.76	-13.0	-12.76

2) Middle frequency:

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
30MHz to 1GHz	RBW=100KHz	-28.42	-13.0	-15.42
1GHz to 3.7GHz	RBW=1MHz	-26.19	-13.0	-13.19
3.7GHz to 10GHz	RBW=1MHz	-26.38	-13.0	-13.38

3) highest frequency

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
30MHz to 1GHz	RBW=100KHz	-27.29	-13.0	-14.29
1GHz to 3.7GHz	RBW=1MHz	-28.12	-13.0	-15.12
3.7GHz to 10GHz	RBW=1MHz	-27.93	-13.0	-14.93

For FM(12.5k) mode:

1) lowest frequency:

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
30MHz to 1GHz	RBW=100KHz	-28.15	-13.0	-15.15
1GHz to 3.7GHz	RBW=1MHz	-26.83	-13.0	-13.83
3.7GHz to 10GHz	RBW=1MHz	-25.26	-13.0	-12.26

2) Middle frequency:

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
30MHz to 1GHz	RBW=100KHz	-27.38	-13.0	-14.38
1GHz to 3.7GHz	RBW=1MHz	-29.21	-13.0	-16.21
3.7GHz to 10GHz	RBW=1MHz	-26.45	-13.0	-13.45

3) highest frequency


Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
30MHz to 1GHz	RBW=100KHz	-28.92	-13.0	-15.92
1GHz to 3.7GHz	RBW=1MHz	-27.65	-13.0	-14.65
3.7GHz to 10GHz	RBW=1MHz	-25.83	-13.0	-12.83

2.Uplink: 799MHz ~ 805MHz


1.1 For FM(25k) mode:

1)lowest frequency


30MHz to 1GHz

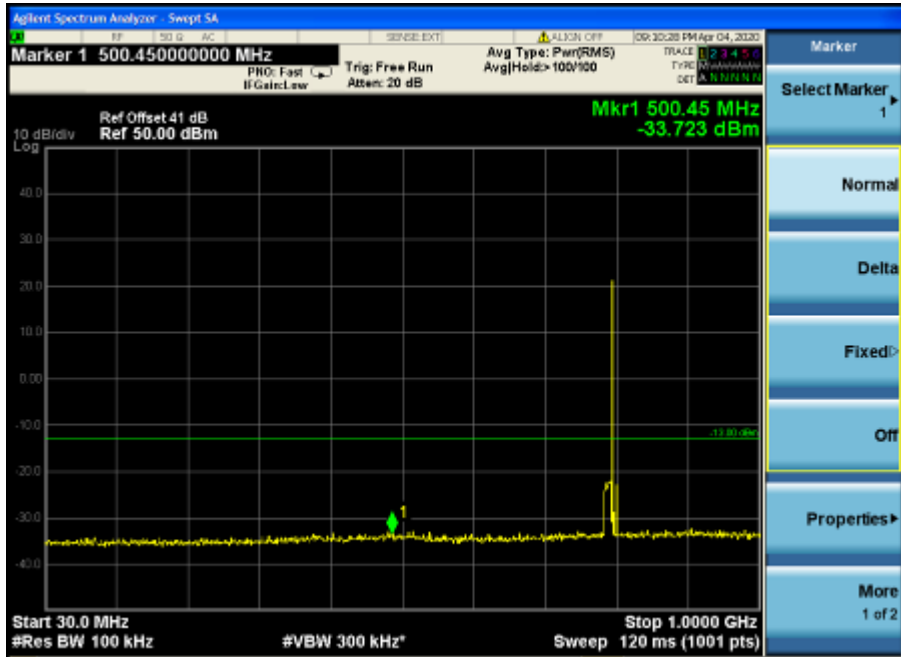

1GHz to 3.7GHz

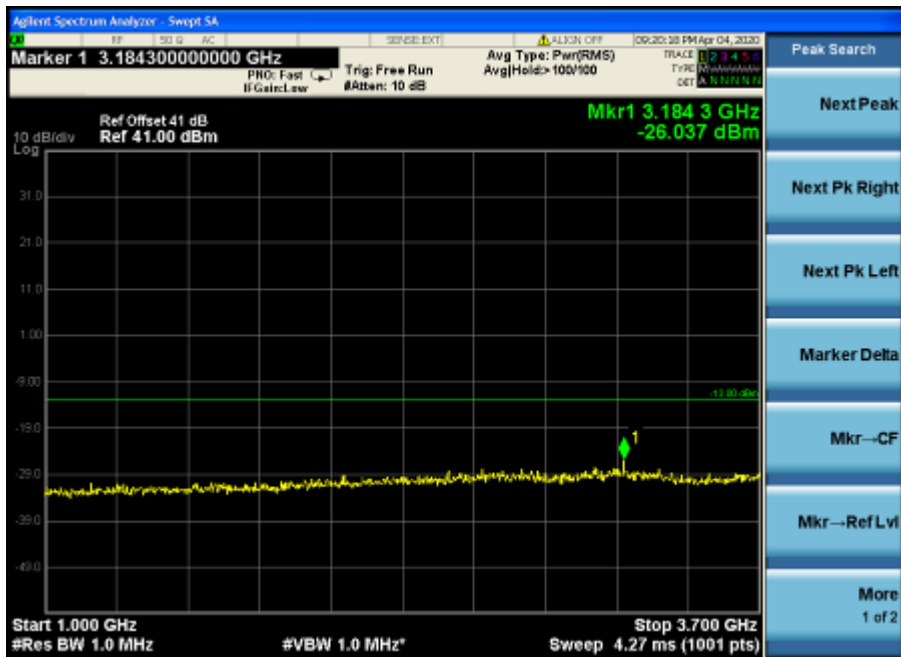


3.7GHz-10GHz.

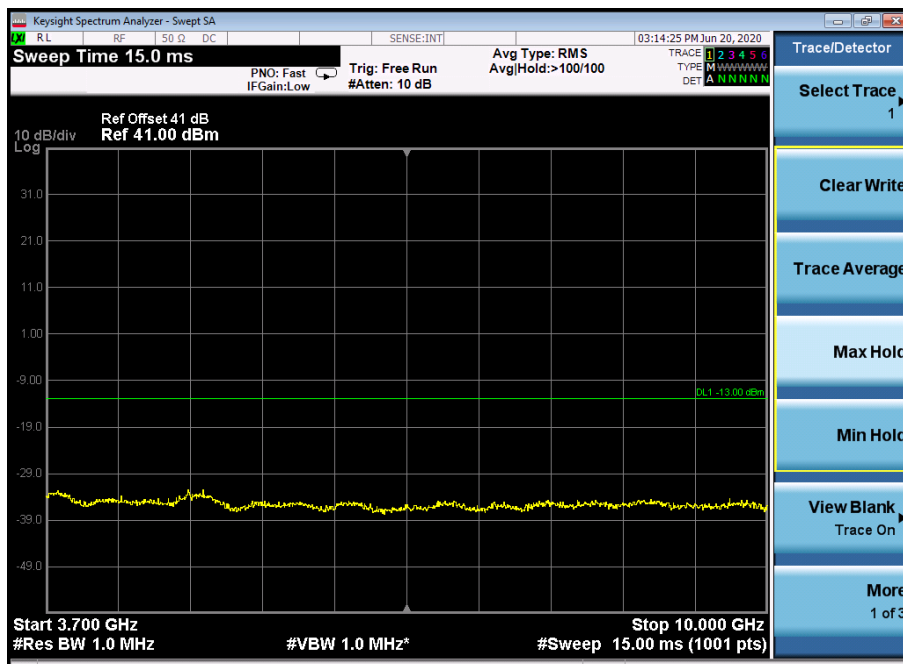


2) Middle frequency


30MHz to 1GHz

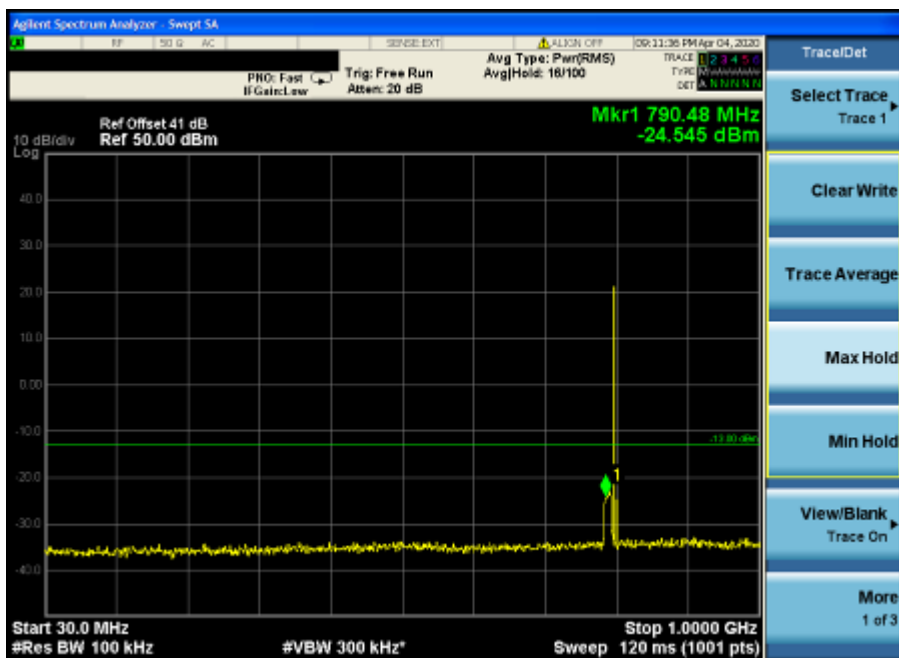

1GHz to 3.7GHz

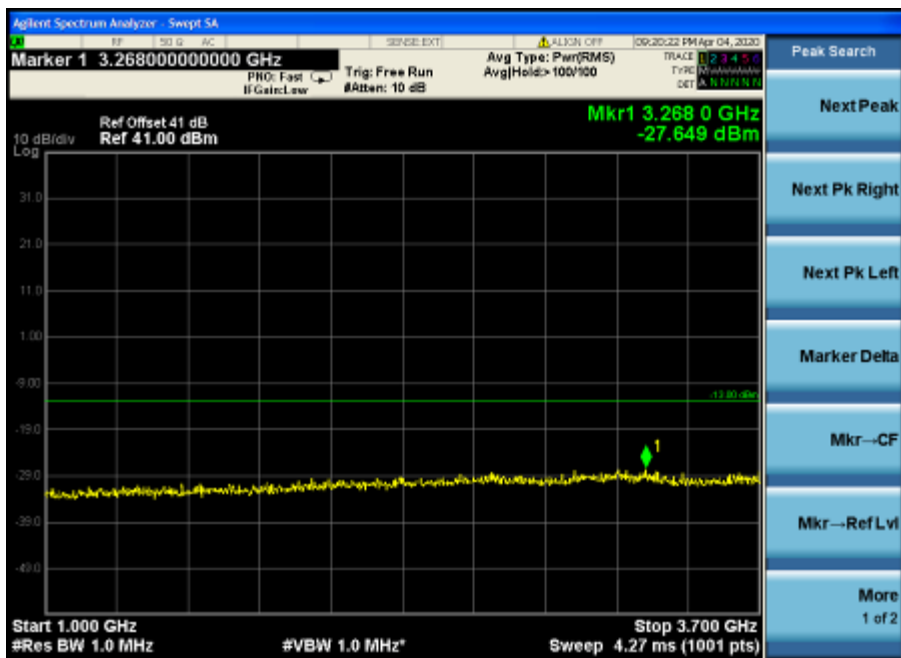


3.7GHz to 10GHz

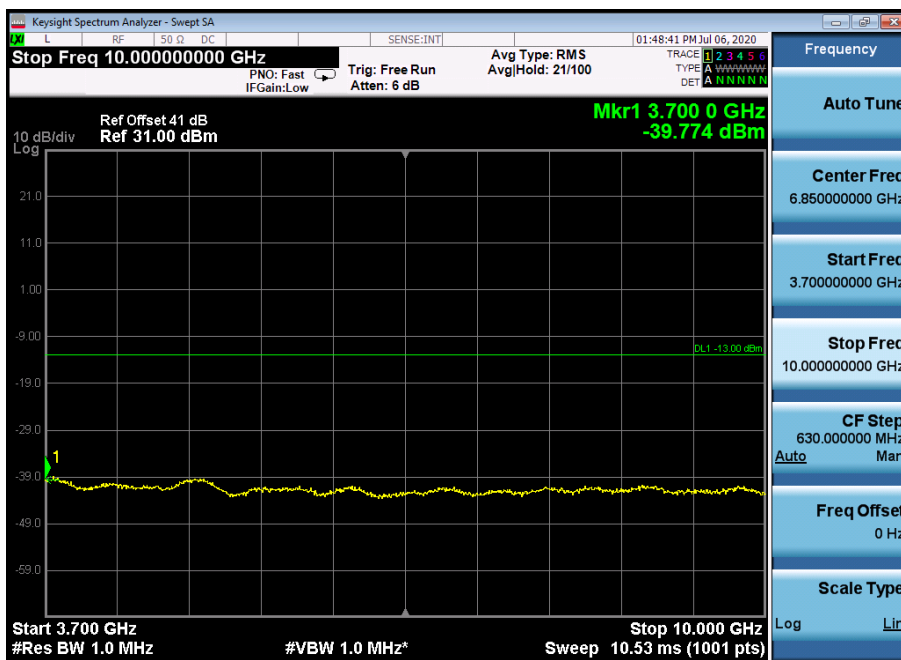


3)highest frequency


30MHz to 1GHz

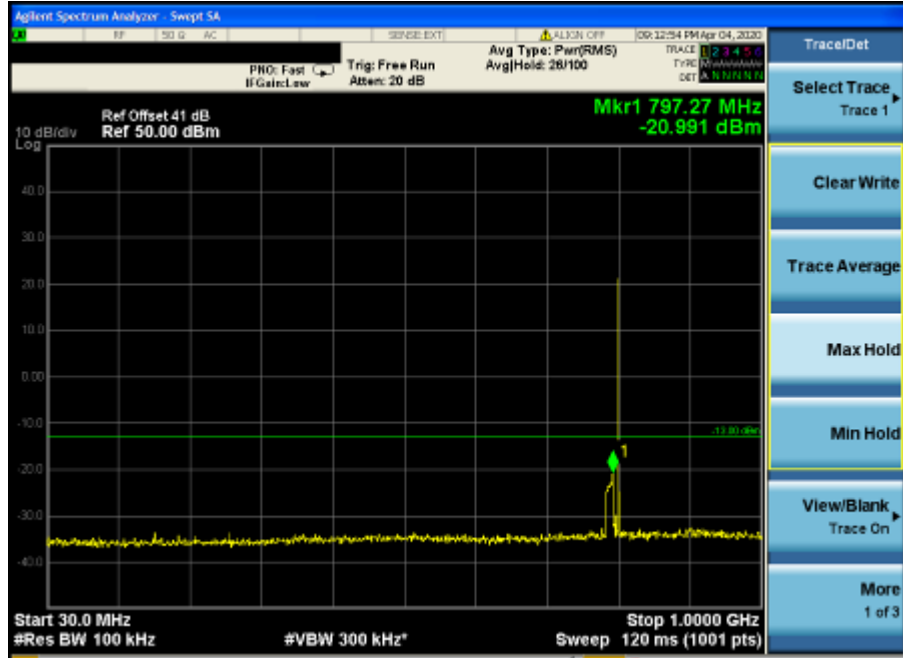

1GHz to 3.7GHz

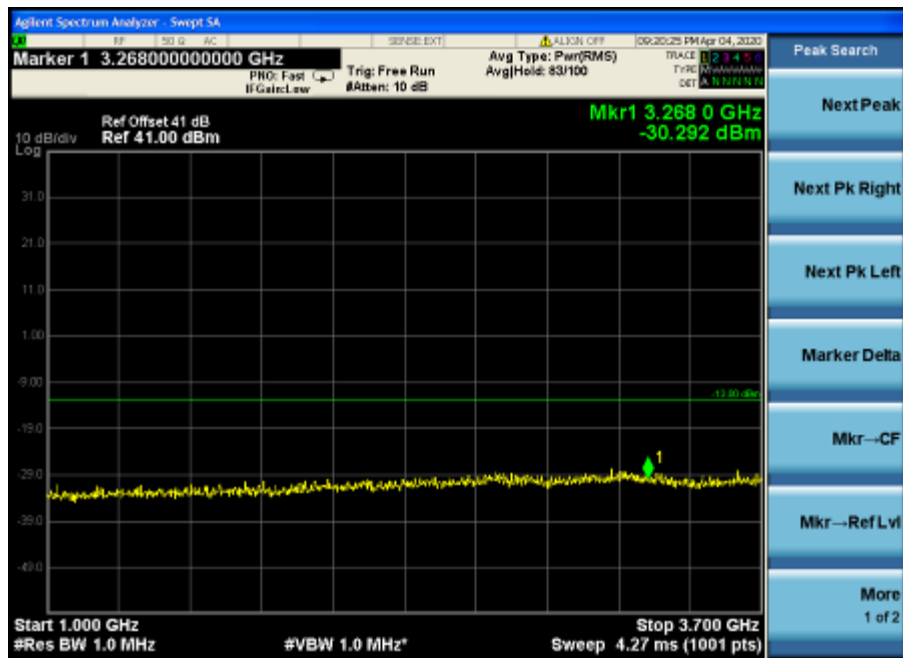

3.7GHz to 10GHz

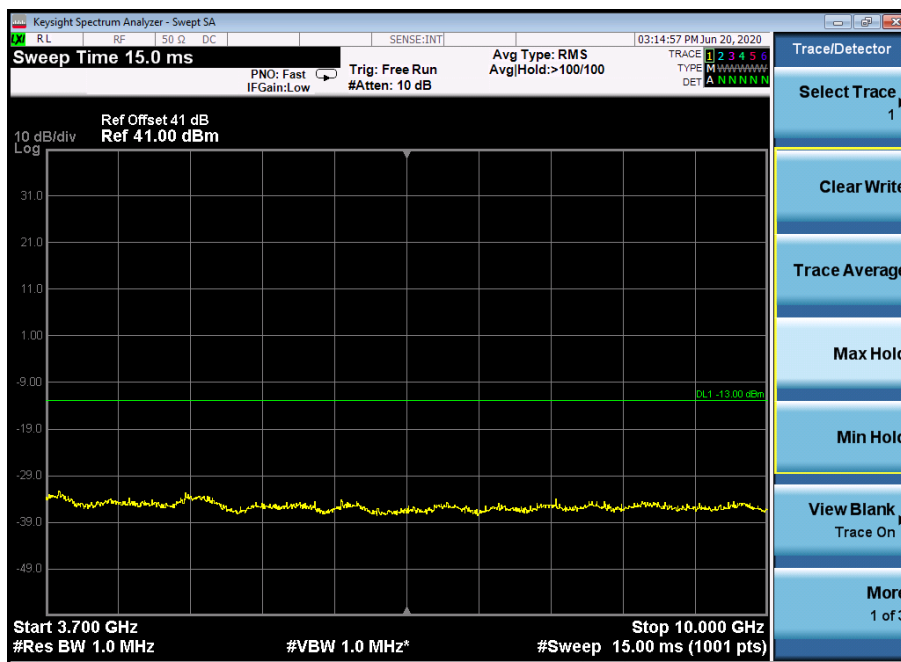

For C4FM mode:

1) lowest frequency:

Measurement Record:

Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
30MHz to 1GHz	RBW=100KHz	-29.87	-13.0	-16.87
1GHz to 3.7GHz	RBW=1MHz	-25.62	-13.0	-12.62
3.7GHz to 10GHz z	RBW=1MHz	-24.53	-13.0	-11.53

2) Middle frequency:

Measurement Record:

Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
30MHz to 1GHz	RBW=100KHz	-28.35	-13.0	-15.35
1GHz to 3.7GHz	RBW=1MHz	-24.63	-13.0	-11.63
3.7GHz to 10GHz	RBW=1MHz	-24.57	-13.0	-11.57

3) highest frequency

Measurement Record:

Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
30MHz to 1GHz	RBW=100KHz	-28.82	-13.0	-15.82
1GHz to 3.7GHz	RBW=1MHz	-24.29	-13.0	-11.29
3.7GHz to 10GHz	RBW=1MHz	-23.58	-13.0	-10.58

For HDQPSK mode:

1) lowest frequency:

Measurement Record:

Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
30MHz to 1GHz	RBW=100KHz	-28.48	-13.0	-15.48
1GHz to 3.7GHz	RBW=1MHz	-25.26	-13.0	-12.26
3.7GHz to 10GHz	RBW=1MHz	-24.17	-13.0	-11.17

2) Middle frequency:

Measurement Record:

Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
30MHz to 1GHz	RBW=100KHz	-27.93	-13.0	-14.93
1GHz to 3.7GHz	RBW=1MHz	-24.76	-13.0	-11.76
3.7GHz to 10GHz	RBW=1MHz	-24.85	-13.0	-11.85

3) highest frequency

Measurement Record:

Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
30MHz to 1GHz	RBW=100KHz	-28.59	-13.0	-15.59
1GHz to 3.7GHz	RBW=1MHz	-24.73	-13.0	-11.73
3.7GHz to 10GHz	RBW=1MHz	-24.52	-13.0	-11.52

For FM(12.5k) mode:

1) lowest frequency:

Measurement Record:

Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
30MHz to 1GHz	RBW=100KHz	-28.75	-13.0	-15.75
1GHz to 3.7GHz	RBW=1MHz	-24.53	-13.0	-11.53
3.7GHz to 10GHz	RBW=1MHz	-23.39	-13.0	-10.39

2) Middle frequency:

Measurement Record:

Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
30MHz to 1GHz	RBW=100KHz	-28.67	-13.0	-15.67
1GHz to 3.7GHz	RBW=1MHz	-23.45	-13.0	-10.45
3.7GHz to 10GHz	RBW=1MHz	-23.24	-13.0	-10.24

3) highest frequency

Measurement Record:

Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
30MHz to 1GHz	RBW=100KHz	-28.86	-13.0	-15.86
1GHz to 3.7GHz	RBW=1MHz	-25.21	-13.0	-12.21
3.7GHz to 10GHz	RBW=1MHz	-23.72	-13.0	-10.72

The limit for 700Mhz narrow band according to part **90.543 (f)**

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610MHz shall be limited to **- 70 dBW/MHz(i.e. -40dBm)** equivalent isotropically radiated power (EIRP)

for wideband signals, and **- 80 dBW(i.e. -50dBm)** EIRP for discrete emissions of less than 700 Hz bandwidth.


The test was performed with C4FM/ HDQPSK/FM modulation type sinal at down link and uplink, the most harmonics emission at 1559-1610MH band is -42dBm EIRP at 1594.9Mhz with downlink C4FM modulation type input.




Class B model number:
700MHz broad band

Downlink: 758MHz ~ 768MHz For LTE mode:

769MHz to 775MHz

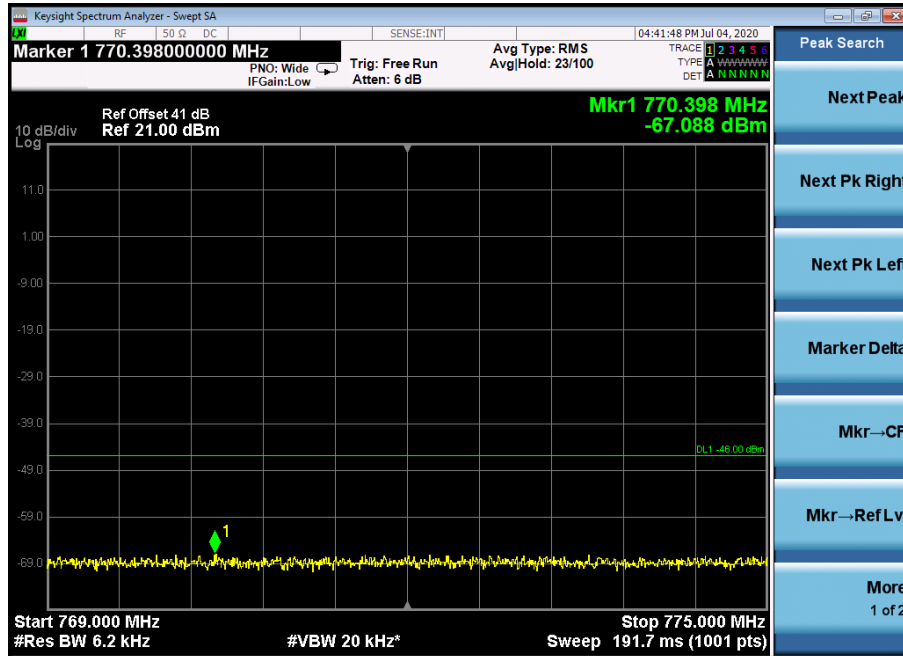

30MHz to 1GHz:

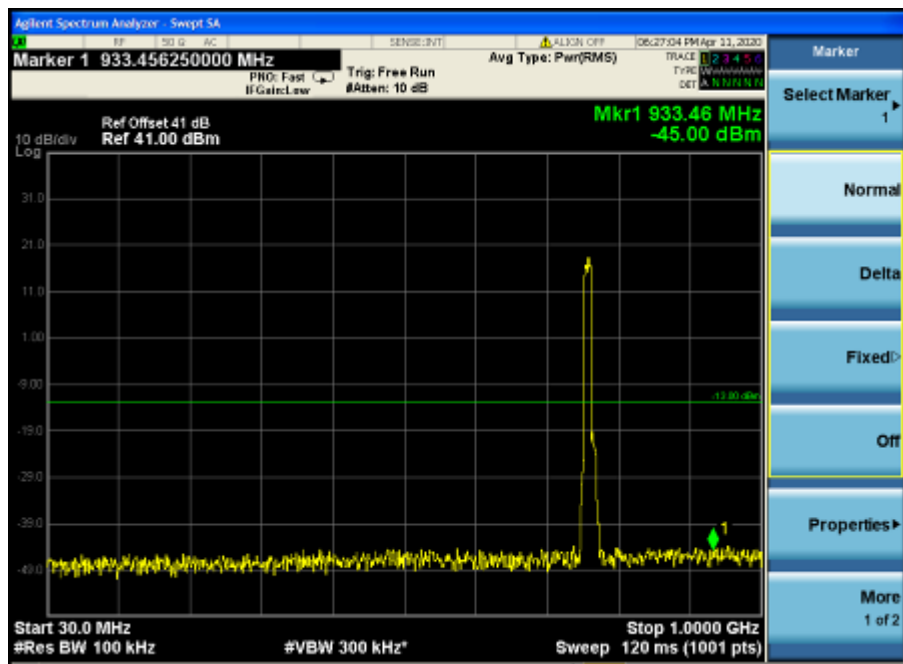


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch
SGS-CSTC 标准技术服务有限公司
深圳分公司
检验检测专用章

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 1 (86-755) 26012053 1 (86-755) 26710594 www.sgs.com
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 1 (86-755) 26012053 1 (86-755) 26710594 sgs.china@sgs.com


1GHz to 3.7GHz

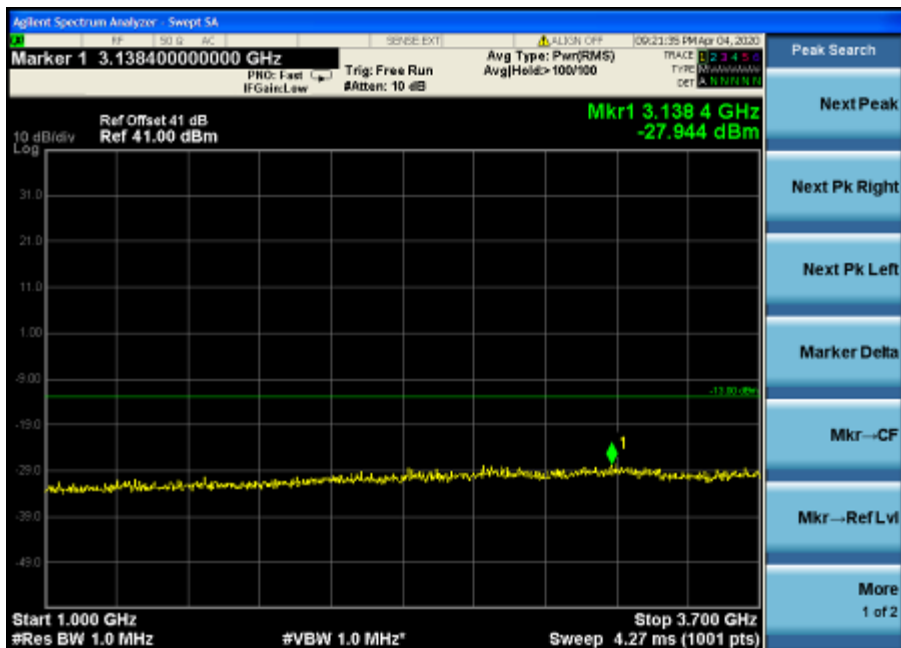

1559-1610MHz

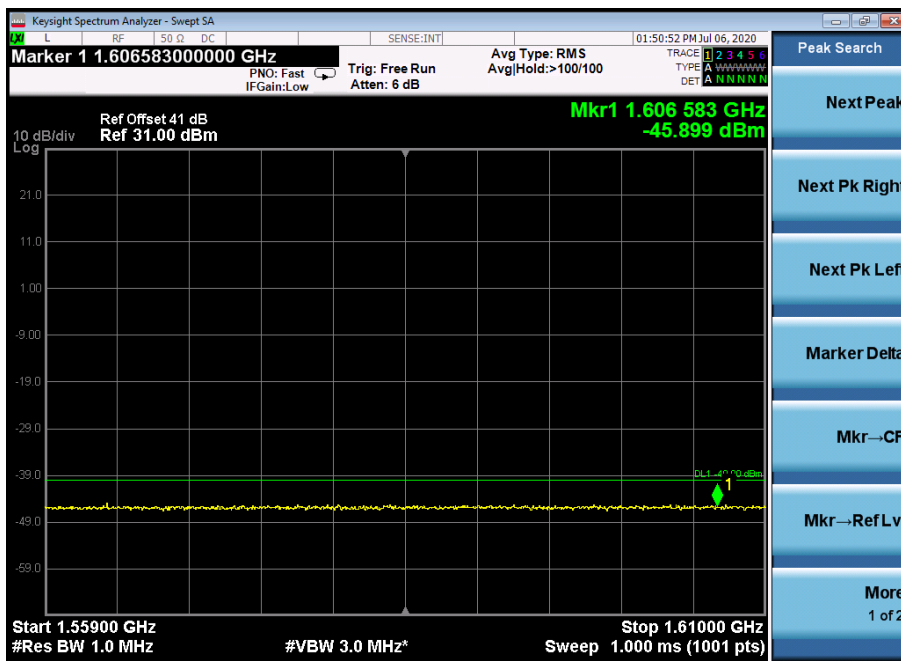


3.7G-10GHz.

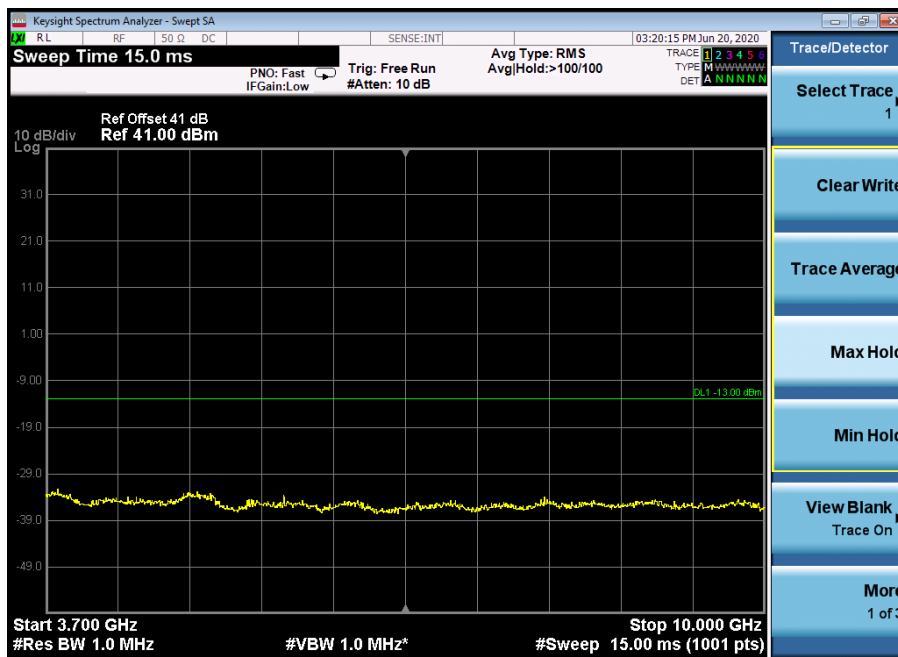


700MHz broad band

Uplink: 788MHz ~ 798MHz for LTE mode.

799MHz ~ 805MHz

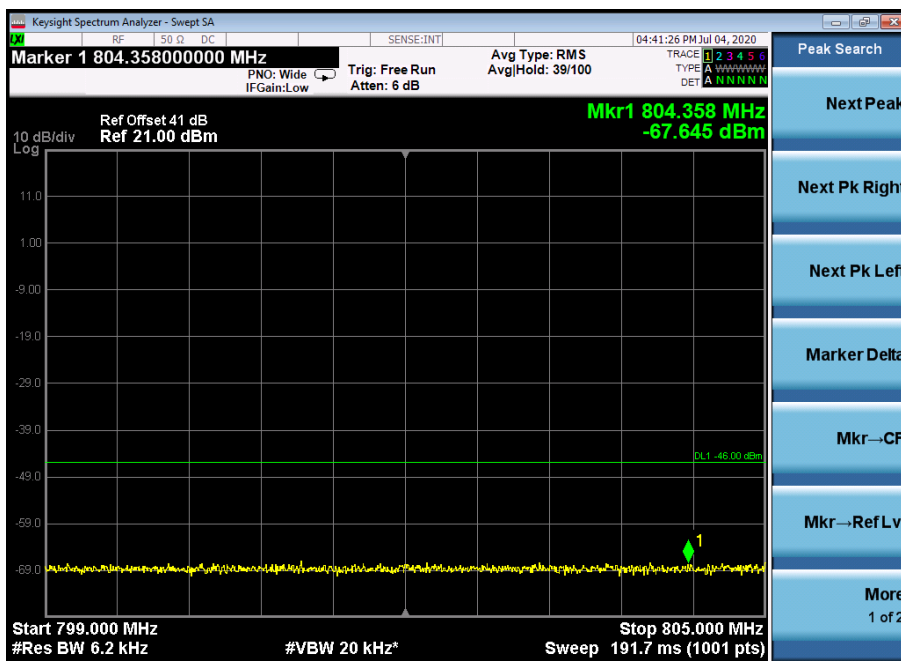


30MHz to 1GHz

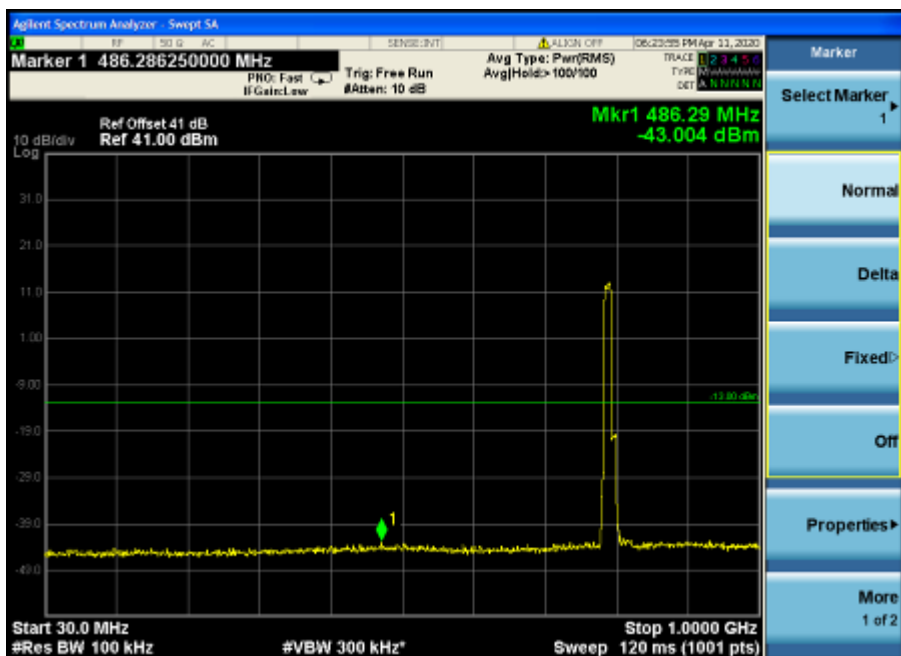


1559MHz to 1610MHz



1GHz to 3.7GHz

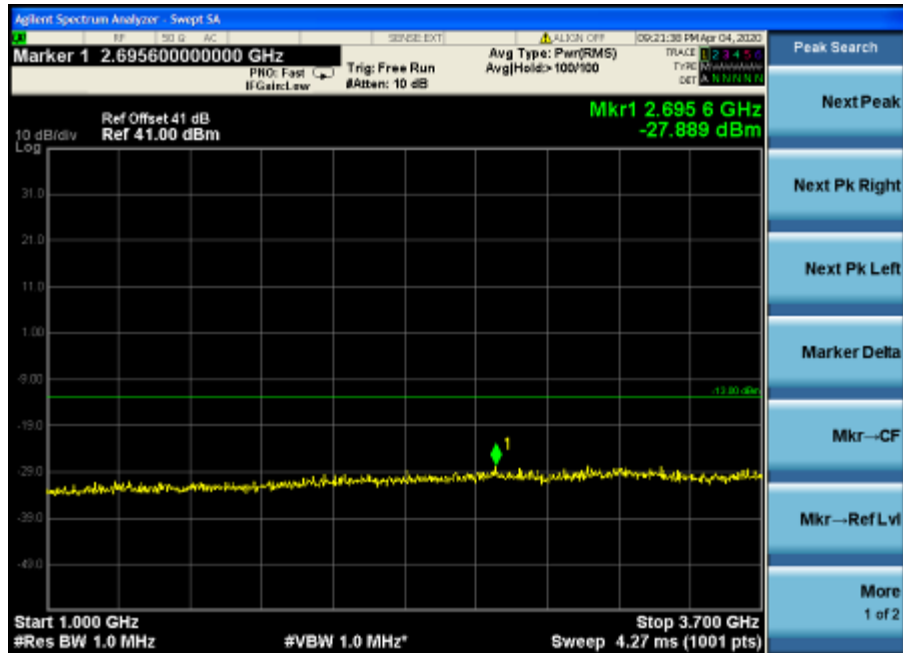

3.7G-10GHz.

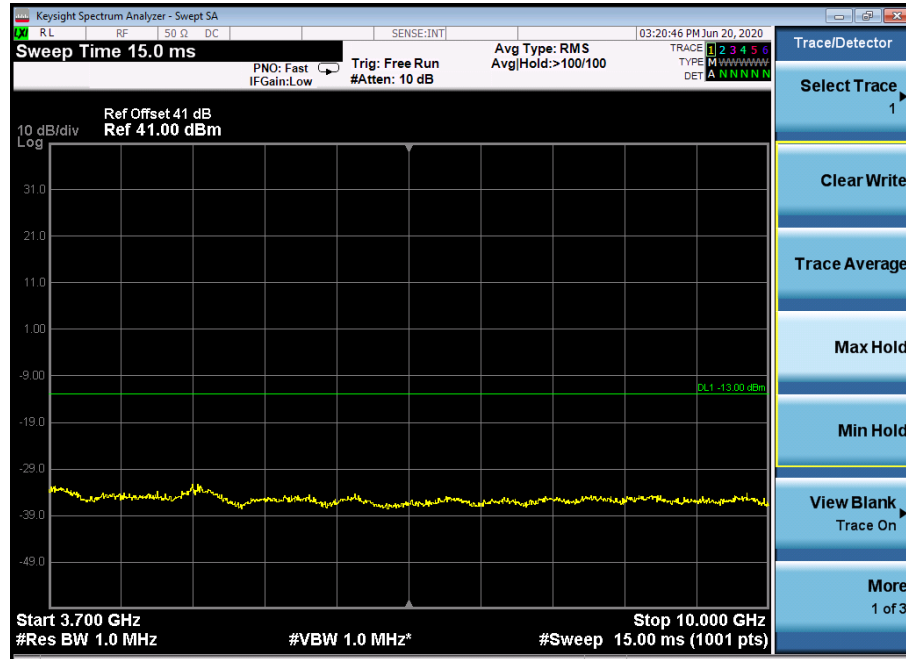

700Mhz Narrow band :

1.Downlink: 769MHz ~ 775MHz


Remark:

The data of the C4FM mode and HDQPSK、FM(12.5k) is almost the same with FM(25k)mode, so we only show the photo in the FM(25k) mode,others record the data.


1.1 For FM(25k)mode:

1)Lowest frequency


9KHz to 1GHz

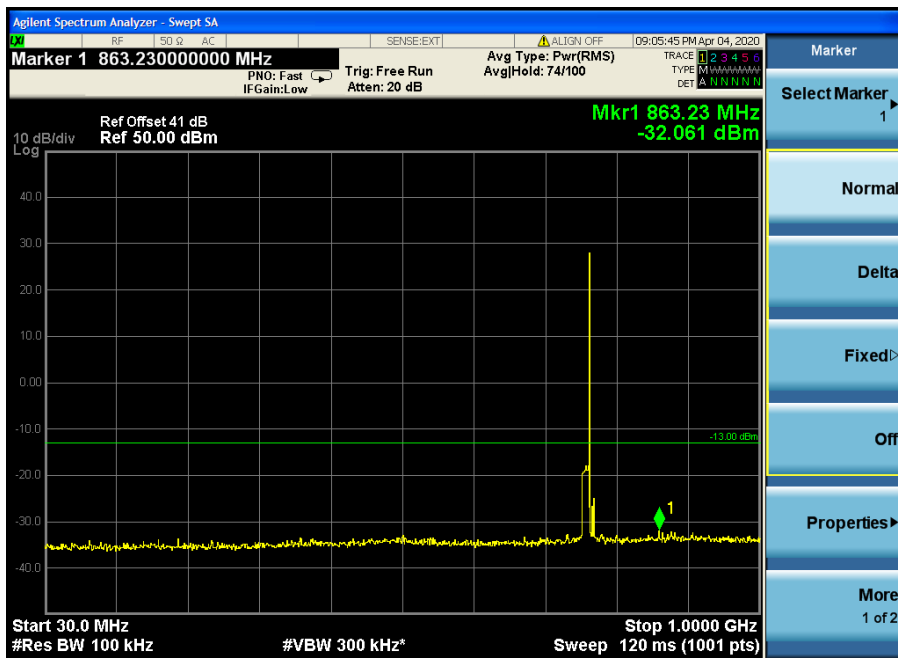

1GHz to 3.7GHz

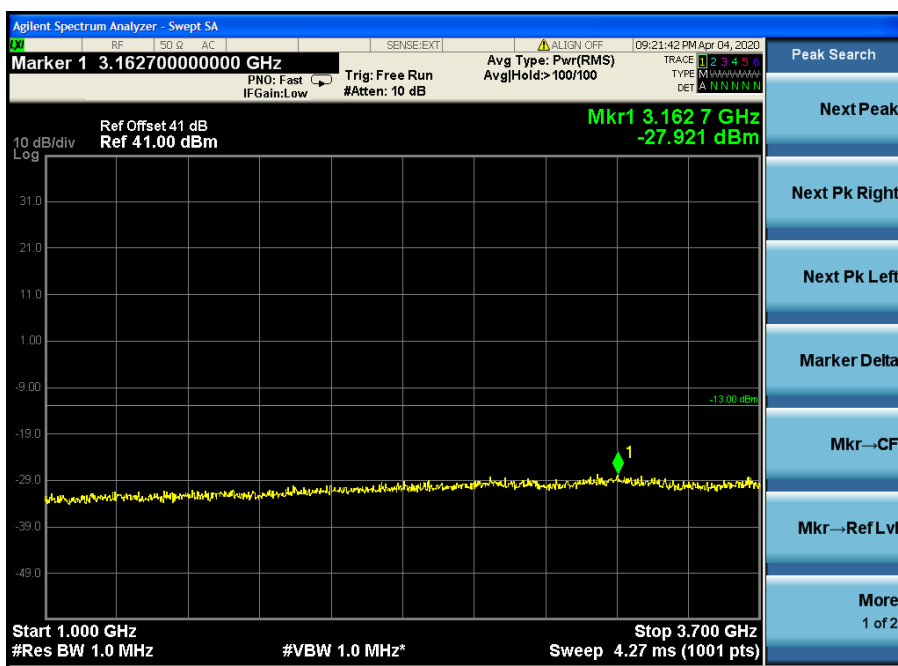


3.7G-10G

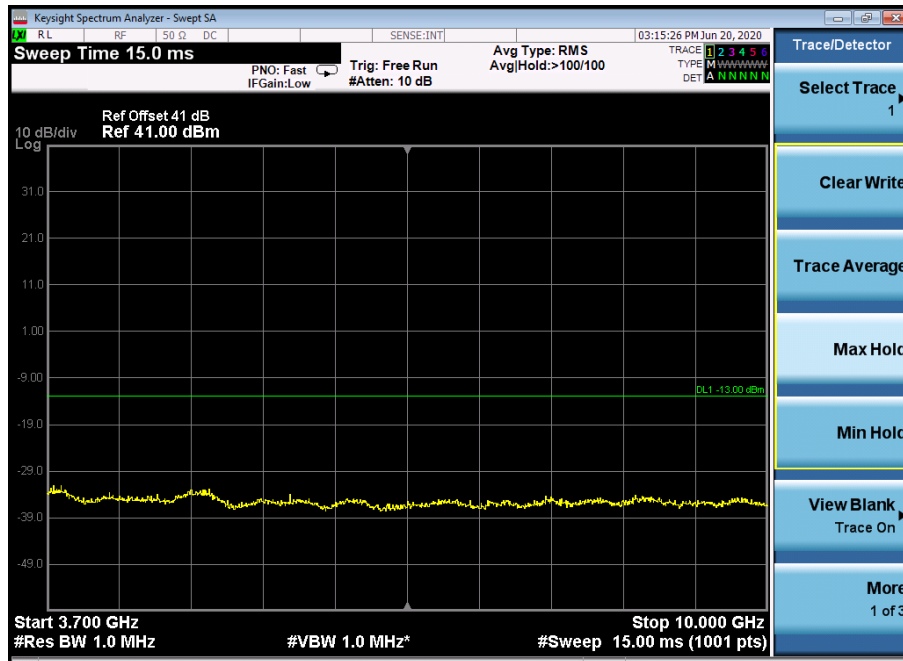


2)Middle frequency


9KHz to 1GHz

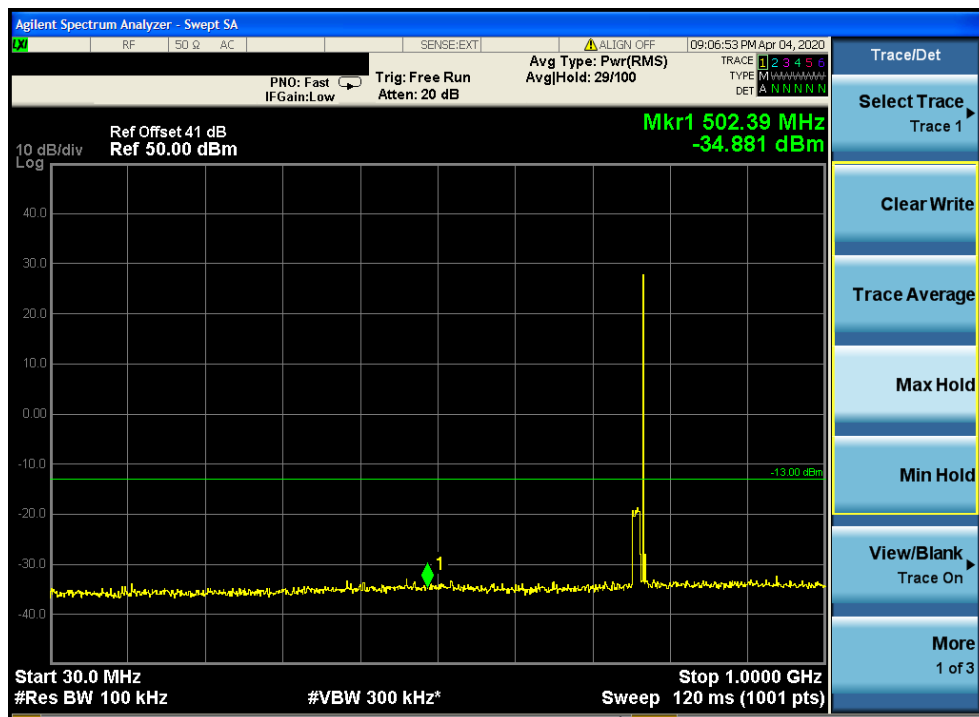


1GHz to 3.7GHz

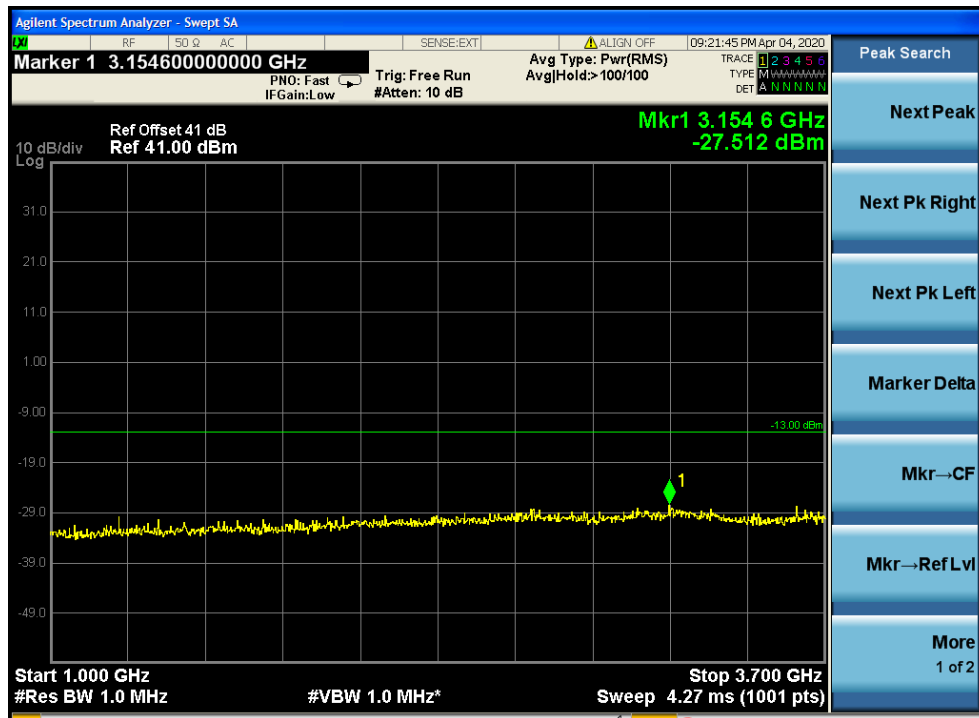


3.7G-10G

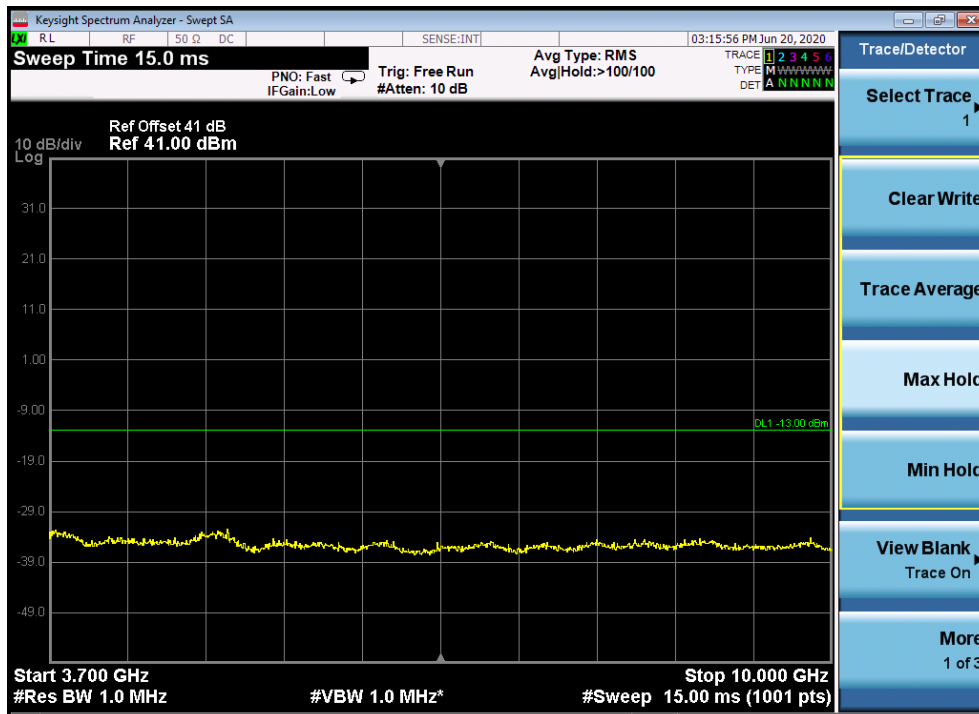

3)highest frequency 9KHz to 1GHz

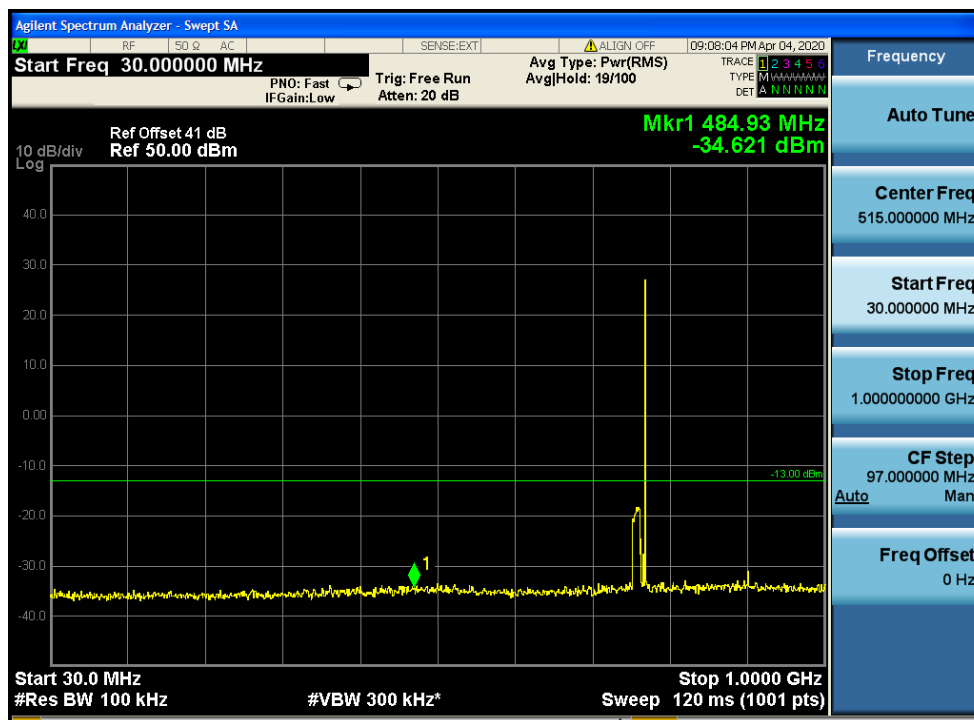

1GHz to 3.7GHz

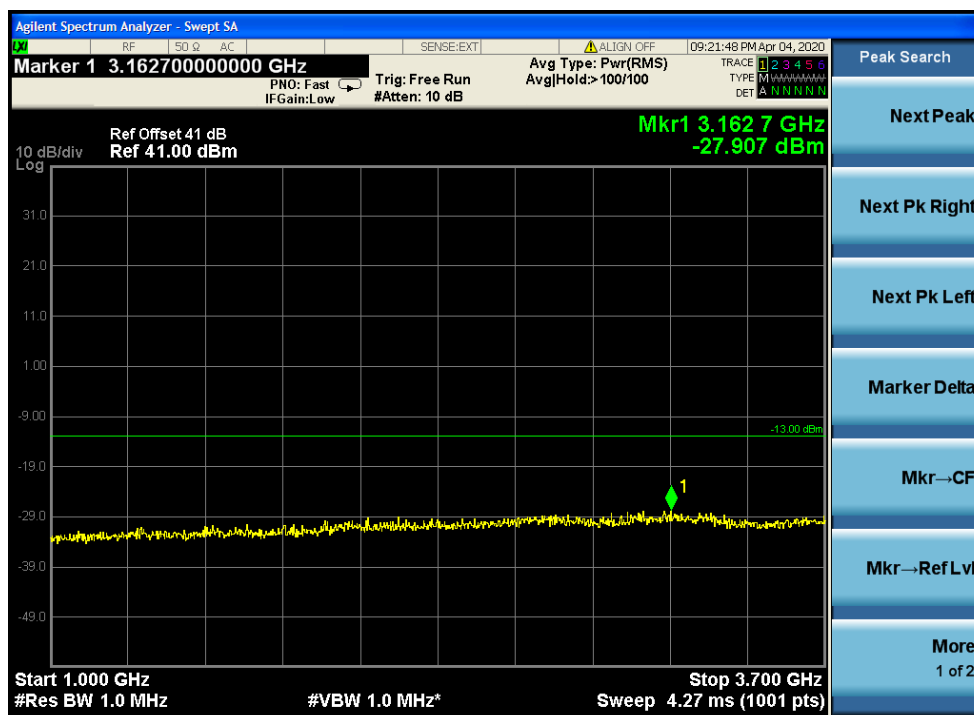


3.7G-10G



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing (inspection) report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 1 (86-755) 26012053 1 (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 1 (86-755) 26012053 1 (86-755) 26710594 sgs.china@sgs.com

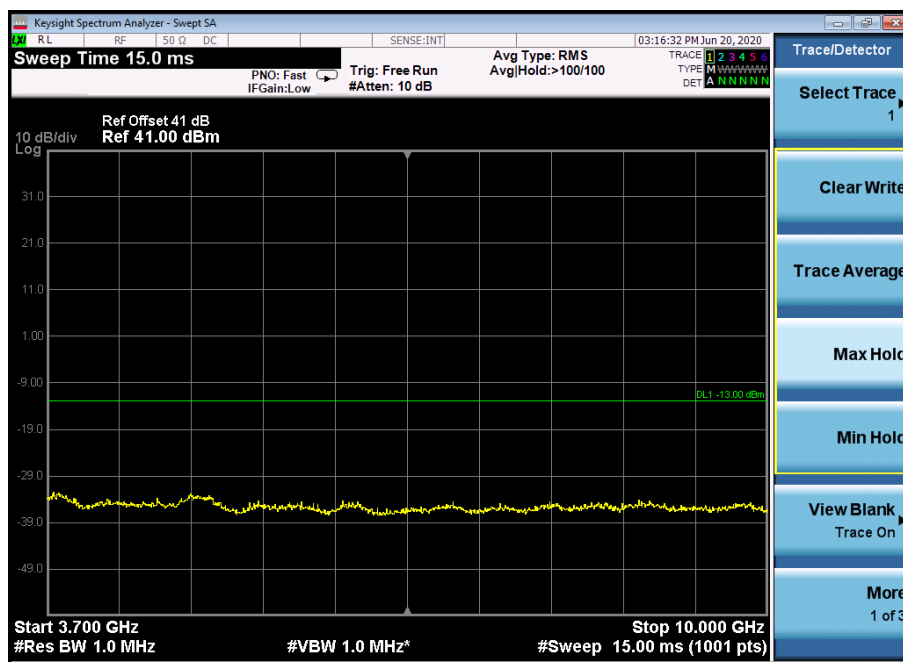

For C4FM mode:

4) lowest frequency:

Measurement Record:

Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
9KHz to 1GHz	RBW=100KHz	-26.53	-13.0	-13.53
1GHz to 10GHz	RBW=1MHz	-19.72	-13.0	-6.72
3GHz to 10GHz	RBW=1MHz	-22.67	-13.0	-9.67

5) Middle frequency:

Measurement Record:

Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
9KHz to 1GHz	RBW=100KHz	-24.72	-13.0	-11.72
1GHz to 3.7GHz	RBW=1MHz	-20.89	-13.0	-7.89
3GHz to 10GHz	RBW=1MHz	-23.43	-13.0	-10.43

6) highest frequency

Measurement Record:

Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
9KHz to 1GHz	RBW=100KHz	-23.85	-13.0	-10.85
1GHz to 3.7GHz	RBW=1MHz	-20.47	-13.0	-7.47



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057

中国·深圳·科技园中区M-10栋一号厂房

1 (86-755) 26012053 1 (86-755) 26710594

邮编: 518057

1 (86-755) 26012053 1 (86-755) 26710594

www.sgs.com.cn

sgs.china@sgs.com

3GHz to 10GHz	RBW=1MHz	-22.81	-13.0	-9.81
---------------	----------	--------	-------	-------

For HDQPSK mode:

4) lowest frequency:

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
9KHz to 1GHz	RBW=100KHz	-24.82	-13.0	-11.82
1GHz to 10GHz	RBW=1MHz	-19.56	-13.0	-6.56
3GHz to 10GHz	RBW=1MHz	-23.97	-13.0	-10.97

5) Middle frequency:

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
9KHz to 1GHz	RBW=100KHz	-25.37	-13.0	-12.37
1GHz to 3.7GHz	RBW=1MHz	-20.91	-13.0	-7.91
3GHz to 10GHz	RBW=1MHz	-22.86	-13.0	-9.86

6) highest frequency

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
9KHz to 1GHz	RBW=100KHz	-26.82	-13.0	-13.82
1GHz to 3.7GHz	RBW=1MHz	-21.45	-13.0	-8.45
3GHz to 10GHz	RBW=1MHz	-23.57	-13.0	-10.57



For FM(12.5k) mode:

4) lowest frequency:

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
9KHz to 1GHz	RBW=100KHz	-25.26	-13.0	-12.26
1GHz to 10GHz	RBW=1MHz	-21.47	-13.0	-8.47
3.7GHz to 10GHz	RBW=1MHz	-23.92	-13.0	-10.92

5) Middle frequency:

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
9KHz to 1GHz	RBW=100KHz	-25.73	-13.0	-12.73
1GHz to 3.7GHz	RBW=1MHz	-20.89	-13.0	-7.89
3.7GHz to 10GHz	RBW=1MHz	-21.65	-13.0	-8.65

6) highest frequency

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
9KHz to 1GHz	RBW=100KHz	-23.82	-13.0	-10.82
1GHz to 3.7GHz	RBW=1MHz	-22.36	-13.0	-9.36
3.7GHz to 10GHz	RBW=1MHz	-21.24	-13.0	-8.24




4.Uplink: 799MHz ~ 805MHz


1.1 For FM(25k) mode:

1)lowest frequency


9KHz to 1GHz

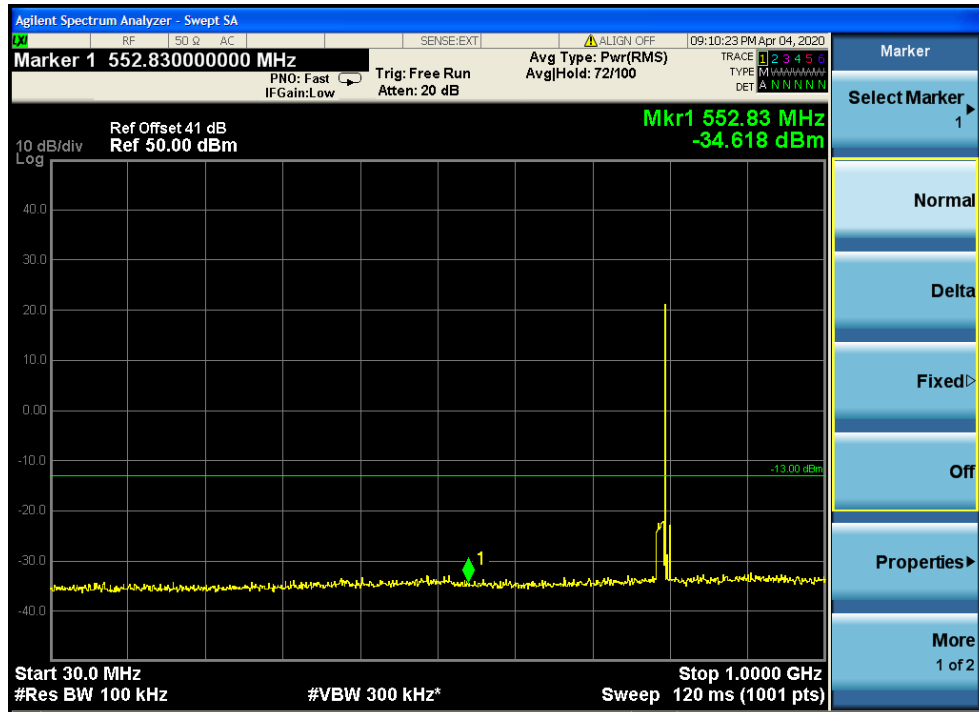


1GHz to 3.7GHz

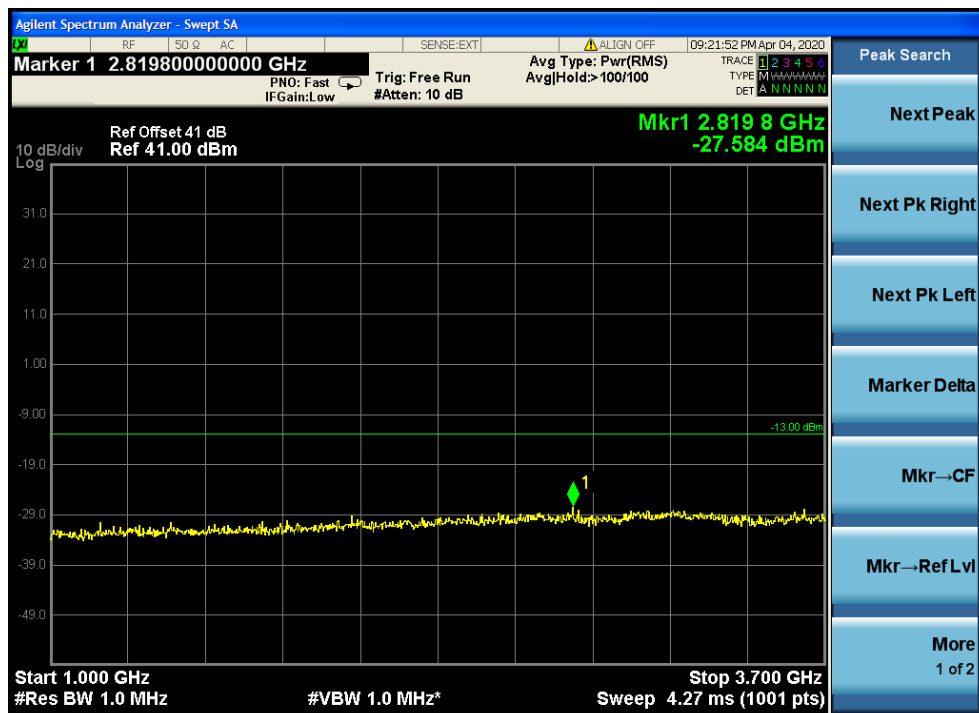


3.7G-10G

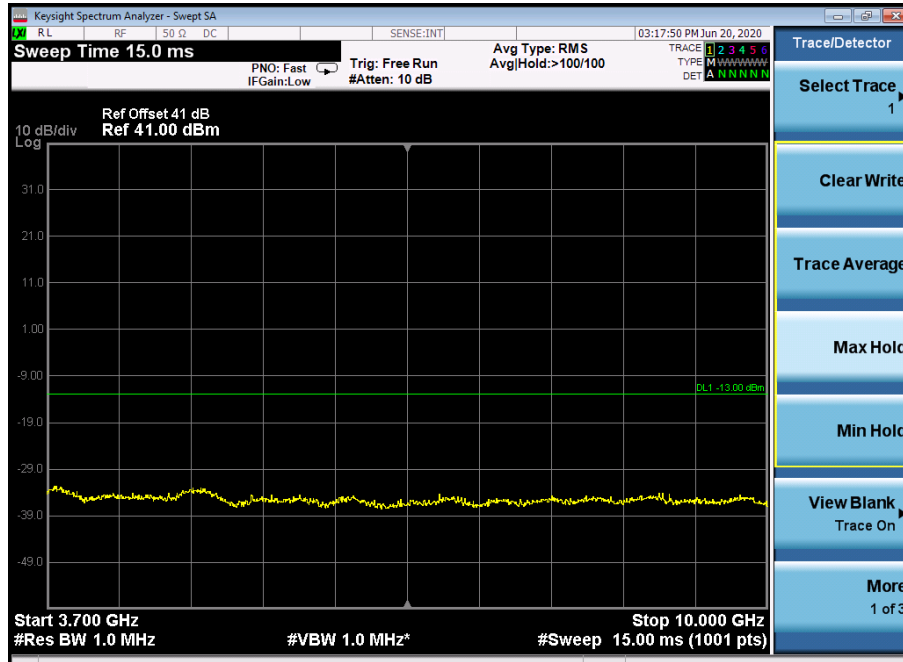


2) Middle frequency 9KHz to 1GHz

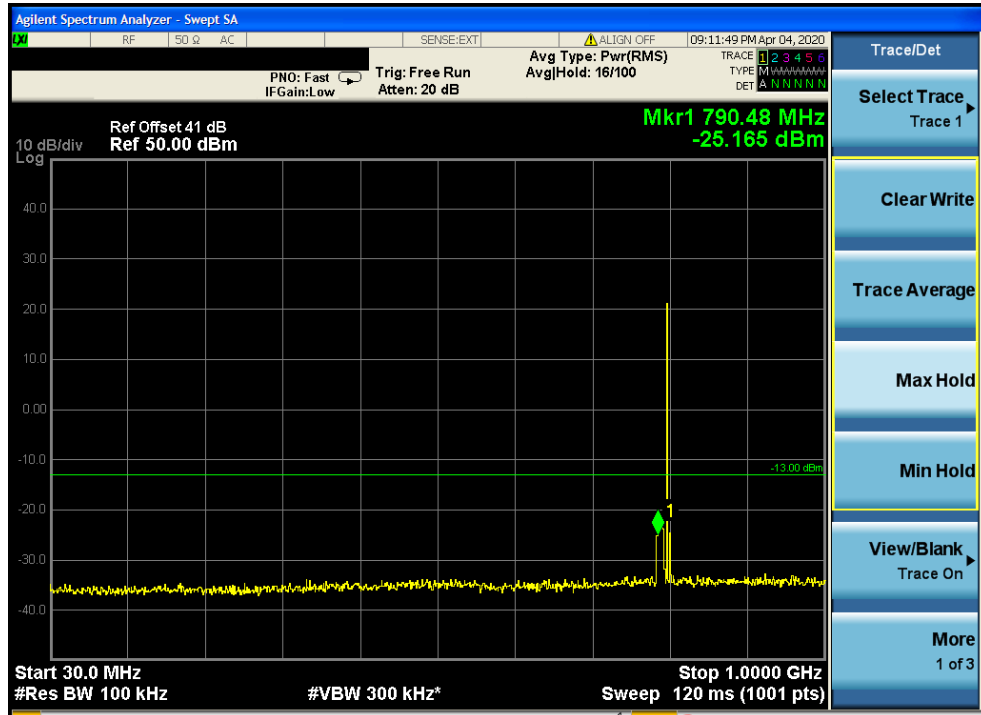

1GHz to 3.7GHz

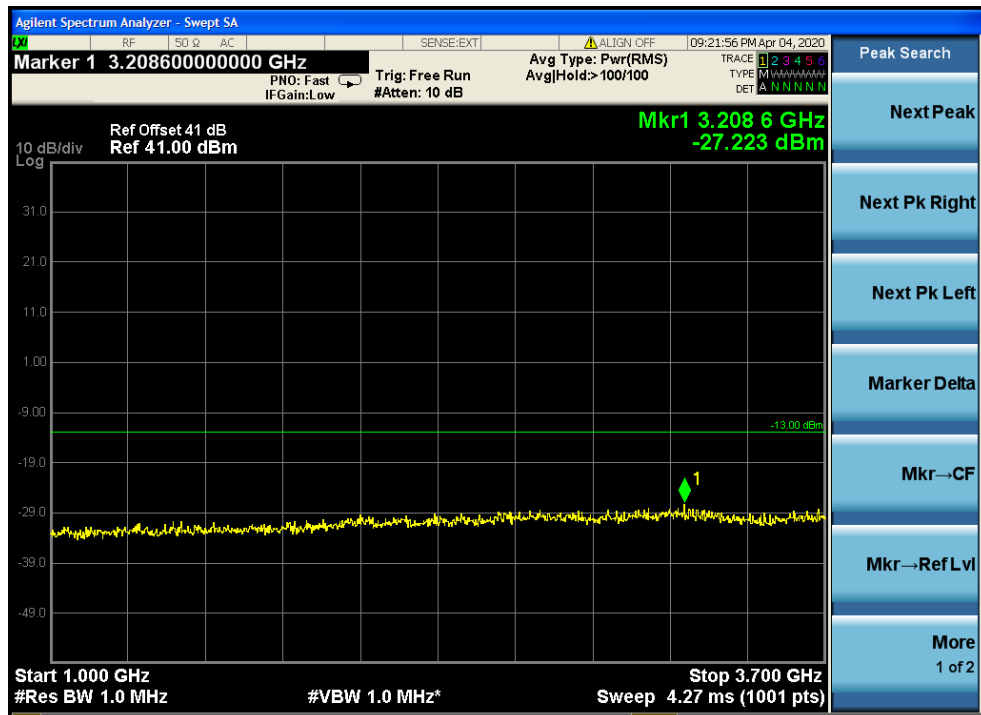

3.7G-10G

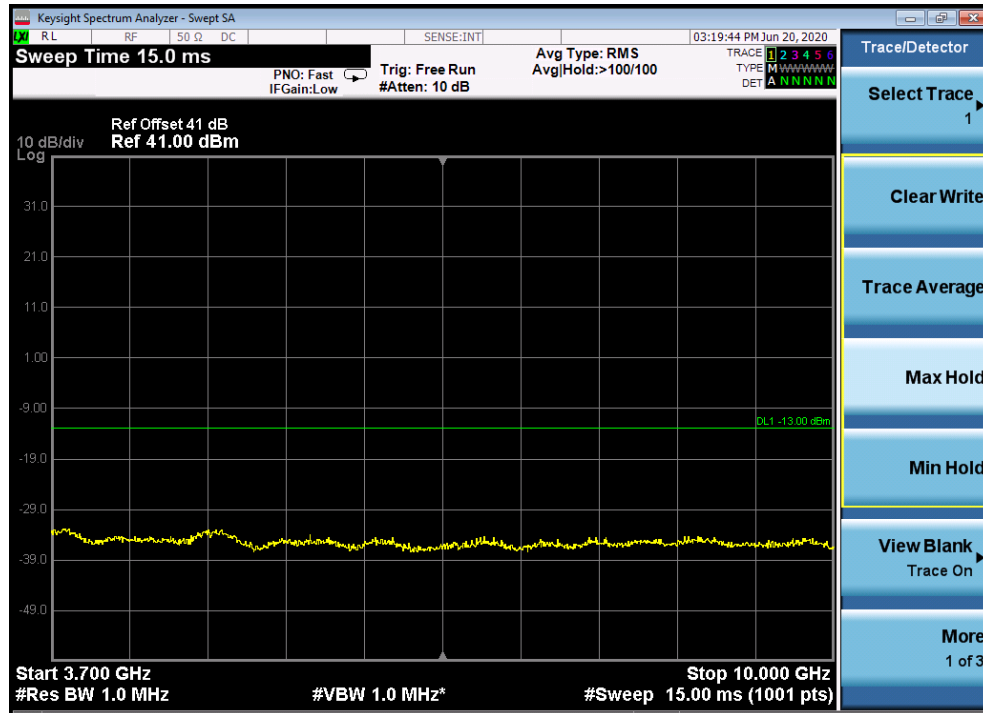


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing (inspection) report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 1 (86-755) 26012053 1 (86-755) 26710594 www.sgs.com
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 1 (86-755) 26012053 1 (86-755) 26710594 sgs.china@sgs.com


3)highest frequency 9KHz to 1GHz

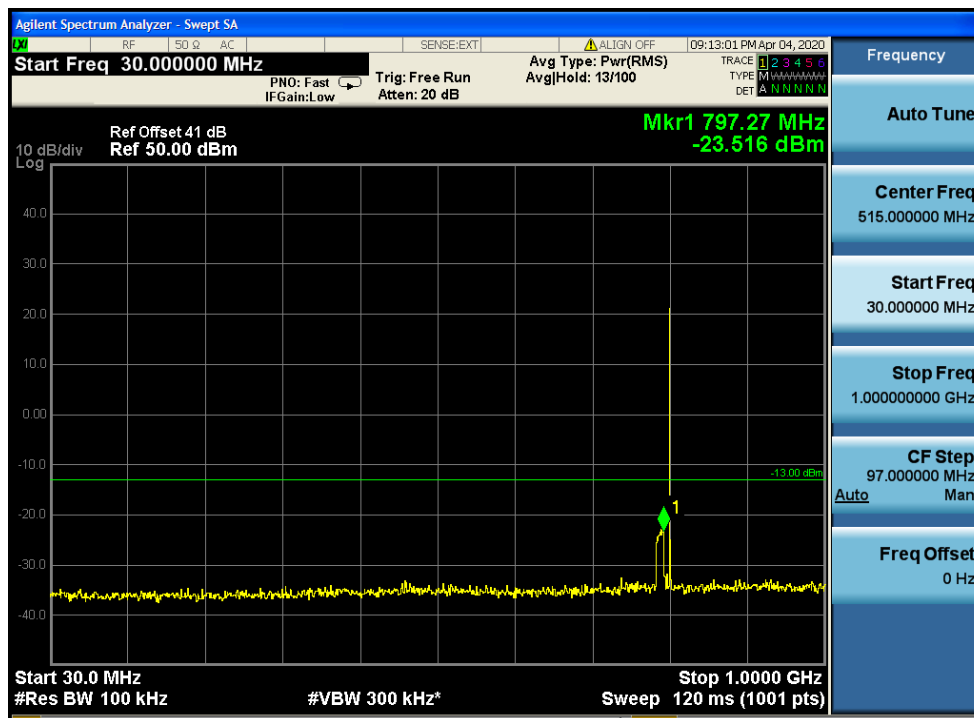

1GHz to 3.7GHz

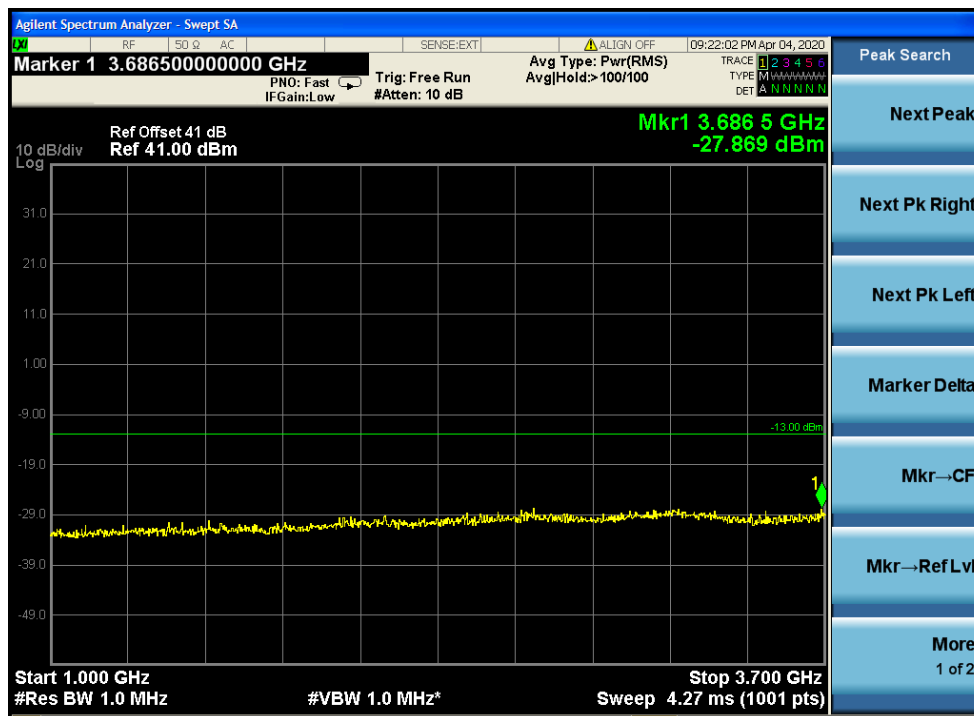

3.7G-10G

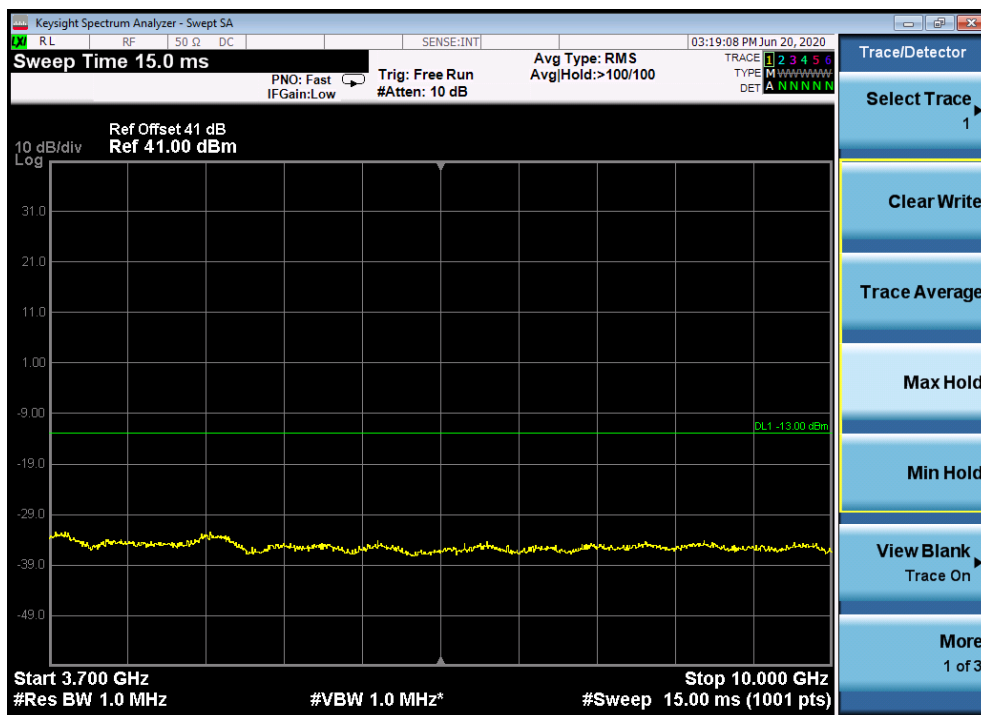

For C4FM mode:

4) lowest frequency:

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
9KHz to 1GHz	RBW=100KHz	-25.23	-13.0	-12.23
1GHz to 10GHz	RBW=1MHz	-21.16	-13.0	-8.16
3.7GHz to 10GHz z	RBW=1MHz	-22.79	-13.0	-9.79

5) Middle frequency:

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
9KHz to 1GHz	RBW=100KHz	-24.63	-13.0	-11.63
1GHz to 3.7GHz	RBW=1MHz	-20.95	-13.0	-7.95
3.7GHz to 10GHz	RBW=1MHz	-21.83	-13.0	-8.83

6) highest frequency

Measurement Record:				
---------------------	--	--	--	--

Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
9KHz to 1GHz	RBW=100KHz	-25.48	-13.0	-12.48
1GHz to 3.7GHz	RBW=1MHz	-23.92	-13.0	-10.92
3.7GHz to 10GHz	RBW=1MHz	-20.29	-13.0	-7.29

For HDQPSK mode:

4) lowest frequency:

Measurement Record:

Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
9KHz to 1GHz	RBW=100KHz	-22.84	-13.0	-9.84
1GHz to 3.7GHz	RBW=1MHz	-20.92	-13.0	-7.92
3.7GHz to 10GHz	RBW=1MHz	-23.61	-13.0	-10.61

5) Middle frequency:

Measurement Record:

Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
9KHz to 1GHz	RBW=100KHz	-23.82	-13.0	-10.82
1GHz to 3.7GHz	RBW=1MHz	-21.67	-13.0	-8.67
3.7GHz to 10GHz	RBW=1MHz	-22.89	-13.0	-9.89

6) highest frequency

Measurement Record:

Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
9KHz to 1GHz	RBW=100KHz	-27.32	-13.0	-14.32
1GHz to 3.7GHz	RBW=1MHz	-20.17	-13.0	-7.17
3.7GHz to 10GHz	RBW=1MHz	-22.45	-13.0	-9.45



For FM(12.5k) mode:

4) lowest frequency:

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
9KHz to 1GHz	RBW=100KHz	-24.67	-13.0	-11.67
1GHz to 3.7GHz	RBW=1MHz	-21.35	-13.0	-8.35
3.7GHz to 10GHz	RBW=1MHz	-23.83	-13.0	-10.83

5) Middle frequency:

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
9KHz to 1GHz	RBW=100KHz	-23.71	-13.0	-10.71
1GHz to 3.7GHz	RBW=1MHz	-20.92	-13.0	-7.92
3.7GHz to 10GHz	RBW=1MHz	-22.67	-13.0	-9.67

6) highest frequency

Measurement Record:				
Frequency range	Measurement bandwidth	Spurious Emission Level(dBm)	Limit(dBm)	Over Limit(dB)
9KHz to 1GHz	RBW=100KHz	-22.38	-13.0	-9.38
1GHz to 3.7GHz	RBW=1MHz	-21.57	-13.0	-8.57
3.7GHz to 10GHz	RBW=1MHz	-23.85	-13.0	-10.85

The limit for 700Mhz narrow band according to part **90.543 (f)**

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610MHz shall be limited to – **70 dBW/MHz(i.e. -40dBm)** equivalent isotropically radiated power (EIRP) for wideband signals, and – **80 dBW(i.e. -50dBm) EIRP** for discrete emissions of less than 700 Hz bandwidth.

The test was performed with C4FM/ HDQPSK/FM modulation type sinal at down link and uplink, the most harmonics emission at 1559-1610MH band is -43dBm EIRP at 1597.2Mhz with downlink C4FM modulation type input.

6.2.4 Emission Mask

Test Requirement: FCC part 90.210
 90.210,table"Application Emission Mask"

Frequency band (MHz)	Mask for equipment with audio low pass filter	Mask for equipment without audio low pass filter
Below 25 ¹	A or B	A or C
25-50	B	C
72-76	B	C
150-174 ²	B, D, or E	C, D or E
150 paging only	B	C
220-222	F	F
421-512 ^{2 5}	B, D, or E	C, D, or E
450 paging only	B	G
806-809/851-854 ⁶	B	H
809-824/854-869 ³⁵	B, D	D, G.
896-901/935-940	I	J
902-928	K	K
929-930	B	G
4940-4990 MHz	L or M	L or M
5850-5925 ⁴		
All other bands	B	C

The equipment with audio low passfilter, follow Marsk were tested.

Frequency band	Marsk
806-809/851-854	B
809-824/854-869	B or G for 25K bandwidth D for 12.5K bandwidth
All other bands	B

Equipment designed to operate on 25 kilohertz bandwidth channels must meet the requirements of either Emission Mask B or G, whichever is applicable, while equipment designed to operate on 12.5 kilohertz bandwidth channels must meet the requirements of Emission Mask D. Equipment designed to operate on 25 kilohertz bandwidth channels may alternatively meet the Adjacent Channel Power limits of §90.221.

MASK B:

(b) *Emission Mask B.* For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

(1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.

(2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.

(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log(P)$ dB.

(c) *Emission Mask C.* For transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier output power (P) as follows:

(1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5 kHz, but not more than 10 kHz: At least $83 \log(f_d/5)$ dB;

(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 10 kHz, but not more than 250 percent of the authorized bandwidth: At least $29 \log(f_d^2/11)$ dB or 50 dB, whichever is the lesser attenuation;

(3) On any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log(P)$ dB.

MASK D:

(d) *Emission Mask D—12.5 kHz channel bandwidth equipment.* For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.

(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log(P)$ dB or 70 dB, whichever is the lesser attenuation.

(4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (e) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

MASK G:

(g) *Emission Mask G.* For transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

(1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 10 kHz, but no more than 250 percent of the authorized bandwidth: At least $116 \log(f_d/6.1)$ dB, or $50 + 10 \log(P)$ dB, or 70 dB, whichever is the lesser attenuation;

(2) On any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log(P)$ dB.

MASK B:

LTE Modulation:

Frequency displacement from carrier(kHz)	Attenuation below carrier:
C4FM Modulation: Channel bandwidth 10MHz, authorized bandwidth 10MHz with audio low pass filter.	
0~5M	0 dB
5.0M~10.0M	25.0 dB
8.0M ~20.0M	35.0 dB
More than 20.0M	43+10logP(W) dB

C4FM Modulation:

Frequency displacement from carrier(kHz)	Attenuation below carrier:
C4FM Modulation: Channel bandwidth 12.5kHz, authorized bandwidth 8kHz with audio low pass filter.	
0~4.0	0 dB
4.0~8.0	25.0dB
8.0~20.0	35.0dB
More than 20.0	43+10logP(W) dB

HDQPSK Modulation:

Frequency displacement from carrier(kHz)	Attenuation below carrier:
HDQPSK Modulation: Channel bandwidth 12.5kHz, authorized bandwidth 10kHz with audio low pass filter.	
0~5.0	0 dB
5.0~10.0	25.0 dB
10.0~25.0	35.0 dB
More than 25.0	43+10logP(W) dB

FM (for 12.5kHz) :

Frequency displacement from carrier(kHz)	Attenuation below carrier:
FM Modulation: Channel bandwidth 12.5kHz, authorized bandwidth 11.3kHz with audio low pass filter.	
0~5.65	0 dB
5.65~11.3	25.0 dB
11.3~28.25	35.0 dB
More than 28.25	43+10logP(W) dB

FM (for 25kHz) :

Frequency displacement from carrier(kHz)	Attenuation below carrier:
FM Modulation: Channel bandwidth 25kHz, authorized bandwidth 16kHz with audio low pass filter.	
0~8.0	0 dB
8.0~16.0	25.0 dB
16.0~40.0	35.0 dB
More than 40.0	43+10logP(W) dB



MASK D (Only for 12.5kHz):

C4FM Modulation:

Frequency displacement from carrier(kHz)	Attenuation below carrier:
C4FM Modulation: Channel bandwidth 12.5kHz, authorized bandwidth 8kHz with audio low pass filter.	
0~5.625	0 dB
5.625~12.5	7.27 ($f_d - 2.88$ kHz) dB
More than 12.5	50+10logP(W) dB or 70dB

MASK G(ONLY for 809MHz-824MHz/854-869MHz):

FM (for 25kHz) :

Frequency displacement from carrier(kHz)	Attenuation below carrier:
FM Modulation: Channel bandwidth 25kHz, authorized bandwidth 16kHz with audio low pass filter.	
0~10.0	0 dB
10.0~40.0	116 log ($f_d/6.1$) dB or 50 + 10 log (P) dB or 70 dB
More than 40.0	43+10logP(W) dB

Test Method: FCC part 2.1051

EUT Operation:

Status: Drive the EUT to maximum output power.

Conditions: Normal conditions

Application: Cellular Band RF output ports

Test Configuration:


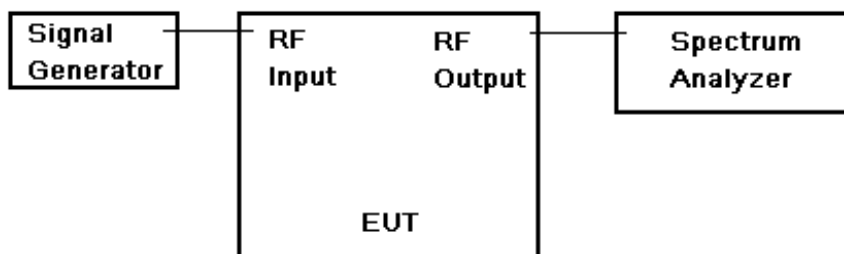


Fig.2. Conducted Spurious Emissions test configuration

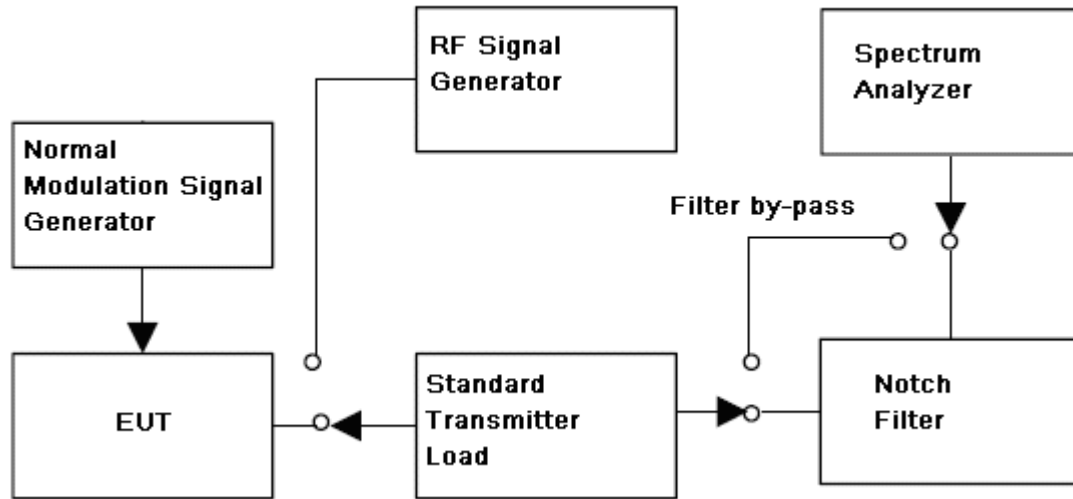

Test Procedure:

Conducted Emissions test procedure:

- a) Connect the equipment as illustrated, with the notch filter by-passed, when the output power is over the max value of the Spectrum Analyzer, add the attenuator to avoid destroying the facility.
- b) Set the center frequency of the spectrum analyzer to the assigned transmitter frequency, key the transmitter, and set the level of the carrier to the full scale reference line.
- c) do not apply any tone to modulate the EUT.
- d) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth,(base the standard, apply the different set),her is 100KHz for frequency band less than 1GHz, 1MHz for frequency over 1GHz;
 - 2) Video Bandwidth refer to standard requirement.
- e) Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
 - 1) the lowest radio frequency generated in the equipment, it can be 9KHz base the test method, here select 30MHz as lowest frequency start point;
 - 2) the highest radion frequency shall higher than 10 times of carrier frequency;
- f) Record the frequencies and levels of spurious emissions from step e)

Remark:

The notch filter is used for avoid the EUT fundamental carrier output power making the spectrum overload and the harmonic spurious brought by it.

When the EUT fundamental carrier is not enough to make the status, the notch filter could be not used.



6.2.4.1 Measurement Record:

Class A model number:

700MHz Band : Downlink: 769MHz - 775MHz

Center frequency (MHz)	Modulation type	Limit Mask type	Result
772MHz	C4FM	B	Pass
	HDQPSK	B	Pass
	FM (12.5KHz)	B	Pass
	FM(25KHz)	B	Pass

. Remark: Pretest the EUT on lowest/middle/highest frequency, found the middle frequency is worst case and report it.

700MHz Band : Uplink: 799-805MHz

Center frequency (MHz)	Modulation type	Limit Mask type	Result
802MHz	C4FM	B	Pass
	HDQPSK	B	Pass
	FM (12.5KHz)	B	Pass
	FM(25KHz)	B	Pass

. Remark: Pretest the EUT on lowest/middle/highest frequency, found the middle frequency are worst case and report it.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing (inspection) report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 1 (86-755) 26012053 1 (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 1 (86-755) 26012053 1 (86-755) 26710594 sgs.china@sgs.com

Test plot: 700MHz Band : Downlink: 769MHz - 775MHz

C4FM:

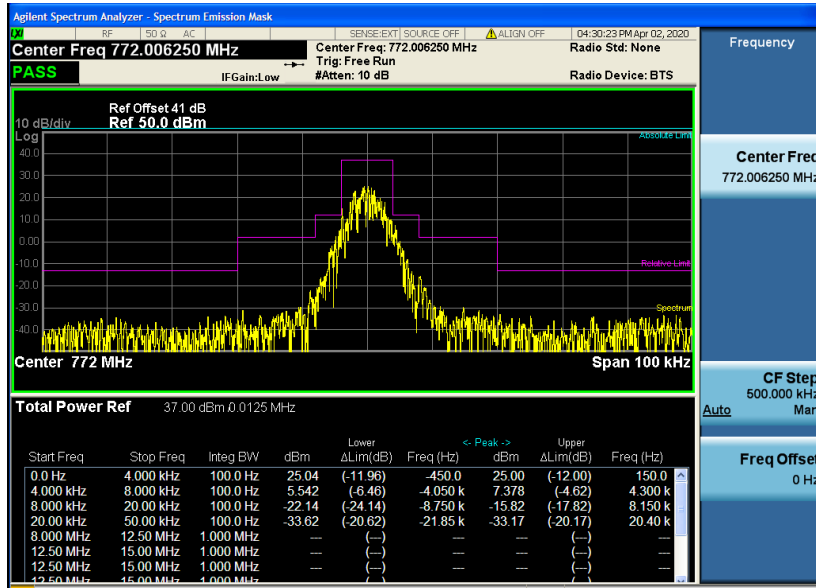

HDQPSK

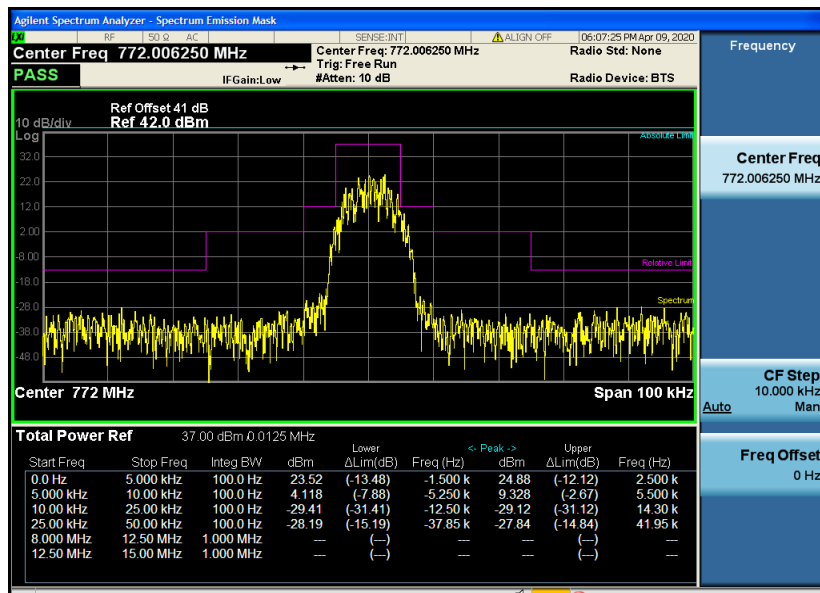


FM (12.5KHz)




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing (inspection) report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 | (86-755) 26012053 | (86-755) 26710594 | www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 | 邮编: 518057 | (86-755) 26012053 | (86-755) 26710594 | sgs.china@sgs.com

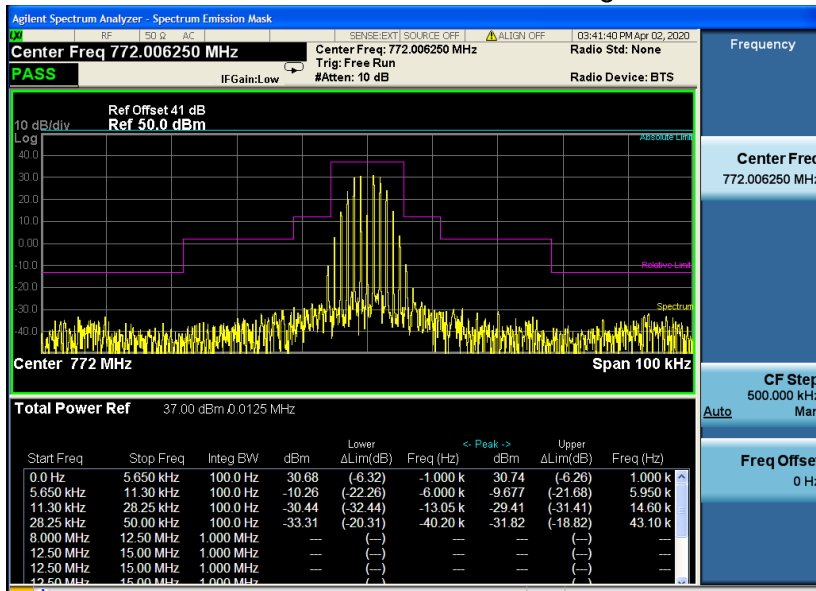


FM (25KHz)

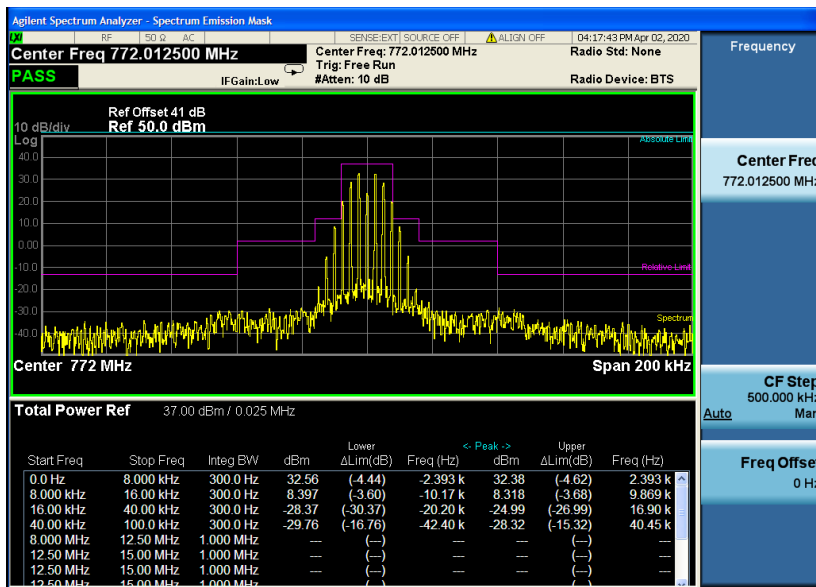


Test plot: 700MHz Band : Uplink: 799MHz - 805MHz

C4FM:

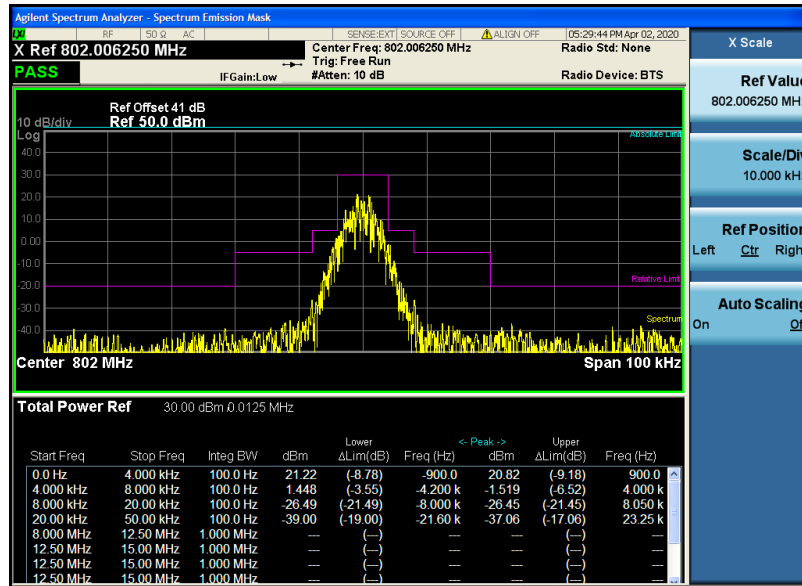

HDQPSK

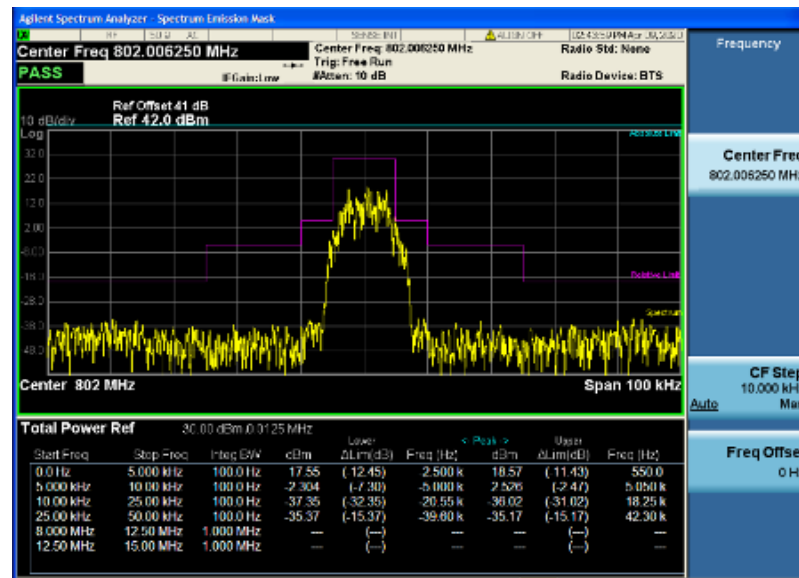


FM (12.5KHz)




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing (inspection) report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 | (86-755) 26012053 | (86-755) 26710594 | www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 | 邮编: 518057 | (86-755) 26012053 | (86-755) 26710594 | sgs.china@sgs.com

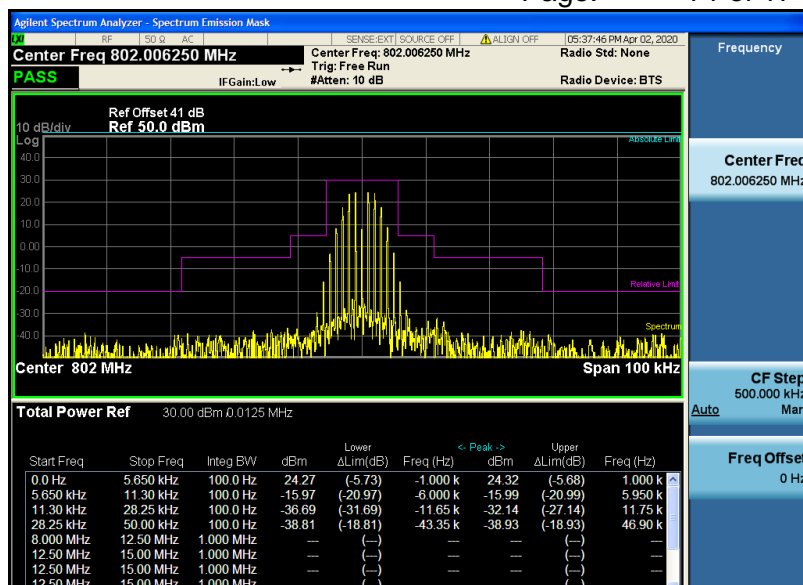


FM (25KHz)

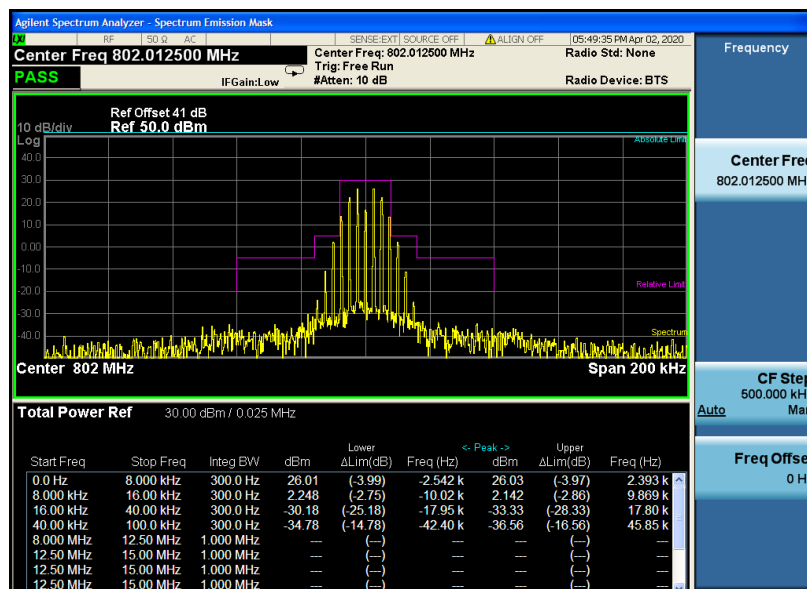


Class B model number:

1.Downlink: 758MHz ~ 768MHz

1.1 For LTE mode:

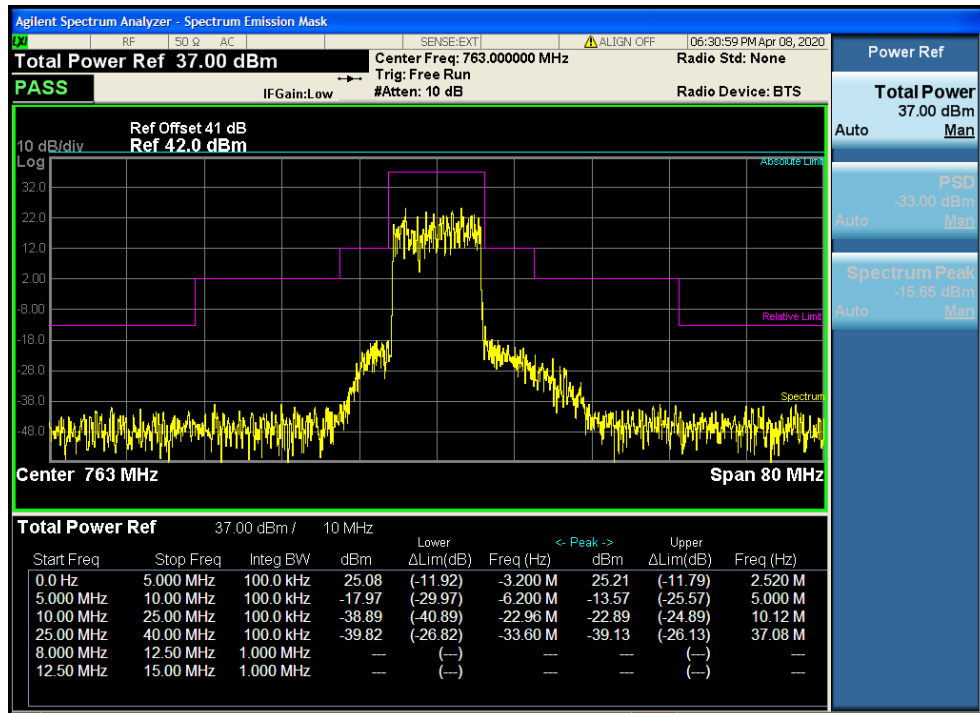


2.Uplink: 788MHz ~ 798MHz

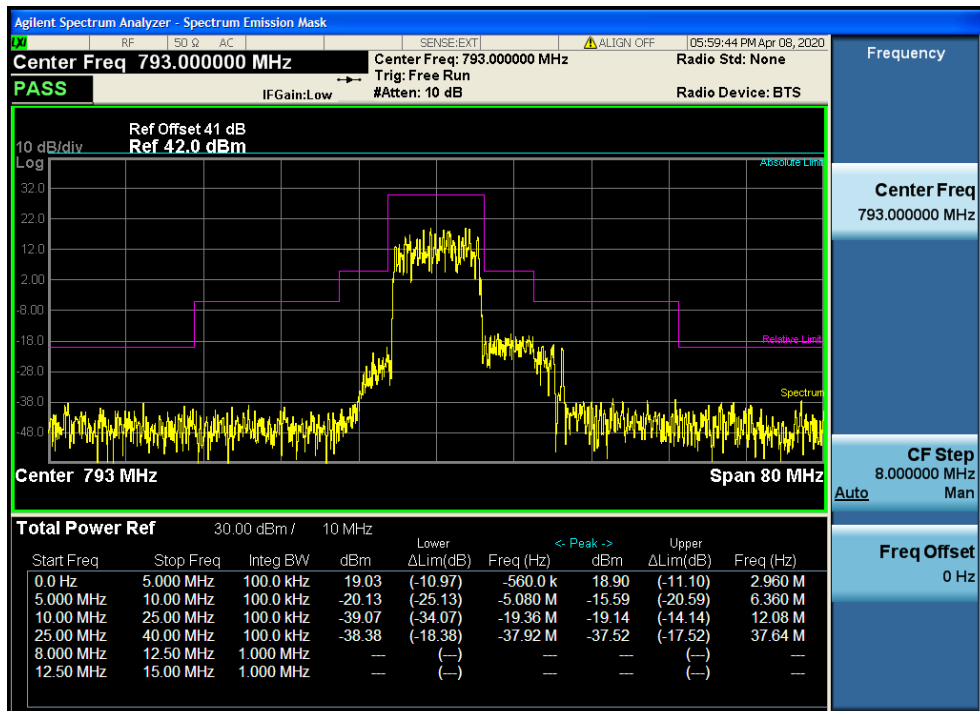


3. Downlink: 769MHz ~ 775MHz


3.1 For C4FM mode:

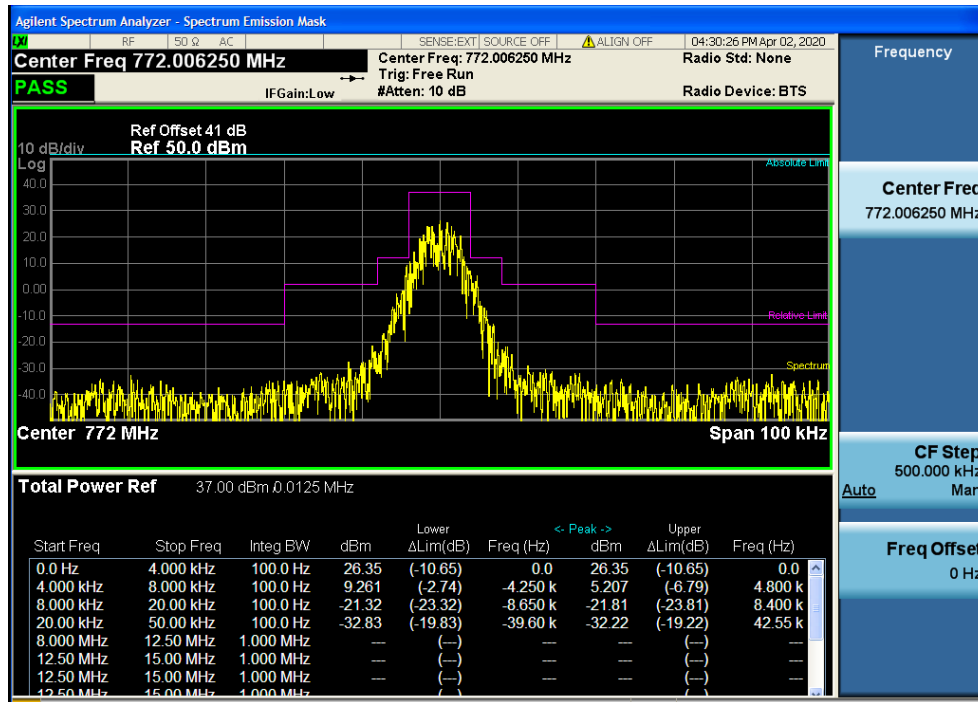


3.2 For HDQPSK mode:

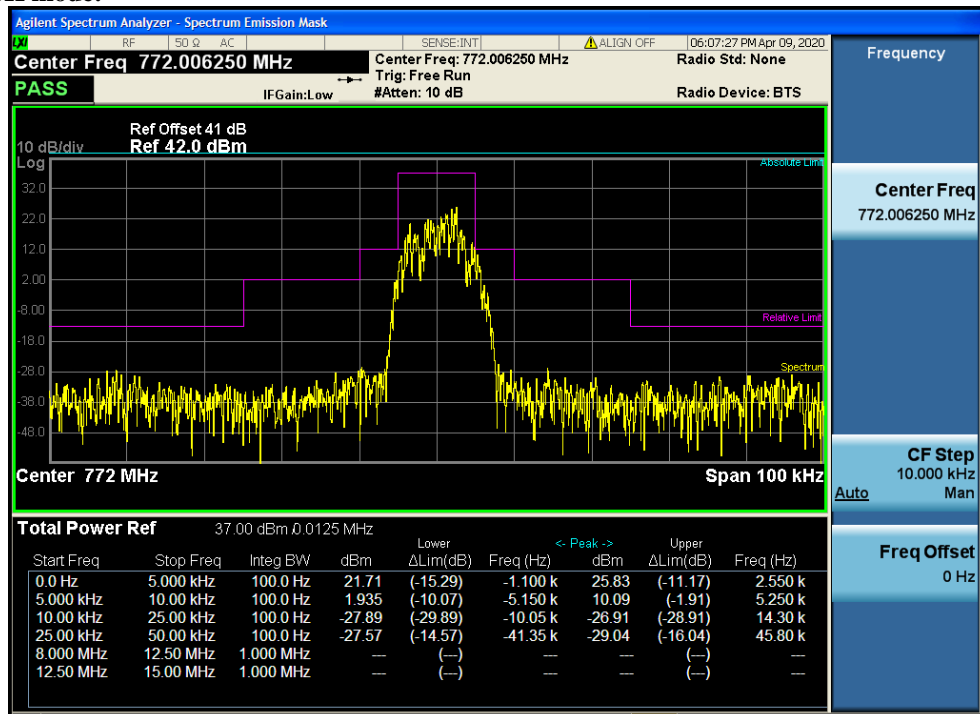

3.3 For FM(12.5k) mode:

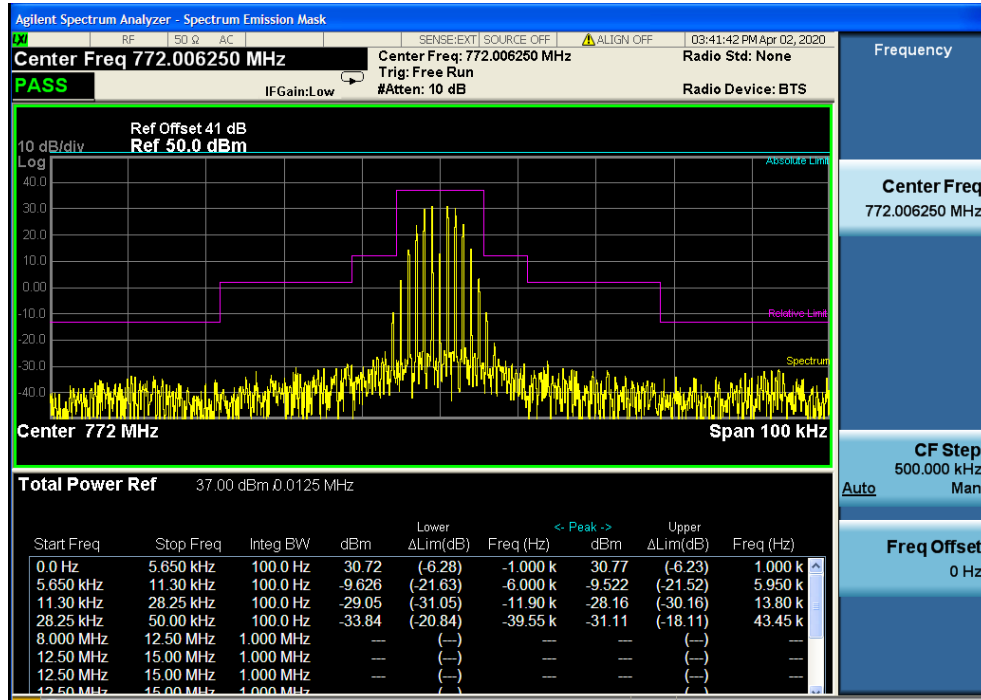

3.4 For FM(25k) mode:

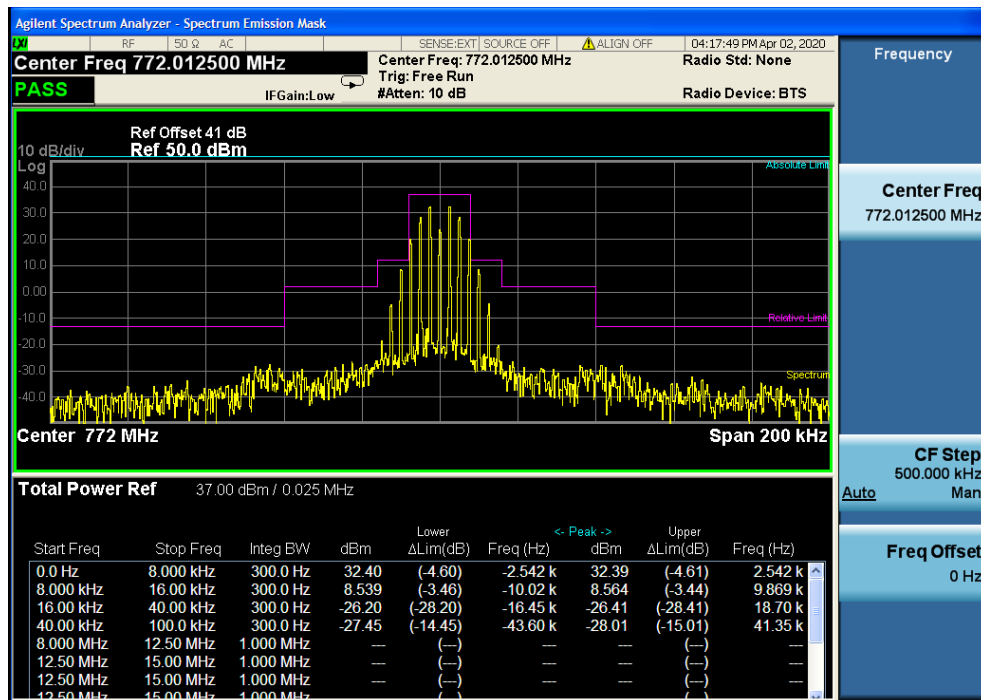

6.2.5 Intermodulation & Band edge

Test Requirement: 90.543 (c)(e)(1-5)

(e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.

(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.

(4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

Limit:

Test Method: KDB 935210 D05 V01r04

EUT Operation:

Status: Drive the EUT to maximum output power. the EUT was pretested at compression and 10dB into compression to show AGC operation, worse case results taken.

Conditions: Normal conditions

Application: Cellular Band RF output ports

Test Configuration:


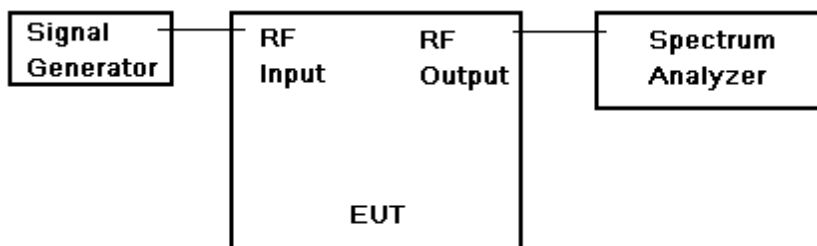


Fig.3. Band edge and Intermodulation test configuration

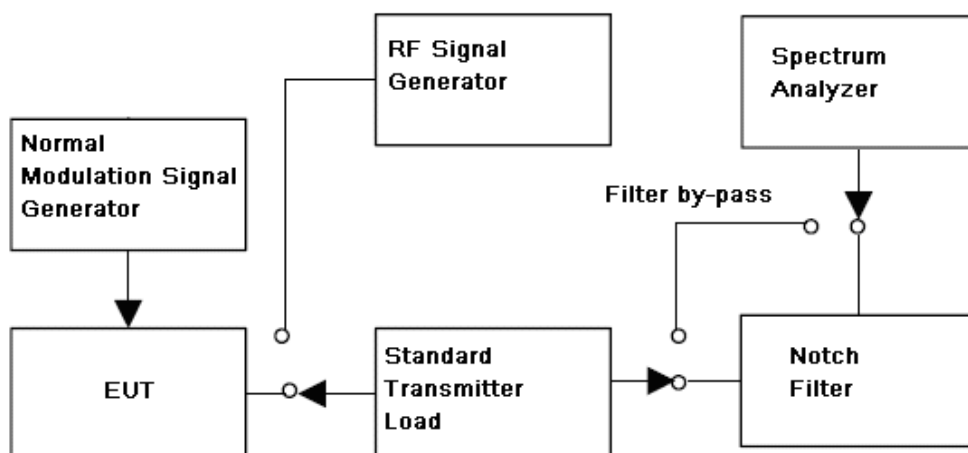

Test Procedure: Measurements were in accordance with the test methods section 3.5.2 of KDB 935210 D05

4.7 Measuring out-of-band/out-of-block (including intermodulation) and spurious emissions

Refer to the applicable rule part(s) for specified limits on unwanted (out-of-band/out-of-block and spurious) emissions (e.g., Section 90.210).

- a) Intermodulation products shall be measured using two CW signals with all available channel spacings (e.g., 12.5 kHz and 25 kHz) with the center between these channels being equal to the center frequency f_0 as determined from 4.4..

NOTE—Intermodulation-product spurious emission measurements are not required for single-channel boosters that cannot accommodate two simultaneous signals within the passband

Power measurement Method :

Guidance for performing input/output power measurements using a spectrum or signal analyzer is provided in 5.2 of KDB Publication 971168

Remark:

The notch filter is used for avoid the EUT fundamental carrier output power making the spectrum overload and the harmonic spurious brought by it.


When the EUT fundamental carrier is not enough to make the status, the notch filter could be not used.

6.2.5.1 Measurement Record:


Pretest intermodulation with the AGC threshold level and with the input signal amplitude set 3dB above AGC threshold level, find the worst case is 3dB above AGC threshold level, so only report it.

700MHz narrow band(class A) :Downlink: 769MHz to 775MHz
Channel spacings:12.5kHz,

1.1 two signal input —Lower Edge Low channel

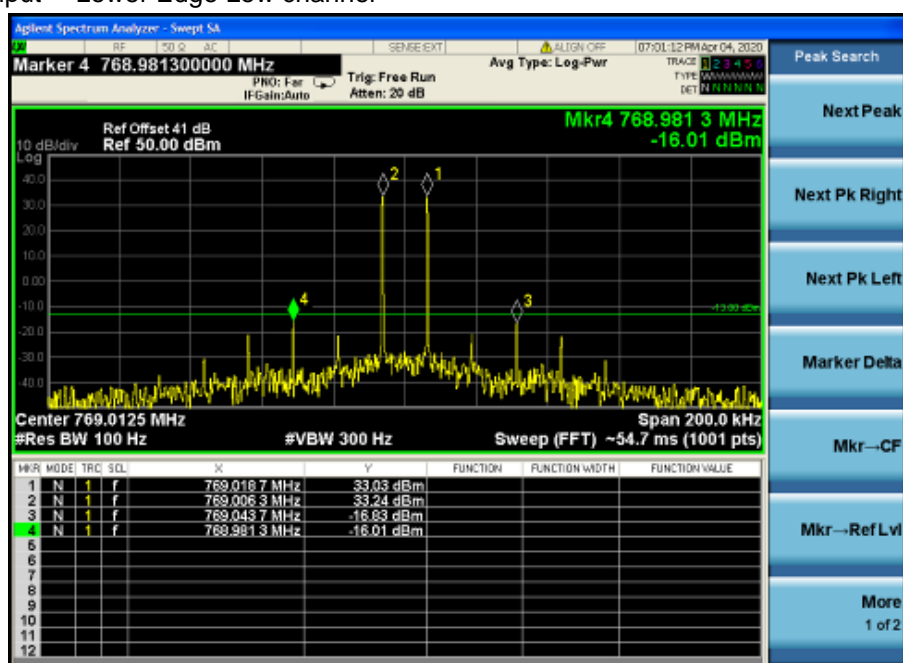


1.2 two signal input —Upper Edge high channel :

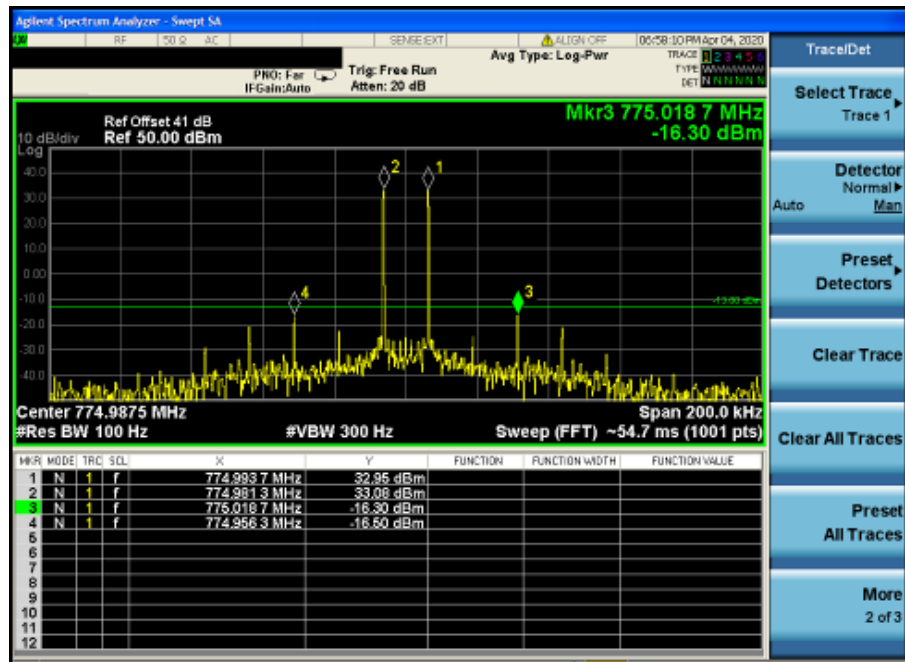


Channel spacings:25kHz

1.1 two signal input —Lower Edge Low channel

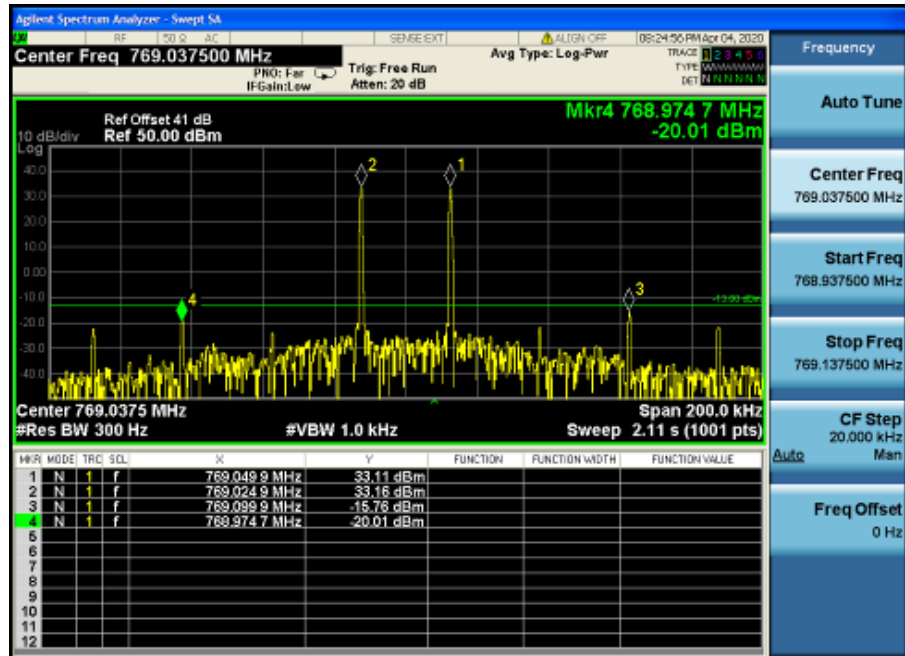


1.2 two signal input —Upper Edge high channel .

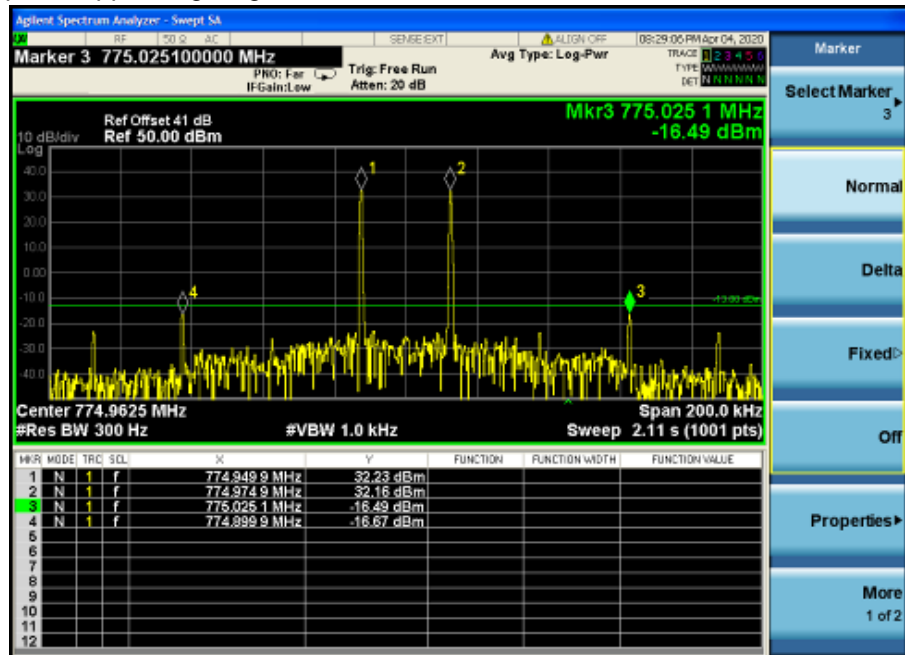


700MHz narrow band Uplink: 799MHz to 805MHz

Channel spacings:12.5kHz

1.1 two signal input —Lower Edge Low channel

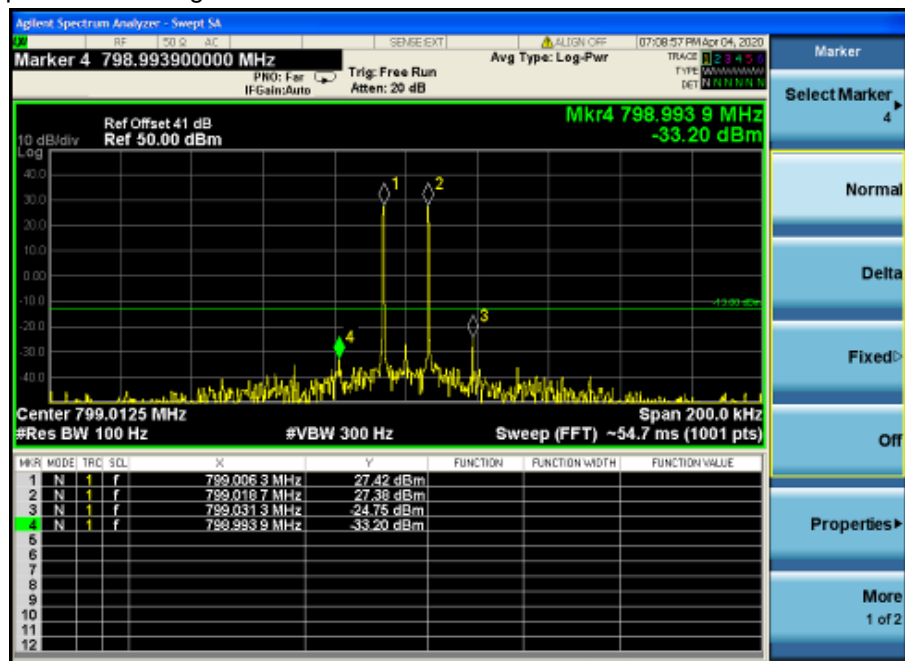

1.2 two signal input —Upper Edge high channel

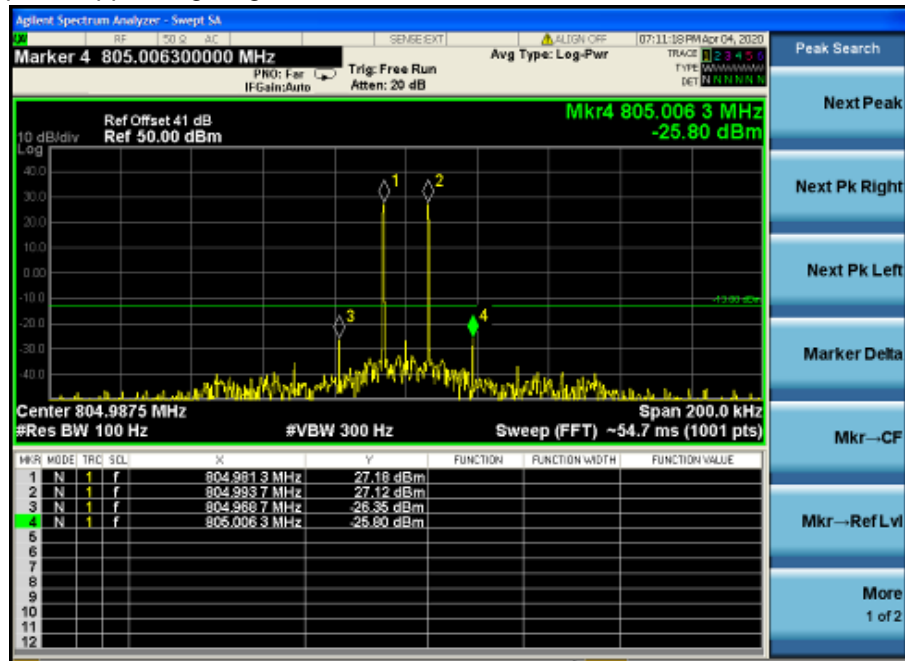

Channel spacings:25kHz

1.1 two signal input —Lower Edge Low channel

