


Appendix B. Radiated Emission Co-location Report


1. Results of Radiated Emissions for Co-located

Temperature	22°C	Humidity	55%
Test Engineer	Stim Sung / Owen Hsu	Configurations	2.4GHz + 5GHz

Horizontal

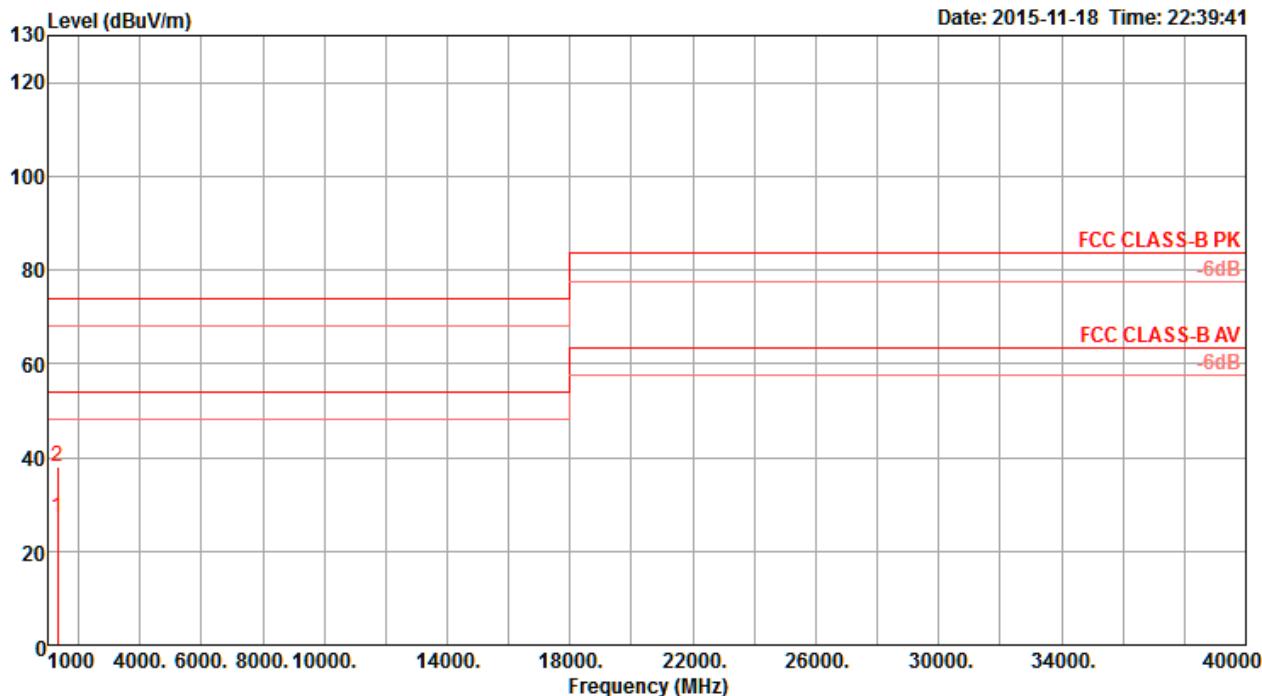

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	1323.10	27.23	54.00	-26.77	34.75	2.67	24.99	35.18	262	106	Average	HORIZONTAL
2	1323.30	38.19	74.00	-35.81	45.71	2.67	24.99	35.18	262	106	Peak	HORIZONTAL

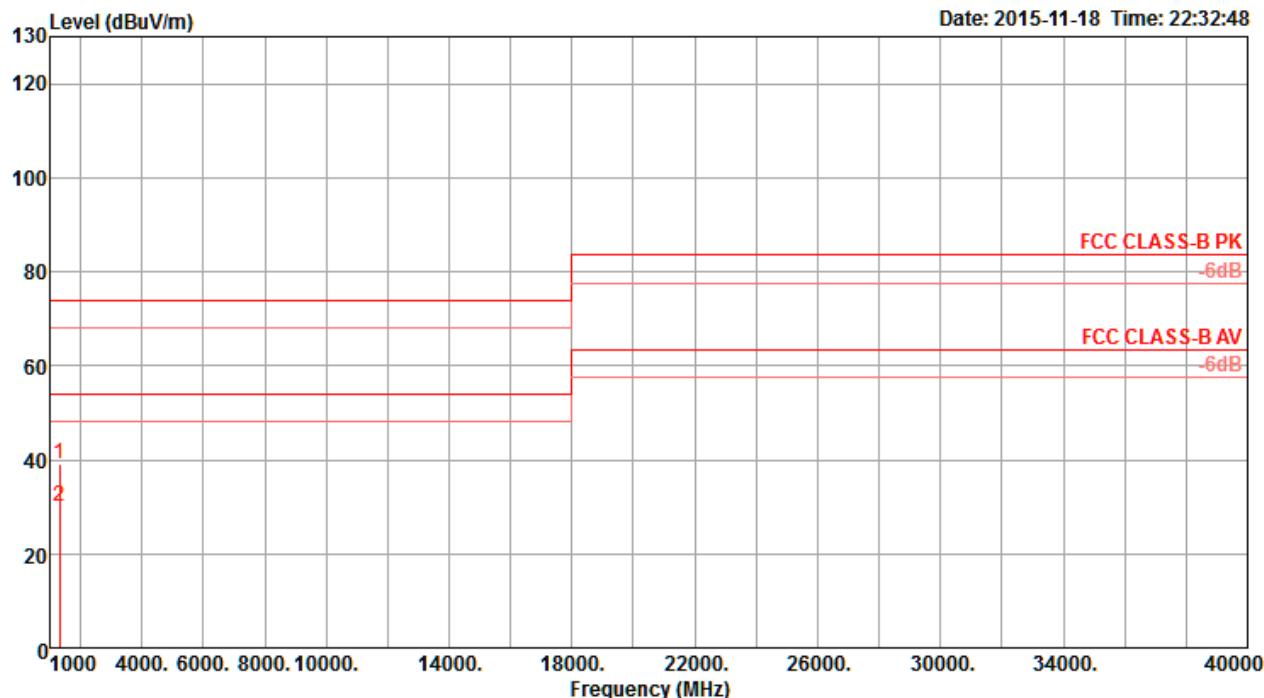Vertical


Freq MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Cable Loss Factor			Antenna Factor dB/m	Preamp Factor dB	T/Pos deg	A/Pos cm	Remark	Pol/Phase
					Cable Loss	Antenna Factor	Preamp Factor						
1 1310.04	38.95	74.00	-35.05	46.56	2.66	24.93	35.20			43	100	Peak	VERTICAL
2 1312.60	30.18	54.00	-23.82	37.77	2.66	24.94	35.19			43	100	Average	VERTICAL