

Certification of Compliance

CFR 47 Part 15 Subpart B

Test Report File No. :	05-IST-0197	Date of Issue :	June 2, 2005
Model(s)	:	OL-32TN1U	
Kind of Product	:	32" LCD Monitor	
Applicant	:	Orcom CO., LTD	
Address	:	1113-1 Dalan-Dong, Dongan-Gu, Anyang-Si, Kyonggi-Do, Korea	
Manufacturer	:	Orcom CO., LTD	
Address	:	1113-1 Dalan-Dong, Dongan-Gu, Anyang-Si, Kyonggi-Do, Korea	

Test Result

Positive

Negative

Reviewed By



S.J.Cho / EMC Group Manager

Approved By



J.H.Lee / Chief

Comment(s)

- Investigations requested : Measurement to the relevant clauses of FCC rules and regulations Part 15 Subpart B - Unintentional Radiators, Class B.
- The test report with appendix consists of 17 pages.
- The test result only responds to the tested sample.
- It is not allowed to copy this report even partly without the allowance of IST EMC Laboratory.
- This equipment as for has been shown to be capable of continued compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4 2003.



TABLE OF CONTENTS

Table of contents	2
Information of test laboratory, Environmental conditions, Power used, Product information	3
Descriptions of test	
Conducted Emission	4
Radiated Emission	5
Equipment Under Test	6
Summary	7

■ Test Conditions and Data - Emissions

◆ Conducted Emissions	0.15MHz - 30MHz	Applicable
Test Conditions / Data and Plots		8-10
◆ Radiated Emissions	30MHz - 1GHz	Applicable
Test Conditions / Data and Plots		11-13

Appendix	A. The Photos of Test Setup	14-15
	B. The Photos of Equipment Under Test	16-17

Note:

INFORMATIONS OF TEST LABORATORY

EMC LABORATORY of IST Co., Ltd. (**FCC Filing Lab.**)
San 21-8, Goan-Ri, Baekam-Myun, Yongin-City
Kyonggi-Do, 449-860, Korea
TEL : +82 31 333 4093 FAX : +82 31 333 4094

ENVIRONMENTAL CONDITIONS

Temperature 21.0 °C
Humidity 48 %
Atmospheric pressure 1004 mbar

POWER SUPPLY SYSTEM USED

Power supply system AC 120Vac, 60Hz
(Refer to the product information)

PRODUCT INFORMATION

- The Equipment Under Test(EUT) is LCD Monitor of Orcom Co., LTD. (FCC ID : PXQOL-32T)

Power Source	AC 100V ~ 240V, 50/60Hz
Power Consumption	135W
Screen Size	32" (HD)
Number of Pixels	1366 (H) x 768 (V)
Pixel Pitch	170.25μm x 510.75μm x RGB
Input Terminal	DVI, RGB, Audio(RCA, Ear Jack), Video, Component, S-Video Antenna
Output Terminal	Speaker
Dimension (WxHxD)	940mm x 200mm x 545mm (Net) 1070mm x 267mm x 636mm (packed)
Weight	24Kg (Net) 27Kg (packed)
LCD panel	LC320W01 A6 (LG Philips)

- EMC suppression device is not used during the test.
- Please refer to user's manual.


DESCRIPTIONS OF TEST

Conducted Emissions:


The measurement were performed over the frequency range of 0.15MHz to 30MHz using a $50\Omega/50\mu\text{H}$ LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10KHz or for "quasi-peak" & "Average" within a bandwidth of 9KHz.

-Procedure of Test

The line-conducted facility is located inside a shielded room No.1. A 1m X 1.5m wooden table 80cm height is placed 40cm away from the vertical wall and 1.5m away from the other wall of the shielded room. The R/S ESH3-Z5 and EMCO 3825/2 LISN are bonded to bottom of the shielded room. The EUT is located on the wooden table with distance more than 80cm from the LISN and powered from the EMCO LISN. The peripheral equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the EMCO LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating conditions. The RF output of the LISN was connected to the R/S receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using Quasi-Peak mode by manual measurement, after scanned by automatic Peak mode for frequency range from 0.15 to 30MHz. The bandwidth of the receiver was set to 10kHz. The EUT, peripheral equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

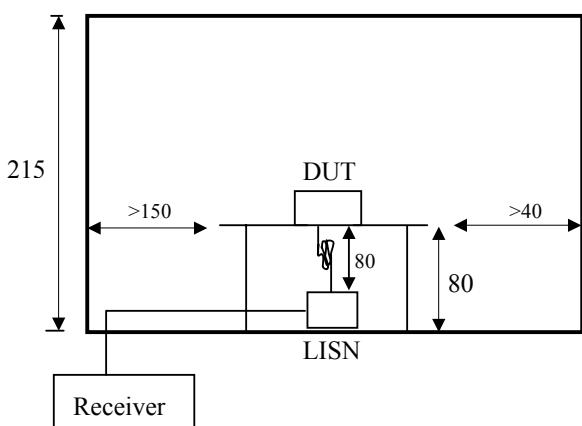

< Side View >

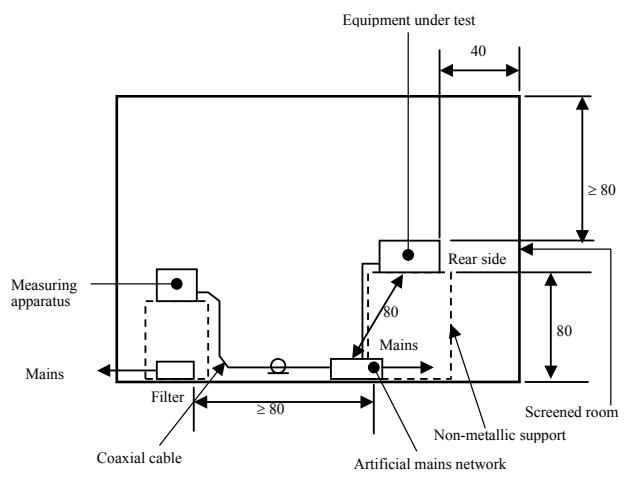

< Concept Drawing >


DESCRIPTION OF TEST

Radiated Emissions:

The measurement was performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurement was made with the detector set for "quasi-peak" within a bandwidth of 120KHz.

-Procedure of Test

Preliminary measurements were made at 3 meter using bi-conical and log-periodic antennas, and spectrum analyzer to determine the frequency producing the max. emission in anechoic chamber. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turn-table azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30MHz to 300MHz using S/B bi-conical antenna and 300 to 1000MHz using S/B log-periodic antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made at open site with 3-meters test distance using S/B bi-log antenna or horn antenna. The OATS have been verified in regular for its normalized site attenuation. The test equipment was placed on a wooden table. Sufficient time for the EUT, peripheral equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, peripheral equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, peripheral equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or peripheral equipment and changing the polarity of the antenna, whichever determined the worst-case emission.

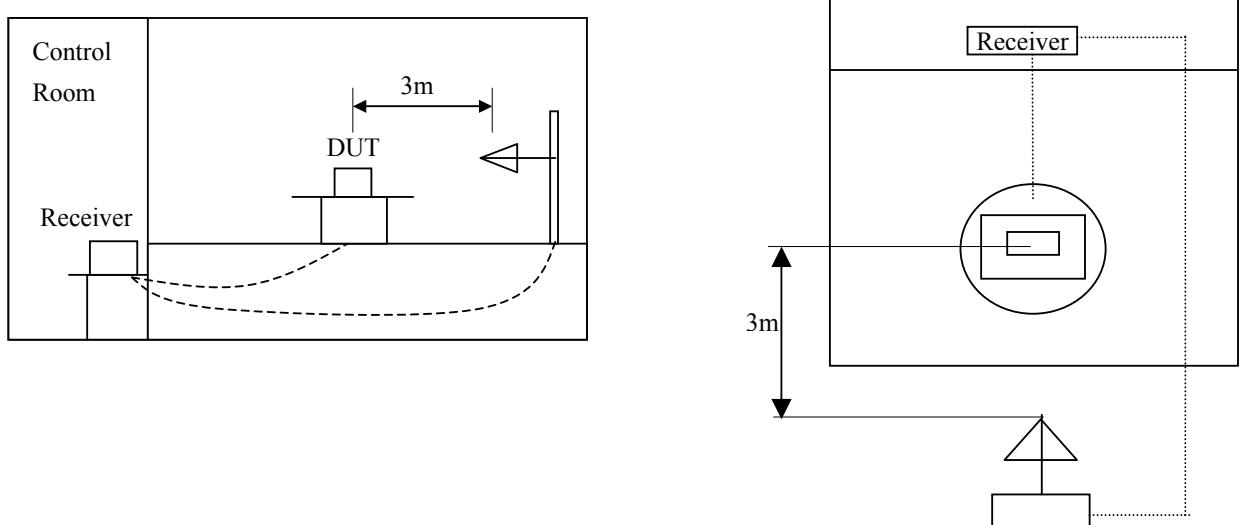

Equipment Under Test

EUT Type :

- Table-Top.
- Floor-Standing.
- Table-Top and Floor-Standing(Combination).

Operation - mode of the E.U.T. :

The equipment under test was operated during the measurement under following conditions :

- Standby Mode
- Operational Condition(RGB) :
 - 640x480, 60Hz
 - 800x600, 60Hz
 - 1024x768, 60Hz

The test results of followings are the representative of worst case emissions for the available resolution can be adjusted.

It is investigated the emission characteristic for DVI and RGB mode.

Configuration of the equipment under test :

Following peripheral devices and interface cables were connected during the measurement :

Equipment	Type	Brand	Serial No.	FCC Compliance Info.
PC	HP Pavilion t328k	HP	KRJ33802CS	DoC
Keyboard	5219	HP	BN32403469	E5XKB5209
PS/2 Mouse	N3+Opitcal	HP	K032925351	DoC
Printer	A0302380	Northern Telecom	2516S60951	BS46XU225C-L
Serial Mouse	M-M28	Logitech	LCA53305547	DZL210365

Connecting Interface Cables :

- Unshielded AC power cable : 1.8 m
- Shielded monitor's signal cable (with two ferrite core) : 1.5 m
- Shielded Printer's signal cable (with one ferrite core) : 1.8 m

Note :

SUMMARY

Emissions

■ Conducted Emission

The requirements are
Minimum limit margin
Maximum limit exceeding

MET
3.1dB at 0.392MHz

Not MET

Remarks : Limits are kept with more 3dB margin.

With average detect mode at Live phase.

Find the test data in following pages 9 to 10.

■ Radiated Emission

The requirements are
Minimum limit margin
Maximum limit exceeding

MET
3.1dB at 787.5MHz

Not MET

Remarks : Limits are kept with more 3dB margin.

At 1024x768, 800x600 60Hz

Find the test data in following page 12-13.

test Date

Begin of testing : May 30, 2005

End of testing : May 31, 2005

Note :

Prepared By



- means the test is applicable,
- is not applicable.

I.Y.Lee / Research Engineer

TEST CONDITIONS AND DATA

Conducted Emissions

[Applicable]

◆ Test Equipment Used

Model Name	Description	Manufacture	Calibration Date	Serial Number
ESH 3	Test Receiver	Rohde & Schwarz	Jul. 15, 2004	892108/018
ESH 3-Z5	Artificial mains network	Rohde & Schwarz	Jul. 15, 2004	862770/025
ESH 3-Z2	Transient limiter	Rohde & Schwarz	Jul. 15, 2004	357.8810.52

◆ Test Accessories Used

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato


◆ Test Program Scrolling "H" patterns on the Windows

◆ Test Date May 30, 2005

◆ Test Area Conducted room No.1

Note : The equipment used is calibrated in regular for every year.


Conducted Emissions

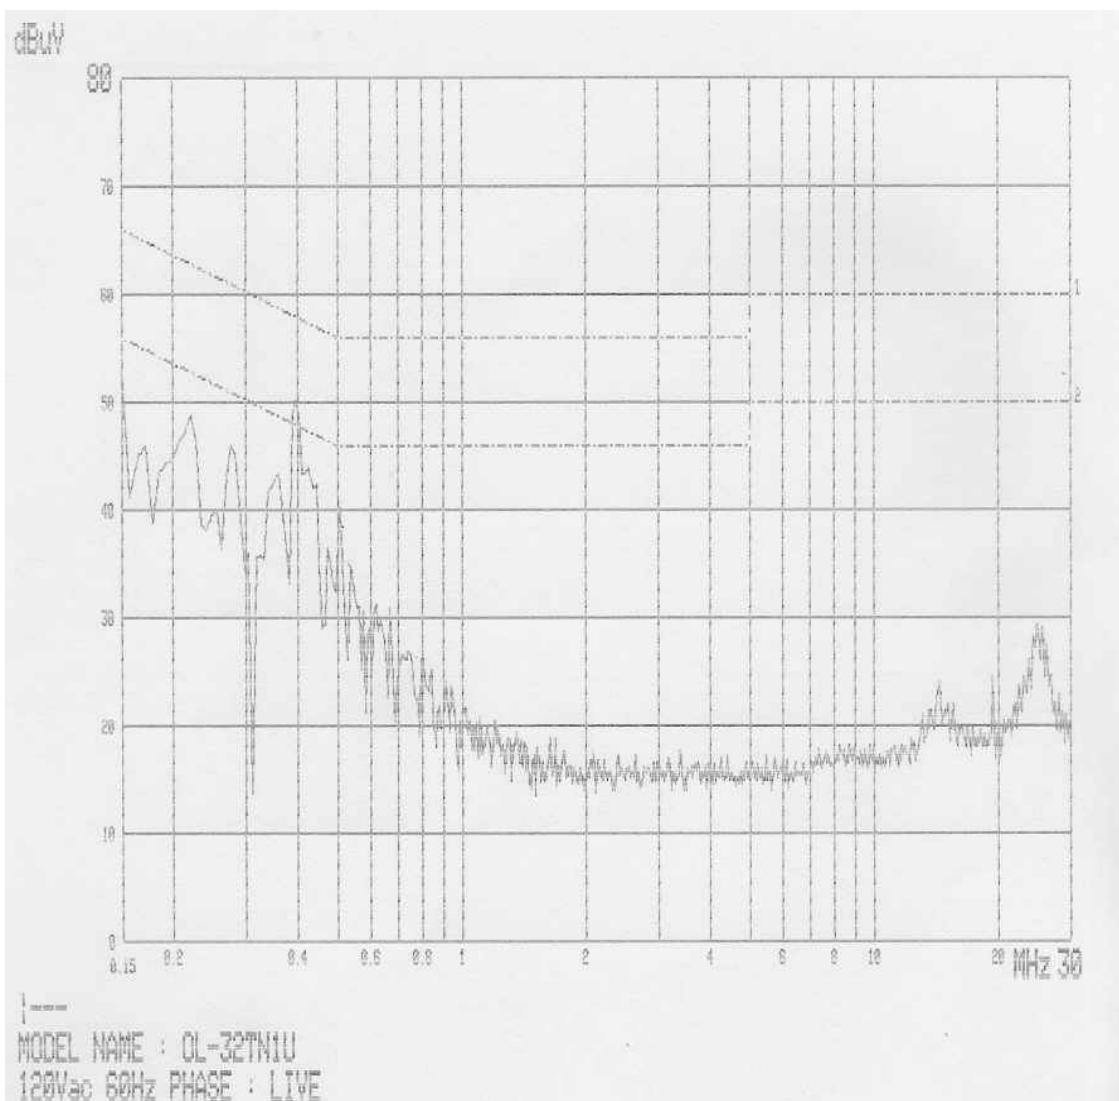

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Insertion Loss [dB]	Cable Loss [dB μ V]	Result [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.150	52.6	24.4	66.0	56.0	0.1	0.5	53.2	25.0	12.8	31.0
0.217	44.6	23.3	62.9	52.9	0.1	0.4	45.1	23.8	17.8	29.1
0.279	43.9	40.1	60.8	50.8	0.1	0.4	44.4	40.6	16.4	10.2
0.392	47.4	44.4	58.0	48.0	0.1	0.4	47.9	44.9	10.1	3.1

Note :

Conducted Emissions

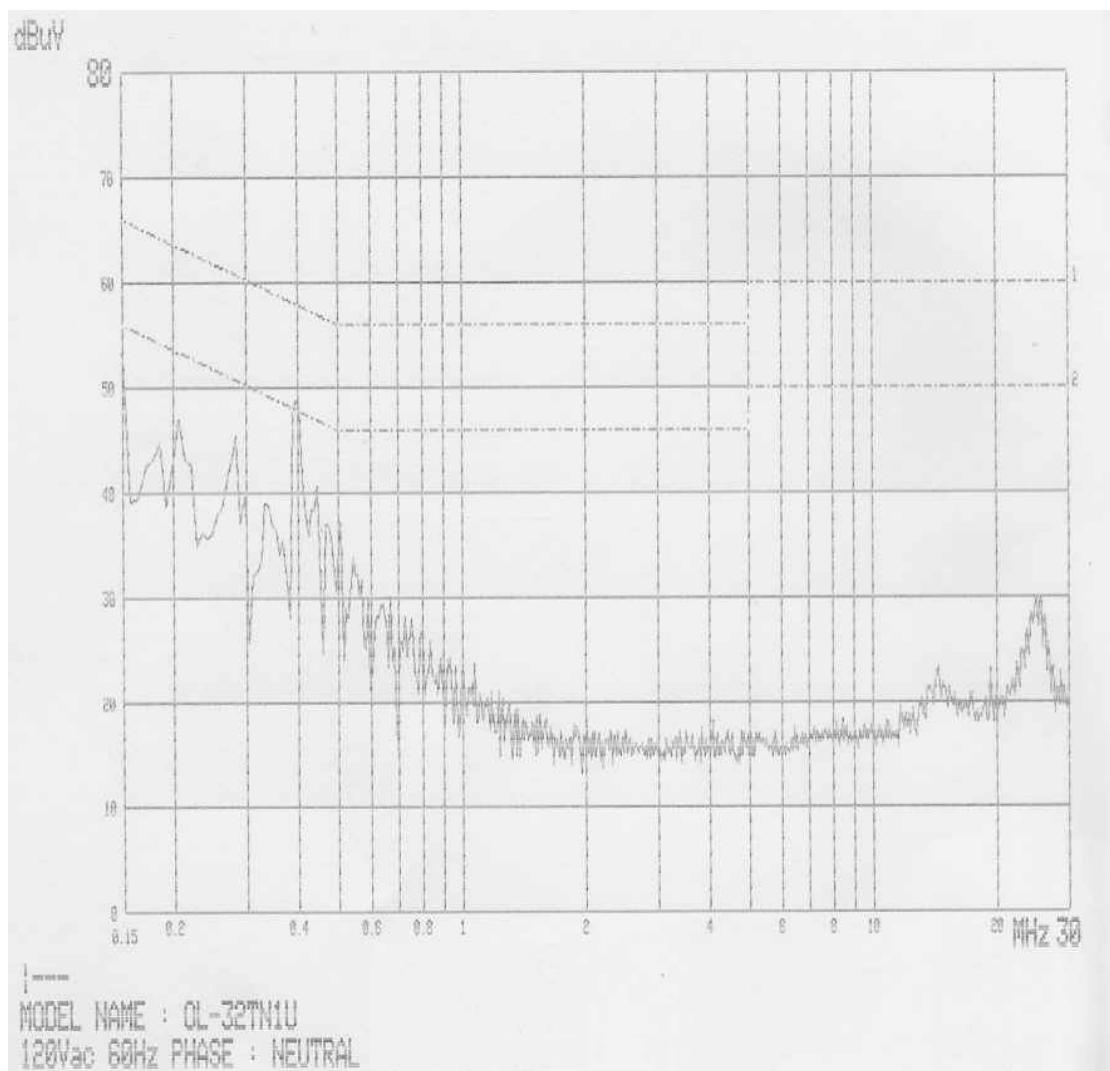

Freq. [MHz]	Measurement [dB μ V]		Limit [dB μ V]		Insertion Loss	Cable Loss	Result [dB μ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.150	50.4	21.9	66.0	56.0	0.1	0.5	51.0	22.5	15.0	33.5
0.215	44.6	24.3	63.0	53.0	0.1	0.4	45.1	24.8	17.9	28.2
0.279	41.8	40.1	60.8	50.8	0.1	0.4	42.3	40.6	18.5	10.2
0.392	46.6	44.2	58.0	48.0	0.1	0.4	47.1	44.7	10.9	3.3

Note :

TEST CONDITIONS AND DATA

Radiated Emission

[Applicable]

◆ Test Equipment Used

Name	Type	Manufacturer	Calibration. Date	Serial Number
ESVP	Test Receiver	Rohde & Schwarz	Jul. 15, 2004	861744/004
VULB 9160	Antenna	Schwarzbeck	Jul. 10, 2004	3047

◆ Test Accessories Used

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

◆ Test Program Scrolling "H" patterns on the Windows

◆ Test Date May 31, 2005

◆ Test Area Open site No.2

Note : The equipment used is calibrated in regular for every year.

Radiated Emissions

Mode	Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB/m]	Cable Loss [dB]	Polar. [H/V]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
640x480, 60Hz	66.2	19.0	10.3	1.8	V	31.1	40.0	8.9
	71.6	25.2	9.5	1.9	V	36.6	40.0	3.4
	137.8	21.9	12.5	2.8	H	37.2	43.5	6.3
	143.2	24.6	12.7	2.8	H	40.1	43.5	3.4
	196.9	22.9	9.5	3.3	H	35.7	43.5	7.8
	214.8	27.5	9.3	3.4	H	40.2	43.5	3.3
	258.8	27.7	11.2	3.9	H	42.8	46.0	3.2
	286.4	26.4	12.1	4.2	H	42.7	46.0	3.3
	323.4	24.6	13.1	4.5	H	42.2	46.0	3.8
	358.0	24.0	13.9	4.8	H	42.7	46.0	3.3
	429.5	19.9	15.4	5.4	H	40.7	46.0	5.3
	572.7	18.9	17.2	6.5	H	42.6	46.0	3.4
	644.3	16.7	19.2	6.9	H	42.8	46.0	3.2
	715.9	14.5	20.7	7.4	H	42.6	46.0	3.4
	787.5	12.7	22.2	7.9	H	42.8	46.0	3.2
	930.7	11.6	22.2	8.9	V	42.7	46.0	3.3
800x600, 60Hz								
	66.2	18.9	10.3	1.8	V	31.0	40.0	9.0
	71.6	25.3	9.5	1.9	V	36.7	40.0	3.3
	137.8	21.9	12.5	2.8	H	37.2	43.5	6.3
	143.2	24.5	12.7	2.8	H	40.0	43.5	3.5
	196.9	23.2	9.5	3.3	H	36.0	43.5	7.5
	214.8	27.5	9.3	3.4	H	40.2	43.5	3.3
	258.8	27.6	11.2	3.9	H	42.7	46.0	3.3
	286.4	26.4	12.1	4.2	H	42.7	46.0	3.3
	323.4	24.7	13.1	4.5	H	42.3	46.0	3.7
	358.0	24.0	13.9	4.8	H	42.7	46.0	3.3
	429.5	20.1	15.4	5.4	H	40.9	46.0	5.1
	572.7	19.1	17.2	6.5	H	42.8	46.0	3.2
	644.3	16.6	19.2	6.9	H	42.7	46.0	3.3
	715.9	14.2	20.7	7.4	H	42.3	46.0	3.7
	787.5	12.8	22.2	7.9	H	42.9	46.0	3.1
	930.7	11.4	22.2	8.9	V	42.5	46.0	3.5

Radiated Emissions

Mode	Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB/m]	Cable Loss [dB]	Polar. [H/V]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
1024x768, 60Hz	66.2	18.8	10.3	1.8	V	30.9	40.0	9.1
	71.6	25.4	9.5	1.9	V	36.8	40.0	3.2
	137.8	21.8	12.5	2.8	H	37.1	43.5	6.4
	143.2	24.7	12.7	2.8	H	40.2	43.5	3.3
	196.9	23.0	9.5	3.3	H	35.8	43.5	7.7
	214.8	27.4	9.3	3.4	H	40.1	43.5	3.4
	258.8	27.7	11.2	3.9	H	42.8	46.0	3.2
	286.4	26.5	12.1	4.2	H	42.8	46.0	3.2
	323.4	24.4	13.1	4.5	H	42.0	46.0	4.0
	358.0	24.1	13.9	4.8	H	42.8	46.0	3.2
	429.5	19.8	15.4	5.4	H	40.6	46.0	5.4
	572.7	19.0	17.2	6.5	H	42.7	46.0	3.3
	644.3	16.4	19.2	6.9	H	42.5	46.0	3.5
	715.9	14.6	20.7	7.4	H	42.7	46.0	3.3
	787.5	12.8	22.2	7.9	H	42.9	46.0	3.1
	930.7	11.7	22.2	8.9	V	42.8	46.0	3.2

Note:

Appendix A. The Photos of Test Setup



Conducted Emissions - Front View



Conducted Emissions - Rear View

Appendix A. The Photos of Test Setup



Radiated Emissions - Front View



Radiated Emissions - Rear View

Appendix B. The Photos of EUT



Front View



Rear View

Appendix B. The Photos of EUT



Right View



Left View