

TABLE OF CONTENTS

APPLICANT: PROTRONIC (FAR EAST) LTD.

FCC ID: PXVWL2002CAM

TEST REPORT CONTAINING:

PAGE 1.....	TEST EQUIPMENT LIST & TEST PROCEDURE
PAGE 2.....	TEST PROCEDURE CONTD.
PAGE 3-4.....	RADIATION INTERFERENCE TEST DATA
PAGE 5.....	OCCUPIED BANDWIDTH
PAGE 6.....	OCCUPEID BANDWIDTH PLOT
PAGE 7.....	POWERLINE CONDUCTED
PAGE 8.....	POWERLINE CONDUCTED PLOTS - LINE 1
PAGE 9.....	POWERLINE CONDUCTED PLOTS - LINE 2
PAGE 10.....	BANDEdge PLOT

EXHIBIT ATTACHMENTS:

EXHIBIT 1.....	FCC ID LABEL SAMPLE & LOCATION
EXHIBIT 2.....	BLOCK DIAGRAM
EXHIBIT 3A-3C.....	SCHEMATICS
EXHIBIT 4.....	INSTRUCTION MANUAL
EXHIBIT 5.....	FRONT VIEW EXTERNAL PHOTO
EXHIBIT 6.....	REAR VIEW EXTERNAL PHOTO
EXHIBIT 7A-7C.....	COMPONENT SIDE INTERNAL PHOTOS
EXHIBIT 8A-8C.....	COPPER SIDE INTERNAL PHOTOS
EXHIBIT 9.....	CIRCUIT DESCRIPTION
EXHIBIT 10.....	TEST SETUP PHOTOGRAPH - RADIATED
EXHIBIT 11.....	TEST SETUP PHOTOGRAPH - POWERLINE

APPLICANT: Protronic (Far East) Ltd.

FCC ID: PXVWL2002CAM

REPORT #: P\PROTRON\944H1\944H1RPT.doc

PAGE: TABLE OF CONTENTS LIST

TEST EQUIPMENT LIST

1. Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/ preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02, S/N 3008A00372
2. Biconical Antenna: Eaton Model 94455-1, S/N 1057,
3. Biconical Antenna: Electro-Metrics Model BIA-25, S/N 1171
4. Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632
5. Log-Periodic Antenna: Electro-Metrics Model LPA-30, S/N 409
6. Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180, 1-18 GHz, S/N 2319
7. 18-26.3GHz Systron Donner Standard Gain Horn #DBE-520-20
8. Horn 40-60GHz: ATM Part #19-443-6R
9. Line Impedance Stabilization Network: Electro-Metrics Model EM-7820, w/NEMA Adapter S/N 2682
10. Temperature Chamber: Tenney Engineering Model TTRC, S/N 11717-7
11. Frequency Counter: HP Model 5385A, S/N 3242A07460
12. Peak Power Meter: HP Model 8900C, S/N 2131A00545
13. Open Area Test Site #1-3meters
14. Signal Generator: HP 8640B, S/N 2308A21464
15. Signal Generator: HP 8614A, S/N 2015A07428
16. Passive Loop Antenna: EMCO Model 6512, 9KHz to 30MHz, S/N 9706-1211
17. Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153
18. AC Voltmeter: HP Model 400FL, S/N 2213A14499
19. Digital Multimeter: Fluke Model 8012A, S/N 4810047
20. Digital Multimeter: Fluke Model 77, S/N 43850817
21. Oscilloscope: Tektronix Model 2230, S/N 300572

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC. The UUT was transmitting a test signal during the testing.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a preselector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz up to 1.0GHz and 1.0MHz with a video BW of 3.0MHz above 1.0GHz. The ambient temperature of the UUT was 83°F with a humidity of 77%.

APPLICANT: Protronic (Far East) Ltd.

FCC ID: PXVWL2002CAM

REPORT #: P\PROTRON\944H1\944H1RPT.doc

PAGE: 1 OF 10

APPLICANT: PROTRONIC (FAR EAST) LTD.
FCC ID: PXVWL2002CAM

TEST PROCEDURES CONTINUED

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz)	METER READING + ACF = FS
33	20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-1992 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10kHz with an appropriate sweep speed. The ambient temperature of the UUT was 83°F with a humidity of 77%.

ANSI STANDARD C63.4-1992 10.1.7 MEASUREMENT PROCEDURES: The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The UUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSIC63.4-1992 with the EUT 40 cm from the vertical ground wall.

APPLICANT: PROTRONIC (FAR EAST) LTD.

FCC ID: PXVWL2002CAM

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NUMBER: 15.249, 15.209

REQUIREMENTS:

FIELD STRENGTH	FIELD STRENGTH	S15.209
of Fundamental: 902-928 MHZ 2.4-2.4835 GHz 94 dBuV/m @3m	of Harmonics 88 -216 MHz 216 -960 MHz 54 dBuV/m @3m	30 - 88 MHz 40 dBuV/m @3M 88 -216 MHz 43.5 216 -960 MHz 46 ABOVE 960 MHz 54dBuV/m

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

TEST RESULTS: This unit DOES meet the FCC requirements.

TEST DATA:

Tuned Frequency	Emission Frequency	Meter Reading	Ant. Polarity	Coax Loss	Correction Factor	Field Strength	Margin
MHz	MHz	dBuv		dB	dB	dBuV/m	dB
2410.30	2,410.30	51.6	V	3.33	28.90	83.83	10.17
2410.30	4,820.60	12.1	V	5.95	33.81	51.86	2.14
2410.30	7,231.00	8.3	V	7.04	36.04	51.38	2.62
2410.30	9,641.30	7.3	V	8.73	37.75	53.78	0.22
2433.20	2,433.20	51.9	V	3.35	28.92	84.17	9.83
2433.20	4,866.40	13.0	V	6.01	33.86	52.87	1.13
2433.20	7,299.70	8.0	V	7.12	36.17	51.29	2.71
2433.20	9,732.90	7.2	V	8.80	37.94	53.94	0.06
2472.20	2,472.20	50.7	V	3.38	28.96	83.04	10.96
2472.20	4,944.40	11.3	V	6.12	33.93	51.35	2.65
2472.20	7,416.60	8.1	V	7.27	36.40	51.77	2.23
2472.20	9,888.80	6.0	H	8.92	38.26	53.18	0.82

APPLICANT: Protronic (Far East) Ltd.

FCC ID: PXVWL2002CAM

REPORT #: P\PROTRON\944H1\944H1RPT.doc

PAGE: 3 OF 10

APPLICANT: PROTRONIC (FAR EAST) LTD.
FCC ID: PXVWL2002CAM
NAME OF TEST: RADIATION INTERFERENCE

TEST PROCEDURE: ANSI STANDARD C63.4-1992 using a Hewlett Packard Model 8566B spectrum analyzer, a Hewlett Packard Model 85685A Preselector, a Hewlett Packard Model 85650A Quasi-Peak adapter, and an appropriate antenna. The bandwidth of spectrum analyzer was 100 kHz with an appropriate sweep speed. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth(10) harmonic of the fundamental.

PERFORMED BY: JOSEPH SCOGLIO DATE: 9/11/01

APPLICANT: Protronic (Far East) Ltd.
FCC ID: PXVWL2002CAM
REPORT #: P\PROTRON\944H1\944H1RPT.doc
PAGE: 4 OF 10

APPLICANT: PROTRONIC (FAR EAST) LTD.

FCC ID: PXVWL2002CAM

NAME OF TEST: Occupied Bandwidth

RULES PART NO.: 15.249

REQUIREMENTS: The field strength of any emissions appearing outside the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.249.

THE PLOTS ON THE NEXT PAGE REPRESENTS THE EMISSIONS TAKEN FOR THIS DEVICE.


METHOD OF MEASUREMENT: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division. The horizontal scale is set to 5 kHz per division.

TEST RESULTS: The unit DOES meet the FCC requirements.

PERFORMED BY: JOSEPH SCOGLIO

DATE: 9/11/01

APPLICANT: Protronic (Far East) Ltd.
FCC ID: PXVWL2002CAM
REPORT #: P\PROTRON\944H1\944H1RPT.doc
PAGE: 5 OF 10

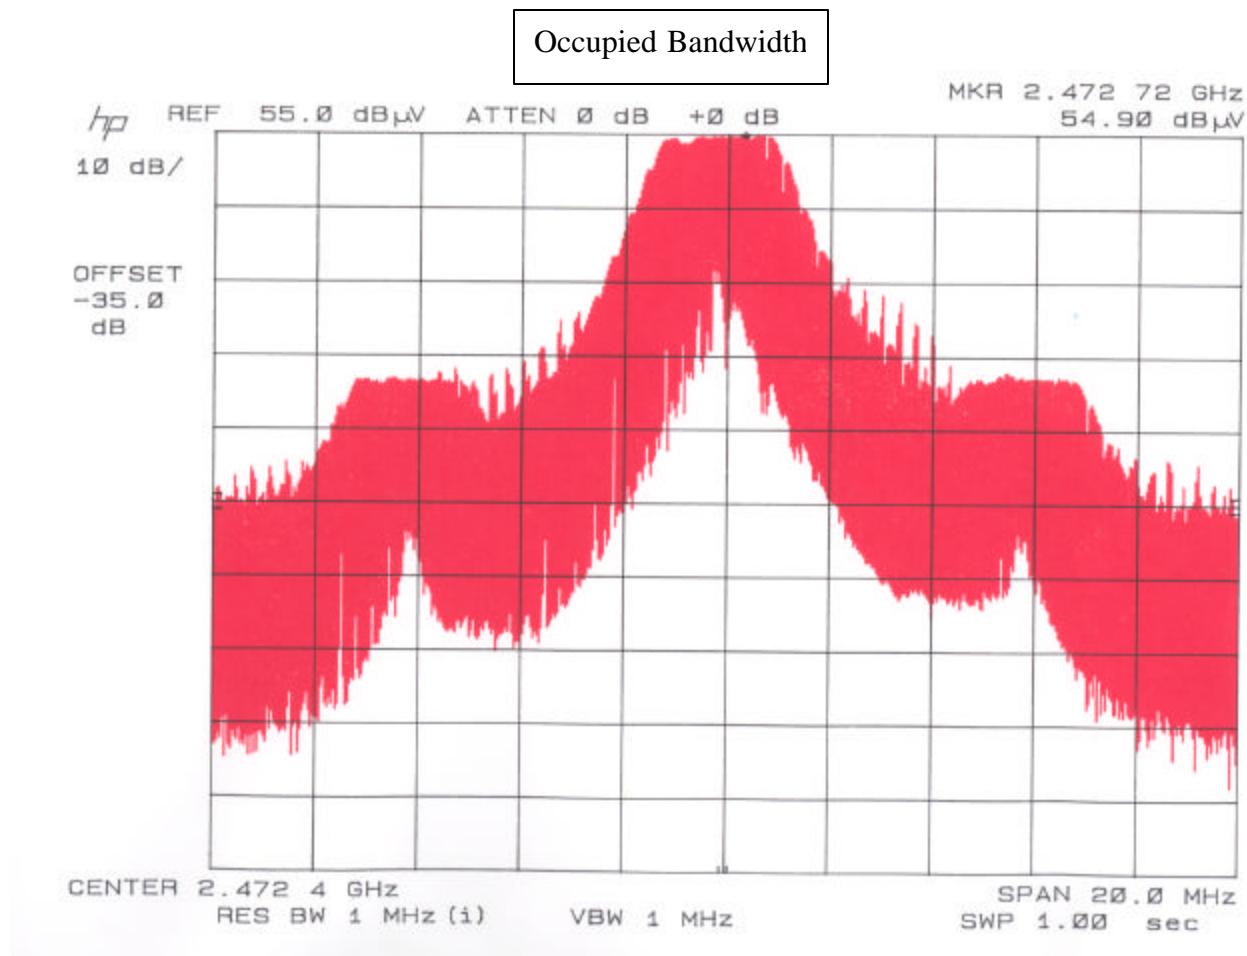

APPLICANT: Protronic (Far East) Ltd.
FCC ID: PXVWL2002CAM
REPORT #: P\PROTRON\944H1\944H1RPT.doc
PAGE: 6 OF 10

APPLICANT: PROTRONIC (FAR EAST) LTD.

FCC ID: PXVWL2002CAM

NAME OF TEST: POWER LINE CONDUCTED INTERFERENCE

RULES PART NUMBER: 15.107

MINIMUM REQUIREMENTS: FREQUENCY LEVEL
MHz uV

0.450-30	250
----------	-----

TEST PROCEDURE: ANSI STANDARD C63.4-1992

THE HIGHEST EMISSION READ FOR LINE 1 WAS 39.4 uV @ 630 kHz.

THE HIGHEST EMISSION READ FOR LINE 2 WAS 50.1 uV @ 690 kHz.


THE PLOTS ON THE NEXT PAGE REPRESENT THE EMISSIONS READ FOR POWERLINE CONDUCTED FOR THIS DEVICE.

TEST RESULTS: Both lines were observed. The measurements indicate that the unit DOES appear to meet the FCC requirements for this class of equipment.

PERFORMED BY: JOSEPH SCOGLIO


DATE: 9/11/01

APPLICANT: Protronic (Far East) Ltd.
FCC ID: PXVWL2002CAM
REPORT #: P\PROTRON\944H1\944H1RPT.doc
PAGE: 7 OF 10

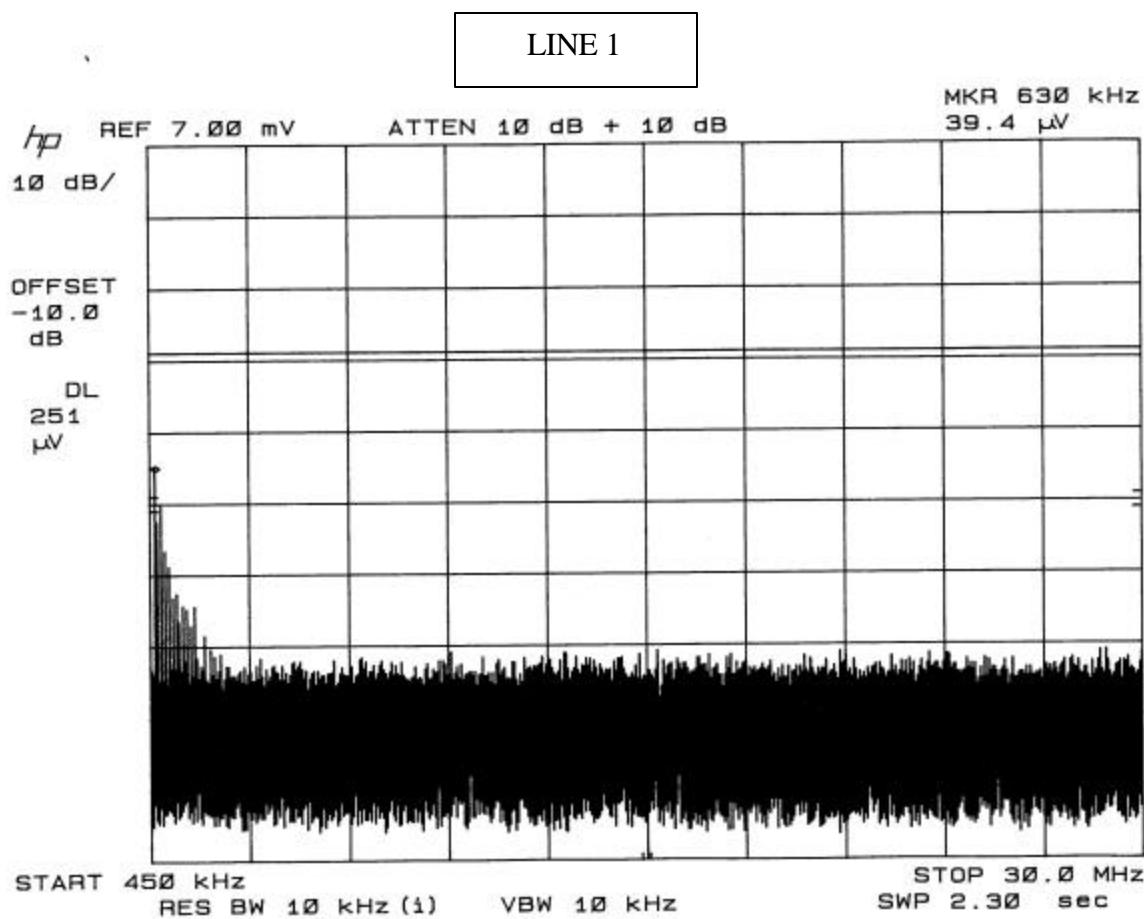


APPLICANT: Protronic (Far East) Ltd.
FCC ID: PXVWL2002CAM
REPORT #: P\PROTRON\944H1\944H1RPT.doc
PAGE: 8 OF 10

LINE 2

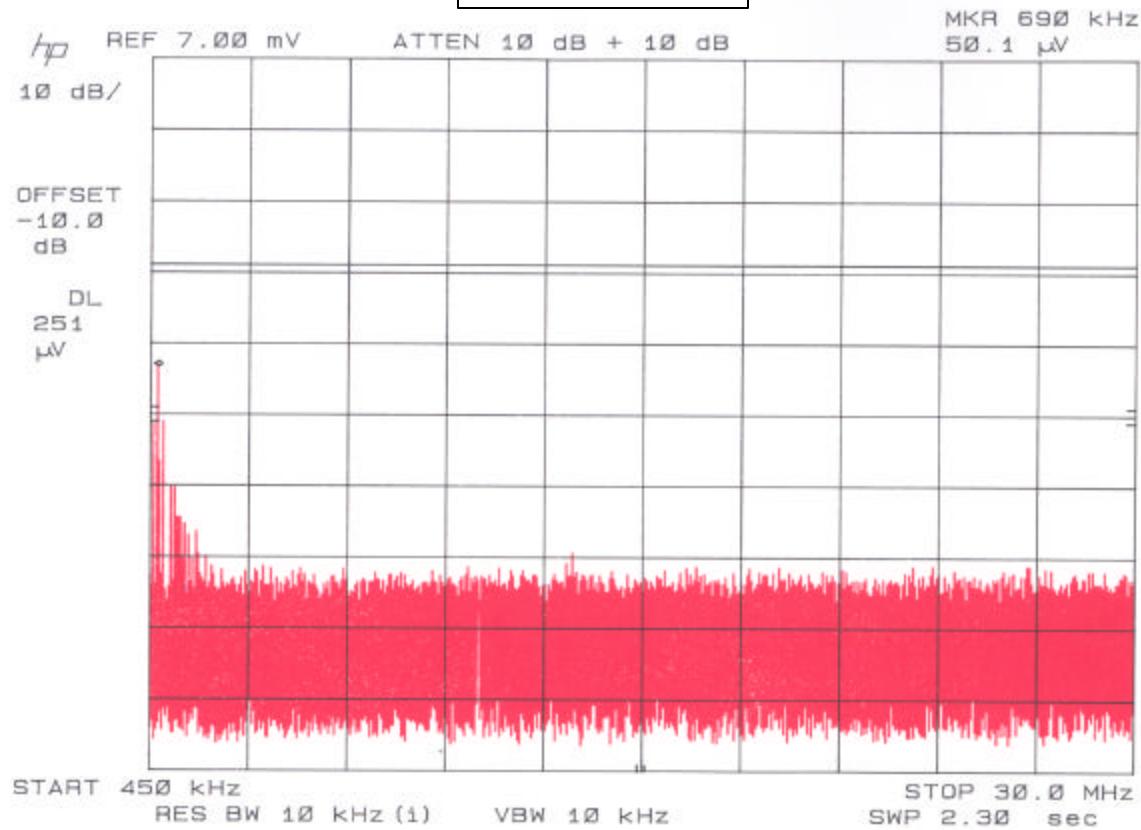

APPLICANT: Protronic (Far East) Ltd.
FCC ID: PXVWL2002CAM
REPORT #: P\PROTRON\944H1\944H1RPT.doc
PAGE: 9 OF 10

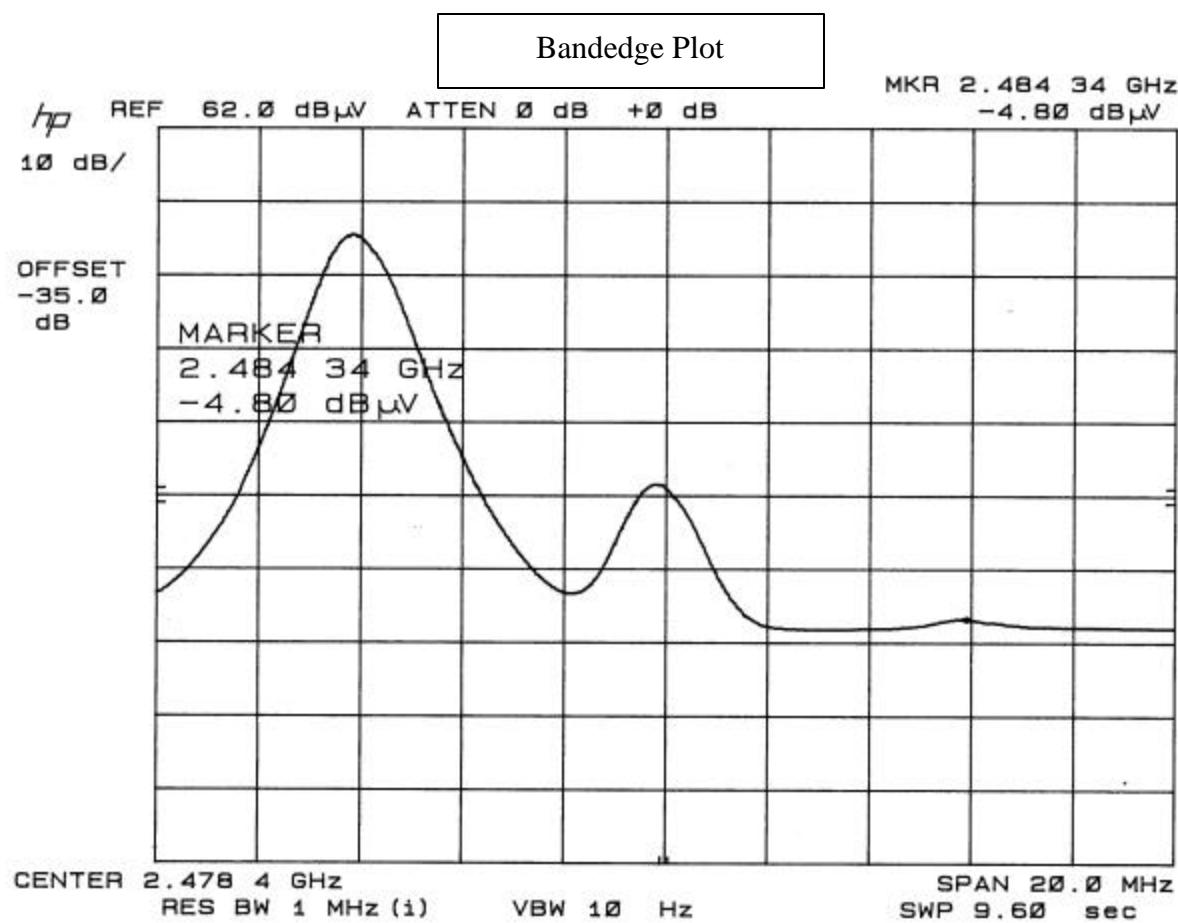

APPLICANT: Protronic (Far East) Ltd.
 FCC ID: PXVWL2002CAM
 REPORT #: P\PROTRON\944H1\944H1RPT.doc
 PAGE: 10 OF 10