



SK TECH CO., LTD.

Page 1 of 19

FCC-Certificate of Compliance

Test Report No.:	SKTFCE-070322-041		
NVLAP CODE :	200220-0		
Applicant:	Woo Young Telecom Co., Ltd.		
Applicant Address:	222-6, Suwolam-ri, Seotan-myeon, Pyeongtaek-si, Gyeonggi-do, 451-852, Rep. of Korea.		
Manufacturer :	Woo Young Telecom Co., Ltd.		
Manufacturer Address:	222-6, Suwolam-ri, Seotan-myeon, Pyeongtaek-si, Gyeonggi-do, 451-852, Rep. of Korea.		
Product:	LCD Monitor		
FCC ID:	PXWU90D	Model No.:	U90D
Receipt No.:	SKTEU07-0218	Date of receipt:	Oct. 19, 2006
Date of Issue:	Mar. 22, 2007		
Testing location:	SK TECH CO., LTD. 820-2, Wolmoon-Ri, Wabu-Up, Namyangju-Si, Kyunggi-Do, Korea		
Test Standards:	ANSI C63.4 / 2003		
Rule Parts:	FCC part 15 Subpart B		
Equipment Class :	Class B Digital Device Peripheral		
Test Result:	The above mentioned product has been tested and passed.		

Prepared by: S.Y.Ye

Tested by: H.P.Kim/Engineer

Approved by: D.H.Kang
/Manager & Chief Engineer

Signature	Date	Signature	Date	Signature	Date
-----------	------	-----------	------	-----------	------

Other Aspects :	
-----------------	--

Abbreviations :	· OK, Pass = passed · Fail = failed · N/A = not applicable
-----------------	--

- ☒ • This test report is not permitted to copy partly without our permission.
- This test result is dependent on only equipment to be used.
- This test result is based on a single evaluation of one sample of the above mentioned.
- This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S Government.
- We certify that this test report has been based on the measurement standards that is traceable to the national or International standards.

NVLAP Lab. Code: 200220-0



» » Contents « «

Contents	2
List of Tables	2
List of Figures	2
1. General	3
2. Test Site	3
2.1 Location	3
2.2 List of Test and Measurement Instruments	4
2.3 Test Date	4
2.4 Test Environment	4
3. Description of the tested samples	5
3.1 Rating and Physical Characteristics	5
3.2 Submitted Documents	6
4. Measurement Conditions	7
4.1 Modes of Operation	7
4.2 List of Peripherals	7
4.3 Type of Used cables	8
4.4 Test Setup	9
4.5 Uncertainty	10
5. EMISSION Test	11
5.1 Conducted Emissions	11
5.2 Radiated Emissions	18

» List of Tables

Table 1	List of test and measurement Equipment	4
Table 2	Test Data, Conducted Disturbance(FRONTEK)	12
Table 3	Test Data, Conducted Disturbance(LIEN CHANG)	15
Table 4	Test Data, Radiated Emissions	19

» List of Figures

Figure 1	Spectral Diagram, LINE-PE (FRONTEK)	13
Figure 2	Spectral Diagram, NEUTRAL-PE (FRONTEK)	14
Figure 3	Spectral Diagram, LINE-PE (LIEN CHANG)	16
Figure 4	Spectral Diagram, NEUTRAL-PE (LIEN CHANG)	17



1. General

This equipment has been shown to be capable of compliance with the applicable technical standards and was tested in accordance with the measurement procedures as indicated in this report.

We attest to the accuracy of data. All measurements reported herein were performed by SK TECH Co., Ltd. and were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

2. Test Site

SK TECH Co., Ltd.

2.1 Location

820-2, Wolmoon Ri, Wabu-Up, Namyangju-Si, Kyunggi-Do, Korea

The test site is in compliance with ISO/IEC 17025 for general requirements for the competence of testing and calibration laboratories.

This laboratory is recognized as a Conformity Assessment Body(CAB) for CAB's, Designation Number: **KR0007** by FCC, is accredited by NVLAP for NVLAP Lab. Code : **200220-0** and DATech for DAR-Registration No.:**DAT-P-076/97-01**.



2.2 List of Test and Measurement Instruments

Table 1 : List of Test and Measurement Equipment

- **Conducted Disturbance**

Kind of Equipment	Type	S/N	Calibrated until
EMI Receiver	ESHS10	835871/002	09.2007
Artificial Mains Network	ESH2-Z5	834549/011	07.2007

- **Radiated Disturbance**

Kind of Equipment	Type	S/N	Calibrated until
EMI Receiver	ESIB40	100277	02.2007
Amplifier	8447F	3113A05153	07.2007
Trilog-Broadband Antenna	VULB9168	9168-230	07.2007
Antenna Turntable Driver	5907	91X518	N/A
Antenna Turntable controller	5906	91X519	N/A

2.3 Test Date

Date of Application : Oct. 19, 2006

Date of Test : Oct. 28, 2006 ~ Oct. 29, 2006

2.4 Test Environment

See each test item's description.



3. Description of the tested samples

The EUT is a LCD Monitor.

3.1 Rating and Physical Characteristics

ITEM		Description
LCD	Size	19.0 Inch
	Type	TFT-LCD
	Pixel Pitch	0.294 x 0.294mm
	Surface Treatment	Anti-Glare, Hard Coating, 3H
	Viewable Size(HxV)	376.32 x 301.056
	Brightness	300 cd/m ²
	Contrast Ratio	700:1 (Typ.)
	Color	16.7M Colors (Natural Color)
	Viewing Angle(CR=10)	Up/Down 70° /65° , Left/Right 70° /70°
Frequency	Analog	Horizontal:31.5 x 80KHz/ Vertical:56~75Hz
	Digital	Horizontal: 31x64KHz/ Vertical:59~61 Hz
Resolution	Analog	1280 x 1024 @75Hz
	Digital	1280 x 1024 @60Hz
Response Time (Typ.)		8ms
Input Signal		RGB Analog, DVI Standard 1.0
Speaker		L+R: 2W+2W=4W
Input Terminal		15 pin D-Sub, 24 pin DVI-D
User Control	Keys	MENU, AUTO, MODE, POWER, SELECT, MUTE Adjust(▼), Adjust(▲)
	OSD Function	<ul style="list-style-type: none"> ▪ Auto Configuration ▪ Mode change : Analog->Digital-> Analog ▪ Brightness/ Contrast/ Gamma ▪ Colors(Warm/ Cold Color, User RGB Color) ▪ Position(Horizontal, Vertical, Clock, Phase)
User Control	OSD Function	<ul style="list-style-type: none"> ▪ OSD Function <ul style="list-style-type: none"> -OSD Position-OSD Time -OSD Language (Eng, Fra, Deu, Ita, Spa)



	<ul style="list-style-type: none">▪Set-up-Auto Balance-Input Source (Analog/Digital)-Information-Recall▪Exit▪Colors (Warm/ cold color, User RGB Color)
Benefit Function	<ul style="list-style-type: none">▪Plug & Play: VESA DDC 1/2B▪Power Saving: VESA DPMS(Less 1W)▪VESA Wall Mount(Optional)▪Built-in Power Supply
Power Supply	<ul style="list-style-type: none">▪AC 100~240, 50/60 Hz, 0.7A▪Consumption Max 40W
Operating Environment	Temperature 0 °C~25 °C, Humidity Less 90%
Dimension(WxDxH)	426 mm x 193 mm x 406mm
Set Weight(Net)	5.0Kg

3.2 Submitted Documents

N/A



4. Measurement Conditions

Operating voltage of the EUT is supplied from AC Line.

The rating is AC 120V/ 60Hz at input.

4.1 Modes of Operation

The EUT was in the following operating mode during all testing.

The EUT is connected to PC by VGA cable and DVI cable.

The EUT is tested in the mode of "H" on the screen and played windows media player.

4.2 List of Peripherals

Equipment	Manufacturer	Model Name	Serial No.
Keyboard(PS2)	YET FOUNDATE LTD.	SK-1688	C0509035688
Mouse(USB)	SUZHOU LOGITECH ELECTRONIC CO., LTD.	M-BJ58	HCA54718469
PC	Samsung Electronics	ZMP35	X71498DX900234E




4.3 Type of Used Cables

Equipment	Manufacturer	M/N	S/N	Cables &connectors
EUT (VGA cable for PC)	N/A	N/A	N/A	1.5m shielded VGA cable
EUT (DVI for PC)	N/A	N/A	N/A	1.5m shielded DVI cable
EUT (Audio Cable for PC)	N/A	N/A	N/A	1.2m shielded Audio cable
EUT(Power Cable for AC Line)	N/A	N/A	N/A	1.5m unshielded power cable
Keyboard (PS/2 cable for PC)	N/A	N/A	N/A	1.2m unshielded PS/2 cable
Mouse(USB cable for PC)	N/A	N/A	N/A	1.5m shielded USB cable
PC(Power cable for AC Line)	N/A	N/A	N/A	1.5m unshielded power cable



4.4 Test Setup

The test setup photographs showed the external supply connections and interfaces.

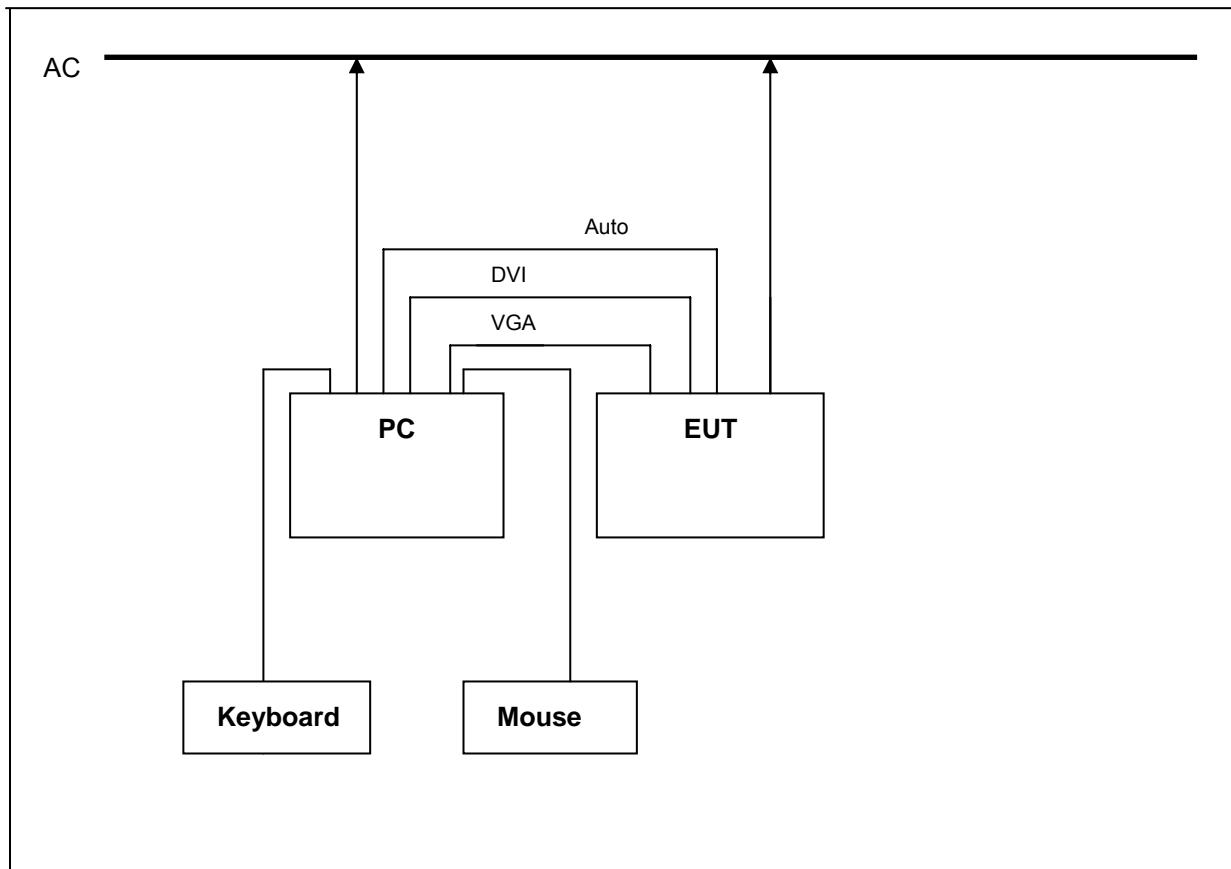

[System Block Diagram of Test Configuration]



4.5 Uncertainty

1) Radiated disturbances from 30 MHz to 1000 MHz at a distance of 3m and 10 m

Input quantity	Xi	Probability distribution function
Receiver reading	Vr	Rectangular $\sqrt{3}$
Attenuation: antenna-receiver	Lc	k=1
Amplifier Error	Ae	k=2
antenna factor	Lac	k=2
Receiver corrections:		
Sine wave voltage	dVsw	Rectangular $\sqrt{3}$
Pulse amplitude response	dVpa	Rectangular $\sqrt{3}$
Pulse repetition rate response	dVpr	Rectangular $\sqrt{3}$
Mismatch: antenna-receiver	dM	k=1
Antenna corrections:		
AF frequency interpolation	dAFF	Rectangular $\sqrt{3}$
AF height deviations	dAFh	Rectangular $\sqrt{3}$
Directivity difference	dAdir	3 m: Rectangular $\sqrt{3}$, 10 m: Rectangular $\sqrt{3}$
Phase centre location	dAph	3 m: Rectangular $\sqrt{3}$, 10 m: Rectangular $\sqrt{3}$
Cross-polarisation	dAcp	Rectangular $\sqrt{3}$
Balance	dAbal	Rectangular $\sqrt{3}$
Site corrections:		
Site imperfections	dSA	Rectangular $\sqrt{6}$
Separation distance	dd	3 m: Rectangular $\sqrt{3}$, 10 m: Rectangular $\sqrt{3}$
Table height	dh	3 m: k=2, 10 m: k=2
Expanded Uncertainty		4.60(Vertical)/4.59(Horizontal) k=2 (Level of confidence)

Expanded Uncertainty

$$U = k * U_c(x_i) = 2 * 2.3 = 4.60 \text{dB}$$

The coverage factor k =2 yields approximately a 95% level of confidence.

2) Conducted disturbance from 150 KHz to 30 MHz using a 50 Ω/50 uH AMN

Input quantity	Xi	Probability distribution function
Receiver reading	Vr	Rectangular $\sqrt{3}$
Attenuation: AMN-receiver	Lc	k=1
AMN voltage division factor	Lamn	k=2
Receiver corrections:		
Sine wave voltage	dVsw	Rectangular $\sqrt{3}$
Pulse amplitude response	dVpa	Rectangular $\sqrt{3}$
Pulse repetition rate response	dVpr	Rectangular $\sqrt{3}$
Mismatch: AMN-receiver	dM	U-shape $\sqrt{2}$
AMN impedance	dZ	Triangular $\sqrt{6}$
Expanded Uncertainty		3.99 k=2 (Level of confidence)

Expanded uncertainty

$$U = k * U_c(x_i) = 2 * 1.96 = 3.92 \text{dB}$$

The coverage factor k =2 yields approximately a 95% level of confidence.



5. EMISSION Test

5.1 Conducted Emissions

Result:**PASS**

The line-conducted facility is located inside a 2.6M x 3.6M x 7.0M shielded enclosure.

The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 604-05.

A 1 m x 1.5 m wooden table 80 cm high is placed 40 cm. away from the vertical wall and 1.5 m away from the side wall of the shielded room. ROHDE & SCHWARZ Model ESH3-Z5 (10 kHz-30 MHz) 50 ohm/50 uH Line-Impedance Stabilization Networks(LISNs) are bonded to the shielded room.

The EUT is powered from the ROHDE & SCHWARZ LISN and the support equipment is powered from the ROHDE & SCHWARZ LISN. Power to the LISNs are filtered by a high-current high-insertion loss Lindgren enclosures power line filters (100dB 14 kHz-10 GHz).

The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure.

All electrical cables are shielded by braided tinned copper zipper tubing with inner diameter of 1/2". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the ROHDE & SCHWARZ LISN.

All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150 kHz to 30 MHz with 100msec. sweep time.

The frequency producing the maximum level was reexamined using EMI/field Intensity Meter (ESHS 10) and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak mode.

The bandwidth of the receiver was set to 10 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by: switching power lines; varying the mode of operation or resolution;clock or data exchange speed; if applicable; whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of conducted test.

Each EME reported was calibrated using self-calibrating mode.

**Table 2: Test Data, Conducted Disturbance (FRONTEK)****<Quasi-Peak>**

Frequency (MHz)	Reading (dBuV)	Line	C/F (dB)	C/L (dB)	Actual (dBuV)	Limit (dBuV)	Margin (dB)
4.530	50.38	N	0.21	0.16	50.75	56.00	5.25
4.850	49.91	N	0.21	0.16	50.28	56.00	5.72
6.730	54.34	N	0.29	0.19	54.82	60.00	5.18
6.795	54.56	N	0.29	0.19	55.04	60.00	4.96
6.860	54.39	N	0.29	0.19	54.87	60.00	5.13
6.925	53.94	N	0.29	0.19	54.42	60.00	5.58

<Average>

Frequency (MHz)	Reading (dBuV)	Line	C/F (dB)	C/L (dB)	Actual (dBuV)	Limit (dBuV)	Margin (dB)
6.600	46.16	N	0.29	0.19	46.64	50.00	3.36
6.665	46.38	N	0.29	0.19	46.86	50.00	3.14
6.730	47.83	N	0.29	0.19	48.31	50.00	1.69
6.795	47.27	N	0.29	0.19	47.75	50.00	2.25
6.860	47.15	N	0.29	0.19	47.63	50.00	2.37
6.925	46.75	N	0.29	0.19	47.23	50.00	2.77

► NOTE

* C/F = Correction Factor

* C/L = Cable Loss

* LINE : L = Line-PE, N = Neutral-PE

* Margin Calculation

Margin(Q.P) = Limit - Actual

[Actual(Q.P)= Reading(Q.P) + C/F + C/L]



Figure 1: Spectral Diagram, LINE – PE (FRONTEK)

SK TECH Co., Ltd.
CONDUCTED DISTURBANCE

EUT: U90D
Manuf:
Op Cond: AC 120 V / 60 Hz
Operator:
Test Spec: FCC Part15 Subpart B
Comment: LINE-PE


Result File: 900af_l.dat : U90D (FCC)

Scan Settings

(1 Range)

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	30MHz	5kHz	10kHz	PK+AV	20msec	Auto	OFF	60dB

Final Measurement: Detectors: X QP / + AV
Meas Time: 1sec
Peaks: 8
Acc Margin: 35 dB

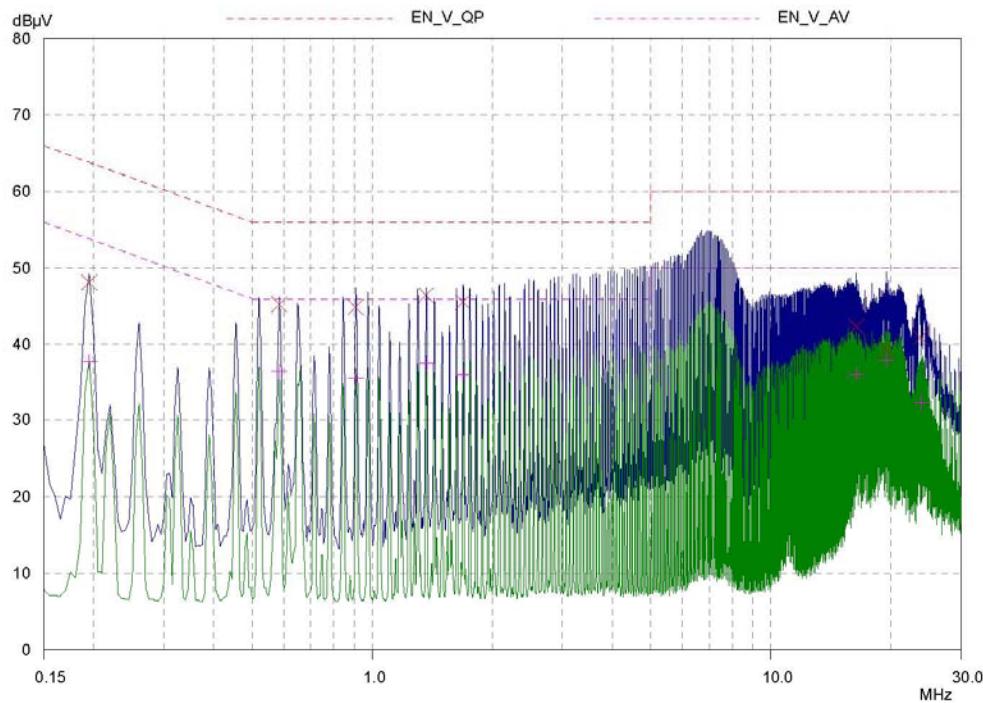

**SK TECH CO., LTD.**

Page 14 of 19

Figure 2: Spectral Diagram, NEUTRAL – PE (FRONTEK)**SK TECH Co., Ltd.
CONDUCTED DISTURBANCE**

EUT: U90D
Manuf:
Op Cond: AC 120 V / 60 Hz
Operator:
Test Spec: FCC Part15 Subpart B
Comment: NEUTRAL-PE

Result File: 900af_n.dat : U90D (FCC)

Scan Settings (1 Range)

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	30MHz	5kHz	10kHz	PK+AV	20msec	Auto	OFF	60dB

Final Measurement: Detectors: X QP / + AV
Meas Time: 1sec
Peaks: 8
Acc Margin: 35 dB

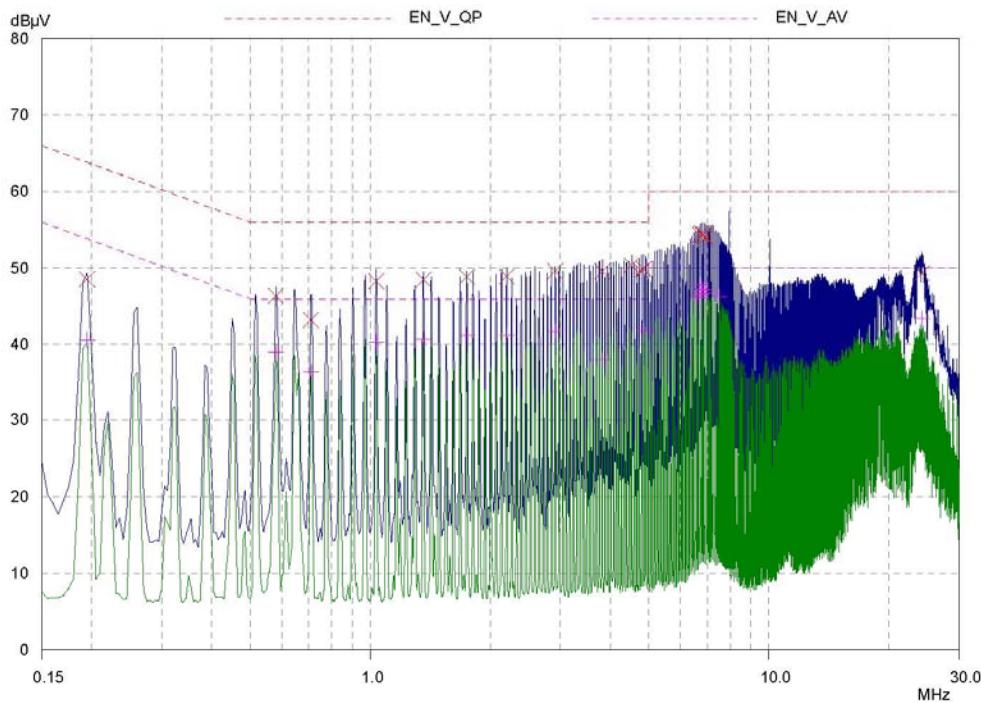




Table 3: Test Data, Conducted Disturbance (LIEN CHANG)

<Quasi-Peak>

Frequency (MHz)	Reading (dBuV)	Line	C/F (dB)	C/L (dB)	Actual (dBuV)	Limit (dBuV)	Margin (dB)
0.185	42.54	N	0.12	0.01	42.67	64.26	21.59
0.195	47.76	N	0.12	0.01	47.89	63.82	15.93
0.200	46.19	L	0.13	0.02	46.34	63.61	17.27
0.520	35.62	L	0.13	0.04	35.79	56.00	20.21
2.465	36.89	L	0.18	0.11	37.18	56.00	18.82
4.110	34.27	L	0.24	0.16	34.67	56.00	21.33

<Average>

Frequency (MHz)	Reading (dBuV)	Line	C/F (dB)	C/L (dB)	Actual (dBuV)	Limit (dBuV)	Margin (dB)
0.475	28.53	L	0.13	0.04	28.70	46.43	17.73
0.520	31.59	L	0.13	0.04	31.76	46.00	14.24
0.525	28.88	N	0.12	0.04	29.04	46.00	16.96
2.465	32.92	N	0.15	0.11	33.18	46.00	12.82
4.105	29.58	L	0.24	0.16	29.98	46.00	16.02
4.110	28.87	N	0.21	0.16	29.24	46.00	16.76

► NOTE

* C/F = Correction Factor

* C/L = Cable Loss

* LINE : L = Line-PE, N = Neutral-PE

* Margin Calculation

Margin(Q.P) = Limit - Actual

[Actual(Q.P)= Reading(Q.P) + C/F + C/L]



Figure 3: Spectral Diagram, LINE – PE (LIEN CHANG)

SK TECH Co., Ltd.
CONDUCTED DISTURBANCE
EUT: U90D
Manuf:
Op Cond: AC 120 V / 60 Hz
Operator:
Test Spec: FCC Part15 Subpart B
Comment: LINE-PE
LIEN CHANG Lips
Result File: 900afl_I.dat : U90D (FCC)_LIEN Chang

28 Oct 2006 11:08

Scan Settings (1 Range)		Frequencies						Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge			
150kHz	30MHz	5kHz	10kHz	PK+AV	20msec	Auto	OFF	60dB			

Final Measurement: Detectors: X QP / + AV
Meas Time: 1sec
Peaks: 8
Acc Margin: 35 dB

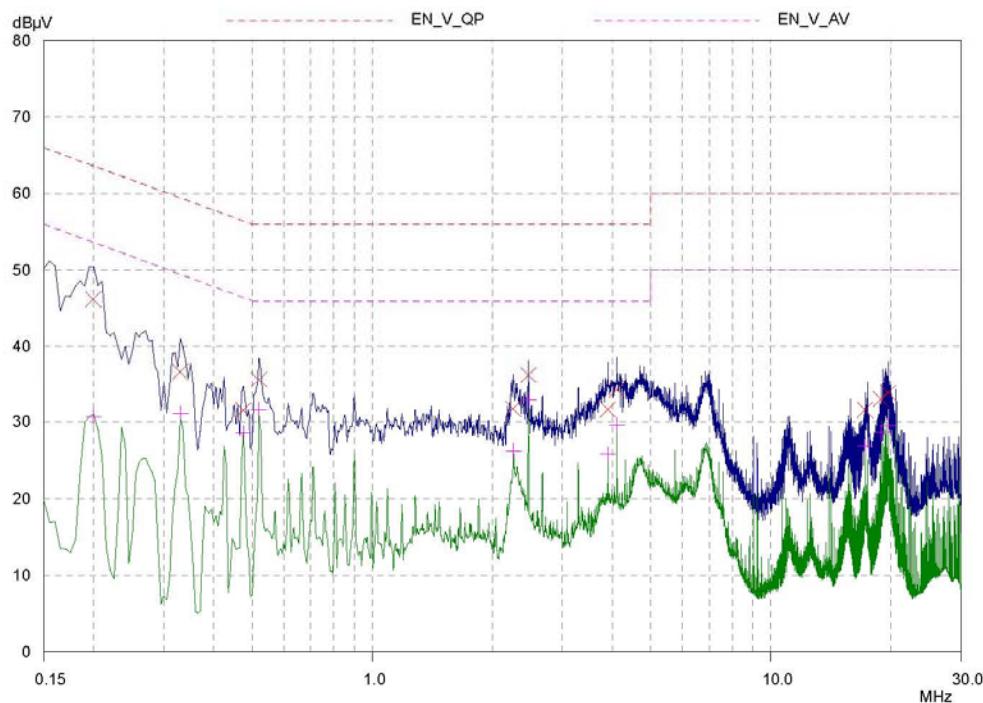





Figure 4: Spectral Diagram, NEUTRAL – PE (LIEN CHANG)

SK TECH Co., Ltd.
CONDUCTED DISTURBANCE
 EUT: U90D
 Manuf:
 Op Cond: AC 120 V / 60 Hz
 Operator:
 Test Spec: FCC Part15 Subpart B
 Comment: NEUTRAL-PE
 LIEN CHANG Lips
 Result File: 900afl_n.dat : U90D (FCC)_LIEN Chang

28 Oct 2006 10:50

Scan Settings (1 Range)		Receiver Settings						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	30MHz	5kHz	10kHz	PK+AV	20msec	Auto	OFF	60dB

Final Measurement: Detectors: X QP / + AV
 Meas Time: 1sec
 Peaks: 8
 Acc Margin: 35 dB

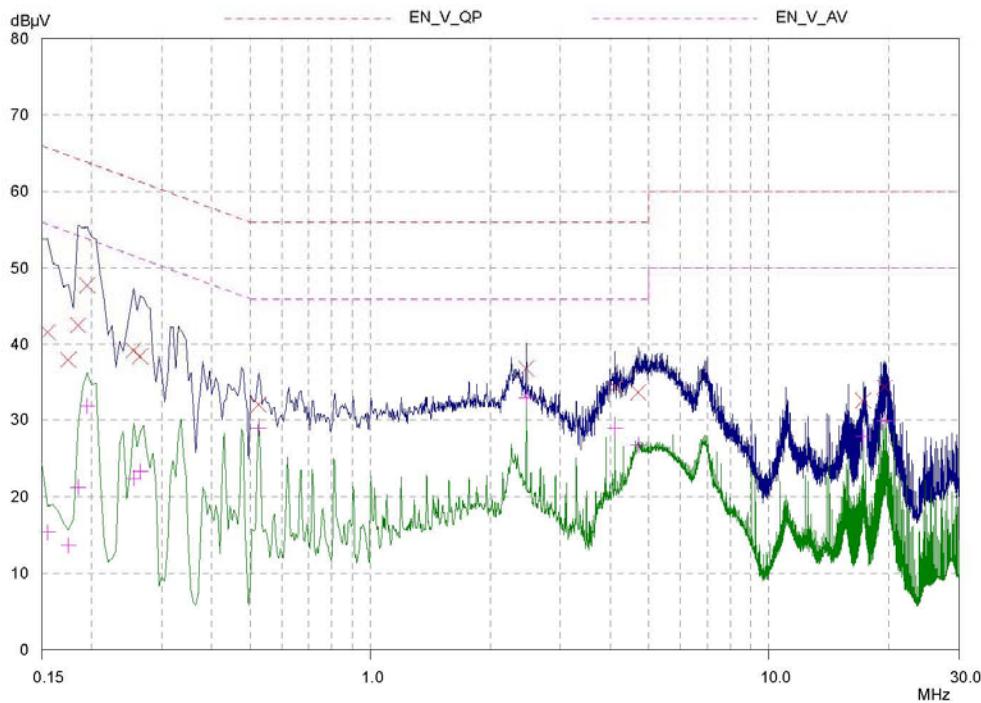



5.2 Radiated Emissions

Result :**PASS**

Preliminary measurements were made indoors at 3 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME.

Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found.

The spectrum was scanned from 30 to 300 MHz using biconical antenna and from 300 to 1000 MHz using log-periodic antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using SCHWARZBECK dipole antennas.

The test equipment was placed on a wooden table situated on a 4x4 meter area adjacent to the measurement area. Turntable was to protect from weather in the dome that made with FRP.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter(ESVS 10) and Quasi-Peak Adapter.

The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100 kHz or 1 MHz depending on the frequency or type of signal.

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non- metallic 1 x 1.5 meter table.

The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission.

Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed, and/or support equipment, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of radiated emission test.

Each EME reported was calibrated using self-calibrating mode.



Table 4 : Test Data, Radiated Emissions

<FRONTEK>

Frequency [MHz]	Pol.	Height [m]	Real Reading	Correction Factor		T-Fact [dB]	Data [dBuV/m]	Limits [dBuV/m]	Margin [dB]
				Antenna	Cable				
117.89	V	1.0	30.3	8.9	1.1	10.0	40.3	43.5	3.2
119.32	V	1.0	29.9	8.9	1.1	10.0	39.9	43.5	3.6
244.13	V	1.5	24.1	9.3	1.3	10.6	34.7	46.0	11.3
323.99	H	2.2	18.9	12.9	1.5	14.4	33.3	46.0	12.7

Table. Radiated Measurements at 3-meters

<LIEN CHANG>

Frequency [MHz]	Pol.	Height [m]	Real Reading	Correction Factor		T-Fact [dB]	Data [dBuV/m]	Limits [dBuV/m]	Margin [dB]
				Antenna	Cable				
324.00	H	2.2	17.1	12.9	1.5	14.4	31.5	46.0	14.5
345.65	V	1.0	14.7	12.9	1.6	14.5	29.2	46.0	16.8
431.16	V	1.0	15.0	15.2	1.8	17.0	32.0	46.0	14.0
864.11	V	1.0	9.8	22.9	2.6	25.5	35.3	46.0	10.7

Table. Radiated Measurements at 3-meters

NOTES:

1. All modes of operation were investigated and the worst-case emission are reported.
2. All other emission are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR Quasi-Peak mode.
5. H = Horizontal, V = Vertical Polarization
6. Data = Real Reading + T – Fact (Antenna+Cable)
7. Margin = Limits – Data