


Modulation Standard:802.11 Super G (108Mbps)  
 Channel:06

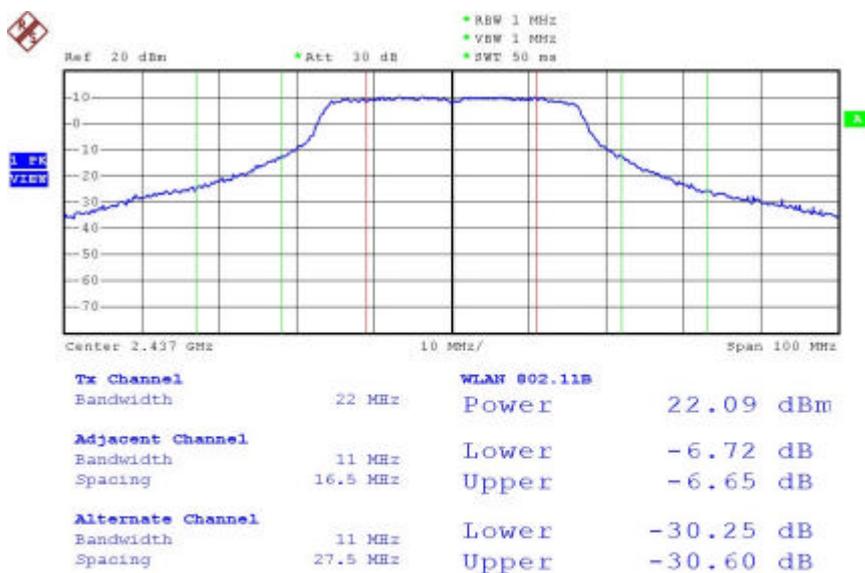

Date: 27.OCT.2005 20:47:48

## 8. Band Edges Measurement


### 8.1 Test Limit

Below -20dB of the highest emission level of operating band  
(in 100kHz Resolution Bandwidth).

### 8.2 Test Procedure :

- 1.The transmitter output was connected to the spectrum analyzer via a low lose cable.
- 2.Set both RBW and VBW of spectrum analyzer to 100 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- 3.The band edges was measured and recorded.

### 8.3 Test Setup Layout

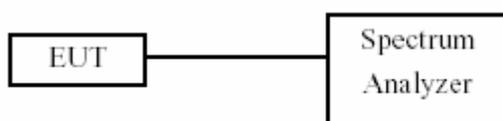

### 8.4 List of Measuring Equipment Used

Instrument/Ancillary	Type	Manufacturer	Serial No.	Valid Date.
Spectrum Analyzer	FSP40	R&S	100047	2005/12/28

### 8.5 Test Result and Data

(1) Modulation Standard: IEEE 802.11b (11Mbps)

Test Date: Oct. 14, 2005 Temperature: 25 Humidity: 66% Atmospheric pressure: 1018 mmHg

Channel	Frequency	maximum value in frequency (MHz)	maximum value is (dBm)
01	2412	2400.00	-43.36
11	2462	2520.10	-56.94


(2) Modulation Standard: IEEE 802.11g (24Mbps)

Test Date: Oct. 14, 2005 Temperature: 25 Humidity: 66% Atmospheric pressure: 1018 mmHg


Channel	Frequency	maximum value in frequency (MHz)	maximum value is (dBm)
01	2412	2400.00	-33.15
11	2462	2483.50	-52.87

Modulation Standard: 802.11b (11Mbps)

Channel: 01

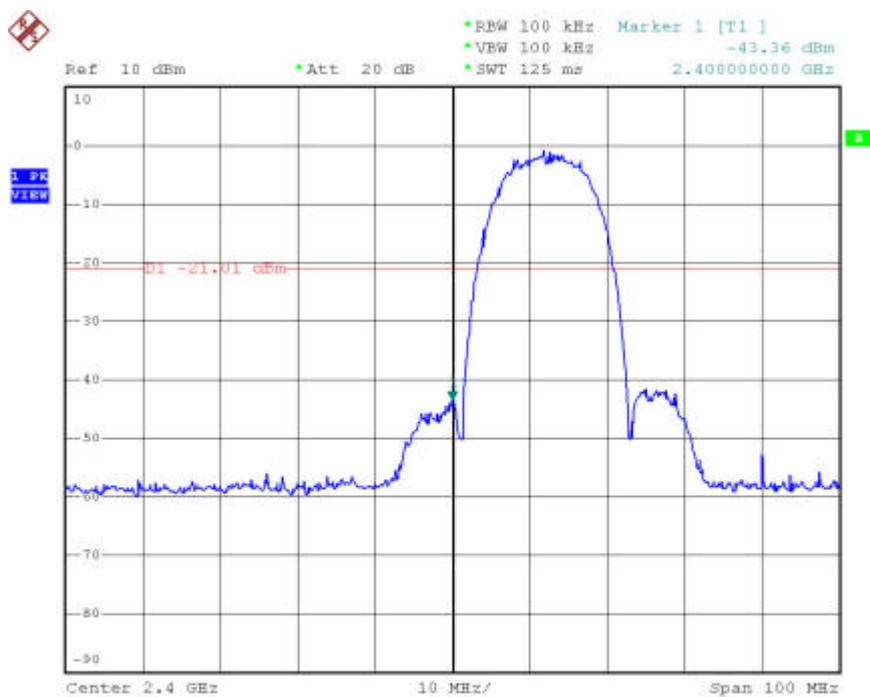


Date: 14.OCT.2005 17:17:33

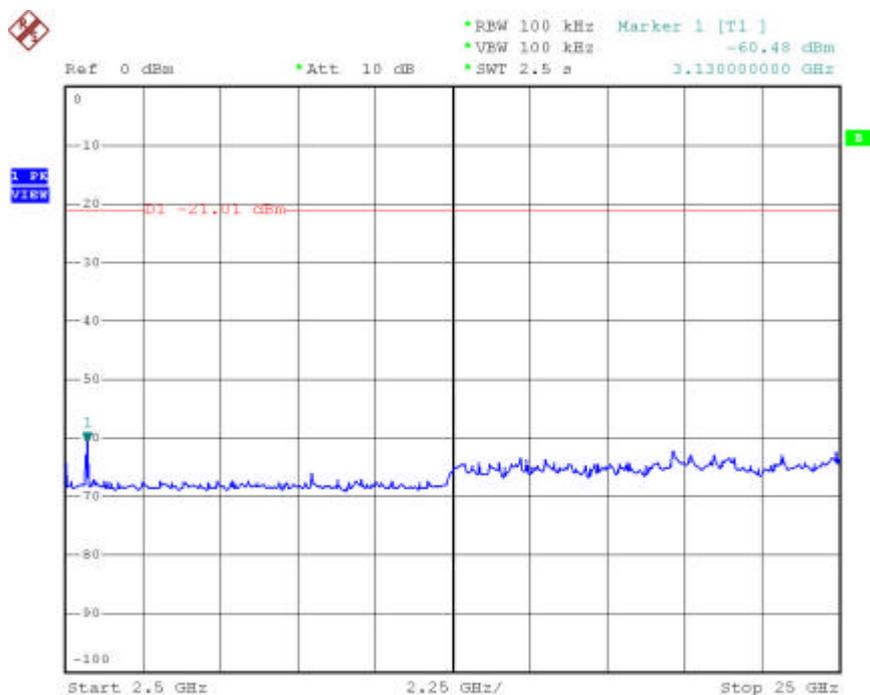


Date: 14.OCT.2005 17:20:00

Channel: 11

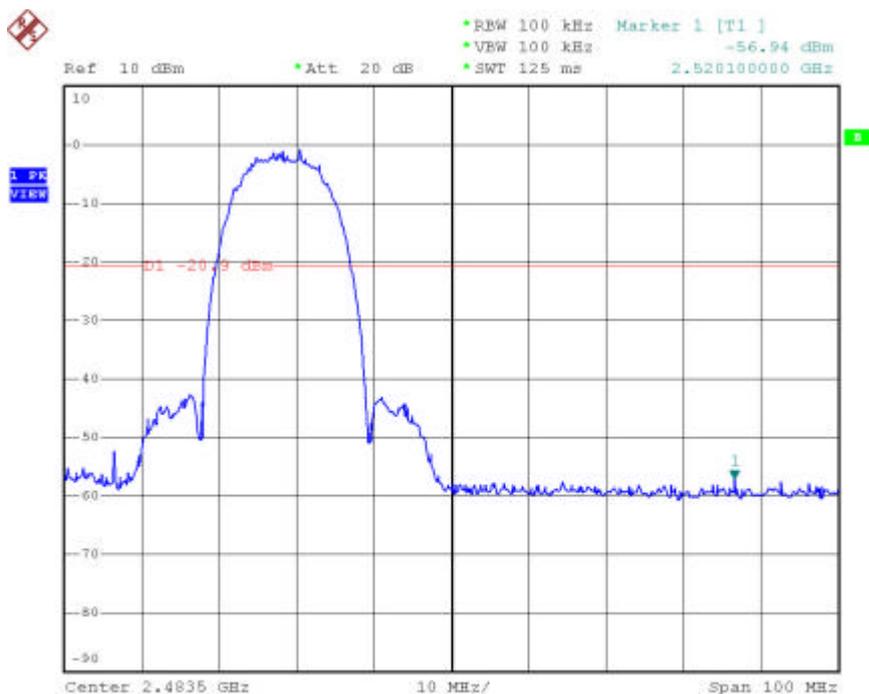


Date: 14.OCT.2005 17:21:54

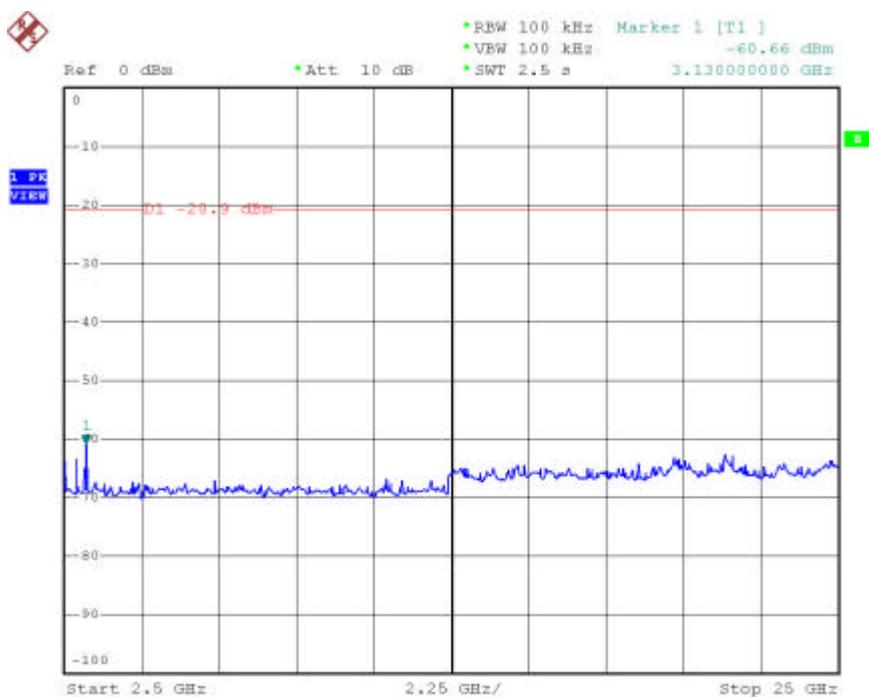


Date: 14.OCT.2005 17:22:51

Modulation Standard: 802.11g (54Mbps)

Channel: 01

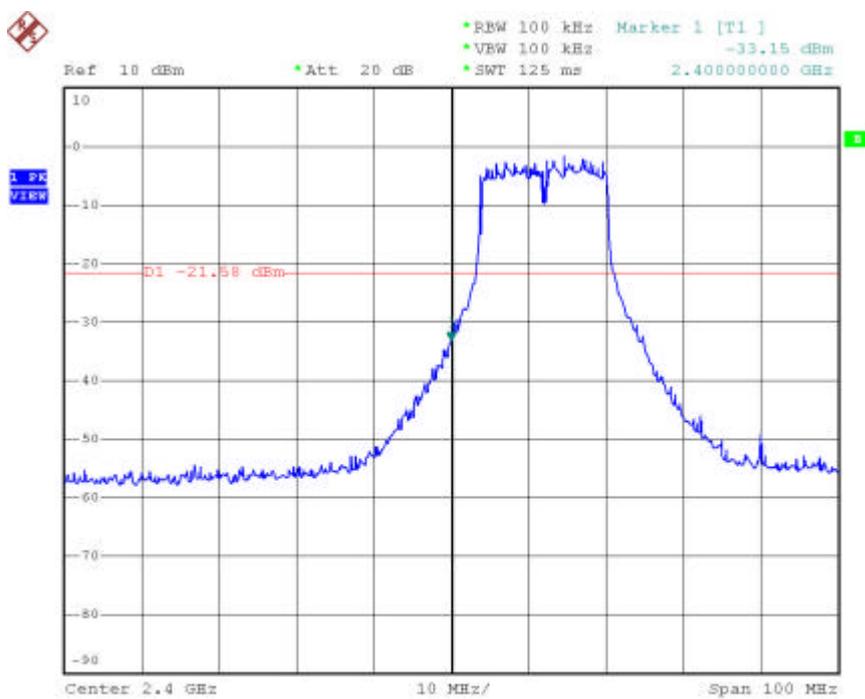


Date: 14.OCT.2005 17:11:33

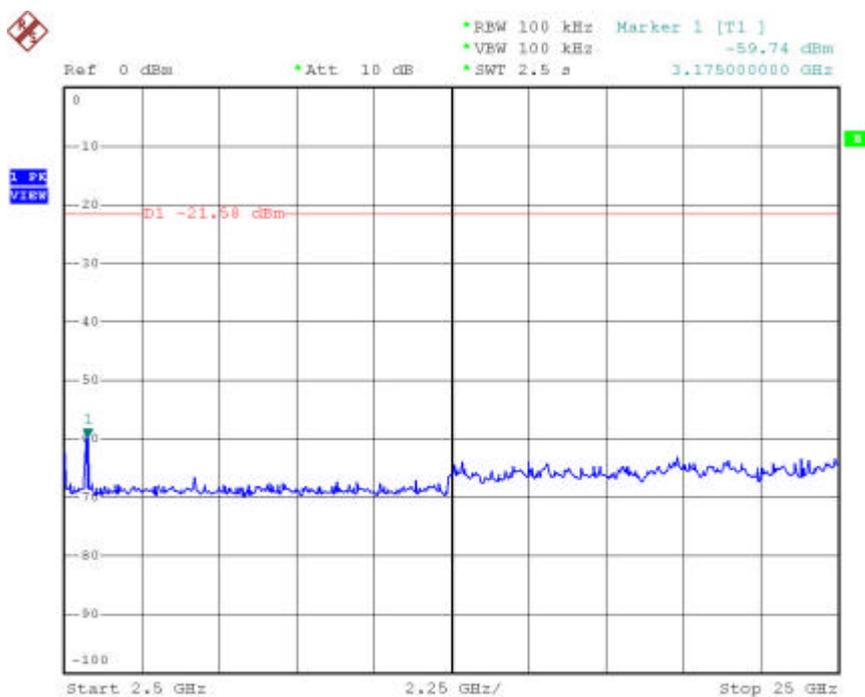


Date: 14.OCT.2005 17:12:26

Channel: 11

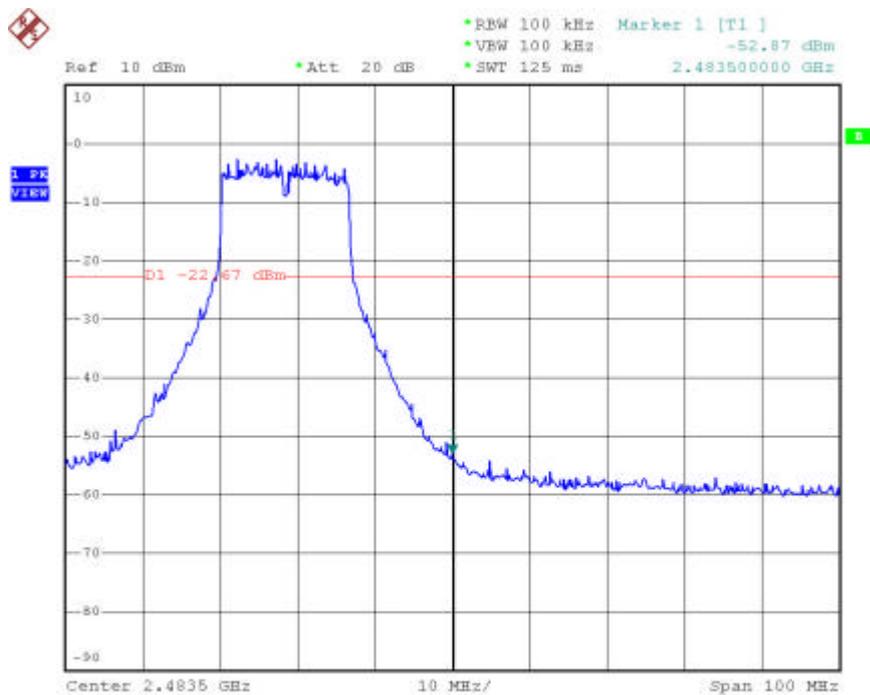

Date: 14.OCT.2005 17:14:14

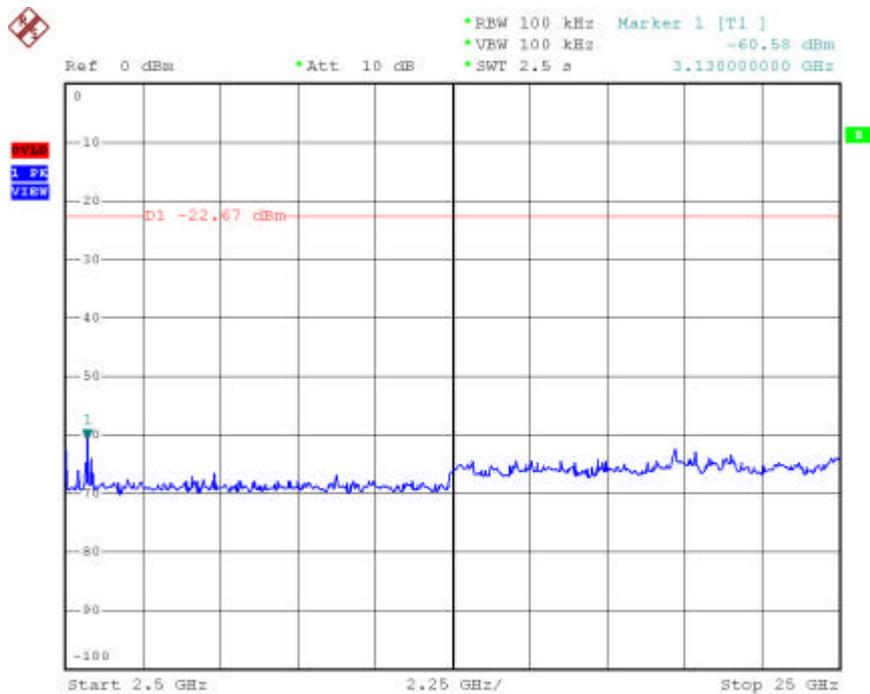

Date: 14.OCT.2005 17:15:11

### 8.6 Restrict band emission Measurement Data

Modulation Standard: IEEE 802.11b (11Mbps)

Test Date: Oct. 20, 2005 Temperature: 24 Humidity: 69% Atmospheric pressure: 1023 mmHg

a) Channel 1

Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2385.89	H	52.48	1.24	53.72	Peak	74	54	-20.28	253	1.0
2386.40	H	40.11	1.24	41.35	Ave	74	54	-12.65	253	1.0
2384.15	V	48.07	0.53	48.60	Peak	74	54	-25.40	181	1.0
2389.87	V	36.31	0.55	36.86	Ave	74	54	-17.14	181	1.0

b) Channel 11

Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2488.68	H	52.39	1.59	53.98	Peak	74	54	-20.02	234	1.0
2487.80	H	40.77	1.59	42.36	Ave	74	54	-11.64	234	1.0
2487.61	V	51.61	0.89	52.05	Peak	74	54	-21.95	183	1.0
2487.42	V	38.80	0.89	39.69	Ave	74	54	-14.31	183	1.0

Modulation Standard: 802.11g (24Mbps)

Test Date: Oct. 20, 2005 Temperature: 24 Humidity: 69% Atmospheric pressure: 1023 mmHg

a) Channel 1

Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2389.97	H	60.43	1.25	61.68	Peak	74	54	-12.32	252	1.0
2389.87	H	42.82	1.25	44.07	Ave	74	54	-9.93	252	1.0
2389.97	V	51.72	0.55	52.27	Peak	74	54	-21.73	180	1.0
2389.87	V	38.26	0.55	38.81	Ave	74	54	-15.19	180	1.0

b) Channel 11

Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2483.74	H	59.04	1.57	60.62	Peak	74	54	-13.38	259	1.0
2483.51	H	41.35	1.57	42.92	Ave	74	54	-11.08	259	1.0
2483.51	V	55.86	0.87	56.74	Peak	74	54	-17.26	184	1.0
2483.51	V	40.48	0.87	41.35	Ave	74	54	-12.65	184	1.0

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz

## 9. Power Spectral Density


### 9.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

### 9.2 Test Procedures

- 1.The transmitter output was connected to spectrum analyzer.
- 2.The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=span/3KHz.
- 3.The power spectral density was measured and recorded.
- 4.The Sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

### 9.3 Test Setup Layout :

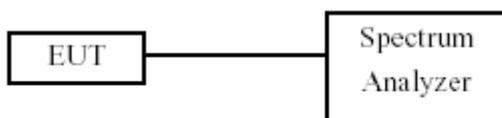

### 9.4 List of Measuring Equipment Used

Instrument/Ancillary	Type	Manufacturer	Serial No.	Valid Date.
Spectrum Analyzer	FSP40	R&S	100047	2005/12/28

### 9.5 Test Result and Data

(1) Modulation Standard: IEEE 802.11b (11Mbps)

Test Date: Oct. 14, 2005 Temperature: 25 Humidity: 66% Atmospheric pressure: 1018 mmHg

Channel	Frequency	Maximum Power Density of 3 kHz Bandwidth (dBm)
01	2412	-13.56
06	2437	-15.13
11	2462	-14.79

(2) Modulation Standard: IEEE 802.11g (54Mbps)

Test Date: Oct. 14, 2005 Temperature: 25 Humidity: 66% Atmospheric pressure: 1018 mmHg


Channel	Frequency	Maximum Power Density of 3 kHz Bandwidth (dBm)
01	2412	-14.81
06	2437	-14.73
11	2462	-15.39

(3) Modulation Standard: IEEE 802.11 Super G (108Mbps)

Test Date: Oct. 27, 2005 Temperature: 25 Humidity: 69% Atmospheric pressure: 1021 mmHg


Channel	Frequency	Maximum Power Density of 3 kHz Bandwidth (dBm)
06	2437	-14.31

Modulation Standard: 802.11b (11Mbps)  
Channel: 01

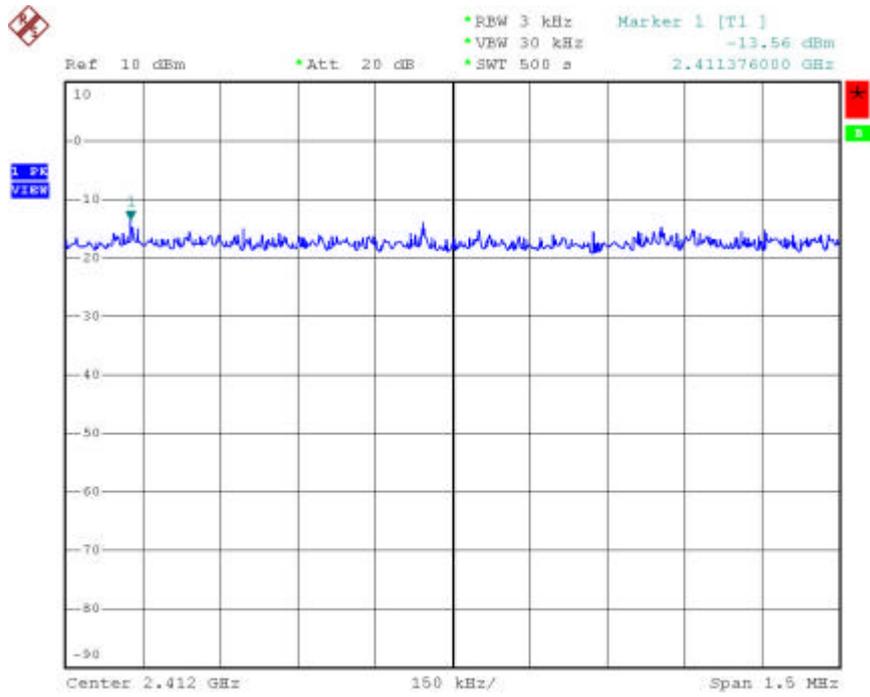


Date: 14.OCT.2005 17:25:27

Channel:06

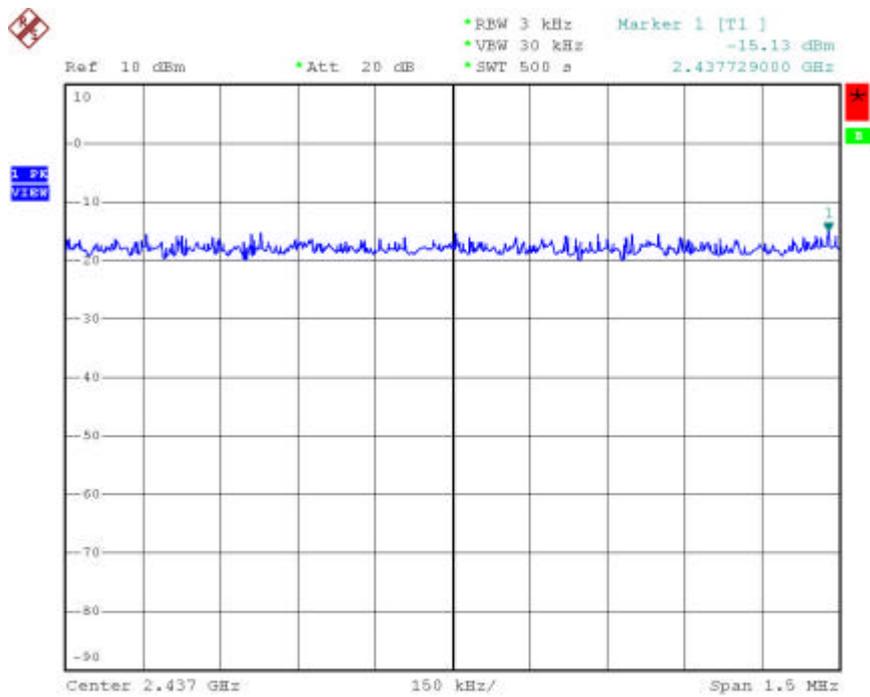


Date: 14.OCT.2005 17:26:44

Channel: 11

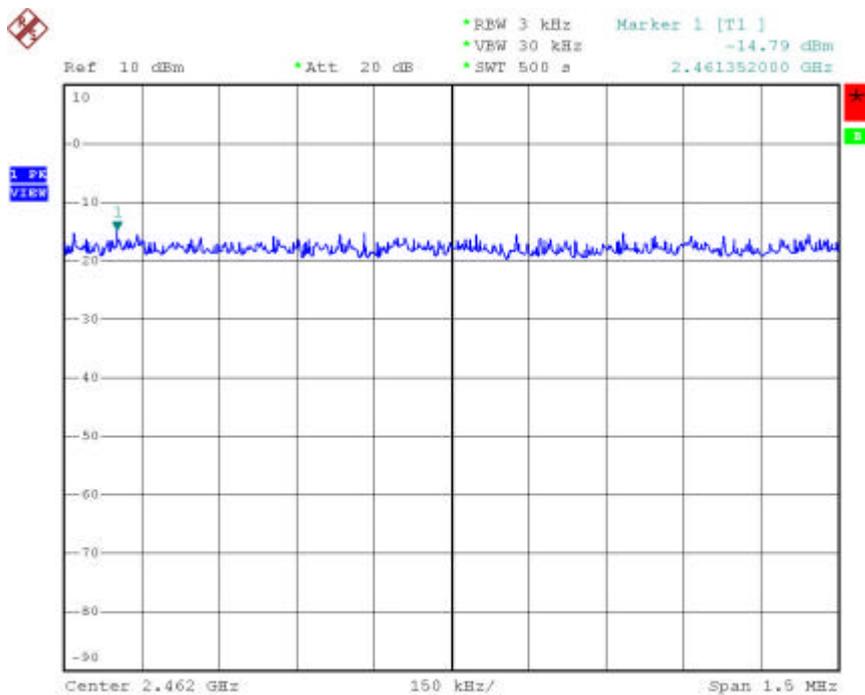


Date: 14.OCT.2005 17:27:58

Modulation Standard: 802.11g (54Mbps)  
 Channel: 01

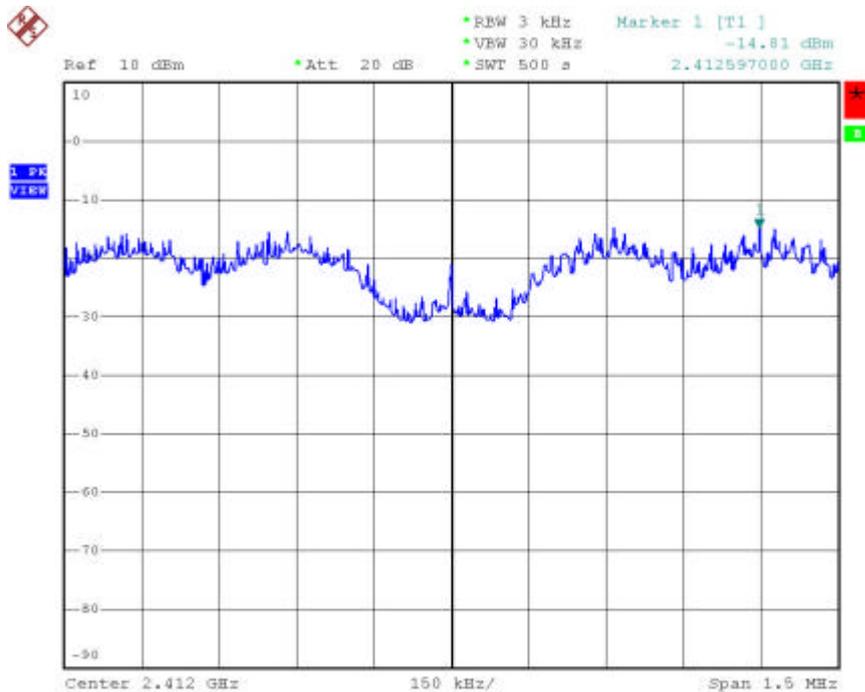


Date: 14.OCT.2005 17:34:07

Channel: 06

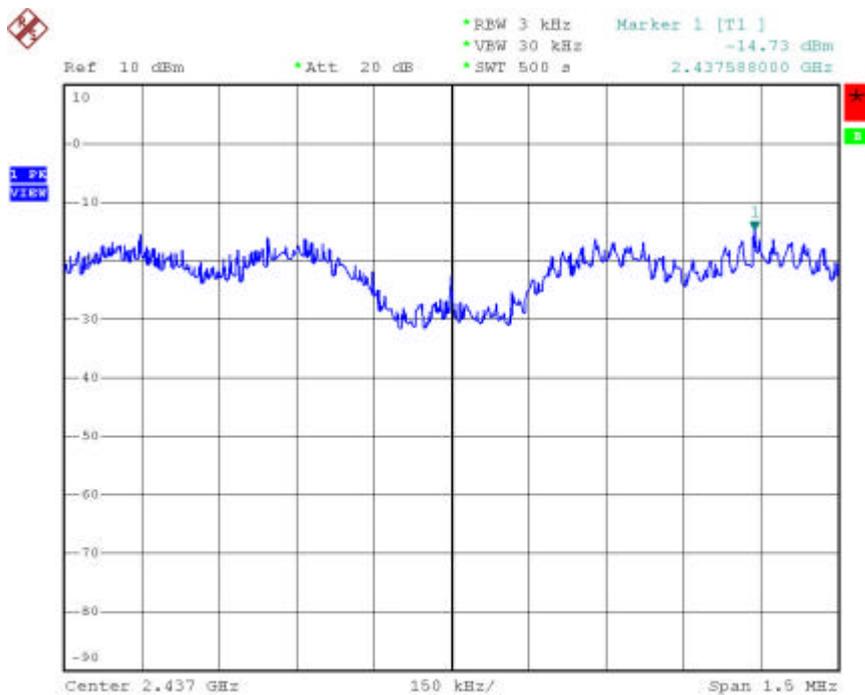


Date: 14.OCT.2005 17:31:54

Channel:11

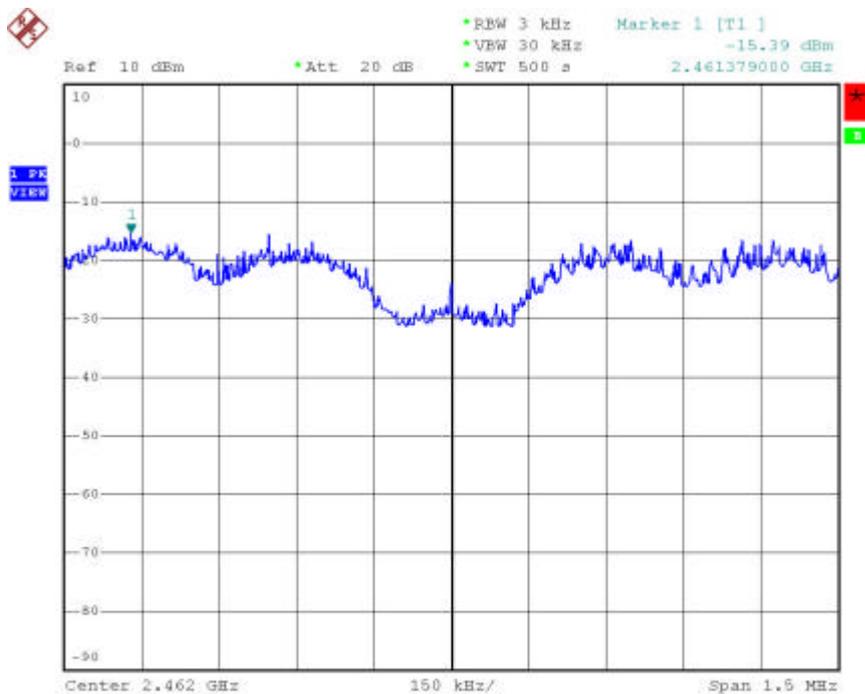

Date: 14.OCT.2005 17:30:44

Modulation Standard:802.11 Super G (108Mbps)  
Channel:06

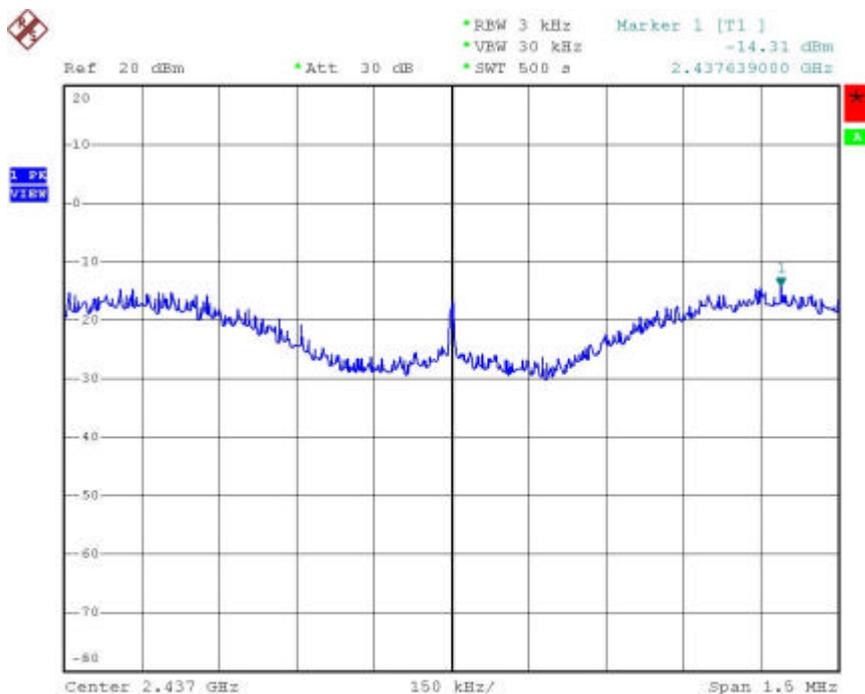

Date: 27.OCT.2005 20:52:18

## 10. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

### 10.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.