

FCC TEST REPORT

according to

FCC Rules and Regulations

Part 15 Subpart C

Applicant	Netgear Inc.
Address	4500 Great America Parkway Santa Clara California 95054 USA
Equipment	Integrated ADSL Modem and Wireless Router with Voice
Model No.	DG834GVSP
FCC ID	PY305400024
Trade Name	Netgear

Laboratory Accreditation



1332

- The test result refers exclusively to the test presented test model / sample.,
- Without written approval of **Exclusive Certification Corp.** the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

Contents

1.	Report of Measurements and Examinations.....	5
1.1	List of Measurements and Examinations	5
2.	Test Configuration of Equipment under Test.....	6
2.1	Feature of Equipment under Test.....	6
2.2	RF Specifications	7
2.3	Test Mode and Test Software.....	7
2.4	Description of Test System.....	8
2.5	Connection Diagram of Test System.....	9
2.6	General Information of Test.....	10
2.7	History of this test report	10
3.	Antenna Requirements.....	11
3.1	Standard Applicable	11
3.2	Antenna Construction and Directional Gain.....	11
4.	Test of Conducted Emission.....	12
4.1	Test Limit.....	12
4.2	Test Procedures.....	12
4.3	Typical Test Setup	13
4.4	Measurement equipment	13
4.5	Test Result and Data.....	14
4.6	Test Photographs	16
5.	Test of Radiated Emission	17
5.1	Test Limit.....	17
5.2	Test Procedures.....	18
5.3	Typical Test Setup	19
5.4	Measurement equipment	19
5.5	Test Result and Data.....	20
5.6	Test Photographs	36
6.	6dB Bandwidth Measurement Data.....	37
6.1	Test Limit	37
6.2	Test Procedures	37
6.3	Test Setup Layout	37
6.4	Measurement equipment	37
6.5	Test Result and Data.....	37
7.	Maximum Peak Output Power	41
7.1	Test Limit	41
7.2	Test Procedures	41
7.3	Test Setup Layout	41
7.4	Measurement equipment	41
7.5	Test Result and Data.....	41
8.	Band Edges Measurement.....	45
8.1	Test Limit	45
8.2	Test Procedure :	45
8.3	Test Setup Layout	45
8.4	List of Measuring Equipment Used	45
8.5	Test Result and Data.....	45
8.6	Restrict band emission Measurement Data.....	50

9. Power Spectral Density	51
9.1 Test Limit	51
9.2 Test Procedures	51
9.3 Test Setup Layout :	51
9.4 List of Measuring Equipment Used	51
9.5 Test Result and Data.....	51
10. Restricted Bands of Operation.....	55
10.1 Labeling Requirement.....	55
Appendix A. Photographs of EUT.....	A1 ~ A9

CERTIFICATE OF COMPLIANCE

according to

FCC Rules and Regulations

Part 15 Subpart C

Applicant	Netgear Inc.
Address	4500 Great America Parkway Santa Clara California 95054 USA
Equipment	Integrated ADSL Modem and Wireless Router with Voice
Model No.	DG834GVSP
FCC ID	PY305400024

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4** The equipment was ***passed*** the test performed according to **FCC Rules and Regulations Part 15 Subpart C (2003)**.

The test was carried out on Dec. 24, 2006 at ***Exclusive Certification Corp.***

Signature


Anson Chou / Manager

1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. Conducted Emission	Pass
15.209	. Radiated Emission	Pass
15.247(a)(2)	. 6dB Bandwidth	Pass
15.247(b)	. Maximum Peak Output Power	Pass
15.247(c)	. 100kHz Bandwidth of Frequency Band Edges	Pass
15.247(d)	. Power Spectral Density	Pass
1.1307 1.1310 2.1091 2.1093	. RF Exposure Compliance	Pass

2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Network Protocol and Standards Compatibility

Data and Routing Protocols: TCP/IP, RIP-1, RIP-2, DHCP, PPPoE or PPPoA, RFC 1483 Bridged or Routed Ethernet, and RFC 1577 Classical IP over ATM

Power Adapter

North America: 120V, 60 Hz, input

UK, Australia: 240V, 50 Hz, input

Europe: 230V, 50 Hz, input

Japan: 100V, 50/60 Hz, input

All regions (output): 12 V AC @ 1.0A output, 30W maximum

Physical

Dimensions: 10" x 6.7" x 1.3" 255 mm x 169 mm x 34 mm

Weight: 1.4 lbs. 0.62 kg

Environmental

Operating temperature: 0° to 40° C (32° to 104° F)

Operating humidity: 90% maximum relative humidity, noncondensing

Electromagnetic Emissions

Meets requirements of: FCC Part 15 Class B; VCCI Class B; EN 55 022 (CISPR 22), Class B

Interface Specifications

LAN: 10BASE-T or 100BASE-Tx, RJ-45

WAN: ADSL, ADSL2+, Dual RJ-11, pins 2 and 3 T1.413, G.DMT, G.Lite ITU Annex A or B

2.2 RF Specifications

Standard	IEEE 802.11b, IEEE 802.11g
Chipset	TI TNETW1350A MAC with Baseband processor
RF Chip	TNETW3422, TNETW3427 (3.3V)
Host Interface	VLYNQ 2.6 at 1.8V
Operating Voltage	3.3V $\pm$ 5%
Antenna Connector	Single antenna connector with T/R switch (Skyworks AS13270-92LF, high power T/R switch)
Frequency Range	■ 2.412GHz-2.4835GHz
Modulation	■ 11g: Orthogonal Frequency Division Multiplexing (OFDM) ■ 11b+: Packet Binary Convolution Coding (PBCC) ■ 11b: Direct Sequence Spread Spectrum (DSSS) Note: No OFDM modulation on channel 14
Number of Channels	■ USA (FCC): 11 channels (2.412GHz~2.462GHz) ■ ETSI: 13 channels (2.412GHz~2.472GHz) ■ Japan: 14 channels (2.412GHz~2.484GHz)
Support Data Rate	802.11b(22Mbps, 11 Mbps, 5.5 Mbps, 2 Mbps, 1 Mbps) 802.11g(54 Mbps, 48 Mbps, 36 Mbps, 24 Mbps, 18 Mbps, 12 Mbps, 9 Mbps, 6 Mbps)
Preamble	802.11b: Both Short and Long preamble 802.11g: Long preamble only
Output Power (3427, 3.3V)	802.11b: up to +17.5dBm 802.11g: up to +17.5dBm
Receiver Sensitivity	■ 11g mode -76dBm at 54Mbps, 10% PER -78dBm at 48Mbps, 10% PER -83dBm at 36Mbps, 10% PER -86dBm at 24Mbps, 10% PER -89dBm at 18Mbps, 10% PER -91dBm at 12Mbps, 10% PER -92dBm at 9Mbps, 10% PER -93dBm at 6Mbps, 10% PER ■ 11b mode -88dBm at 11Mbps, 8% PER -91dBm at 5.5Mbps, 8% PER -95dBm at 2Mbps, 8% PER -98dBm at 1Mbps, 8% PER
RX maximum input signal	■ -10dB(OFDM 54Mbps) ■ -5dBm(-5dBm 11Mbps)
Adjacent Channel Rejection	■ 18dB(OFDM 54Mbps) ■ 37dB(CCK 11Mbps)
Power consumption	■ TX mode: 800mA(max) at 3.3V ■ RX mode: 400mA(max) at 3.3V

2.3 Test Mode and Test Software

The following test mode and test software was performed for conduction and radiation test:

- 802.11b (CH 01: 2412MHz) • 802.11b (CH 06: 2437MHz) • 802.11b (CH 11: 2462MHz)
- 802.11g (CH 01: 2412MHz) • 802.11g (CH 06: 2437MHz) • 802.11g (CH 11: 2462MHz)
- An executive programs, "Radioscope.exe" Application under WIN XP.

Note: All the transmitter rates had been pre-tested, and the test data is worst case


2.4 Description of Test System

Device	Manufacturer	Model No.	Description
PC	IBM	IGV	Power Cable, Unshielding 1.8 m
Monitor	SlimAGE	510A	Power Cable, Adapter Unshielding 1.8 m Data Cable, VGA shielding 1.35 m
Keyboard	IBM	KB-0225	Data Cable, PS2 shielding 1.85 m
Mouse	IBM	MO28VO	Data Cable, USB shielding 1.85 m
Printer	HP	Desk Jet400	Power Cable, Unshielding 1.8 m Data Cable, PRINT shielding 1.6 m
Modem	ACEXX	DM-1414	Power Cable, Unshielding 1.8 m Data Cable, RS232 shielding 1.35 m

Use Cable:

Cable	Quantity	Description
RJ11	4	Unshielding, 0.5m
RJ45	3	Unshielding, 0.5m
RJ45	1	Unshielding, 1.5m

2.5 Connection Diagram of Test System

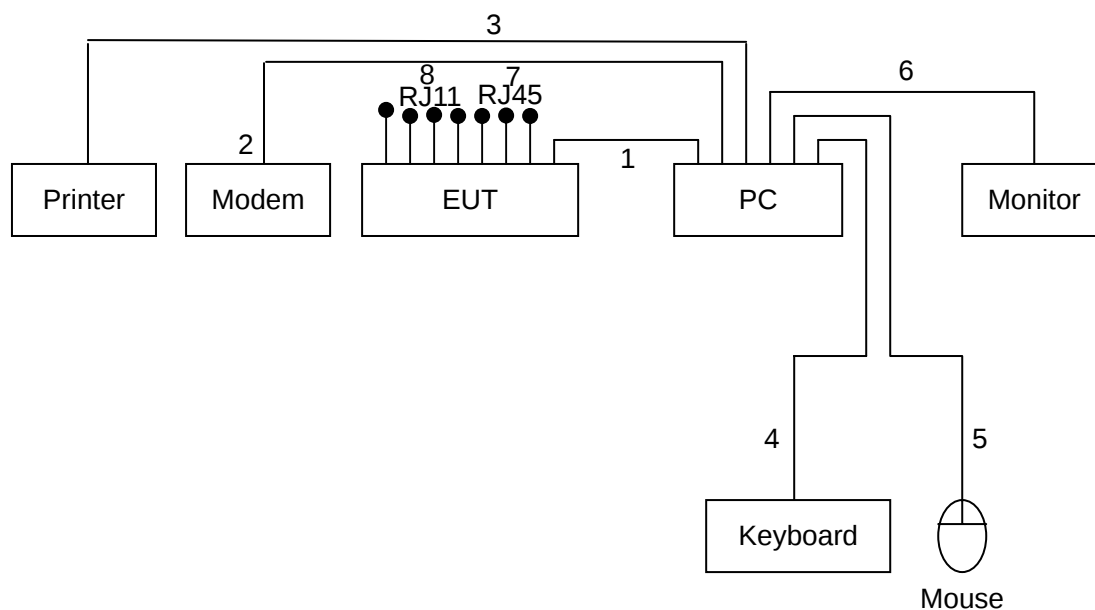

1. The RJ45 cable is connected from PC to the EUT.
2. The RS232 cable is connected from PC to the Modem.
3. The PRINT cable is connected from PC to the Printer.
4. The PS2 cable is connected from PC to the Keyboard.
5. The USB cable is connected from PC to the Mouse.
6. The VGA cable is connected from PC to the Monitor.
7. Those RJ45 cables are floating.
8. Those RJ11 cables are floating.

2.6 General Information of Test

Test Site:	Exclusive Certification Corp. 4F-2, No. 28, Lane 78, Xing-Ai Rd. Nei-hu, Taipei City 114 Taiwan R.O.C.
Test Site Location (OATS1-SD):	No.68-1, Shihbachongsi, shihding Township, Taipei City 223, Taiwan, R.O.C.
FCC Registration Number	632249
Test Voltage:	AC 120V/ 60Hz
Test in Compliance with:	ANSI C63.4-2003 FCC Part 15 Subpart C
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 24620MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.

2.7 History of this test report

ORIGINAL.

3. Antenna Requirements

3.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2 Antenna Construction and Directional Gain

Antenna type: Reverse SMA Connector, Dipole Antenna

Antenna Gain: 2 dBi.

4. Test of Conducted Emission

4.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

*Decreases with the logarithm of the frequency.

4.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

4.3 Typical Test Setup

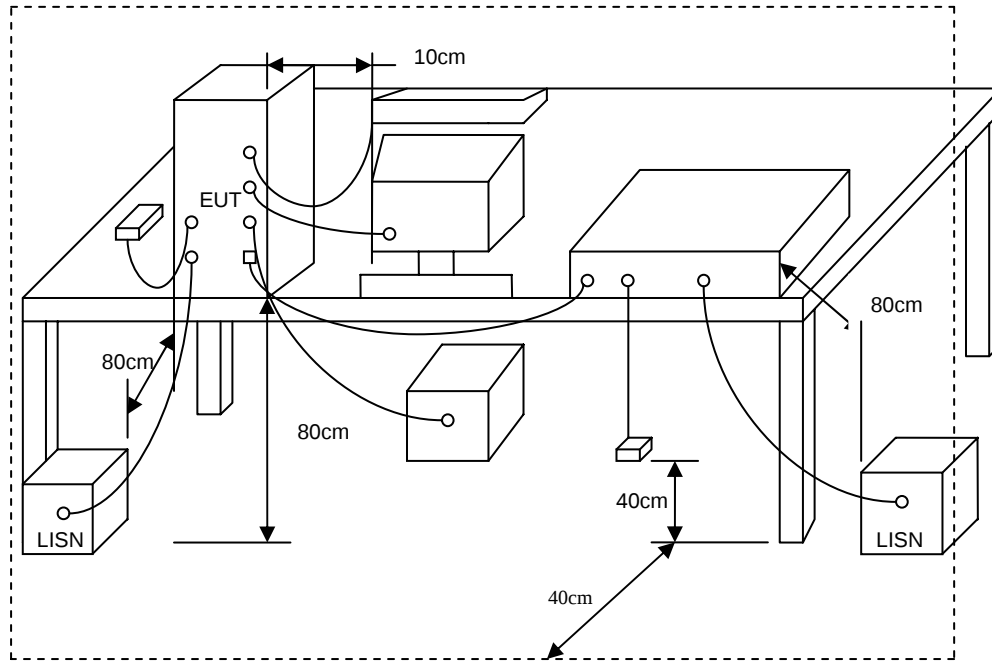


4.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date.
Receiver	R&S	ESCI	100443	2006/09/20	2007/09/19
LISN	NNB-2/16Z	MESS TEC	02/10191	2006/03/31	2007/03/30
LISN	NNB-2/16Z	ROLF HEINE	03/10058	2006/04/27	2007/04/26

4.5 Test Result and Data

EUT : DG834GVSP
 Power : AC 120V
 Test Mode : 802.11g CH1
 Memo : MU18-2150120-A1

Pol/Phase : NEUTRAL
 Temperature : 25 °C
 Humidity : 65 %

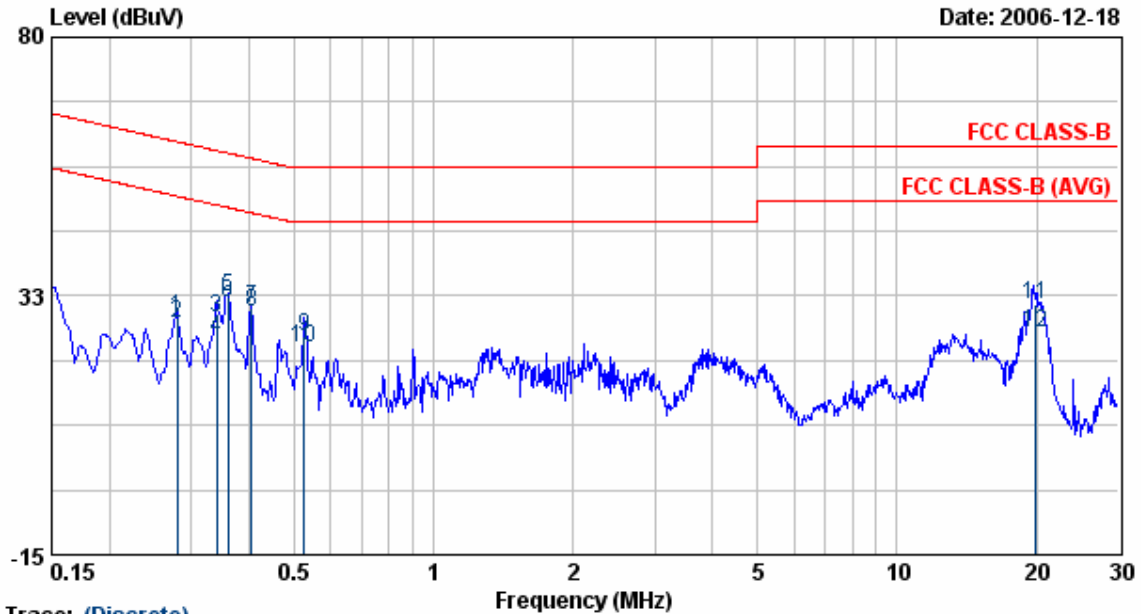


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB	dBuV	dBuV	dBuV	
1	0.28	28.41	0.13	28.54	60.81	-32.27	QP
2	0.28	27.27	0.13	27.40	50.81	-23.41	AVERAGE
3	0.34	28.51	0.14	28.64	59.18	-30.54	QP
4	0.34	24.76	0.14	24.90	49.18	-24.28	AVERAGE
5	0.36	32.07	0.14	32.21	58.74	-26.53	QP
6	0.36	31.02	0.14	31.16	48.74	-17.58	AVERAGE
7	0.40	29.96	0.14	30.10	57.77	-27.67	QP
8	0.40	29.36	0.14	29.50	47.77	-18.27	AVERAGE
9	0.53	24.94	0.15	25.09	56.00	-30.91	QP
10	0.53	22.99	0.15	23.14	46.00	-22.86	AVERAGE
11	19.90	30.38	0.53	30.91	60.00	-29.09	QP
12	19.90	25.22	0.53	25.74	50.00	-24.26	AVERAGE

- Remarks:
1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss
 3. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
 4. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
 5. The data is worse case.

EUT : DG834GVSP
 Power : AC 120V
 Test Mode : 802.11g CH1
 Memo : MU18-2150120-A1

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 65 %

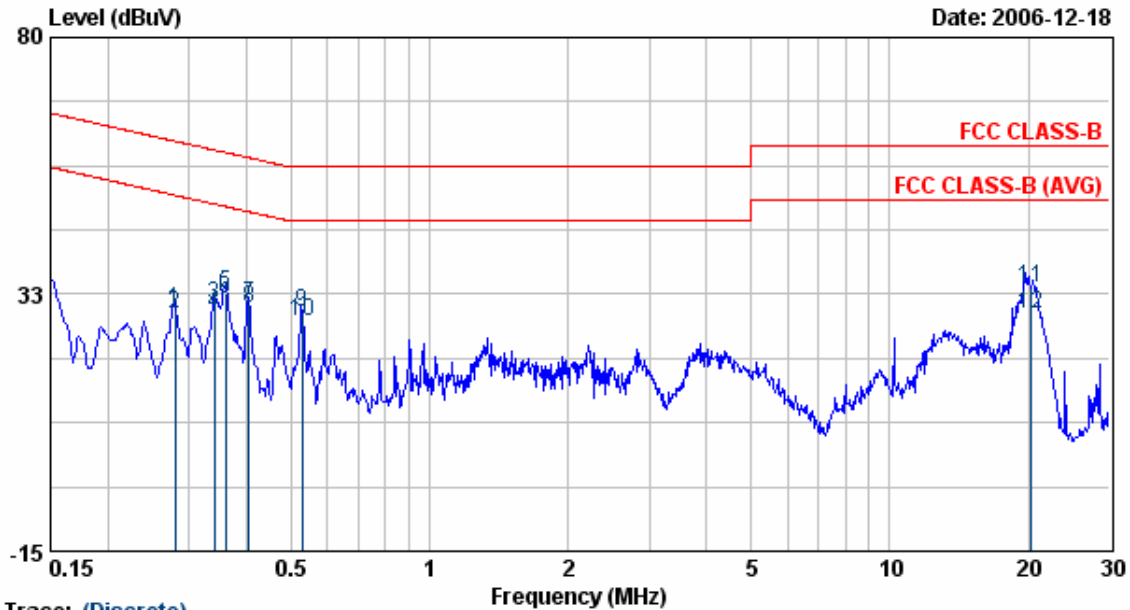

Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB	dBuV	dBuV	dBuV	
1	0.28	29.56	0.13	29.69	60.81	-31.11	QP
2	0.28	28.63	0.13	28.76	50.81	-22.05	AVERAGE
3	0.34	30.42	0.14	30.56	59.18	-28.62	QP
4	0.34	28.76	0.14	28.89	49.18	-20.29	AVERAGE
5	0.36	32.57	0.14	32.71	58.74	-26.03	QP
6	0.36	31.52	0.14	31.66	48.74	-17.08	AVERAGE
7	0.40	30.52	0.14	30.66	57.77	-27.11	QP
8	0.40	29.73	0.14	29.87	47.77	-17.90	AVERAGE
9	0.53	28.98	0.18	29.15	56.00	-26.85	QP
10	0.53	27.24	0.18	27.41	46.00	-18.59	AVERAGE
11	20.31	33.23	0.34	33.57	60.00	-26.43	QP
12	20.31	28.42	0.34	28.76	50.00	-21.24	AVERAGE

- Remarks:
1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss
 3. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
 4. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
 5. The data is worse case.

Test engineer:

5. Test of Radiated Emission

5.1 Test Limit

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2003. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions. For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance Meters	Radiated (μ V / M)	Radiated (dB μ V / M)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0


For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the above table.

Frequency (MHz)	Distance Meters	Radiated (dB μ V / M)
30-230	10	30
230-1000	10	37

5.2 Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.3 Typical Test Setup

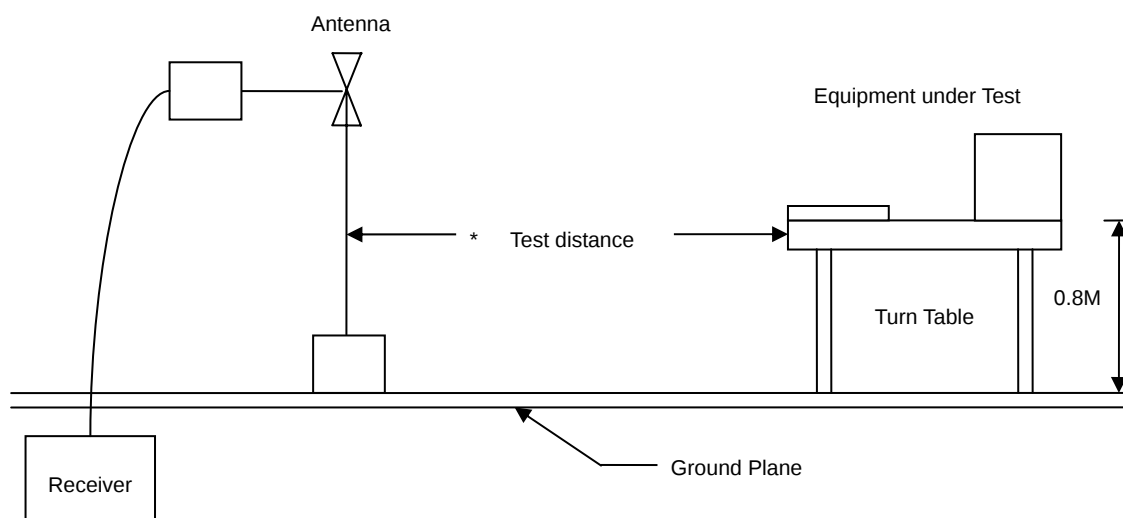


5.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
EMI Receiver	8546A	HP	3807A00454	2006/05/12	2007/05/11
Spectrum Analyzer	FSP40	R&S	10047	2006/01/17	2007/01/16
Horn Antenna	3115	EMCO	31589	2006/02/13	2007/02/12
Horn Antenna	3116	EMCO	31970	2006/02/10	2007/02/09
Bilog Antenna	CBL6112B	Schaffner	2840	2006/04/20	2007/04/19
Amplifier	8449B	Agilent	3008A01954	2006/01/09	2007/01/08
Amplifier	8447D	Agilent	2944A10593	2006/02/25	2007/02/24

5.5 Test Result and Data

EUT	: DG834GVSP	Pol/Phase	: HORIZONTAL
Power	: AC 120V	Temperature	: 22 °C
Test Mode	: Transmit/Receive	Humidity	: 68 %
Operation Channel	: 1	Atmospheric Pressure	: 1010 hPa
Modulation Type	: 802.11g		
Rate	: 18 Mbps		
Memo	: MU18-2150120-A1		

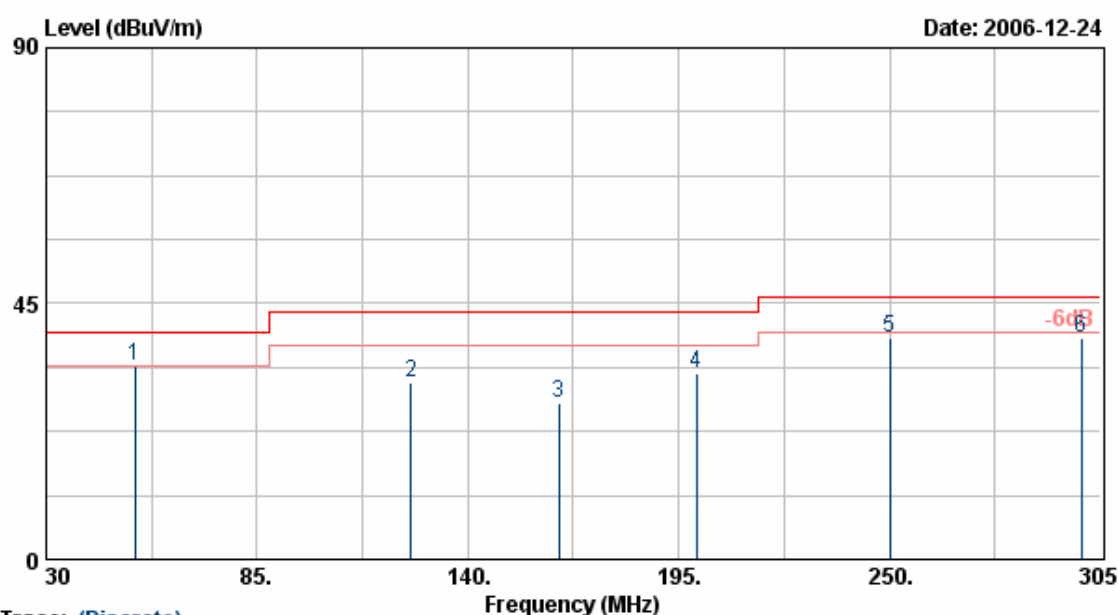

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	53.10	53.65	-19.64	34.01	40.00	-5.99	QP	200	171
2	125.10	46.96	-15.90	31.06	43.50	-12.44	Peak	200	124
3	163.85	44.66	-17.31	27.35	43.50	-16.15	Peak	200	136
4	199.65	50.97	-18.38	32.59	43.50	-10.91	Peak	200	181
5	250.00	53.22	-14.44	38.78	46.00	-7.22	Peak	200	153
6	300.00	52.50	-13.69	38.81	46.00	-7.19	Peak	200	155

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g mode at channel 1, 6, 11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

EUT : DG834GVSP
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 1
 Modulation Type : 802.11g
 Rate : 18 Mbps
 Memo : MU18-2150120-A1

Pol/Phase : HORIZONTAL
 Temperature : 22 °C
 Humidity : 68 %
 Atmospheric Pressure: 1010 hPa

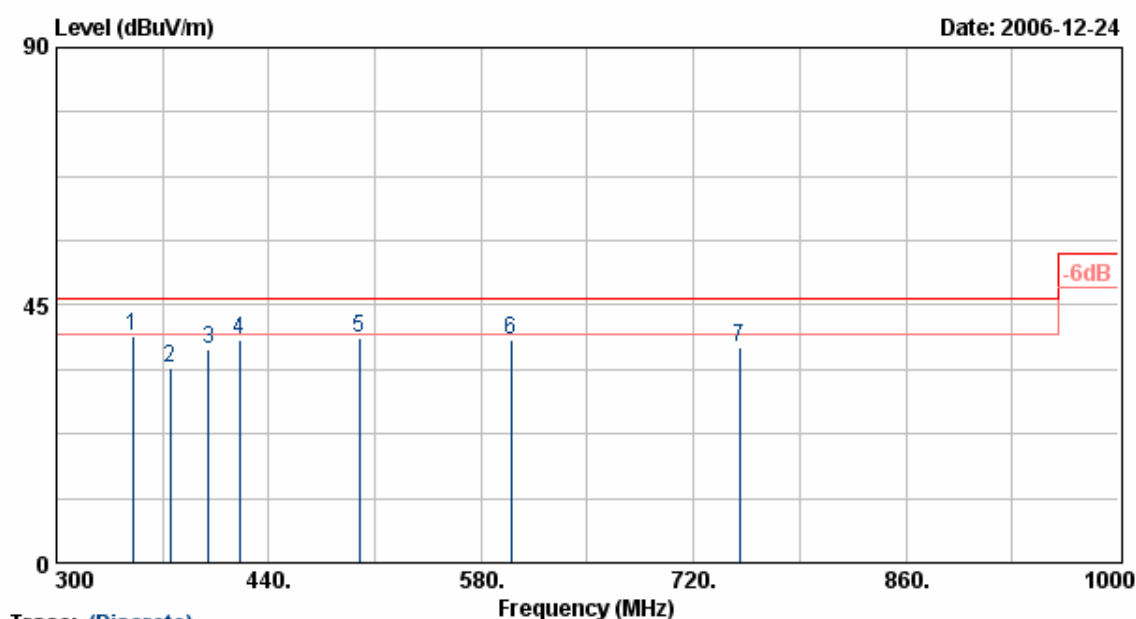


Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	350.01	51.65	-12.07	39.58	46.00	-6.42	Peak	200	82
2	375.05	45.26	-11.35	33.91	46.00	-12.09	Peak	200	147
3	400.05	47.98	-10.63	37.35	46.00	-8.65	Peak	200	152
4	420.40	48.78	-9.85	38.93	46.00	-7.07	Peak	200	162
5	499.98	46.38	-7.18	39.20	46.00	-6.80	Peak	200	135
6	599.99	43.54	-4.72	38.82	46.00	-7.18	Peak	200	136
7	750.00	39.66	-1.99	37.67	46.00	-8.33	Peak	200	135

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g mode at channel 1, 6, 11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

EUT	: DG834GVSP	Pol/Phase	: VERTICAL
Power	: AC 120V	Temperature	: 22 °C
Test Mode	: Transmit/Receive	Humidity	: 68 %
Operation Channel	: 1	Atmospheric Pressure	: 1010 hPa
Modulation Type	: 802.11g		
Rate	: 18 Mbps		
Memo	: MU18-2150120-A1		

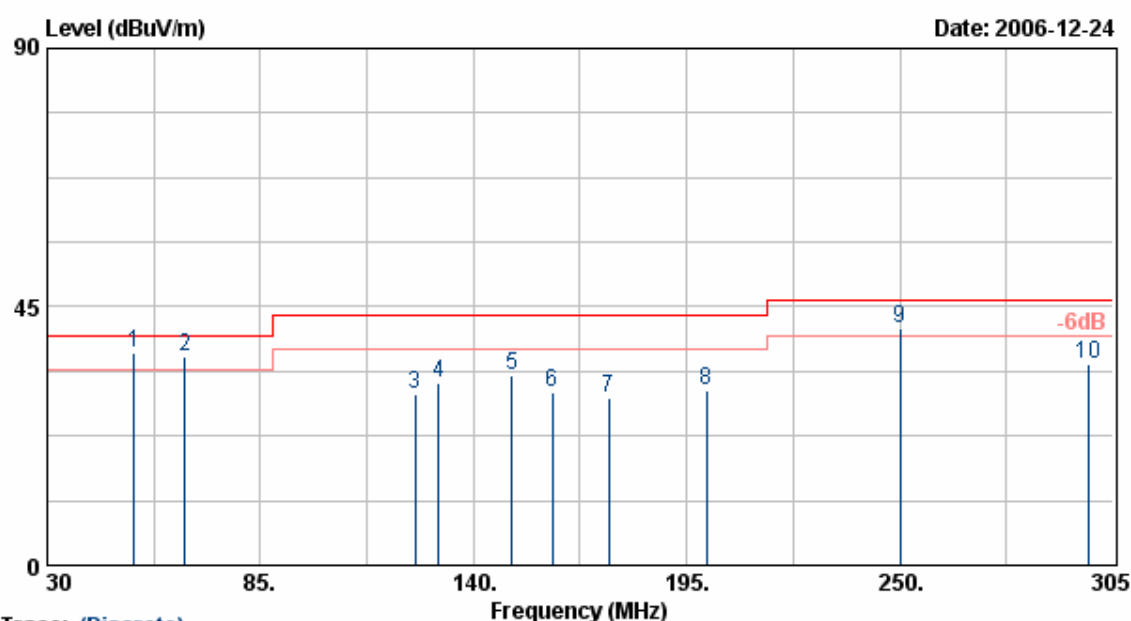

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	52.40	56.37	-19.45	36.92	40.00	-3.08	QP	100	53
2	65.54	57.67	-21.33	36.34	40.00	-3.66	QP	100	53
3	124.95	45.65	-15.90	29.75	43.50	-13.75	Peak	100	124
4	131.08	47.94	-16.09	31.85	43.50	-11.65	Peak	100	185
5	150.00	49.78	-16.83	32.95	43.50	-10.55	Peak	100	130
6	160.43	47.00	-17.02	29.98	43.50	-13.52	Peak	100	174
7	175.00	47.45	-18.21	29.24	43.50	-14.26	Peak	100	200
8	200.13	48.67	-18.39	30.28	43.50	-13.22	Peak	100	200
9	250.01	55.78	-14.43	41.35	46.00	-4.65	QP	100	152
10	298.68	48.67	-13.70	34.97	46.00	-11.03	Peak	100	96

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g mode at channel 1, 6, 11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

EUT : DG834GVSP
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 1
 Modulation Type : 802.11g
 Rate : 18 Mbps
 Memo : MU18-2150120-A1

Pol/Phase : VERTICAL
 Temperature : 22 °C
 Humidity : 68 %
 Atmospheric Pressure: 1010 hPa

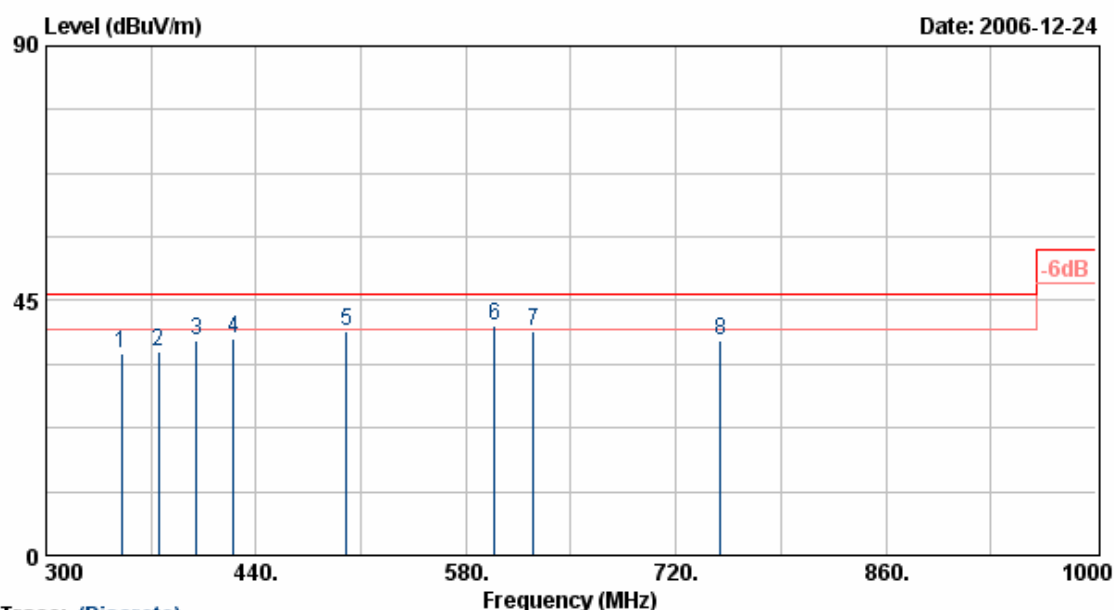

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	350.00	47.89	-12.07	35.82	46.00	-10.18	Peak	100	125
2	375.01	47.37	-11.35	36.02	46.00	-9.98	Peak	100	114
3	400.03	48.57	-10.63	37.94	46.00	-8.06	Peak	100	120
4	424.99	47.88	-9.68	38.20	46.00	-7.80	Peak	100	182
5	500.00	46.77	-7.18	39.59	46.00	-6.41	Peak	100	155
6	598.90	45.33	-4.73	40.60	46.00	-5.40	QP	100	162
7	624.99	43.78	-4.31	39.47	46.00	-6.53	Peak	100	94
8	749.99	39.89	-1.99	37.90	46.00	-8.10	Peak	100	106

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g mode at channel 1, 6, 11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

EUT : DG834GVSP
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 1
 Modulation Type : 802.11b
 Rate : 11 Mbps
 Memo : MU18-2150120-A1

Pol/Phase : HORIZONTAL
 Temperature : 22 °C
 Humidity : 68 %
 Atmospheric Pressure: 1011 hPa

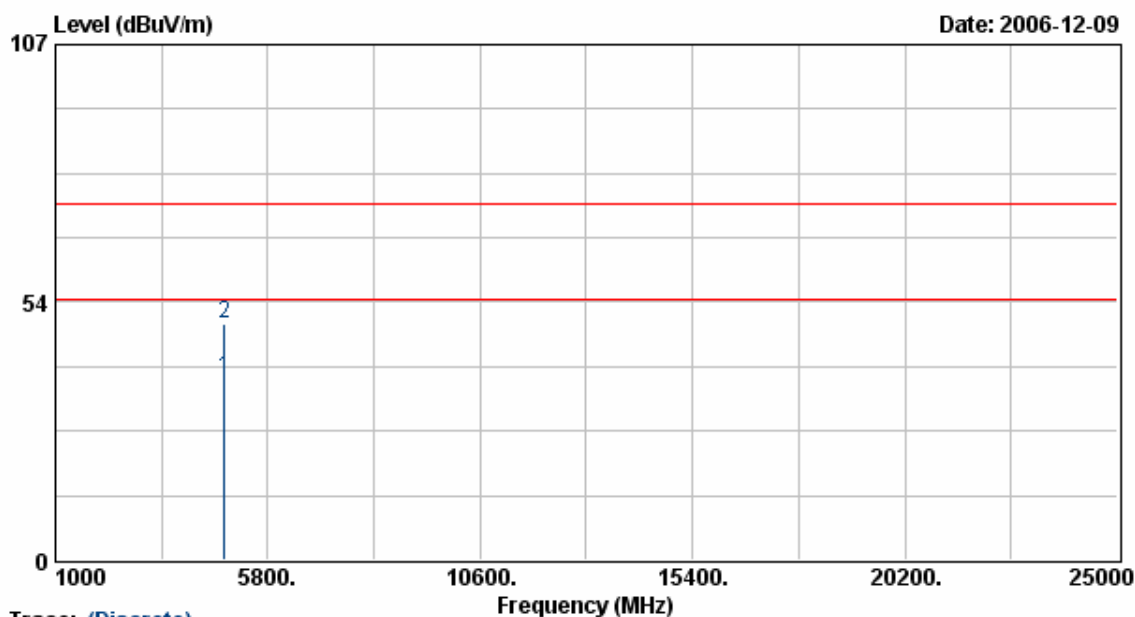

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.13	29.55	8.11	37.66	54.00	-16.34	Average	100	128
2	4824.13	40.80	8.11	48.91	74.00	-25.09	Peak	100	128

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT : DG834GVSP
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel : 1
 Modulation Type : 802.11b
 Rate : 11 Mbps
 Memo : MU18-2150120-A1

Pol/Phase : VERTICAL
 Temperature : 22 °C
 Humidity : 68 %
 Atmospheric Pressure : 1011 hPa

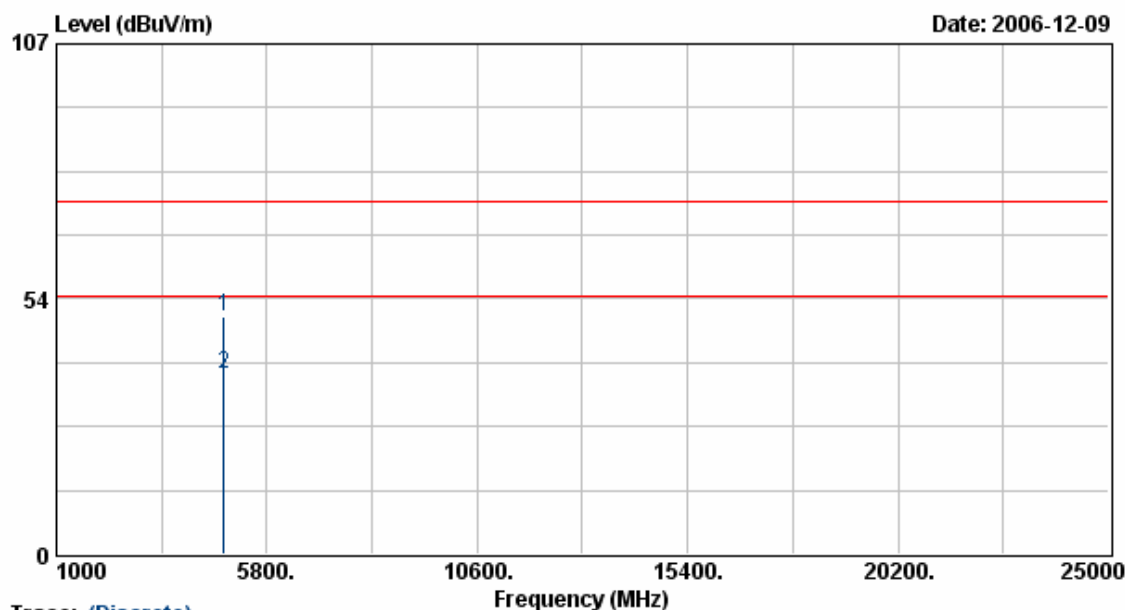

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.00	41.67	8.11	49.79	74.00	-24.21	Peak	100	205
2	4824.00	29.66	8.11	37.77	54.00	-16.23	Average	100	205

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT : DG834GVSP
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel : 6
 Modulation Type : 802.11b
 Rate : 11 Mbps
 Memo : MU18-2150120-A1

Pol/Phase : HORIZONTAL
 Temperature : 22 °C
 Humidity : 68 %
 Atmospheric Pressure : 1011 hPa

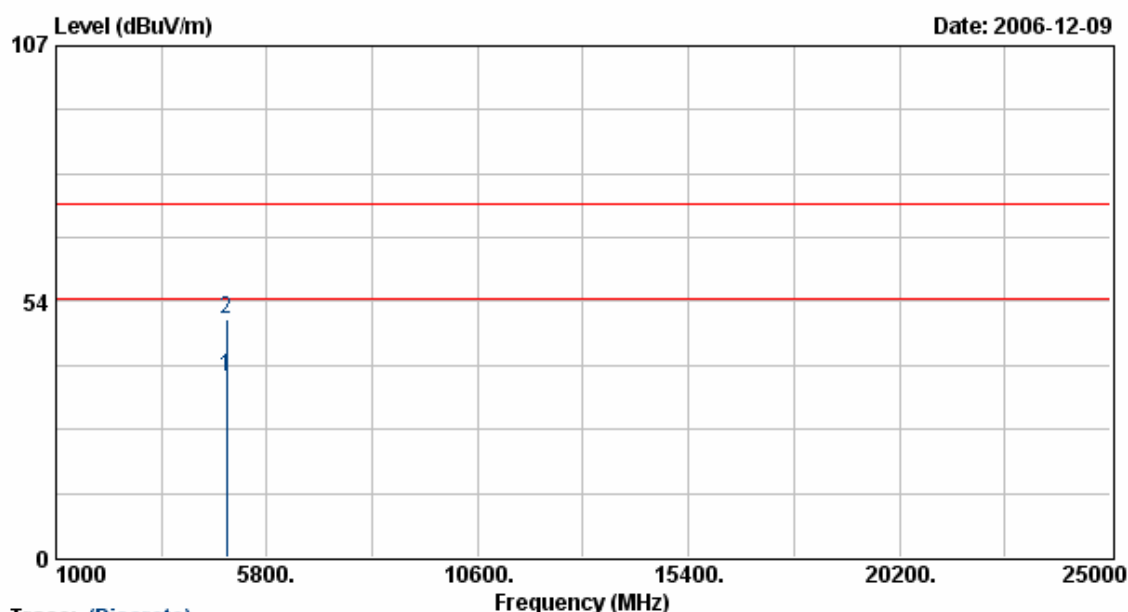

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.00	29.69	8.23	37.92	54.00	-16.08	Average	100	128
2	4874.00	41.44	8.23	49.67	74.00	-24.33	Peak	100	128

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT : DG834GVSP
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel : 6
 Modulation Type : 802.11b
 Rate : 11 Mbps
 Memo : MU18-2150120-A1

Pol/Phase : VERTICAL
 Temperature : 22 °C
 Humidity : 68 %
 Atmospheric Pressure : 1011 hPa

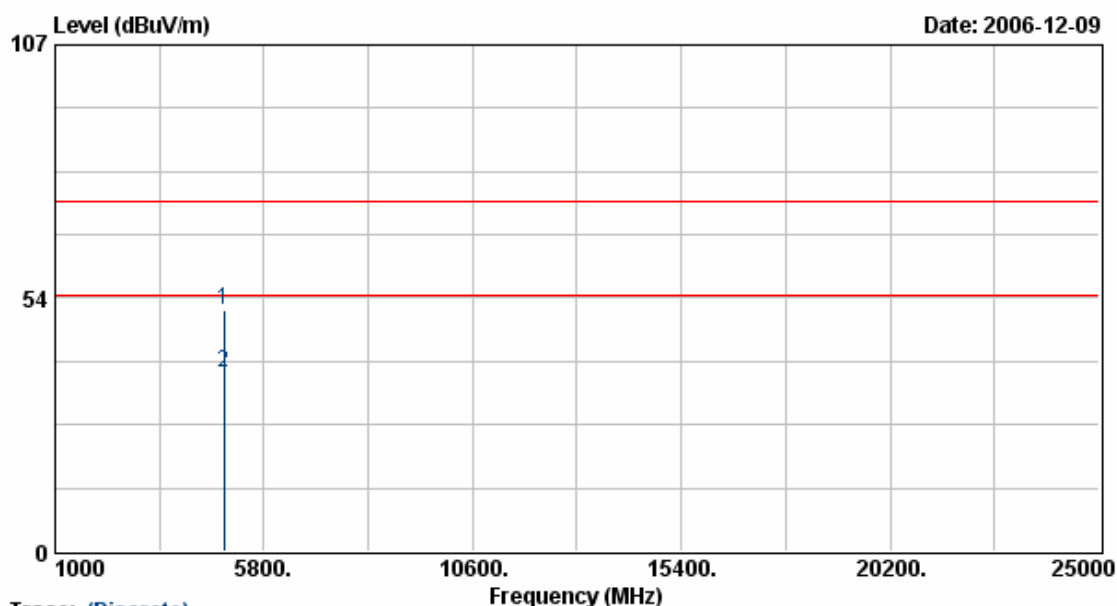

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.00	42.58	8.23	50.82	74.00	-23.18	Peak	100	205
2	4874.00	29.62	8.23	37.86	54.00	-16.14	Average	100	205

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT : DG834GVSP
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 11
 Modulation Type : 802.11b
 Rate : 11 Mbps
 Memo : MU18-2150120-A1

Pol/Phase : HORIZONTAL
 Temperature : 22 °C
 Humidity : 68 %
 Atmospheric Pressure: 1011 hPa

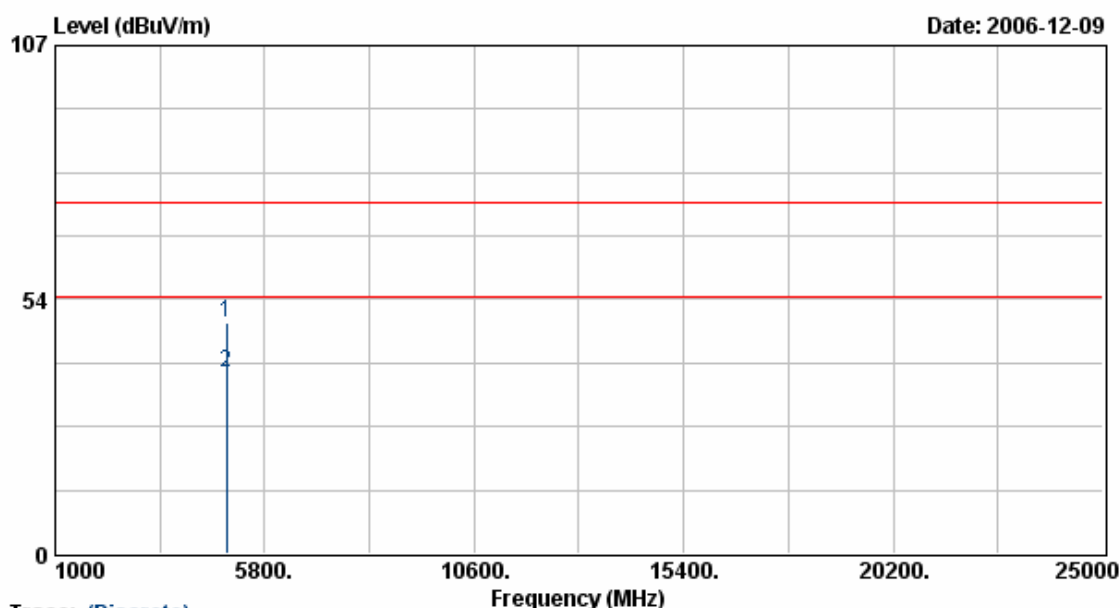

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4924.25	40.40	8.36	48.76	74.00	-25.24	Peak	100	128
2	4924.25	29.65	8.36	38.00	54.00	-16.00	Average	100	128

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT : DG834GVSP
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 11
 Modulation Type : 802.11b
 Rate : 11 Mbps
 Memo : MU18-2150120-A1

Pol/Phase : VERTICAL
 Temperature : 22 °C
 Humidity : 68 %
 Atmospheric Pressure: 1011 hPa

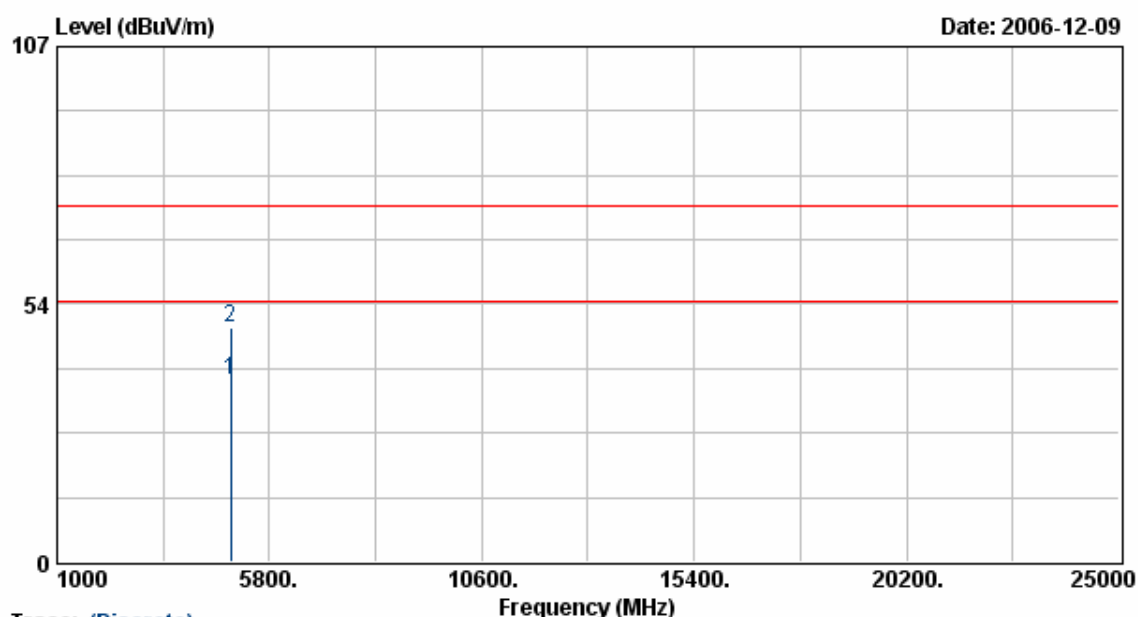

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4924.13	29.47	8.35	37.82	54.00	-16.18	Average	100	205
2	4924.13	40.40	8.35	48.75	74.00	-25.25	Peak	100	205

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT : DG834GVSP
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel : 1
 Modulation Type : 802.11g
 Rate : 18 Mbps
 Memo : MU18-2150120-A1

Pol/Phase : HORIZONTAL
 Temperature : 22 °C
 Humidity : 68 %
 Atmospheric Pressure : 1011 hPa

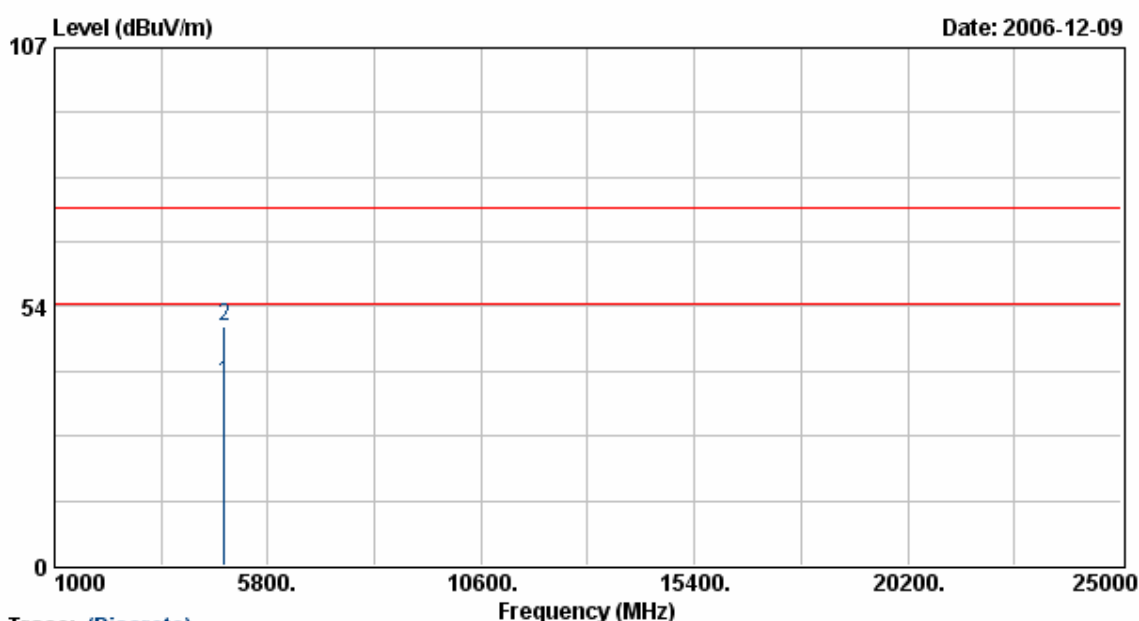

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.00	29.52	8.11	37.63	54.00	-16.37	Average	100	128
2	4824.00	41.21	8.11	49.32	74.00	-24.68	Peak	100	128

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT : DG834GVSP
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 1
 Modulation Type : 802.11g
 Rate : 18 Mbps
 Memo : MU18-2150120-A1

Pol/Phase : VERTICAL
 Temperature : 22 °C
 Humidity : 68 %
 Atmospheric Pressure: 1011 hPa

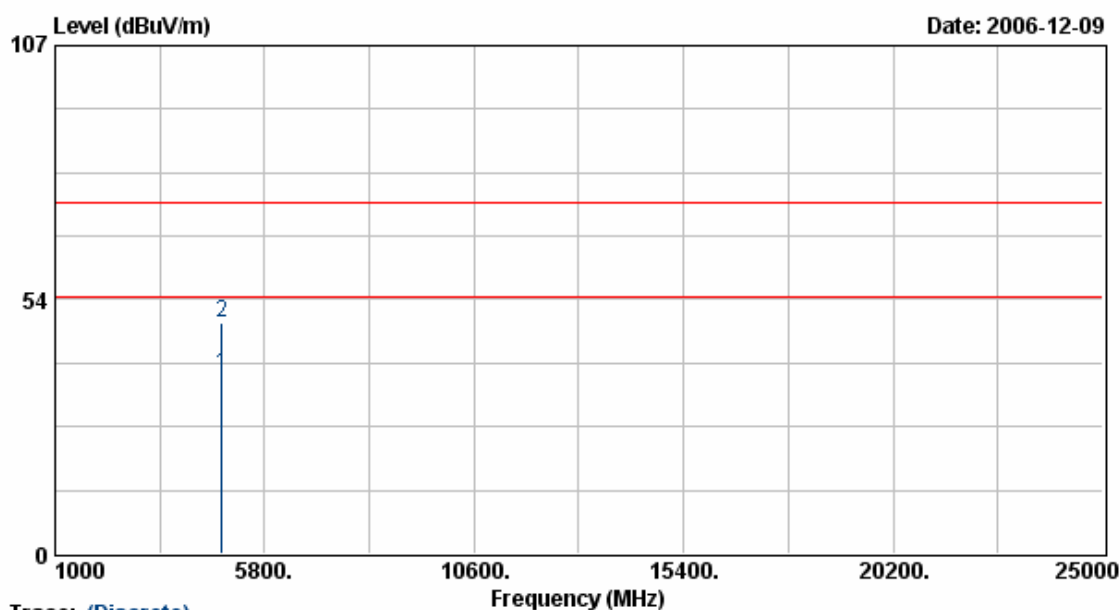

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.00	29.71	8.11	37.82	54.00	-16.18	Average	100	205
2	4824.00	40.67	8.11	48.78	74.00	-25.22	Peak	100	205

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT : DG834GVSP
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel : 6
 Modulation Type : 802.11g
 Rate : 18 Mbps
 Memo : MU18-2150120-A1

Pol/Phase : HORIZONTAL
 Temperature : 22 °C
 Humidity : 68 %
 Atmospheric Pressure : 1011 hPa

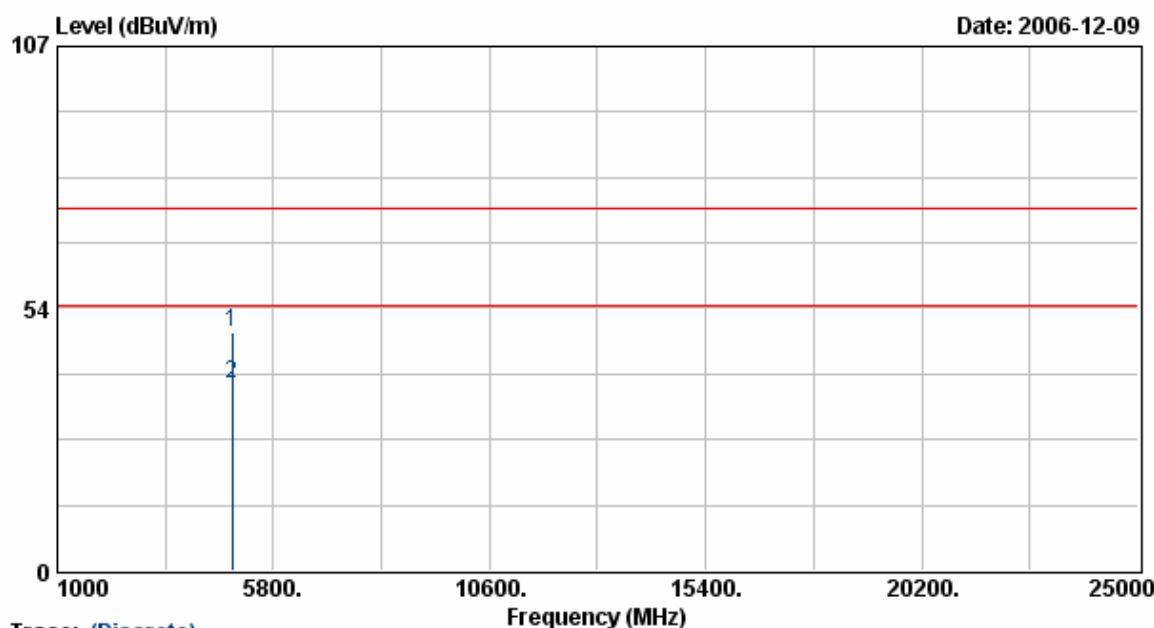

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.00	40.58	8.23	48.81	74.00	-25.19	Peak	100	128
2	4874.00	29.71	8.23	37.95	54.00	-16.05	Average	100	128

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT : DG834GVSP
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel : 6
 Modulation Type : 802.11g
 Rate : 18 Mbps
 Memo : MU18-2150120-A1

Pol/Phase : VERTICAL
 Temperature : 22 °C
 Humidity : 68 %
 Atmospheric Pressure : 1011 hPa

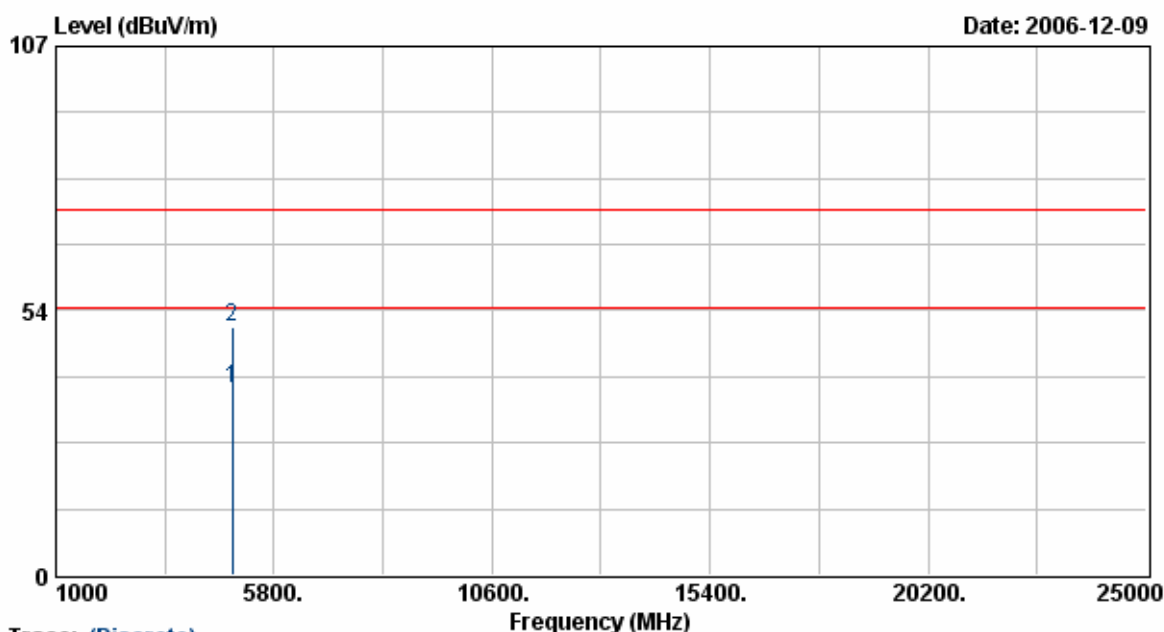

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.00	29.62	8.23	37.85	54.00	-16.15	Average	100	205
2	4874.00	41.92	8.23	50.15	74.00	-23.85	Peak	100	205

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT : DG834GVSP
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 11
 Modulation Type : 802.11g
 Rate : 18 Mbps
 Memo : MU18-2150120-A1

Pol/Phase : HORIZONTAL
 Temperature : 22 °C
 Humidity : 68 %
 Atmospheric Pressure: 1011 hPa

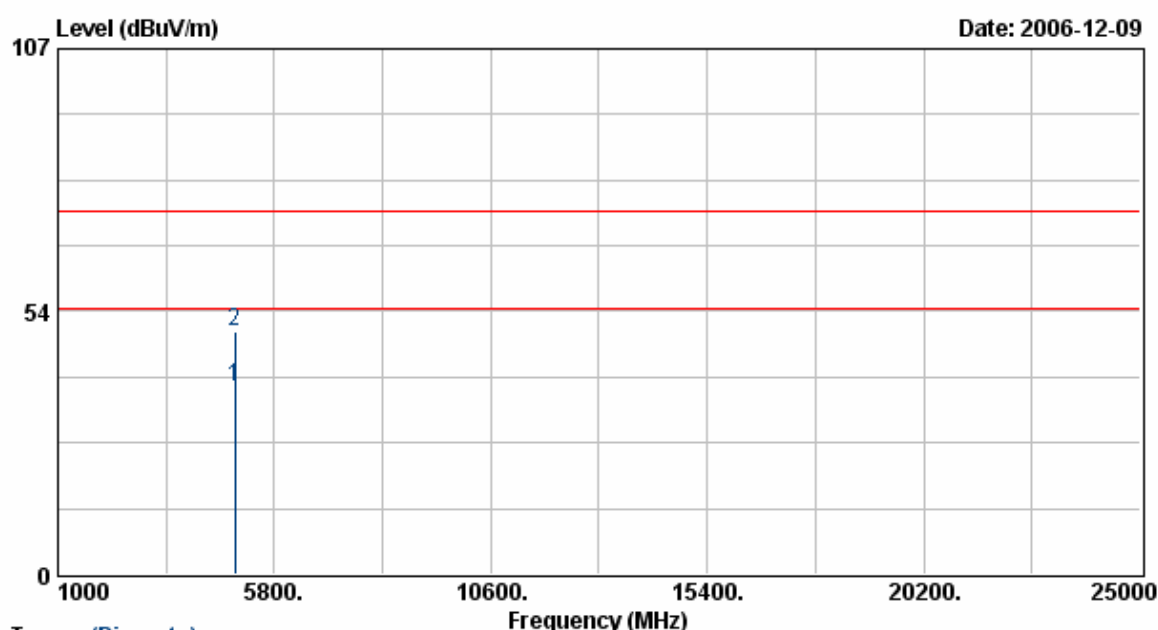

Trace: (Discrete)


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.88	29.64	8.35	37.99	54.00	-16.01	Average	100	128
2	4923.88	40.94	8.35	49.29	74.00	-24.71	Peak	100	128

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT : DG834GVSP
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 11
 Modulation Type : 802.11g
 Rate : 18 Mbps
 Memo : MU18-2150120-A1

Pol/Phase : VERTICAL
 Temperature : 22 °C
 Humidity : 68 %
 Atmospheric Pressure: 1011 hPa

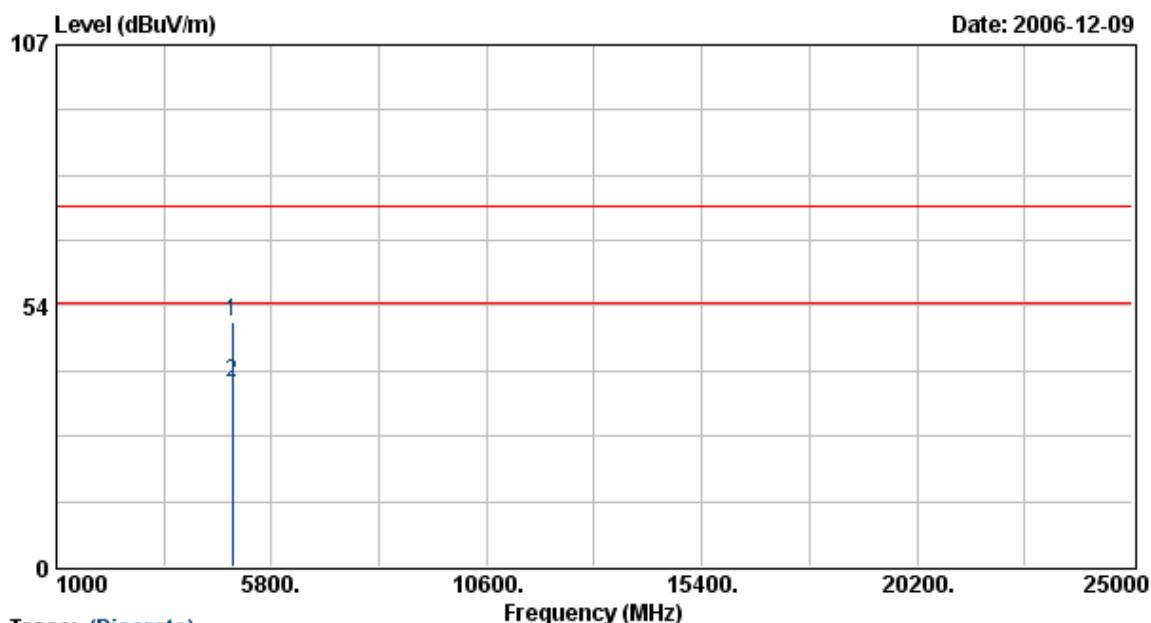

Trace: (Discrete)

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		cm	Deg
1	4924.13	41.76	8.35	50.12	74.00	-23.88	Peak	100	205
2	4924.13	29.52	8.35	37.87	54.00	-16.13	Average	100	205

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

Test engineer:

Ben

6. 6dB Bandwidth Measurement Data


6.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

6.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
3. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

6.3 Test Setup Layout



6.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Valid Date.
Spectrum Analyzer	FSP40	R&S	100047	2007/01/16

6.5 Test Result and Data

(1) Modulation Standard: IEEE 802.11b (11Mbps)

Test Date: Dec. 19, 2006 Temperature: 25 Humidity: 65% Atmospheric pressure: 1010 hPa

Channel	Frequency (MHz)	6dB Bandwidth (MHz)
01	2412	11.40
06	2437	11.60
11	2462	11.70


(2) Modulation Standard: IEEE 802.11g (18Mbps)

Test Date: Dec. 19, 2006 Temperature: 25 Humidity: 65% Atmospheric pressure: 1010 hPa

Channel	Frequency (MHz)	6dB Bandwidth (MHz)
01	2412	16.40
06	2437	16.40
11	2462	16.40


Modulation Standard: 802.11b (11Mbps)

Channel: 01

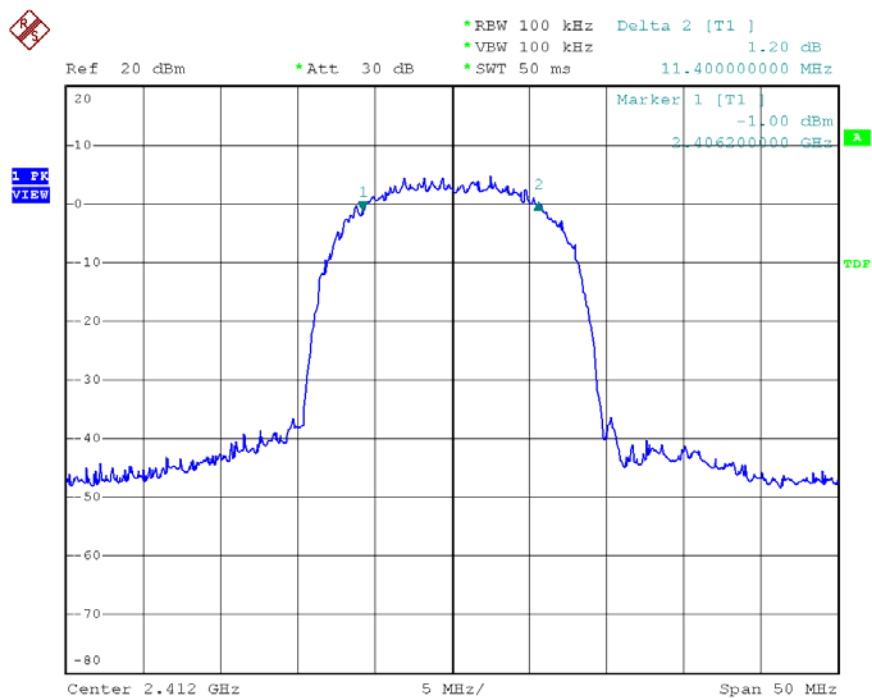


Date: 22.DEC.2006 17:05:15

Channel:06

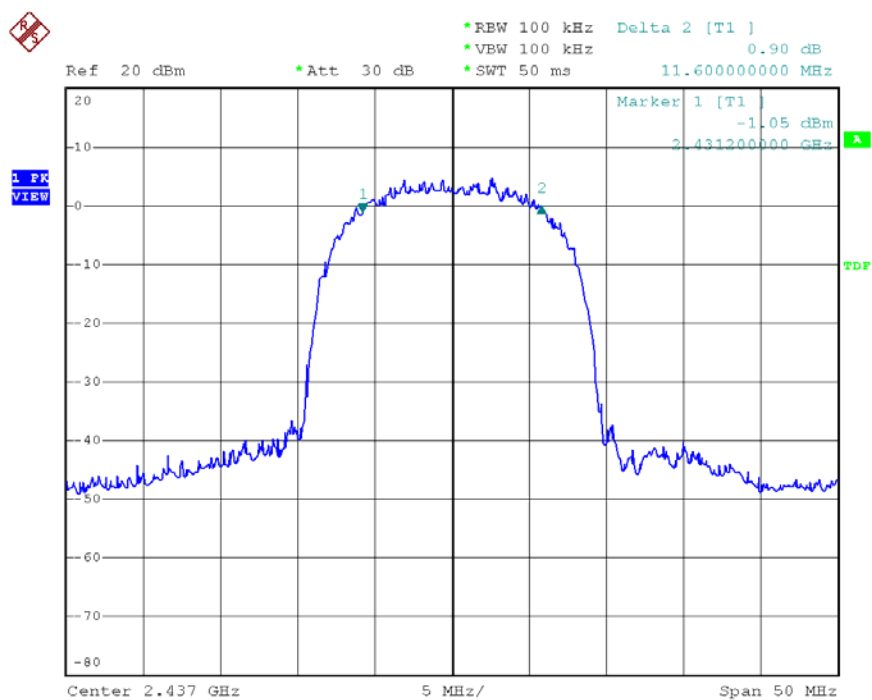

Date: 22.DEC.2006 17:06:42


Channel:11

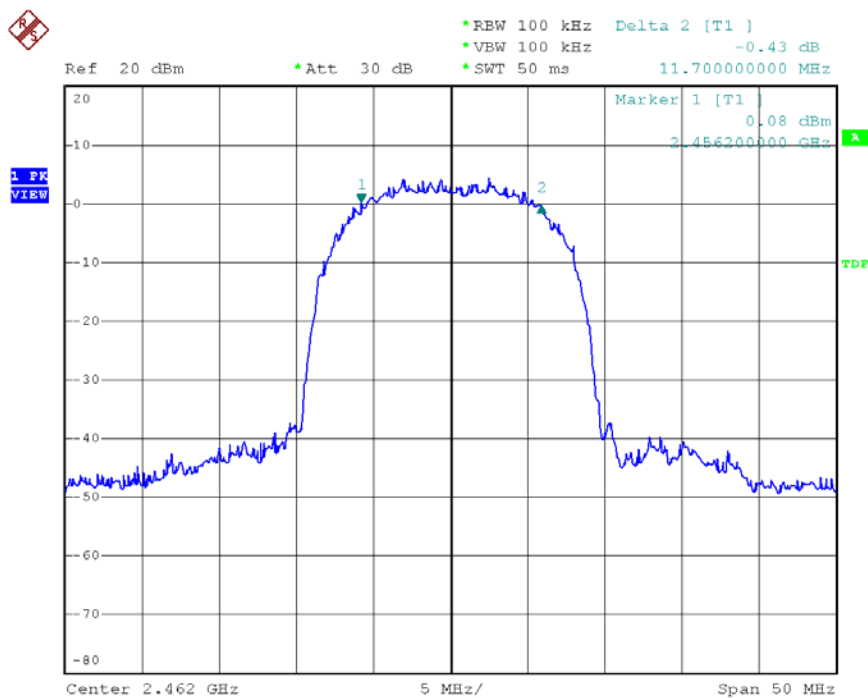

Date: 22.DEC.2006 17:08:24


Modulation Standard:802.11g (18Mbps)

Channel:01

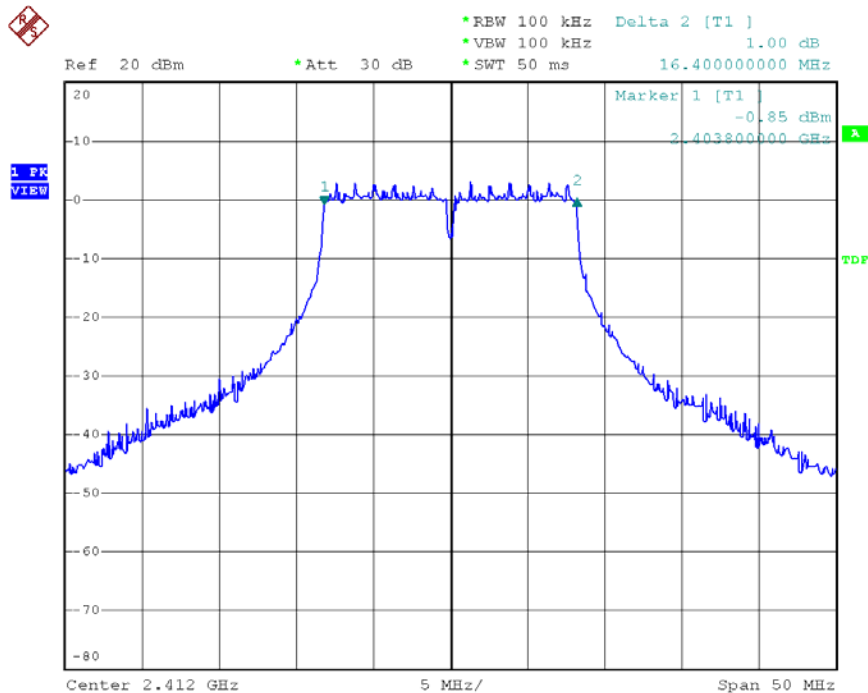


Date: 22.DEC.2006 17:10:51

Channel:06

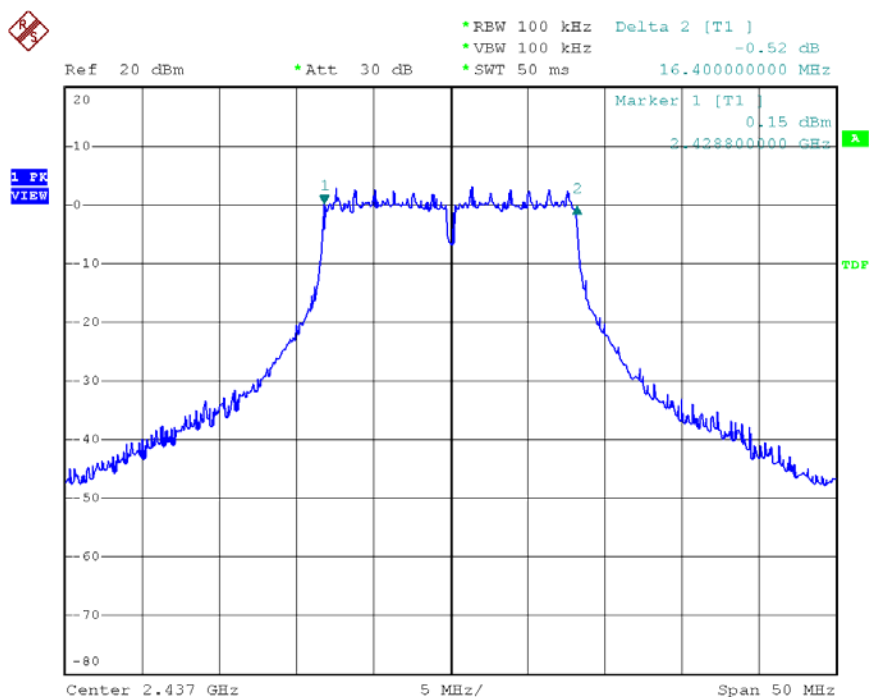

Date: 22.DEC.2006 17:12:17

Channel:11

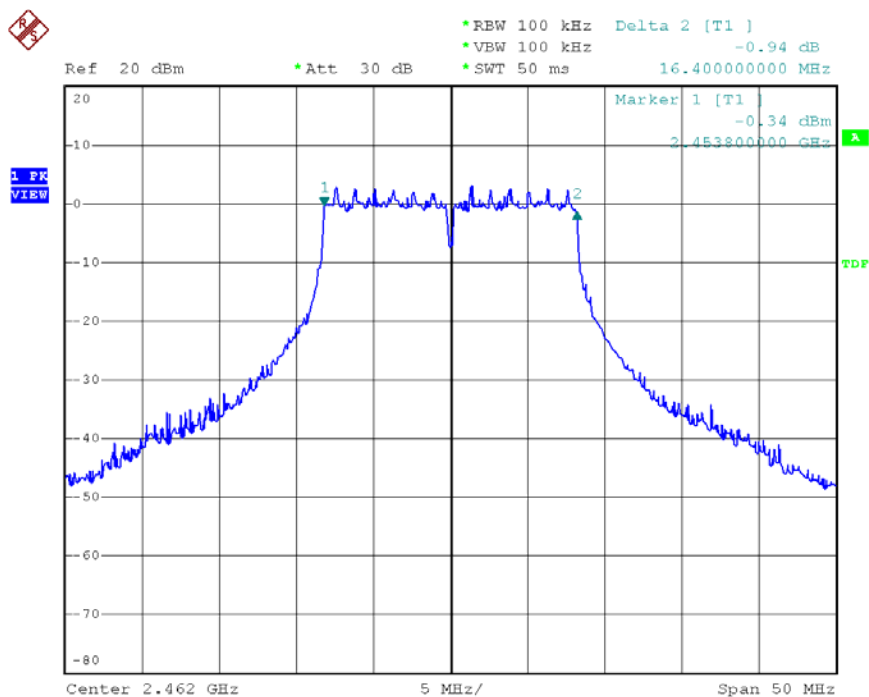

Date: 22.DEC.2006 17:13:55

7. Maximum Peak Output Power


7.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

7.2 Test Procedures

The antenna port(RF output)of the EUT was connected to the input(RF input)of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

7.3 Test Setup Layout



7.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Valid Date.
Spectrum Analyzer	FSP40	R&S	100047	2007/01/16

7.5 Test Result and Data

(1) Modulation Standard: IEEE 802.11b (11Mbps)

Test Date: Dec. 19, 2006 Temperature: 25 Humidity: 65% Atmospheric pressure: 1010 hPa

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
01	2412	17.76	59.70
06	2437	17.55	56.90
11	2462	17.57	57.10


(2) Modulation Standard: IEEE 802.11g (18Mbps)

Test Date: Dec. 19, 2006 Temperature: 25 Humidity: 65% Atmospheric pressure: 1010 hPa

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
01	2412	17.83	60.70
06	2437	17.69	58.70
11	2462	17.68	58.60


Modulation Standard: 802.11b (11Mbps)

Channel: 01

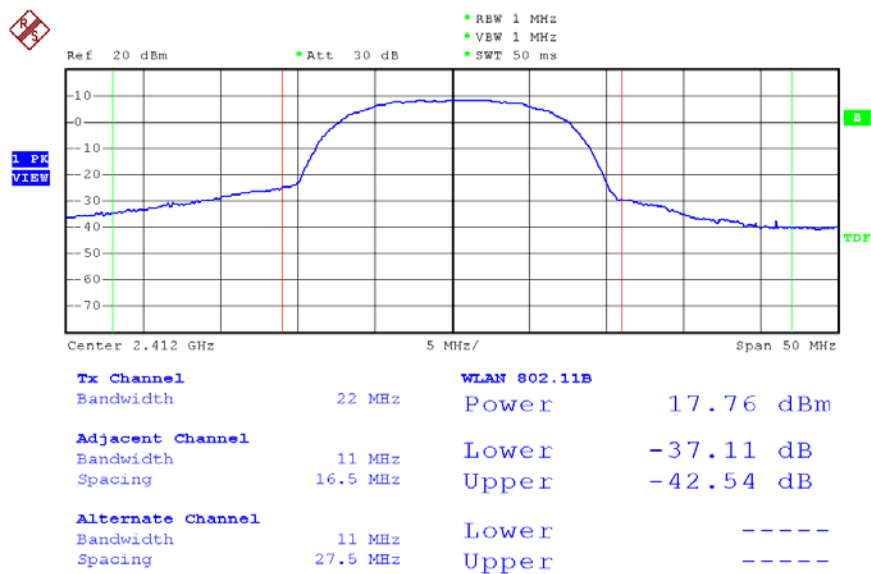


Date: 19.DEC.2006 14:02:55

Channel:06

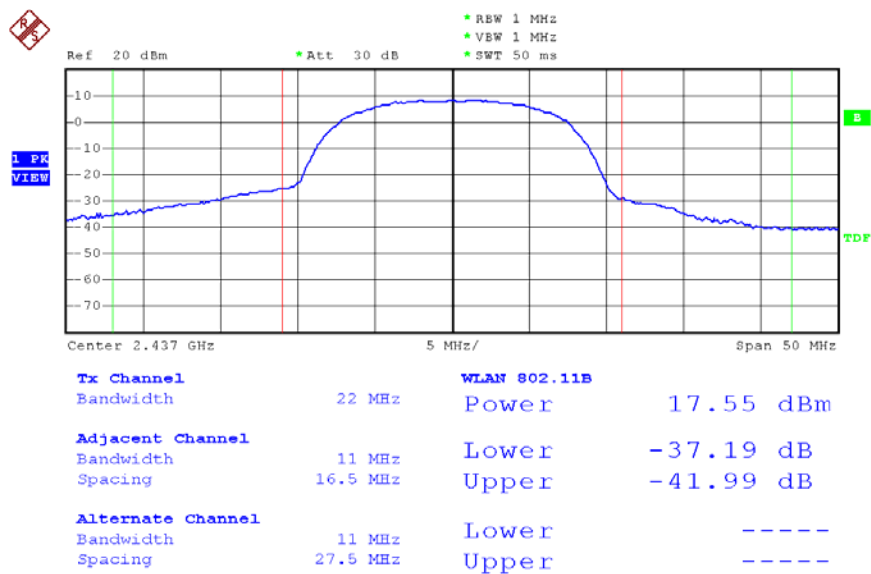

Date: 19.DEC.2006 14:03:39


Channel: 11

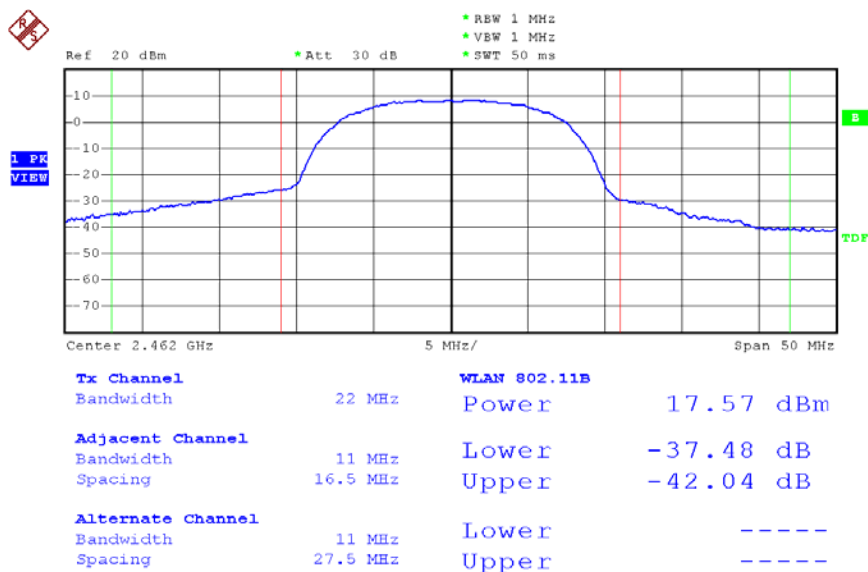

Date: 19.DEC.2006 14:04:21


Modulation Standard: 802.11g (18Mbps)

Channel: 01

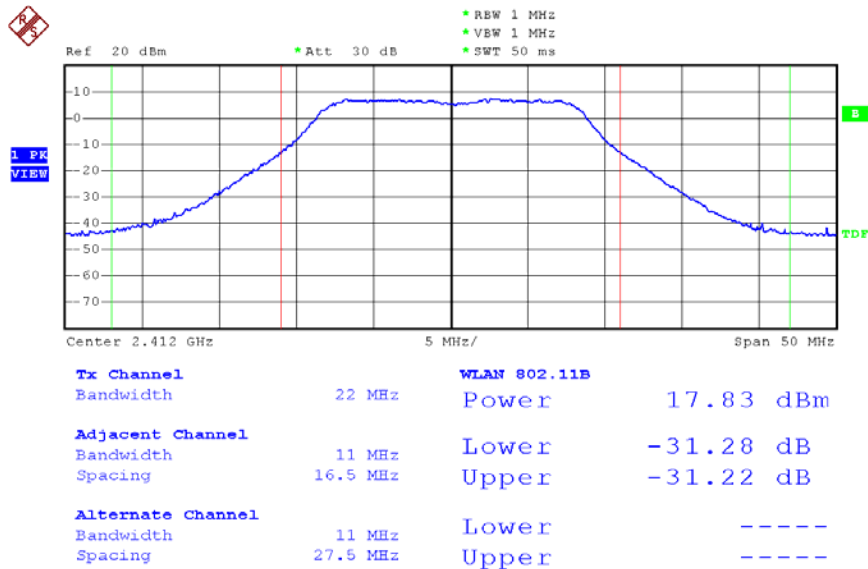


Date: 19.DEC.2006 14:20:00

Channel: 06

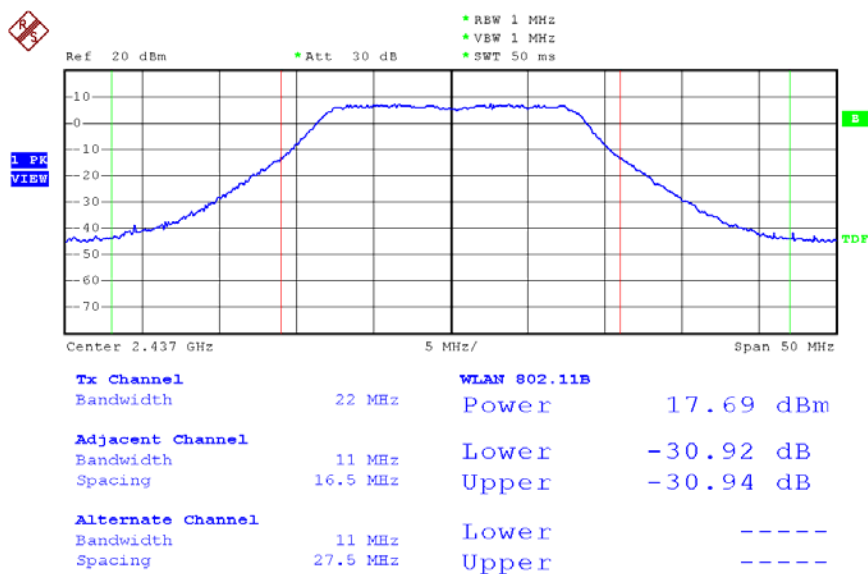

Date: 19.DEC.2006 14:21:33

Channel:11

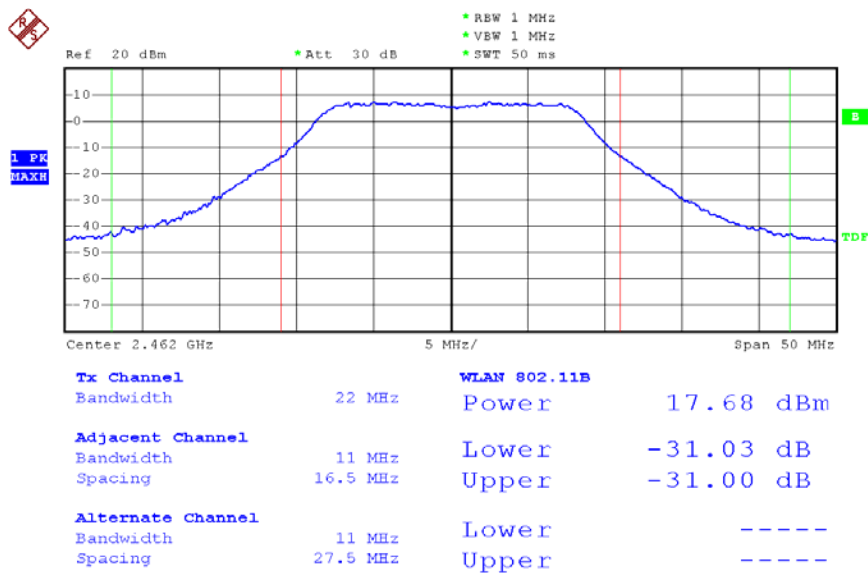

Date: 19.DEC.2006 14:22:49

8. Band Edges Measurement


8.1 Test Limit

Below -20dB of the highest emission level of operating band
(in 100kHz Resolution Bandwidth).

8.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
3. The band edges was measured and recorded.

8.3 Test Setup Layout



8.4 List of Measuring Equipment Used

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Valid Date.
Spectrum Analyzer	FSP40	R&S	100047	2007/01/16

8.5 Test Result and Data

(1) Modulation Standard: IEEE 802.11b (11Mbps)

Test Date: Dec. 19, 2006 Temperature: 24 Humidity: 68% Atmospheric pressure: 1010 hPa

Channel	Frequency	maximum value in frequency (MHz)	maximum value is (dBm)
01	2412	2398.60	-39.61
11	2462	2483.70	-46.27


(2) Modulation Standard: IEEE 802.11g (18Mbps)

Test Date: Dec. 19, 2006 Temperature: 24 Humidity: 68% Atmospheric pressure: 1010 hPa


Channel	Frequency	maximum value in frequency (MHz)	maximum value is (dBm)
01	2412	2399.80	-29.23
11	2462	2483.70	-43.88

Modulation Standard: 802.11b (11Mbps)

Channel: 01

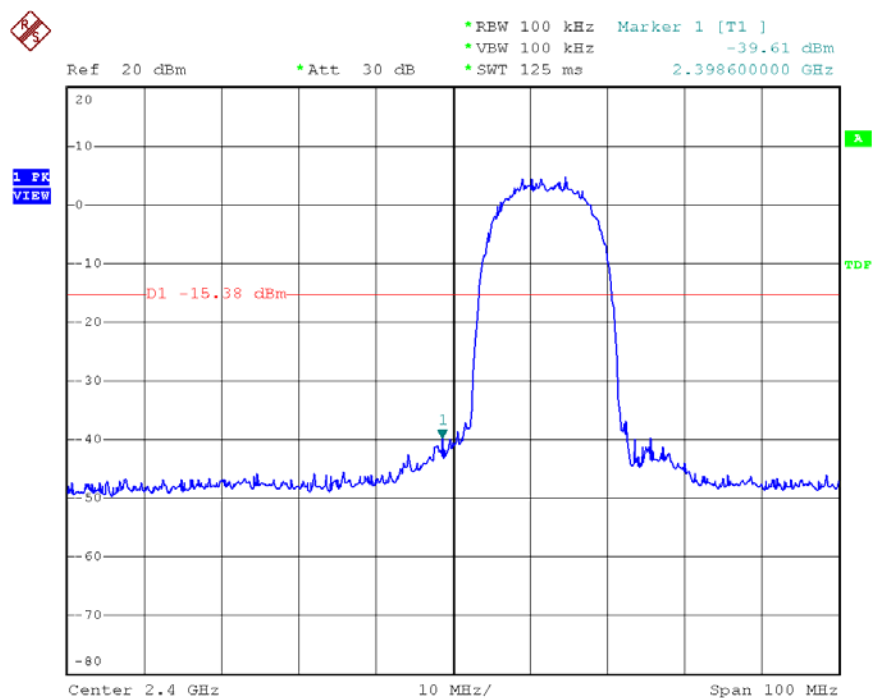


Date: 22.DEC.2006 17:21:24

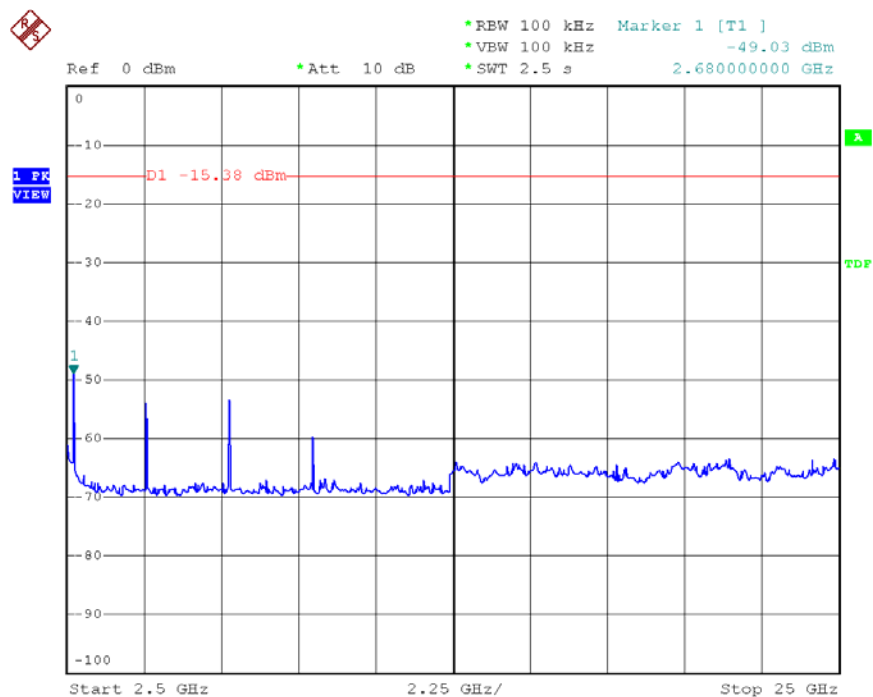


Date: 22.DEC.2006 17:22:52

Channel: 11

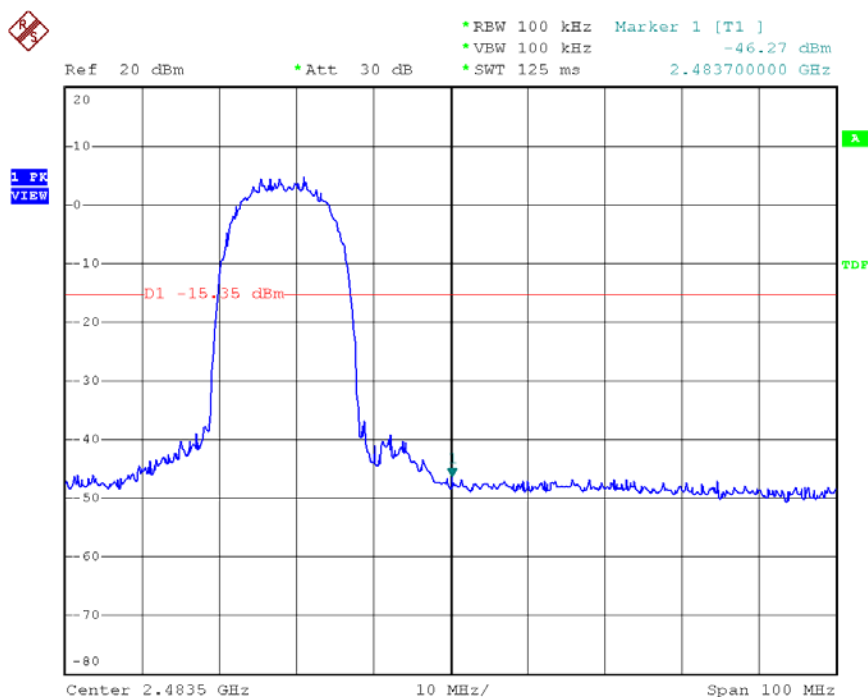


Date: 22.DEC.2006 17:24:33

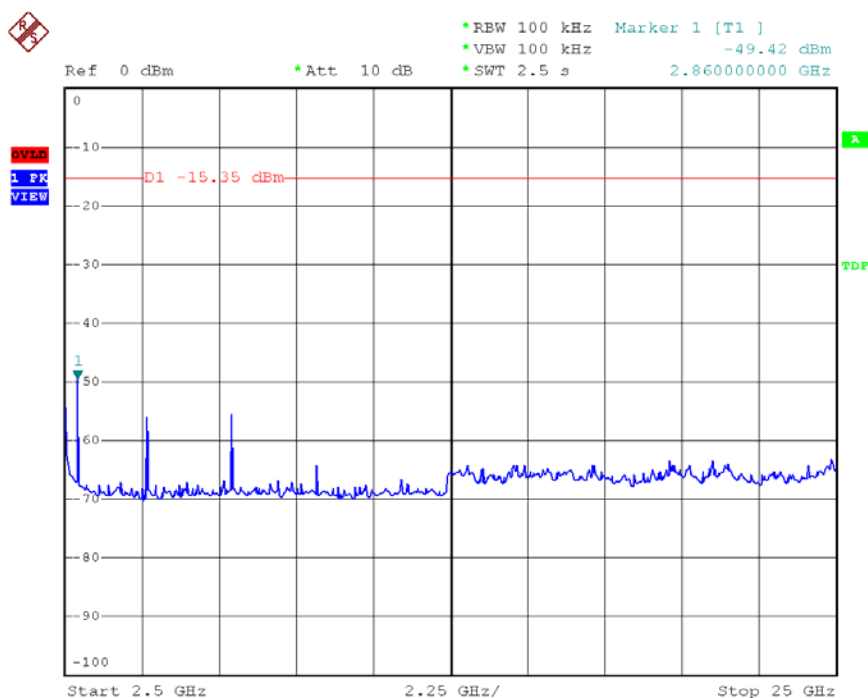


Date: 22.DEC.2006 17:25:13

Modulation Standard: 802.11g (18Mbps)

Channel: 01

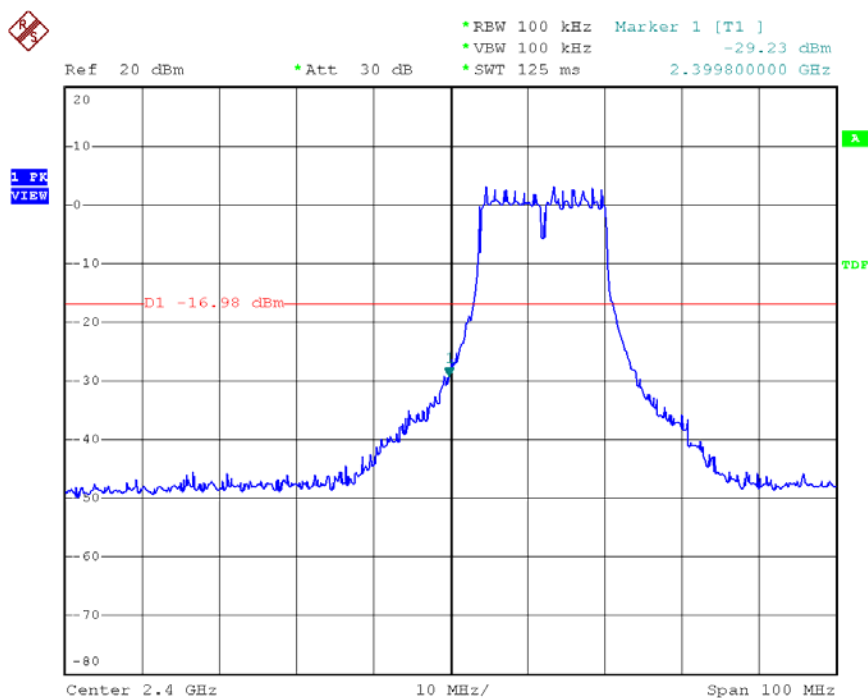


Date: 22.DEC.2006 17:26:29

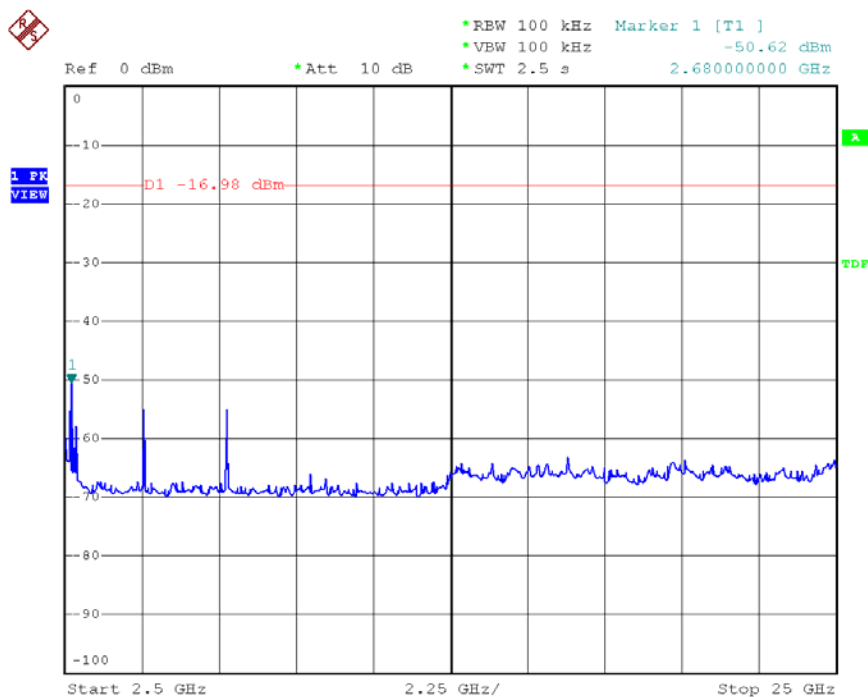


Date: 22.DEC.2006 17:27:18

Channel: 11

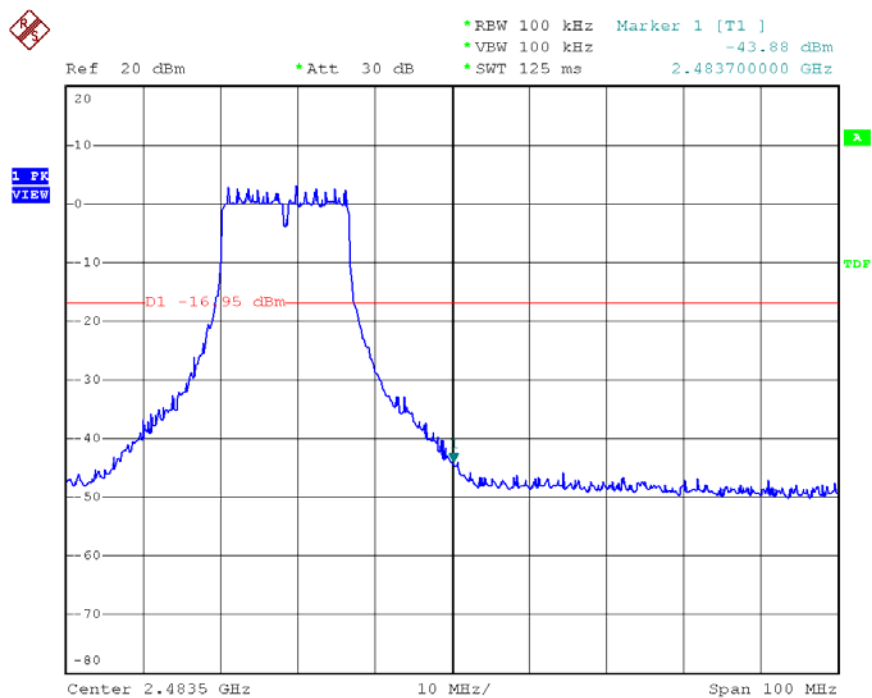

Date: 22.DEC.2006 17:28:42

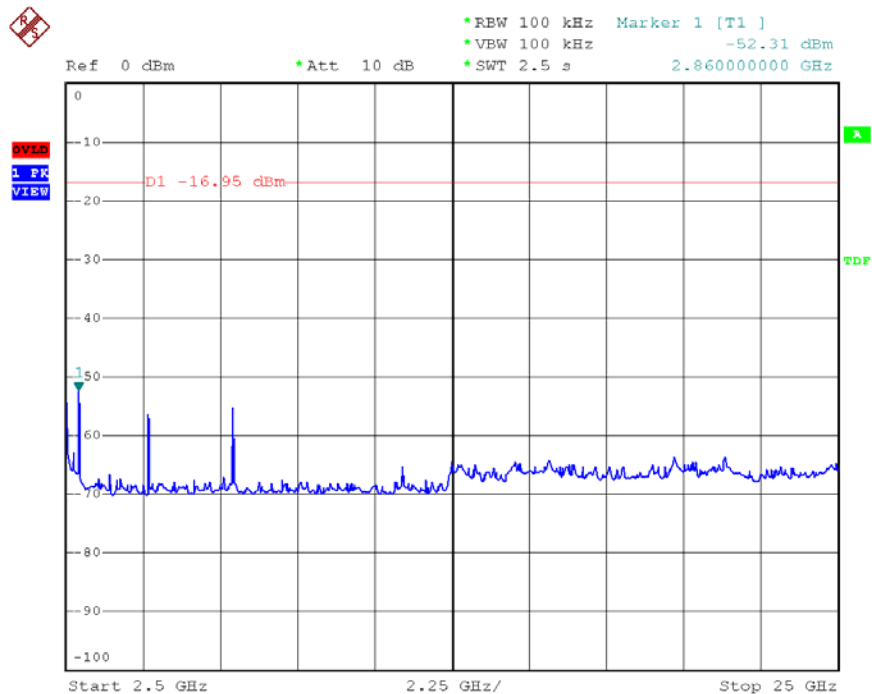

Date: 22.DEC.2006 17:29:14

8.6 Restrict band emission Measurement Data

Modulation Standard: IEEE 802.11b (11Mbps)

Test Date: Dec. 09, 2006 Temperature: 22 Humidity: 68% Atmospheric pressure: 1011 hPa

a) Channel 1

Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2362.428	H	57.36	-0.33	57.03	Peak	74	54	-16.97	128	1.1
2389.458	H	46.05	-0.27	45.79	Ave	74	54	-8.21	128	1.1
2389.254	V	57.43	-0.27	57.16	Peak	74	54	-16.84	205	1.0
2389.458	V	46.12	-0.27	45.85	Ave	74	54	-8.15	205	1.0

b) Channel 11

Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2488.942	H	57.82	-0.03	57.79	Peak	74	54	-16.21	128	1.1
2499.696	H	46.36	0.00	46.36	Ave	74	54	-7.64	128	1.1
2496.466	V	57.88	-0.01	57.87	Peak	74	54	-16.13	205	1.0
2500.000	V	46.53	0.00	46.53	Ave	74	54	-7.47	205	1.0

Modulation Standard: 802.11g (18Mbps)

Test Date: Dec. 09, 2006 Temperature: 22 Humidity: 68% Atmospheric pressure: 1011 hPa

c) Channel 1

Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2371.914	H	57.62	-0.31	57.31	Peak	74	54	-16.69	128	1.1
2389.254	H	46.05	-0.27	45.78	Ave	74	54	-8.22	128	1.1
2389.968	V	57.65	-0.26	57.39	Peak	74	54	-16.61	205	1.0
2389.764	V	46.13	-0.26	45.87	Ave	74	54	-8.13	205	1.0

d) Channel 11

Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2493.046	H	57.72	-0.02	57.70	Peak	74	54	-16.30	128	1.1
2497.986	H	46.37	0.00	46.37	Ave	74	54	-7.63	128	1.1
2498.366	V	57.80	0.00	57.80	Peak	74	54	-16.20	205	1.0
2499.506	V	46.52	0.00	46.52	Ave	74	54	-7.48	205	1.0

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz

9. Power Spectral Density


9.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

9.2 Test Procedures

- 1.The transmitter output was connected to spectrum analyzer.
- 2.The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=span/3KHz.
- 3.The power spectral density was measured and recorded.
- 4.The Sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

9.3 Test Setup Layout :



9.4 List of Measuring Equipment Used

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Valid Date.
Spectrum Analyzer	FSP40	R&S	100047	2007/01/16

9.5 Test Result and Data

(1) Modulation Standard: IEEE 802.11b (11Mbps)

Test Date: Dec.19, 2006 Temperature: 25 Humidity: 65% Atmospheric pressure: 1010 hPa


Channel	Frequency	Maximum Power Density of 3 kHz Bandwidth (dBm)
01	2412	-10.25
06	2437	-10.43
11	2462	-10.62

(2) Modulation Standard: IEEE 802.11g (18Mbps)

Test Date: Dec.19, 2006 Temperature: 25 Humidity: 65% Atmospheric pressure: 1010 hPa


Channel	Frequency	Maximum Power Density of 3 kHz Bandwidth (dBm)
01	2412	-10.40
06	2437	-10.17
11	2462	-10.56

Modulation Standard: 802.11b (11Mbps)
Channel: 01

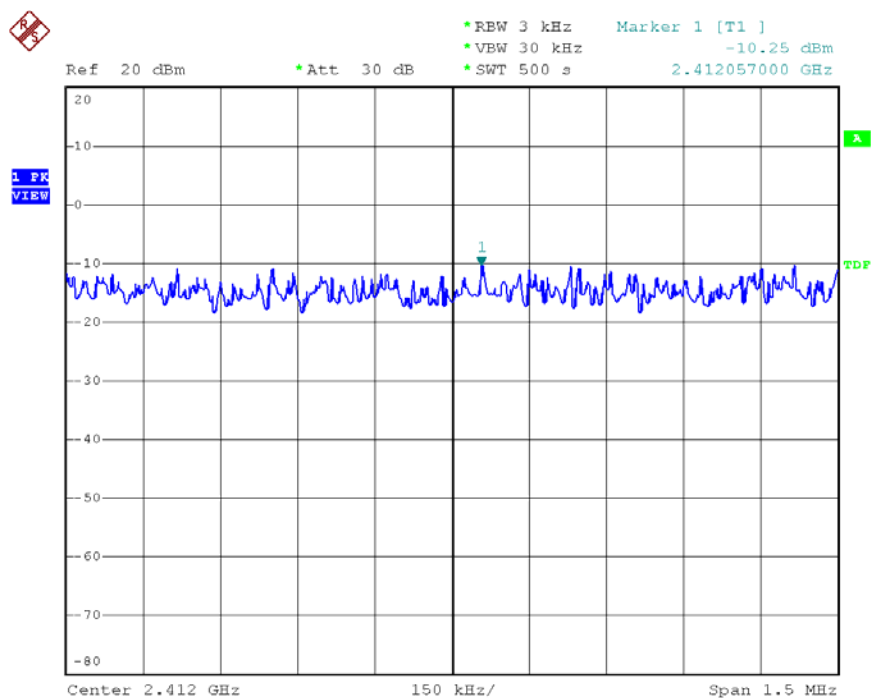


Date: 22.DEC.2006 17:17:45

Channel:06

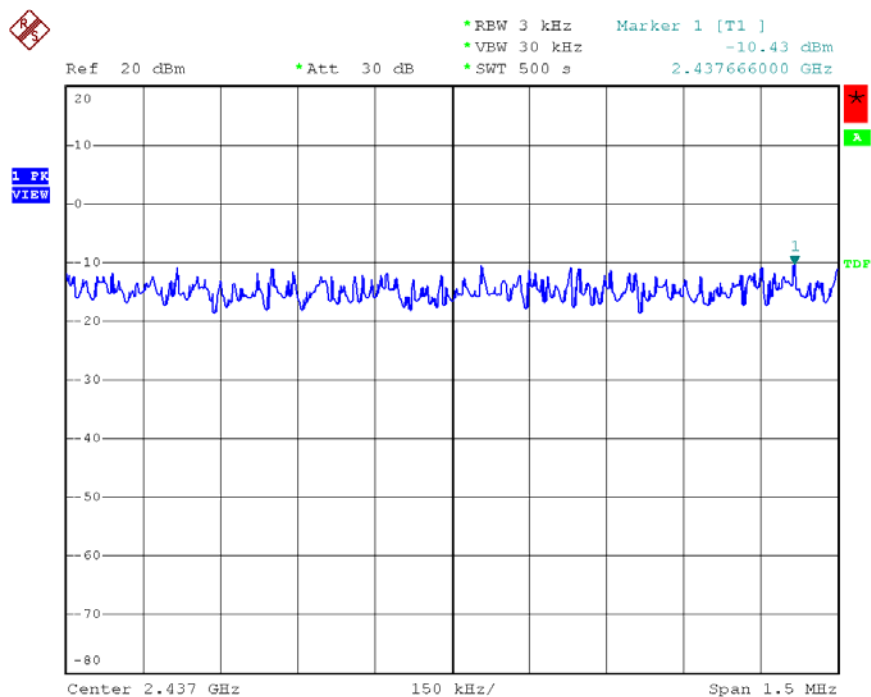

Date: 22.DEC.2006 17:16:55


Channel: 11

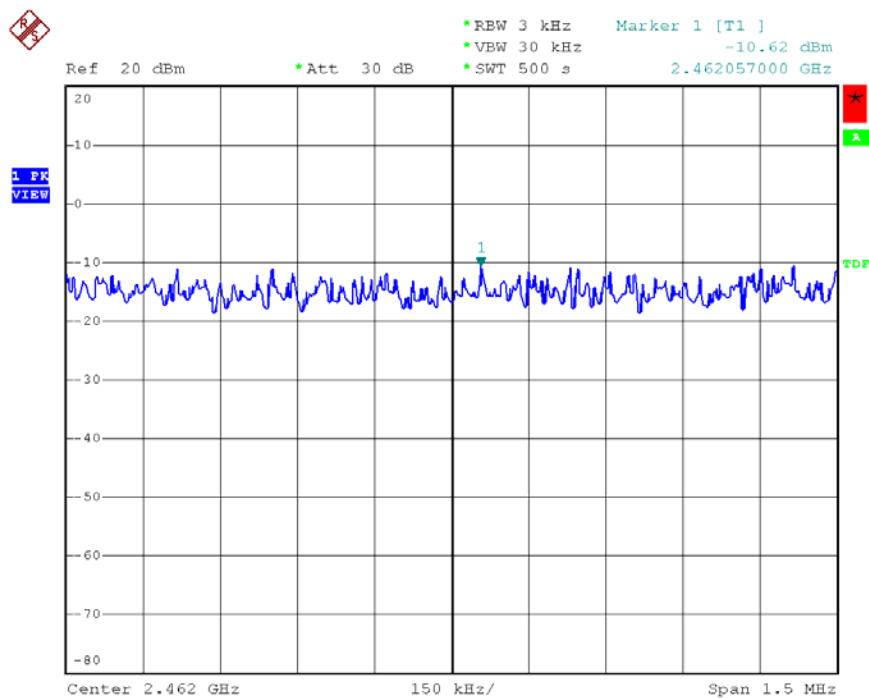

Date: 22.DEC.2006 17:15:47


Modulation Standard: 802.11g (18Mbps)

Channel: 01

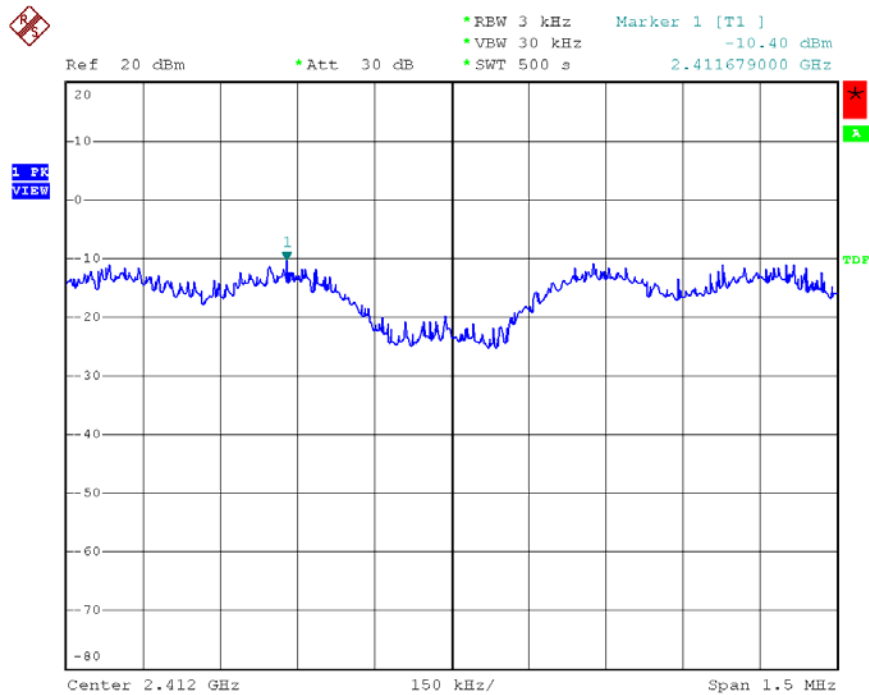


Date: 22.DEC.2006 17:18:32

Channel: 06

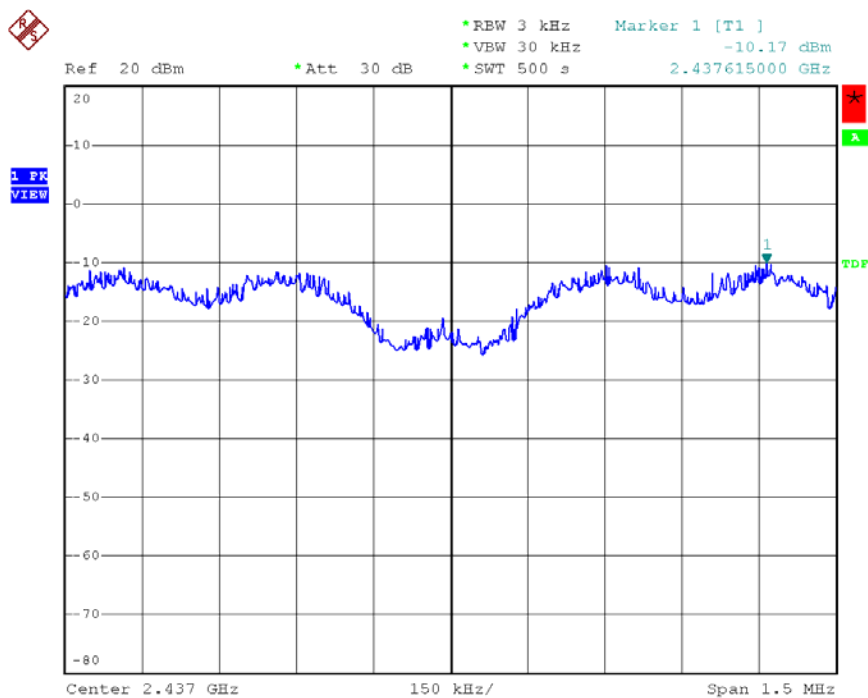

Date: 22.DEC.2006 17:19:07

Channel:11

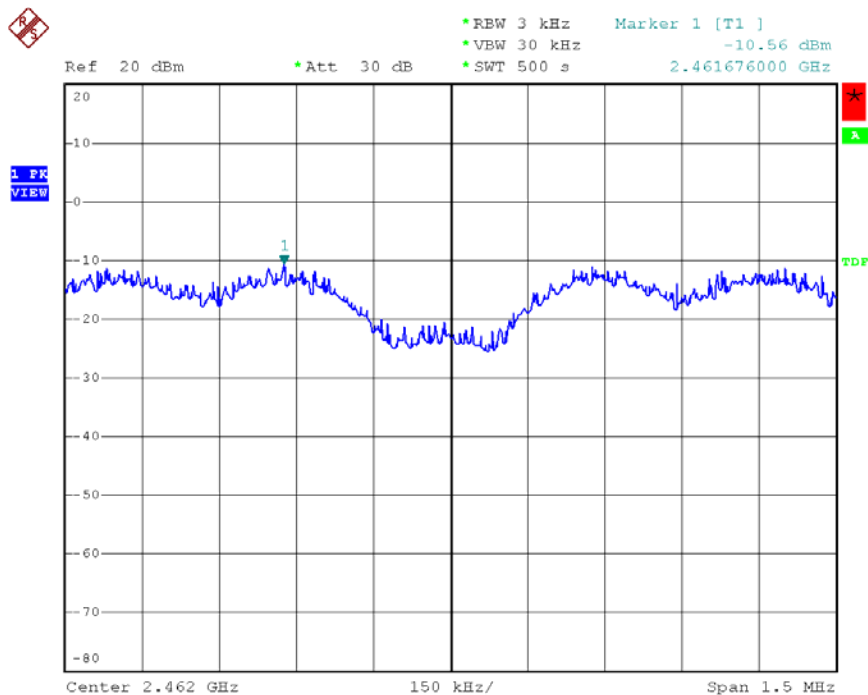

Date: 22.DEC.2006 17:20:02

10. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

10.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.