



FCC TEST REPORT

REPORT NO.: RF950512H01

MODEL NO.: WN311B

RECEIVED: May 12, 2006

TESTED: May 13 to 15, 2006

ISSUED: May 19, 2006

APPLICANT: NETGEAR, Inc.

ADDRESS: 4500 Great America Parkway, Santa Clara, CA
95054 USA

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 107 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



No. 2177-01



TABLE OF CONTENTS

1.	CERTIFICATION.....	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	6
3.	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	8
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	12
3.4	DESCRIPTION OF SUPPORT UNITS.....	13
3.5	CONFIGURATION OF SYSTEM UNDER TEST.....	14
4.	TEST TYPES AND RESULTS	15
4.1	CONDUCTED EMISSION MEASUREMENT	15
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	15
4.1.2	TEST INSTRUMENTS	15
4.1.3	TEST PROCEDURES	16
4.1.4	DEVIATION FROM TEST STANDARD	16
4.1.5	TEST SETUP	17
4.1.6	EUT OPERATING CONDITIONS	17
4.1.7	TEST RESULTS	18
4.2	RADIATED EMISSION MEASUREMENT	24
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	24
4.2.2	TEST INSTRUMENTS	25
4.2.3	TEST PROCEDURES	26
4.2.4	DEVIATION FROM TEST STANDARD	26
4.2.5	TEST SETUP	27
4.2.6	EUT OPERATING CONDITIONS	27
4.2.7	TEST RESULTS	28
4.3	6DB BANDWIDTH MEASUREMENT	57
4.3.1	LIMITS OF 6DB BANDWIDTH MEASUREMENT	57
4.3.2	TEST INSTRUMENTS	57
4.3.3	TEST PROCEDURE	57
4.3.4	DEVIATION FROM TEST STANDARD	57
4.3.5	TEST SETUP	58



4.3.6	EUT OPERATING CONDITIONS	58
4.3.7	TEST RESULTS	59
4.4	MAXIMUM PEAK OUTPUT POWER.....	71
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	71
4.4.2	INSTRUMENTS	71
4.4.3	TEST PROCEDURES	71
4.4.4	DEVIATION FROM TEST STANDARD	71
4.4.5	TEST SETUP	72
4.4.6	EUT OPERATING CONDITIONS	72
4.4.7	TEST RESULTS	73
4.5	POWER SPECTRAL DENSITY MEASUREMENT	75
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	75
4.5.2	TEST INSTRUMENTS	75
4.5.3	TEST PROCEDURE.....	75
4.5.4	DEVIATION FROM TEST STANDARD	75
4.5.5	TEST SETUP.....	76
4.5.6	EUT OPERATING CONDITION.....	76
4.5.7	TEST RESULTS	77
4.6	CONDUCTED EMISSION AND BAND EDGES MEASUREMENT	89
4.6.1	LIMITS OF CONDTCTED EMISSION AND BAND EDGES MEASUREMENT	89
4.6.2	TEST INSTRUMENTS.....	89
4.6.3	TEST PROCEDURE.....	89
4.6.4	DEVIATION FROM TEST STANDARD	90
4.6.5	EUT OPERATING CONDITION.....	90
4.6.6	TEST RESULTS	90
4.7	ANTENNA REQUIREMENT	103
4.7.1	STANDARD APPLICABLE.....	103
4.7.2	ANTENNA CONNECTED CONSTRUCTION	103
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	104
6.	INFORMATION ON THE TESTING LABORATORIES.....	106
	APPENDIX-A.....	A-1



1. CERTIFICATION

PRODUCT : RangeMax NEXT Wireless PCI Adapter
MODEL NO.: WN311B
BRAND: NETGEAR
APPLICANT : NETGEAR, Inc.
TESTED: May 13 to 15, 2006
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: WN311B) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Midoli Peng , **DATE:** May 19, 2006
(Midoli Peng)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** May 19, 2006
Responsible for RF (Hank Chung)

APPROVED BY : May Chen , **DATE:** May 19, 2006
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -4.62dB at 0.193MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -0.2dB at 2390.00MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.53 dB
Radiated emissions (30MHz-1GHz)	2.98 dB
Radiated emissions (1GHz ~18GHz)	2.21 dB



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	RangeMax NEXT Wireless PCI Adapter
MODEL NO.	WN311B
FCC ID	PY306100041
POWER SUPPLY	3.3Vdc from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/ 5.5/ 2/ 1Mbps 802.11g: 54/ 48/ 36/ 24/ 18/ 12/ 9/ 6Mbps Draft 802.11n (20MHz): 130/117/104/78/65/58.5/52/39/26/19.5/13/6.5Mbps Draft 802.11n (40MHz): 300/270/ 243/ 216/ 162/135/121.5/108/81/54/40.5/27/13.5Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, draft 802.11n (20MHz) 7 for draft 802.11n (40MHz)
MAXIMUM OUTPUT POWER	802.11b: 133.352mW 802.11g: 188.365mW draft 802.11n (20MHz): 387.891mW draft 802.11n (40MHz): 205.844mW
ANTENNA TYPE	Printed antenna with 1.8dBi gain
DATA CABLE	NA
I/O PORTS	NA

NOTE:

1. The EUT incorporates a MIMO function with 802.11b, 802.11g, draft 802.11n. Physically, the card provides two completed transmit and two receivers.
2. The EUT is 2 * 2 spatial MIMO without beam forming function. Spatial multiplexing modes for simultaneous transmission using 2 antennas , and for simultaneous receiver using 2 antennas.
3. When the EUT operating in draft 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 15.
4. The EUT complies with draft 802.11n standards and backwards compatible with 802.11b, 802.11g products.
5. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 300Mbps.
6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided for 802.11b, 802.11g, draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

COMBINATION MODE:

COMBINATION MODE	OPERATION MODE	ANTENNA 1	ANTENNA 2
A	802.11 b	✓	NA
B	802.11g	✓	NA
C	DRAFT 802.11n(20MHz)	✓	✓
D	DRAFT 802.11n(40MHz)	✓	✓

Note:

1. The above information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.
2. All of Antennas are printed antenna.
3. Mode A, B, C, D the antenna combination modes, was representative mode for the test.

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
-	✓	✓	✓	✓	-

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX CONDITION
802.11g	1 to 11	11	OFDM	BPSK	6	Single
Draft 802.11n (20MHz)	1 to 11	11	OFDM	BPSK	6.5	Dual
Draft 802.11n (40MHz)	1 to 7	7	OFDM	BPSK	13.5	Dual



RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- The EUT was pre-tested in chamber as the following test modes:

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX CONDITION
802.11b	1 to 11	1	DSSS	DBPSK	1	Single

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX CONDITION
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	Single
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	Single
Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	Dual
Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5	Dual

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX CONDITION
802.11b	1 to 11	1, 11	DSSS	DBPSK	1	Single
802.11g	1 to 11	1, 11	OFDM	BPSK	6	Single
Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5	Dual
Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	13.5	Dual

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX CONDITION
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	Single
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	Single
Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	Dual
Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5	Dual



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER	DELL	4700	G2MDF1S	NA
2	MONITOR	ADI	G1000	240058T00100092	NA
3	PRINTER	HP	C2642A	MY79F1C3MZ	B94C2642X
4	MODEM	ACEEX	1414	0206026775	IFAXDM1414
5	KEYBOARD	HP	SK-2502C	M020235183	FCC DoC
6	MOUSE	BTC	M851	G00347024430	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core.
3	1.6 m braid shielded wire, terminated with DB25 connector via metallic frame, w/o core
4	1.5 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
5	1.5 m foil shielded wire, terminal by frame, PS2 Connector, w/o Core.
6	1.5 m foil shielded wire, terminal by frame, PS2 Connector, w/o Core.

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

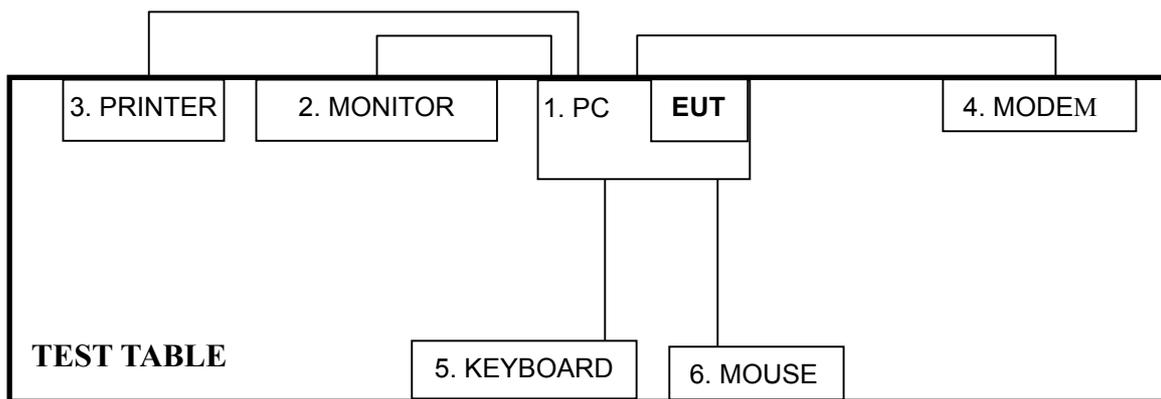

NOTE: 1. Please refer to the photos of test configuration in Item 5 also.

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver	ESCS 30	847124/029	Dec. 15, 2006
Line-Impedance Stabilization Network(for EUT)	ENV-216	100071	Nov. 10, 2006
Line-Impedance Stabilization Network(for Peripheral)	KNW-407	8/1395/12	Jul. 19, 2006
RF Cable (JETBAO)	RG233/U	Cable_CB_01	Dec. 09, 2006
Terminator	50	2	Oct. 08, 2006
Software	ADT_Cond_V7.3.2	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in ADT Shielded Room No. B.
 3. The VCCI Con B Registration No. is C-2193.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

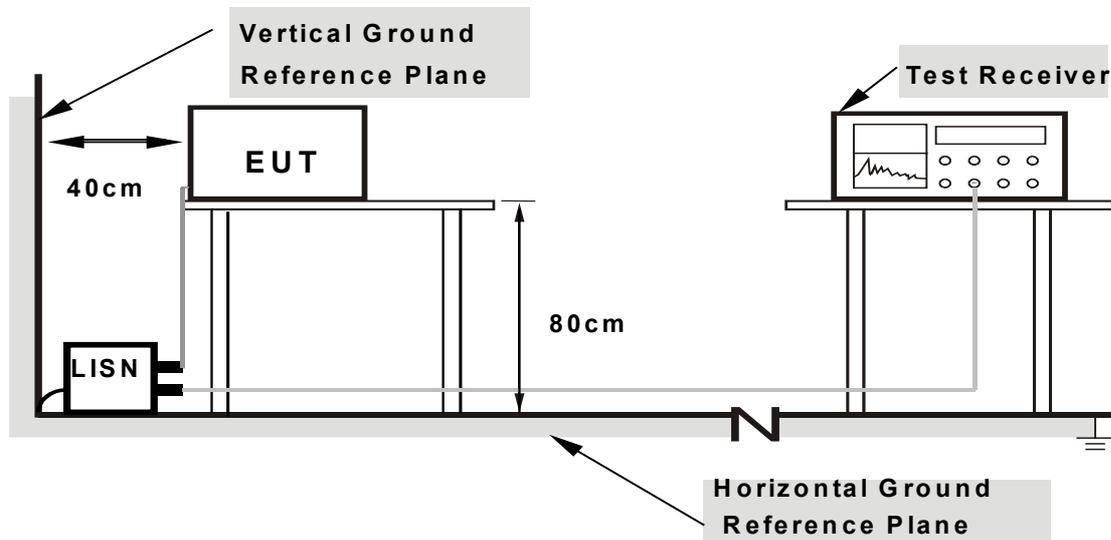

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Plug the EUT into the support unit 1 (Personal computer) and placed it on the testing table.
- b. The support unit 1 (Personal computer) ran a test program “MFGtest” to enable EUT under transmission condition continuously at specific channel frequency.
- c. Personal computer sends "H" messages to printer, and the printer prints them on paper.
- d. Personal computer sends "H" messages to modem.


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: 802.11g OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line (L)
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 962hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.173	9.60	37.41	-	47.01	-	64.79
2	0.193	9.60	49.69	39.24	59.29	48.84	63.91	53.91	-4.62	-5.07
3	0.271	9.60	32.90	-	42.50	-	61.08	51.08	-18.58	-
4	0.845	9.60	28.85	-	38.45	-	56.00	46.00	-17.55	-
5	13.801	10.05	21.53	-	31.58	-	60.00	50.00	-28.42	-
6	28.945	10.10	25.76	-	35.86	-	60.00	50.00	-24.14	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

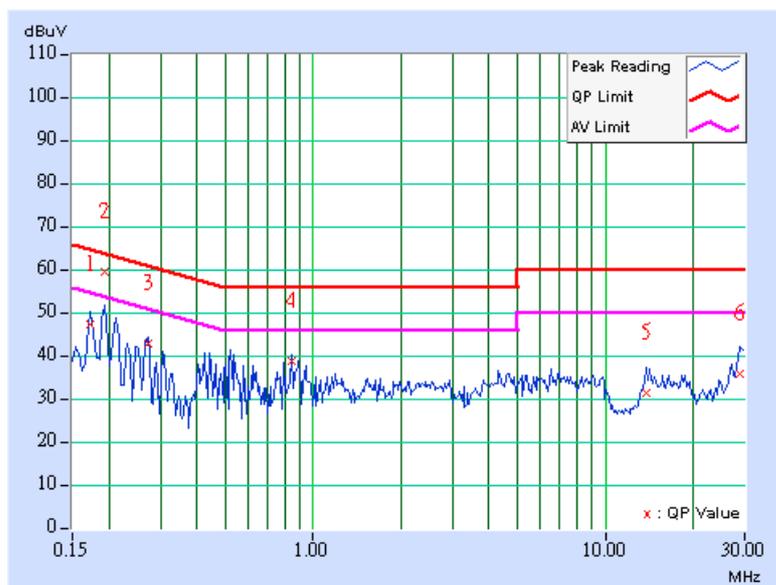

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Neutral (N)
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 962hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.173	9.60	32.68	-	42.28	-	64.82	54.82	-22.54
2	0.193	9.60	33.15	-	42.75	-	63.91	53.91	-21.16	-
3	0.519	9.60	27.42	-	37.02	-	56.00	46.00	-18.98	-
4	0.884	9.60	27.11	-	36.71	-	56.00	46.00	-19.29	-
5	16.246	10.02	26.12	-	36.14	-	60.00	50.00	-23.86	-
6	28.578	10.10	24.13	-	34.23	-	60.00	50.00	-25.77	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

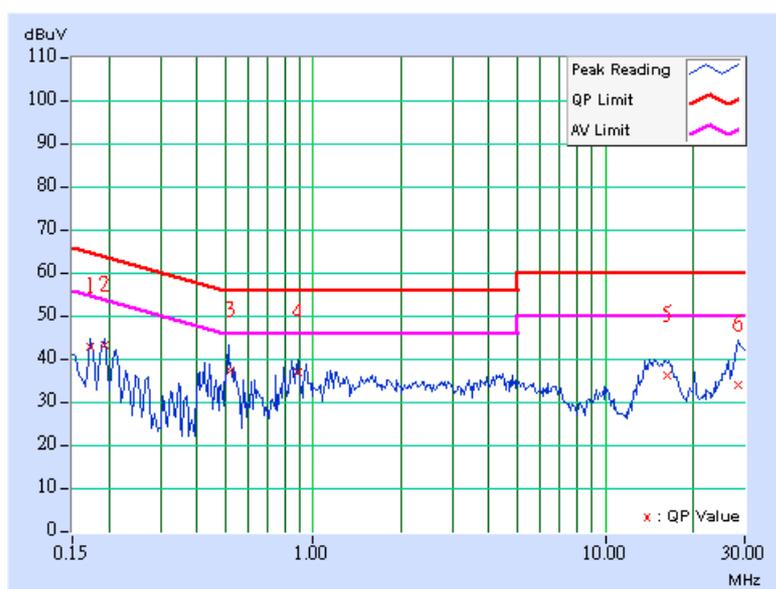


DRAFT 802.11n (20MHz) OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line (L)
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.5Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 962hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.173	9.60	37.33	-	46.93	-	64.79
2	0.193	9.60	39.29	-	48.89	-	63.91	53.91	-15.02	-
3	0.845	9.60	28.89	-	38.49	-	56.00	46.00	-17.51	-
4	4.316	9.71	24.95	-	34.66	-	56.00	46.00	-21.34	-
5	7.641	9.82	22.55	-	32.37	-	60.00	50.00	-27.63	-
6	29.336	10.10	27.04	-	37.14	-	60.00	50.00	-22.86	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

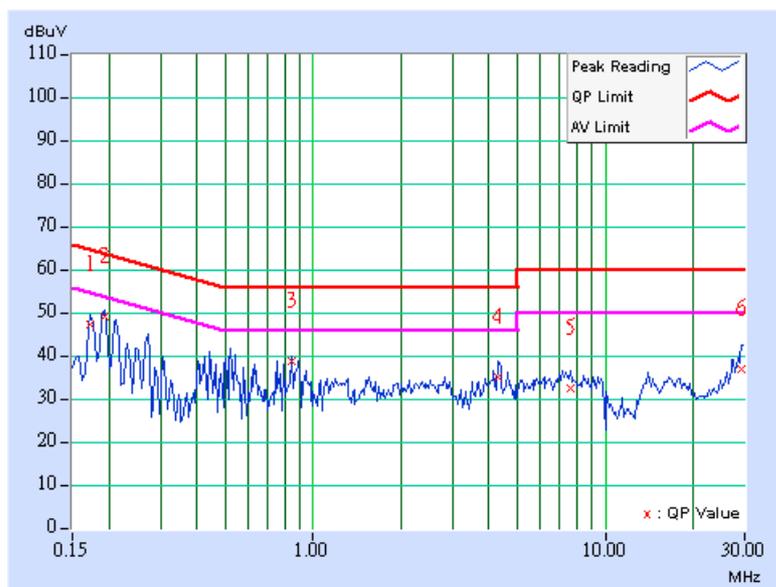

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Neutral (N)
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.5Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 962hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.173	9.60	33.07	-	42.67	-	64.79	54.79	-22.12
2	0.193	9.60	33.39	-	42.99	-	63.91	53.91	-20.92	-
3	0.500	9.60	24.04	-	33.64	-	56.00	46.00	-22.36	-
4	0.845	9.60	28.72	-	38.32	-	56.00	46.00	-17.68	-
5	15.227	10.00	25.66	-	35.66	-	60.00	50.00	-24.34	-
6	28.383	10.10	23.05	-	33.15	-	60.00	50.00	-26.85	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

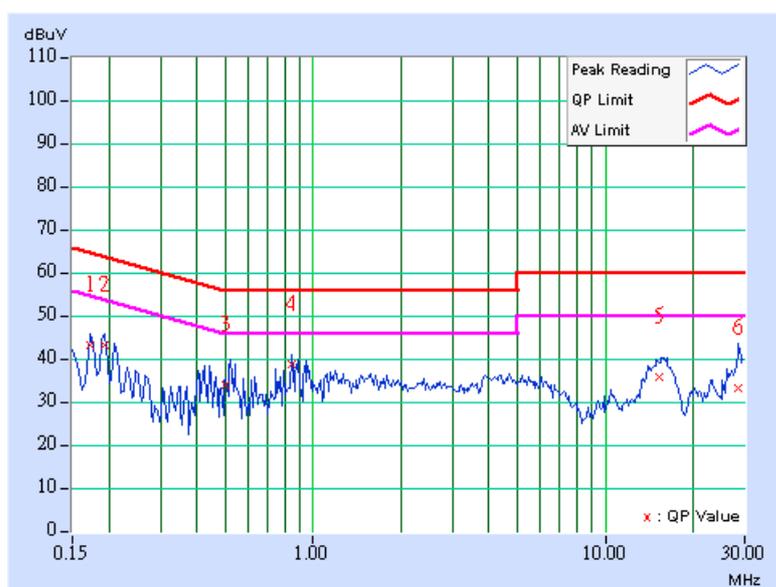


DRAFT 802.11n (40MHz) OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	PHASE	Line (L)
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	13.5Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 962hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.193	9.60	40.69	-	50.29	-	63.92
2	0.213	9.60	37.27	-	46.87	-	63.11	53.11	-16.24	-
3	0.521	9.60	30.13	-	39.73	-	56.00	46.00	-16.27	-
4	0.845	9.60	28.93	-	38.53	-	56.00	46.00	-17.47	-
5	13.836	10.05	21.76	-	31.81	-	60.00	50.00	-28.19	-
6	28.656	10.10	24.17	-	34.27	-	60.00	50.00	-25.73	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

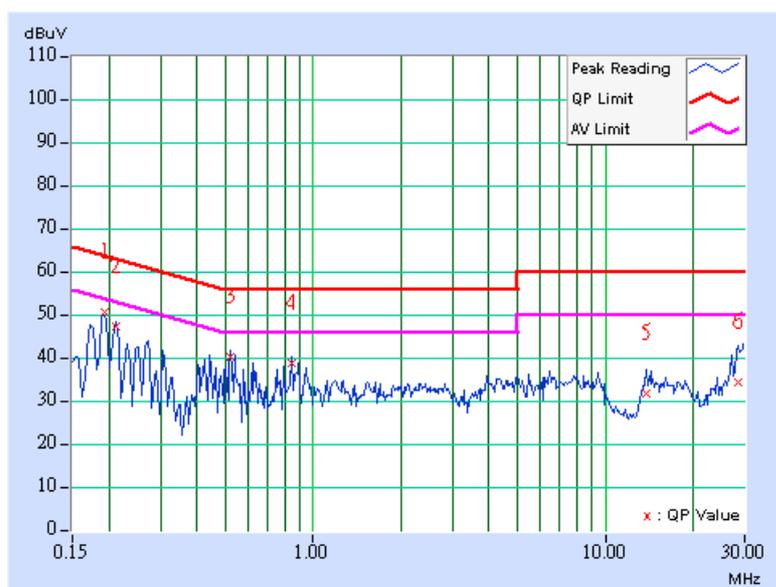

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	PHASE	Neutral (N)
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	13.5Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 962hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.173	9.60	33.39	-	42.99	-	64.79	54.79	-21.80
2	0.192	9.60	34.00	-	43.60	-	63.95	53.95	-20.35	-
3	0.500	9.60	24.57	-	34.17	-	56.00	46.00	-21.83	-
4	0.845	9.60	28.82	-	38.42	-	56.00	46.00	-17.58	-
5	15.855	10.02	26.44	-	36.46	-	60.00	50.00	-23.54	-
6	29.969	10.10	25.57	-	35.67	-	60.00	50.00	-24.33	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

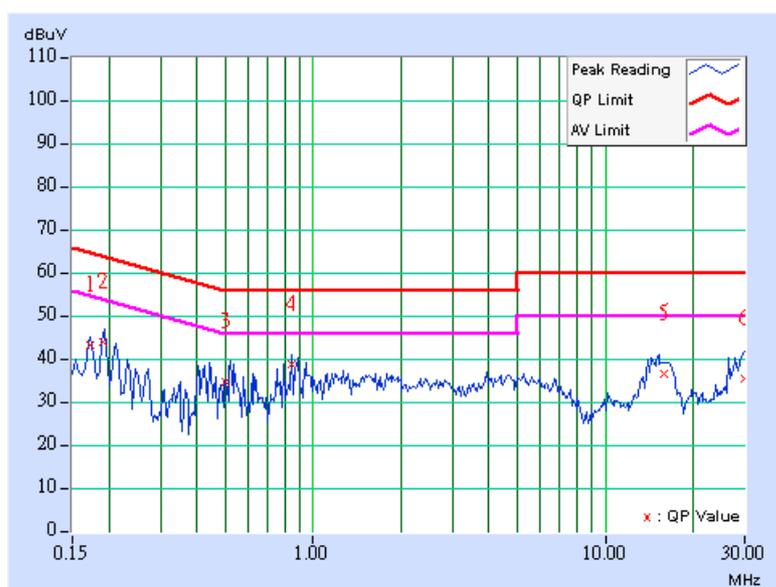

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400 / F(kHz)	300
0.490 ~ 1.705	24000 / F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 07, 2006
HP Pre_Amplifier	8449B	3008A01922	Oct. 02, 2006
ROHDE & SCHWARZ Test Receiver	ESCS30	100287	Dec. 08, 2006
CHASE Broadband Antenna	VULB9168	138	Dec. 21, 2006
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 11, 2006
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 05, 2007
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 26, 2006
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 26, 2006
RF Switches (ARNITSU)	CS-201	1565157	NA
RF CABLE (Chaintek)	SF102	22054-2	Nov. 16. 2006
RF Cable(RICHTEC)	9913-30M	STCCAB-30M- 1GHz-021	Jul. 16, 2006
Software	ADT_Radiated_V 5.14	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Periodic Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

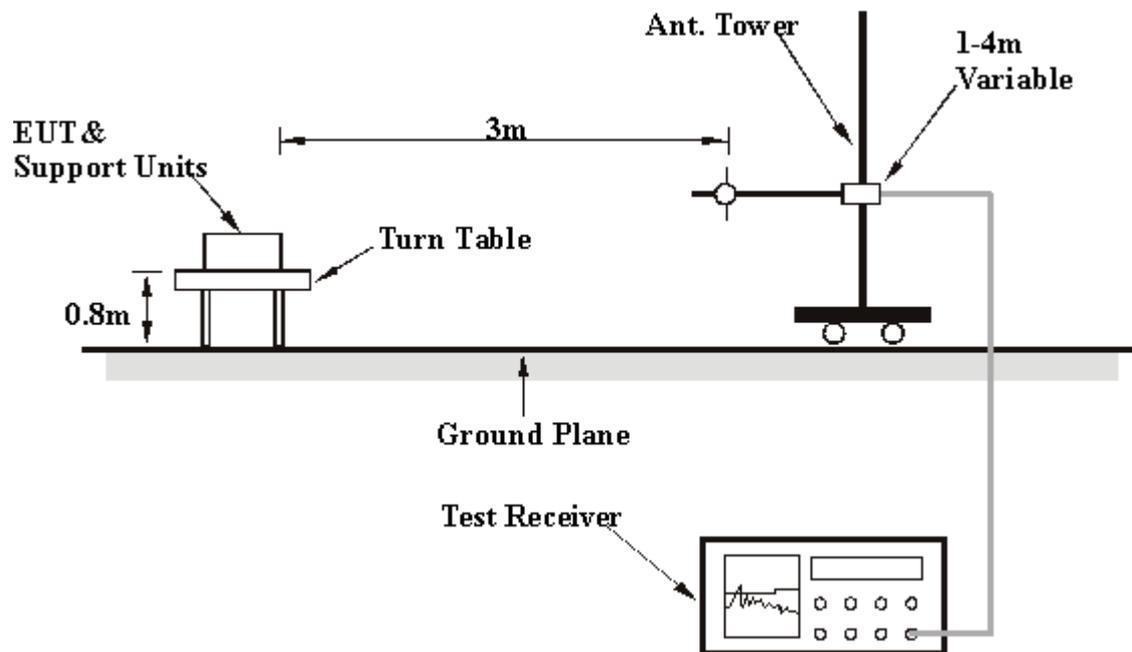

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as the 4.1.6

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	DBPSK for 802.11b	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	1Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	22deg. C, 70%RH, 962hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	133.49	30.70 QP	43.50	-12.80	1.51 H	75	18.20	12.60
2	233.16	30.10 QP	46.00	-15.90	1.62 H	233	17.50	12.60
3	299.81	34.40 QP	46.00	-11.60	1.13 H	356	18.10	16.30
4	399.97	25.60 QP	46.00	-20.40	1.03 H	273	7.20	18.40
5	599.97	31.70 QP	46.00	-14.30	1.27 H	57	8.10	23.50
6	800.10	35.60 QP	46.00	-10.40	1.06 H	325	8.90	26.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	133.48	32.00 QP	43.50	-11.50	1.00 V	182	19.50	12.60
2	200.25	25.80 QP	43.50	-17.70	1.00 V	230	14.60	11.20
3	233.18	29.10 QP	46.00	-16.90	1.00 V	342	16.60	12.60
4	399.90	25.50 QP	46.00	-20.50	1.00 V	244	7.20	18.40
5	599.99	31.00 QP	46.00	-15.00	1.75 V	106	7.50	23.50
6	800.22	35.60 QP	46.00	-10.40	1.48 V	321	8.90	26.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

802.11b DSSS MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	1Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 70%RH, 962hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2387.90	60.40 PK	74.00	-13.60	1.31 H	144	30.70	29.70
1	2387.90	50.80 AV	54.00	-3.20	1.31 H	144	21.10	29.70
2	2390.00	59.00 PK	74.00	-15.00	1.31 H	144	29.30	29.70
2	2390.00	47.70 AV	54.00	-6.30	1.31 H	144	18.00	29.70
3	*2412.00	111.10 PK			1.38 H	145	81.30	29.80
3	*2412.00	103.30 AV			1.38 H	145	73.50	29.80
4	4824.00	51.10 PK	74.00	-22.90	1.36 H	7	16.00	35.10
4	4824.00	47.10 AV	54.00	-6.90	1.36 H	7	12.00	35.10
5	7236.00	50.30 PK	74.00	-23.70	1.31 H	23	9.80	40.50
5	7236.00	37.50 AV	54.00	-16.50	1.31 H	23	-3.00	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2387.90	58.40 PK	74.00	-15.60	1.00 V	50	28.70	29.70
1	2387.90	47.80 AV	54.00	-6.20	1.00 V	50	18.10	29.70
2	2390.00	56.50 PK	74.00	-17.50	1.00 V	50	26.80	29.70
2	2390.00	45.50 AV	54.00	-8.50	1.00 V	50	15.80	29.70
3	*2412.00	110.10 PK			1.23 V	46	80.30	29.80
3	*2412.00	102.30 AV			1.23 V	46	72.50	29.80
4	4824.00	52.10 PK	74.00	-21.90	1.06 V	21	17.00	35.10
4	4824.00	48.50 AV	54.00	-5.50	1.06 V	21	13.40	35.10
5	7236.00	52.00 PK	74.00	-22.00	1.16 V	9	11.50	40.50
5	7236.00	38.90 AV	54.00	-15.10	1.16 V	9	-1.60	40.50

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	1Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 70%RH, 962hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	112.00 PK			1.36 H	146	82.10	29.90
1	*2437.00	104.20 AV			1.36 H	146	74.30	29.90
2	4874.00	51.30 PK	74.00	-22.70	1.34 H	3	16.00	35.30
2	4874.00	47.20 AV	54.00	-6.80	1.34 H	3	11.90	35.30
3	7311.00	50.60 PK	74.00	-23.40	4.00 H	10	9.90	40.70
3	7311.00	37.80 AV	54.00	-16.20	4.00 H	10	-2.90	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.30 PK			1.00 V	293	79.40	29.90
1	*2437.00	101.70 AV			1.00 V	293	71.80	29.90
2	4874.00	52.80 PK	74.00	-21.20	1.33 V	10	17.50	35.30
2	4874.00	48.50 AV	54.00	-5.50	1.33 V	10	13.20	35.30
3	7311.00	52.90 PK	74.00	-21.10	1.22 V	10	12.20	40.70
3	7311.00	39.90 AV	54.00	-14.10	1.22 V	10	-0.80	40.70

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	1Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 70%RH, 962hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.10 PK			1.34 H	144	83.10	30.00
1	*2462.00	104.10 AV			1.34 H	144	74.10	30.00
2	2483.50	58.00 PK	74.00	-16.00	1.25 H	150	27.90	30.10
2	2483.50	48.50 AV	54.00	-5.50	1.25 H	150	18.40	30.10
3	2484.60	59.00 PK	74.00	-15.00	1.25 H	150	28.90	30.10
3	2484.60	51.00 AV	54.00	-3.00	1.25 H	150	20.90	30.10
4	4924.00	49.60 PK	74.00	-24.40	1.40 H	356	14.10	35.50
4	4924.00	44.20 AV	54.00	-9.80	1.40 H	356	8.70	35.50
5	7386.00	50.50 PK	74.00	-23.50	1.32 H	11	9.70	40.80
5	7386.00	37.60 AV	54.00	-16.40	1.32 H	11	-3.20	40.80



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.70 PK			1.00 V	293	80.70	30.00
1	*2462.00	103.40 AV			1.00 V	293	73.40	30.00
2	2484.70	59.60 PK	74.00	-14.40	1.00 V	316	29.50	30.10
2	2484.70	51.70 AV	54.00	-2.30	1.00 V	316	21.60	30.10
3	4924.00	50.40 PK	74.00	-23.60	1.21 V	21	14.90	35.50
3	4924.00	45.10 AV	54.00	-8.90	1.21 V	21	9.60	35.50
4	7386.00	52.90 PK	74.00	-21.10	1.12 V	11	12.10	40.80
4	7386.00	39.20 AV	54.00	-14.80	1.12 V	11	-1.60	40.80

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.



RESTRICTED BANDEDGE (802.11b MODE,CH1, HORIZONTAL)

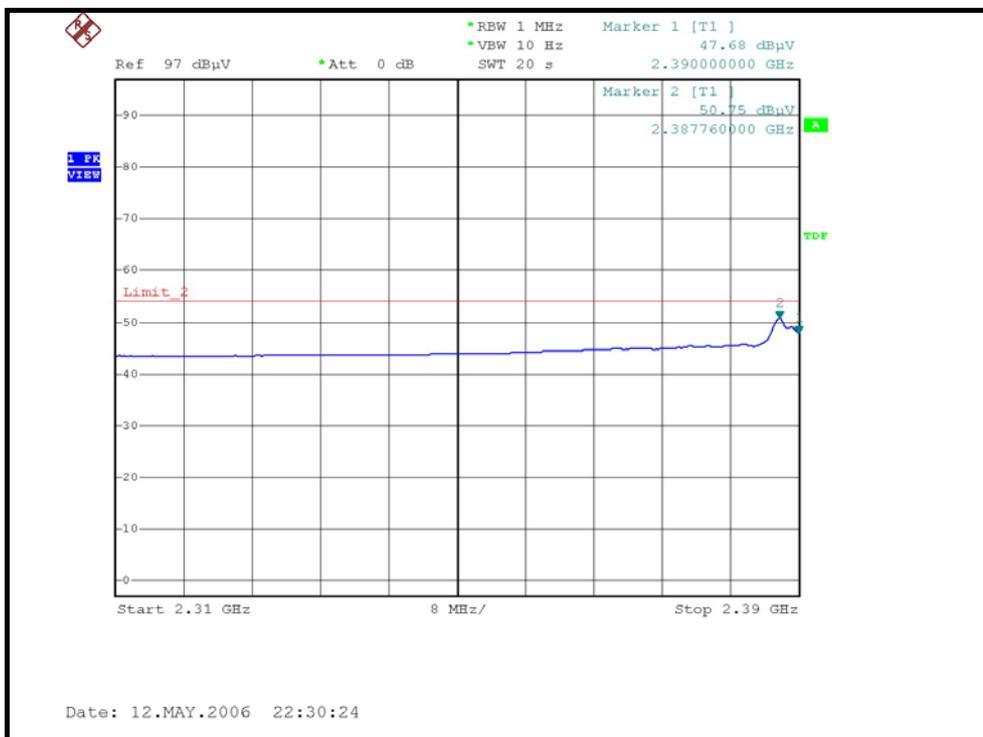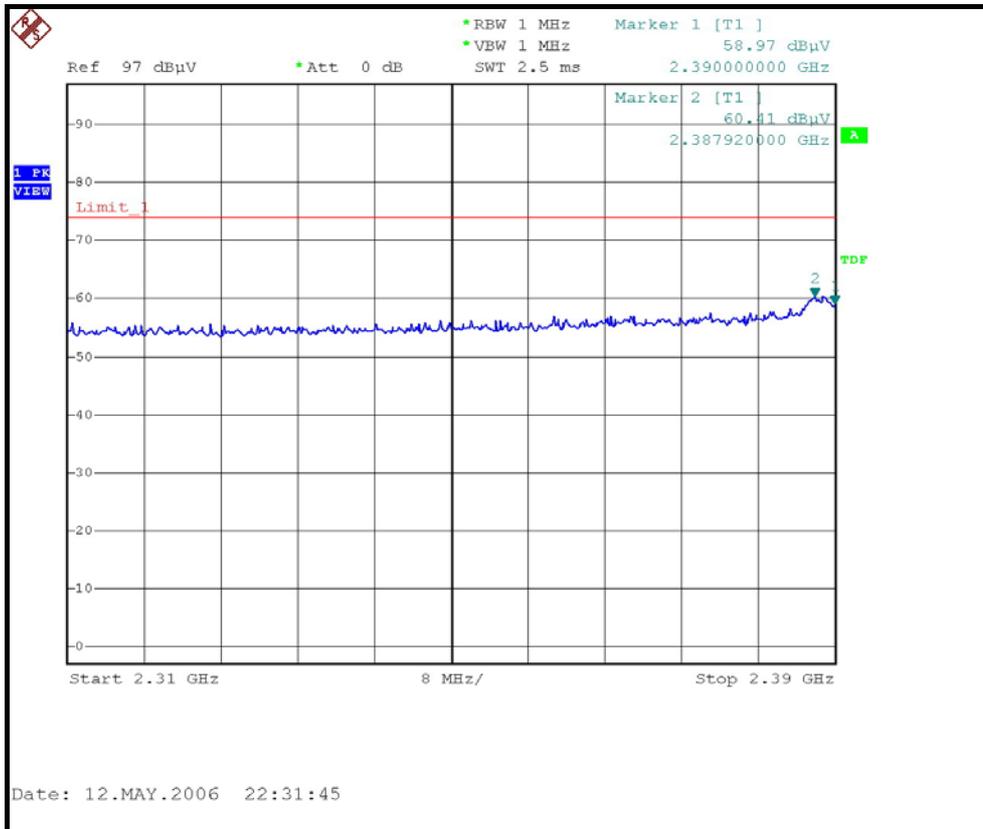



RESTRICTED BANDEDGE (802.11b MODE,CH1, VERTICAL)

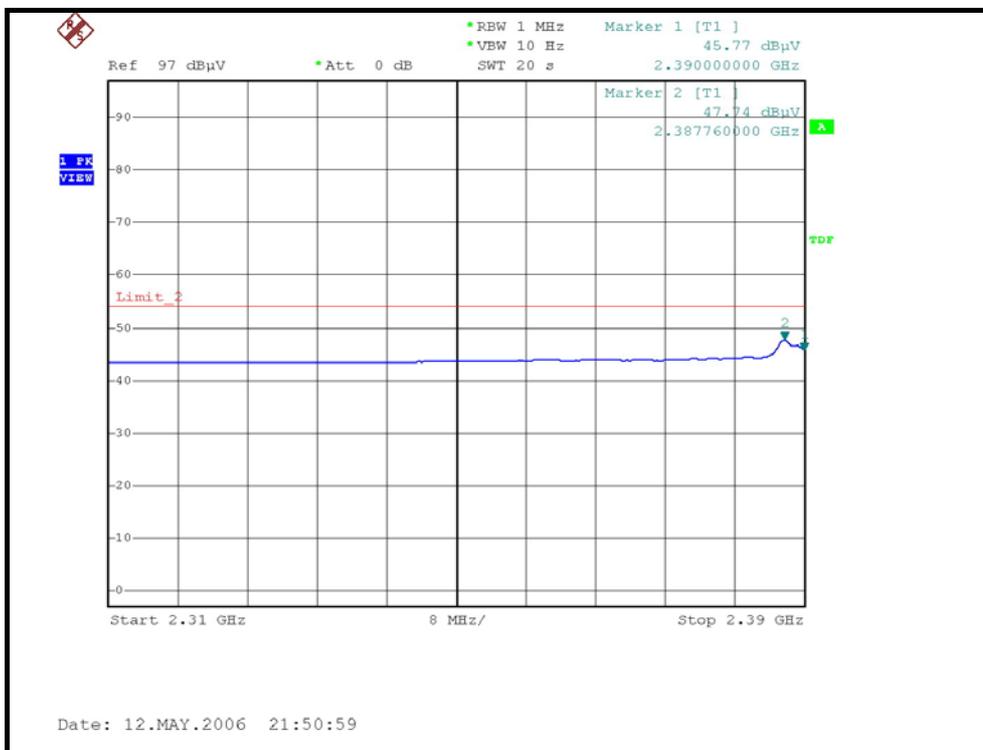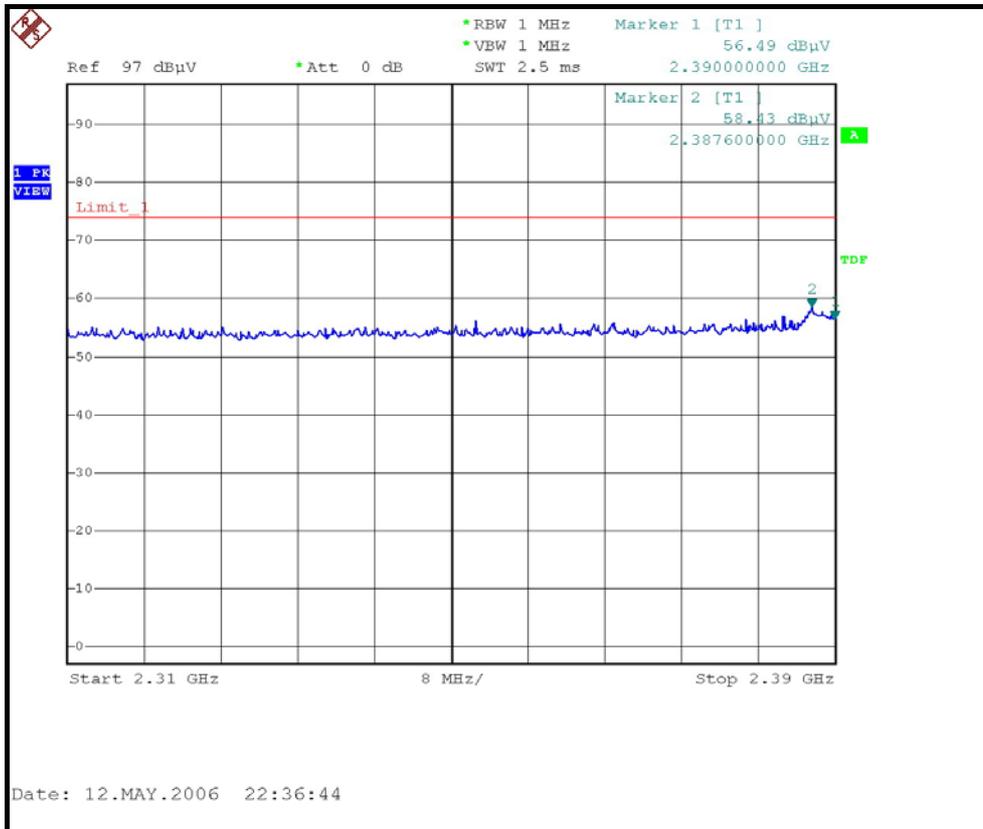

RESTRICTED BANDEDGE (802.11b MODE,CH11, HORIZONTAL)

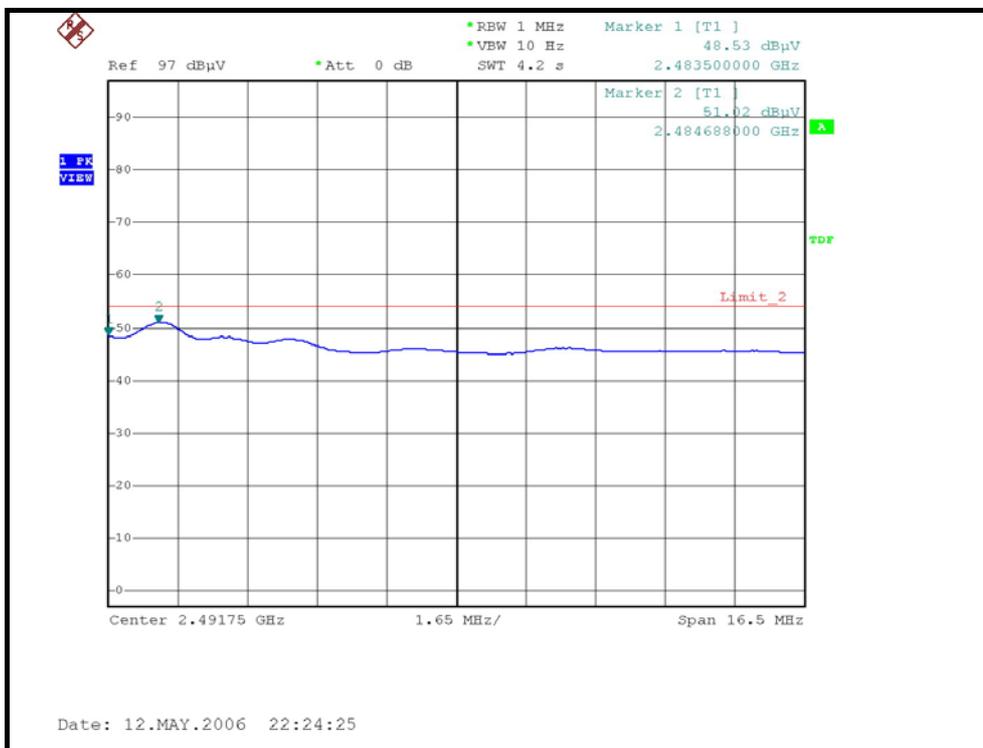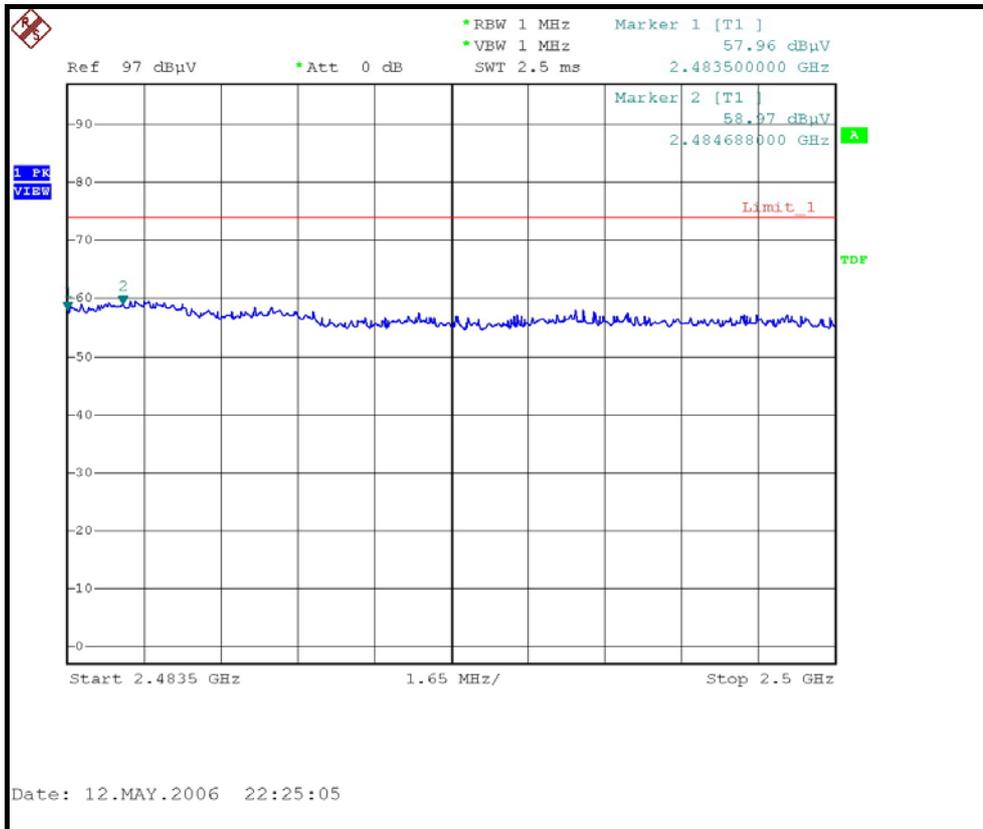

RESTRICTED BANDEDGE (802.11b MODE, CH11, VERTICAL)

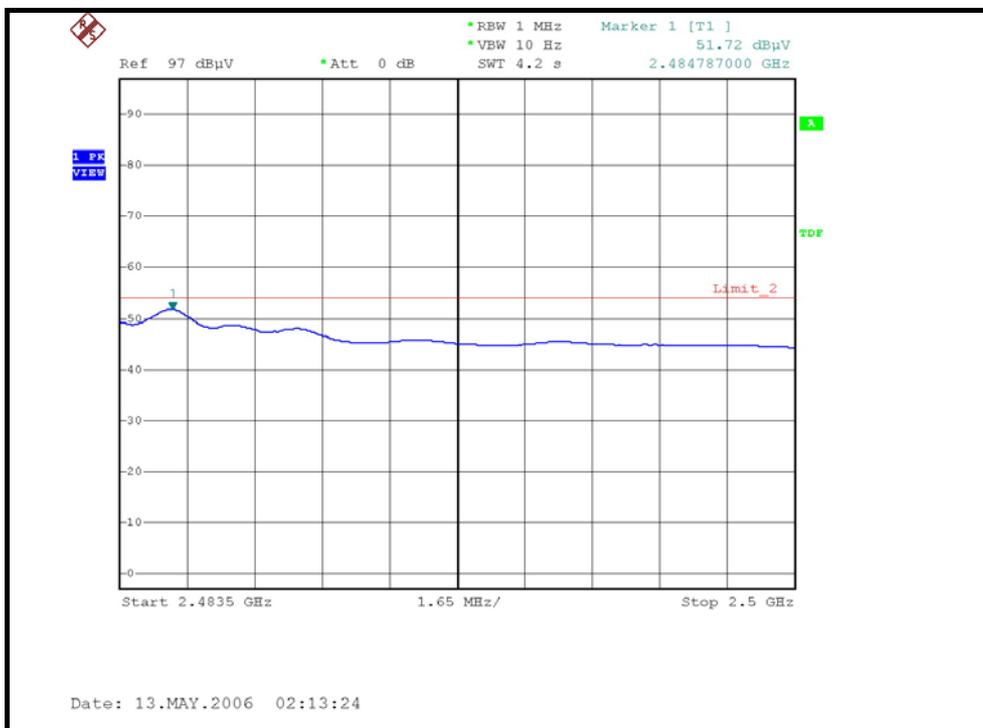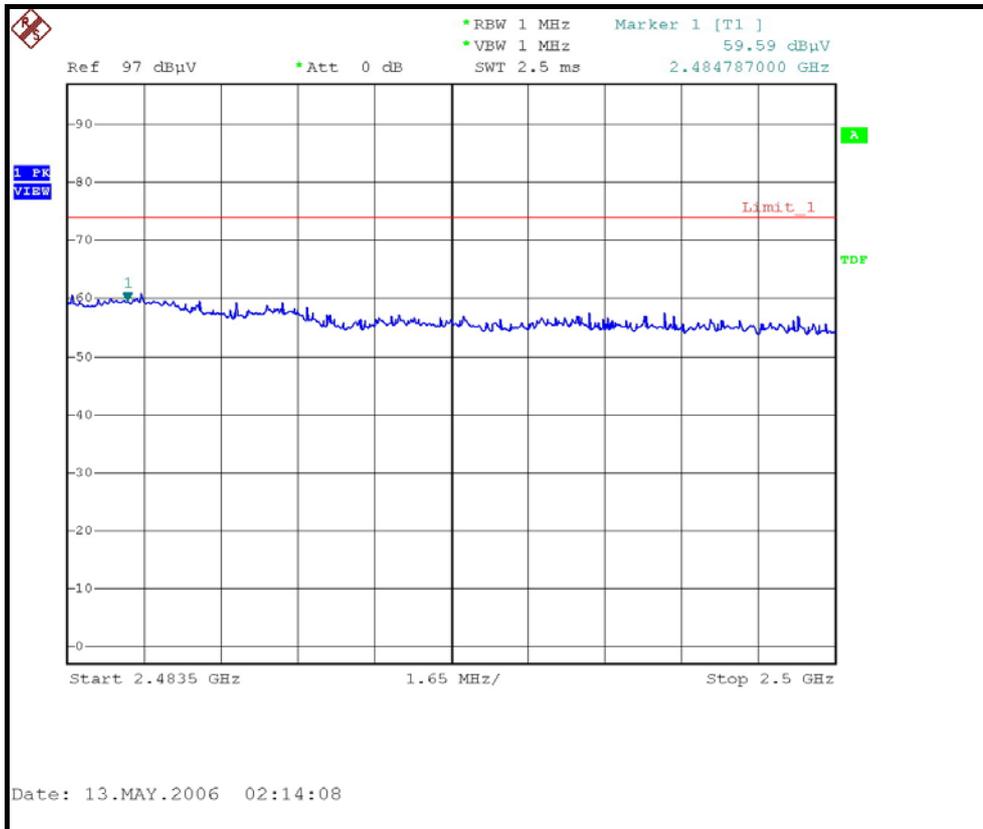

802.11g OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 72%RH, 962hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.30 PK	74.00	-1.70	1.29 H	357	38.60	33.80
1	2390.00	53.80 AV	54.00	-0.20	1.29 H	357	20.10	33.80
2	*2412.00	107.00 PK			1.29 H	351	77.10	29.90
2	*2412.00	101.10 AV			1.29 H	351	71.20	29.90
3	4824.00	55.00 PK	74.00	-19.00	1.00 H	305	20.00	35.00
3	4824.00	51.10 AV	54.00	-2.90	1.00 H	305	16.10	35.00
4	7236.00	52.60 PK	74.00	-21.40	1.17 H	12	11.40	41.10
4	7236.00	39.50 AV	54.00	-14.50	1.17 H	12	-1.70	41.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.40 PK	74.00	-1.60	1.12 V	249	38.60	33.80
1	2390.00	51.10 AV	54.00	-2.90	1.12 V	249	17.30	33.80
2	*2412.00	107.30 PK			1.26 V	119	77.40	29.90
2	*2412.00	101.60 AV			1.26 V	119	71.70	29.90
3	4824.00	56.00 PK	74.00	-18.00	1.01 V	347	21.00	35.00
3	4824.00	53.30 AV	54.00	-0.70	1.01 V	347	18.30	35.00
4	7236.00	53.60 PK	74.00	-20.40	1.05 V	327	12.40	41.10
4	7236.00	39.40 AV	54.00	-14.60	1.05 V	327	-1.80	41.10

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 70%RH, 962hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.80 PK			1.36 H	142	81.90	29.90
1	*2437.00	101.10 AV			1.36 H	142	71.20	29.90
2	4874.00	51.80 PK	74.00	-22.20	1.33 H	355	16.50	35.30
2	4874.00	37.50 AV	54.00	-16.50	1.33 H	355	2.20	35.30
3	7311.00	50.30 PK	74.00	-23.70	1.29 H	9	9.60	40.70
3	7311.00	37.30 AV	54.00	-16.70	1.29 H	9	-3.40	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.30 PK			1.00 V	292	83.40	29.90
1	*2437.00	101.40 AV			1.00 V	292	71.50	29.90
2	4874.00	52.10 PK	74.00	-21.90	1.30 V	12	16.80	35.30
2	4874.00	37.70 AV	54.00	-16.30	1.30 V	12	2.40	35.30
3	7311.00	51.90 PK	74.00	-22.10	1.21 V	13	11.20	40.70
3	7311.00	38.40 AV	54.00	-15.60	1.21 V	13	-2.30	40.70

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21deg. C, 72%RH, 962hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.50 PK			1.47 H	137	77.40	30.10
1	*2462.00	100.20 AV			1.47 H	137	70.10	30.10
2	2483.50	71.40 PK	74.00	-2.60	1.27 H	8	41.10	30.20
2	2483.50	53.50 AV	54.00	-0.50	1.27 H	8	23.30	30.20
3	4924.00	49.40 PK	74.00	-24.60	1.51 H	1	14.00	35.40
3	4924.00	43.40 AV	54.00	-10.60	1.51 H	1	8.00	35.40
4	7386.00	53.50 PK	74.00	-20.50	1.15 H	0	11.90	41.60
4	7386.00	41.50 AV	54.00	-12.50	1.15 H	0	-0.10	41.60



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.00 PK			1.45 V	128	77.90	30.10
1	*2462.00	100.70 AV			1.45 V	128	70.60	30.10
2	2483.50	70.10 PK	74.00	-3.90	1.15 V	47	39.90	30.20
2	2483.50	52.90 AV	54.00	-1.10	1.15 V	47	22.70	30.20
3	4924.00	51.30 PK	74.00	-22.70	1.01 V	334	15.90	35.40
3	4924.00	46.40 AV	54.00	-7.60	1.01 V	334	11.00	35.40
4	7386.00	54.40 PK	74.00	-19.60	1.01 V	323	12.80	41.60
4	7386.00	40.20 AV	54.00	-13.80	1.01 V	323	-1.40	41.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

RESTRICTED BANDEDGE (802.11g MODE,CH1, HORIZONTAL)

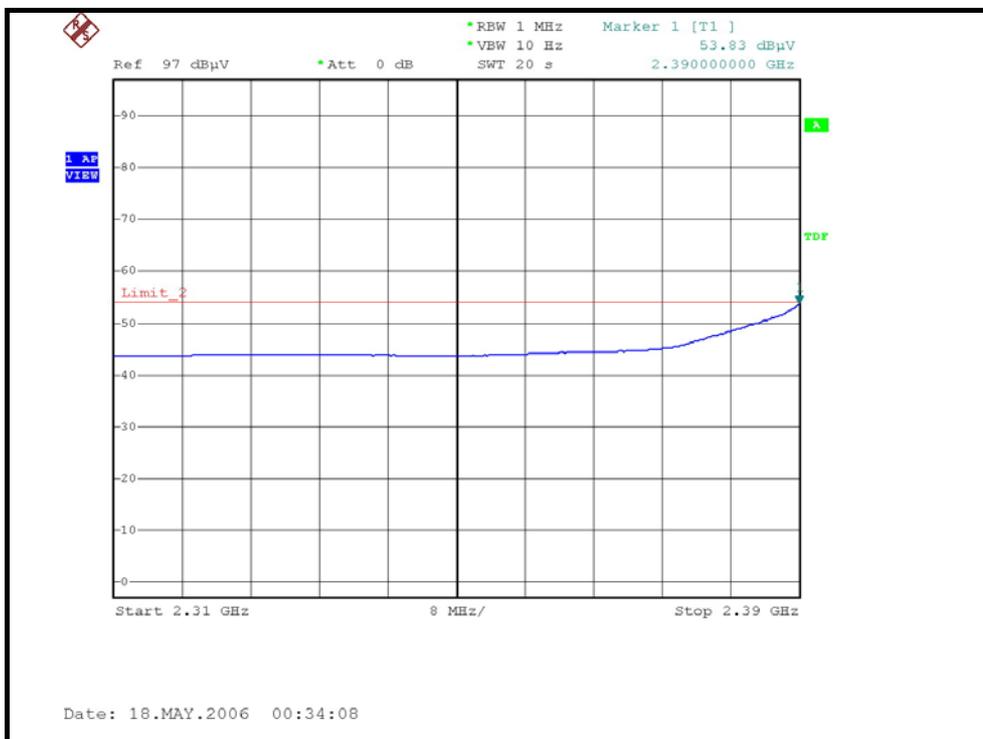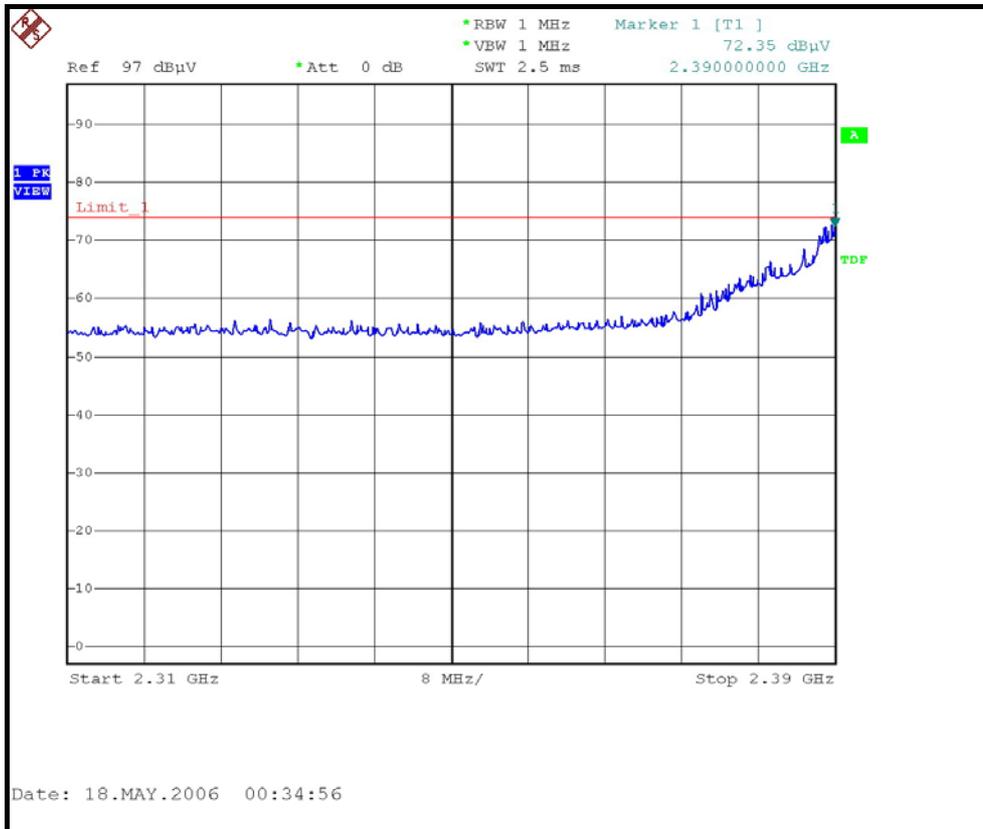

RESTRICTED BANDEDGE (802.11g MODE, CH1, VERTICAL)

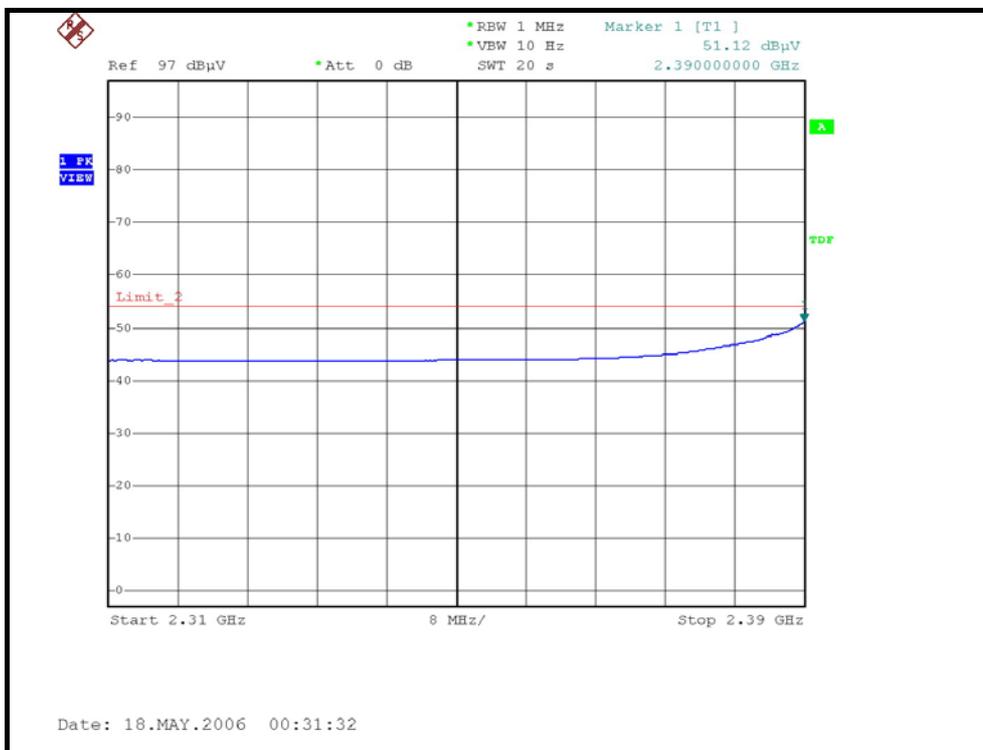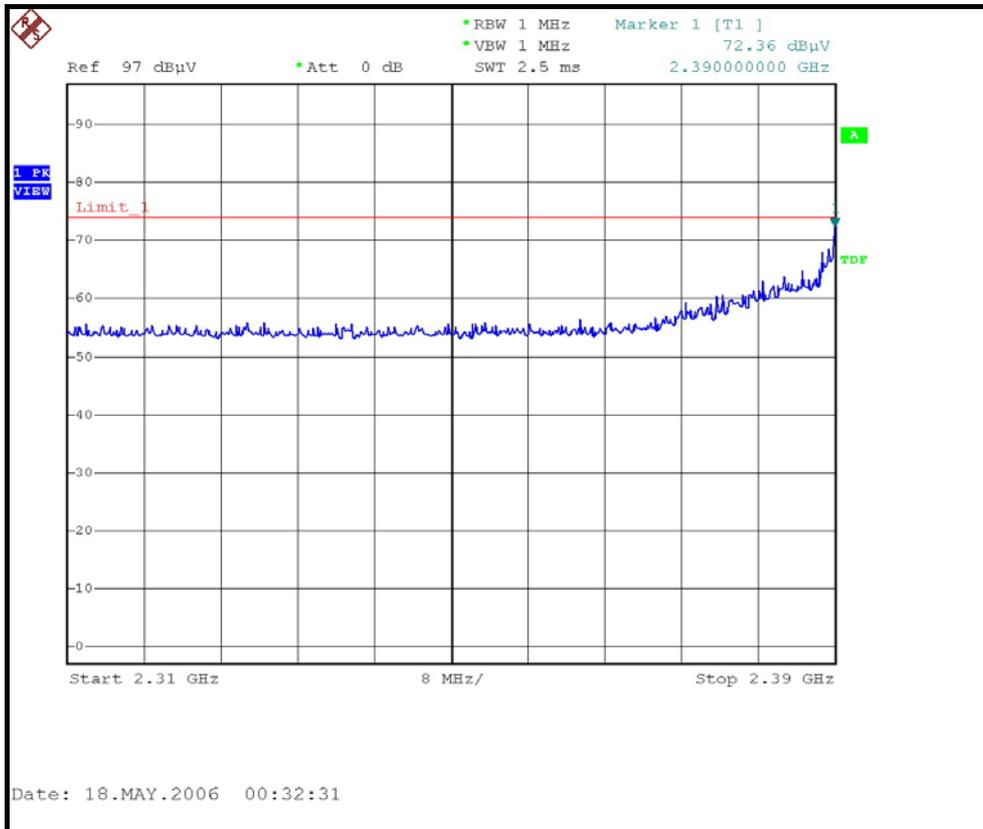

RESTRICTED BANDEDGE (802.11g MODE, CH11, VERTICAL)

