



A D T

FCC TEST REPORT

REPORT NO.: RF981124L12

MODEL NO.: WNCE2001

RECEIVED: Nov. 24, 2009

TESTED: Mar. 09 ~ Mar. 24, 2010

ISSUED: Mar. 25, 2010

APPLICANT: NETGEAR, INC.

ADDRESS: 350 East Plumeria Drive San Jose, CA 95134

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

This test report consists of 77 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

TABLE OF CONTENTS

| | | |
|-------|---|----|
| 1. | CERTIFICATION..... | 4 |
| 2. | SUMMARY OF TEST RESULTS | 5 |
| 2.1 | MEASUREMENT UNCERTAINTY | 5 |
| 3. | GENERAL INFORMATION..... | 6 |
| 3.1 | GENERAL DESCRIPTION OF EUT | 6 |
| 3.2 | DESCRIPTION OF TEST MODES | 8 |
| 3.2.1 | CONFIGURATION OF SYSTEM UNDER TEST | 9 |
| 3.2.2 | TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL | 10 |
| 3.3 | GENERAL DESCRIPTION OF APPLIED STANDARDS | 12 |
| 3.4 | DESCRIPTION OF SUPPORT UNITS | 13 |
| 4. | TEST TYPES AND RESULTS | 14 |
| 4.1 | RADIATED EMISSION MEASUREMENT | 14 |
| 4.1.1 | LIMITS OF RADIATED EMISSION MEASUREMENT..... | 14 |
| 4.1.2 | TEST INSTRUMENTS..... | 15 |
| 4.1.3 | TEST PROCEDURES | 16 |
| 4.1.4 | DEVIATION FROM TEST STANDARD..... | 16 |
| 4.1.5 | TEST SETUP..... | 17 |
| 4.1.6 | EUT OPERATING CONDITIONS | 17 |
| 4.1.7 | TEST RESULTS | 18 |
| 4.2 | CONDUCTED EMISSION MEASUREMENT | 33 |
| 4.2.1 | LIMITS OF CONDUCTED EMISSION MEASUREMENT..... | 33 |
| 4.2.2 | TEST INSTRUMENTS..... | 33 |
| 4.2.3 | TEST PROCEDURES | 34 |
| 4.2.4 | DEVIATION FROM TEST STANDARD..... | 34 |
| 4.2.5 | TEST SETUP..... | 35 |
| 4.2.6 | EUT OPERATING CONDITIONS | 35 |
| 4.2.7 | TEST RESULTS | 36 |
| 4.3 | 6dB BANDWIDTH MEASUREMENT..... | 42 |
| 4.3.1 | LIMITS OF 6dB BANDWIDTH MEASUREMENT | 42 |
| 4.3.2 | TEST INSTRUMENTS..... | 42 |
| 4.3.3 | TEST PROCEDURE..... | 42 |
| 4.3.4 | DEVIATION FROM TEST STANDARD..... | 42 |
| 4.3.5 | TEST SETUP..... | 43 |
| 4.3.6 | EUT OPERATING CONDITIONS | 43 |
| 4.3.7 | TEST RESULTS | 44 |
| 4.4 | MAXIMUM OUTPUT POWER | 48 |
| 4.4.1 | LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT..... | 48 |
| 4.4.2 | INSTRUMENTS..... | 48 |
| 4.4.3 | TEST PROCEDURE..... | 48 |
| 4.4.4 | DEVIATION FROM TEST STANDARD..... | 49 |
| 4.4.5 | TEST SETUP..... | 49 |
| 4.4.6 | EUT OPERATING CONDITIONS | 49 |



A D T

| | | |
|-------|--|----|
| 4.4.7 | TEST RESULTS | 50 |
| 4.5 | POWER SPECTRAL DENSITY MEASUREMENT | 51 |
| 4.5.1 | LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT | 51 |
| 4.5.2 | TEST INSTRUMENTS..... | 51 |
| 4.5.3 | TEST PROCEDURE..... | 51 |
| 4.5.4 | DEVIATION FROM TEST STANDARD..... | 52 |
| 4.5.5 | TEST SETUP..... | 52 |
| 4.5.6 | EUT OPERATING CONDITION..... | 52 |
| 4.5.7 | TEST RESULTS | 53 |
| 4.6 | BAND EDGES MEASUREMENT | 57 |
| 4.6.1 | LIMITS OF BAND EDGES MEASUREMENT | 57 |
| 4.6.2 | TEST INSTRUMENTS..... | 57 |
| 4.6.3 | TEST PROCEDURE..... | 58 |
| 4.6.4 | DEVIATION FROM TEST STANDARD..... | 58 |
| 4.6.5 | EUT OPERATING CONDITION..... | 58 |
| 4.6.6 | TEST RESULTS | 59 |
| 5. | PHOTOGRAPHS OF THE TEST CONFIGURATION..... | 75 |
| 6. | INFORMATION ON THE TESTING LABORATORIES | 76 |
| 7. | APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB..... | 77 |



A D T

1. CERTIFICATION

PRODUCT: Universal WiFi Internet Adapter
MODEL: WNCE2001
BRAND: NETGEAR
APPLICANT: NETGEAR, INC.
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: Mar. 09 ~ Mar. 24, 2010
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.4-2003

The above equipment (Model: WNCE2001) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : *Polly Chien* , **DATE** : Mar. 25, 2010
Polly Chien / Specialist

TECHNICAL ACCEPTANCE : *Long Chen* , **DATE** : Mar. 25, 2010
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : *Gary Chang* , **DATE** : Mar. 25, 2010
Gary Chang / Assistant Manager



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247) | | | |
|---|--|--------|---|
| STANDARD SECTION | TEST TYPE AND LIMIT | RESULT | REMARK |
| 15.207 | AC Power Conducted Emission | PASS | Meet the requirement of limit. Minimum passing margin is -3.0dB at 1.817MHz. |
| 15.247(a)(2) | Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz | PASS | Meet the requirement of limit. |
| 15.247(b) | Maximum Output Power Limit: max. 30dBm | PASS | Meet the requirement of limit. |
| 15.247(d) | Radiated Emissions Limit: Table 15.209 | PASS | Meet the requirement of limit. Minimum passing margin is -0.4dB at 2483.5MHz. |
| 15.247(e) | Power Spectral Density Limit: max. 8dBm | PASS | Meet the requirement of limit. |
| 15.247(d) | Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency | PASS | Meet the requirement of limit. |
| 15.203 | Antenna Requirement | PASS | No antenna connector is used. |

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| MEASUREMENT | FREQUENCY | UNCERTAINTY |
|---------------------|-----------------|-------------|
| Conducted emissions | 150kHz~30MHz | 2.44 dB |
| Radiated emissions | 30MHz ~ 200MHz | 2.93 dB |
| | 200MHz ~1000MHz | 2.95 dB |
| | 1GHz ~ 18GHz | 2.26 dB |
| | 18GHz ~ 40GHz | 1.94 dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | |
|------------------------------|--|
| EUT | Universal WiFi Internet Adapter |
| MODEL NO. | WNCE2001 |
| FCC ID | PY309400125 |
| POWER SUPPLY | 5Vdc |
| MODULATION TYPE | CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM |
| MODULATION TECHNOLOGY | DSSS, OFDM |
| TRANSFER RATE | 802.11b:11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps |
| OPERATING FREQUENCY | 2412 ~ 2462MHz |
| NUMBER OF CHANNEL | 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz) |
| OUTPUT POWER | 961.3mW |
| ANTENNA TYPE | PIFA antenna with 2dBi gain |
| ANTENNA CONNECTOR | NA |
| DATA CABLE | 0.9m non-shielded RJ45 cable without core 0.9m shielded USB cable without core |
| I/O PORTS | RJ45 |
| ACCESSORY DEVICES | Adapter |

NOTE:

1. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

| MODULATION MODE | TX FUNCTION |
|------------------------|--------------------|
| 802.11b | 2TX |
| 802.11g | 2TX |
| 802.11n (20MHz) | 2TX |
| 802.11n (40MHz) | 2TX |

2. The EUT was powered by the following adapters:

| ADAPTER 1 | |
|--------------------|---------------------------------------|
| BRAND: | NETGEAR |
| MODEL: | R005WA0509 16200-2LF |
| P/N: | 332-10216-01 |
| INPUT: | 100-240Vac, 50/60Hz, 130mA |
| OUTPUT: | 5Vdc, 1A |
| POWER LINE: | 1.95m non-shielded cable without core |

| ADAPTER 2 | |
|--------------------|---------------------------------------|
| BRAND: | NETGEAR |
| MODEL: | MU05-J050100-A1 |
| P/N: | 332-10291-01 |
| INPUT: | 100-240Vac, 50/60Hz, 0.3A |
| OUTPUT: | 5Vdc, 1A |
| POWER LINE: | 1.95m non-shielded cable without core |

| ADAPTER 3 | |
|--------------------|---------------------------------------|
| BRAND: | NETGEAR |
| MODEL: | MU05-J050100-A1 |
| P/N: | 332-10248-01 |
| INPUT: | 100-240Vac, 50/60Hz, 0.3A |
| OUTPUT: | 5Vdc, 1A |
| POWER LINE: | 1.95m non-shielded cable without core |

*The adapter 1, 2 & 3 are identical to each other, except model designation due to the different plug type for different country. Therefore, adapter 1 and adapter 2 were for final test and presented in the test report.

3. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):


| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 1 | 2412MHz | 7 | 2442MHz |
| 2 | 2417MHz | 8 | 2447MHz |
| 3 | 2422MHz | 9 | 2452MHz |
| 4 | 2427MHz | 10 | 2457MHz |
| 5 | 2432MHz | 11 | 2462MHz |
| 6 | 2437MHz | | |

7 channels are provided for 802.11n (40MHz):


| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 1 | 2422MHz | 5 | 2442MHz |
| 2 | 2427MHz | 6 | 2447MHz |
| 3 | 2432MHz | 7 | 2452MHz |
| 4 | 2437MHz | | |

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Test Mode A, B:

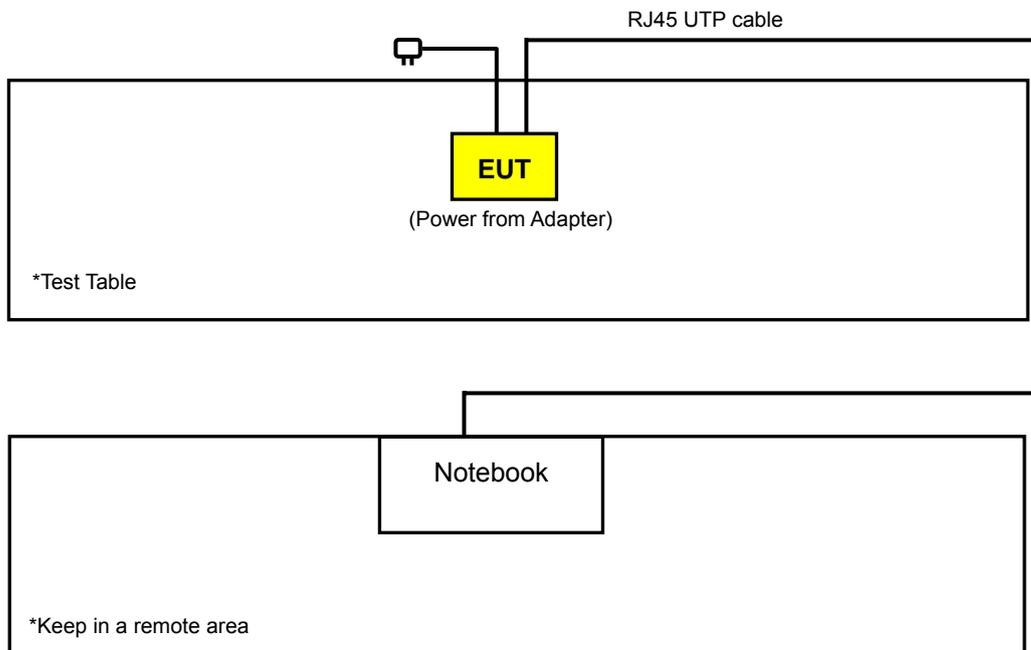

Test Mode C:

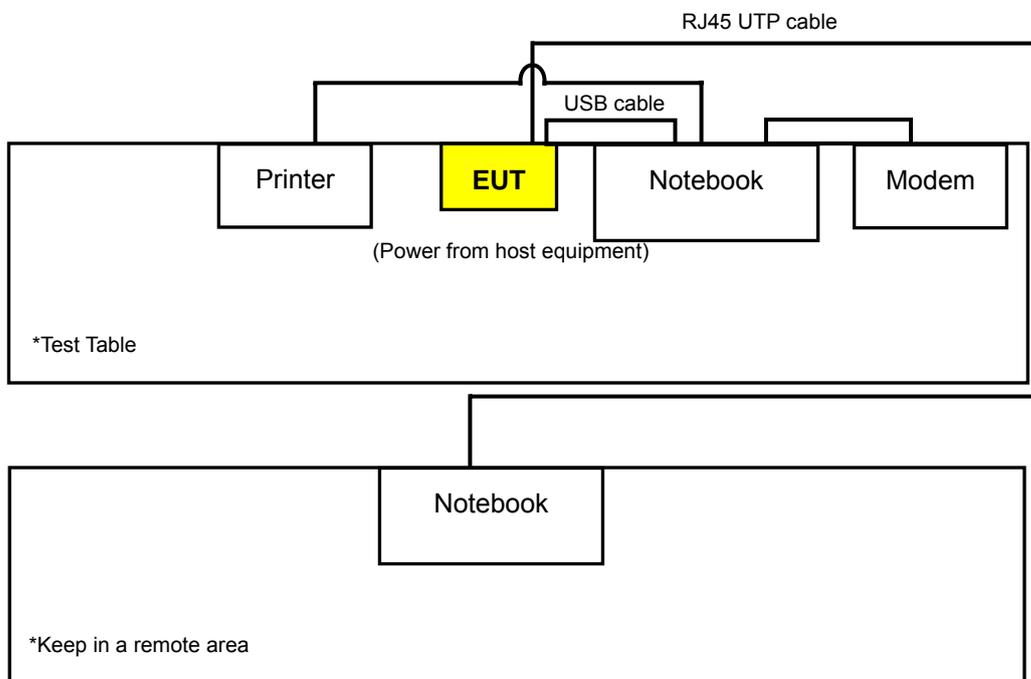

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

| EUT CONFIGURE MODE | APPLICABLE TO | | | | DESCRIPTION |
|--------------------|---------------|-----------|-----|------|---|
| | RE \geq 1G | RE $<$ 1G | PLC | APCM | |
| A | √ | √ | √ | √ | Power from Adapter 1: R005WA0509 16200-2LF |
| B | - | √ | √ | - | Power from Adapter 2: MU05-J050100-A1 |
| C | - | √ | √ | - | Power from host equipment (USB mode) |

Where **RE \geq 1G**: Radiated Emission above 1GHz **RE $<$ 1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: "-": Means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | AXIS |
|--------------------|-----------------|-------------------|----------------|-----------------------|-----------------|------------------|------|
| A | 802.11b | 1 to 11 | 1, 6, 11 | DSSS | DBPSK | 1.0 | Y |
| A | 802.11g | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6.0 | |
| A | 802.11n (20MHz) | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 7.2 | |
| A | 802.11n (40MHz) | 1 to 7 | 1, 4, 7 | OFDM | BPSK | 15.0 | |

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | AXIS |
|--------------------|-----------------|-------------------|----------------|-----------------------|-----------------|------------------|------|
| A, B, C | 802.11n (20MHz) | 1 to 11 | 6 | OFDM | BPSK | 7.2 | Y |

**POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|--------------------|-----------------|-------------------|----------------|-----------------------|-----------------|------------------|
| A, B, C | 802.11n (20MHz) | 1 to 11 | 6 | OFDM | BPSK | 7.2 |

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|--------------------|-----------------|-------------------|----------------|-----------------------|-----------------|------------------|
| A | 802.11b | 1 to 11 | 1, 11 | DSSS | DBPSK | 1.0 |
| A | 802.11g | 1 to 11 | 1, 11 | OFDM | BPSK | 6.0 |
| A | 802.11n (20MHz) | 1 to 11 | 1, 11 | OFDM | BPSK | 7.2 |
| A | 802.11n (40MHz) | 1 to 7 | 1, 7 | OFDM | BPSK | 15.0 |

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|--------------------|-----------------|-------------------|----------------|-----------------------|-----------------|------------------|
| A | 802.11b | 1 to 11 | 1, 6, 11 | DSSS | DBPSK | 1.0 |
| A | 802.11g | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 6.0 |
| A | 802.11n (20MHz) | 1 to 11 | 1, 6, 11 | OFDM | BPSK | 7.2 |
| A | 802.11n (40MHz) | 1 to 7 | 1, 4, 7 | OFDM | BPSK | 15.0 |



A D T

TEST CONDITION:

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER | TESTED BY |
|---------------|---|--------------|-----------|
| RE \geq 1G | 23deg. C, 77%RH, 1011 hPa | 120Vac, 60Hz | Tim Mie |
| RE $<$ 1G | 23deg. C, 77%RH, 1011 hPa (Test mode A) | 120Vac, 60Hz | Tim Mie |
| | 25deg. C, 66%RH, 1007 hPa (Test mode B, C) | 120Vac, 60Hz | Tim Mie |
| PLC | 24deg. C, 70%RH, 1006 hPa | 120Vac, 60Hz | Ariel Lin |
| APCM | 25deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Tim Mie |

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

For test mode A, B

| NO. | PRODUCT | BRAND | MODEL NO. | SERIAL NO. | FCC ID |
|-----|----------|-------|-----------|--------------------------|--------------|
| 1 | NOTEBOOK | DELL | D531 | CN-0XM006-48643-81U-2610 | QDS-BRCM1020 |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|---|
| 1 | NA |

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 1 acted as a communication partner to transfer data.

For test mode C

| NO. | PRODUCT | BRAND | MODEL NO. | SERIAL NO. | FCC ID |
|-----|----------|-------|-----------|--------------------------|------------------|
| 1 | NOTEBOOK | DELL | D531 | CN-0XM006-48643-81U-2610 | QDS-BRCM1020 |
| 2 | MODEM | ACEEX | 1414V/3 | 0401008270 | IFAXDM1414 |
| 3 | PRINTER | EPSON | B241A | FAPY139300 | FCC DoC Approved |
| 4 | NOTEBOOK | DELL | D600 | CN-0G5152-48643-49C-8226 | NA |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|--|
| 1 | NA |
| 2 | 1.2 m braid shielded wire, DB25 & DB9 connector, w/o core. |
| 3 | 1.8 m shielded cable, terminated with USB connector, w/o core. |
| 4 | NA |

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 4 acted as a communication partner to transfer data.



4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| FREQUENCIES (MHz) | FIELD STRENGTH (microvolts/meter) | MEASUREMENT DISTANCE (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|--|------------------------------|----------------------|---------------------|-------------------------|
| Test Receiver ROHDE & SCHWARZ | ESIB7 | 100212 | May 25, 2009 | May 24, 2010 |
| Spectrum Analyzer ROHDE & SCHWARZ | FSP40 | 100040 | Jul. 07, 2009 | Jul. 06, 2010 |
| BILOG Antenna SCHWARZBECK | VULB9168 | 9168-156 | Apr. 30, 2009 | Apr. 29, 2010 |
| HORN Antenna SCHWARZBECK | BBHA 9120 D | 9120D-563 | Aug. 10, 2009 | Aug. 09, 2010 |
| HORN Antenna SCHWARZBECK | BBHA 9170 | BBHA9170242 | Dec. 25, 2009 | Dec. 24, 2010 |
| Preamplifier Agilent | 8449B | 3008A01910 | Sep. 11, 2009 | Sep. 10, 2010 |
| Preamplifier Agilent | 8447D | 2944A10638 | Dec. 21, 2009 | Dec. 20, 2010 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 218190/4 231241/4 | May 13, 2009 | May 12, 2010 |
| RF signal cable Worken | 8D-FB | Cable-HYCH9-01 | Aug. 17, 2009 | Aug. 16, 2010 |
| Software | ADT_Radiated_ V7.6.15.9.2 | NA | NA | NA |
| Antenna Tower EMCO | 2070/2080 | 512.835.4684 | NA | NA |
| Turn Table EMCO | 2087-2.03 | NA | NA | NA |
| Antenna Tower & Turn Table Controller EMCO | 2090 | NA | NA | NA |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 460141.
 5. The IC Site Registration No. is IC 7450F-4.



4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

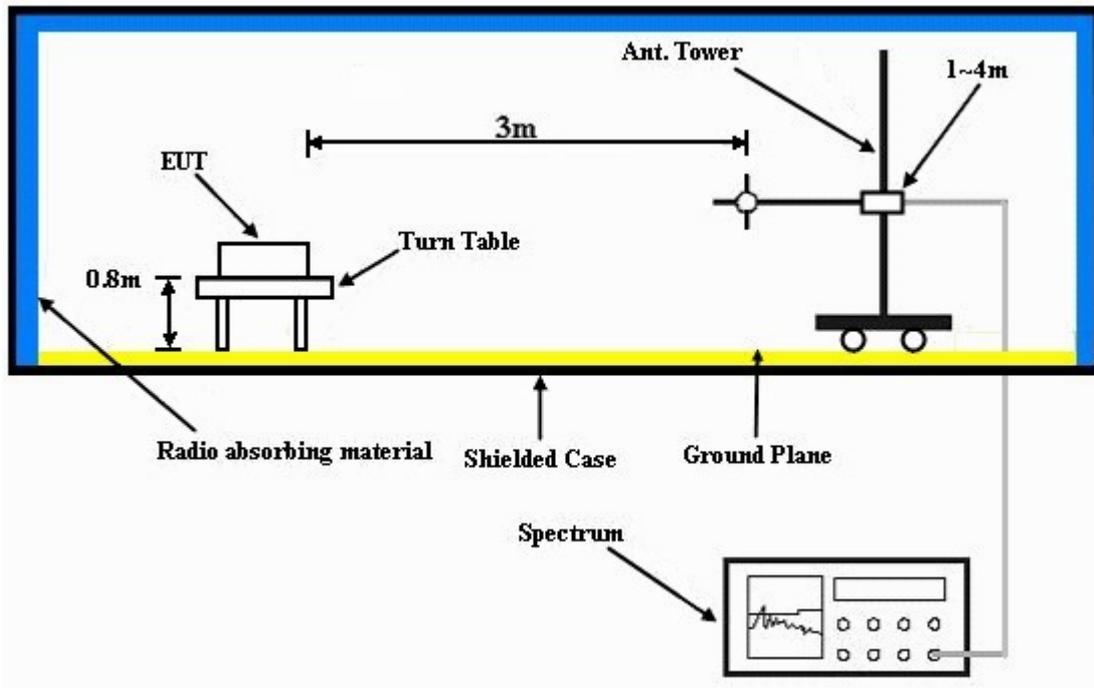

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

For test mode A, B

- Placed the EUT on the testing table.
- Prepared notebook system to act as a communication partner and placed them outside of testing area.
- The communication partners connected with EUT via RJ45 cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.

For test mode C

- Connected the EUT with the notebook via USB cable and placed on a testing table.
- Prepared another notebook system and placed it outside of testing area to act as a communication partner for EUT.
- The communication partners connected with EUT via RJ45 cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.



A D T

4.1.7 TEST RESULTS

802.11b

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 1 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 77%RH 1011 hPa | TESTED BY | Tim Mie |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2386.16 | 59.4 PK | 74.0 | -14.6 | 1.29 H | 255 | 27.10 | 32.30 |
| 2 | 2386.16 | 48.2 AV | 54.0 | -5.8 | 1.29 H | 255 | 15.90 | 32.30 |
| 3 | *2412.00 | 111.4 PK | | | 1.29 H | 252 | 79.00 | 32.40 |
| 4 | *2412.00 | 100.0 AV | | | 1.29 H | 252 | 67.60 | 32.40 |
| 5 | 4824.00 | 50.2 PK | 74.0 | -23.8 | 1.01 H | 13 | 11.80 | 38.40 |
| 6 | 4824.00 | 40.7 AV | 54.0 | -13.3 | 1.01 H | 13 | 2.30 | 38.40 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2386.00 | 60.3 PK | 74.0 | -13.7 | 1.19 V | 208 | 28.00 | 32.30 |
| 2 | 2386.00 | 48.4 AV | 54.0 | -5.6 | 1.19 V | 208 | 16.10 | 32.30 |
| 3 | *2412.00 | 114.0 PK | | | 1.23 V | 169 | 81.60 | 32.40 |
| 4 | *2412.00 | 101.5 AV | | | 1.23 V | 169 | 69.10 | 32.40 |
| 5 | 4824.00 | 49.2 PK | 74.0 | -24.8 | 1.00 V | 200 | 10.80 | 38.40 |
| 6 | 4824.00 | 38.9 AV | 54.0 | -15.1 | 1.00 V | 200 | 0.50 | 38.40 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 6 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 77%RH 1011 hPa | TESTED BY | Tim Mie |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 112.6 PK | | | 1.31 H | 119 | 80.20 | 32.40 |
| 2 | *2437.00 | 100.9 AV | | | 1.31 H | 119 | 68.50 | 32.40 |
| 3 | 4874.00 | 49.6 PK | 74.0 | -24.4 | 1.06 H | 328 | 11.10 | 38.50 |
| 4 | 4874.00 | 39.3 AV | 54.0 | -14.7 | 1.06 H | 328 | 0.80 | 38.50 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 115.5 PK | | | 1.23 V | 169 | 83.10 | 32.40 |
| 2 | *2437.00 | 102.8 AV | | | 1.23 V | 169 | 70.40 | 32.40 |
| 3 | 4874.00 | 50.0 PK | 74.0 | -24.0 | 1.00 V | 239 | 11.50 | 38.50 |
| 4 | 4874.00 | 39.5 AV | 54.0 | -14.5 | 1.00 V | 239 | 1.00 | 38.50 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 11 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 77%RH 1011 hPa | TESTED BY | Tim Mie |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 112.0 PK | | | 1.26 H | 255 | 79.50 | 32.50 |
| 2 | *2462.00 | 100.4 AV | | | 1.26 H | 255 | 67.90 | 32.50 |
| 3 | 2487.65 | 63.7 PK | 74.0 | -10.3 | 1.26 H | 255 | 31.10 | 32.60 |
| 4 | 2487.65 | 52.5 AV | 54.0 | -1.5 | 1.26 H | 255 | 19.90 | 32.60 |
| 5 | 4924.00 | 48.7 PK | 74.0 | -25.3 | 1.00 H | 209 | 10.10 | 38.60 |
| 6 | 4924.00 | 37.3 AV | 54.0 | -16.7 | 1.00 H | 209 | -1.30 | 38.60 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 114.2 PK | | | 1.18 V | 169 | 81.70 | 32.50 |
| 2 | *2462.00 | 101.8 AV | | | 1.18 V | 169 | 69.30 | 32.50 |
| 3 | 2487.65 | 63.0 PK | 74.0 | -11.0 | 1.15 V | 212 | 30.40 | 32.60 |
| 4 | 2487.65 | 51.7 AV | 54.0 | -2.3 | 1.15 V | 212 | 19.10 | 32.60 |
| 5 | 4824.00 | 48.9 PK | 74.0 | -25.1 | 1.09 V | 216 | 10.50 | 38.40 |
| 6 | 4824.00 | 38.9 AV | 54.0 | -15.1 | 1.09 V | 216 | 0.50 | 38.40 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

802.11g

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 1 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 77%RH 1011 hPa | TESTED BY | Tim Mie |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 65.6 PK | 74.0 | -8.4 | 1.02 H | 110 | 33.30 | 32.30 |
| 2 | 2390.00 | 49.1 AV | 54.0 | -4.9 | 1.02 H | 110 | 16.80 | 32.30 |
| 3 | *2412.00 | 112.3 PK | | | 1.01 H | 221 | 79.90 | 32.40 |
| 4 | *2412.00 | 91.5 AV | | | 1.01 H | 221 | 59.10 | 32.40 |
| 5 | 4824.00 | 47.4 PK | 74.0 | -26.6 | 1.08 H | 211 | 9.00 | 38.40 |
| 6 | 4824.00 | 35.0 AV | 54.0 | -19.0 | 1.08 H | 211 | -3.40 | 38.40 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 70.5 PK | 74.0 | -3.5 | 1.26 V | 177 | 38.20 | 32.30 |
| 2 | 2390.00 | 51.2 AV | 54.0 | -2.8 | 1.26 V | 177 | 18.90 | 32.30 |
| 3 | *2412.00 | 115.7 PK | | | 1.00 V | 190 | 83.30 | 32.40 |
| 4 | *2412.00 | 93.8 AV | | | 1.00 V | 190 | 61.40 | 32.40 |
| 5 | 4824.00 | 46.8 PK | 74.0 | -27.2 | 1.12 V | 127 | 8.40 | 38.40 |
| 6 | 4824.00 | 34.9 AV | 54.0 | -19.1 | 1.12 V | 127 | -3.50 | 38.40 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 6 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 77%RH 1011 hPa | TESTED BY | Tim Mie |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 116.0 PK | | | 1.33 H | 120 | 83.60 | 32.40 |
| 2 | *2437.00 | 94.2 AV | | | 1.33 H | 120 | 61.80 | 32.40 |
| 3 | 4874.00 | 48.4 PK | 74.0 | -25.6 | 1.00 H | 31 | 9.90 | 38.50 |
| 4 | 4874.00 | 35.6 AV | 54.0 | -18.4 | 1.00 H | 31 | -2.90 | 38.50 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 118.8 PK | | | 1.15 V | 187 | 86.40 | 32.40 |
| 2 | *2437.00 | 96.9 AV | | | 1.15 V | 187 | 64.50 | 32.40 |
| 3 | 4874.00 | 48.2 PK | 74.0 | -25.8 | 1.33 V | 310 | 9.70 | 38.50 |
| 4 | 4874.00 | 34.1 AV | 54.0 | -19.9 | 1.33 V | 310 | -4.40 | 38.50 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 11 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 77%RH 1011 hPa | TESTED BY | Tim Mie |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 112.5 PK | | | 1.22 H | 198 | 80.00 | 32.50 |
| 2 | *2462.00 | 91.7 AV | | | 1.22 H | 198 | 59.20 | 32.50 |
| 3 | 2483.50 | 68.8 PK | 74.0 | -5.2 | 1.21 H | 199 | 36.20 | 32.60 |
| 4 | 2483.50 | 49.8 AV | 54.0 | -4.2 | 1.21 H | 199 | 17.20 | 32.60 |
| 5 | 4924.00 | 45.9 PK | 74.0 | -28.1 | 1.00 H | 184 | 7.30 | 38.60 |
| 6 | 4924.00 | 3.0 AV | 54.0 | -51.0 | 1.00 H | 184 | -35.60 | 38.60 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 116.2 PK | | | 1.19 V | 360 | 83.70 | 32.50 |
| 2 | *2462.00 | 93.9 AV | | | 1.19 V | 360 | 61.40 | 32.50 |
| 3 | 2483.50 | 72.7 PK | 74.0 | -1.3 | 1.44 V | 180 | 40.10 | 32.60 |
| 4 | 2483.50 | 51.5 AV | 54.0 | -2.5 | 1.44 V | 180 | 18.90 | 32.60 |
| 5 | 4924.00 | 45.8 PK | 74.0 | -28.2 | 1.20 V | 122 | 7.20 | 38.60 |
| 6 | 4924.00 | 33.1 AV | 54.0 | -20.9 | 1.20 V | 122 | -5.50 | 38.60 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

802.11n (20MHz)

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 1 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 77%RH 1011 hPa | TESTED BY | Tim Mie |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2389.97 | 72.3 PK | 74.0 | -1.7 | 1.30 H | 152 | 38.80 | 33.50 |
| 2 | 2389.97 | 51.7 AV | 54.0 | -2.3 | 1.30 H | 152 | 18.20 | 33.50 |
| 3 | *2412.00 | 113.4 PK | | | 1.31 H | 131 | 79.80 | 33.60 |
| 4 | *2412.00 | 95.3 AV | | | 1.31 H | 131 | 61.70 | 33.60 |
| 5 | 4824.00 | 48.3 PK | 74.0 | -25.7 | 1.18 H | 244 | 8.10 | 40.20 |
| 6 | 4824.00 | 36.5 AV | 54.0 | -17.5 | 1.18 H | 244 | -3.70 | 40.20 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 70.3 PK | 74.0 | -3.7 | 1.23 V | 204 | 38.00 | 32.30 |
| 2 | 2390.00 | 50.8 AV | 54.0 | -3.2 | 1.23 V | 204 | 18.50 | 32.30 |
| 3 | *2412.00 | 114.2 PK | | | 1.23 V | 202 | 81.80 | 32.40 |
| 4 | *2412.00 | 95.5 AV | | | 1.23 V | 202 | 63.10 | 32.40 |
| 5 | 4824.00 | 47.5 PK | 74.0 | -26.5 | 1.18 V | 302 | 9.10 | 38.40 |
| 6 | 4824.00 | 34.5 AV | 54.0 | -19.5 | 1.18 V | 302 | -3.90 | 38.40 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 6 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 77%RH 1011 hPa | TESTED BY | Tim Mie |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 116.3 PK | | | 1.00 H | 152 | 83.90 | 32.40 |
| 2 | *2437.00 | 97.7 AV | | | 1.00 H | 152 | 65.30 | 32.40 |
| 3 | 4874.00 | 48.8 PK | 74.0 | -25.2 | 1.00 H | 15 | 10.30 | 38.50 |
| 4 | 4874.00 | 36.1 AV | 54.0 | -17.9 | 1.00 H | 15 | -2.40 | 38.50 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2437.00 | 117.3 PK | | | 1.21 V | 200 | 84.90 | 32.40 |
| 2 | *2437.00 | 98.4 AV | | | 1.21 V | 200 | 66.00 | 32.40 |
| 3 | 4874.00 | 49.6 PK | 74.0 | -24.4 | 1.00 V | 243 | 11.10 | 38.50 |
| 4 | 4874.00 | 35.2 AV | 54.0 | -18.8 | 1.00 V | 243 | -3.30 | 38.50 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 11 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 77%RH 1011 hPa | TESTED BY | Tim Mie |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 113.6 PK | | | 1.29 H | 136 | 81.10 | 32.50 |
| 2 | *2462.00 | 95.1 AV | | | 1.29 H | 136 | 62.60 | 32.50 |
| 3 | 2483.50 | 72.5 PK | 74.0 | -1.5 | 1.31 H | 120 | 39.90 | 32.60 |
| 4 | 2483.50 | 52.4 AV | 54.0 | -1.6 | 1.31 H | 120 | 19.80 | 32.60 |
| 5 | 4924.00 | 48.0 PK | 74.0 | -26.0 | 1.00 H | 122 | 9.40 | 38.60 |
| 6 | 4924.00 | 34.5 AV | 54.0 | -19.5 | 1.00 H | 122 | -4.10 | 38.60 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2462.00 | 114.9 PK | | | 1.17 V | 205 | 82.40 | 32.50 |
| 2 | *2462.00 | 96.2 AV | | | 1.17 V | 205 | 63.70 | 32.50 |
| 3 | 2483.50 | 73.0 PK | 74.0 | -1.0 | 1.14 V | 202 | 40.40 | 32.60 |
| 4 | 2483.50 | 52.5 AV | 54.0 | -1.5 | 1.14 V | 202 | 19.90 | 32.60 |
| 5 | 4924.00 | 48.2 PK | 74.0 | -25.8 | 1.15 V | 214 | 9.60 | 38.60 |
| 6 | 4924.00 | 34.7 AV | 54.0 | -19.3 | 1.15 V | 214 | -3.90 | 38.60 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

802.11n (40MHz)

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 1 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 77%RH 1011 hPa | TESTED BY | Tim Mie |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 69.2 PK | 74.0 | -4.8 | 1.30 H | 133 | 36.90 | 32.30 |
| 2 | 2390.00 | 50.6 AV | 54.0 | -3.4 | 1.30 H | 133 | 18.30 | 32.30 |
| 3 | *2422.00 | 104.2 PK | | | 1.24 H | 200 | 71.80 | 32.40 |
| 4 | *2422.00 | 86.9 AV | | | 1.24 H | 200 | 54.50 | 32.40 |
| 5 | 4844.00 | 46.6 PK | 74.0 | -27.4 | 1.18 H | 21 | 8.20 | 38.40 |
| 6 | 4844.00 | 33.5 AV | 54.0 | -20.5 | 1.18 H | 21 | -4.90 | 38.40 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 70.7 PK | 74.0 | -3.3 | 1.25 V | 189 | 38.40 | 32.30 |
| 2 | 2390.00 | 52.5 AV | 54.0 | -1.5 | 1.25 V | 189 | 20.20 | 32.30 |
| 3 | *2422.00 | 108.1 PK | | | 1.00 V | 192 | 75.70 | 32.40 |
| 4 | *2422.00 | 90.2 AV | | | 1.00 V | 192 | 57.80 | 32.40 |
| 5 | 4844.00 | 46.4 PK | 74.0 | -27.6 | 1.22 V | 124 | 8.00 | 38.40 |
| 6 | 4844.00 | 33.5 AV | 54.0 | -20.5 | 1.22 V | 124 | -4.90 | 38.40 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 4 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 77%RH 1011 hPa | TESTED BY | Tim Mie |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 69.8 PK | 74.0 | -4.2 | 1.29 H | 133 | 37.50 | 32.30 |
| 2 | 2390.00 | 49.8 AV | 54.0 | -4.2 | 1.29 H | 133 | 17.50 | 32.30 |
| 3 | *2437.00 | 111.6 PK | | | 1.26 H | 134 | 79.20 | 32.40 |
| 4 | *2437.00 | 92.9 AV | | | 1.26 H | 134 | 60.50 | 32.40 |
| 5 | 2483.50 | 71.4 PK | 74.0 | -2.6 | 1.25 H | 135 | 38.80 | 32.60 |
| 6 | 2483.50 | 50.3 AV | 54.0 | -3.7 | 1.25 H | 135 | 17.70 | 32.60 |
| 7 | 4874.00 | 45.8 PK | 74.0 | -28.2 | 1.13 H | 212 | 7.30 | 38.50 |
| 8 | 4874.00 | 33.8 AV | 54.0 | -20.2 | 1.13 H | 212 | -4.70 | 38.50 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 2390.00 | 71.7 PK | 74.0 | -2.3 | 1.25 V | 173 | 39.40 | 32.30 |
| 2 | 2390.00 | 51.6 AV | 54.0 | -2.4 | 1.25 V | 173 | 19.30 | 32.30 |
| 3 | *2437.00 | 113.8 PK | | | 1.22 V | 177 | 81.40 | 32.40 |
| 4 | *2437.00 | 95.3 AV | | | 1.22 V | 177 | 62.90 | 32.40 |
| 5 | 2483.50 | 71.7 PK | 74.0 | -2.3 | 1.44 V | 180 | 39.10 | 32.60 |
| 6 | 2483.50 | 51.3 AV | 54.0 | -2.7 | 1.44 V | 180 | 18.70 | 32.60 |
| 7 | 4874.00 | 45.8 PK | 74.0 | -28.2 | 1.10 V | 214 | 7.30 | 38.50 |
| 8 | 4874.00 | 33.5 AV | 54.0 | -20.5 | 1.10 V | 214 | -5.00 | 38.50 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------------------|
| CHANNEL | Channel 7 | FREQUENCY RANGE | 1 ~ 25GHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 77%RH 1011 hPa | TESTED BY | Tim Mie |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2452.00 | 103.9 PK | | | 1.26 H | 134 | 71.40 | 32.50 |
| 2 | *2452.00 | 86.1 AV | | | 1.26 H | 134 | 53.60 | 32.50 |
| 3 | 2483.50 | 70.5 PK | 74.0 | -3.5 | 1.25 H | 135 | 37.90 | 32.60 |
| 4 | 2483.50 | 52.0 AV | 54.0 | -2.0 | 1.25 H | 135 | 19.40 | 32.60 |
| 5 | 4904.00 | 46.1 PK | 74.0 | -27.9 | 1.27 H | 102 | 7.60 | 38.50 |
| 6 | 4904.00 | 33.0 AV | 54.0 | -21.0 | 1.27 H | 102 | -5.50 | 38.50 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *2452.00 | 108.0 PK | | | 1.49 V | 176 | 75.50 | 32.50 |
| 2 | *2452.00 | 89.9 AV | | | 1.49 V | 176 | 57.40 | 32.50 |
| 3 | 2483.50 | 72.2 PK | 74.0 | -1.8 | 1.44 V | 175 | 39.60 | 32.60 |
| 4 | 2483.50 | 53.6 AV | 54.0 | -0.4 | 1.44 V | 175 | 21.00 | 32.60 |
| 5 | 4904.00 | 46.2 PK | 74.0 | -27.8 | 1.52 V | 122 | 7.70 | 38.50 |
| 6 | 4904.00 | 33.3 AV | 54.0 | -20.7 | 1.52 V | 122 | -5.20 | 38.50 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz)

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------|
| CHANNEL | Channel 6 | FREQUENCY RANGE | Below 1000MHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Quasi-Peak |
| ENVIRONMENTAL CONDITIONS | 23deg. C, 77%RH 1011 hPa | TESTED BY | Tim Mie |
| TEST MODE | A | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 101.84 | 31.8 QP | 43.5 | -11.7 | 2.00 H | 106 | 22.20 | 9.60 |
| 2 | 249.60 | 38.9 QP | 46.0 | -7.1 | 1.00 H | 91 | 26.00 | 12.90 |
| 3 | 500.42 | 38.4 QP | 46.0 | -7.6 | 1.00 H | 229 | 19.10 | 19.30 |
| 4 | 751.23 | 33.5 QP | 46.0 | -12.5 | 2.00 H | 214 | 9.50 | 24.00 |
| 5 | 906.77 | 38.5 QP | 46.0 | -7.5 | 2.00 H | 52 | 12.30 | 26.20 |
| 6 | 955.38 | 37.1 QP | 46.0 | -8.9 | 2.00 H | 181 | 10.50 | 26.60 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 31.84 | 35.4 QP | 40.0 | -4.6 | 1.00 V | 10 | 23.10 | 12.30 |
| 2 | 99.89 | 35.3 QP | 43.5 | -8.2 | 1.50 V | 187 | 25.90 | 9.40 |
| 3 | 249.60 | 33.8 QP | 46.0 | -12.2 | 1.00 V | 118 | 20.90 | 12.90 |
| 4 | 500.42 | 35.8 QP | 46.0 | -10.2 | 1.00 V | 154 | 16.50 | 19.30 |
| 5 | 642.35 | 31.8 QP | 46.0 | -14.2 | 1.50 V | 181 | 9.50 | 22.30 |
| 6 | 770.67 | 32.0 QP | 46.0 | -14.0 | 1.25 V | 178 | 7.40 | 24.60 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------|
| CHANNEL | Channel 6 | FREQUENCY RANGE | Below 1000MHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Quasi-Peak |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 66%RH 1007 hPa | TESTED BY | Tim Mie |
| TEST MODE | B | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 103.78 | 33.9 QP | 43.5 | -9.6 | 1.00 H | 223 | 21.70 | 12.20 |
| 2 | 249.60 | 42.9 QP | 46.0 | -3.1 | 1.00 H | 238 | 28.00 | 14.90 |
| 3 | 374.04 | 35.4 QP | 46.0 | -10.6 | 1.00 H | 76 | 18.10 | 17.30 |
| 4 | 640.41 | 32.6 QP | 46.0 | -13.4 | 1.00 H | 208 | 9.30 | 23.30 |
| 5 | 768.73 | 30.2 QP | 46.0 | -15.8 | 1.00 H | 205 | 4.80 | 25.40 |
| 6 | 897.05 | 40.7 QP | 46.0 | -5.3 | 1.50 H | 244 | 13.80 | 26.90 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 30.10 | 36.7 QP | 40.0 | -3.3 | 1.00 V | 187 | 21.80 | 14.90 |
| 2 | 105.73 | 39.4 QP | 43.5 | -4.1 | 1.00 V | 166 | 26.90 | 12.50 |
| 3 | 249.60 | 37.6 QP | 46.0 | -8.4 | 2.00 V | 106 | 22.70 | 14.90 |
| 4 | 374.04 | 36.4 QP | 46.0 | -9.6 | 1.50 V | 253 | 19.10 | 17.30 |
| 5 | 640.41 | 30.0 QP | 46.0 | -16.0 | 1.50 V | 145 | 6.70 | 23.30 |
| 6 | 897.05 | 41.7 QP | 46.0 | -4.3 | 1.00 V | 172 | 14.80 | 26.90 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------------|-----------------------------|--------------------|---------------|
| CHANNEL | Channel 6 | FREQUENCY RANGE | Below 1000MHz |
| INPUT POWER | 120Vac, 60 Hz | DETECTOR FUNCTION | Quasi-Peak |
| ENVIRONMENTAL CONDITIONS | 25deg. C, 66%RH 1007 hPa | TESTED BY | Tim Mie |
| TEST MODE | C | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 80.45 | 35.4 QP | 40.0 | -4.6 | 2.00 H | 211 | 24.80 | 10.60 |
| 2 | 249.60 | 39.5 QP | 46.0 | -6.5 | 1.00 H | 91 | 24.60 | 14.90 |
| 3 | 374.04 | 36.5 QP | 46.0 | -9.5 | 1.00 H | 229 | 19.20 | 17.30 |
| 4 | 640.41 | 34.0 QP | 46.0 | -12.0 | 1.00 H | 205 | 10.70 | 23.30 |
| 5 | 733.73 | 40.4 QP | 46.0 | -5.6 | 1.00 H | 220 | 15.80 | 24.60 |
| 6 | 897.05 | 38.8 QP | 46.0 | -7.2 | 1.50 H | 193 | 11.90 | 26.90 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 105.73 | 30.7 QP | 43.5 | -12.8 | 1.00 V | 334 | 18.20 | 12.50 |
| 2 | 249.60 | 30.0 QP | 46.0 | -16.0 | 1.50 V | 139 | 15.10 | 14.90 |
| 3 | 374.04 | 33.9 QP | 46.0 | -12.1 | 2.00 V | 190 | 16.60 | 17.30 |
| 4 | 624.85 | 33.2 QP | 46.0 | -12.8 | 1.50 V | 163 | 10.00 | 23.20 |
| 5 | 729.84 | 37.0 QP | 46.0 | -9.0 | 2.00 V | 190 | 12.50 | 24.50 |
| 6 | 897.05 | 40.4 QP | 46.0 | -5.6 | 1.00 V | 184 | 13.50 | 26.90 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB μ V) | |
|-----------------------------|------------------------------|----------|
| | Quasi-peak | Average |
| 0.15 ~ 0.5 | 66 to 56 | 56 to 46 |
| 0.5 ~ 5 | 56 | 46 |
| 5 ~ 30 | 60 | 50 |

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|----------------------------------|---------------------|----------------|---------------------|-------------------------|
| Test Receiver ROHDE & SCHWARZ | ESCS30 | 100288 | Sep. 24, 2009 | Sep. 23, 2010 |
| RF signal cable Woken | 5D-FB | Cable-HYCO2-01 | Dec. 31, 2009 | Dec. 30, 2010 |
| LISN ROHDE & SCHWARZ | ESH2-Z5 | 100100 | Aug. 24, 2009 | Aug. 23, 2010 |
| LISN ROHDE & SCHWARZ | ESH3-Z5 | 100311 | Jul. 29, 2009 | Jul. 28, 2010 |
| Software ADT | ADT_Cond_ V7.3.7 | NA | NA | NA |

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.



A D T

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

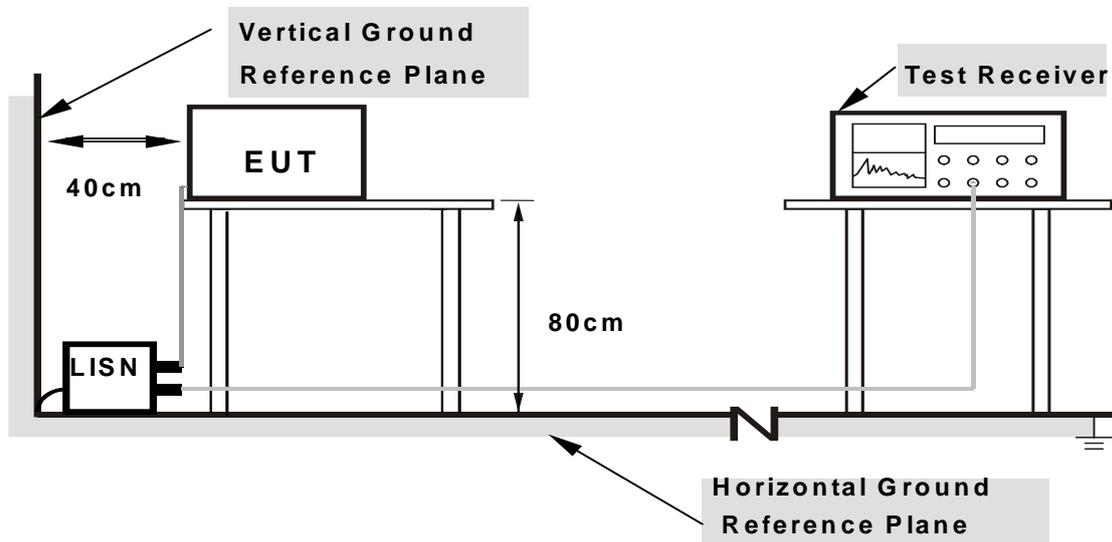

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.


4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA : 802.11n (20MHz)

| | | | |
|-----------|--------|---------------|------|
| PHASE | Line 1 | 6dB BANDWIDTH | 9kHz |
| TEST MODE | A | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|----------------------|---------------|-------|----------------|-------|-----------|-------|--------|-------|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.200 | 0.16 | 49.79 | - | 49.95 | - | 63.63 | 53.63 | -13.68 | - |
| 2 | 0.239 | 0.16 | 42.57 | - | 42.73 | - | 62.15 | 52.15 | -19.41 | - |
| 3 | 0.363 | 0.18 | 40.58 | - | 40.76 | - | 58.66 | 48.66 | -17.90 | - |
| 4 | 1.817 | 0.30 | 47.92 | 42.70 | 48.22 | 43.00 | 56.00 | 46.00 | -7.78 | -3.00 |
| 5 | 3.633 | 0.34 | 45.08 | 37.84 | 45.42 | 38.18 | 56.00 | 46.00 | -10.58 | -7.82 |
| 6 | 5.448 | 0.35 | 44.51 | - | 44.86 | - | 60.00 | 50.00 | -15.14 | - |
| 7 | 7.264 | 0.35 | 46.17 | - | 46.52 | - | 60.00 | 50.00 | -13.48 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

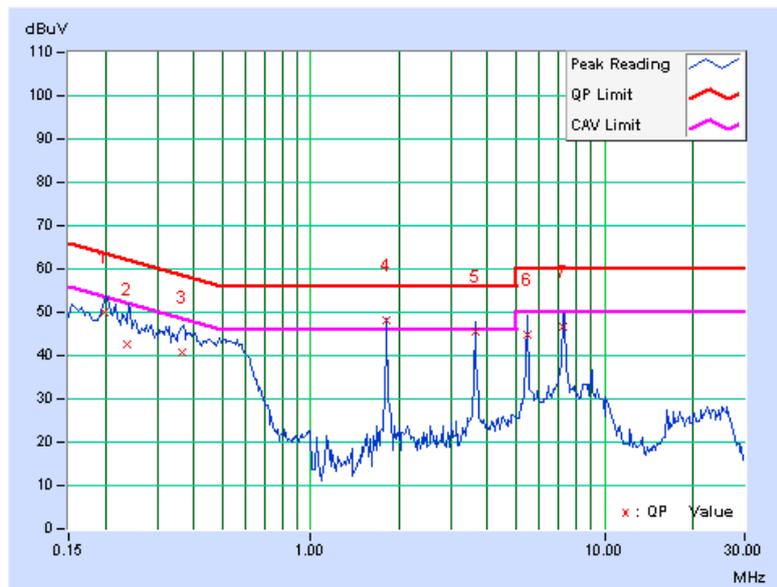




A D T

| | | | |
|-----------|--------|---------------|------|
| PHASE | Line 2 | 6dB BANDWIDTH | 9kHz |
| TEST MODE | A | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|----------------------|---------------|-------|----------------|-------|-----------|-------|--------|-------|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.200 | 0.13 | 48.03 | - | 48.16 | - | 63.63 | 53.63 | -15.47 | - |
| 2 | 0.237 | 0.14 | 43.33 | - | 43.47 | - | 62.19 | 52.19 | -18.72 | - |
| 3 | 0.361 | 0.15 | 43.46 | - | 43.61 | - | 58.70 | 48.70 | -15.09 | - |
| 4 | 1.818 | 0.29 | 46.97 | 42.07 | 47.26 | 42.36 | 56.00 | 46.00 | -8.74 | -3.64 |
| 5 | 3.634 | 0.35 | 45.54 | 38.34 | 45.89 | 38.69 | 56.00 | 46.00 | -10.11 | -7.31 |
| 6 | 5.453 | 0.38 | 44.75 | - | 45.13 | - | 60.00 | 50.00 | -14.87 | - |
| 7 | 7.268 | 0.40 | 45.36 | - | 45.76 | - | 60.00 | 50.00 | -14.24 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

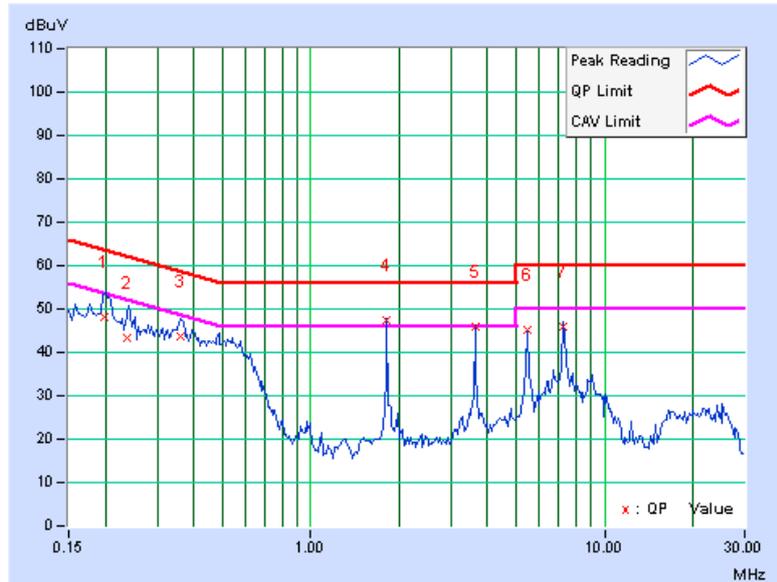




A D T

| | | | |
|-----------|--------|---------------|------|
| PHASE | Line 1 | 6dB BANDWIDTH | 9kHz |
| TEST MODE | B | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|----------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.295 | 0.17 | 36.30 | - | 36.47 | - | 60.40 | 50.40 | -23.93 | - |
| 2 | 0.509 | 0.19 | 36.30 | - | 36.49 | - | 56.00 | 46.00 | -19.51 | - |
| 3 | 0.724 | 0.21 | 41.10 | - | 41.31 | - | 56.00 | 46.00 | -14.69 | - |
| 4 | 0.986 | 0.23 | 39.06 | - | 39.29 | - | 56.00 | 46.00 | -16.71 | - |
| 5 | 1.965 | 0.31 | 39.11 | - | 39.42 | - | 56.00 | 46.00 | -16.58 | - |
| 6 | 3.637 | 0.34 | 40.66 | - | 41.00 | - | 56.00 | 46.00 | -15.00 | - |
| 7 | 7.281 | 0.35 | 34.60 | - | 34.95 | - | 60.00 | 50.00 | -25.05 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

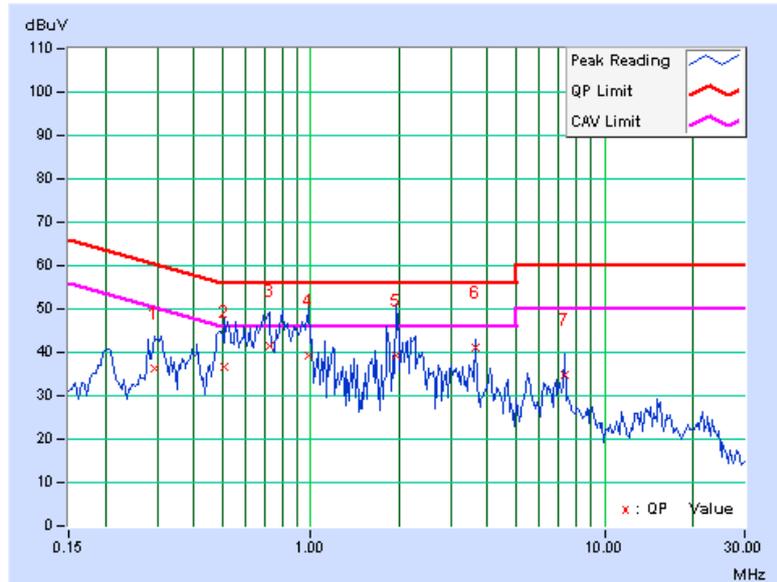




A D T

| | | | |
|-----------|--------|---------------|------|
| PHASE | Line 2 | 6dB BANDWIDTH | 9kHz |
| TEST MODE | B | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|----------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.396 | 0.16 | 30.97 | - | 31.13 | - | 57.93 | 47.93 | -26.80 | - |
| 2 | 0.517 | 0.17 | 36.38 | - | 36.55 | - | 56.00 | 46.00 | -19.45 | - |
| 3 | 0.693 | 0.19 | 38.00 | - | 38.19 | - | 56.00 | 46.00 | -17.81 | - |
| 4 | 0.830 | 0.20 | 36.27 | - | 36.47 | - | 56.00 | 46.00 | -19.53 | - |
| 5 | 0.927 | 0.21 | 36.80 | - | 37.01 | - | 56.00 | 46.00 | -18.99 | - |
| 6 | 2.035 | 0.30 | 35.08 | - | 35.38 | - | 56.00 | 46.00 | -20.62 | - |
| 7 | 5.461 | 0.38 | 35.12 | - | 35.50 | - | 60.00 | 50.00 | -24.50 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

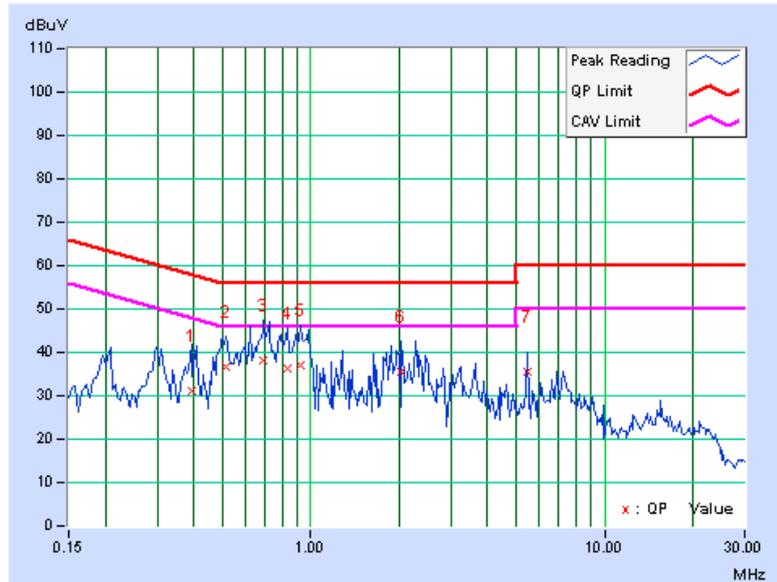




A D T

| | | | |
|-----------|--------|---------------|------|
| PHASE | Line 1 | 6dB BANDWIDTH | 9kHz |
| TEST MODE | C | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|----------------------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.159 | 0.16 | 54.37 | 43.17 | 54.53 | 43.33 | 65.50 | 55.50 | -10.97 | -12.17 |
| 2 | 0.214 | 0.16 | 46.10 | - | 46.26 | - | 63.06 | 53.06 | -16.79 | - |
| 3 | 0.320 | 0.17 | 41.21 | - | 41.38 | - | 59.71 | 49.71 | -18.33 | - |
| 4 | 1.787 | 0.29 | 41.17 | - | 41.46 | - | 56.00 | 46.00 | -14.54 | - |
| 5 | 3.631 | 0.34 | 38.04 | - | 38.38 | - | 56.00 | 46.00 | -17.62 | - |
| 6 | 5.359 | 0.35 | 34.78 | - | 35.13 | - | 60.00 | 50.00 | -24.87 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

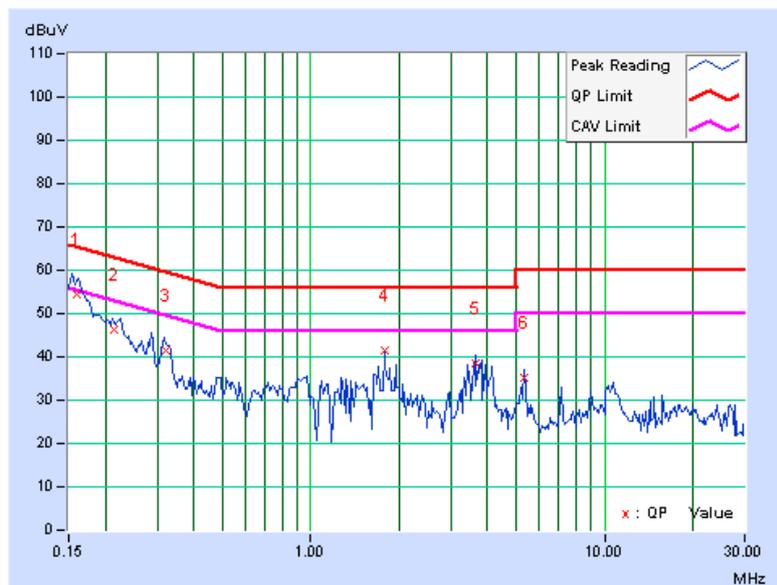




A D T

| | | | |
|-----------|--------|---------------|------|
| PHASE | Line 2 | 6dB BANDWIDTH | 9kHz |
| TEST MODE | C | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|----------------------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.160 | 0.13 | 54.83 | 43.43 | 54.96 | 43.56 | 65.45 | 55.45 | -10.49 | -11.89 |
| 2 | 0.213 | 0.13 | 47.06 | - | 47.19 | - | 63.09 | 53.09 | -15.89 | - |
| 3 | 0.322 | 0.15 | 38.67 | - | 38.82 | - | 59.65 | 49.65 | -20.83 | - |
| 4 | 1.923 | 0.29 | 34.93 | - | 35.22 | - | 56.00 | 46.00 | -20.78 | - |
| 5 | 3.518 | 0.35 | 34.69 | - | 35.04 | - | 56.00 | 46.00 | -20.96 | - |
| 6 | 3.722 | 0.35 | 37.05 | - | 37.40 | - | 56.00 | 46.00 | -18.60 | - |
| 7 | 10.930 | 0.48 | 31.14 | - | 31.62 | - | 60.00 | 50.00 | -28.38 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

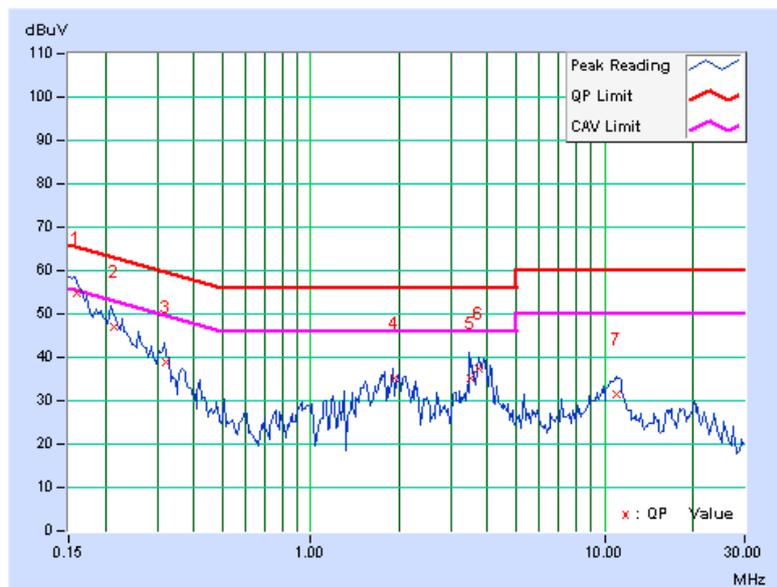



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|----------------------------|-----------|------------|---------------------|-------------------------|
| R&S SPECTRUM ANALYZER | FSP40 | 100040 | Jul. 07, 2009 | Jul. 06, 2010 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

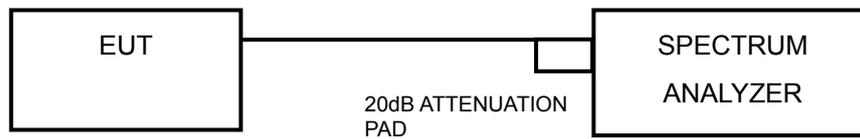

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




A D T

4.3.7 TEST RESULTS

802.11b

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------|---------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | |
| 1 | 2412 | 11.14 | 10.19 | 0.5 | PASS |
| 6 | 2437 | 11.17 | 11.17 | 0.5 | PASS |
| 11 | 2462 | 12.04 | 10.22 | 0.5 | PASS |

FOR CHAIN 0: CH 11

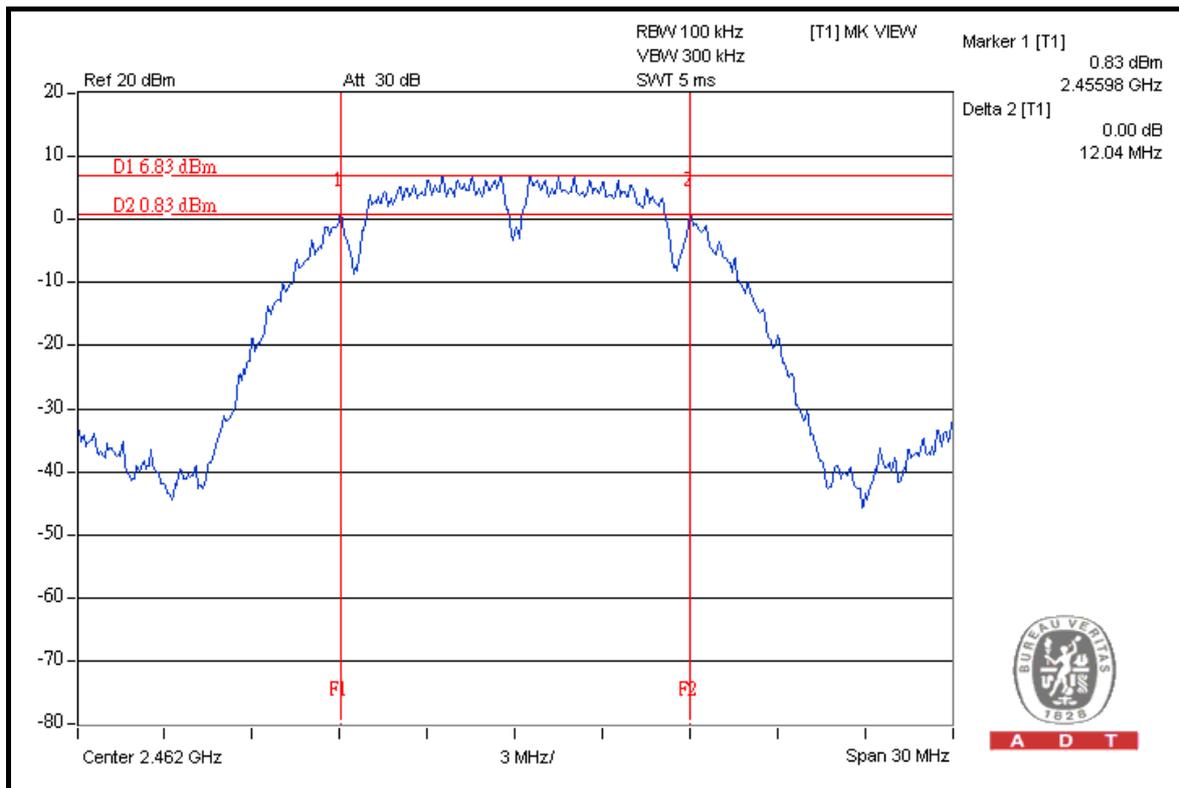




A D T

802.11g

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------|---------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | |
| 1 | 2412 | 16.10 | 16.38 | 0.5 | PASS |
| 6 | 2437 | 16.14 | 16.36 | 0.5 | PASS |
| 11 | 2462 | 16.35 | 16.34 | 0.5 | PASS |

FOR CHAIN 1: CH 1

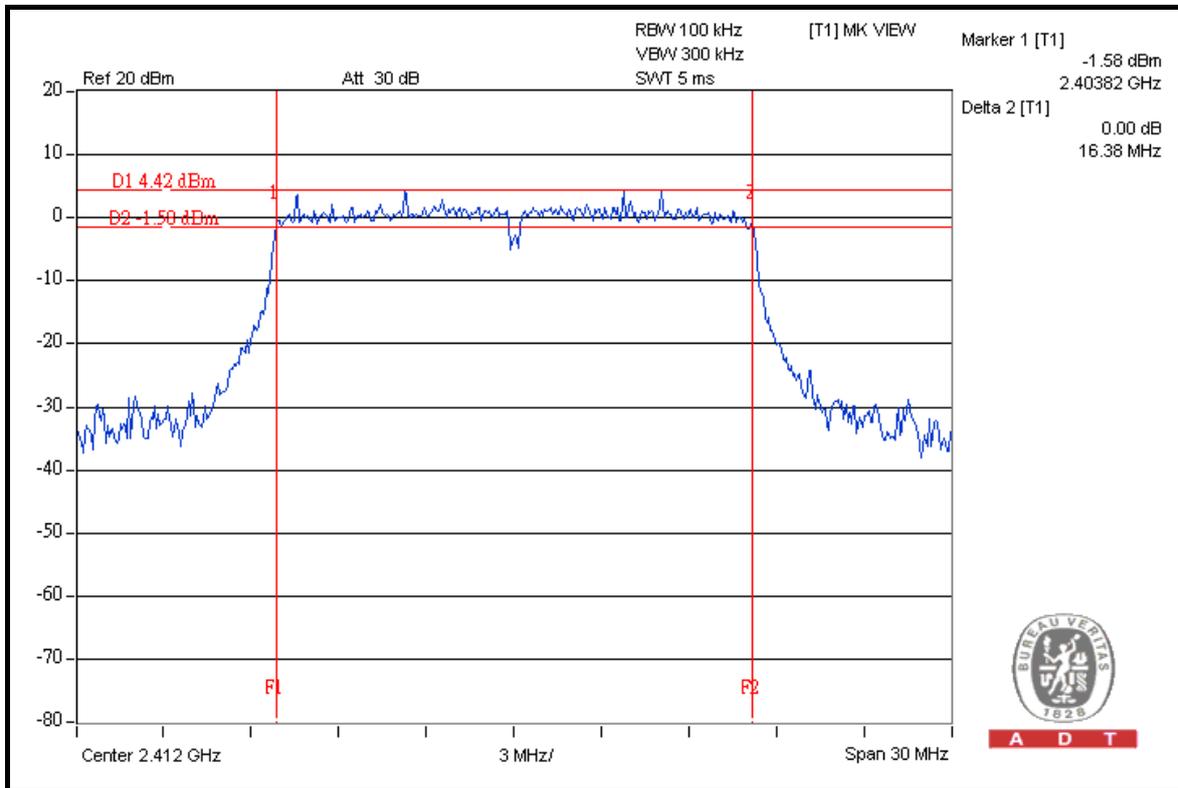




A D T

802.11n (20MHz)

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------|---------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | |
| 1 | 2412 | 16.92 | 15.87 | 0.5 | PASS |
| 6 | 2437 | 16.62 | 16.95 | 0.5 | PASS |
| 11 | 2462 | 17.05 | 16.71 | 0.5 | PASS |

FOR CHAIN 0: CH 11

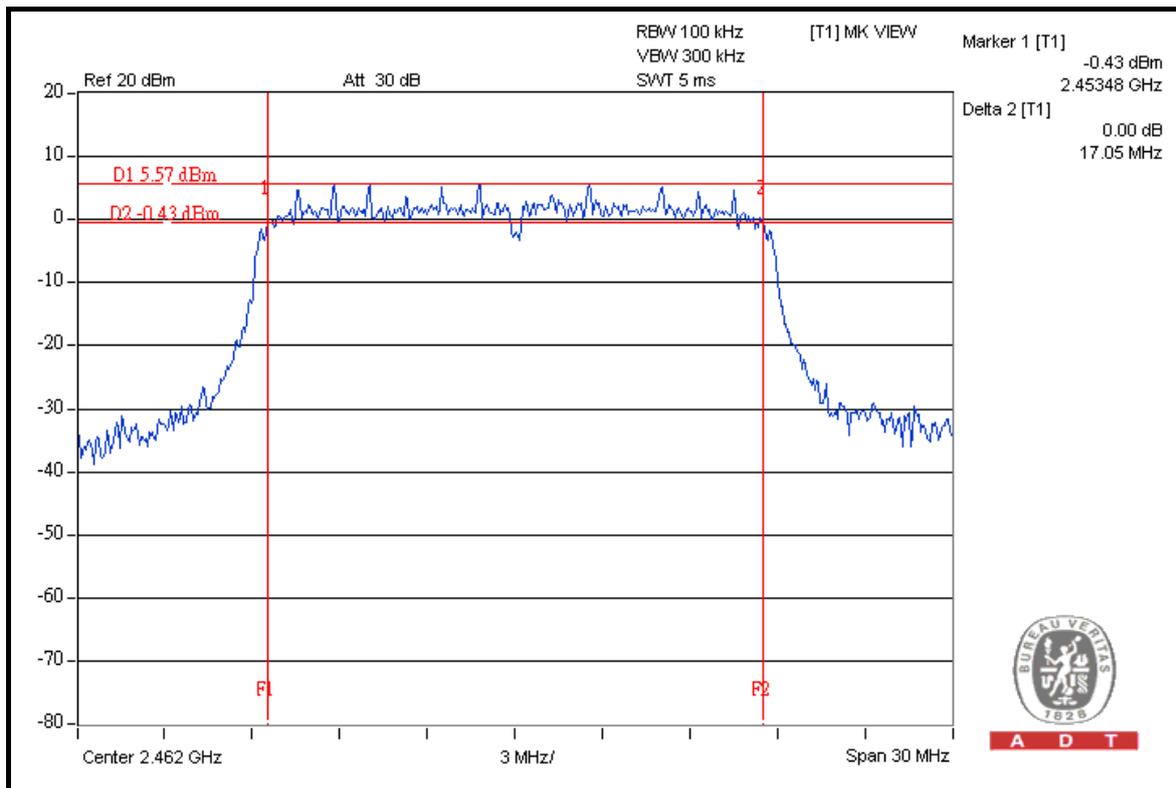

A D T




A D T

802.11n (40MHz)

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-------------------------|---------------------|---------|---------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | |
| 1 | 2422 | 35.23 | 35.46 | 0.5 | PASS |
| 4 | 2437 | 35.88 | 35.39 | 0.5 | PASS |
| 7 | 2452 | 35.38 | 35.22 | 0.5 | PASS |

FOR CHAIN 0: CH 4

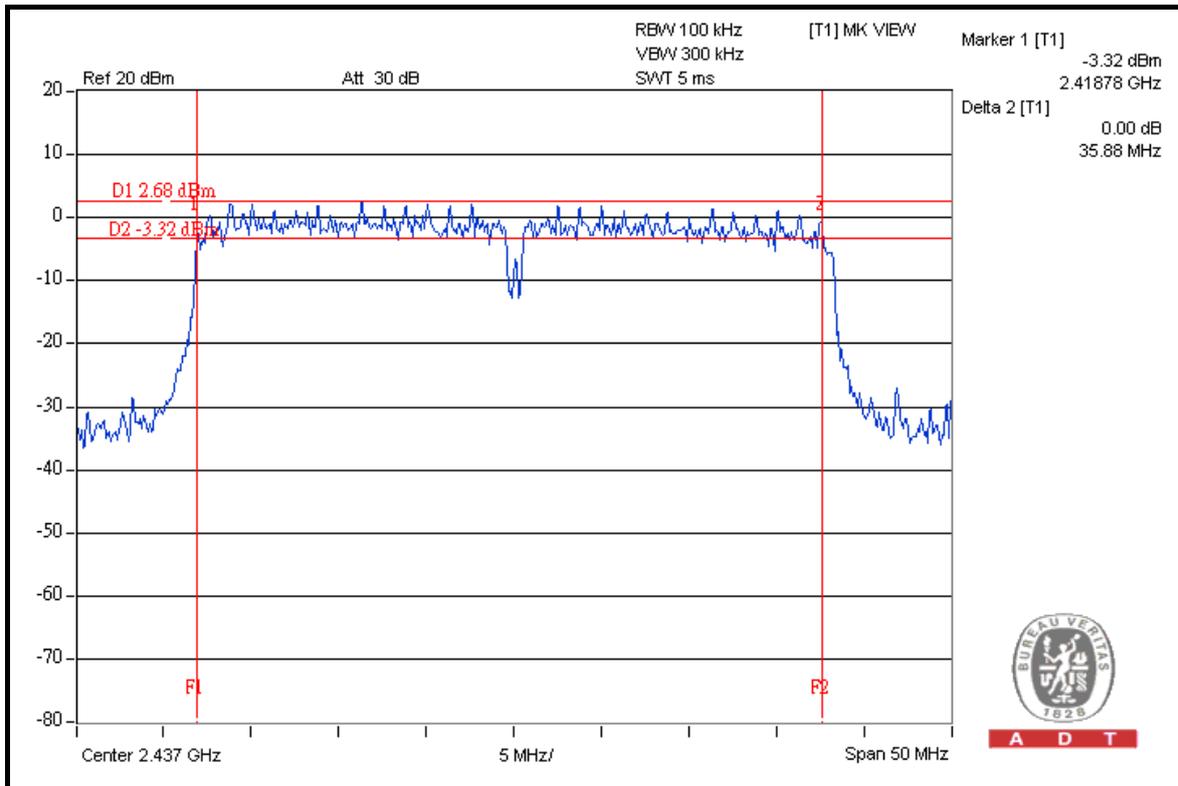



A D T

4.4 MAXIMUM OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT

The Maximum Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|-----------------------------|-----------|------------|---------------------|-------------------------|
| High Speed Peak Power Meter | ML2495A | 0824012 | Aug. 10, 2009 | Aug. 09, 2010 |
| Power Sensor | MA2411B | 0738138 | Aug. 10, 2009 | Aug. 09, 2010 |

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 6dB bandwidth of emission.


4.4.3 TEST PROCEDURE

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

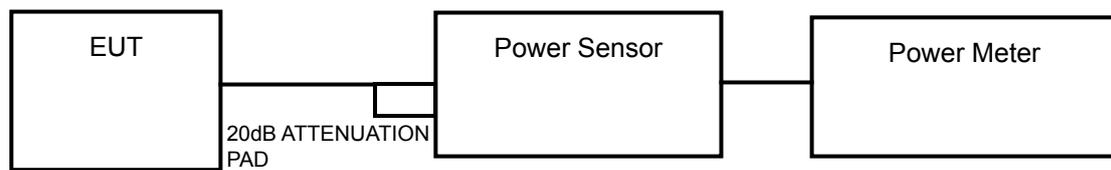

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



4.4.7 TEST RESULTS

802.11b

| CHAN. | CHAN. FREQ. (MHz) | POWER OUTPUT (dBm) | | TOTAL POWER (mW) | TOTAL POWER (dBm) | POWER LIMIT (dBm) | PASS / FAIL |
|-------|-------------------|--------------------|---------|------------------|-------------------|-------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | | | |
| 1 | 2412 | 20.4 | 20.1 | 212.0 | 23.3 | 30 | PASS |
| 6 | 2437 | 22.4 | 21.8 | 325.1 | 25.1 | 30 | PASS |
| 11 | 2462 | 21.2 | 20.7 | 249.3 | 24.0 | 30 | PASS |

802.11g

| CHAN. | CHAN. FREQ. (MHz) | POWER OUTPUT (dBm) | | TOTAL POWER (mW) | TOTAL POWER (dBm) | POWER LIMIT (dBm) | PASS / FAIL |
|-------|-------------------|--------------------|---------|------------------|-------------------|-------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | | | |
| 1 | 2412 | 25.4 | 25.3 | 685.6 | 28.4 | 30 | PASS |
| 6 | 2437 | 26.0 | 26.7 | 865.8 | 29.4 | 30 | PASS |
| 11 | 2462 | 24.5 | 24.5 | 563.7 | 27.5 | 30 | PASS |

802.11n (20MHz)

| CHAN. | CHAN. FREQ. (MHz) | POWER OUTPUT (dBm) | | TOTAL POWER (mW) | TOTAL POWER (dBm) | POWER LIMIT (dBm) | PASS / FAIL |
|-------|-------------------|--------------------|---------|------------------|-------------------|-------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | | | |
| 1 | 2412 | 25.3 | 25.6 | 701.9 | 28.5 | 30 | PASS |
| 6 | 2437 | 26.4 | 27.2 | 961.3 | 29.8 | 30 | PASS |
| 11 | 2462 | 25.0 | 24.8 | 618.2 | 27.9 | 30 | PASS |

802.11n (40MHz)

| CHAN. | CHAN. FREQ. (MHz) | POWER OUTPUT (dBm) | | TOTAL POWER (mW) | TOTAL POWER (dBm) | POWER LIMIT (dBm) | PASS / FAIL |
|-------|-------------------|--------------------|---------|------------------|-------------------|-------------------|-------------|
| | | CHAIN 0 | CHAIN 1 | | | | |
| 1 | 2422 | 21.0 | 21.0 | 251.8 | 24.0 | 30 | PASS |
| 4 | 2437 | 25.6 | 25.4 | 709.8 | 28.5 | 30 | PASS |
| 7 | 2452 | 20.2 | 21.0 | 230.6 | 23.6 | 30 | PASS |

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|----------------------------|-----------|------------|---------------------|-------------------------|
| R&S SPECTRUM ANALYZER | FSP40 | 100040 | Jul. 07, 2009 | Jul. 06, 2010 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP

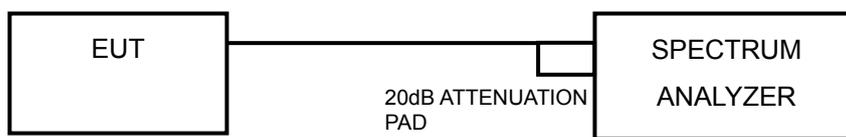

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6




A D T

4.5.7 TEST RESULTS

802.11b

| CHANNEL | CHAN. FREQ. (MHz) | RF POWER LEVEL IN 3 kHz BW (dBm) | | TOTAL POWER DENSITY (dBm) | MAXIMUM LIMIT (dBm) | PASS/FAIL |
|---------|-------------------|----------------------------------|---------|---------------------------|---------------------|-----------|
| | | CHAIN 0 | CHAIN 1 | | | |
| 1 | 2412 | -9.5 | -8.2 | -5.8 | 8 | PASS |
| 6 | 2437 | -7.3 | -6.6 | -3.9 | 8 | PASS |
| 11 | 2462 | -8.6 | -7.4 | -5.0 | 8 | PASS |

CHAIN 1: CH 6

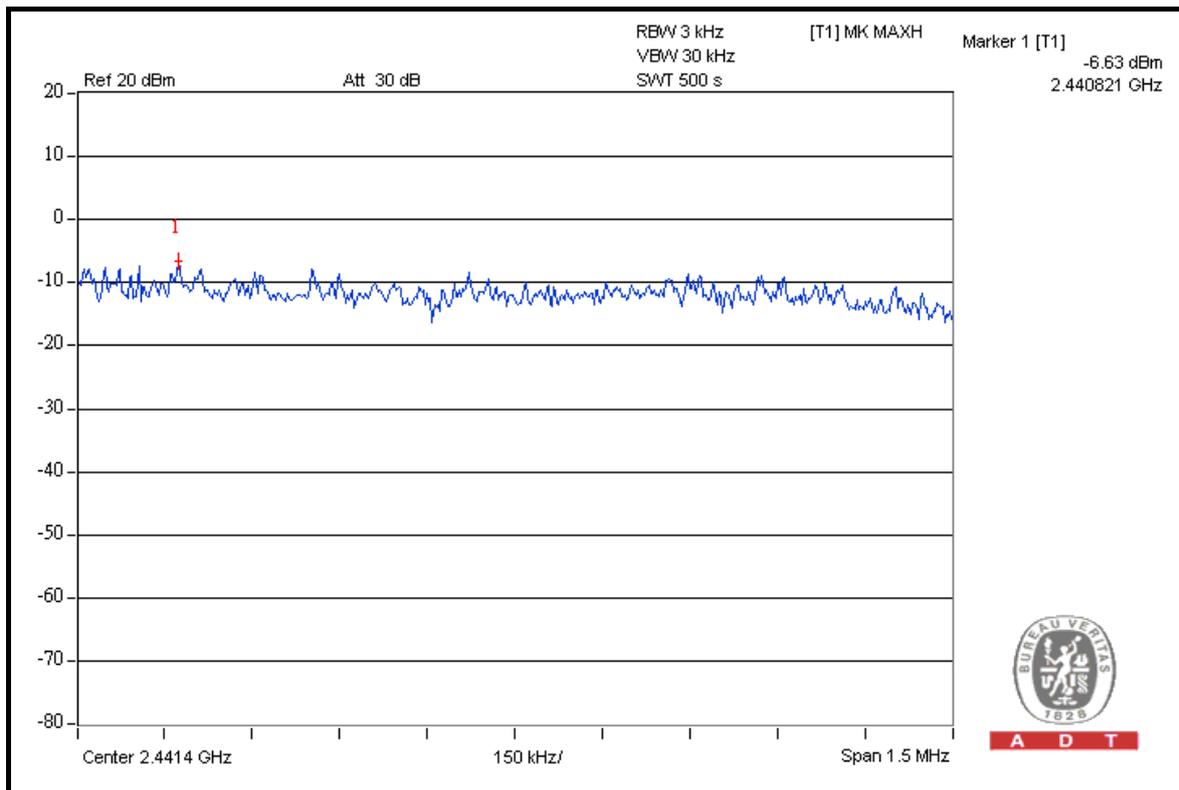




A D T

802.11g

| CHANNEL | CHAN. FREQ. (MHz) | RF POWER LEVEL IN 3 kHz BW (dBm) | | TOTAL POWER DENSITY (dBm) | MAXIMUM LIMIT (dBm) | PASS/FAIL |
|---------|-------------------|----------------------------------|---------|---------------------------|---------------------|-----------|
| | | CHAIN 0 | CHAIN 1 | | | |
| 1 | 2412 | -11.3 | -9.8 | -7.5 | 8 | PASS |
| 6 | 2437 | -10.6 | -8.1 | -6.2 | 8 | PASS |
| 11 | 2462 | -12.0 | -10.6 | -8.2 | 8 | PASS |

CHAIN 1: CH 6

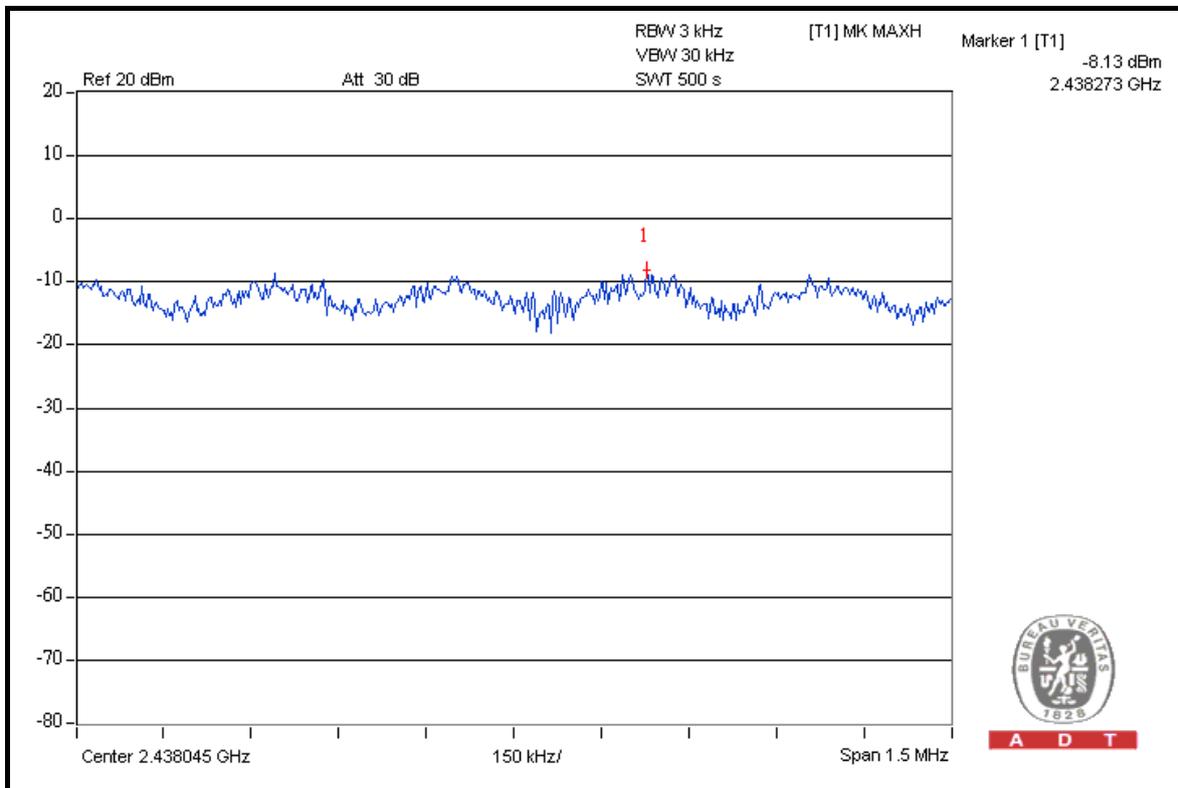




A D T

802.11n (40MHz)

| CHANNEL | CHAN. FREQ. (MHz) | RF POWER LEVEL IN 3 kHz BW (dBm) | | TOTAL POWER DENSITY (dBm) | MAXIMUM LIMIT (dBm) | PASS/FAIL |
|---------|-------------------|----------------------------------|---------|---------------------------|---------------------|-----------|
| | | CHAIN 0 | CHAIN 1 | | | |
| 1 | 2422 | -18.1 | -18.7 | -15.4 | 8 | PASS |
| 4 | 2437 | -13.5 | -14.0 | -10.8 | 8 | PASS |
| 7 | 2452 | -18.8 | -18.5 | -15.7 | 8 | PASS |

CHAIN 0: CH 4

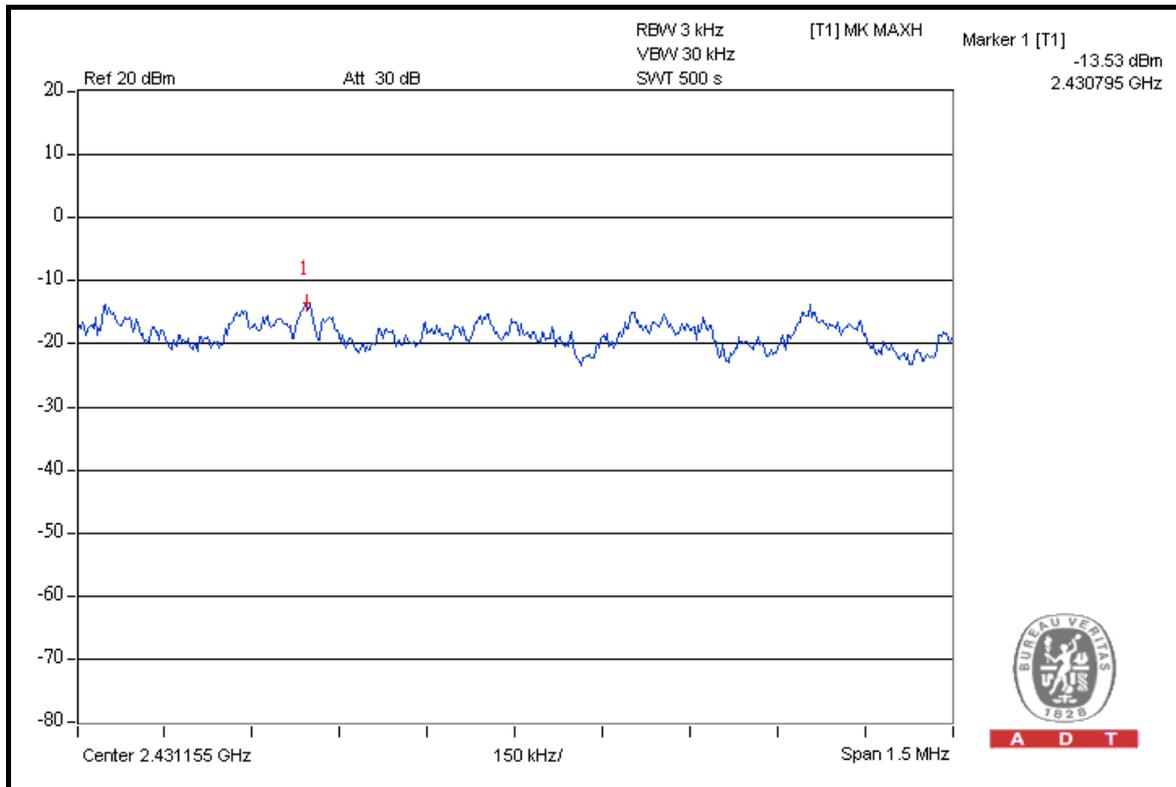

A D T



A D T

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20 dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

Note: Follow DTS measurement, If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.

4.6.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|--|------------------------------|----------------------|---------------------|-------------------------|
| Test Receiver ROHDE & SCHWARZ | ESIB7 | 100212 | May 25, 2009 | May 24, 2010 |
| Spectrum Analyzer ROHDE & SCHWARZ | FSP40 | 100040 | Jul. 07, 2009 | Jul. 06, 2010 |
| BILOG Antenna SCHWARZBECK | VULB9168 | 9168-156 | Apr. 30, 2009 | Apr. 29, 2010 |
| HORN Antenna SCHWARZBECK | BBHA 9120 D | 9120D-563 | Aug. 10, 2009 | Aug. 09, 2010 |
| HORN Antenna SCHWARZBECK | BBHA 9170 | BBHA9170242 | Dec. 25, 2009 | Dec. 24, 2010 |
| Preamplifier Agilent | 8449B | 3008A01910 | Sep. 11, 2009 | Sep. 10, 2010 |
| Preamplifier Agilent | 8447D | 2944A10638 | Dec. 21, 2009 | Dec. 20, 2010 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 218190/4 231241/4 | May 13, 2009 | May 12, 2010 |
| RF signal cable Worken | 8D-FB | Cable-HYCH9-01 | Aug. 17, 2009 | Aug. 16, 2010 |
| Software | ADT_Radiated_ V7.6.15.9.2 | NA | NA | NA |
| Antenna Tower EMCO | 2070/2080 | 512.835.4684 | NA | NA |
| Turn Table EMCO | 2087-2.03 | NA | NA | NA |
| Antenna Tower & Turn Table Controller EMCO | 2090 | NA | NA | NA |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



A D T

4.6.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 100kHz, VBW = 300kHz) are attached on the following pages.

NOTE: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6.



A D T

4.6.6 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b

RESTRICT BAND (2310 ~ 2390 MHz)

| FREQUENCY (MHz) | FUNDAMENTAL EMISSION (dBuV/m) | DELTA (dB) | MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m) | LIMIT (dBuV/m) |
|-----------------|-------------------------------|------------|--|----------------|
| 2412.00 (PK) | 114.0 | 52.30 | 61.70 | 74.00 |
| 2412.00 (AV) | 101.5 | 51.43 | 50.07 | 54.00 |

RESTRICT BAND (2483.5 ~ 2500 MHz)



| FREQUENCY (MHz) | FUNDAMENTAL EMISSION (dBuV/m) | DELTA (dB) | MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m) | LIMIT (dBuV/m) |
|-----------------|-------------------------------|------------|--|----------------|
| 2462.00 (PK) | 114.2 | 52.15 | 62.05 | 74.00 |
| 2462.00 (AV) | 101.8 | 51.16 | 50.64 | 54.00 |

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.





A D T

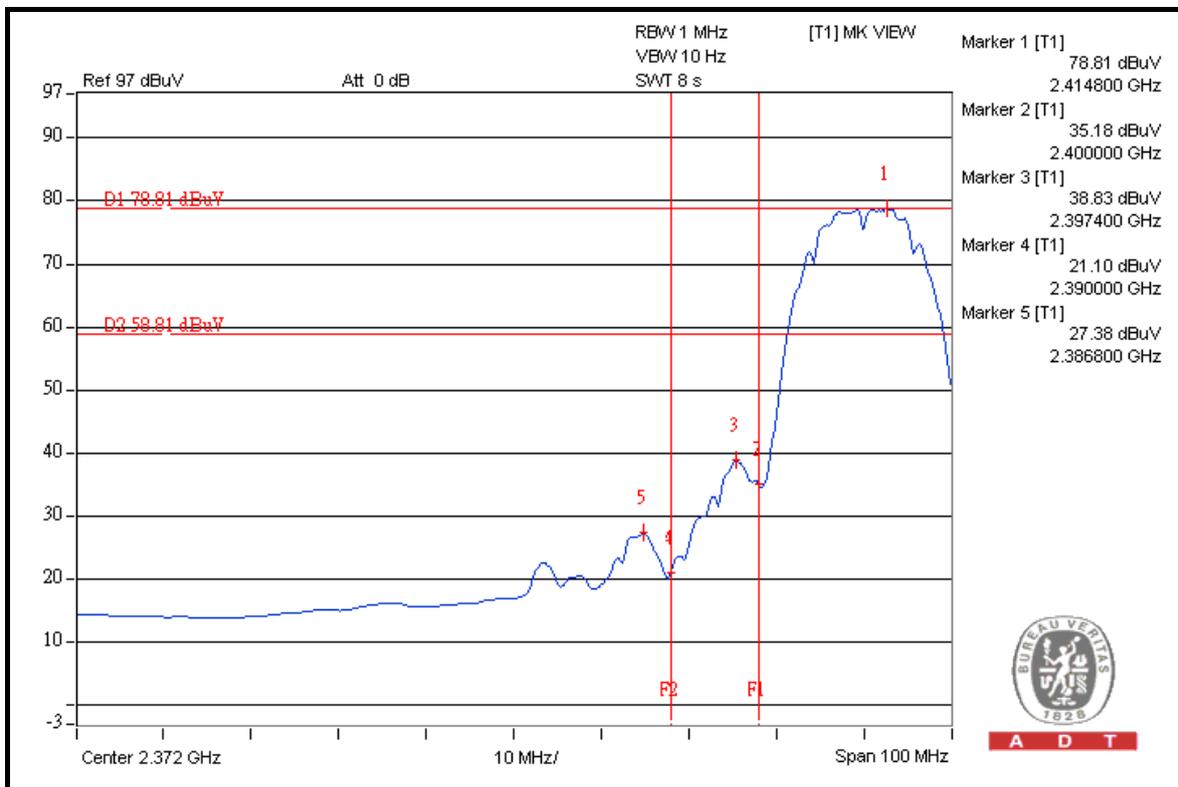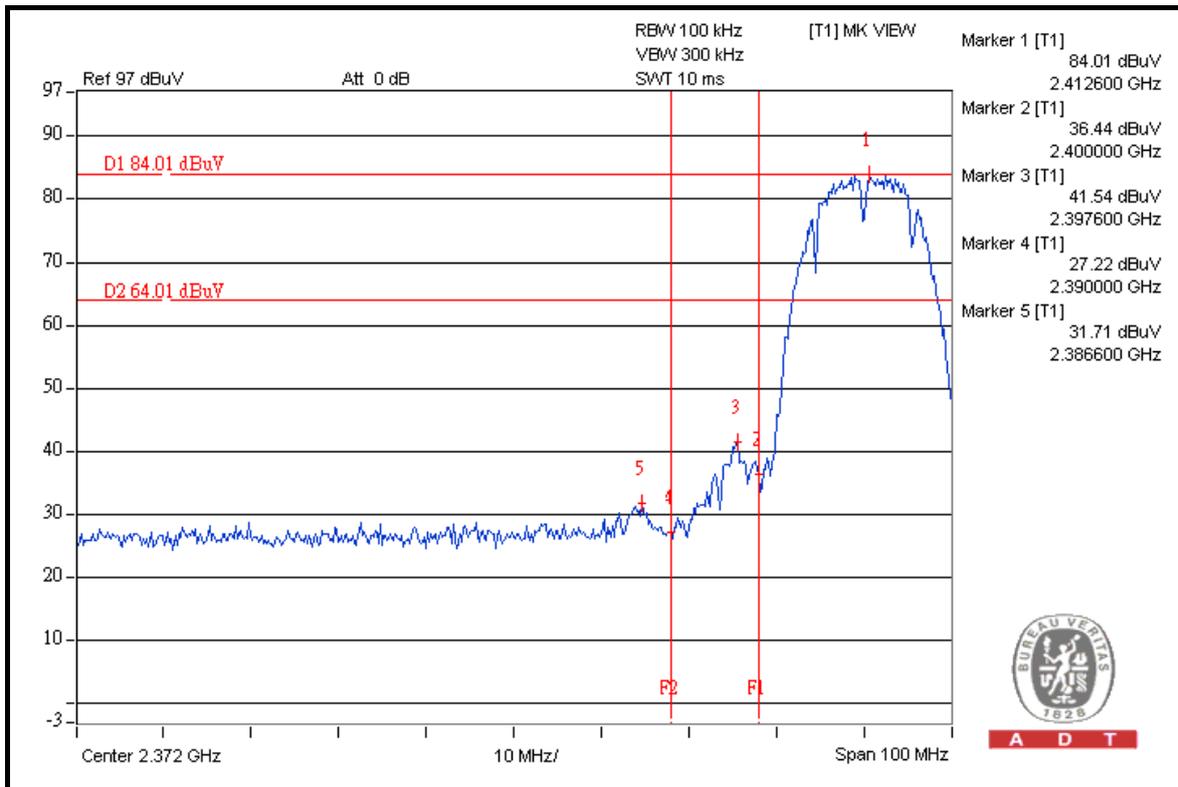




A D T

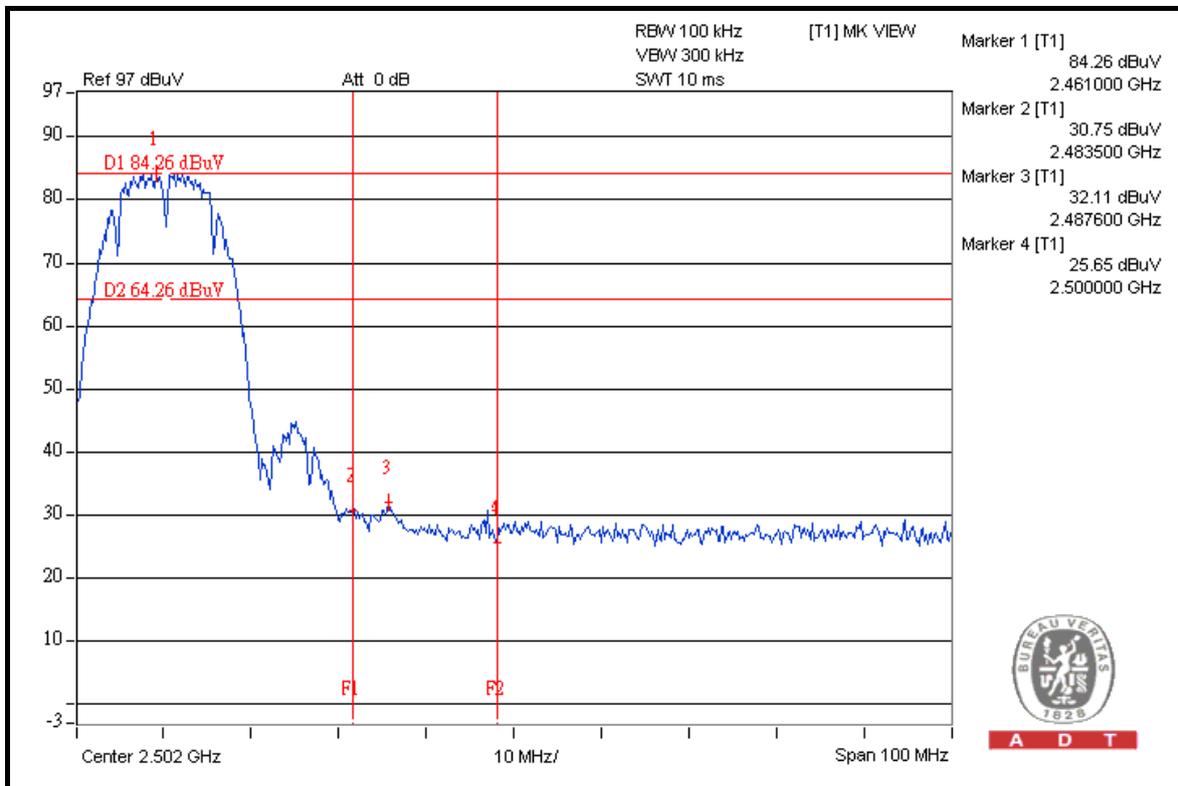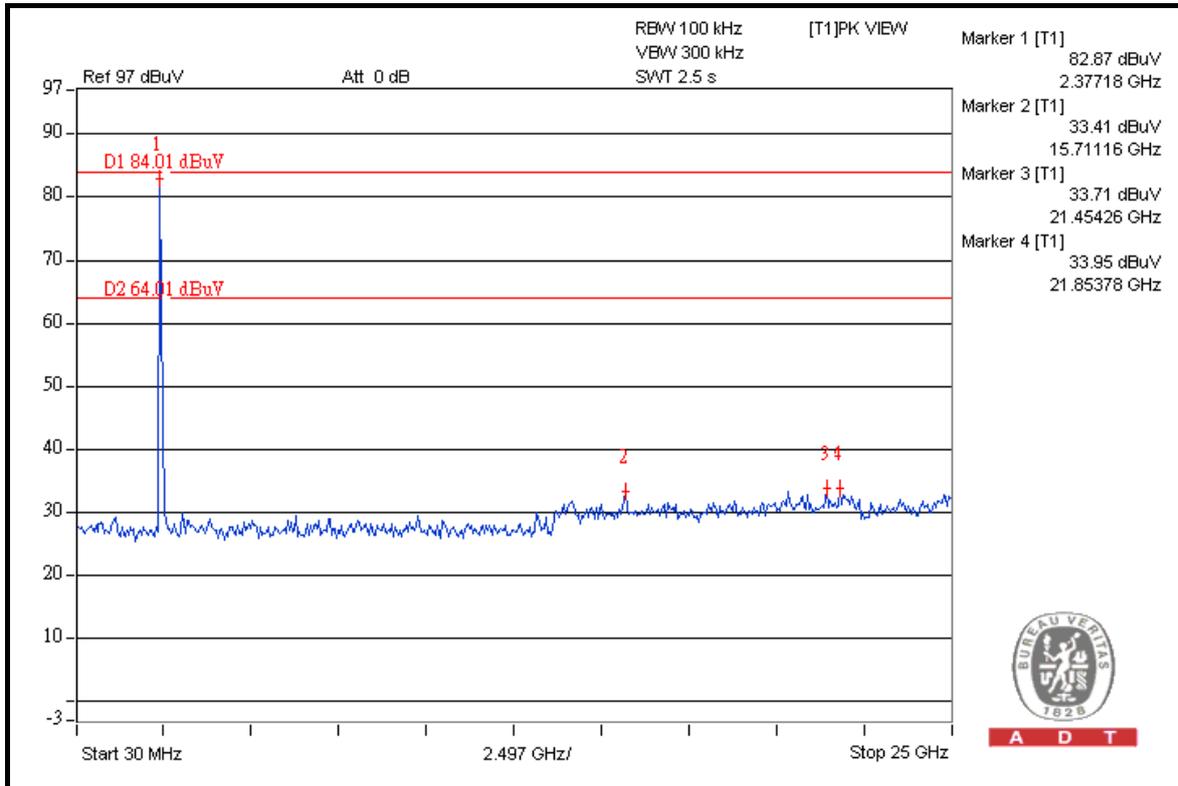




A D T

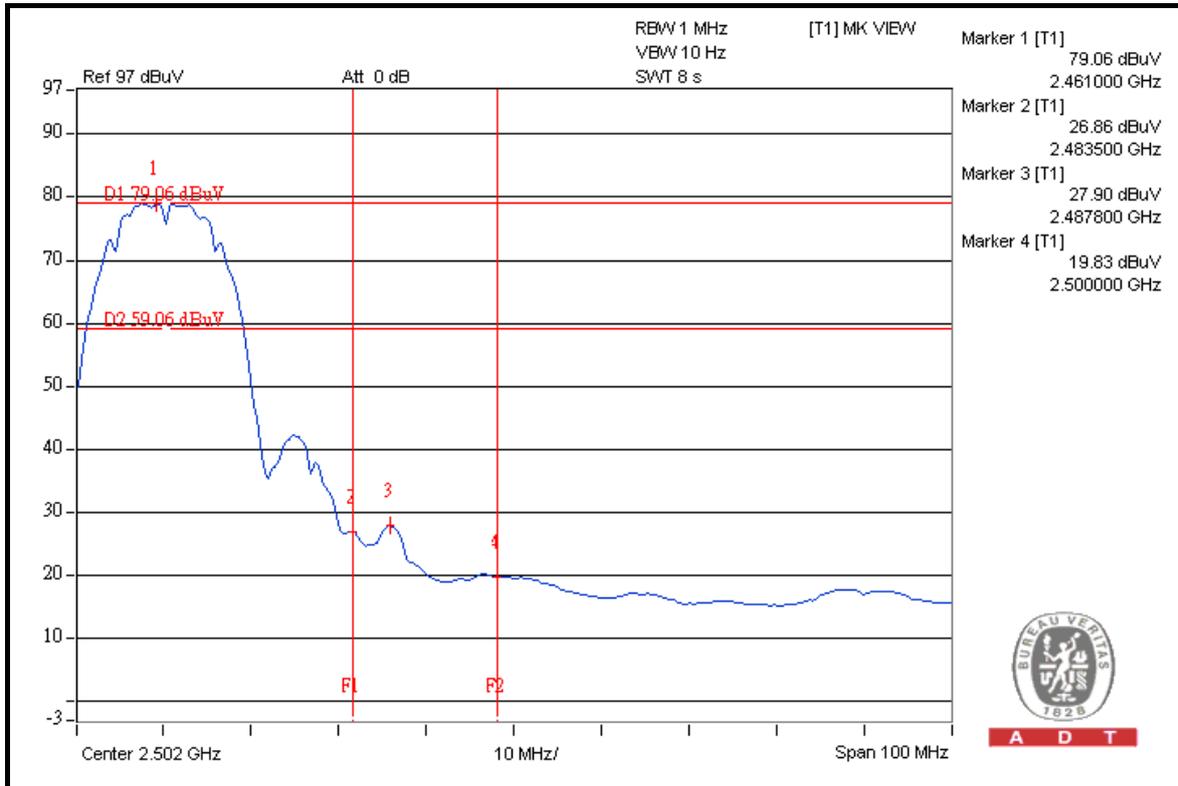

A D T

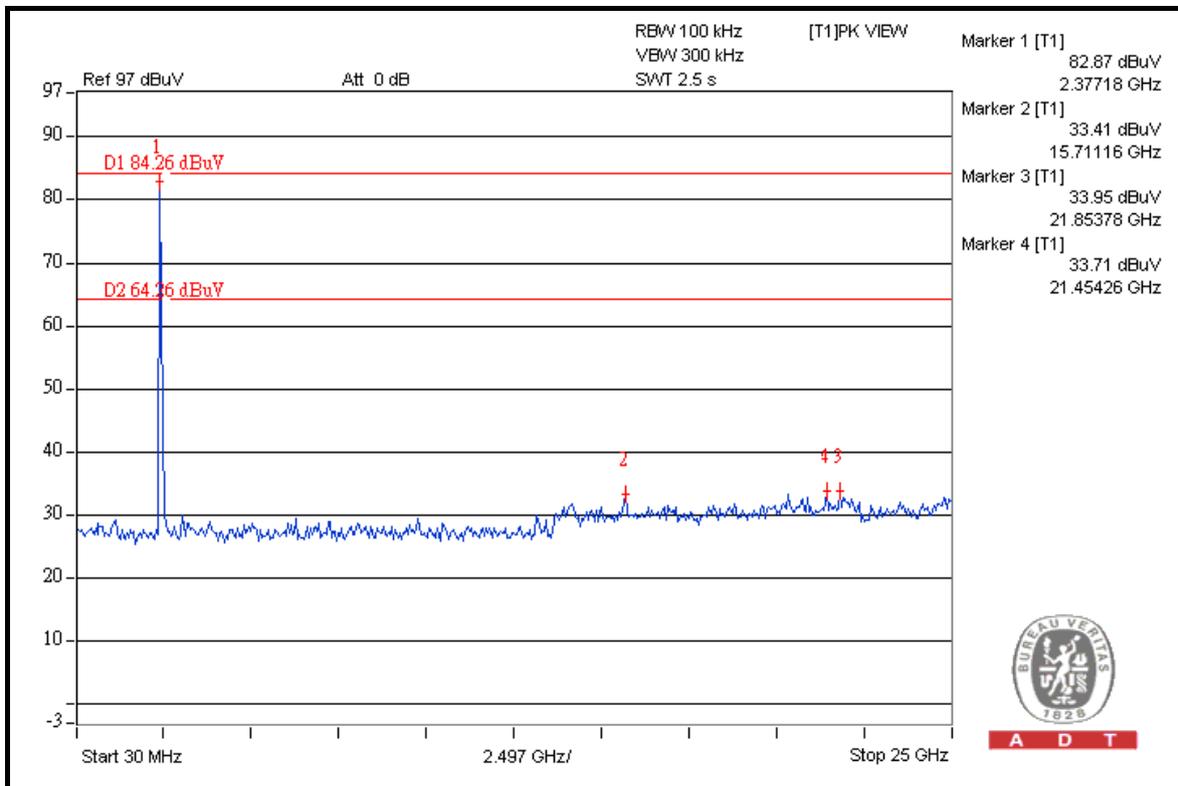

A D T



A D T

802.11g

RESTRICT BAND (2310 ~ 2390 MHz)

| FREQUENCY (MHz) | FUNDAMENTAL EMISSION (dBuV/m) | DELTA (dB) | MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m) | LIMIT (dBuV/m) |
|-----------------|-------------------------------|------------|--|----------------|
| 2412.00 (PK) | 115.7 | 43.70 | 72.00 | 74.00 |
| 2412.00 (AV) | 93.8 | 44.41 | 49.39 | 54.00 |

RESTRICT BAND (2483.5 ~ 2500 MHz)



| FREQUENCY (MHz) | FUNDAMENTAL EMISSION (dBuV/m) | DELTA (dB) | MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m) | LIMIT (dBuV/m) |
|-----------------|-------------------------------|------------|--|----------------|
| 2462.00 (PK) | 116.2 | 46.33 | 69.87 | 74.00 |
| 2462.00 (AV) | 93.9 | 45.97 | 47.93 | 54.00 |

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.





A D T

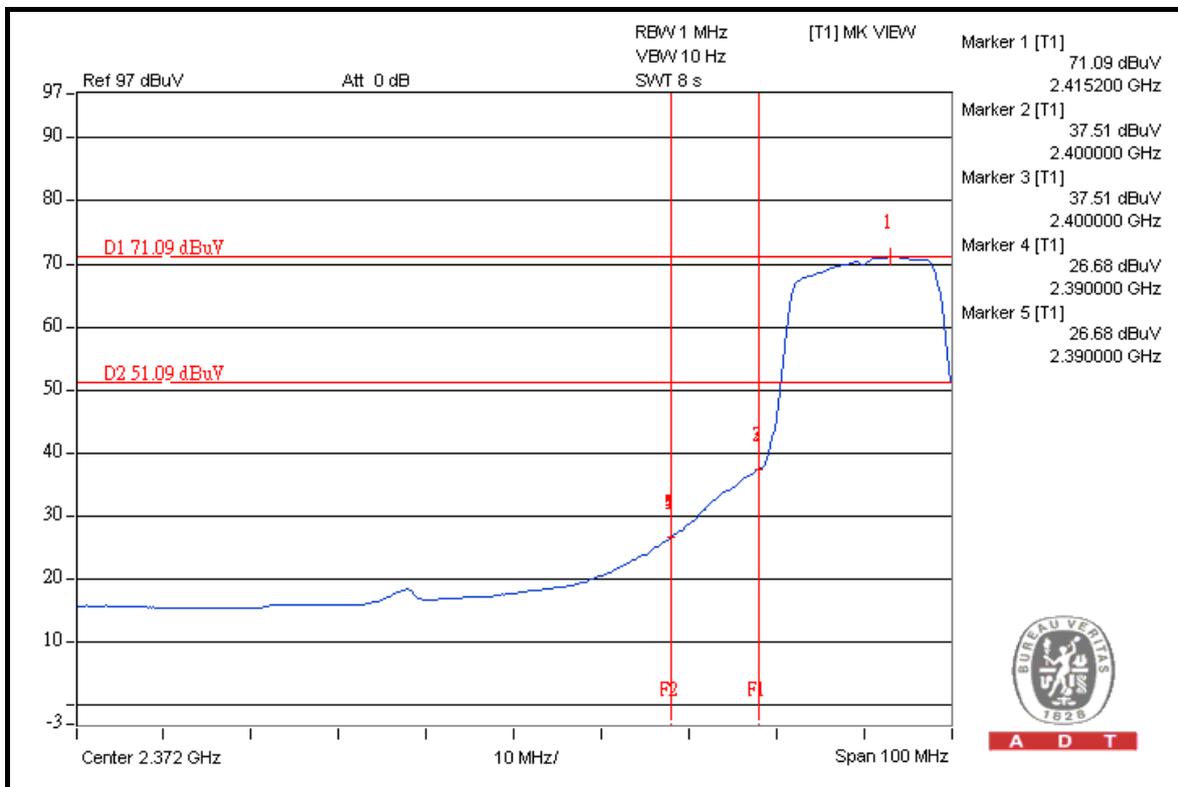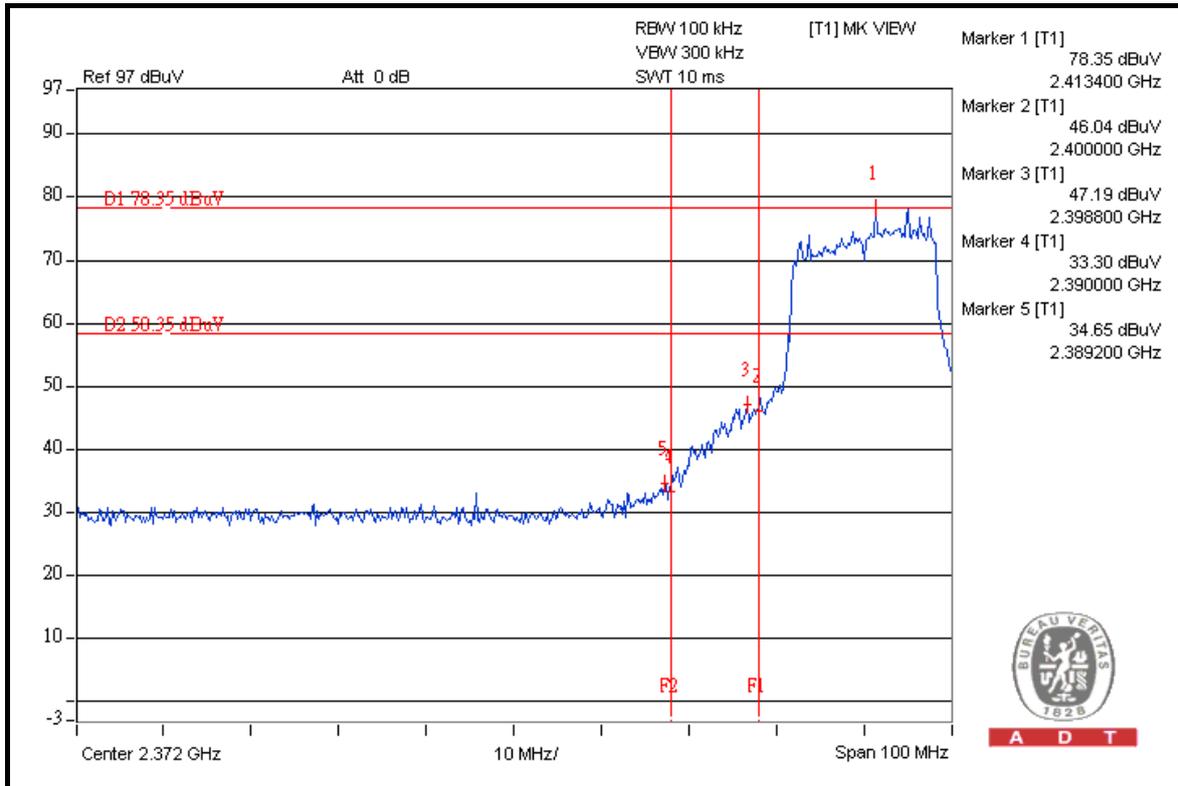





A D T

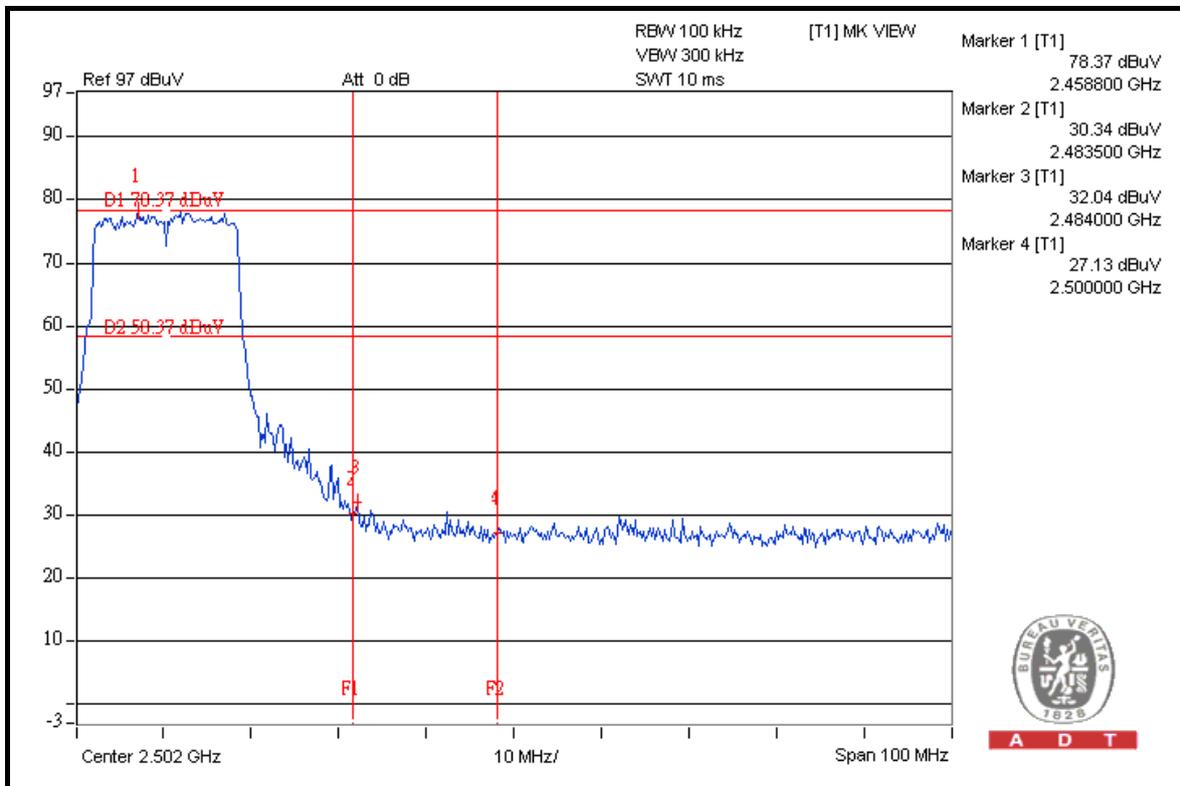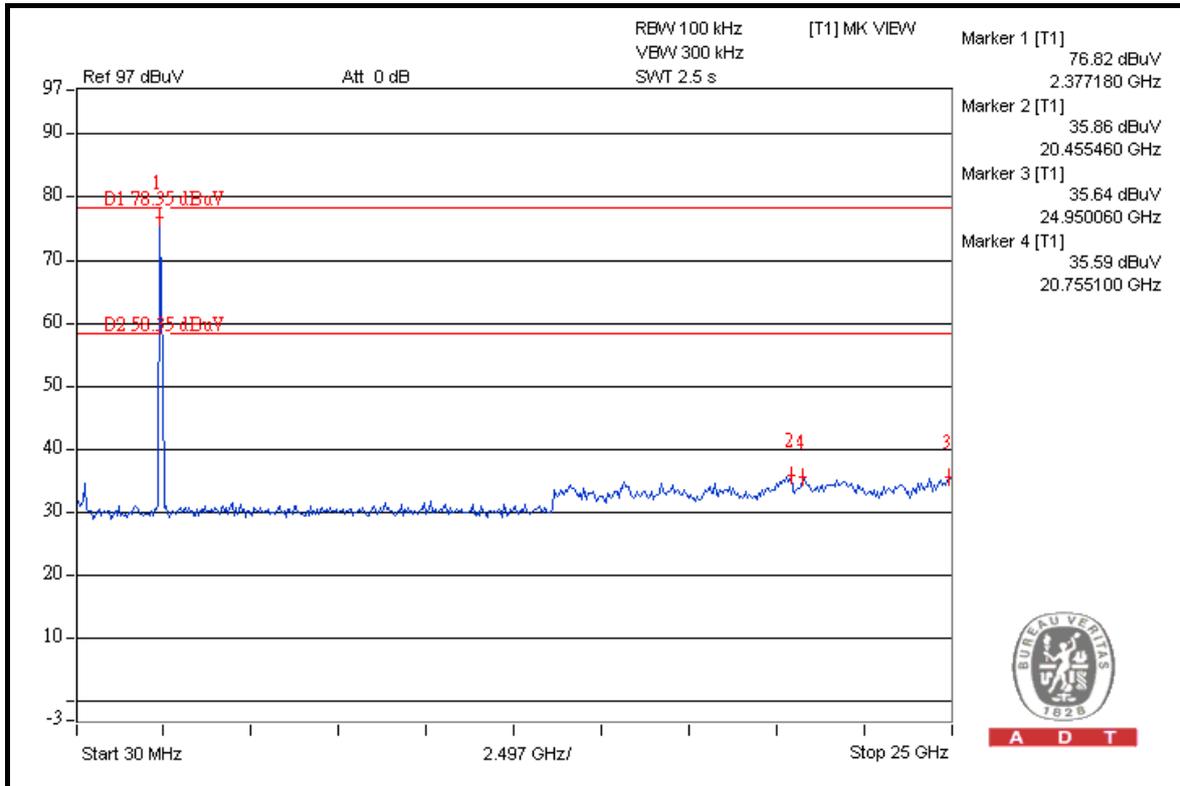



A D T

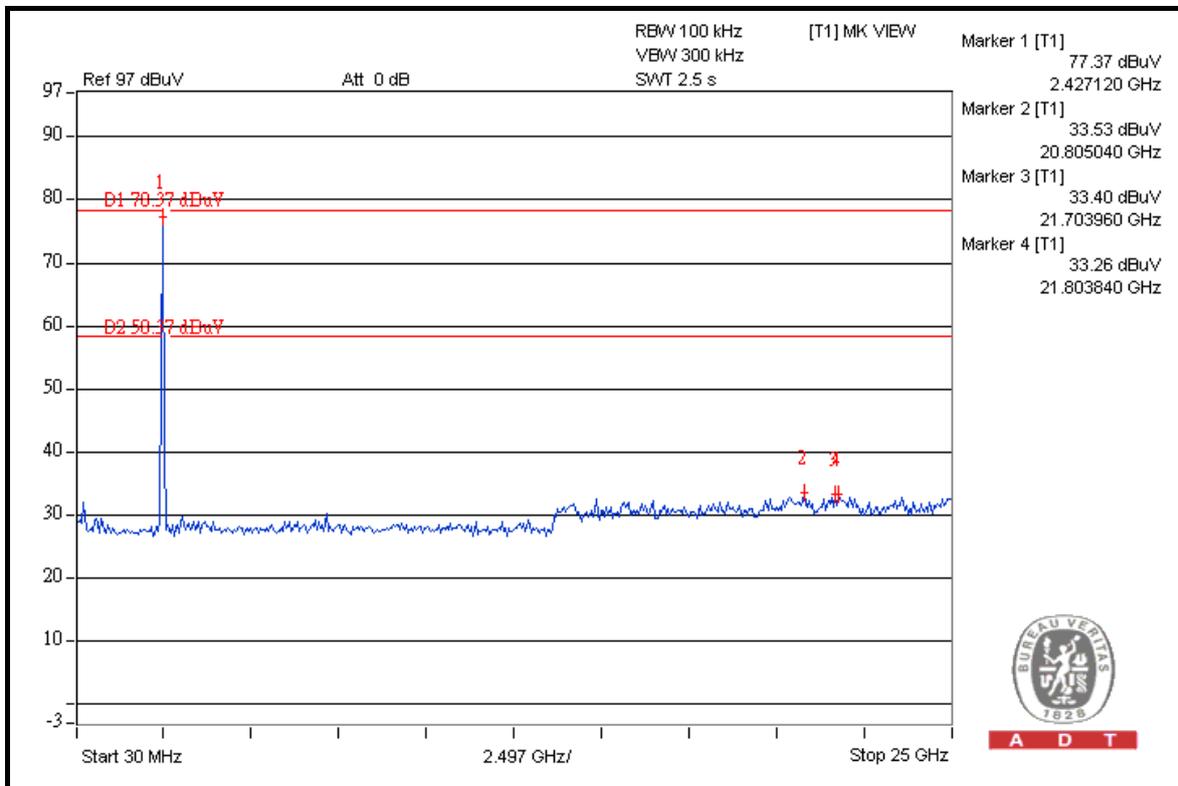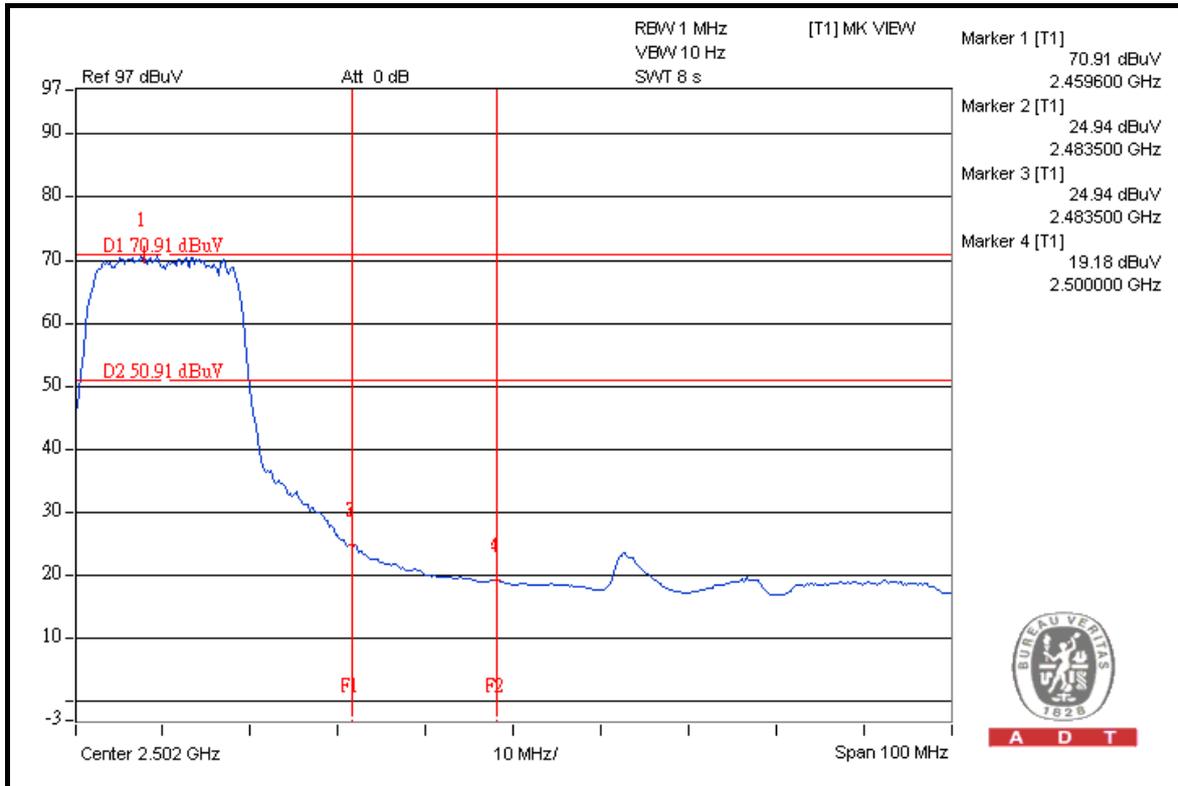



A D T

802.11n (20MHz)

RESTRICT BAND (2310 ~ 2390 MHz)

| FREQUENCY (MHz) | FUNDAMENTAL EMISSION (dBuV/m) | DELTA (dB) | MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m) | LIMIT (dBuV/m) |
|-----------------|-------------------------------|------------|--|----------------|
| 2412.00 (PK) | 114.2 | 45.05 | 69.16 | 74.00 |
| 2412.00 (AV) | 95.5 | 44.94 | 50.56 | 54.00 |

RESTRICT BAND (2483.5 ~ 2500 MHz)


| FREQUENCY (MHz) | FUNDAMENTAL EMISSION (dBuV/m) | DELTA (dB) | MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m) | LIMIT (dBuV/m) |
|-----------------|-------------------------------|------------|--|----------------|
| 2462.00 (PK) | 114.9 | 42.66 | 72.24 | 74.00 |
| 2462.00 (AV) | 96.2 | 44.16 | 52.04 | 54.00 |

NOTE:


1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.



A D T

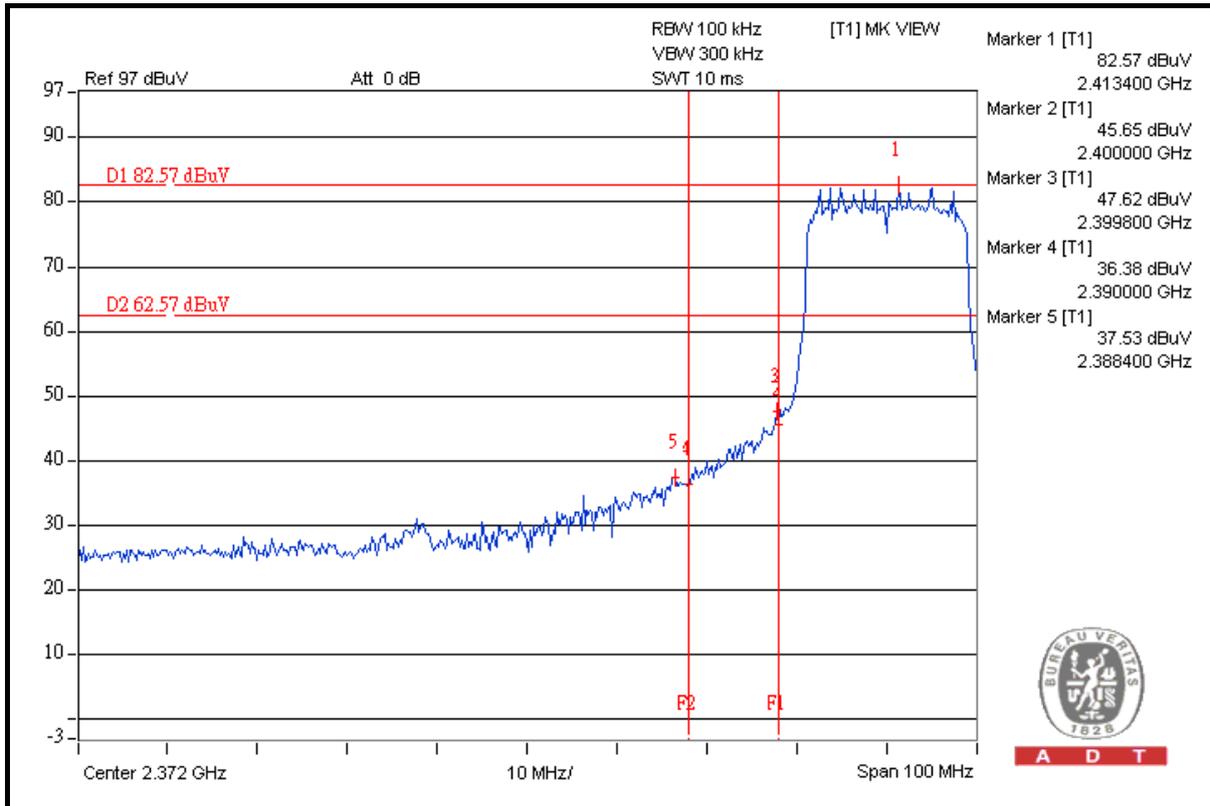


A D T

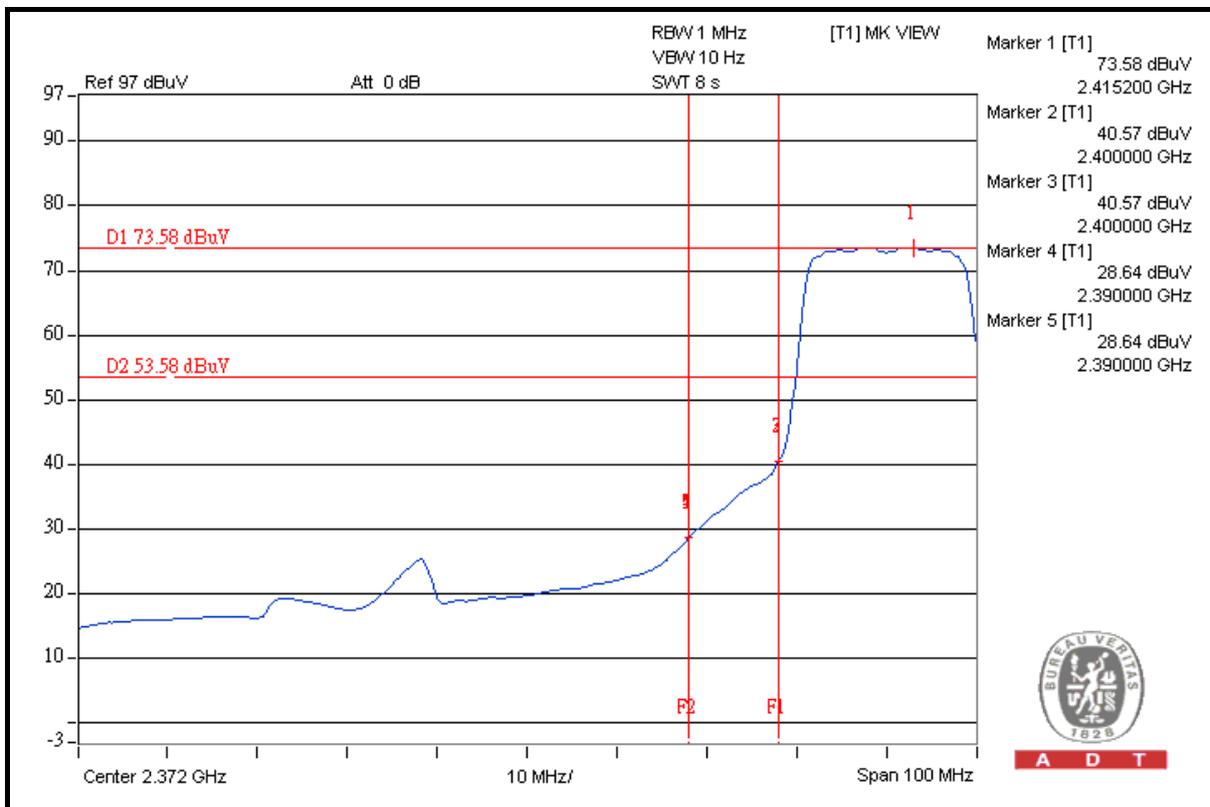


A D T



A D T

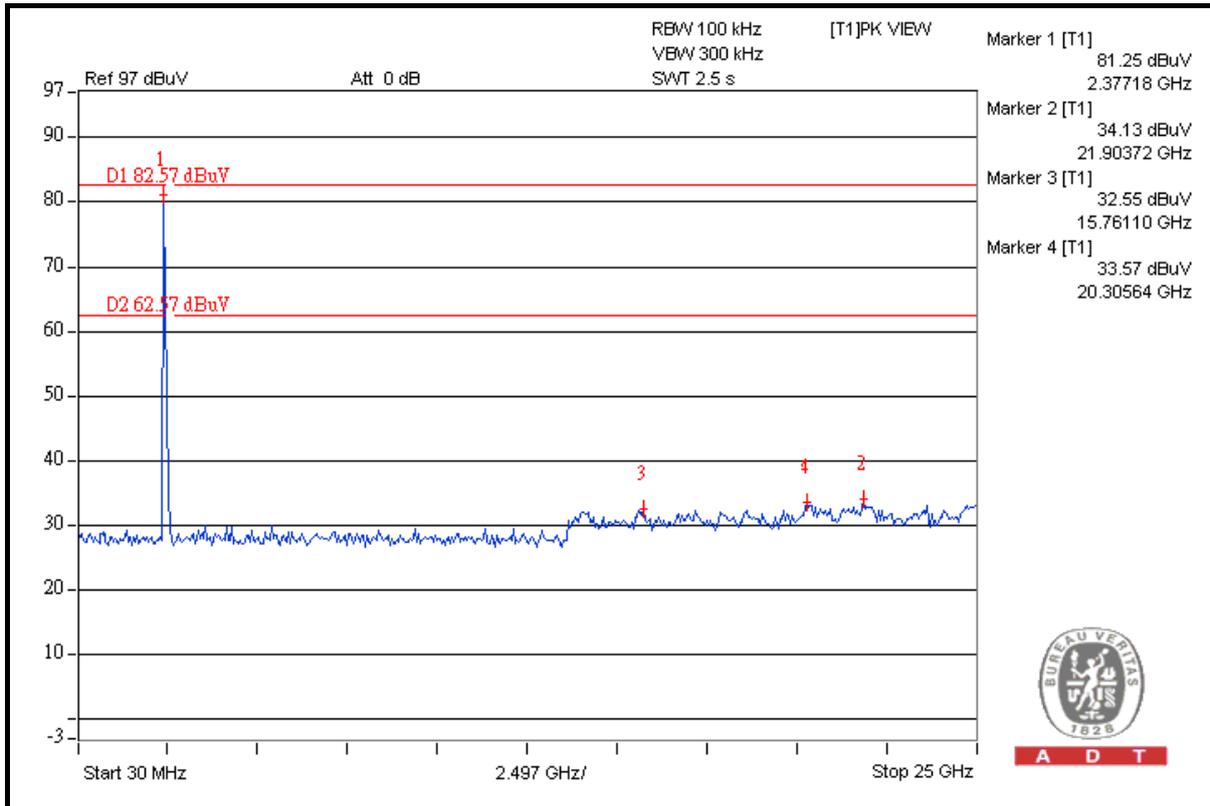



A D T

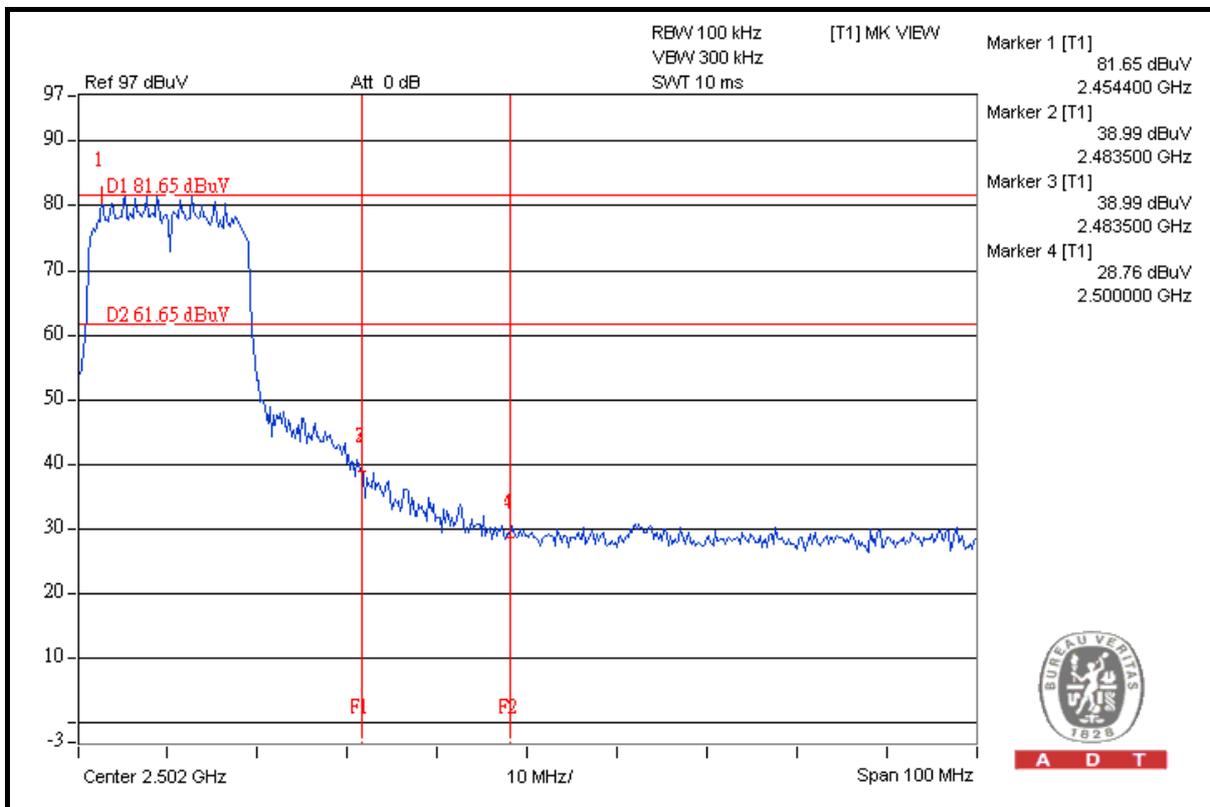

A D T



A D T

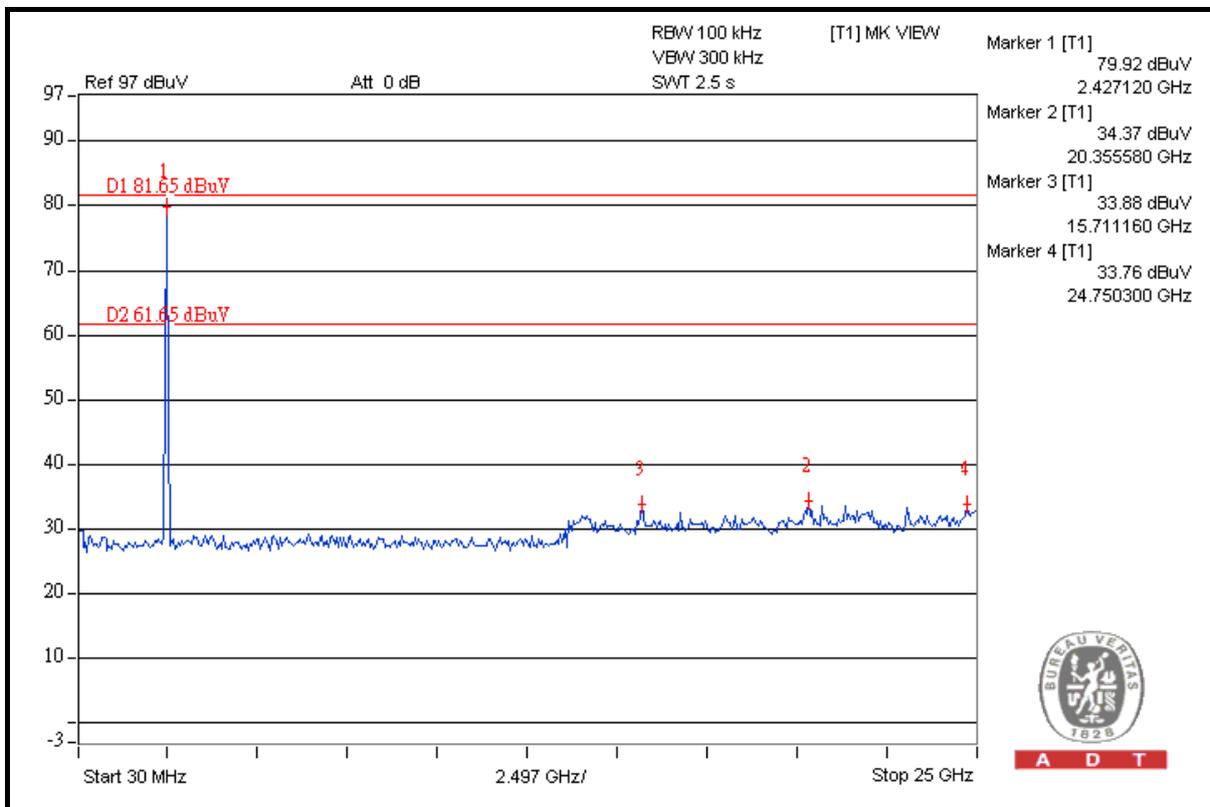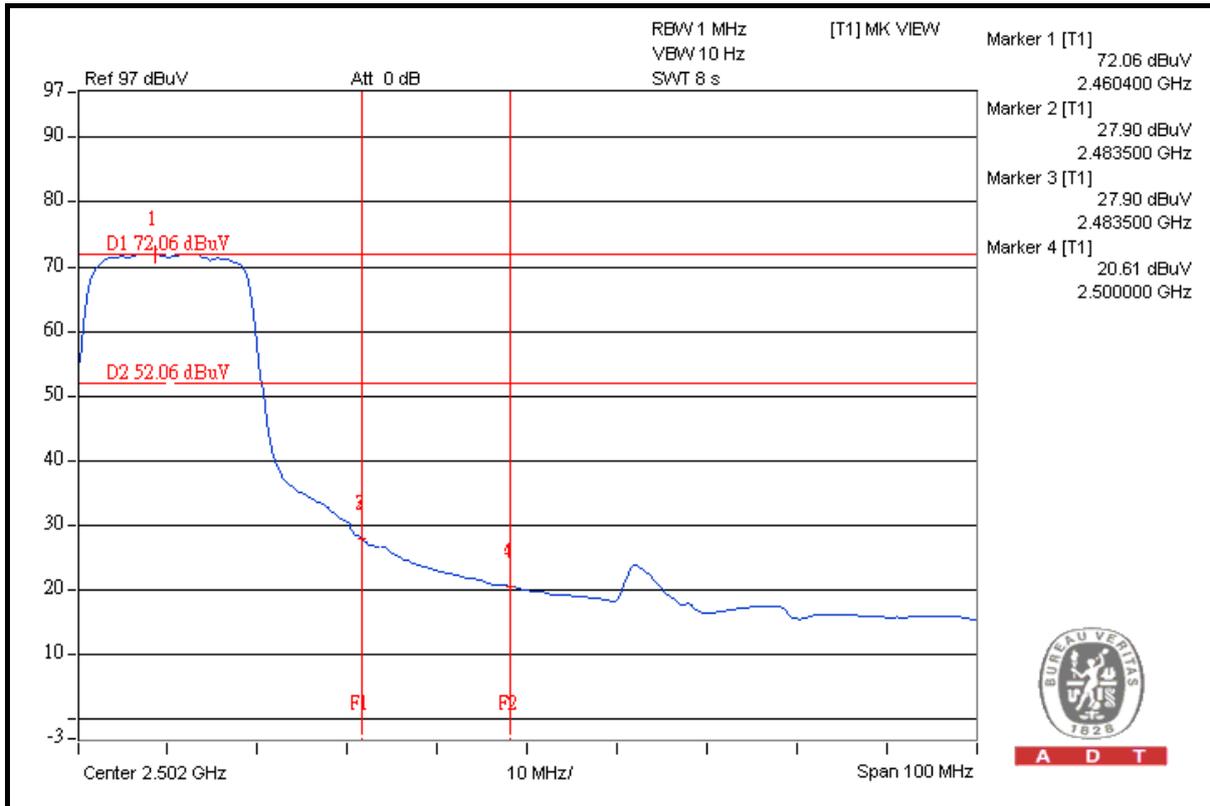



A D T

802.11n (40MHz)

RESTRICT BAND (2310 ~ 2390 MHz)

| FREQUENCY (MHz) | FUNDAMENTAL EMISSION (dBuV/m) | DELTA (dB) | MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m) | LIMIT (dBuV/m) |
|-----------------|-------------------------------|------------|--|----------------|
| 2422.00 (PK) | 108.1 | 38.16 | 69.94 | 74.00 |
| 2422.00 (AV) | 90.2 | 39.20 | 51.00 | 54.00 |

RESTRICT BAND (2483.5 ~ 2500 MHz)


| FREQUENCY (MHz) | FUNDAMENTAL EMISSION (dBuV/m) | DELTA (dB) | MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m) | LIMIT (dBuV/m) |
|-----------------|-------------------------------|------------|--|----------------|
| 2452.00 (PK) | 108.0 | 35.29 | 72.71 | 74.00 |
| 2452.00 (AV) | 89.9 | 37.30 | 52.60 | 54.00 |

NOTE:


1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.



A D T

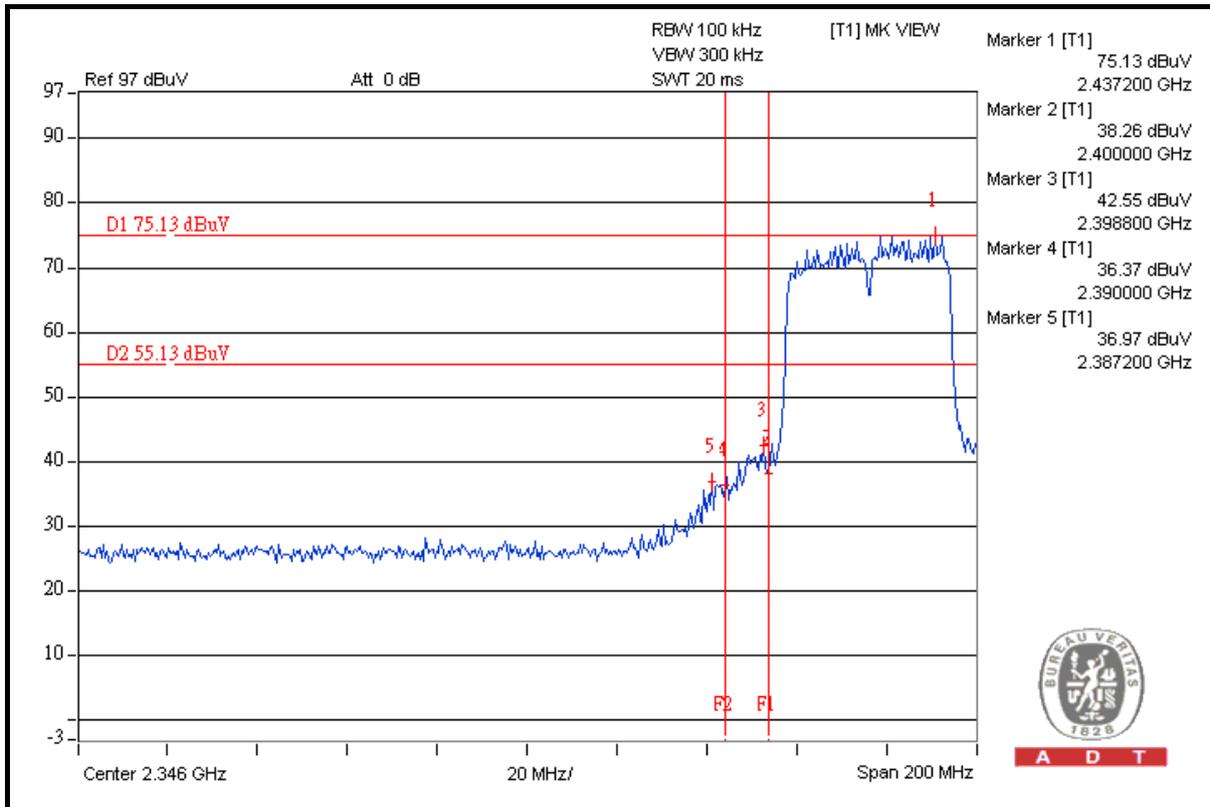



A D T

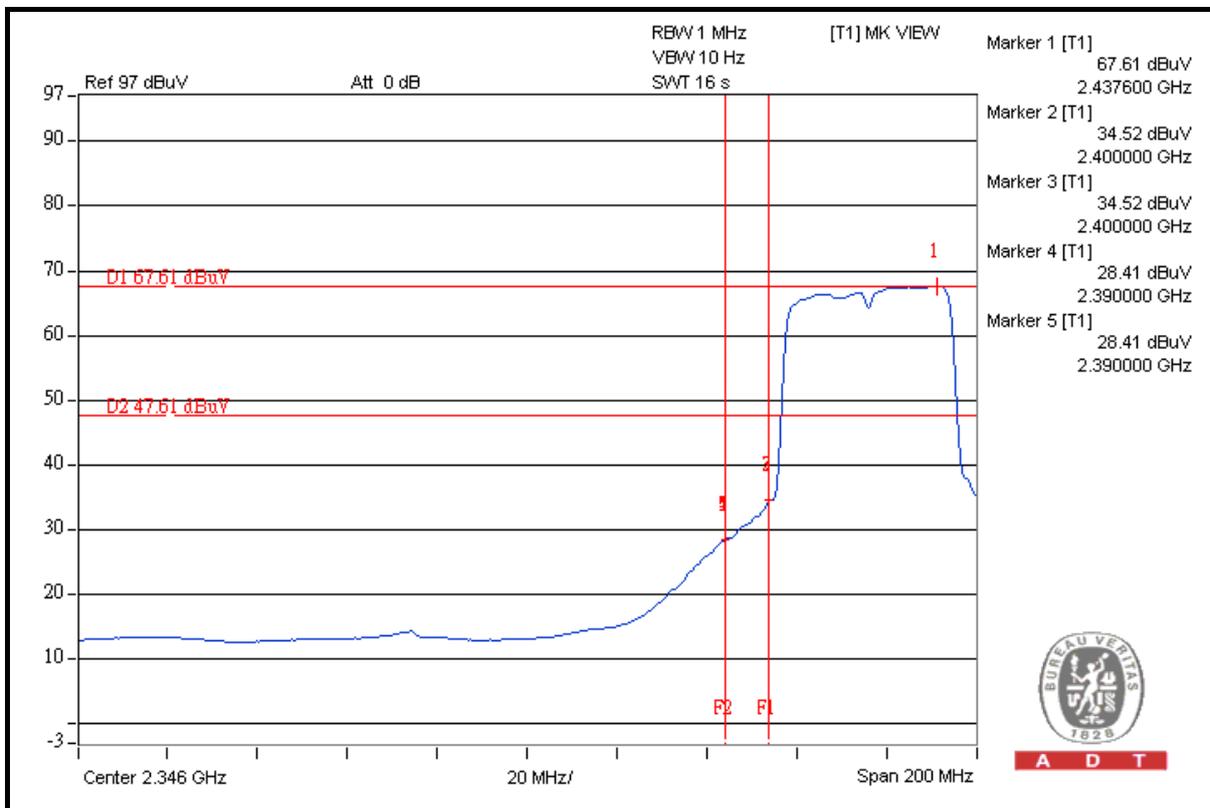

A D T





A D T

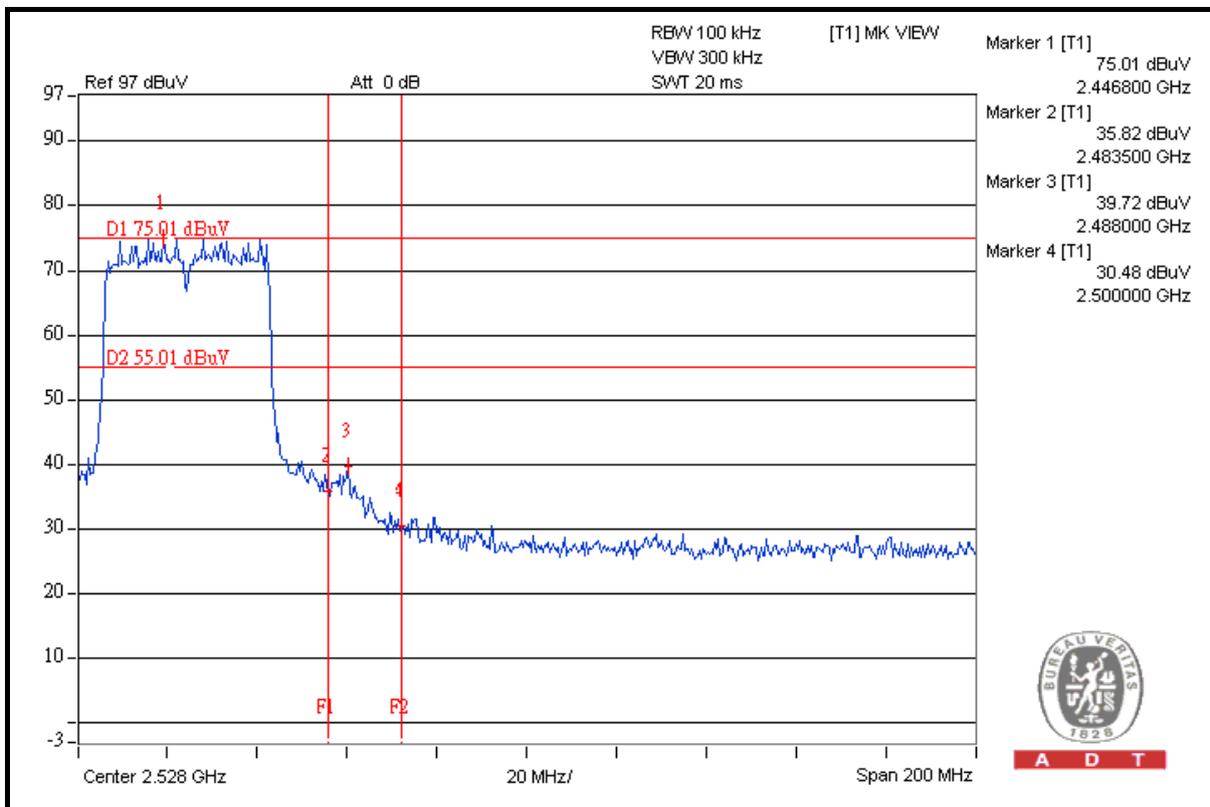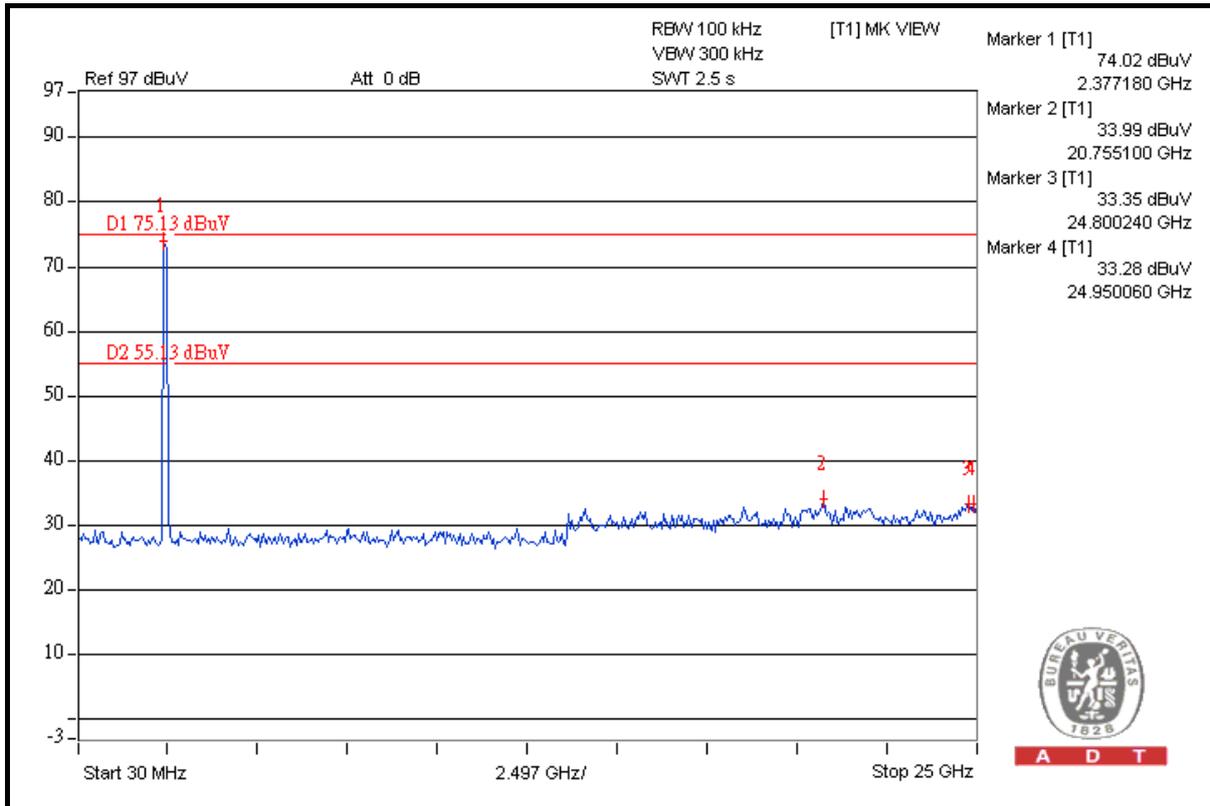



A D T

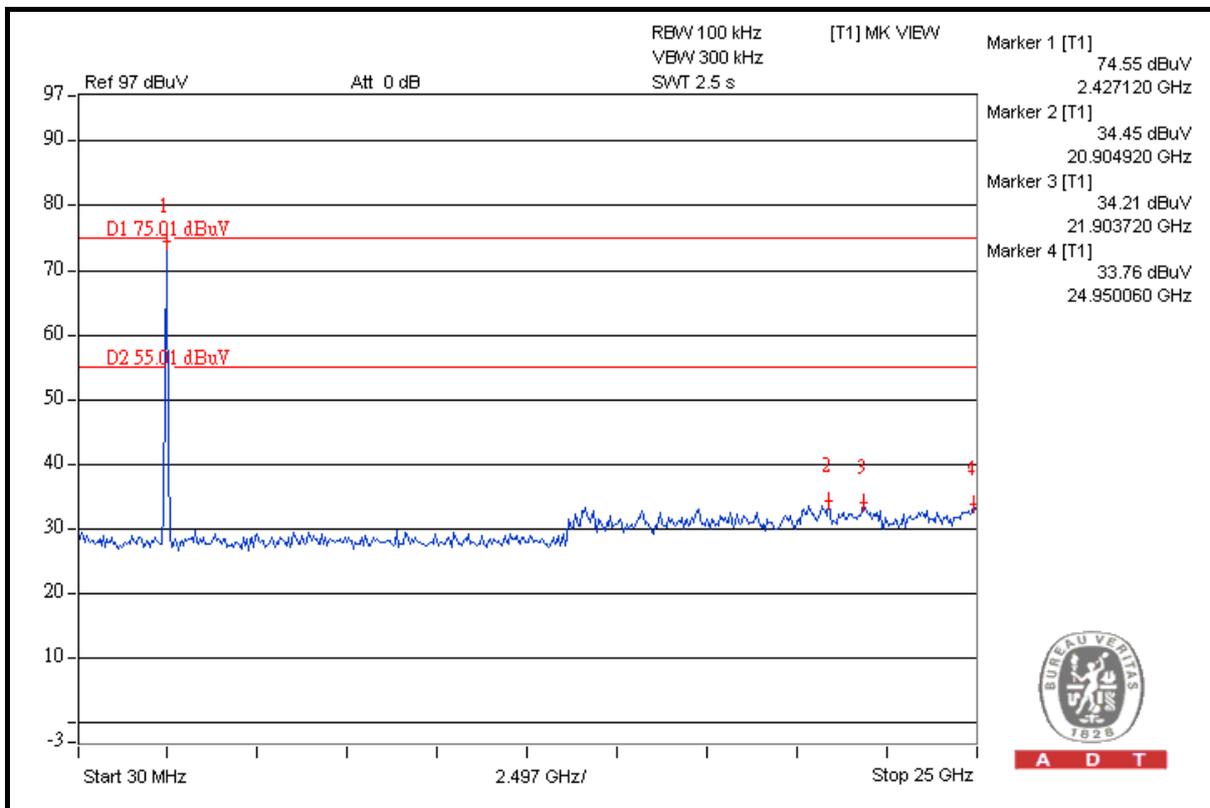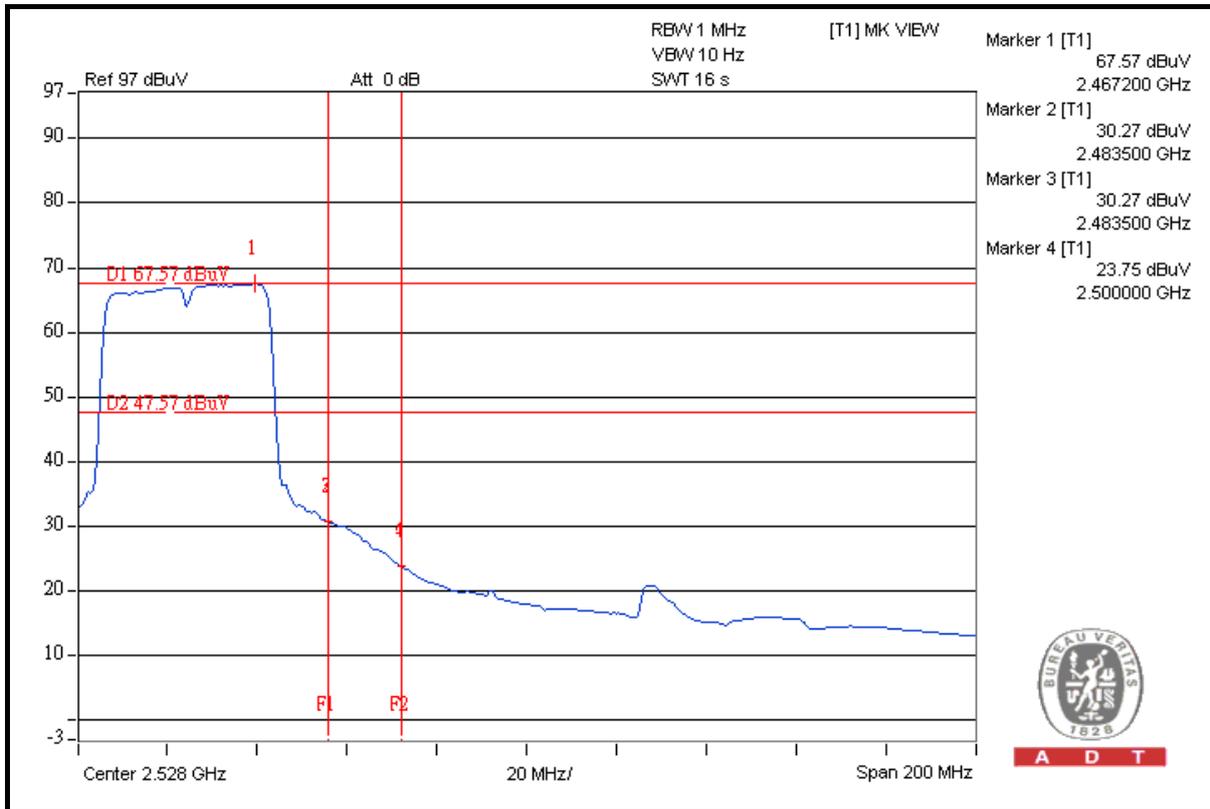



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---