


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	63%
Test Engineer	Johnson	Configurations	2.4G + 5G TX

Horizontal

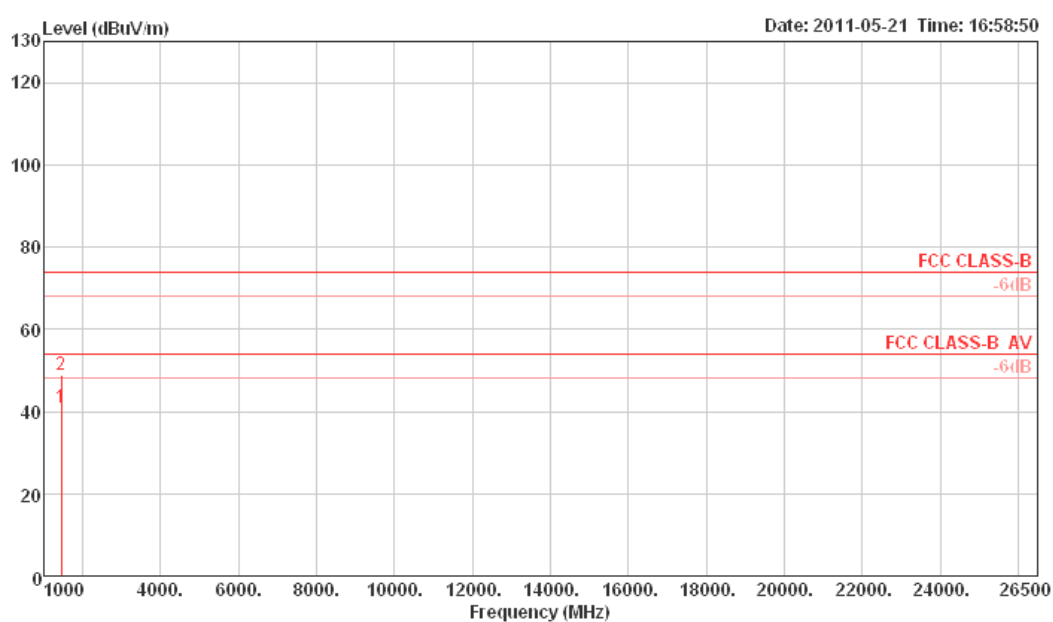

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp			
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		
1	1439.96	41.03	54.00	-12.97	48.16	2.32	25.39	34.84	Average	HORIZONTAL
2	1439.96	48.94	74.00	-25.06	56.07	2.32	25.39	34.84	Peak	HORIZONTAL

Vertical

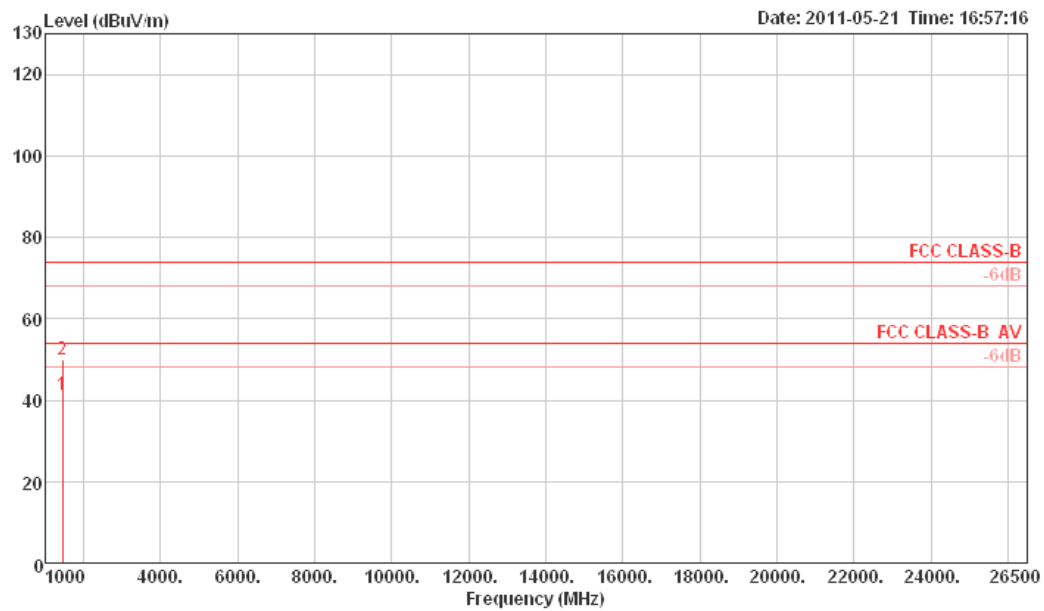

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp			
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		
1	1439.96	41.41	54.00	-12.59	48.54	2.32	25.39	34.84	Average	VERTICAL
2	1440.20	49.82	74.00	-24.18	56.95	2.32	25.39	34.84	Peak	VERTICAL