


## Appendix C. Co-location Report

### 1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	60%
Test Engineer	Rion Li	Configurations	WLAN + GSM850 CH128 / Mode 1

Horizontal

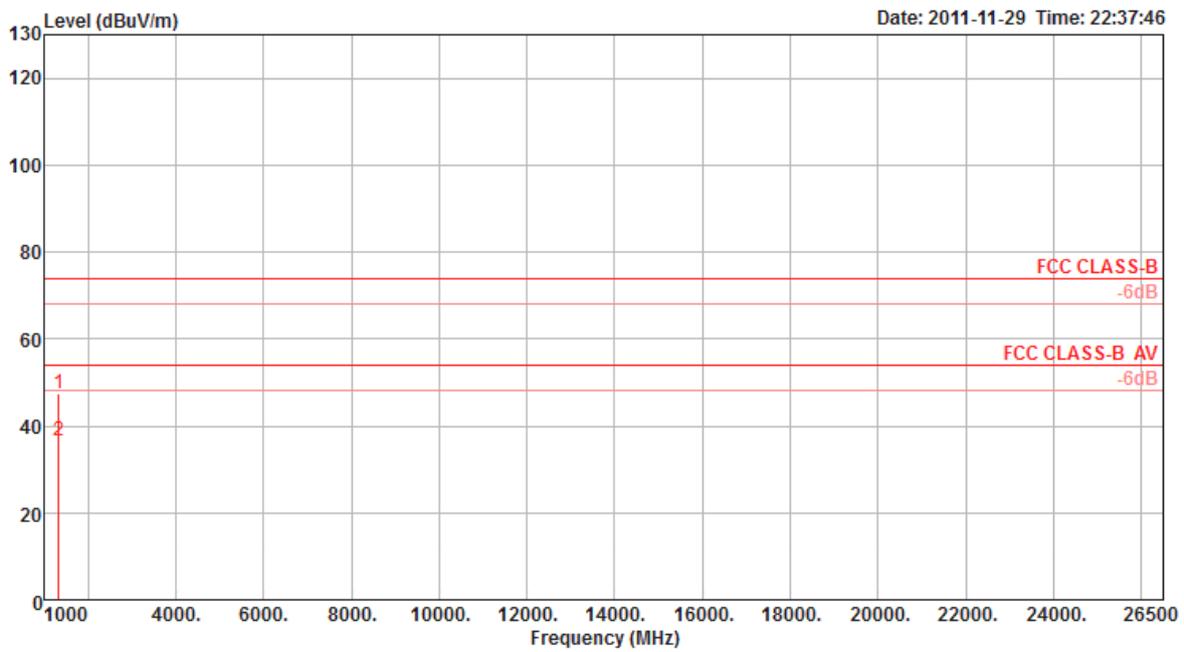

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	1330.95	47.31	74.00	-26.69	55.85	2.09	36.44	25.81	286	157	Peak	HORIZONTAL
2 a	1331.23	36.61	54.00	-17.39	45.15	2.09	36.44	25.81	286	157	Average	HORIZONTAL

Vertical

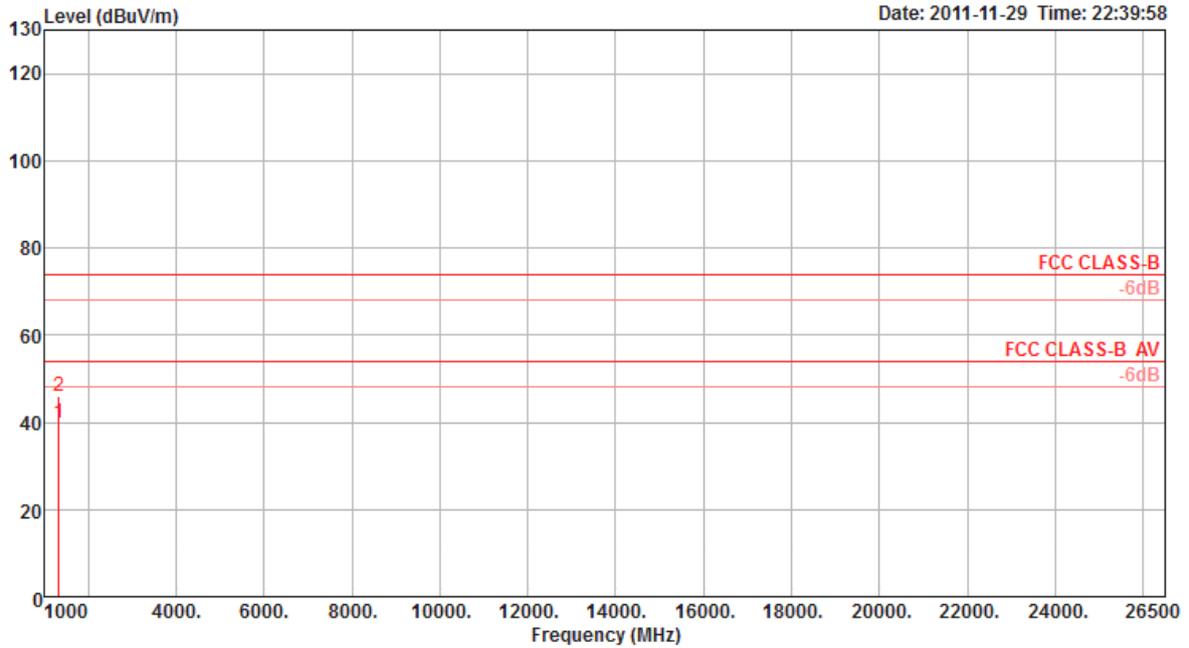

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	1333.23	39.78	54.00	-14.22	48.23	2.11	36.44	25.88	261	153	Average	VERTICAL
2 p	1333.51	45.85	74.00	-28.15	54.30	2.11	36.44	25.88	261	153	Peak	VERTICAL