




Appendix C. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	54%
Test Engineer	Jim Huang	Configurations	2.4G + 5G

Horizontal

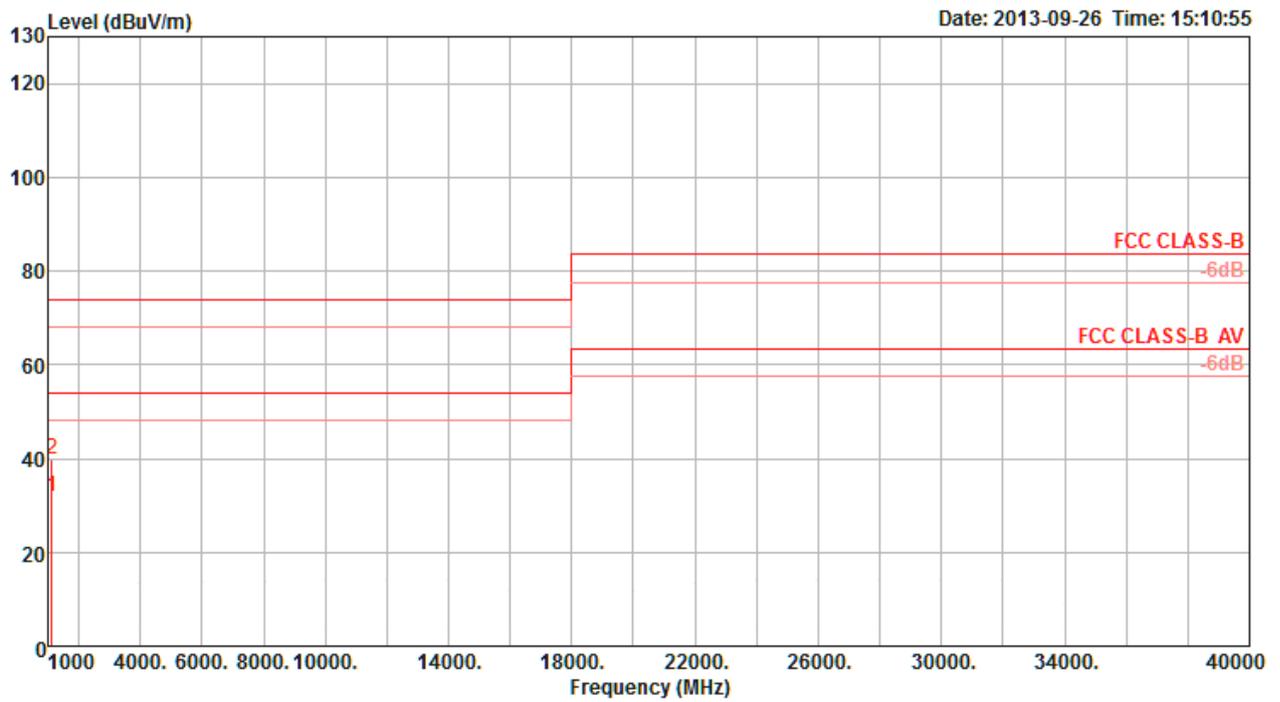

	Freq	Level	Limit	Over	Read	Cable	Preamp		Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		deg	cm	
1	1124.12	32.01	54.00	-21.99	41.69	1.93	35.72	-9.68	Average	134	112	HORIZONTAL
2	1125.21	39.90	74.00	-34.10	49.58	1.93	35.72	-9.68	Peak	134	112	HORIZONTAL

Vertical

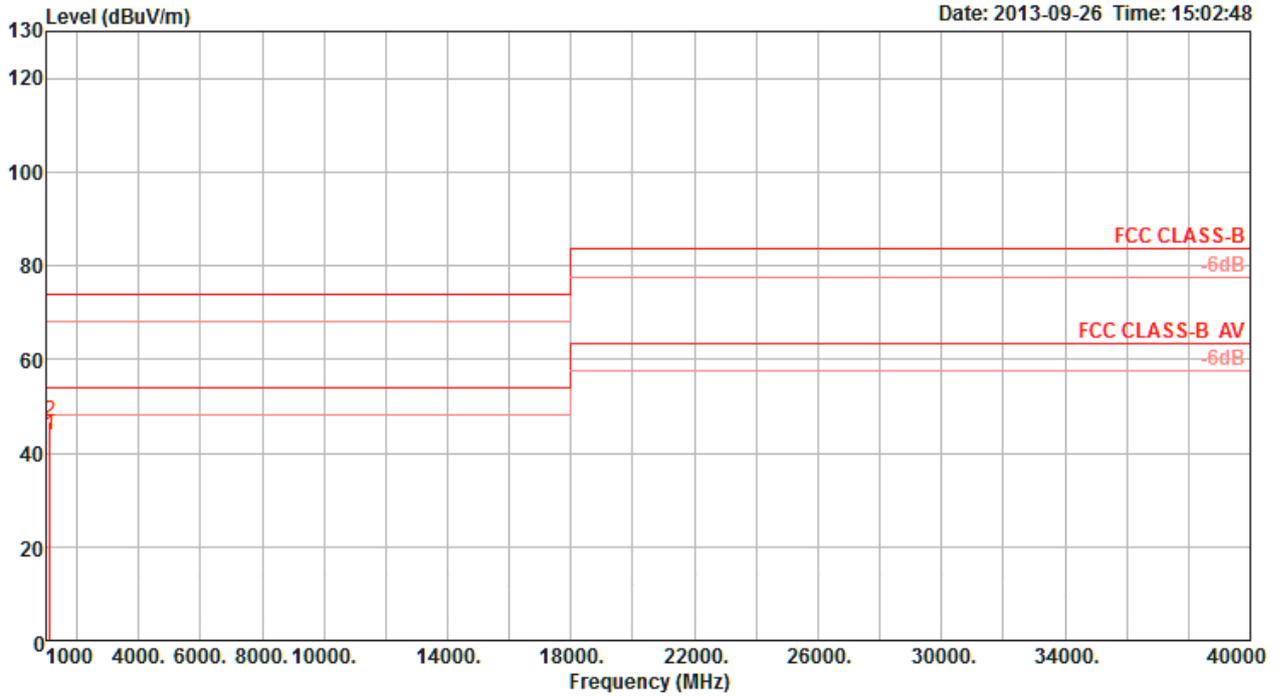

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	Pol/Phase
1	1124.65	43.65	54.00	-10.35	53.33	1.93	35.72	-9.68	Average	234	100	VERTICAL
2	1125.67	46.65	74.00	-27.35	56.33	1.93	35.72	-9.68	Peak	234	100	VERTICAL