



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	NETGEAR, Inc.
Applicant Address	350 East Plumeria Drive, San Jose, California 95134, USA
FCC ID	PY313200230

Product Name	WiFi Range Extender
Brand Name	NETGEAR
Model No.	EX6200
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Oct. 25, 2013
Final Test Date	Nov. 19, 2013
Submission Type	Original Equipment

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac (5150 ~ 5250MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart E, KDB 789033 D01 v01r03, KDB 662911 D01 v02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Product Information	7
3.6. Table for Test Modes	8
3.7. Table for Testing Locations.....	10
3.8. Table for Supporting Units	11
3.9. Table for Parameters of Test Software Setting	12
3.10. EUT Operation during Test	13
3.11. Duty Cycle	14
3.12. Test Configurations	18
4. TEST RESULT	22
4.1. AC Power Line Conducted Emissions Measurement.....	22
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	26
4.3. Maximum Conducted Output Power Measurement.....	36
4.4. Power Spectral Density Measurement	39
4.5. Peak Excursion Measurement	47
4.6. Radiated Emissions Measurement	54
4.7. Band Edge Emissions Measurement	75
4.8. Frequency Stability Measurement	83
4.9. Antenna Requirements	85
5. LIST OF MEASURING EQUIPMENTS	86
6. TEST LOCATION.....	88
7. MEASUREMENT UNCERTAINTY.....	89
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. CO-LOCATION REPORT.....	C1 ~ C3


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR3N0906AB	Rev. 01	Initial issue of report	Nov. 26, 2013

1. CERTIFICATE OF COMPLIANCE

Product Name : WiFi Range Extender
Brand Name : NETGEAR
Model No. : EX6200
Applicant : NETGEAR, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 25, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

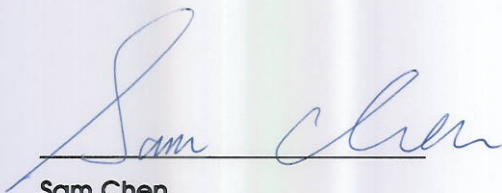

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	6.10 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.03 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.21 dB
4.5	15.407(a)	Peak Excursion	Complies	2.81 dB
4.6	15.407(b)	Radiated Emissions	Complies	3.06 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.04 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	For non-beamforming mode: 802.11n MCS0 (20MHz): 18.08 MHz ; 802.11n MCS0 (40MHz): 36.16 MHz For beamforming mode: 802.11ac MCS2/Nss1 (20MHz): 17.92 MHz ; 802.11ac MCS2/Nss1 (40MHz): 36.48 MHz ; 802.11ac MCS2/Nss1 (80MHz): 76.16 MHz
Maximum Conducted Output Power	For non-beamforming mode: 802.11n MCS0 (20MHz): 16.85 dBm ; 802.11n MCS0 (40MHz): 16.87 dBm ; For beamforming mode: 802.11ac MCS2/Nss1 (20MHz): 16.90 dBm ; 802.11ac MCS2/Nss1 (40MHz): 16.84 dBm ; 802.11ac MCS2/Nss1 (80MHz): 16.18 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Note: The EUT supports beamforming mode for 802.11ac 20/40/80MHz.

IEEE 802.11a

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250MHz
Channel Number	4
Channel Band Width (99%)	For non-beamforming mode: 17.12 MHz
Maximum Conducted Output Power	For non-beamforming mode: 16.82 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna and Band width

Antenna	Two (TX)		
Band width Mode	20 MHz	40 MHz	80MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

Note: The EUT supports beamforming mode for 802.11ac 20/40/80MHz.

IEEE 11n / ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15
802.11ac (VHT20)	2	MCS 0-9/Nss1-2
802.11ac (VHT40)	2	MCS 0-9/Nss1-2
802.11ac (VHT80)	2	MCS 0-9/Nss1-2

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: The test result of beam-forming mode is worse case than non beam-forming mode, so it is recorded in the test report for 802.11ac.

Note 4: Modulation modes consist of below configuration:
11a: IEEE 802.11a, HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

Power	Brand	Model	P/N	Rating
Adapter 1	NETGEAR	P030WF120B 11200-6LF	332-10200-02	Input: 100-240V~50/60Hz 1.0A Output: 12.0V, 2.5A
Adapter 2	NETGEAR	MU30-5120250-A1	332-10234-01	Input: 100-240V~50/60Hz 0.8A Output: 12V, 2.5A
Others				
RJ-45 Cable*1: Shielded, 1.5m				
Cradle*1				

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector
1	NETGEAR	EX6200	Dipole Antenna	I-PEX
2	NETGEAR	EX6200	Dipole Antenna	I-PEX

Ant.	Frequency	Gain (dBi)			Cable loss			True Gain (dBi)		
		5GHz			5GHz			5GHz		
		20MHz	40MHz	80MHz	20MHz	40MHz	80MHz	20MHz	40MHz	80MHz
1	5180MHz	4	-	-	1.1	-	-	2.9	-	-
	5190MHz	-	4	-	-	1.1	-	-	2.9	-
	5200MHz	4	-	-	1.1	-	-	2.9	-	-
	5210MHz	-	-	4.1	-	-	1.1	-	-	3
	5230MHz	-	4.3	-	-	1.1	-	-	3.2	-
	5240MHz	4.3	-	-	1.1	-	-	3.2	-	-
2	5180MHz	4	-	-	0.8	-	-	3.2	-	-
	5190MHz	-	4	-	-	0.8	-	-	3.2	-
	5200MHz	4	-	-	0.8	-	-	3.2	-	-
	5210MHz	-	-	4.1	-	-	0.8	-	-	3.3
	5230MHz	-	4.3	-	-	0.8	-	-	3.5	-
	5240MHz	4.3	-	-	0.8	-	-	3.5	-	-

Note: The EUT has two antennas

For IEEE 802.11a/n/ac mode (2TX/2RX):

Ant. 1 and Ant. 2 could transmit/receive simultaneously.



Chain 2 (Connect to Ant. 2 for 2.4G)
(Connect to Ant. 1 for 5G)

Chain 1 (Connect to Ant. 1 for 2.4G)
(Connect to Ant. 2 for 5G)

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

3.5. Table for Product Information

Items	Description	
Communication Mode	☒ IP Based (Load Based)	☐ Frame Based
Beamforming Function	☒ With beamforming for 802.11ac	☐ Without beamforming

3.6. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11n 20MHz	Band 1	MCS0	36/40/48	1+2
	11n 40MHz	Band 1	MCS0	38/46	1+2
	11ac 20MHz	Band 1	MCS2/Nss1	36/40/48	1+2
	11ac 40MHz	Band 1	MCS2/Nss1	38/46	1+2
	11ac 80MHz	Band 1	MCS2/Nss1	42	1+2
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2
Power Spectral Density	11n 20MHz	Band 1	MCS0	36/40/48	1+2
	11n 40MHz	Band 1	MCS0	38/46	1+2
	11ac 20MHz	Band 1	MCS2/Nss1	36/40/48	1+2
	11ac 40MHz	Band 1	MCS2/Nss1	38/46	1+2
	11ac 80MHz	Band 1	MCS2/Nss1	42	1+2
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11n 20MHz	Band 1	MCS0	36/40/48	1&2
	11n 40MHz	Band 1	MCS0	38/46	1&2
	11ac 20MHz	Band 1	MCS2/Nss1	36/40/48	1&2
	11ac 40MHz	Band 1	MCS2/Nss1	38/46	1&2
	11ac 80MHz	Band 1	MCS2/Nss1	42	1&2
	11a/BPSK	Band 1	6Mbps	36/40/48	1&2
Peak Excursion	11n 20MHz	Band 1	MCS0	36/40/48	1+2
	11n 40MHz	Band 1	MCS0	38/46	1+2
	11ac 20MHz	Band 1	MCS2/Nss1	36/40/48	1+2
	11ac 40MHz	Band 1	MCS2/Nss1	38/46	1+2
	11ac 80MHz	Band 1	MCS2/Nss1	42	1+2
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2

Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11n 20MHz	Band 1	MCS0	36/40/48	1+2
	11n 40MHz	Band 1	MCS0	38/46	1+2
	11ac 20MHz	Band 1	MCS2/Nss1	36/40/48	1+2
	11ac 40MHz	Band 1	MCS2/Nss1	38/46	1+2
	11ac 80MHz	Band 1	MCS2/Nss1	42	1+2
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2
Band Edge Emission	11n 20MHz	Band 1	MCS0	36/40/48	1+2
	11n 40MHz	Band 1	MCS0	38/46	1+2
	11ac 20MHz	Band 1	MCS2/Nss1	36/40/48	1+2
	11ac 40MHz	Band 1	MCS2/Nss1	38/46	1+2
	11ac 80MHz	Band 1	MCS2/Nss1	42	1+2
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2
Frequency Stability	Un-modulation		-	40	N/A

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. Normal Link - EUT with AC Adapter 1

Mode 2. Normal Link - EUT with AC Adapter 2

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission 30MHz~1GHz test:

Mode 1. Normal Link - Stand of EUT with AC Adapter 1

Mode 2. Normal Link - Laying of EUT with AC Adapter 1

Mode 1 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3 will follow this same test mode.

Mode 3. Normal Link - Stand of EUT with AC Adapter 2

Mode 3 is the worst case, so it was selected to record in this test report.

For Radiated Emission above 1GHz test:

Mode 1. CTX - Stand of EUT

Mode 2. CTX - Laying of EUT

Mode 1 is the worst case, so it was selected to record in this test report.

For MPE and Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Maximum Permissible Exposure (Please refer to Appendix B) and Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

Note1: The test result of beam-forming mode is worse case than non beam-forming mode, so it is recorded in the test report for 802.11ac.

3.7. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).Please refer section 6 for Test Site Address.

3.8. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	E6430	QDS-BRCM1049LE
AP Router	Planex	GW-AP54SGX	KA220030603014-1
Flash Disk	Transcend	604108 8255	DoC

For Test Site No: 03CH01-CB

(Radiated Emission 30MHz~1GHz test)

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1340	E2K4965AGNM
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	D420	E2KWM3945ABG
Wireless ac AP	Netgear	R6300V2	PY31300227
USB HDD	CM	4911B	N/A

For Test Site No: 03CH01-CB

(Radiated Emission above 1GHz test) (For Non-Beamforming Mode)

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1340	E2K4965AGNM

For Test Site No: 03CH01-CB

(Radiated Emission above 1GHz test) (For Beamforming Mode)

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	D420	E2KWM3945ABG
Wireless ac AP	Netgear	R6300V2	PY31300227
WLAN ac Dongle	Netgear	A6200	PY31220200

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	QDS-BRCM1049LE

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For non-beamforming mode:

Power Parameters of IEEE 802.11n MCS0 20MHz

Test Software Version	Manual Tool Version : 2.0.1.0		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0 20MHz	48	48	48

Power Parameters of IEEE 802.11n MCS0 20MHz

Test Software Version	Manual Tool Version : 2.0.1.0	
Frequency	5190 MHz	5230 MHz
MCS0 40MHz	48	48

Power Parameters of IEEE 802.11a

Test Software Version	Manual Tool Version : 2.0.1.0		
Frequency	5180 MHz	5200 MHz	5240 MHz
802.11a	48	48	48

For beamforming mode:

Power Parameters of IEEE 802.11ac MCS2/Nss1 20MHz

Test Software Version	Manual Tool Version : 2.0.1.0		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS2/Nss1 20MHz	49	49	48

Power Parameters of IEEE 802.11ac MCS2/Nss1 40MHz

Test Software Version	Manual Tool Version : 2.0.1.0	
Frequency	5190 MHz	5230 MHz
MCS2/Nss1 40MHz	49	48

Power Parameters of IEEE 802.11ac MCS2/Nss1 80MHz

Test Software Version	Manual Tool Version : 2.0.1.0	
Frequency	5210 MHz	
MCS2/Nss1 80MHz	49	

3.10. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.


The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by WLAN ac dongle and transmit duty cycle no less 98%

3.11.1. Duty Cycle


For non-beamforming mode:

IEEE 802.11n MCS0 20MHz

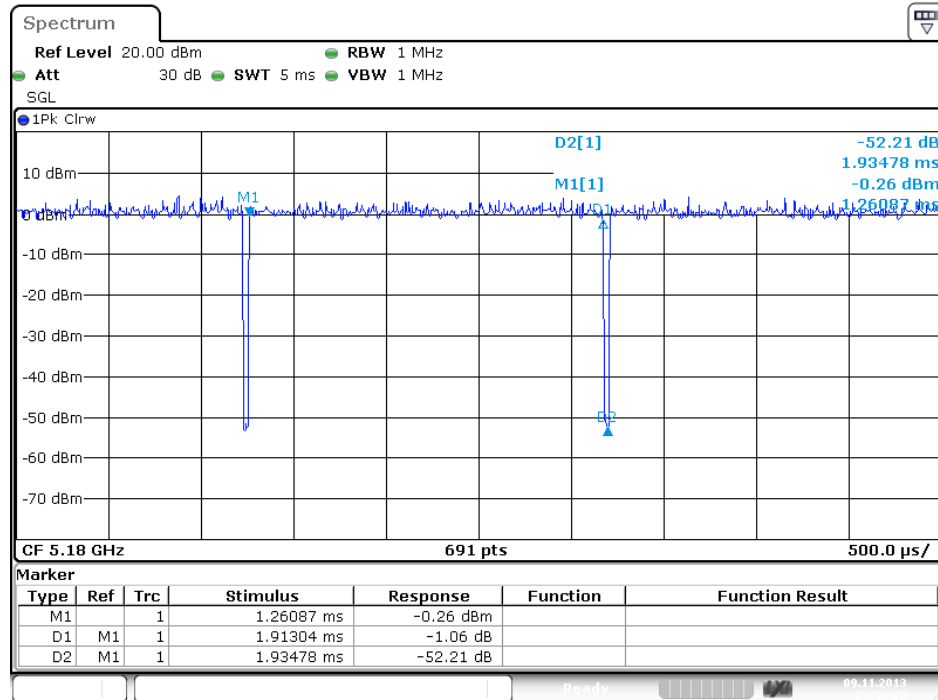


Date: 9.NOV.2013 23:50:20

IEEE 802.11n MCS0 40MHz

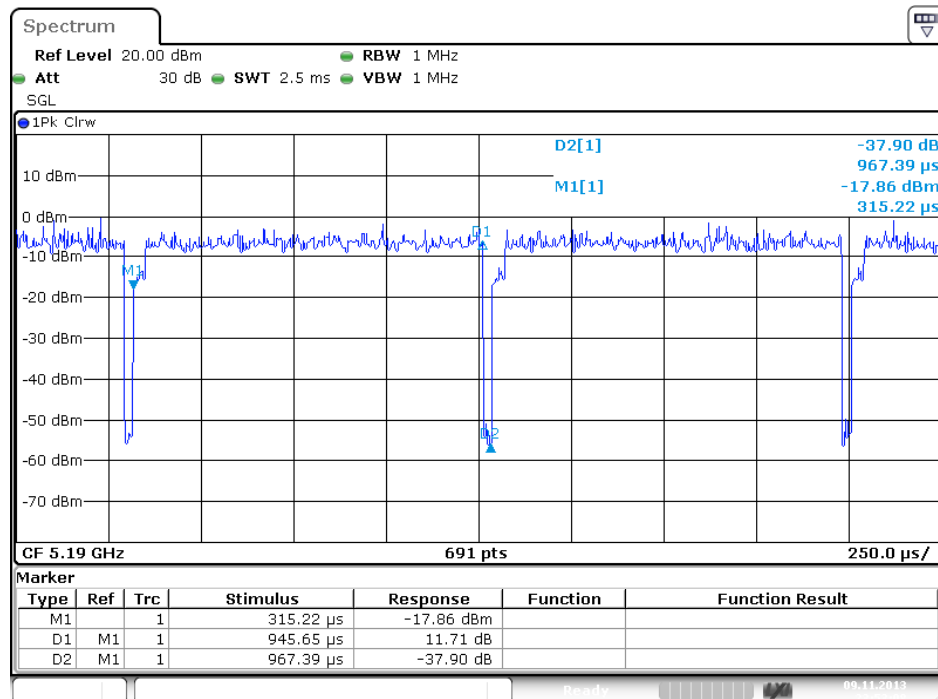

Date: 9.NOV.2013 23:53:08


IEEE 802.11a

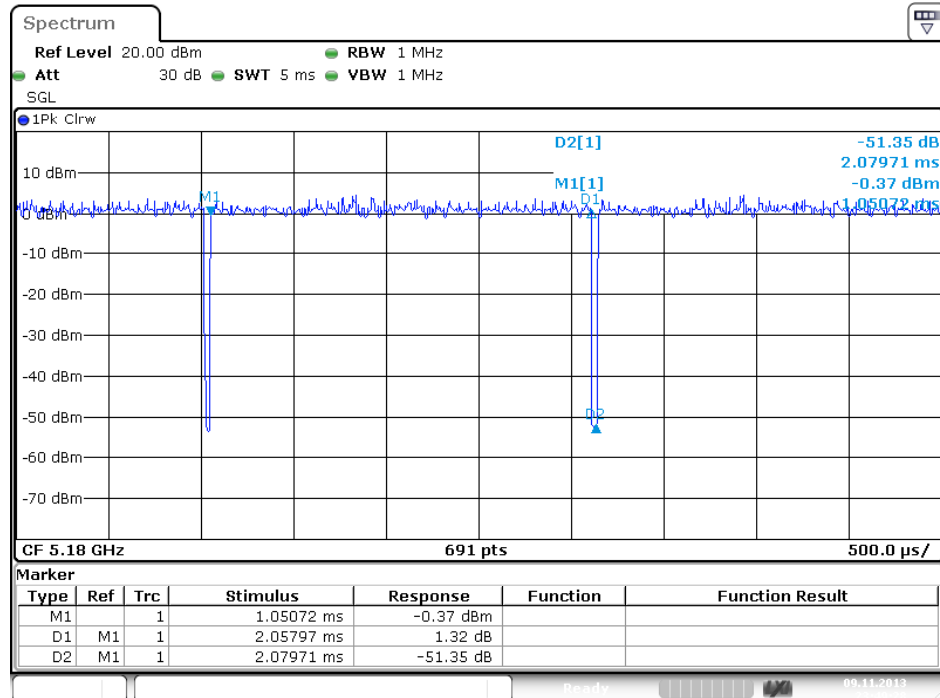

Date: 9.NOV.2013 23:49:28


For beamforming mode:

IEEE 802.11ac MCS2/Nss1 20MHz

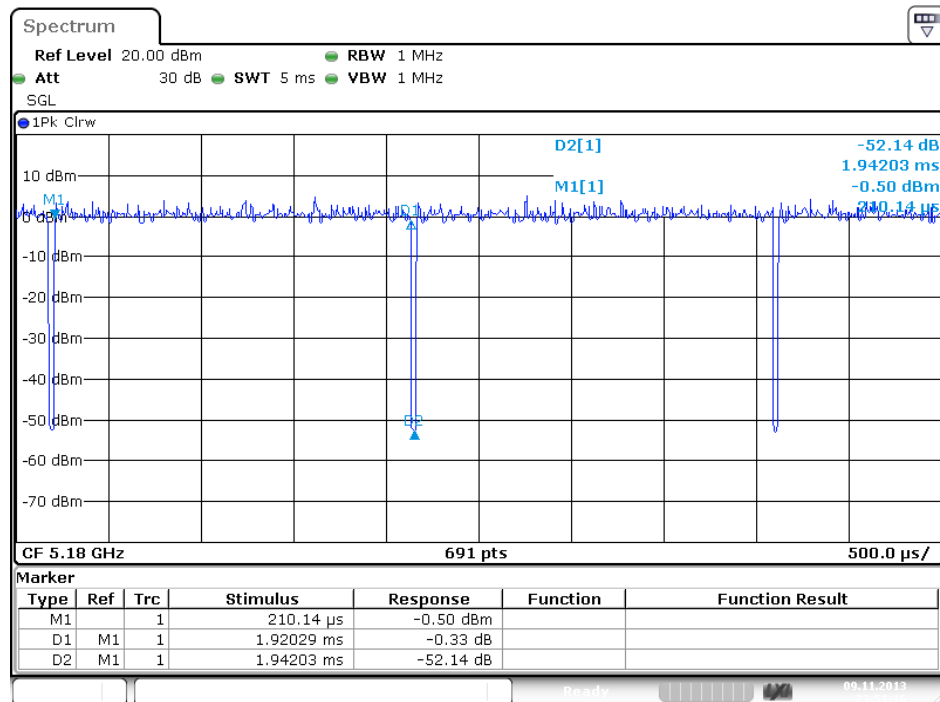


Date: 9.NOV.2013 23:51:16

IEEE 802.11ac MCS2/Nss1 40MHz

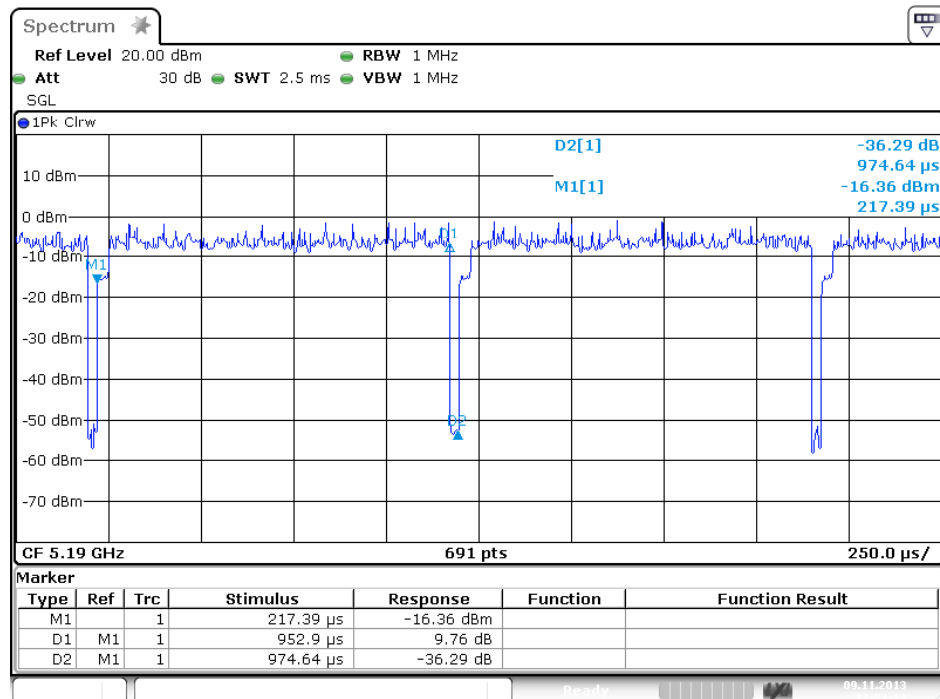

Date: 9.NOV.2013 23:52:12

IEEE 802.11ac MCS2/Nss1 80MHz

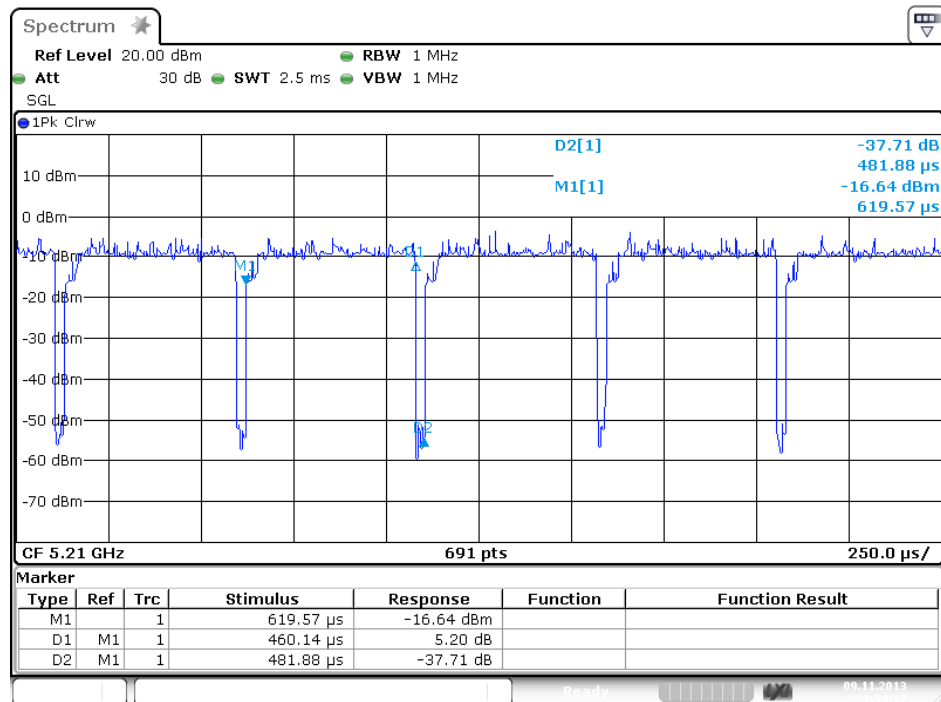


Date: 9.NOV.2013 23:54:18

3.12. Test Configurations

3.12.1. AC Power Line Conduction Emissions Test Configuration


Test Mode: Mode 2

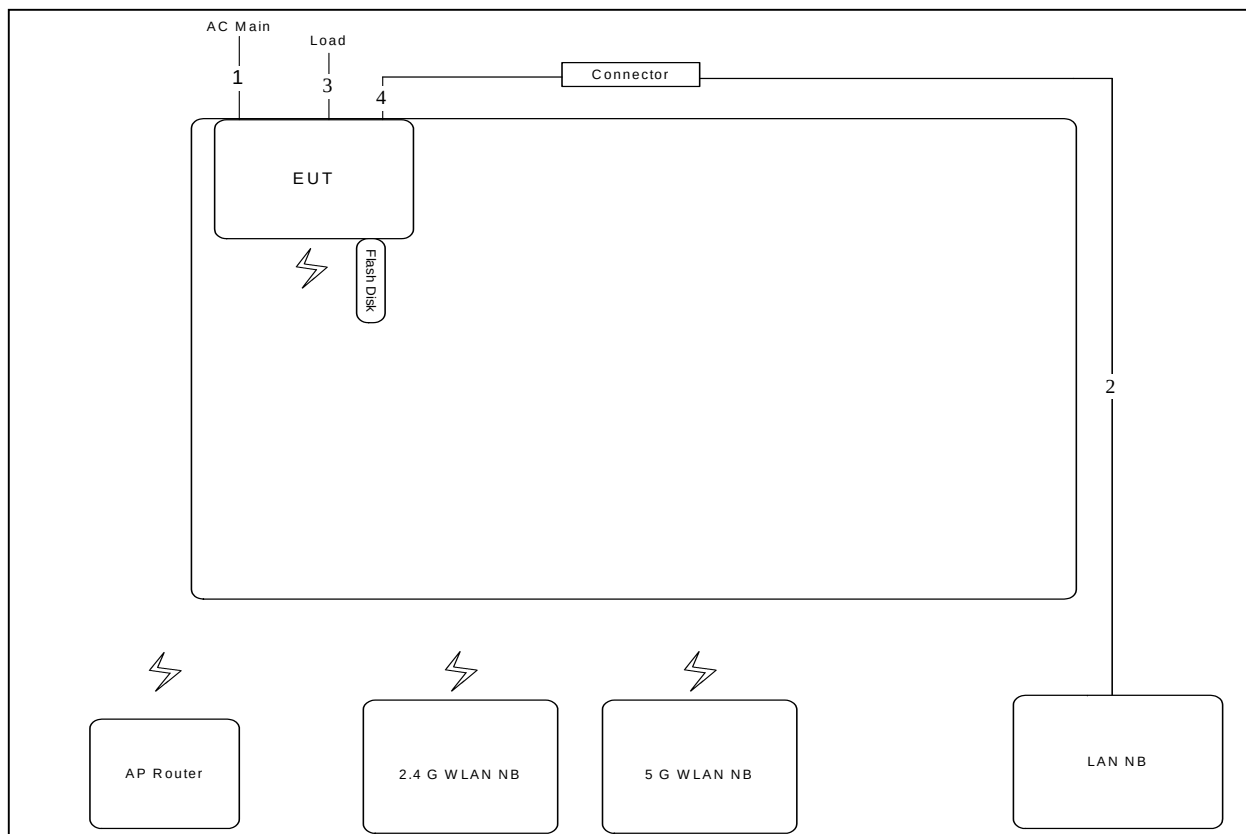

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.8m
2	RJ-45 cable	Yes	10m
3	RJ-45 cable*4	No	3m
4	RJ-45 cable	Yes	1.5m

3.12.2. Radiation Emissions Test Configuration


Test Configuration: 30MHz ~1GHz / Test Mode: Mode 3

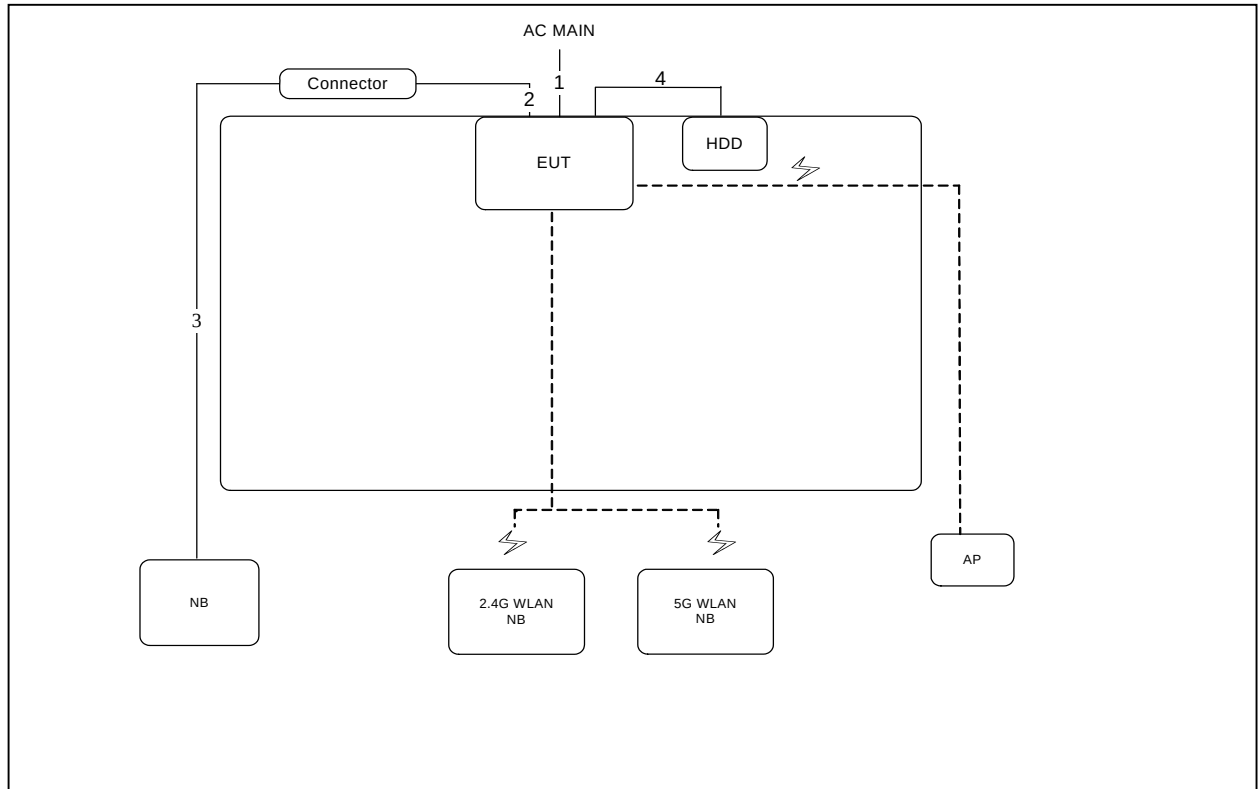

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.8m
2	RJ-45 cable	Yes	1.5m
3	RJ-45 cable	No	10m
4	USB cable	No	0.5m

For Non-Beamforming Mode


Test Configuration: above 1GHz / Test Mode: Mode 1

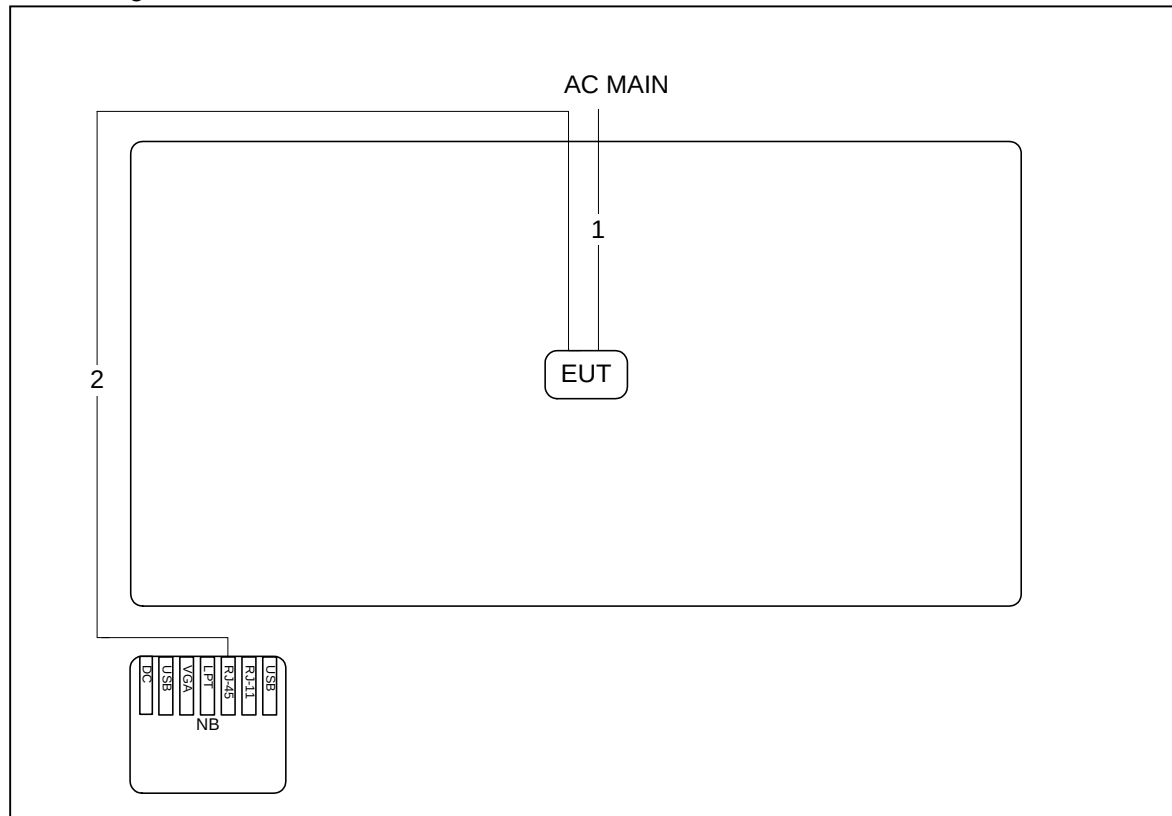

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m

For Beamforming Mode

Test Configuration: above 1GHz / Test Mode: Mode 1

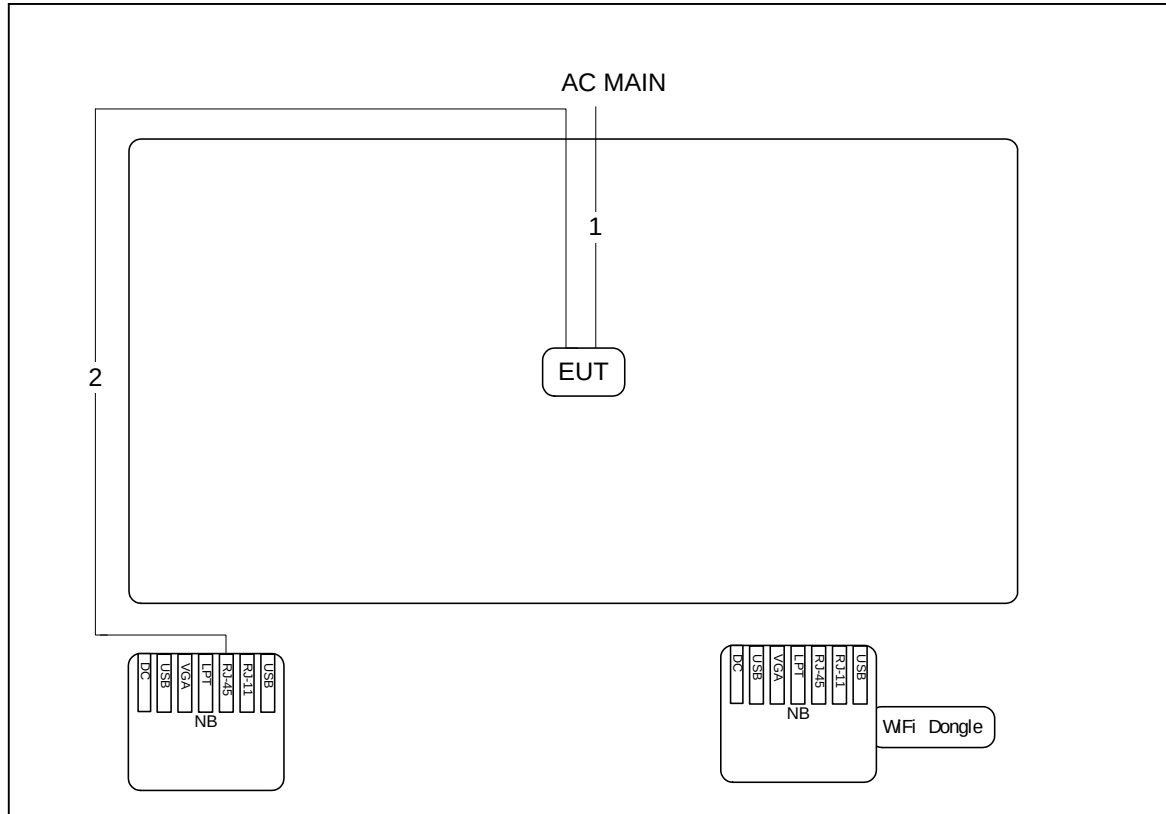

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

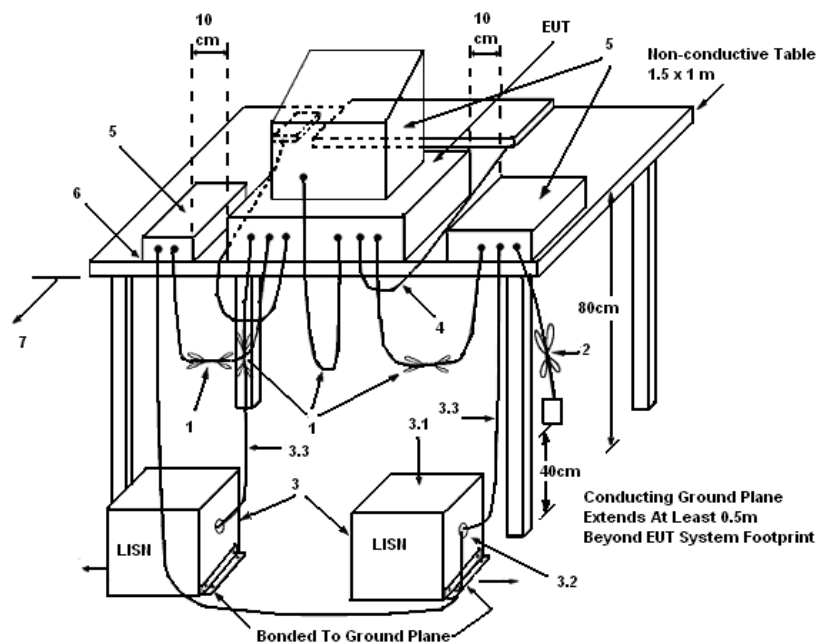

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	53%
Test Engineer	Parody Lin	Phase	Line
Configuration	Normal Link	Test Mode	Mode 2

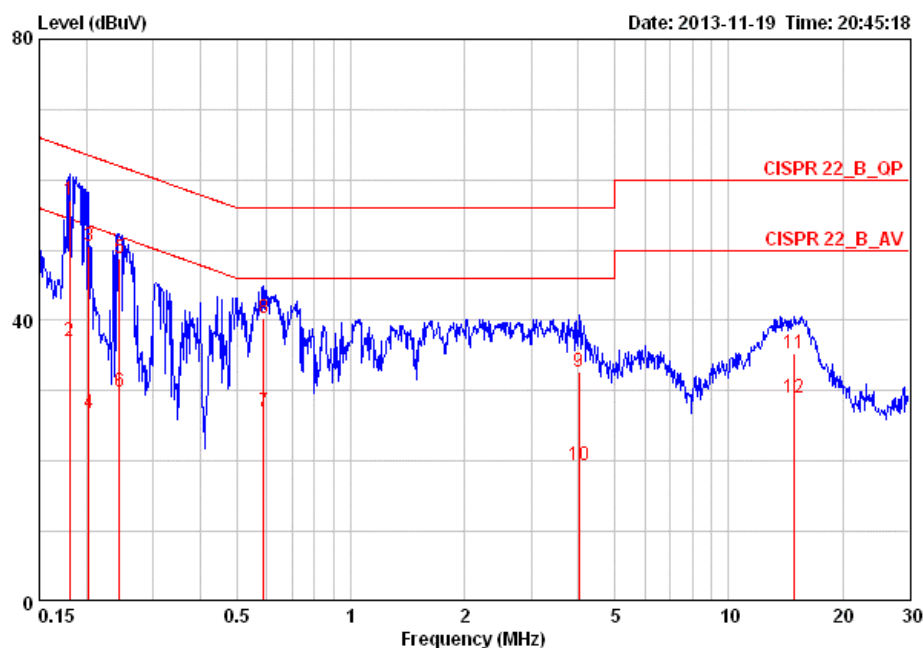

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 @	0.18056	57.17	-7.29	64.46	56.83	0.15	0.19	QP
2	0.18056	36.95	-17.51	54.46	36.61	0.15	0.19	AVERAGE
3 @	0.20289	50.48	-13.01	63.49	50.13	0.15	0.20	QP
4	0.20289	26.92	-26.57	53.49	26.57	0.15	0.20	AVERAGE
5 @	0.24422	48.92	-13.03	61.95	48.57	0.15	0.20	QP
6	0.24422	29.97	-21.98	51.95	29.62	0.15	0.20	AVERAGE
7	0.58851	26.98	-19.02	46.00	26.63	0.15	0.20	AVERAGE
8 @	0.58851	40.36	-15.64	56.00	40.01	0.15	0.20	QP
9	4.006	32.75	-23.25	56.00	32.17	0.28	0.30	QP
10	4.006	19.42	-26.58	46.00	18.84	0.28	0.30	AVERAGE
11	14.907	35.33	-24.67	60.00	34.44	0.48	0.41	QP
12	14.907	29.06	-20.94	50.00	28.17	0.48	0.41	AVERAGE

Temperature	24°C	Humidity	53%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 2

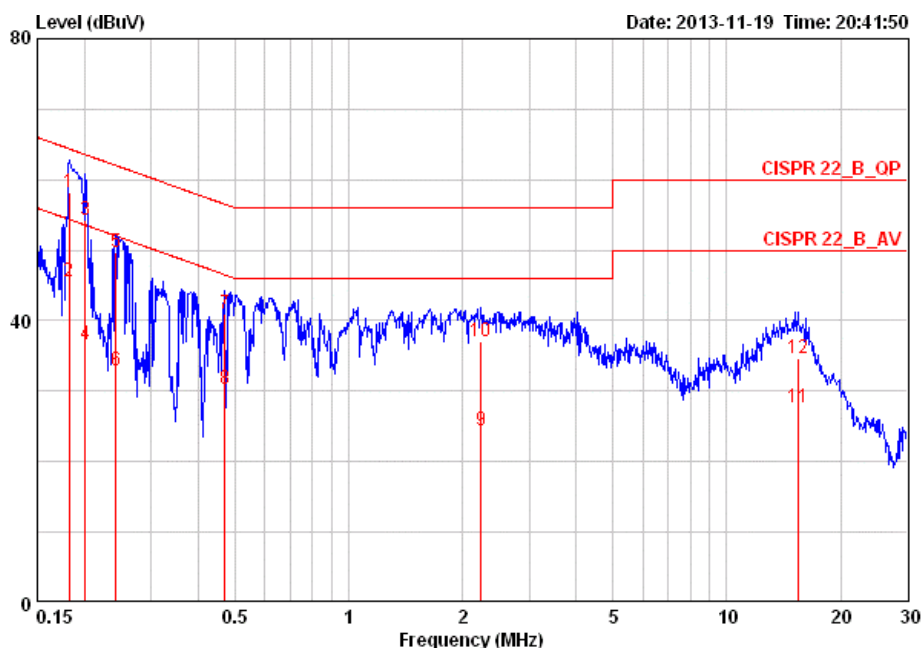

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.18249	58.27	-6.10	64.37	58.01	0.07	0.19	QP
2	0.18249	45.52	-8.85	54.37	45.26	0.07	0.19	AVERAGE
3	0.20075	54.19	-9.39	63.58	53.92	0.07	0.20	QP
4	0.20075	36.63	-16.95	53.58	36.36	0.07	0.20	AVERAGE
5	0.24165	49.68	-12.36	62.04	49.41	0.07	0.20	QP
6	0.24165	32.97	-19.07	52.04	32.70	0.07	0.20	AVERAGE
7	0.47110	41.05	-15.44	56.49	40.78	0.07	0.20	QP
8	0.47110	30.36	-16.13	46.49	30.09	0.07	0.20	AVERAGE
9	2.237	24.42	-21.58	46.00	24.07	0.11	0.24	AVERAGE
10	2.237	37.02	-18.98	56.00	36.67	0.11	0.24	QP
11	15.388	27.68	-22.32	50.00	26.91	0.37	0.41	AVERAGE
12	15.388	34.76	-25.24	60.00	33.99	0.37	0.41	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	20°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n/a

For non-beamforming mode:

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 & Ant. 2

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.64	17.92
40	5200 MHz	20.48	18.08
48	5240 MHz	20.32	17.92

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 & Ant. 2

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	39.04	36.16
46	5230 MHz	39.04	36.16

Configuration IEEE 802.11a / Ant. 1 & Ant. 2

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.16	17.12
40	5200 MHz	20.16	16.96
48	5240 MHz	20.16	16.96

Temperature	20°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac

For beamforming mode:

Configuration IEEE 802.11ac MCS2/Nss1 20MHz / Ant. 1 & Ant. 2

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.64	17.92
40	5200 MHz	20.64	17.92
48	5240 MHz	20.32	17.92

Configuration IEEE 802.11ac MCS2/Nss1 40MHz / Ant. 1 & Ant. 2

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	39.04	36.48
46	5230 MHz	39.04	36.16


Configuration IEEE 802.11ac MCS2/Nss1 80MHz / Ant. 1 & Ant. 2

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	81.28	76.16

For non-beamforming mode:

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz


/ Ant.1 + Ant. 2 / 5180 MHz

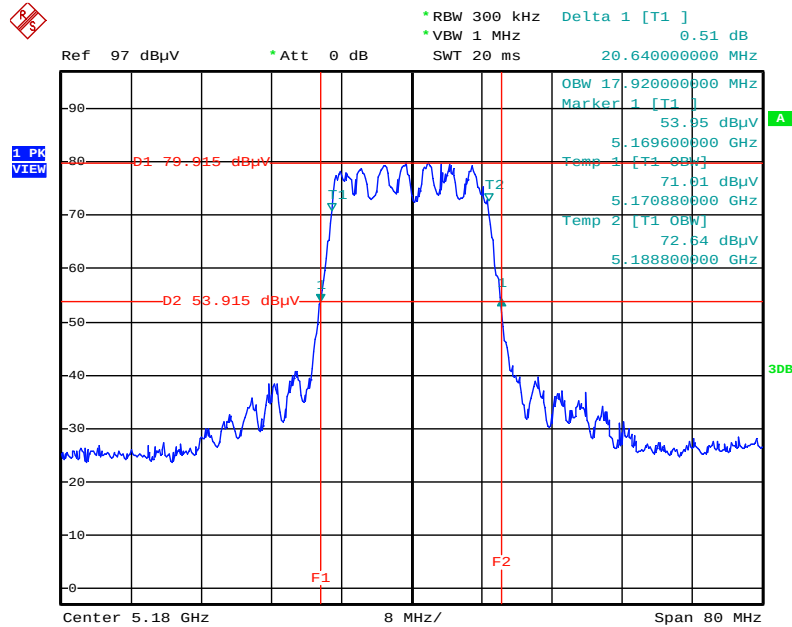

Date: 18.NOV.2013 20:02:21


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz

/ Ant.1 + Ant. 2 / 5200 MHz

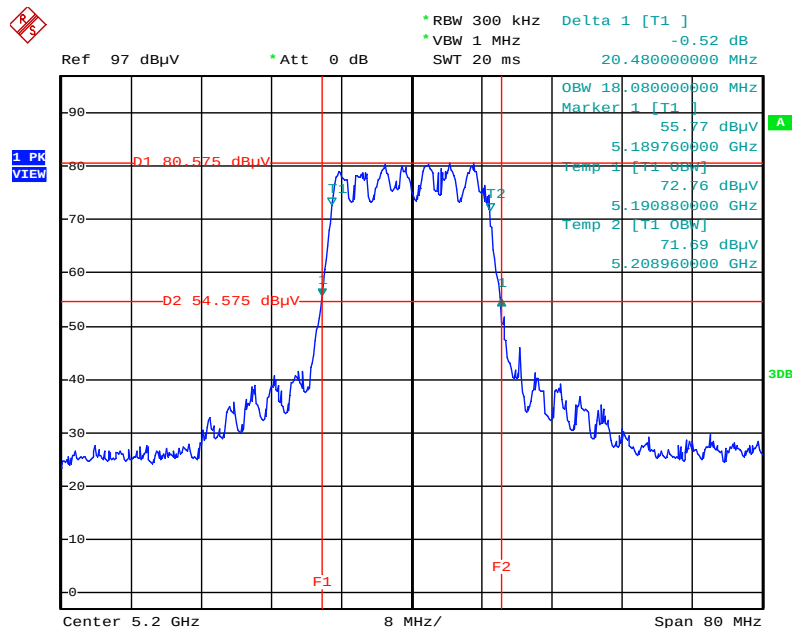


Date: 18.NOV.2013 20:02:01

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant.1 + Ant. 2 / 5240 MHz

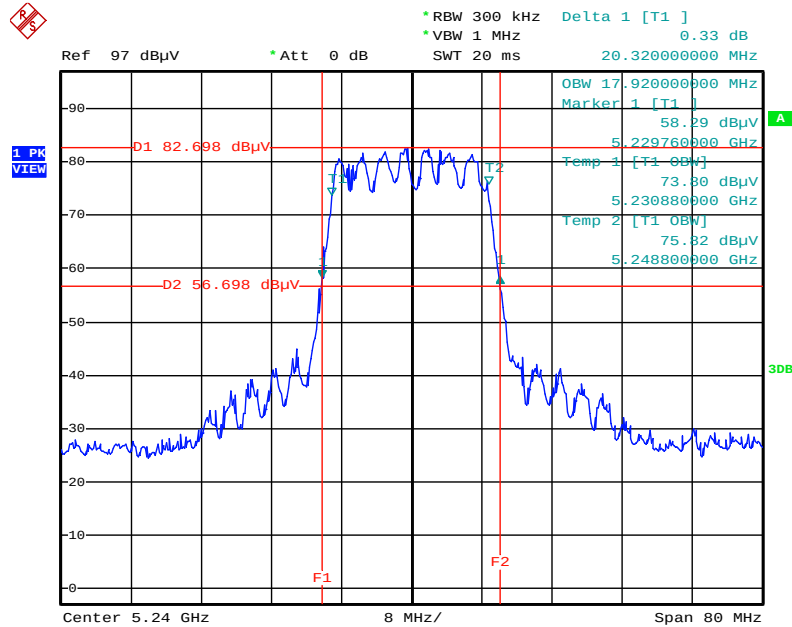


Date: 18.NOV.2013 20:01:42

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant.1 + Ant. 2 / 5190 MHz

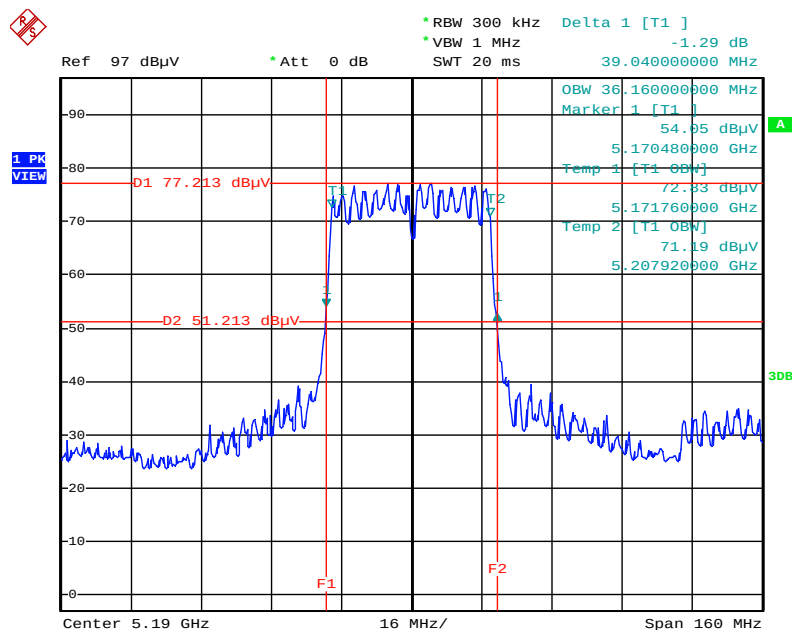


Date: 18.NOV.2013 20:02:50

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant.1 + Ant. 2 / 5230 MHz

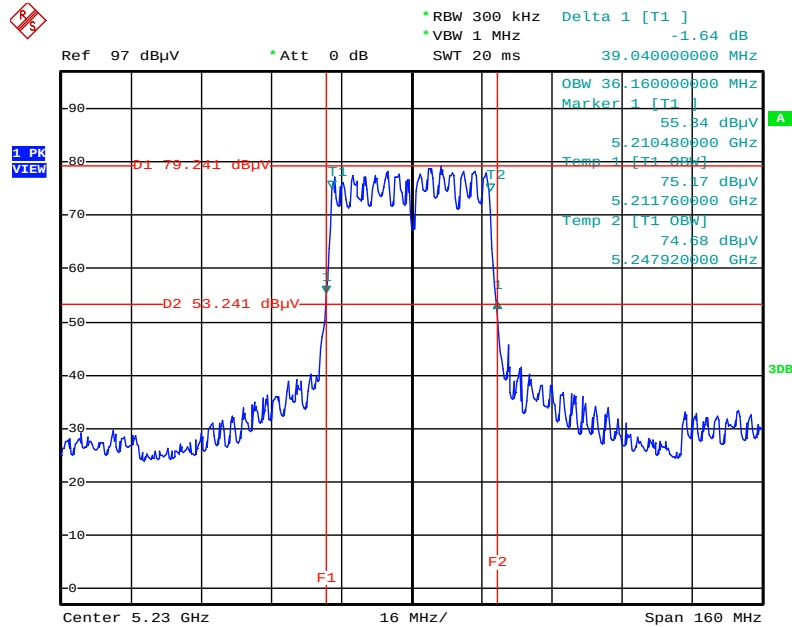


Date: 18.NOV.2013 20:03:08

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant.1 + Ant. 2 / 5180 MHz

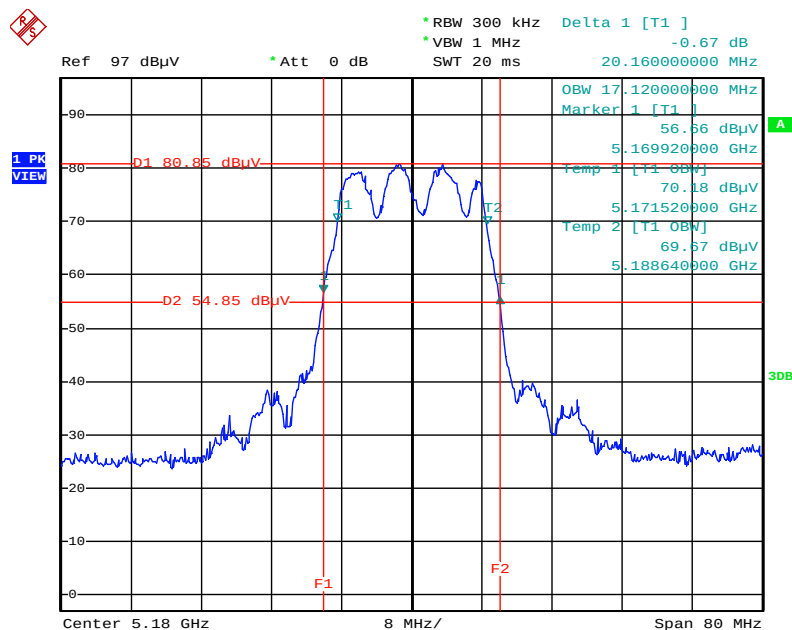


Date: 18.NOV.2013 19:59:41

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant.1 + Ant. 2 / 5200 MHz

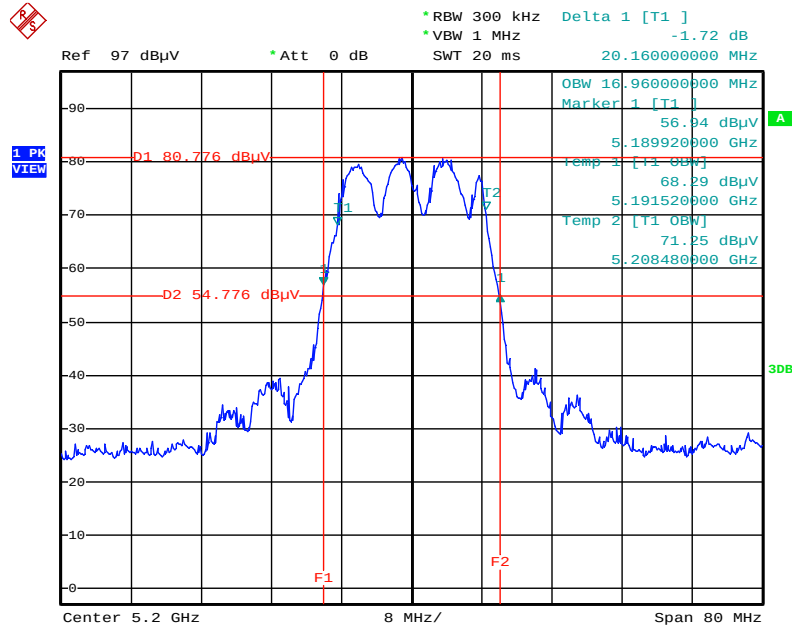

Date: 18.NOV.2013 20:00:42


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant.1 + Ant. 2 / 5240 MHz

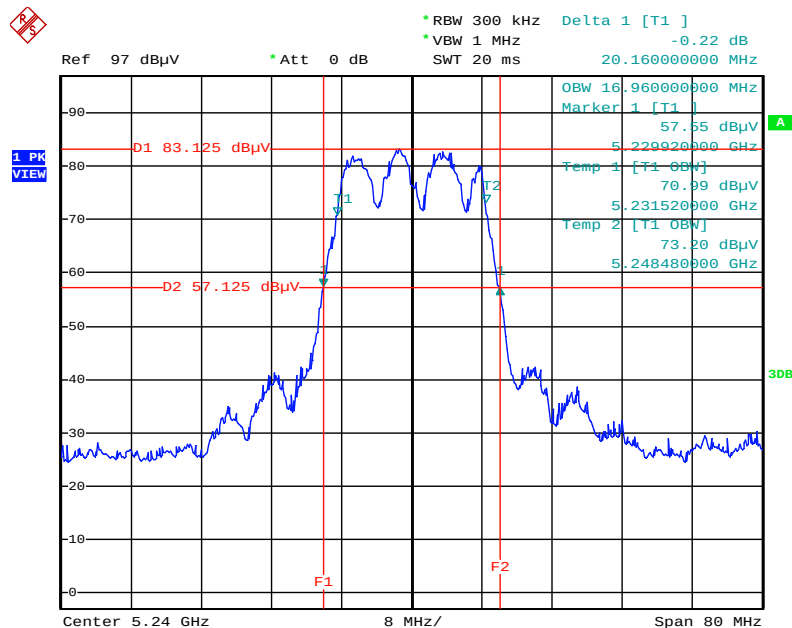

Date: 18.NOV.2013 20:01:13


For beamforming mode:

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS2/Nss1 20MHz
/ Ant.1 + Ant. 2 / 5180 MHz

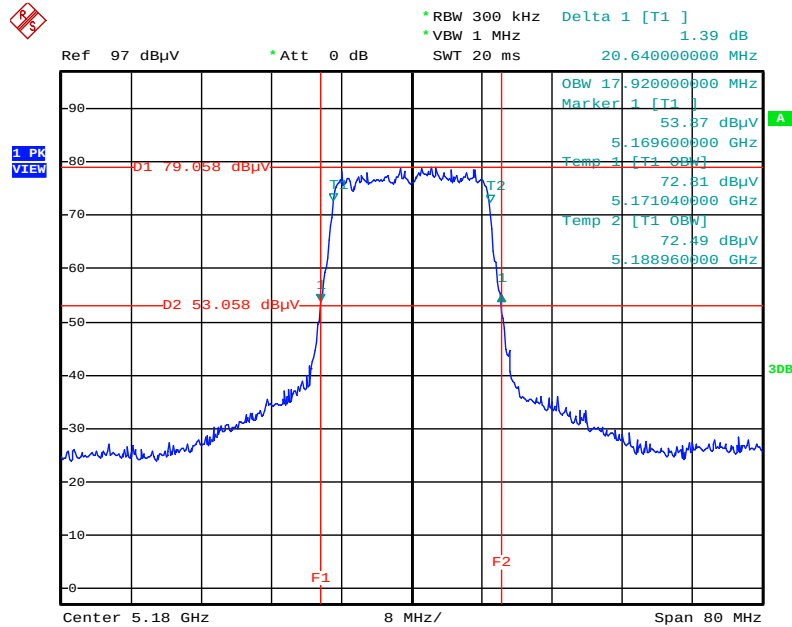


Date: 18.NOV.2013 20:11:43

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS2/Nss1 20MHz
/ Ant.1 + Ant. 2 / 5200 MHz

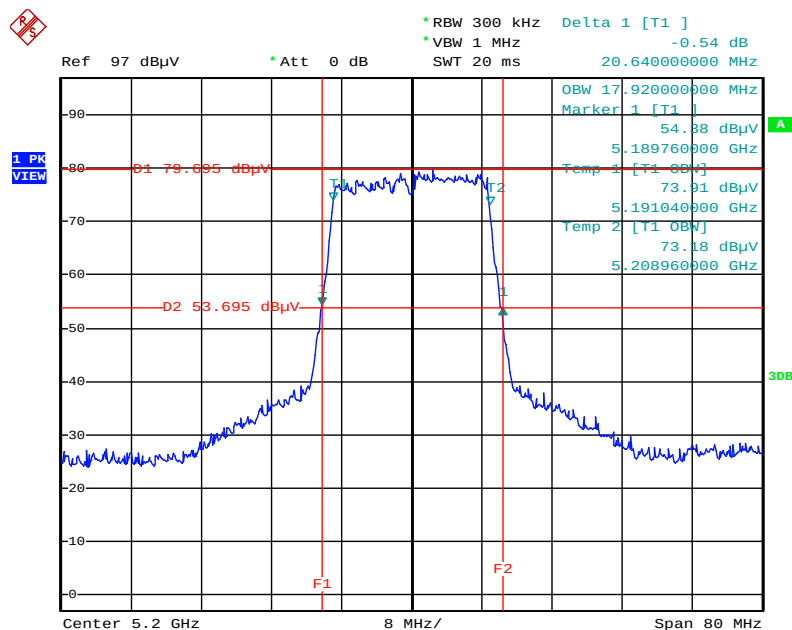


Date: 18.NOV.2013 20:12:18

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS2/Nss1 20MHz / Ant.1 + Ant. 2 / 5240 MHz

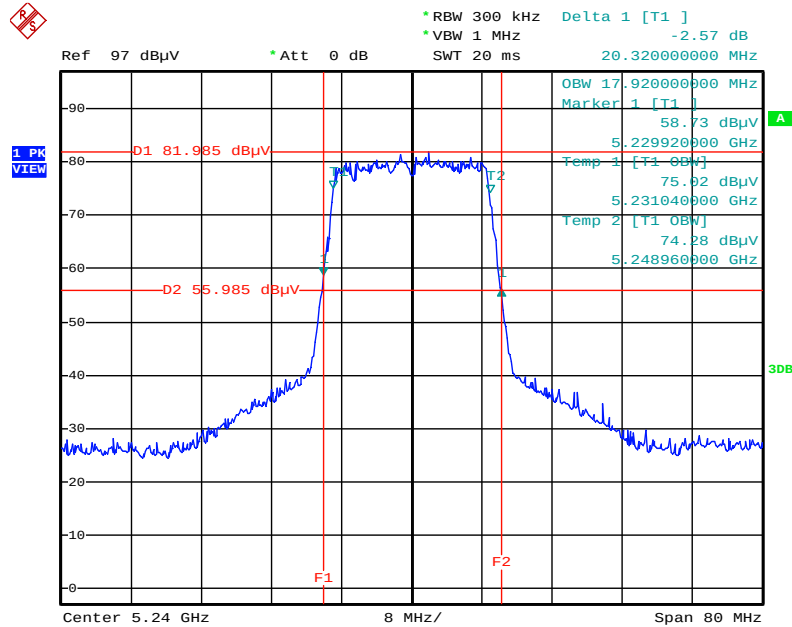


Date: 18.NOV.2013 20:12:39

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS2/Nss1 40MHz / Ant.1 + Ant. 2 / 5190 MHz

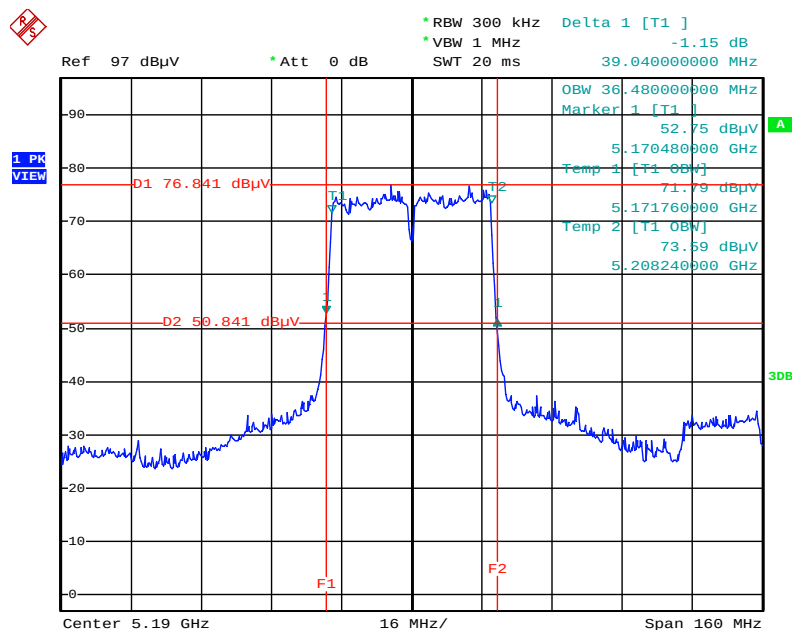


Date: 18.NOV.2013 20:13:09

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS2/Nss1 40MHz / Ant.1 + Ant. 2 / 5230 MHz

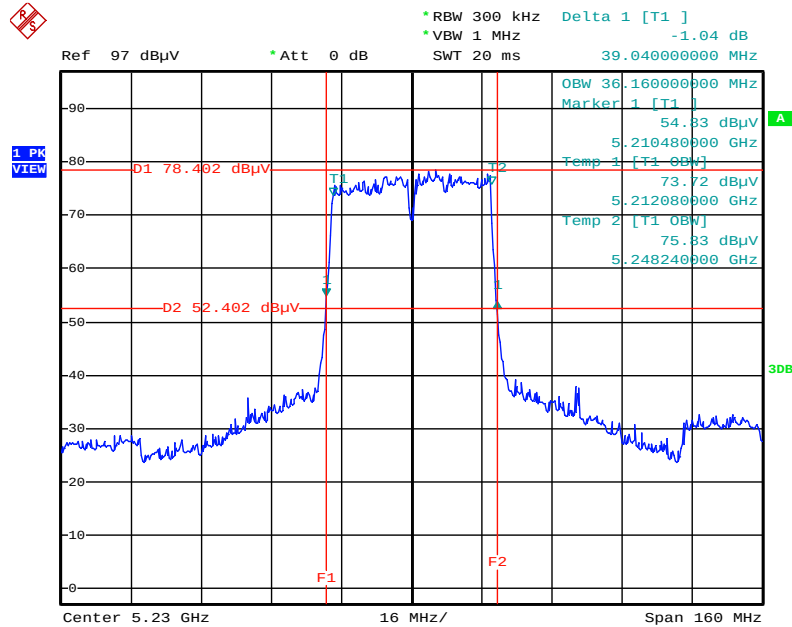

Date: 18.NOV.2013 20:13:30

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS2/Nss1 80MHz / Ant.1 + Ant. 2 / 5210 MHz

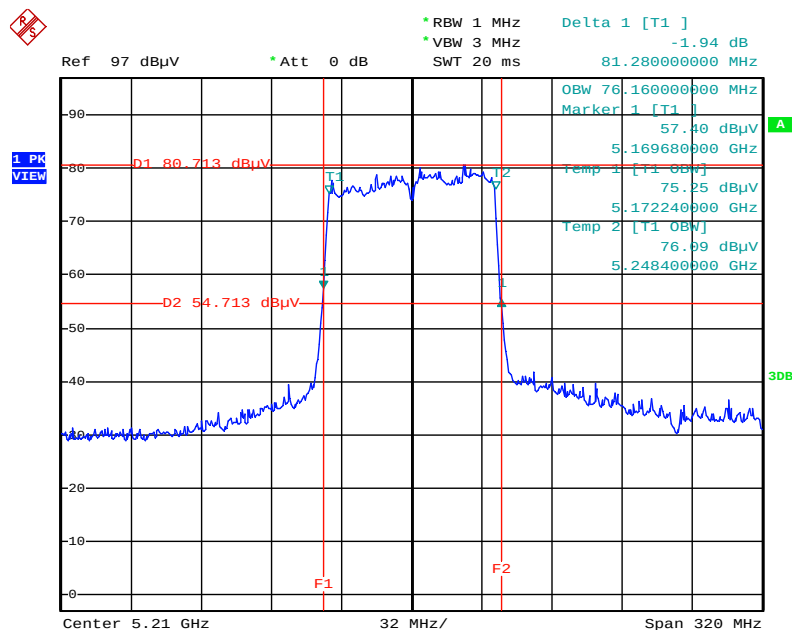

Date: 18.NOV.2013 20:14:21

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or $4 \text{ dBm} + 10\log B$, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (E) Maximum conducted output power => (3) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 D01 v02 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout



4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n/a
Test Date	Nov. 18, 2013		

For non-beamforming mode:

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
36	5180 MHz	13.89	13.78	16.85	17.00	Complies
40	5200 MHz	13.84	13.75	16.81	17.00	Complies
48	5240 MHz	13.81	13.65	16.74	17.00	Complies

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
38	5190 MHz	13.89	13.82	16.87	17.00	Complies
46	5230 MHz	13.87	13.81	16.85	17.00	Complies

Configuration IEEE 802.11a / Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
36	5180 MHz	13.89	13.73	16.82	17.00	Complies
40	5200 MHz	13.85	13.72	16.80	17.00	Complies
48	5240 MHz	13.85	13.65	16.76	17.00	Complies

Temperature	20°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac
Test Date	Nov. 18, 2013		

For beamforming mode:

Configuration IEEE 802.11ac MCS2/Nss1 20MHz / Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
36	5180 MHz	13.92	13.85	16.90	16.94	Complies
40	5200 MHz	13.91	13.84	16.89	16.94	Complies
48	5240 MHz	13.61	13.58	16.61	16.64	Complies

Note: Directional gain:

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.06\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 17 - (6.06 - 6) = 16.94 \text{ dBm}$$

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.06\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 17 - (6.06 - 6) = 16.94 \text{ dBm}$$

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.36\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 17 - (6.36 - 6) = 16.64 \text{ dBm}$$

Configuration IEEE 802.11ac MCS2/Nss1 40MHz / Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
38	5190 MHz	13.89	13.77	16.84	16.94	Complies
46	5230 MHz	13.59	13.52	16.57	16.64	Complies

Note: Directional gain:

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.06\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 17 - (6.06 - 6) = 16.94 \text{ dBm}$$

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.36\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 17 - (6.36 - 6) = 16.64 \text{ dBm}$$

Configuration IEEE 802.11ac MCS2/Nss1 80MHz / Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
42	5210 MHz	13.32	13.01	16.18	16.84	Complies

Note: Directional gain:

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 7.16\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 17 - (7.16 - 6) = 16.84 \text{ dBm}$$

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power => (d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
3. Multiple antenna systems was performed in accordance KDB 662911 D01 v02 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

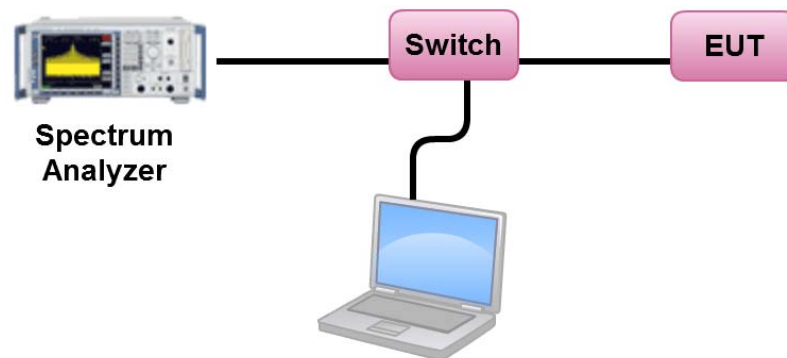

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	20°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n/a
Test Date	Nov. 18, 2013		

For non-beamforming mode:

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	3.39	3.94	Complies
40	5200 MHz	3.39	3.94	Complies
48	5240 MHz	3.34	3.64	Complies

Note: Directional gain:

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.06\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 4 - (6.06 - 6) = 3.94\text{dBm/MHz}$$

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.06\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 4 - (6.06 - 6) = 3.94\text{dBm/MHz}$$

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.36\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 4 - (6.36 - 6) = 3.64\text{dBm/MHz}$$

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	0.43	3.94	Complies
46	5230 MHz	0.54	3.64	Complies

Note: Directional gain:

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.06\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 4 - (6.06 - 6) = 3.94\text{dBm/MHz}$$

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.36\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 4 - (6.36 - 6) = 3.64\text{dBm/MHz}$$

Configuration IEEE 802.11a / Ant. 1 + Ant. 2

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	3.40	3.94	Complies
40	5200 MHz	3.45	3.94	Complies
48	5240 MHz	3.43	3.64	Complies

Note: Directional gain:

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.06\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 4 - (6.06 - 6) = 3.94\text{dBm/MHz}$$

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.06\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 4 - (6.06 - 6) = 3.94\text{dBm/MHz}$$

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.36\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 4 - (6.36 - 6) = 3.64\text{dBm/MHz}$$

Temperature	20°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac
Test Date	Nov. 18, 2013		

For beamforming mode:

Configuration IEEE 802.11ac MCS2/Nss1 20MHz / Ant. 1 + Ant. 2

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	3.50	3.94	Complies
40	5200 MHz	3.53	3.94	Complies
48	5240 MHz	3.17	3.64	Complies

Note: Directional gain:

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.06\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 4 - (6.06 - 6) = 3.94\text{dBm/MHz}$$

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.06\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 4 - (6.06 - 6) = 3.94\text{dBm/MHz}$$

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.36\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 4 - (6.36 - 6) = 3.64\text{dBm/MHz}$$

Configuration IEEE 802.11ac MCS2/Nss1 40MHz / Ant. 1 + Ant. 2

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	0.49	3.94	Complies
46	5230 MHz	0.15	3.64	Complies

Note: Directional gain:

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.06\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 4 - (6.06 - 6) = 3.94\text{dBm/MHz}$$

$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.36\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 4 - (6.36 - 6) = 3.64\text{dBm/MHz}$$

Configuration IEEE 802.11ac MCS2/Nss1 80MHz / Ant. 1 + Ant. 2


Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-3.31	3.84	Complies

Note: Directional gain:


$$10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 6.16\text{dBi} > 6\text{dBi}, \text{ So Band1 Limit} = 4 - (6.16 - 6) = 3.84\text{dBm/MHz}$$

For non-beamforming mode:


Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2 / 5180 MHz

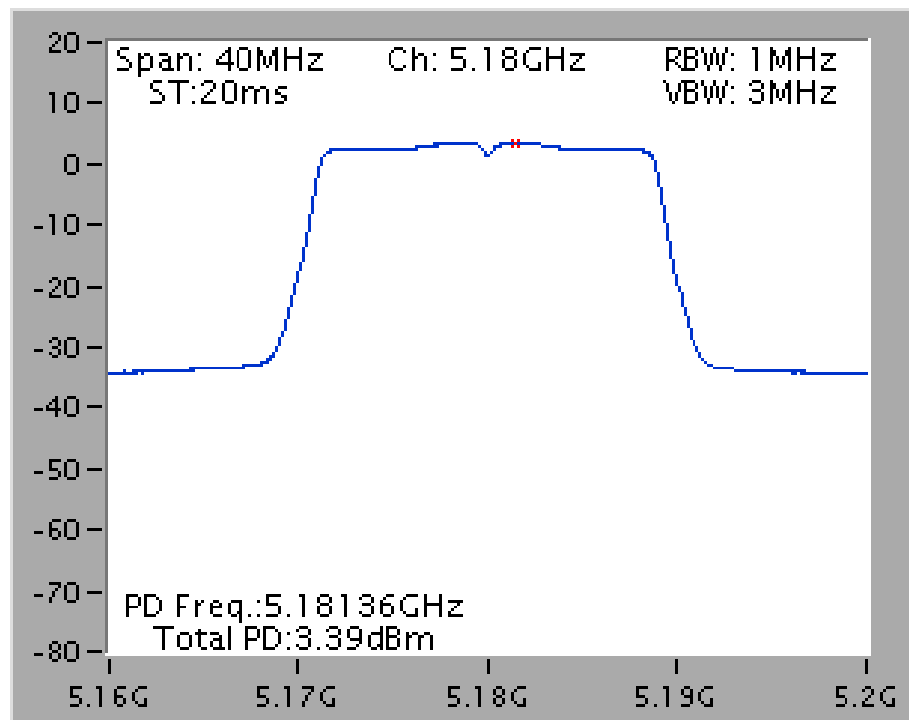

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2 / 5230 MHz

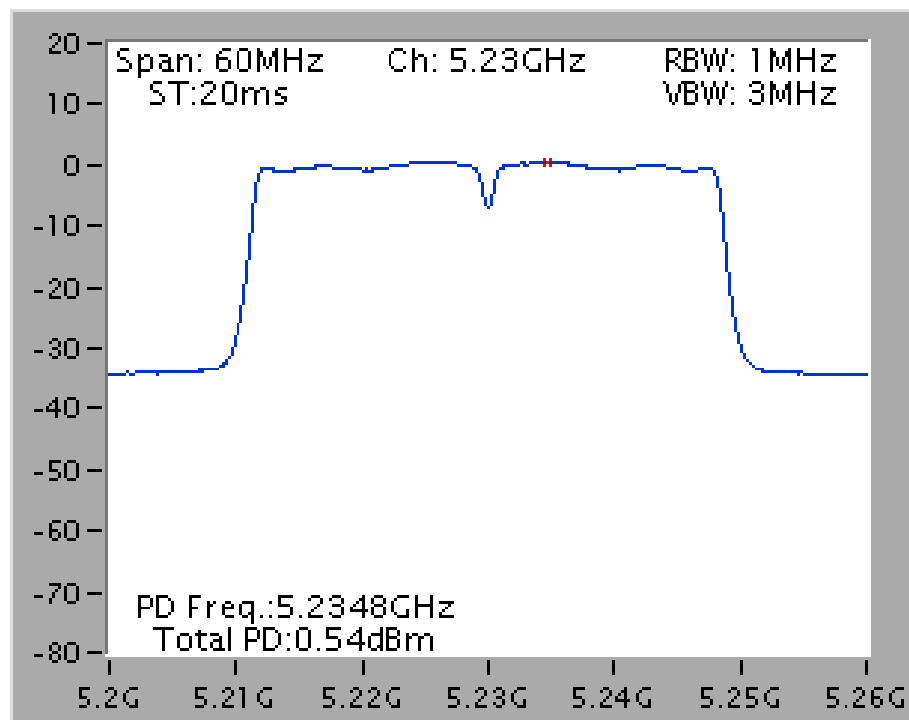


Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5200 MHz

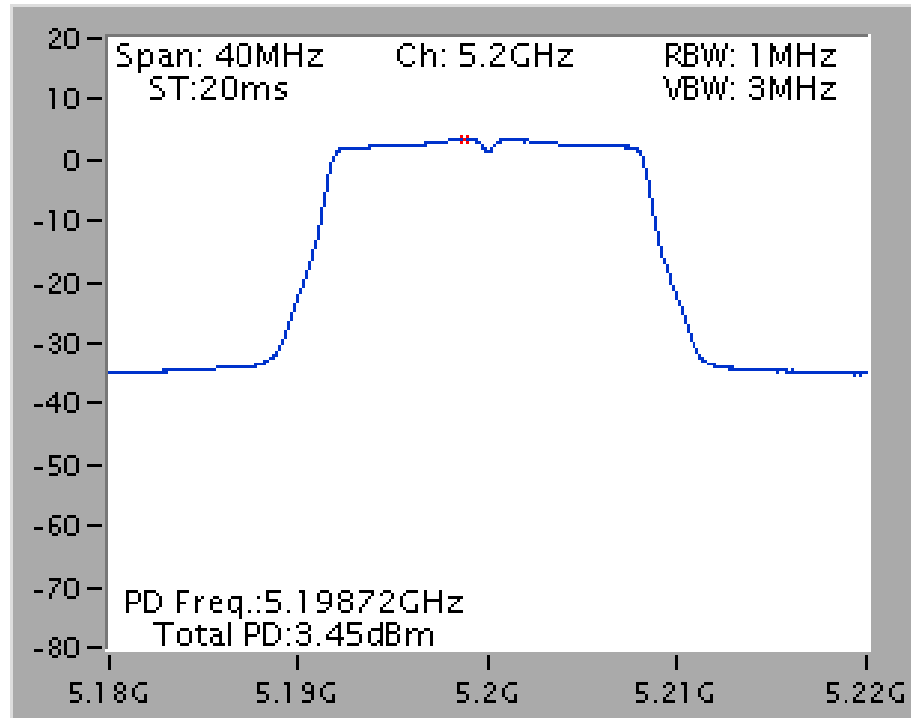


For beamforming mode:


Power Density Plot on Configuration IEEE 802.11ac MCS2/Nss1 20MHz / Ant. 1 + Ant. 2 / 5200 MHz

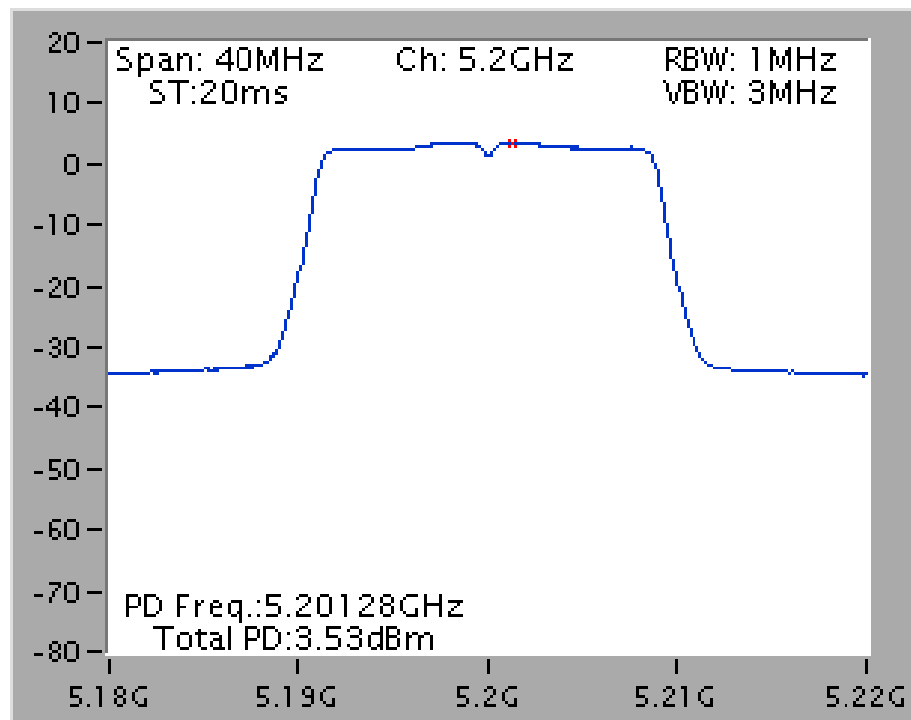

Power Density Plot on Configuration IEEE 802.11ac MCS2/Nss1 40MHz / Ant. 1 + Ant. 2 / 5190 MHz

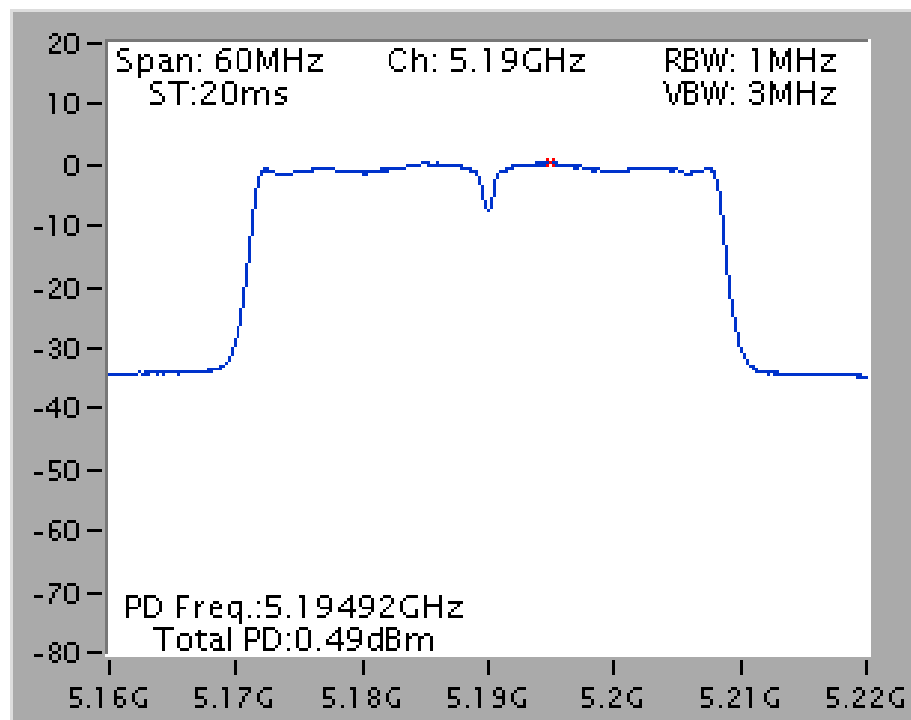

Power Density Plot on Configuration IEEE 802.11ac MCS2/Nss1 80MHz / Ant. 1 + Ant. 2 / 5210 MHz

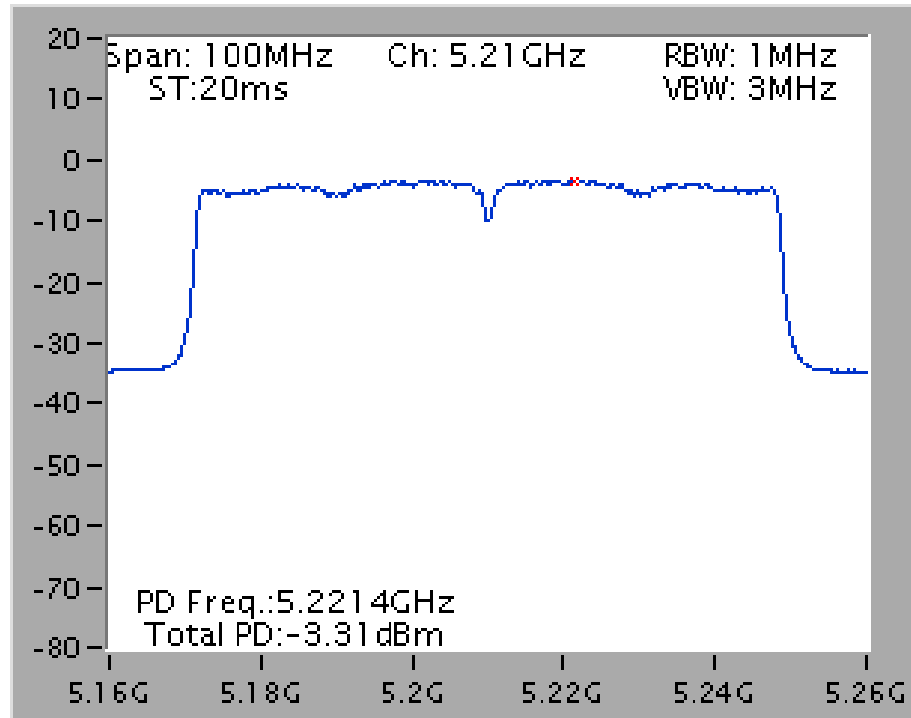

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz (Peak Trace) / 1 MHz (Average Trace)
VBW	≥ 3 MHz (Peak Trace) / ≥ 3 MHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Trace: Max hold (Peak Trace) / Trace Average Sweep Count 100 (Average Trace)
Sweep Time	AUTO

4.5.3. Test Procedures

1. Trace A, Set RBW = 1 MHz, VBW = 3 MHz, Span > 26 dB bandwidth, Max. hold.
2. Delta Mark trace A Maximum frequency and trace B same frequency.
3. Repeat the above procedure until measurements for all frequencies were complete.
4. Testing each modulation mode on a single channel in single operating band at single output port.
All signal types need test (DSSS, OFDM). All modulation types need test (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM). All bandwidth modes need test.

4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.4.4.

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Peak Excursion

Temperature	20°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n/a

For non-beamforming mode:

Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5180 MHz	9.26	13	Complies
QPSK (MCS1)	5180 MHz	9.23	13	Complies
16QAM (MCS3)	5180 MHz	9.55	13	Complies
64QAM (MCS5)	5180 MHz	9.39	13	Complies

Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5190MHz	9.07	13	Complies
QPSK (MCS1)	5190MHz	9.47	13	Complies
16QAM (MCS3)	5190MHz	9.15	13	Complies
64QAM (MCS5)	5190MHz	9.57	13	Complies

Configuration IEEE 802.11a / Ant. 1 + Ant. 2

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (6Mbps)	5180 MHz	9.40	13	Complies
QPSK (12Mbps)	5180 MHz	8.48	13	Complies
16QAM (24Mbps)	5180 MHz	8.65	13	Complies
64QAM (48Mbps)	5180 MHz	8.93	13	Complies

Temperature	20°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac

For beamforming mode:

Configuration IEEE 802.11ac 20MHz / Ant. 1 + Ant. 2

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
QPSK(MCS2)	5180MHz	9.22	13	Complies
16QAM(MCS3)	5180MHz	9.08	13	Complies
64QAM(MCS5)	5180MHz	9.24	13	Complies
256QAM(MCS8)	5180MHz	9.82	13	Complies

Configuration IEEE 802.11ac 40MHz / Ant. 1 + Ant. 2

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
QPSK(MCS2)	5190MHz	9.03	13	Complies
16QAM(MCS3)	5190MHz	9.62	13	Complies
64QAM(MCS5)	5190MHz	9.57	13	Complies
256QAM(MCS8)	5190MHz	9.77	13	Complies

Configuration IEEE 802.11ac 80MHz / Ant. 1 + Ant. 2


Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
QPSK(MCS2)	5210MHz	9.37	13	Complies
16QAM(MCS3)	5210MHz	9.60	13	Complies
64QAM(MCS5)	5210MHz	9.64	13	Complies
256QAM(MCS8)	5210MHz	10.19	13	Complies

Note: All the test values were listed in the report.

For plots, only the modulation with worse result was shown.


For non-beamforming mode:

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 20MHz / Ant. 1 + Ant. 2 / 16QAM(MCS3)
/ 5180 MHz

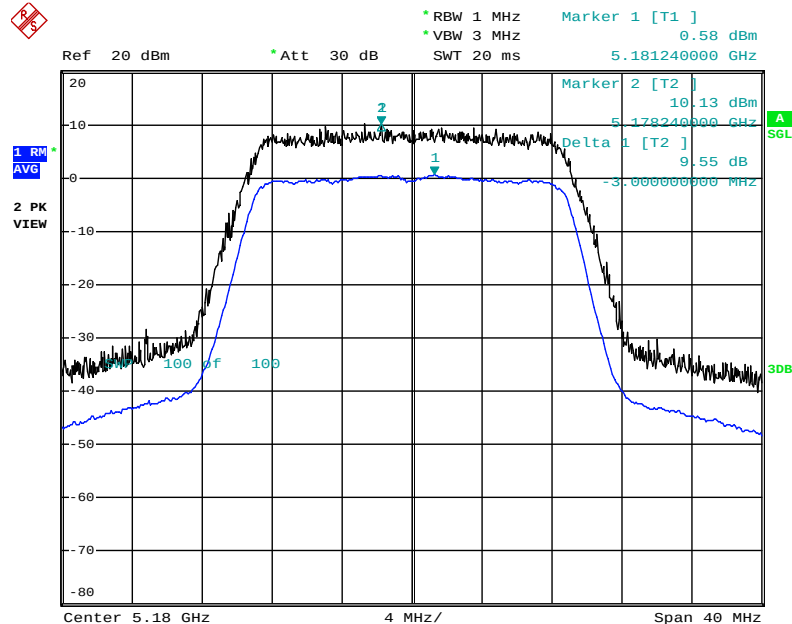


Date: 18.NOV.2013 21:24:45

Peak Excursion Plot on Configuration IEEE 802.11n MCS0 40MHz / Ant. 1 + Ant. 2 / 64QAM(MCS5)
/ 5190 MHz

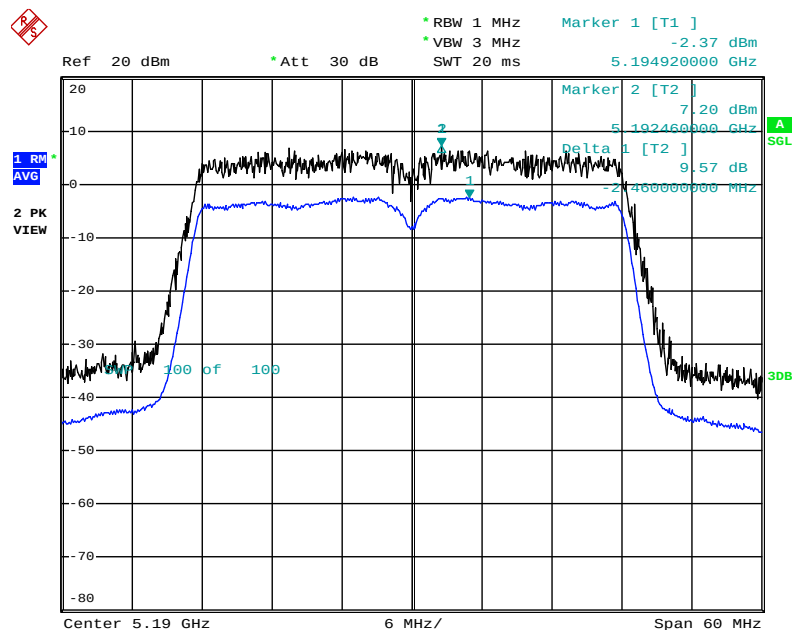

Date: 18.NOV.2013 21:26:16


Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / BPSK (6Mbps) / 5180 MHz

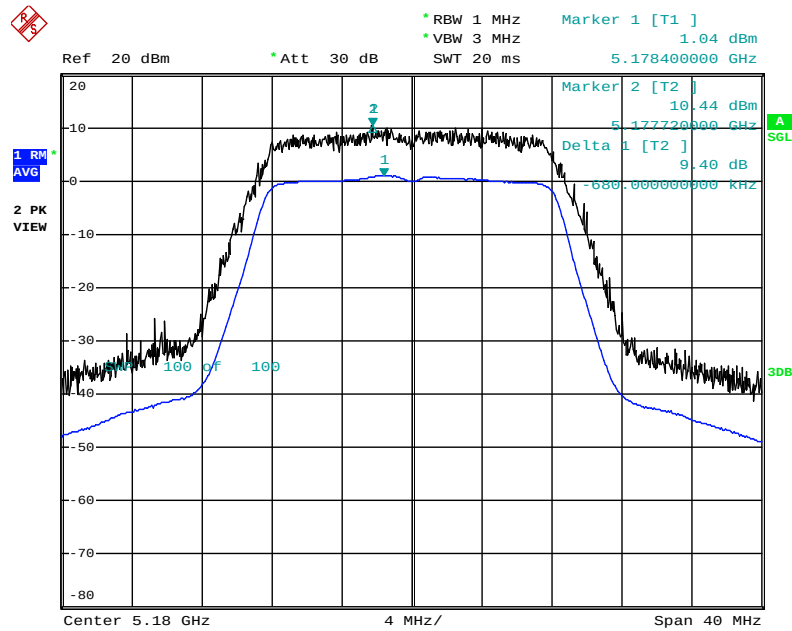

Date: 18.NOV.2013 21:21:31


For beamforming mode:

Peak Excursion Plot on Configuration IEEE 802.11ac 20MHz / Ant. 1 + Ant. 2 / 256QAM(MCS8) / 5180 MHz

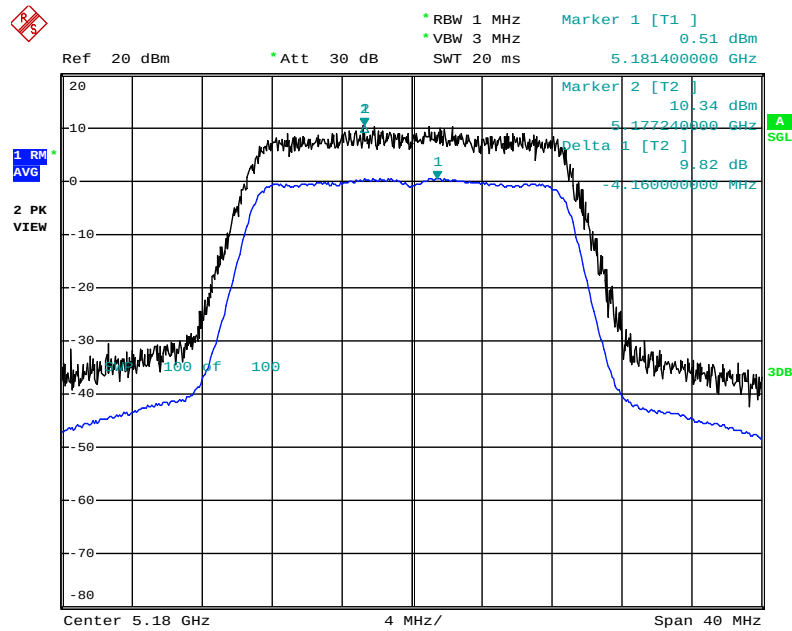


Date: 18.NOV.2013 21:13:41

Peak Excursion Plot on Configuration IEEE 802.11ac 40MHz / Ant. 1 + Ant. 2 / 256QAM(MCS8) / 5190 MHz

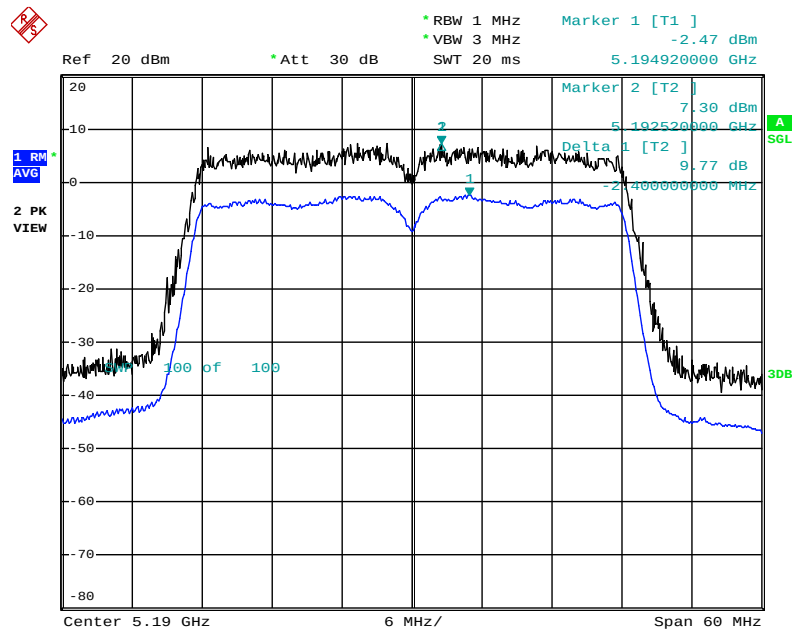

Date: 18.NOV.2013 21:14:19

Peak Excursion Plot on Configuration IEEE 802.11ac 80MHz / Ant. 1 + Ant. 2 / 256QAM(MCS8) / 5210 MHz

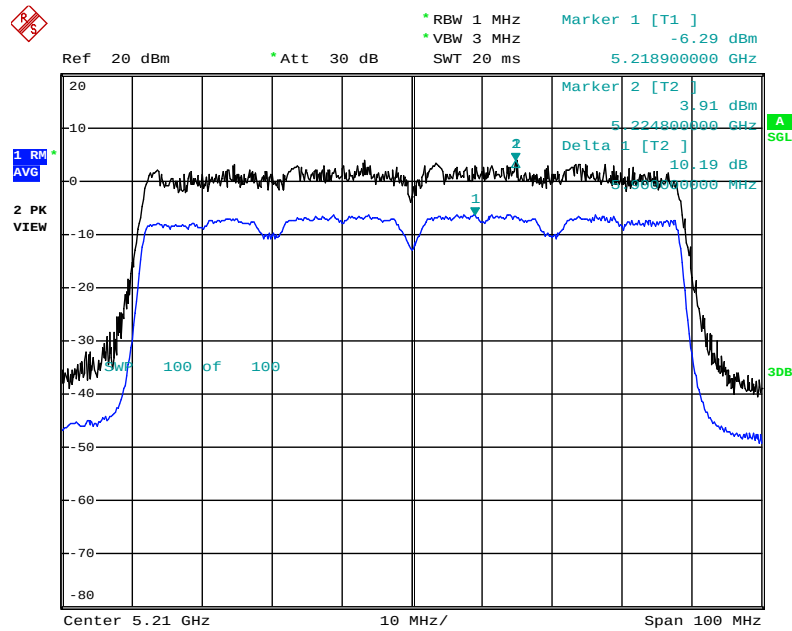

Date: 18.NOV.2013 21:19:18

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1 000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 10 Hz for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3 MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

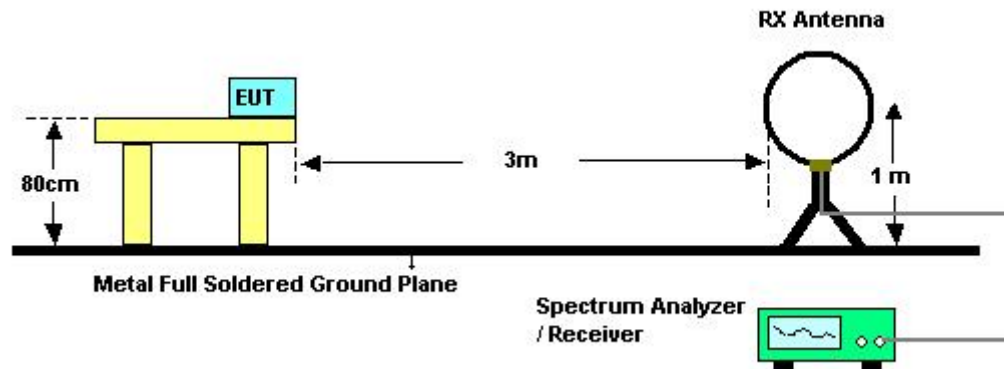

For Radiated Emissions: 30MHz~1GHz

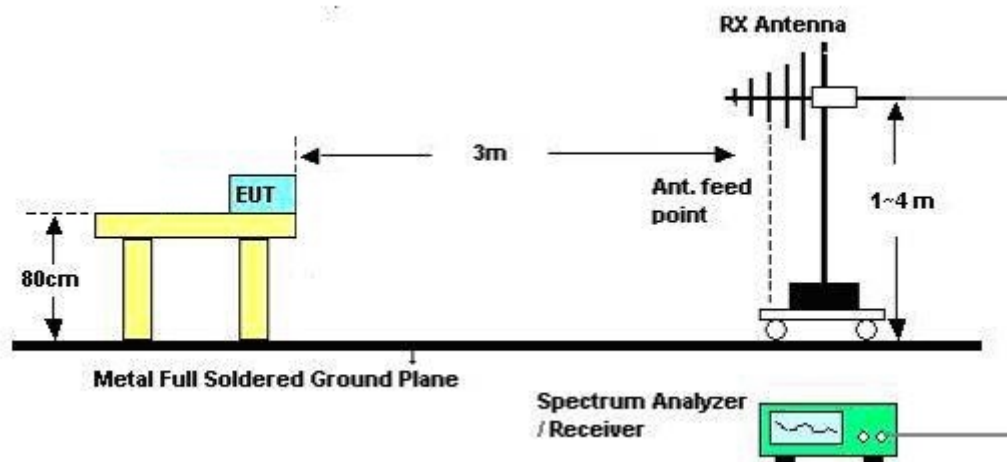

For Radiated Emissions: Above 1GHz

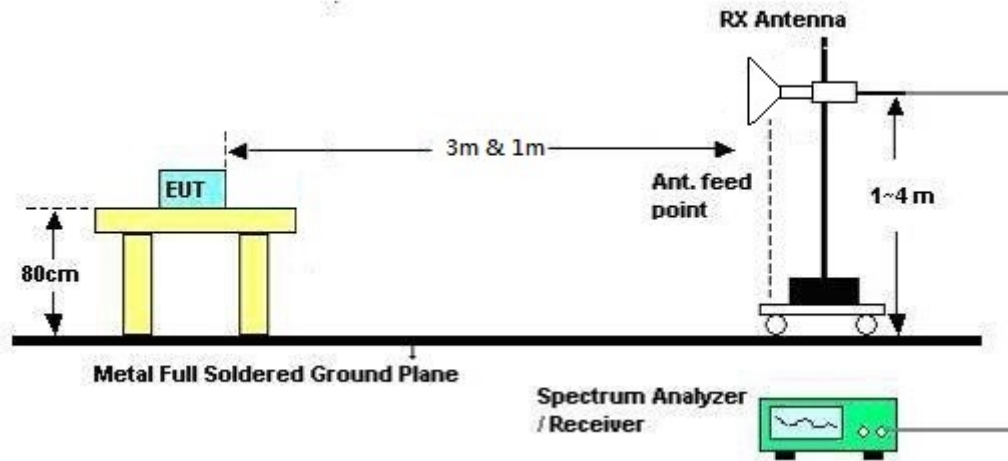

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	Normal Link
Test Date	Nov. 15, 2013		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	Normal Link / Mode 3

Horizontal

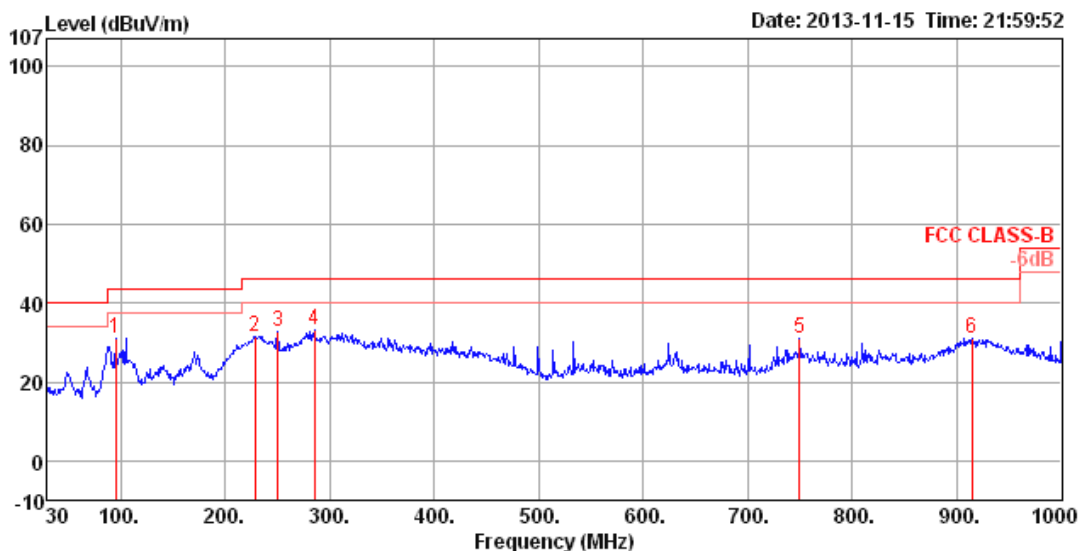

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	94.99	31.15	43.50	-12.35	51.98	1.16	9.58	31.57	100	341	HORIZONTAL	Peak
2	228.85	31.65	46.00	-14.35	51.70	1.83	9.57	31.45	150	265	HORIZONTAL	Peak
3	250.19	32.92	46.00	-13.08	50.60	1.90	11.91	31.49	125	269	HORIZONTAL	Peak
4	285.11	33.09	46.00	-12.91	50.00	2.05	12.58	31.54	100	258	HORIZONTAL	Peak
5	749.74	31.02	46.00	-14.98	39.17	3.53	19.69	31.37	125	136	HORIZONTAL	Peak
6	914.64	31.21	46.00	-14.79	37.72	3.99	20.68	31.18	100	136	HORIZONTAL	Peak

Vertical

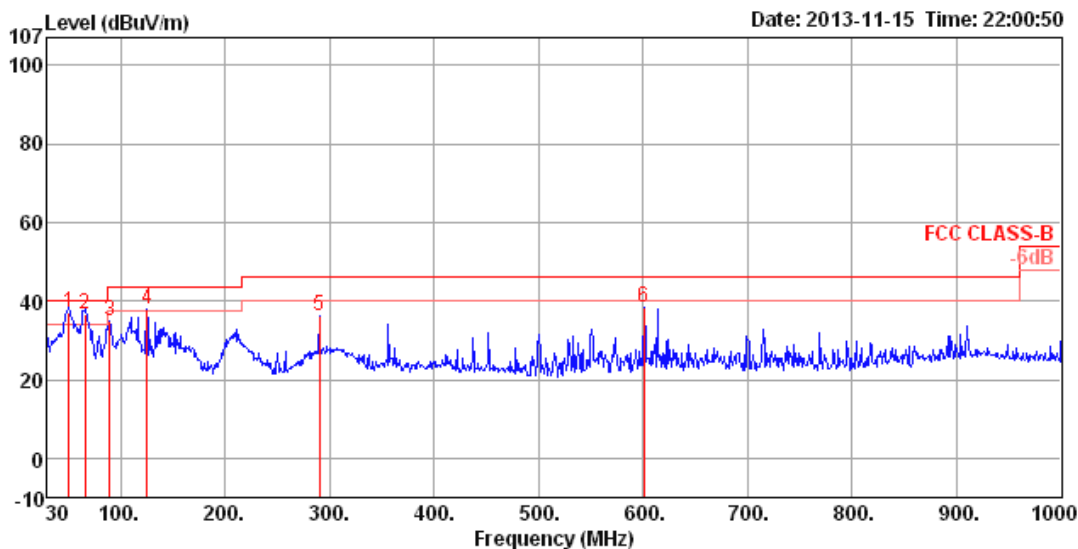

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	50.37	36.94	40.00	-3.06	60.45	0.84	7.44	31.79	100	201	VERTICAL QP
2	65.89	36.44	40.00	-3.56	62.40	0.96	4.90	31.82	300	157	VERTICAL QP
3	89.17	34.95	43.50	-8.55	56.89	1.12	8.54	31.60	100	111	VERTICAL Peak
4	125.06	38.12	43.50	-5.38	56.63	1.33	11.73	31.57	125	219	VERTICAL Peak
5	289.96	36.20	46.00	-9.80	52.96	2.08	12.69	31.53	150	138	VERTICAL Peak
6	600.36	38.26	46.00	-7.74	47.93	3.12	18.45	31.24	200	164	VERTICAL Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

For non-beamforming mode:

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 20MHz CH 36 / Ant. 1 + Ant. 2
Test Date	Nov. 09, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
						dB	dB/m	dB			Pol/Phase
1	15560.99	49.21	74.00	-24.79	40.76	6.13	37.63	35.31	Peak	100	318 HORIZONTAL
2	15568.53	36.11	54.00	-17.89	27.68	6.13	37.63	35.33	Average	100	318 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
						dB	dB/m	dB			Pol/Phase
1	15565.80	49.14	74.00	-24.86	40.69	6.13	37.65	35.33	Peak	100	85 VERTICAL
2	15576.22	36.16	54.00	-17.84	27.75	6.13	37.61	35.33	Average	100	85 VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 20MHz CH 40 / Ant. 1 + Ant. 2
Test Date	Nov. 09, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15595.67	50.46	74.00	-23.54	42.07	6.13	37.60	35.34	Peak	100	125 HORIZONTAL
2	15598.62	35.71	54.00	-18.29	27.32	6.13	37.60	35.34	Average	100	125 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15592.64	49.13	74.00	-24.87	40.74	6.13	37.60	35.34	Peak	100	267 VERTICAL
2	15594.49	35.21	54.00	-18.79	26.82	6.13	37.60	35.34	Average	100	267 VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 20MHz CH 48 / Ant. 1 + Ant. 2
Test Date	Nov. 09, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15690.03	36.78	54.00	-17.22	28.50	6.14	37.51	35.37	Average	100	193	HORIZONTAL
2	15745.48	49.58	74.00	-24.42	41.41	6.14	37.44	35.41	Peak	100	193	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15691.47	36.67	54.00	-17.33	28.42	6.14	37.49	35.38	Average	100	135	VERTICAL
2	15762.63	50.37	74.00	-23.63	42.22	6.14	37.42	35.41	Peak	100	135	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 40MHz CH 38 / Ant. 1 + Ant. 2
Test Date	Nov. 09, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15568.72	36.18	54.00	-17.82	27.75	6.13	37.63	35.33	Average	100	285	HORIZONTAL
2	15578.49	49.99	74.00	-24.01	41.58	6.13	37.61	35.33	Peak	100	285	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15532.82	36.35	54.00	-17.65	27.78	6.13	37.73	35.29	Average	100	149	VERTICAL
2	15536.99	50.05	74.00	-23.95	41.48	6.13	37.73	35.29	Peak	100	149	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 40MHz CH 46 / Ant. 1 + Ant. 2
Test Date	Nov. 09, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15648.97	49.96	74.00	-24.04	41.64	6.14	37.54	35.36	100	282	HORIZONTAL
2	15693.21	36.30	54.00	-17.70	28.05	6.14	37.49	35.38	100	282	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15669.01	36.32	54.00	-17.68	28.02	6.14	37.53	35.37	100	131	VERTICAL
2	15703.62	49.42	74.00	-24.58	41.17	6.14	37.49	35.38	100	131	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11a CH 36 / Ant. 1 + Ant. 2
Test Date	Nov. 09, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15541.46	37.96	54.00	-16.04	29.49	6.13	37.65	35.31	Average	100	338	HORIZONTAL
2	15542.90	51.03	74.00	-22.97	42.56	6.13	37.65	35.31	Peak	100	338	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15542.04	51.66	74.00	-22.34	43.15	6.13	37.69	35.31	Peak	100	196	VERTICAL
2	15542.61	38.05	54.00	-15.95	29.54	6.13	37.69	35.31	Average	100	196	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11a CH 40 / Ant. 1 + Ant. 2
Test Date	Nov. 12, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15598.88	50.11	74.00	-23.89	41.72	6.13	37.60	35.34	Peak	100	158	HORIZONTAL
2	15600.69	37.95	54.00	-16.05	29.56	6.13	37.60	35.34	Average	100	158	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15602.21	51.80	74.00	-22.20	43.41	6.13	37.60	35.34	Peak	100	289	VERTICAL
2	15604.31	37.89	54.00	-16.11	29.50	6.13	37.60	35.34	Average	100	289	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11a CH 48 / Ant. 1 + Ant. 2
Test Date	Nov. 09, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15715.48	37.45	54.00	-16.55	29.21	6.14	37.48	35.38	Average	100	119	HORIZONTAL
2	15721.22	50.24	74.00	-23.76	42.01	6.14	37.48	35.39	Peak	100	119	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15716.75	51.33	74.00	-22.67	43.10	6.14	37.48	35.39	Peak	100	310	VERTICAL
2	15722.85	37.36	54.00	-16.64	29.13	6.14	37.48	35.39	Average	100	310	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For beamforming mode:

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS2/Nss1 20MHz CH 36 / Ant. 1 + Ant. 2
Test Date	Nov. 12, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15539.34	36.84	54.00	-17.16	28.37	6.13	37.65	35.31	Average	101	303	HORIZONTAL
2	15543.73	51.08	74.00	-22.92	42.61	6.13	37.65	35.31	Peak	101	303	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15538.84	36.86	54.00	-17.14	28.35	6.13	37.69	35.31	Average	101	88	VERTICAL
2	15540.25	50.85	74.00	-23.15	42.34	6.13	37.69	35.31	Peak	101	88	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS2/Nss1 20MHz CH 40 / Ant. 1 + Ant. 2
Test Date	Nov. 12, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15593.33	36.89	54.00	-17.11	28.50	6.13	37.60	35.34	Average	100	129	HORIZONTAL
2	15595.19	48.92	74.00	-25.08	40.53	6.13	37.60	35.34	Peak	100	129	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15594.07	36.97	54.00	-17.03	28.58	6.13	37.60	35.34	Average	100	223	VERTICAL
2	15602.37	49.03	74.00	-24.97	40.64	6.13	37.60	35.34	Peak	100	223	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS2/Nss1 20MHz CH 48 / Ant. 1 + Ant. 2
Test Date	Nov. 12, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15719.26	36.94	54.00	-17.06	28.71	6.14	37.48	35.39	Average	100	307	HORIZONTAL
2	15725.74	51.10	74.00	-22.90	42.89	6.14	37.46	35.39	Peak	100	307	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15712.02	49.48	74.00	-24.52	41.24	6.14	37.48	35.38	Peak	100	13	VERTICAL
2	15712.72	36.98	54.00	-17.02	28.74	6.14	37.48	35.38	Average	100	13	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS2/Nss1 40MHz CH 38 / Ant. 1 + Ant. 2
Test Date	Nov. 12, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15554.87	50.03	74.00	-23.97	41.58	6.13	37.63	35.31	Peak	100	47 HORIZONTAL
2	15573.65	37.39	54.00	-16.61	28.98	6.13	37.61	35.33	Average	100	47 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15561.22	49.23	74.00	-24.77	40.76	6.13	37.65	35.31	Peak	100	184 VERTICAL
2	15577.18	37.30	54.00	-16.70	28.89	6.13	37.61	35.33	Average	100	184 VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS2/Nss1 40MHz CH 46 / Ant. 1 + Ant. 2
Test Date	Nov. 12, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15700.77	37.38	54.00	-16.62	29.13	6.14	37.49	35.38	Average	100	292	HORIZONTAL
2	15700.77	46.85	74.00	-27.15	38.60	6.14	37.49	35.38	Peak	100	292	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15673.59	49.09	74.00	-24.91	40.79	6.14	37.53	35.37	Peak	100	159	VERTICAL
2	15689.36	37.25	54.00	-16.75	28.97	6.14	37.51	35.37	Average	100	159	VERTICAL

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS2/Nss1 80MHz CH 42 / Ant. 1 + Ant. 2
Test Date	Nov. 12, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15628.04	36.75	54.00	-17.25	28.40	6.14	37.56	35.35	Average	100	198	HORIZONTAL
2	15639.42	49.85	74.00	-24.15	41.50	6.14	37.56	35.35	Peak	100	198	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15628.17	36.81	54.00	-17.19	28.46	6.14	37.56	35.35	Average	100	290	VERTICAL
2	15638.17	49.14	74.00	-24.86	40.79	6.14	37.56	35.35	Peak	100	290	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for Peak

4.7.3. Test Procedures

- The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

For non-beamforming mode:

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 20MHz CH 36, 40, 48 / Ant. 1 + Ant. 2
Test Date	Nov. 09, 2013		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5102.24	64.45	74.00	-9.55	27.45	3.42	33.58	0.00	Peak	100	326 VERTICAL
2	5107.37	53.53	54.00	-0.47	16.53	3.42	33.58	0.00	Average	100	326 VERTICAL
3	5182.24	102.31			65.14	3.44	33.73	0.00	Average	100	326 VERTICAL
4	5182.24	112.64			75.47	3.44	33.73	0.00	Peak	100	326 VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5117.00	63.04	74.00	-10.96	26.01	3.42	33.61	0.00	Peak	100	285 VERTICAL
2	5118.00	53.46	54.00	-0.54	16.43	3.42	33.61	0.00	Average	100	285 VERTICAL
3	5198.00	113.80			76.59	3.45	33.76	0.00	Peak	100	285 VERTICAL
4	5200.00	103.09			65.88	3.45	33.76	0.00	Average	100	285 VERTICAL
5	5358.00	53.73	54.00	-0.27	16.21	3.49	34.03	0.00	Average	100	285 VERTICAL
6	5367.00	63.88	74.00	-10.12	26.33	3.49	34.06	0.00	Peak	100	285 VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5238.40	114.49			77.21	3.46	33.82	0.00	Peak	100	250 VERTICAL
2	5240.80	103.82			66.54	3.46	33.82	0.00	Average	100	250 VERTICAL
3	5401.28	53.45	54.00	-0.55	15.82	3.51	34.12	0.00	Average	100	250 VERTICAL
4	5402.89	63.30	74.00	-10.70	25.67	3.51	34.12	0.00	Peak	100	250 VERTICAL

Item 1, 2 are the fundamental frequency at 5240 MHz.

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11n MCS0 40MHz CH 38, 46 / Ant. 1 + Ant. 2
Test Date	Nov. 09, 2013		

Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5150.00	53.86	54.00	-0.14	16.76	3.43	33.67	0.00 Average	100	289	VERTICAL
2	5150.00	67.80	74.00	-6.20	30.70	3.43	33.67	0.00 Peak	100	289	VERTICAL
3	5185.19	97.75			60.58	3.44	33.73	0.00 Average	100	289	VERTICAL
4	5185.99	108.24			71.07	3.44	33.73	0.00 Peak	100	289	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5147.60	46.70	54.00	-7.30	9.60	3.43	33.67	0.00	Average	100	246	VERTICAL
2	5148.40	58.02	74.00	-15.98	20.92	3.43	33.67	0.00	Peak	100	246	VERTICAL
3	5235.61	97.40			60.12	3.46	33.82	0.00	Average	100	246	VERTICAL
4	5242.82	109.14			71.86	3.46	33.82	0.00	Peak	100	246	VERTICAL
5	5385.26	53.32	54.00	-0.68	15.73	3.50	34.09	0.00	Average	100	246	VERTICAL
6	5393.27	63.75	74.00	-10.25	26.16	3.50	34.09	0.00	Peak	100	246	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11a CH 36, 40, 48 / Ant. 1 + Ant. 2
Test Date	Nov. 08, 2013 ~ Nov. 12, 2013		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5104.49	63.83	74.00	-10.17	26.83	3.42	33.58	0.00	Peak	100	324	VERTICAL
2	5104.97	53.69	54.00	-0.31	16.69	3.42	33.58	0.00	Average	100	324	VERTICAL
3	5179.04	113.32			76.15	3.44	33.73	0.00	Peak	100	324	VERTICAL
4	5179.40	103.71			66.54	3.44	33.73	0.00	Average	100	324	VERTICAL
5	5263.14	65.60	68.20	-2.60	28.26	3.46	33.88	0.00	Peak	100	324	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5116.35	62.00	74.00	-12.00	24.97	3.42	33.61	0.00	Peak	100	248	VERTICAL
2	5121.15	51.31	54.00	-2.69	14.27	3.43	33.61	0.00	Average	100	248	VERTICAL
3	5200.80	102.45			65.24	3.45	33.76	0.00	Average	100	248	VERTICAL
4	5200.80	111.60			74.39	3.45	33.76	0.00	Peak	100	248	VERTICAL
5	5361.22	63.30	74.00	-10.70	25.78	3.49	34.03	0.00	Peak	100	248	VERTICAL
6	5362.02	53.56	54.00	-0.44	16.04	3.49	34.03	0.00	Average	100	248	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5241.00	106.58			67.44	6.05	33.09	0.00		100	272	VERTICAL
2	5241.00	115.40			76.26	6.05	33.09	0.00		100	272	VERTICAL
3	5401.50	53.73	54.00	-0.27	13.99	6.14	33.60	0.00		100	272	VERTICAL
4	5401.50	63.85	74.00	-10.15	24.11	6.14	33.60	0.00		100	272	VERTICAL

Item 1, 2 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

For beamforming mode:

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS2/Nss1 20MHz CH 36, 40, 48 / Ant. 1 + Ant. 2
Test Date	Nov. 12, 2013		

Channel 36

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	5091.51	53.77	54.00	-0.23	16.81	3.41	33.55	0.00	Average	101	210	VERTICAL
2	5091.51	63.98	74.00	-10.02	27.02	3.41	33.55	0.00	Peak	101	210	VERTICAL
3	5172.79	114.89			77.75	3.44	33.70	0.00	Peak	101	210	VERTICAL
4	5173.59	103.05			65.91	3.44	33.70	0.00	Average	101	210	VERTICAL
5	5350.00	45.61	54.00	-8.39	8.09	3.49	34.03	0.00	Average	101	210	VERTICAL
6	5350.00	57.62	74.00	-16.38	20.10	3.49	34.03	0.00	Peak	101	210	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	5115.55	64.44	74.00	-9.56	27.41	3.42	33.61	0.00	Peak	100	321	VERTICAL
2	5116.35	53.82	54.00	-0.18	16.79	3.42	33.61	0.00	Average	100	321	VERTICAL
3	5200.80	104.38			67.17	3.45	33.76	0.00	Average	100	321	VERTICAL
4	5202.40	115.89			78.68	3.45	33.76	0.00	Peak	100	321	VERTICAL
5	5367.63	53.23	54.00	-0.77	15.68	3.49	34.06	0.00	Average	100	321	VERTICAL
6	5368.43	63.33	74.00	-10.67	25.78	3.49	34.06	0.00	Peak	100	321	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	5150.00	46.15	54.00	-7.85	9.05	3.43	33.67	0.00	Average	101	213	VERTICAL
2	5150.00	53.00	74.00	-21.00	15.90	3.43	33.67	0.00	Peak	101	213	VERTICAL
3	5244.01	103.63			66.35	3.46	33.82	0.00	Average	101	213	VERTICAL
4	5244.01	114.58			77.30	3.46	33.82	0.00	Peak	101	213	VERTICAL
5	5398.08	64.69	74.00	-9.31	27.10	3.50	34.09	0.00	Peak	101	213	VERTICAL
6	5406.70	53.85	54.00	-0.15	16.22	3.51	34.12	0.00	Average	101	213	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS2/Nss1 40MHz CH 38, 46 / Ant. 1 + Ant. 2
Test Date	Nov. 12, 2013		

Channel 38

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	5150.00	53.96	54.00	-0.04	16.86	3.43	33.67	0.00	Average	101	248	VERTICAL
2	5150.00	67.36	74.00	-6.64	30.26	3.43	33.67	0.00	Peak	101	248	VERTICAL
3	5185.19	110.39			73.22	3.44	33.73	0.00	Peak	101	248	VERTICAL
4	5185.99	98.23			61.06	3.44	33.73	0.00	Average	101	248	VERTICAL
5	5351.60	49.72	54.00	-4.28	12.20	3.49	34.03	0.00	Average	101	248	VERTICAL
6	5353.21	60.53	74.00	-13.47	23.01	3.49	34.03	0.00	Peak	101	248	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	5136.38	53.53	54.00	-0.47	16.46	3.43	33.64	0.00	Average	100	327	VERTICAL
2	5137.18	64.22	74.00	-9.78	27.15	3.43	33.64	0.00	Peak	100	327	VERTICAL
3	5213.17	102.10			64.86	3.45	33.79	0.00	Average	100	327	VERTICAL
4	5213.97	114.27			77.03	3.45	33.79	0.00	Peak	100	327	VERTICAL
5	5394.07	51.42	54.00	-2.58	13.83	3.50	34.09	0.00	Average	100	327	VERTICAL
6	5395.67	62.13	74.00	-11.87	24.54	3.50	34.09	0.00	Peak	100	327	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	25°C	Humidity	54%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS2/Nss1 80MHz CH 42 / Ant. 1 + Ant. 2
Test Date	Nov. 12, 2013		

Channel 42

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	5148.40	53.60	54.00	-0.40	16.50	3.43	33.67	0.00	Average	100	321	VERTICAL
2	5148.40	71.06	74.00	-2.94	33.96	3.43	33.67	0.00	Peak	100	321	VERTICAL
3	5198.78	88.67			51.46	3.45	33.76	0.00	Average	100	321	VERTICAL
4	5198.78	107.57			70.36	3.45	33.76	0.00	Peak	100	321	VERTICAL
5	5396.47	45.45	54.00	-8.55	7.86	3.50	34.09	0.00	Average	100	321	VERTICAL
6	5397.28	58.04	74.00	-15.96	20.45	3.50	34.09	0.00	Peak	100	321	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-30^\circ\text{C} \sim 50^\circ\text{C}$.

4.8.4. Test Setup Layout

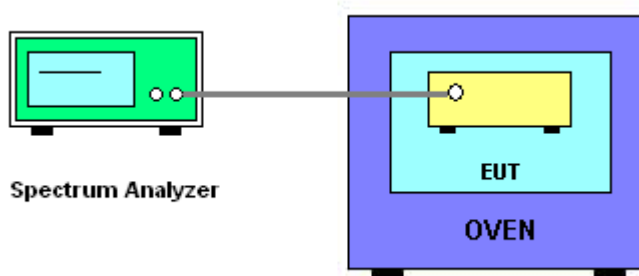

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Temperature	20°C	Humidity	63%
Test Engineer	Benson Peng	Test Date	Nov. 18, 2013

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200 MHz
126.50	5199.9592
110.00	5199.9610
93.50	5199.9580
Max. Deviation (MHz)	0.042000
Max. Deviation (ppm)	8.08

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200 MHz
-30	5199.9590
-20	5199.9598
-10	5199.9608
0	5199.9600
10	5199.9602
20	5199.9610
30	5199.9614
40	5199.9620
50	5199.9638
Max. Deviation (MHz)	0.041000
Max. Deviation (ppm)	7.88

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9 kHz ~ 2.75 GHz	Apr. 12, 2013	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150 kHz ~ 100 MHz	Nov. 26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127478	9 kHz ~ 30 MHz	Jul. 17, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150 kHz ~ 30 MHz	Dec. 04, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9kHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Nov. 26, 2012	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Nov. 27, 2012	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 04, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz ~ 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. MEASUREMENT UNCERTAINTY

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch Receiver VSWR 1 = AMN/LISN VSWR 2 =	-0.080	dB	U-shaped	0.060
Combined standard uncertainty $U_c(y)$				1.2
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				2.4

Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.173	dB	K=1	0.086
Cable loss	± 0.174	dB	K=2	0.087
Antenna gain	± 0.169	dB	K=2	0.084
Site imperfection	± 0.433	dB	Triangular	0.214
Pre-amplifier gain	± 0.366	dB	K=2	0.183
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.778
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.555

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.191	dB	K=1	0.095
Cable loss	±0.169	dB	K=2	0.084
Antenna gain	±0.191	dB	K=2	0.096
Site imperfection	±0.582	dB	Triangular	0.291
Pre-amplifier gain	±0.304	dB	K=2	0.152
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.839
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.678

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.186	dB	K=1	0.093
Cable loss	±0.167	dB	K=2	0.083
Antenna gain	±0.190	dB	K=2	0.095
Site imperfection	±0.488	dB	Triangular	0.244
Pre-amplifier gain	±0.269	dB	K=2	0.134
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.771
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.541

Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	± 0.038	dB	K=2	0.019
Attenuator	± 0.047	dB	K=2	0.024
Power Meter specification	± 0.300	dB	Triangular	0.150
Power Sensor specification	± 0.300	dB	Rectangular	0.150
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				0.863
Measuring uncertainty for a level of confidence of 95% $U = 2U_c(y)$				1.726