



SPORTON International Inc.

No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.
Ph: 886-3-656-9065 / FAX: 886-3-656-9085 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	NETGEAR, Inc.
Applicant Address	350 East Plumeria Drive, San Jose, California 95134, USA
FCC ID	PY313200233

Product Name	R7000 Smart WiFi Router
Brand Name	NETGEAR
Model No.	R7000
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Jul. 08, 2013
Final Test Date	Jul. 25, 2013
Submission Type	Original Equipment
Operating Mode	Master

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac (5150 ~ 5250MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart E, KDB 789033 D01 v01r03 and KDB 662911 D01 v02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes	8
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units	10
3.8. Table for Parameters of Test Software Setting	11
3.9. EUT Operation during Test	11
3.10. Duty Cycle.....	12
3.11. Test Configurations	15
4. TEST RESULT	18
4.1. AC Power Line Conducted Emissions Measurement.....	18
4.2. 26dB Bandwidth & 99% Occupied Bandwidth Measurement.....	22
4.3. Maximum Conducted Output Power Measurement.....	31
4.4. Power Spectral Density Measurement	34
4.5. Peak Excursion Measurement	40
4.6. Radiated Emissions Measurement	45
4.7. Band Edge Emissions Measurement	61
4.8. Frequency Stability Measurement	67
4.9. Antenna Requirements	69
5. LIST OF MEASURING EQUIPMENTS	70
6. TEST LOCATION.....	72
7. MEASUREMENT UNCERTAINTY.....	73
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. CO-LOCATION REPORT.....	C1 ~ C3



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR372429AB	Rev. 01	Initial issue of report	Aug. 06, 2013



1. CERTIFICATE OF COMPLIANCE

Product Name : R7000 Smart WiFi Router
Brand Name : NETGEAR
Model No. : R7000
Applicant : NETGEAR, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 08, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'.

Sam Chen
SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	7.54 dB
4.2	15.407(a)	26dB Spectrum Bandwidth & 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.01 dB
4.4	15.407(a)	Power Spectral Density	Complies	1.30 dB
4.5	15.407(a)	Peak Excursion	Complies	2.15 dB
4.6	15.407(b)	Radiated Emissions	Complies	0.02 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.07 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n / ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	802.11ac MCS0/Nss1 (20MHz): 18.24 MHz ; 802.11ac MCS0/Nss1 (40MHz): 36.48 MHz ; 802.11ac MCS0/Nss1 (80MHz): 76.18 MHz
Maximum Conducted Output Power	802.11ac MCS0/Nss1 (20MHz): 16.98 dBm ; 802.11ac MCS0/Nss1 (40MHz): 16.99 dBm ; 802.11ac MCS0/Nss1 (80MHz): 16.99 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Note : The product has beamforming function for 802.11 n/ac.

IEEE 802.11a

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250MHz
Channel Number	11a: 4
Channel Band Width (99%)	11a: 17.28 MHz
Maximum Conducted Output Power	11a: 16.59 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Three (TX)		
	20 MHz	40 MHz	80MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

Note : The product has beamforming function for 802.11 n/ac.

IEEE 11n / ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS0-23
802.11n (HT40)	3	MCS0-23
802.11ac (VHT20)	3	MCS 0-9/Nss1-3
802.11ac (VHT40)	3	MCS 0-9/Nss1-3
802.11ac (VHT80)	3	MCS 0-9/Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: The test result of beam-forming mode is worse case than non beam-forming mode, so it is recorded in the test report for 802.11n/ac.

3.2. Accessories

Power	Brand	Model	P/N	Rating
Adapter 1	NETGEAR	AD898F20	332-10613-01	Input:100-240Vac, 50/60Hz, 1.0A Output:12Vdc, 3.5A
Adapter 2	NETGEAR	2AAF042F NA	332-10618-01	Input:100-240Vac, 50/60Hz, 1.5A Output:12Vdc, 3.5A
Others				
RJ-45 Cable*1: Shielded, 1.4m				

3.3. Table for Filed Antenna

Set	Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
						2.4GHz	5GHz
A	1	-	-	Dipole Antenna	SMA	0.6	0.9
	2	-	-	Dipole Antenna	SMA	0.6	0.9
	3	-	-	Dipole Antenna	SMA	0.6	0.9

Note1: There are two antenna set.

Set B is long 62mm in cable loss than set A, so that set A is worse case and recorded in the report.

Note2: The EUT has three antennas

<For 2.4GHz Band:>


For IEEE 802.11b/g/n/ac mode (3TX/3RX):

Chain 1 ~ Chain 3 could transmit/receive simultaneously.

<For 5GHz Band:>

For IEEE 802.11a/n/ac mode (3TX/3RX):

Chain 1 ~ Chain 3 could transmit/receive simultaneously.

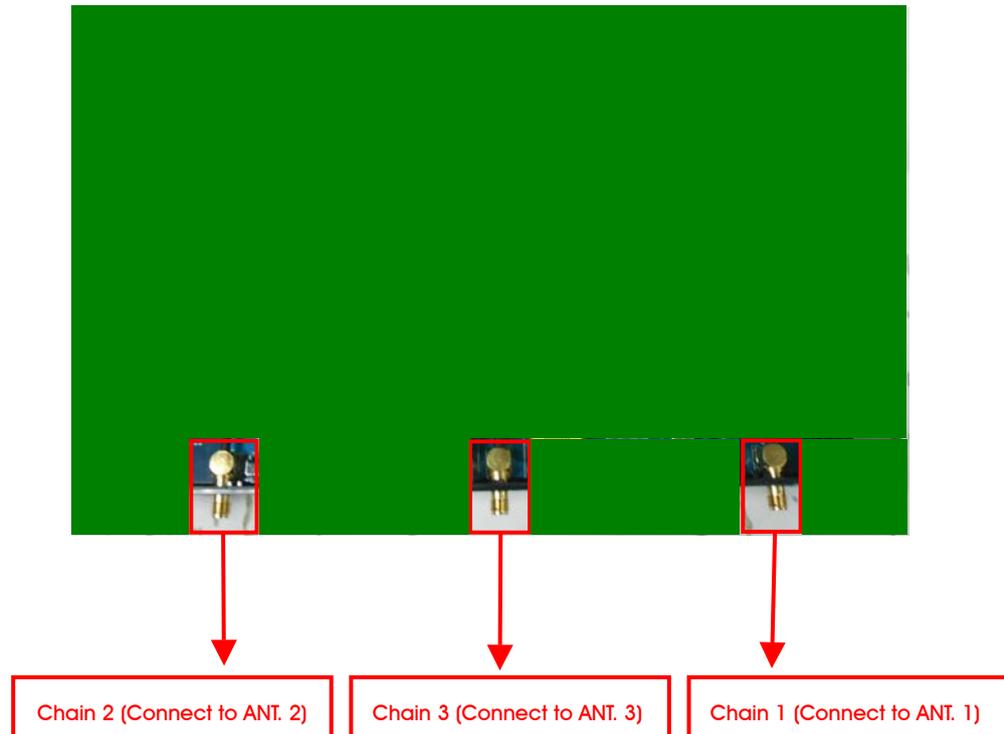

3.4. Table for Carrier Frequencies

The EUT has three bandwidth system.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
AC Power Conducted Emission	Normal link		-	-	-
Max. Conducted Output Power	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	1+2+3
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	1+2+3
	11ac 80MHz	Band 1	MCS0/Nss1	42	1+2+3
	11a	Band 1	6Mbps	36/40/48	1+2+3
Power Spectral Density	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	1+2+3
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	1+2+3
	11ac 80MHz	Band 1	MCS0/Nss1	42	1+2+3
	11a	Band 1	6Mbps	36/40/48	1+2+3
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	1+2+3
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	1+2+3
	11ac 80MHz	Band 1	MCS0/Nss1	42	1+2+3
	11a	Band 1	6Mbps	36/40/48	1+2+3
Peak Excursion	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	1+2+3
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	1+2+3
	11ac 80MHz	Band 1	MCS0/Nss1	42	1+2+3
	11a	Band 1	6Mbps	36/40/48	1+2+3
Radiated Emission Below 1GHz	Normal link		-	-	-
Radiated Emission Above 1GHz	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	1+2+3
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	1+2+3
	11ac 80MHz	Band 1	MCS0/Nss1	42	1+2+3
	11a	Band 1	6Mbps	36/40/48	1+2+3
Band Edge Emission	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	1+2+3
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	1+2+3
	11ac 80MHz	Band 1	MCS0/Nss1	42	1+2+3
	11a	Band 1	6Mbps	36/40/48	1+2+3
Frequency Stability	Un-modulation		-	40	N/A

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. Normal Link - EUT with AC Adapter 1

Mode 2. Normal Link - EUT with AC Adapter 2

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission 30MHz~1MHz test:

Mode 1. Normal Link - EUT with AC Adapter 1

Mode 2. Normal Link - EUT with AC Adapter 2

Mode 2 is the worst case, so it was selected to record in this test report.

For Radiated Emission above 1MHz test:

Mode 1. CTX - Laying of EUT

For MPE and Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Maximum Permissible Exposure (Please refer to Appendix B) and Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

Note1: The test result of beam-forming mode is worse case than non beam-forming mode, so it is recorded in the test report for 802.11n/ac.

Note2: Test mode evaluation description

There are two SKU for PCB board

SKU A: RF switch + internal receive antenna

SKU B. remove RF switch

SKU A is worse case than SKU B so it is recorded the test report.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook*2	DELL	E6400	E2K4965AGNM
Notebook*2	DELL	E6430	QDS-BRCM1049LE
Flash Disk	Silicon	I-Series	DoC
Flash Disk 3.0	ADATA	C103	DoC

For Test Site No: 03CH01-CB

(Radiated Emission 30MHz~1GHz test)

Support Unit	Brand	Model	FCC ID
Notebook*2	DELL	E6400	E2K4965AGNM
Notebook*2	DELL	E6430	QDS-BRCM1049LE
Flash Disk	Silicon	I-Series	DoC
Flash Disk 3.0	ADATA	C103	DoC

(Radiated Emission above 1GHz test) (For Non-Beamforming Mode)

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM

(Radiated Emission above 1GHz test) (For Beamforming Mode)

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM
Notebook	DELL	E6430	QDS-BRCM1049LE
Wlan ac Card	Broadcom	Bcm4360	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11ac MCS0/Nss1 20MHz

Test Software Version	Manual Tool Version:2.0.1.0		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0/Nss1 20MHz	52	51	50

Power Parameters of IEEE 802.11ac MCS0/Nss1 40MHz

Test Software Version	Manual Tool Version:2.0.1.0	
Frequency	5190 MHz	5230 MHz
MCS0/Nss1 40MHz	51	51

Power Parameters of IEEE 802.11ac MCS0/Nss1 80MHz

Test Software Version	Manual Tool Version:2.0.1.0
Frequency	5210 MHz
MCS0/Nss1 80MHz	51

Power Parameters of IEEE 802.11a

Test Software Version	Manual Tool Version:2.0.1.0		
Frequency	5180 MHz	5200 MHz	5240 MHz
11a	50	50	48

3.9. EUT Operation during Test

For non-beamforming mode

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.


The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by Wlan ac Card and transmit duty cycle no less 98%

3.10. Duty Cycle

For non-beamforming mode


IEEE 802.11a

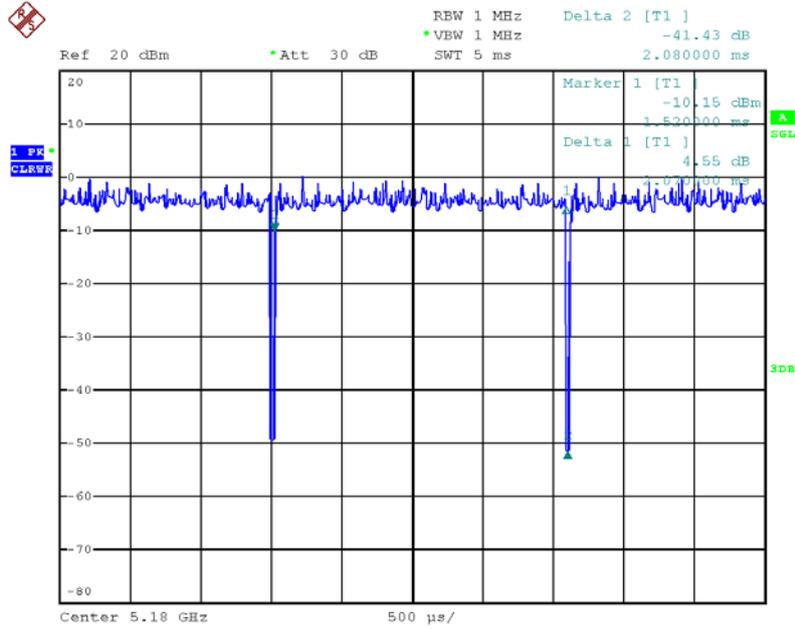

Date: 19.JUL.2013 01:19:20


For beamforming mode

IEEE 802.11ac MCS0/Nss1 20MHz

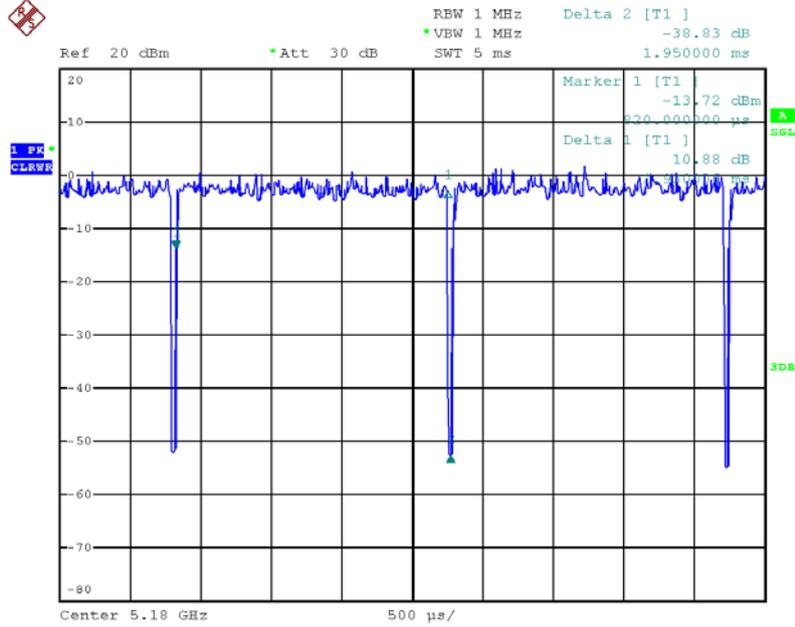


Date: 19.JUL.2013 01:20:21

IEEE 802.11ac MCS0/Nss1 40MHz

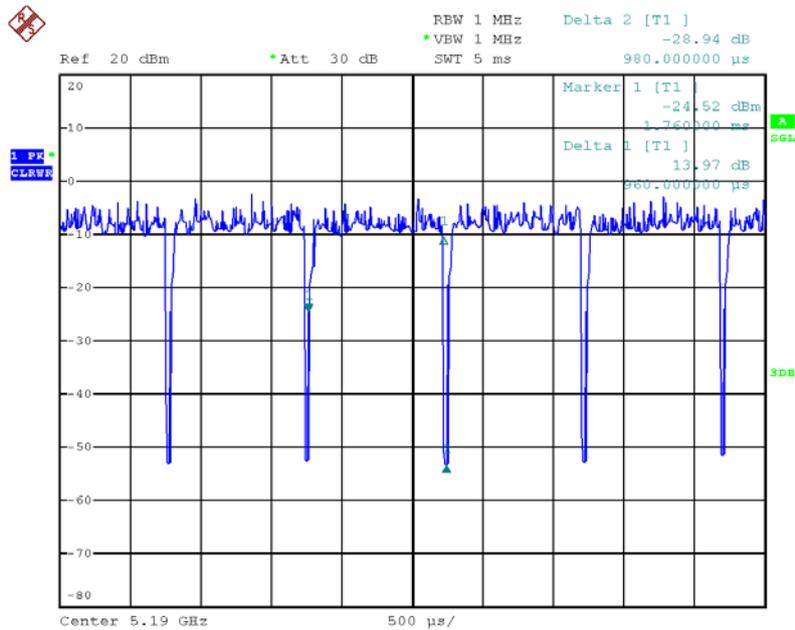

Date: 19.JUL.2013 01:21:31

IEEE 802.11ac MCS0/Nss1 80MHz

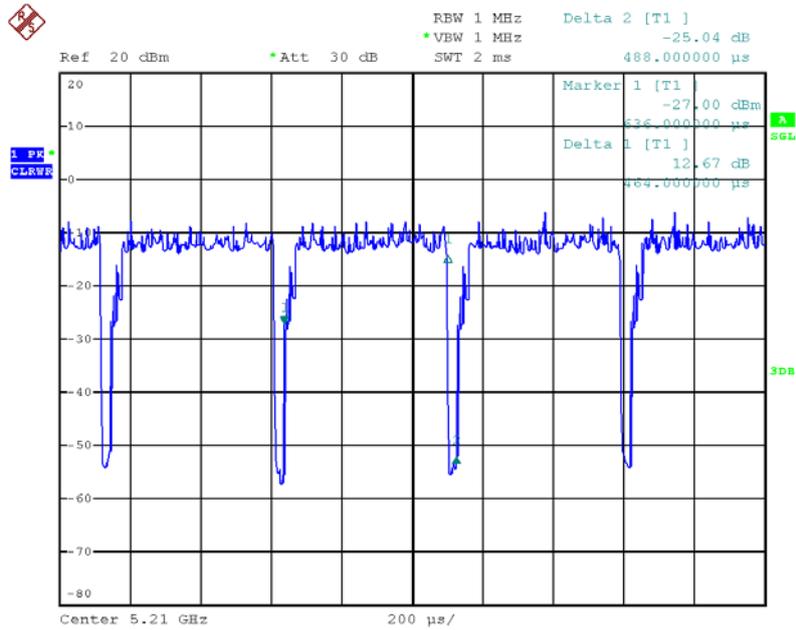


Date: 19.JUL.2013 01:22:54

3.11. Test Configurations

3.11.1. AC Power Line Conduction and Radiation Emissions Test Configuration

Test Configuration: AC Power Line Conduction and Radiated Emission 30MHz~1GHz

Test Mode : Mode 2

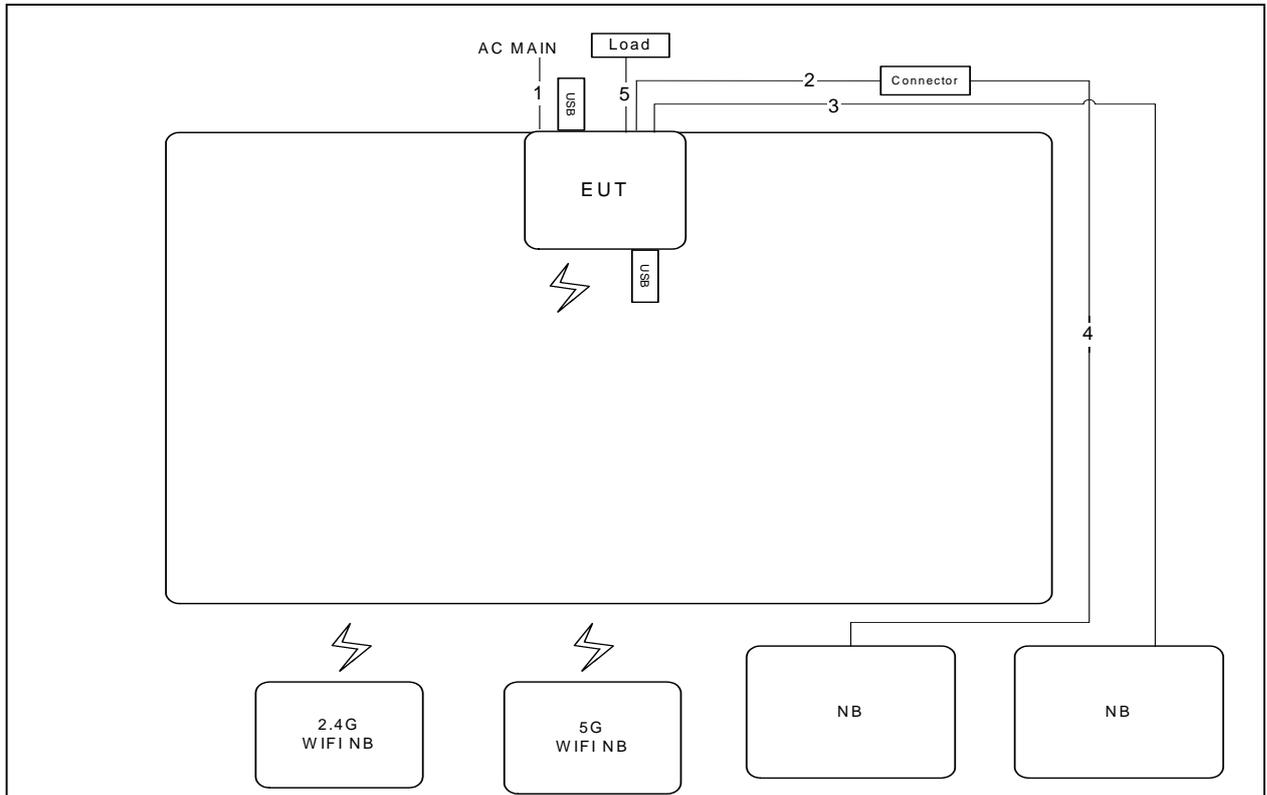


Item	Connection	Shielded	Length(m)
1	AC power cable	No	1.8m
2	RJ-45 cable	Yes	1.4m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m
5	RJ-45 cable	No	1m

3.11.2. Radiation Emissions Test Configuration


Test Configuration: Radiated Emission above 1GHz

For Non-Beamforming Mode / Test Mode: Mode 1

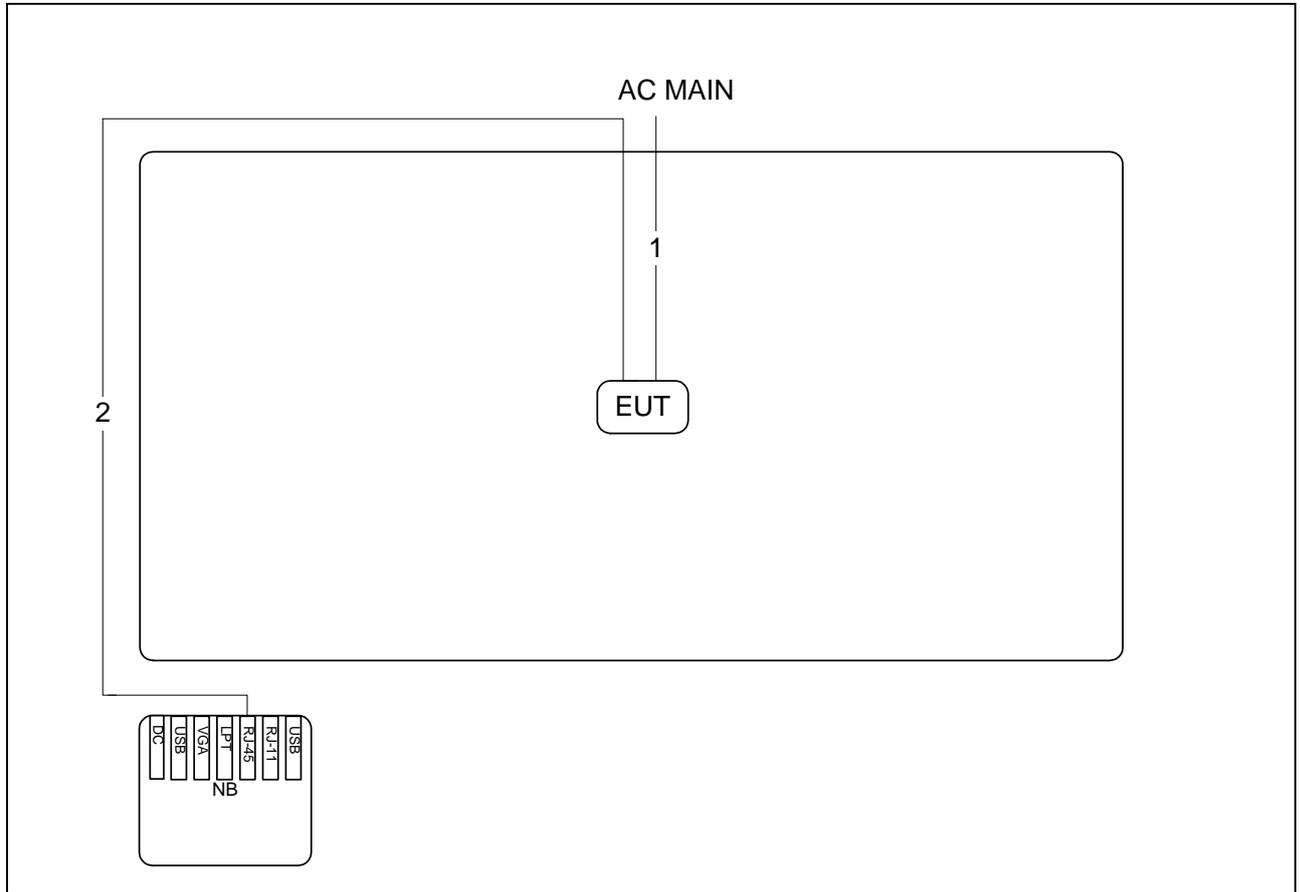

Item	Connection	Shielded	Length(m)
1	AC power cable	No	1.8m
2	RJ-45 cable	No	10m

For Beamforming Mode / Test Mode: Mode 1

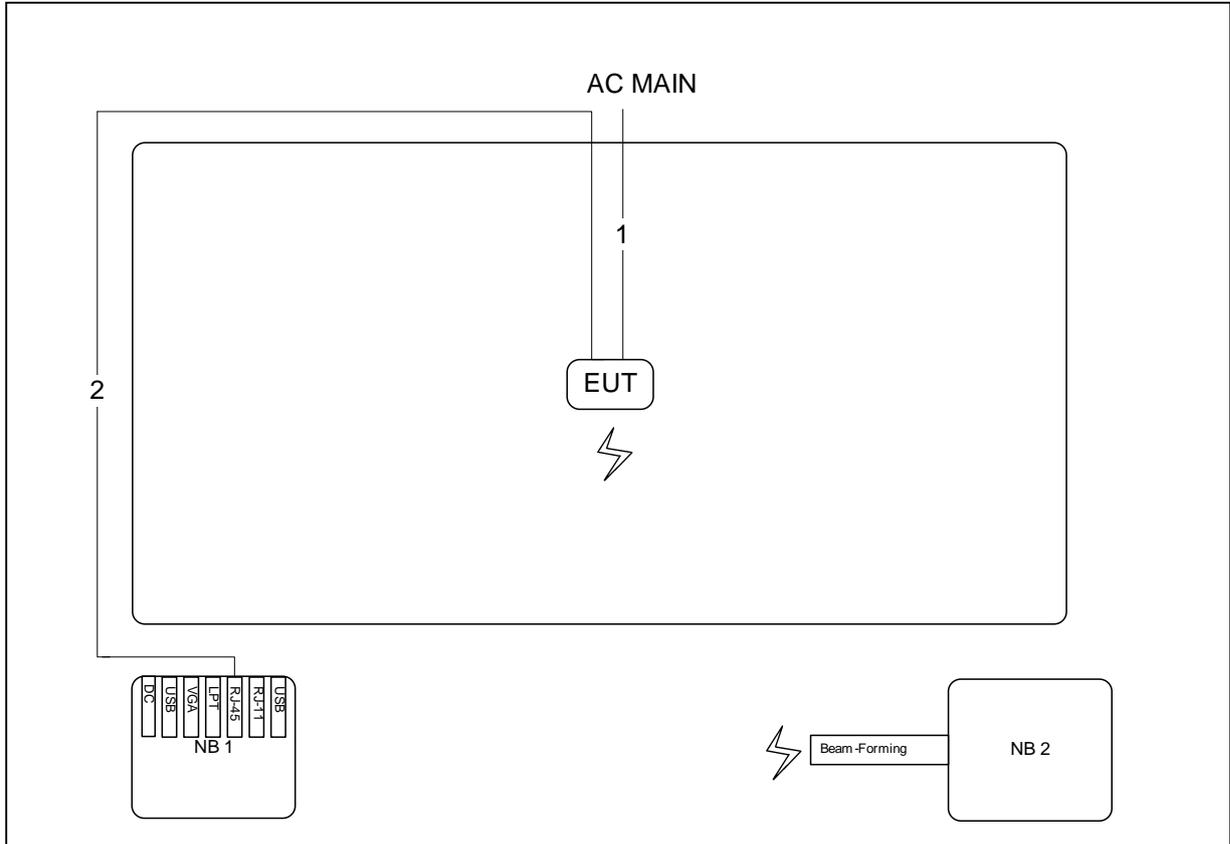

Item	Connection	Shielded	Length(m)
1	AC power cable	No	1.8m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

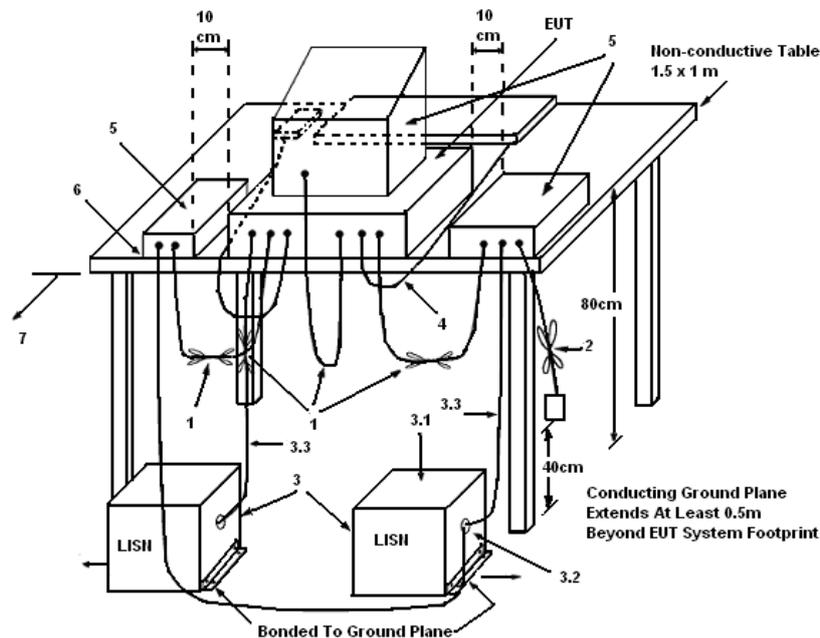

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	51%
Test Engineer	David Tseng	Phase	Line
Configuration	Normal Link / Mode 2		

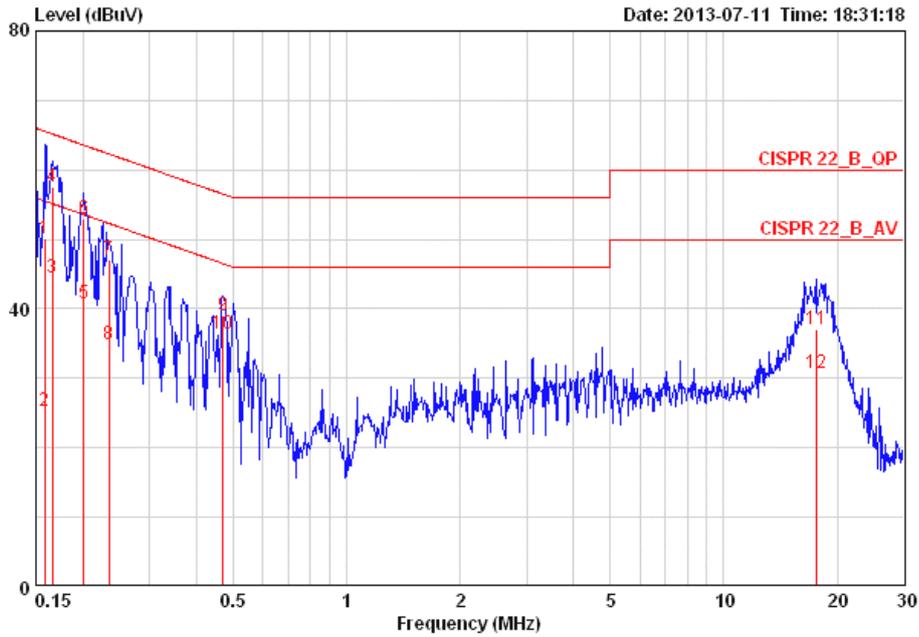

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15816	50.17	-15.39	65.56	49.83	0.16	0.18	LINE	QP
2	0.15816	25.20	-30.36	55.56	24.86	0.16	0.18	LINE	AVERAGE
3	0.16589	44.52	-10.65	55.16	44.17	0.16	0.19	LINE	AVERAGE
4	0.16589	57.63	-7.54	65.16	57.28	0.16	0.19	LINE	QP
5	0.20075	40.72	-12.86	53.58	40.37	0.15	0.20	LINE	AVERAGE
6	0.20075	52.90	-10.68	63.58	52.55	0.15	0.20	LINE	QP
7	0.23436	47.05	-15.24	62.29	46.70	0.15	0.20	LINE	QP
8	0.23436	34.82	-17.47	52.29	34.47	0.15	0.20	LINE	AVERAGE
9	0.47110	39.09	-17.40	56.49	38.74	0.15	0.20	LINE	QP
10	0.47110	36.38	-10.11	46.49	36.03	0.15	0.20	LINE	AVERAGE
11	17.568	36.97	-23.03	60.00	36.06	0.45	0.46	LINE	QP
12	17.568	30.70	-19.30	50.00	29.79	0.45	0.46	LINE	AVERAGE

Temperature	24°C	Humidity	51%
Test Engineer	David Tseng	Phase	Neutral
Configuration	Normal Link / Mode 2		

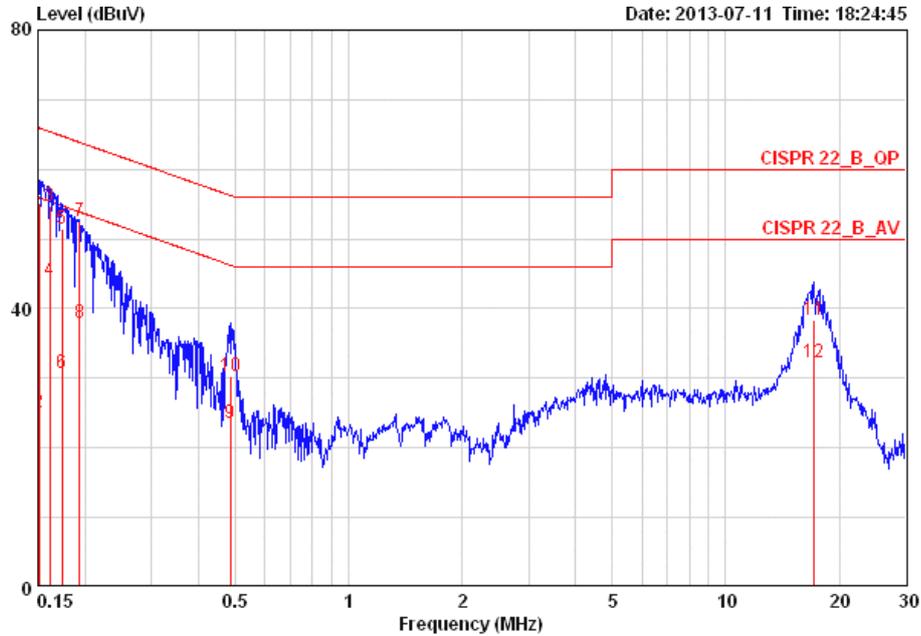

	Over	Limit	Read	LISN	Cable			
Freq	Level	Limit	Line	Level	Factor	Loss	Pol/Phase	Remark
MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1 @	0.15080	55.24	-10.72	65.96	54.98	0.08	0.18	NEUTRAL QP
2	0.15080	25.05	-30.91	55.96	24.79	0.08	0.18	NEUTRAL AVERAGE
3 @	0.16155	54.72	-10.66	65.38	54.46	0.08	0.18	NEUTRAL QP
4 @	0.16155	43.95	-11.43	55.38	43.69	0.08	0.18	NEUTRAL AVERAGE
5	0.17399	51.44	-13.33	64.77	51.17	0.08	0.19	NEUTRAL QP
6	0.17399	30.76	-24.01	54.77	30.49	0.08	0.19	NEUTRAL AVERAGE
7 @	0.19344	52.57	-11.32	63.89	52.29	0.08	0.20	NEUTRAL QP
8	0.19344	38.01	-15.88	53.89	37.73	0.08	0.20	NEUTRAL AVERAGE
9	0.48632	23.47	-22.76	46.23	23.19	0.08	0.20	NEUTRAL AVERAGE
10	0.48632	30.40	-25.83	56.23	30.12	0.08	0.20	NEUTRAL QP
11	17.199	38.39	-21.61	60.00	37.60	0.35	0.44	NEUTRAL QP
12	17.199	32.29	-17.71	50.00	31.50	0.35	0.44	NEUTRAL AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 26dB Bandwidth & 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

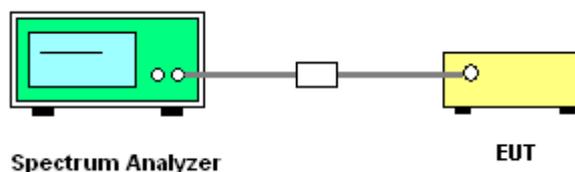

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth & 99% Occupied Bandwidth

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.48	17.92
40	5200 MHz	20.64	18.08
48	5240 MHz	20.64	18.24

Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	39.04	36.16
46	5230 MHz	39.04	36.48

Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Chain 1 + Chain 2 + Chain 3


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	81.92	76.18

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.32	17.12
40	5200 MHz	20.00	17.12
48	5240 MHz	20.16	17.28

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 1 + Chain 2 + Chain 3 / 5180 MHz

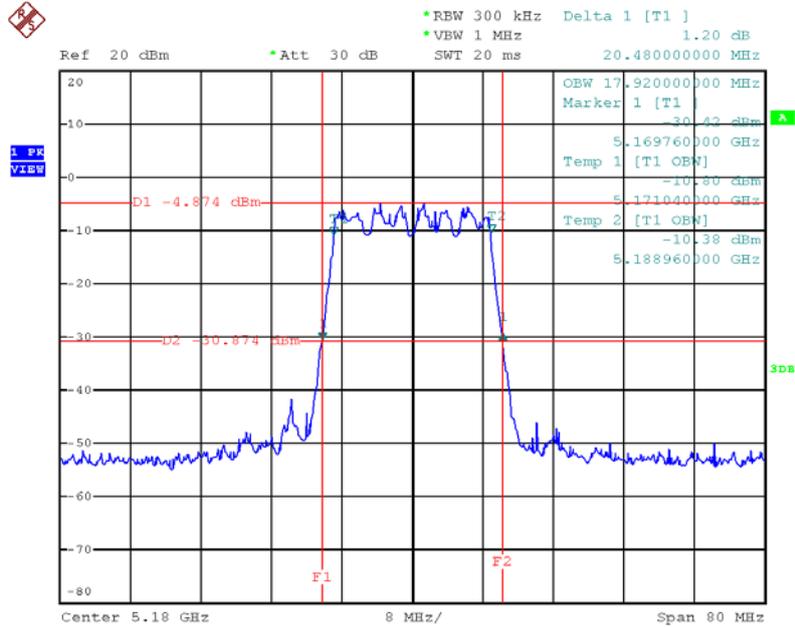


Date: 19.JUL.2013 02:04:05

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 1 + Chain 2 + Chain 3 / 5200 MHz

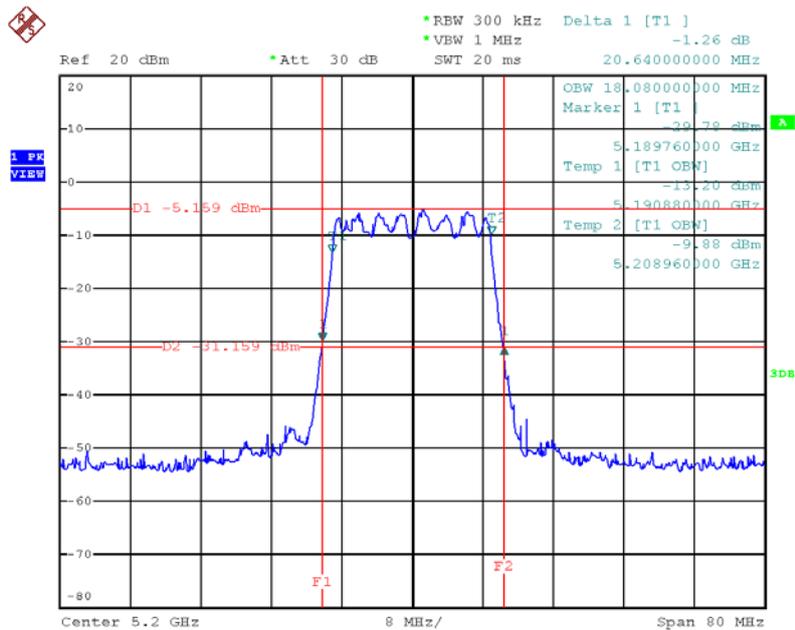


Date: 19.JUL.2013 02:05:00

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 1 + Chain 2 + Chain 3 / 5240 MHz

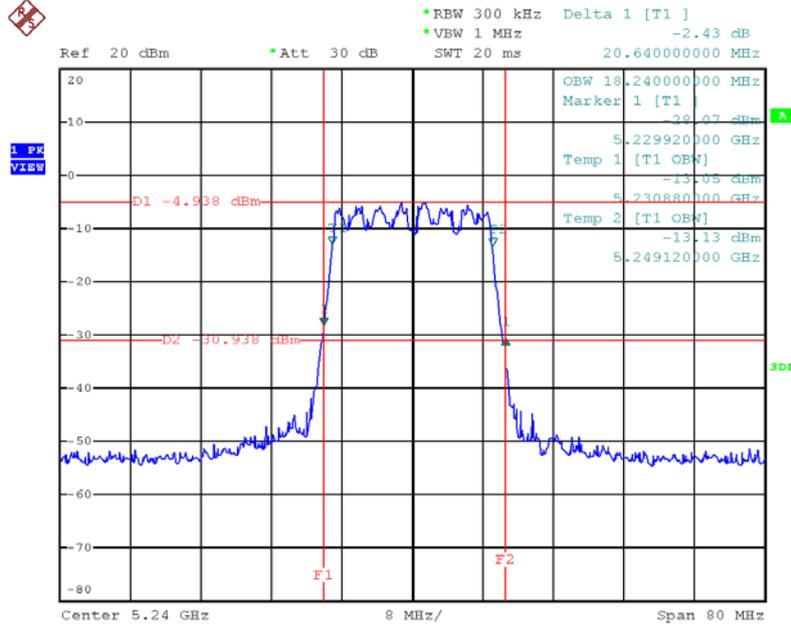


Date: 19.JUL.2013 02:05:52

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 1 + Chain 2 + Chain 3 / 5190 MHz

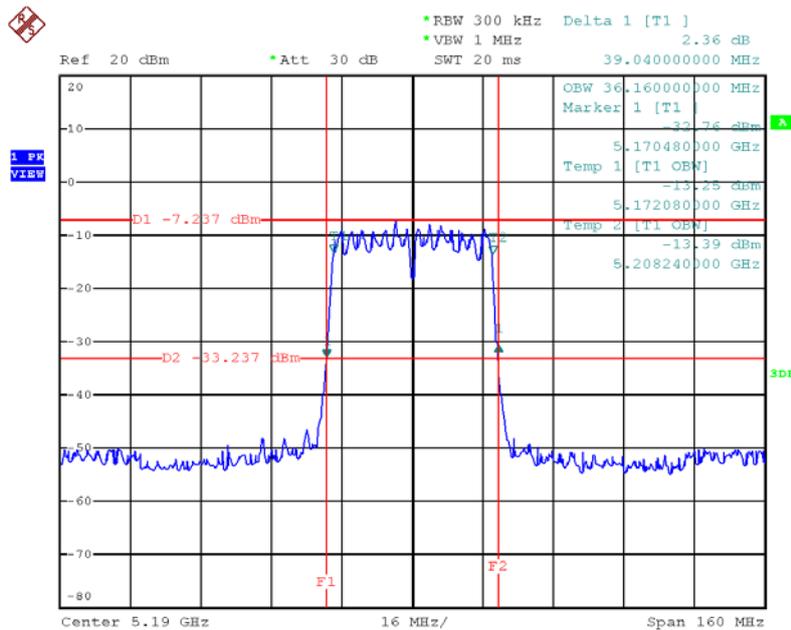


Date: 19.JUL.2013 02:02:22

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 1 + Chain 2 + Chain 3 / 5230 MHz

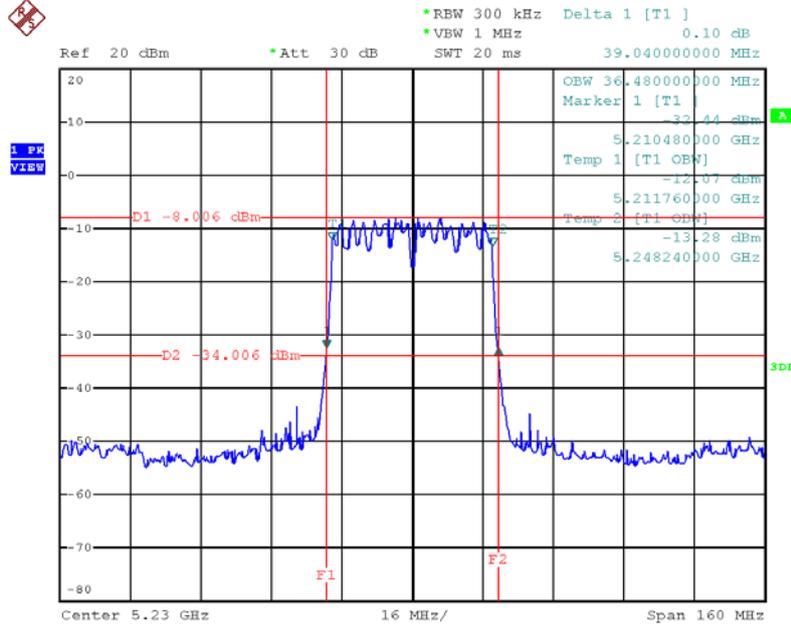


Date: 19.JUL.2013 02:03:11

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Chain 1 + Chain 2 + Chain 3 / 5210 MHz

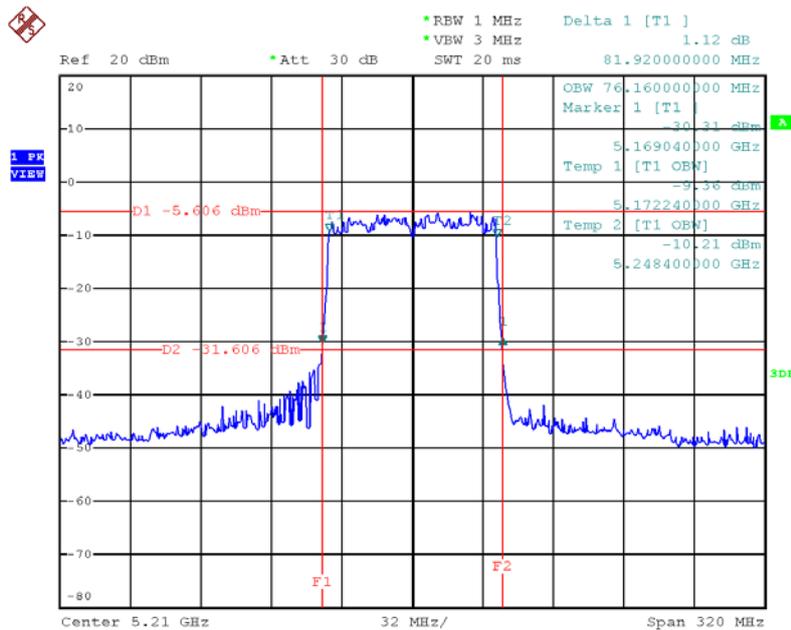


Date: 19.JUL.2013 01:55:52

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5180 MHz

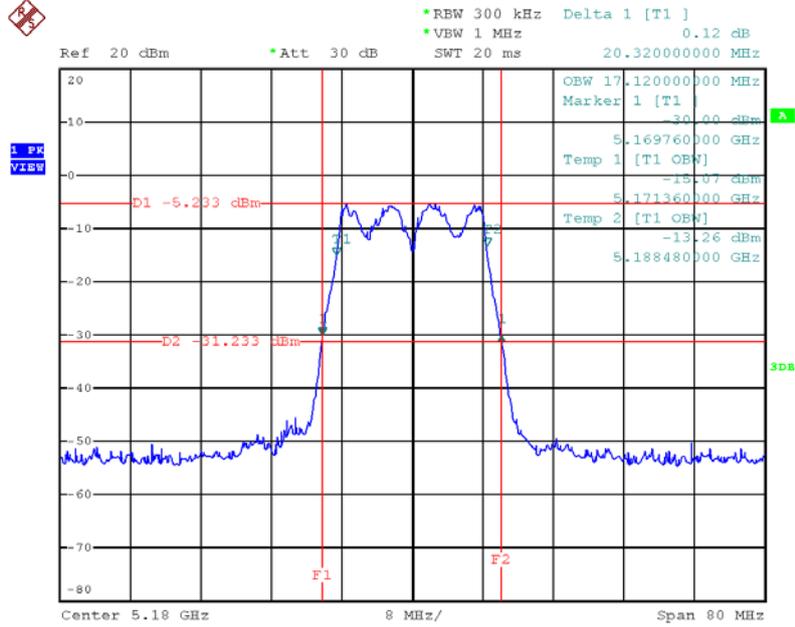


Date: 19.JUL.2013 02:08:04

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5200 MHz

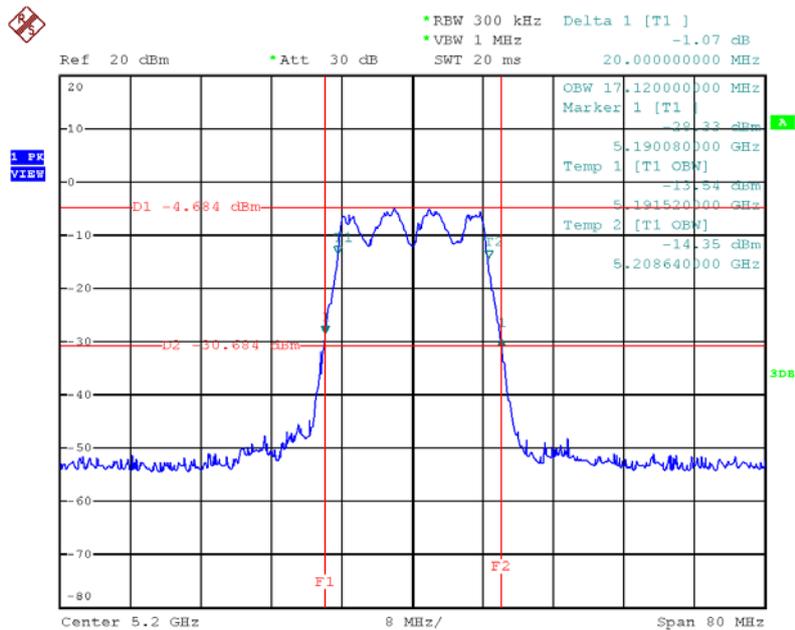

Date: 19.JUL.2013 02:07:24

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5240 MHz

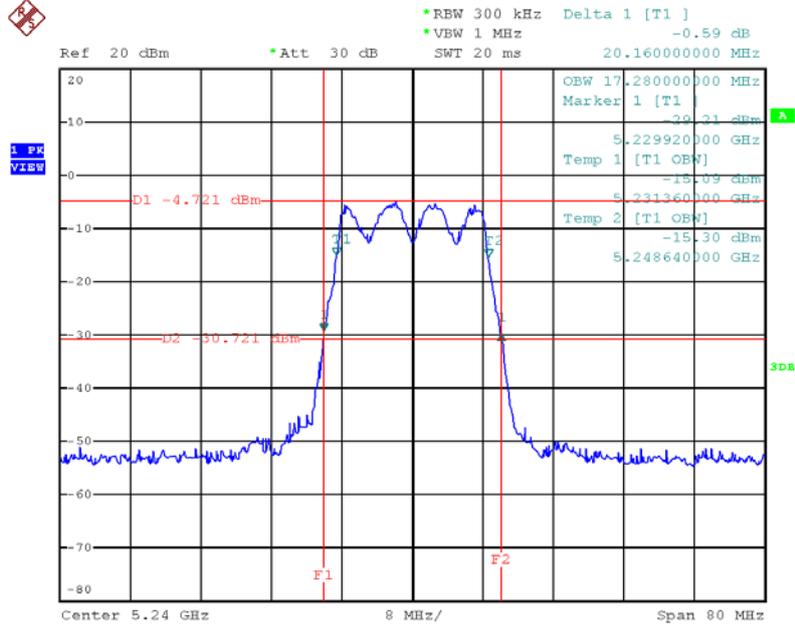

Date: 19.JUL.2013 02:06:41

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or $4 \text{ dBm} + 10\log B$, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


The following table is the setting of the peak power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (E) Maximum conducted output power =>(3) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 D01 v02 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout

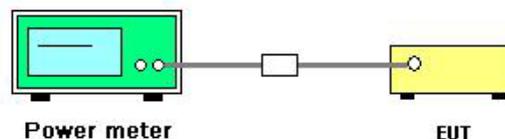

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11ac
Test Date	Jul. 19, 2013		

Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3			
36	5180 MHz	12.65	11.65	12.28	16.98	17.00	Complies
40	5200 MHz	12.51	11.67	12.11	16.88	17.00	Complies
48	5240 MHz	12.06	11.81	11.82	16.67	17.00	Complies

Note: Directional gain = $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 5.67\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3			
38	5190 MHz	12.51	11.52	12.23	16.88	17.00	Complies
46	5230 MHz	12.53	11.94	12.17	16.99	17.00	Complies

Note: Directional gain = $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 5.67\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3			
42	5210 MHz	12.26	11.91	12.46	16.99	17.00	Complies

Note: Directional gain = $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 5.67\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a
Test Date	Jul. 19, 2013		

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3			
36	5180 MHz	12.05	11.13	11.89	16.48	17.00	Complies
40	5200 MHz	12.17	11.41	11.83	16.59	17.00	Complies
48	5240 MHz	11.47	11.26	11.31	16.12	17.00	Complies

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power => (d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
3. Multiple antenna systems was performed in accordance KDB 662911 D01 v02 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

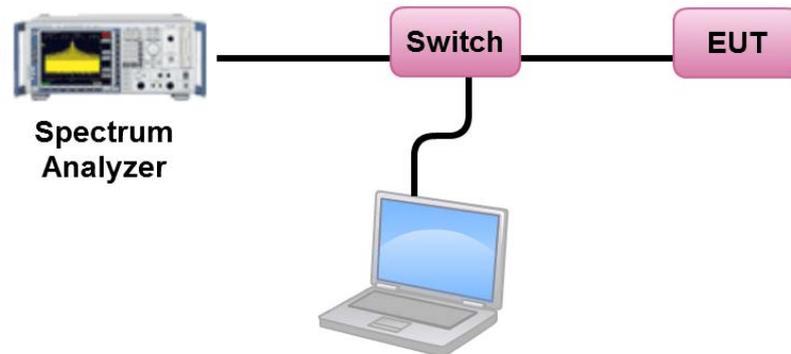

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11ac
Test Date	Jul. 19, 2013		

Configuration IEEE 802.11ac MCS0/Nss1 20MHz

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	2.55	4.00	Complies
40	5200 MHz	2.70	4.00	Complies
48	5240 MHz	2.62	4.00	Complies

Note: Directional gain = $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 5.67\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Configuration IEEE 802.11ac MCS0/Nss1 40MHz

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	-0.57	4.00	Complies
46	5230 MHz	0.01	4.00	Complies

Note: Directional gain = $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 5.67\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Configuration IEEE 802.11ac MCS0/Nss1 80MHz

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-3.45	4.00	Complies

Note: Directional gain = $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 5.67\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a
Test Date	Jul. 19, 2013		

Configuration IEEE 802.11a


Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	2.30	4.00	Complies
40	5200 MHz	2.70	4.00	Complies
48	5240 MHz	2.55	4.00	Complies

Note: Directional gain = $G_{ANT} + 10 \log(N_{ANT}/N_{SS}) = 5.67 \text{dBi} < 6 \text{dBi}$, so the limit doesn't reduce.


Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 1 + Chain 2 + Chain 3 / 5200 MHz

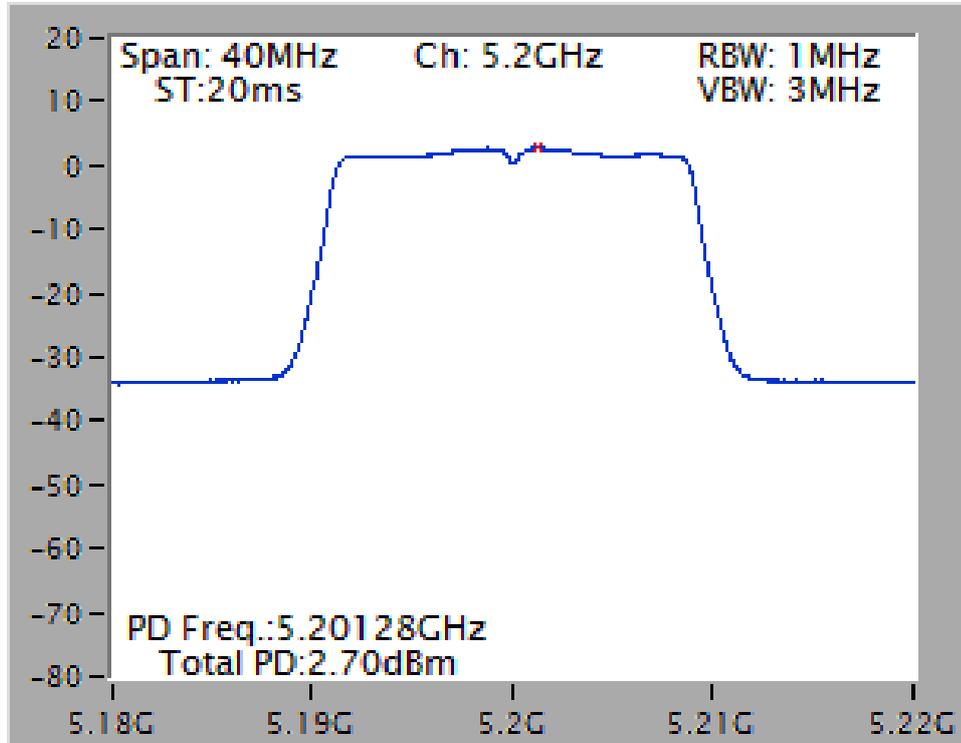


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 1 + Chain 2 + Chain 3 / 5230 MHz

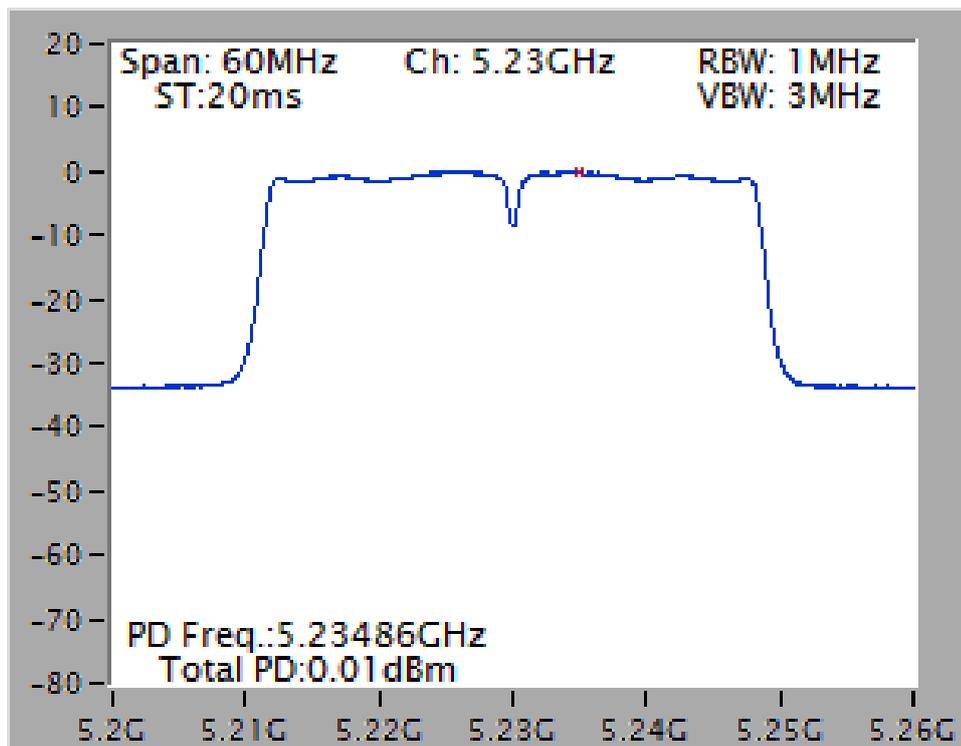

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT 80MHz / Chain 1 + Chain 2 + Chain 3 / 5210 MHz

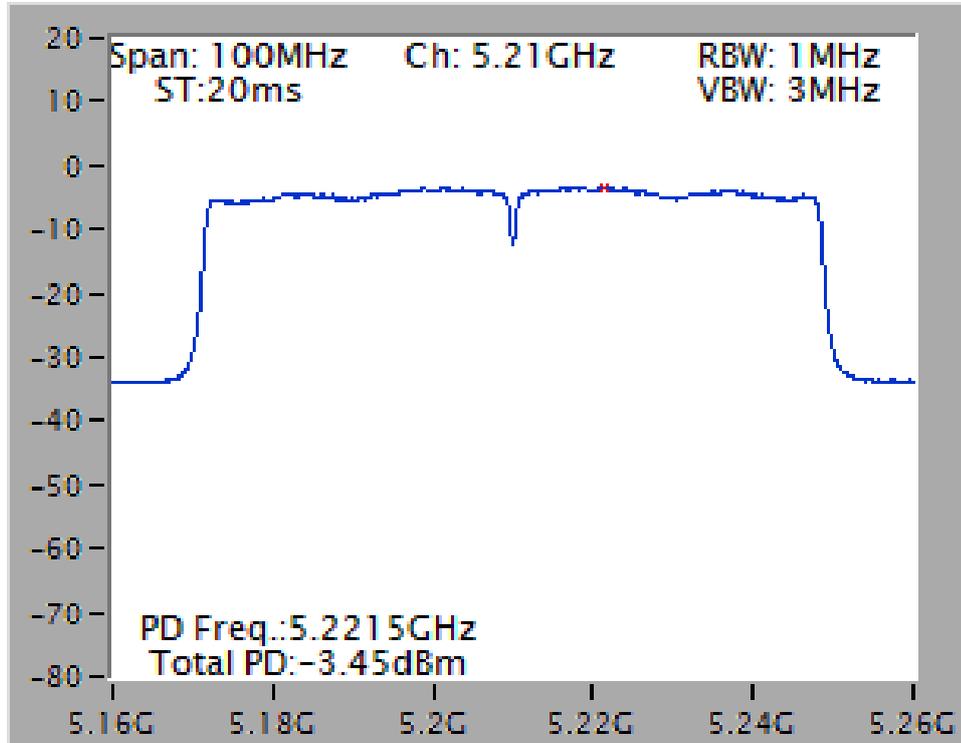

Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / 5200 MHz

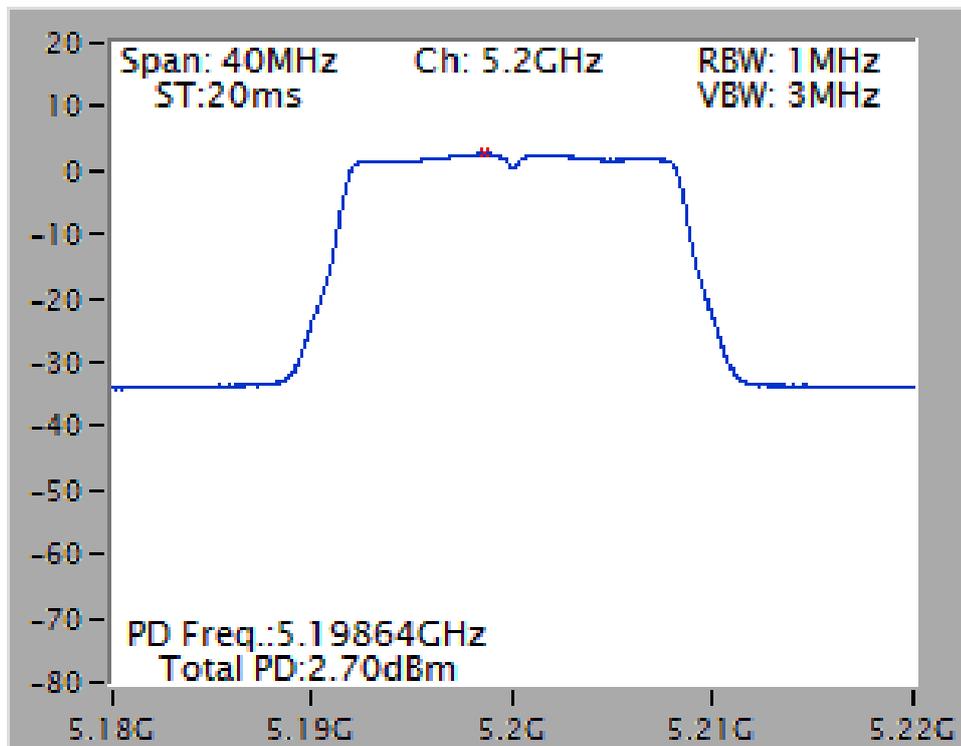

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz (Peak Trace) / 1 MHz (Average Trace)
VBW	≥ 3 MHz (Peak Trace) / ≥ 3 MHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Trace: Max hold (Peak Trace) / Trace Average Sweep Count 100 (Average Trace)
Sweep Time	AUTO

4.5.3. Test Procedures

- Trace A, Set RBW = 1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
- Delta Mark trace A Maximum frequency and trace B same frequency.
- Repeat the above procedure until measurements for all frequencies were complete.
- Testing each modulation mode on a single channel in single operating band at single output port.
All signal types need test (DSSS, OFDM). All modulation types need test (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM). All bandwidth modes need test.

4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.4.4.

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Peak Excursion

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 1 + Chain 2 + Chain 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK (MCS0)	5180 MHz	9.80	13	Complies
QPSK (MCS1)	5180 MHz	9.23	13	Complies
16QAM (MCS3)	5180 MHz	9.80	13	Complies
64QAM (MCS5)	5180 MHz	9.67	13	Complies
256QAM (MCS8)	5180 MHz	10.00	13	Complies

Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 1 + Chain 2 + Chain 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK (MCS0)	5230 MHz	10.25	13	Complies
QPSK (MCS1)	5230 MHz	9.87	13	Complies
16QAM (MCS3)	5230 MHz	9.85	13	Complies
64QAM (MCS5)	5230 MHz	10.56	13	Complies
256QAM (MCS8)	5230 MHz	10.19	13	Complies

Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Chain 1 + Chain 2 + Chain 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK (MCS0)	5210 MHz	10.02	13	Complies
QPSK (MCS1)	5210 MHz	10.03	13	Complies
16QAM (MCS3)	5210 MHz	10.85	13	Complies
64QAM (MCS5)	5210 MHz	10.16	13	Complies
256QAM (MCS8)	5210 MHz	10.17	13	Complies


Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK (6Mbps)	5200 MHz	9.57	13	Complies
QPSK (12Mbps)	5200 MHz	8.51	13	Complies
16QAM (24Mbps)	5200 MHz	8.70	13	Complies
64QAM (48Mbps)	5200 MHz	8.81	13	Complies


Note: Only the channel with maximum results was listed in the report.

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / Chain 1 + Chain 2 + Chain 3 / 256QAM (MCS8) / 5180 MHz

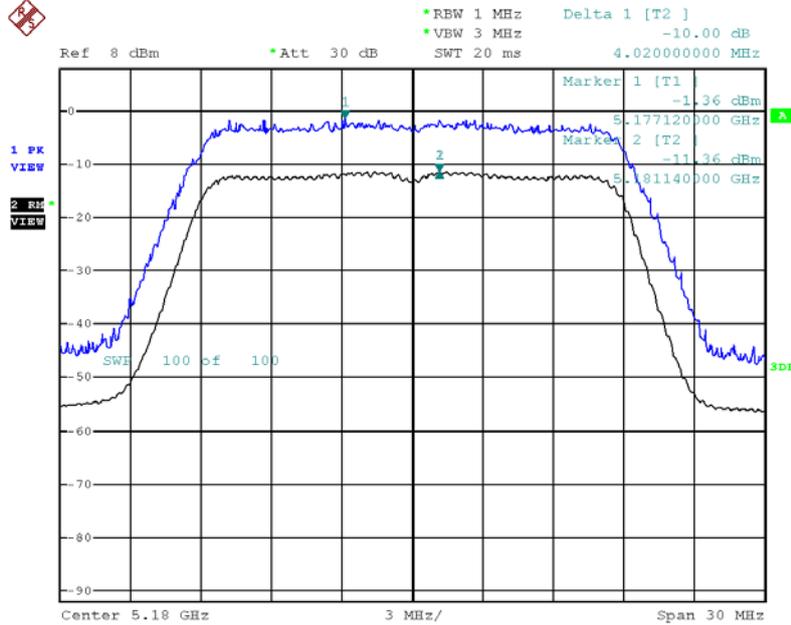


Date: 19.JUL.2013 03:23:48

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / Chain 1 + Chain 2 + Chain 3 / 64QAM (MCS5) / 5230 MHz

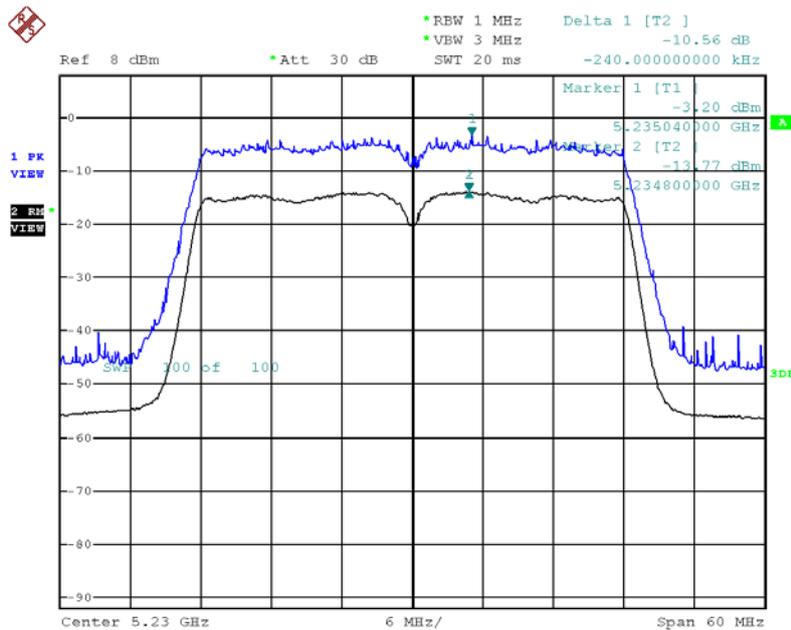


Date: 19.JUL.2013 03:18:21

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Chain 1 + Chain 2 + Chain 3 / 16QAM (MCS3) / 5210 MHz

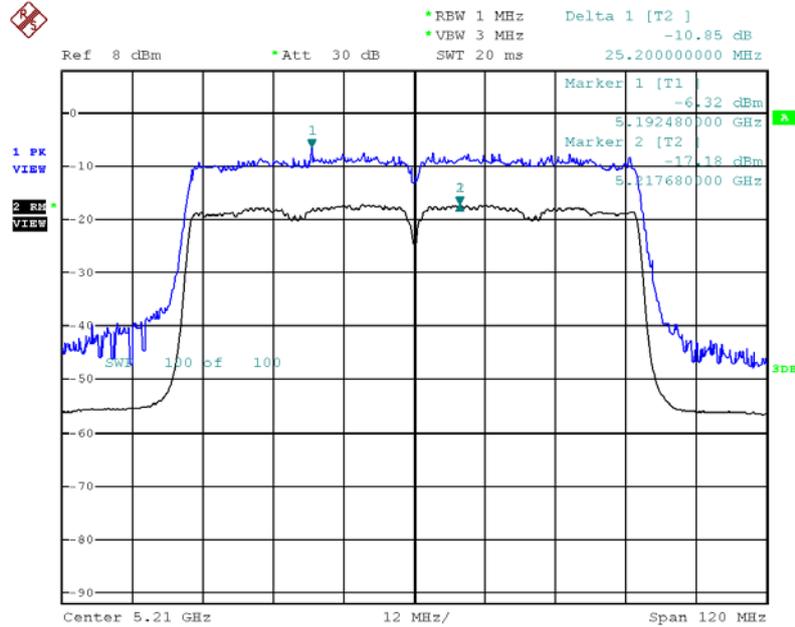

Date: 19.JUL.2013 03:14:57

Peak Excursion Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 / BSPK (6Mbps) / 5200 MHz

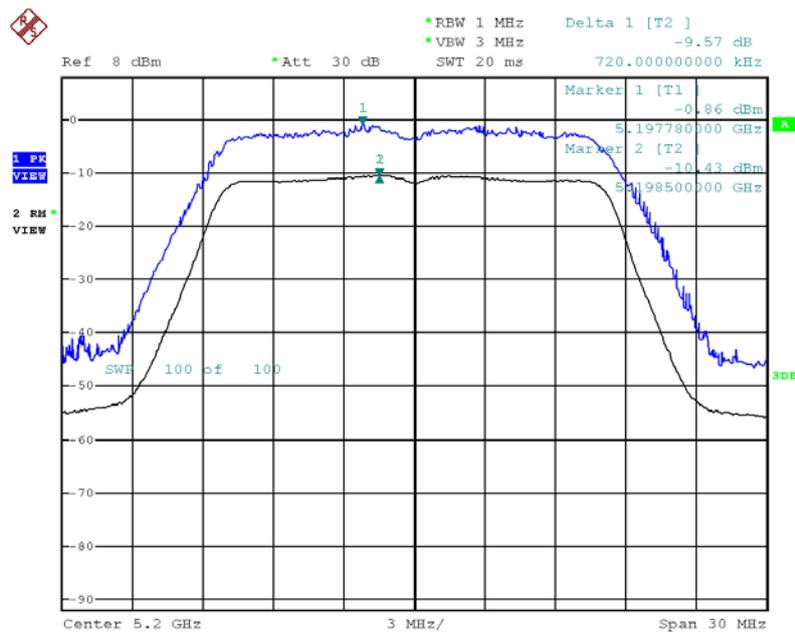

Date: 19.JUL.2013 03:24:49

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. For transmitters operating in the In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

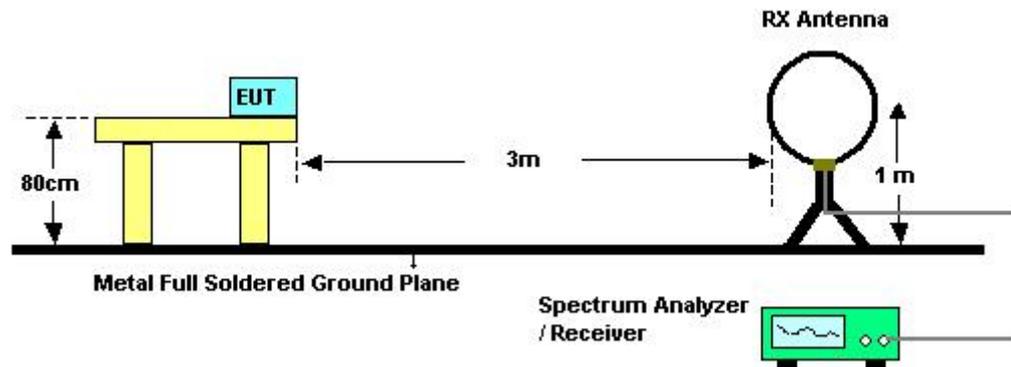

For Radiated Emissions: 30MHz~1GHz

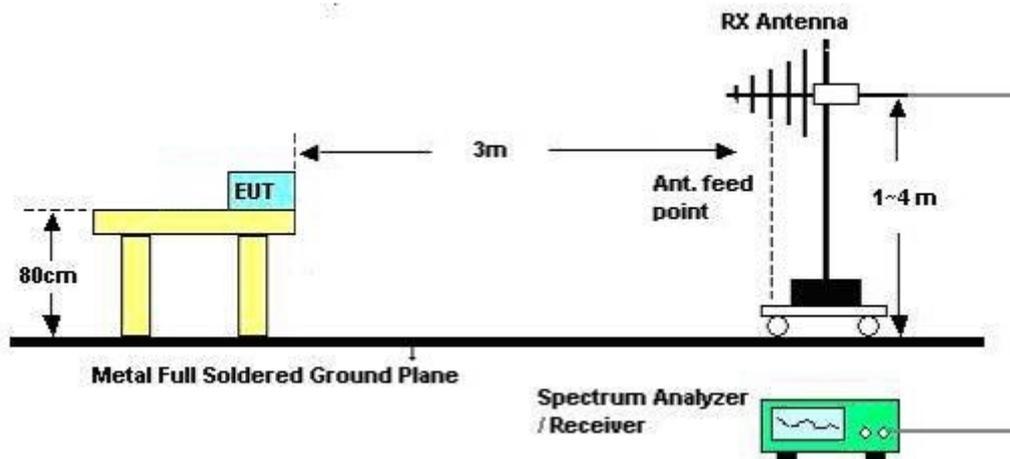

For Radiated Emissions: Above 1GHz

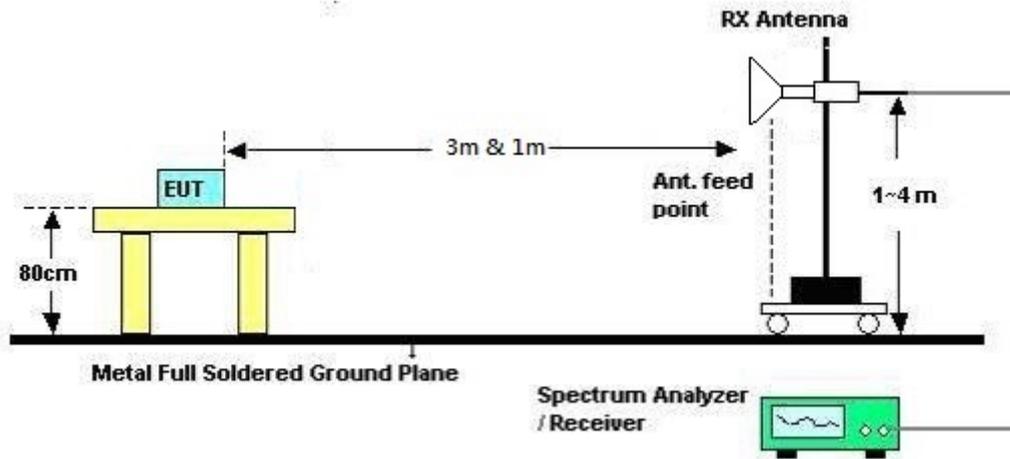

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For Non-beamforming mode

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	51%
Test Engineer	David Tseng	Configurations	Normal link
Test Date	Jul. 25, 2013		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24°C	Humidity	51%
Test Engineer	David Tseng	Configurations	Normal link / Mode 2

Horizontal

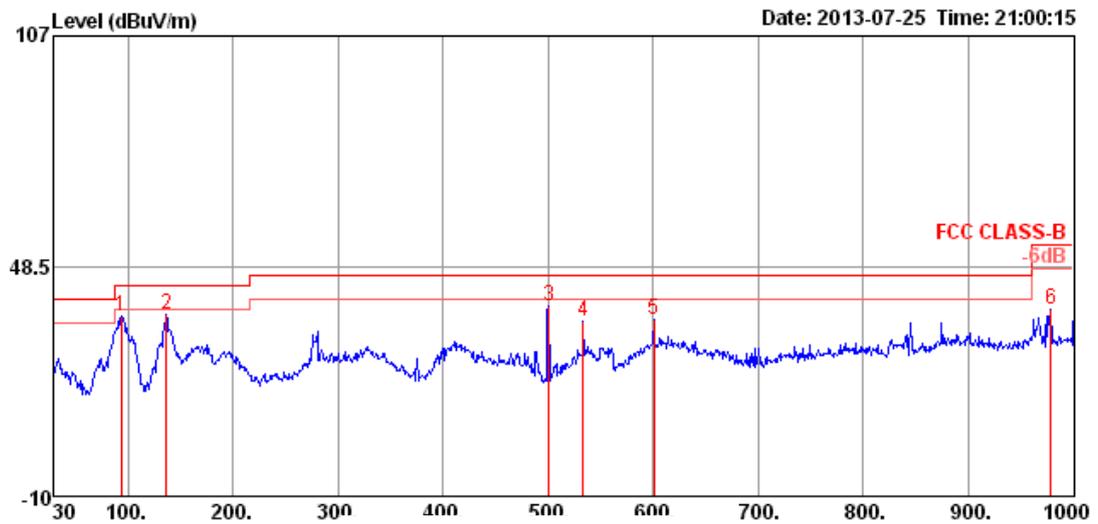

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	94.02	35.58	43.50	-7.92	56.57	1.15	9.43	31.57	400	201	HORIZONTAL Peak
2 p	136.70	36.02	43.50	-7.48	55.04	1.39	11.13	31.54	200	170	HORIZONTAL Peak
3	500.45	38.26	46.00	-7.74	49.93	2.82	16.92	31.41	100	86	HORIZONTAL Peak
4	533.43	34.52	46.00	-11.48	45.28	2.90	17.72	31.38	100	264	HORIZONTAL Peak
5	600.36	35.02	46.00	-10.98	44.69	3.12	18.45	31.24	200	281	HORIZONTAL Peak
6	978.66	37.62	54.00	-16.38	43.37	4.14	21.20	31.09	150	238	HORIZONTAL Peak

Vertical

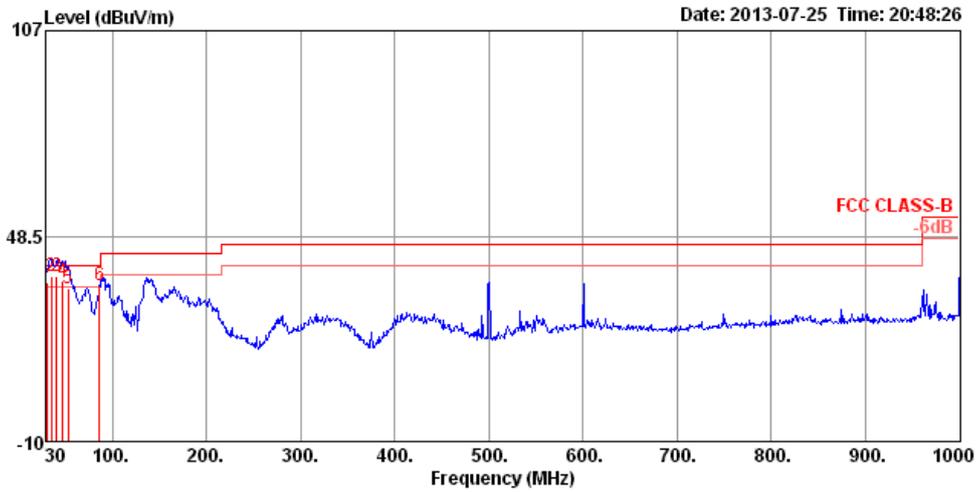

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1 !	30.00	35.44	40.00	-4.56	48.63	0.64	17.98	31.81	148	202	VERTICAL	QP
2 pk	34.85	36.97	40.00	-3.03	52.93	0.69	15.23	31.88	100	153	VERTICAL	Peak
3	40.67	36.99	40.00	-3.01	56.26	0.75	11.85	31.87	114	161	VERTICAL	QP
4 !	47.46	35.98	40.00	-4.02	58.35	0.82	8.62	31.81	100	67	VERTICAL	QP
5	53.28	33.54	40.00	-6.46	57.94	0.86	6.52	31.78	125	153	VERTICAL	QP
6 !	86.26	34.58	40.00	-5.42	57.20	1.10	7.94	31.66	150	186	VERTICAL	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	24°C	Humidity	51%
Test Engineer	David Tseng	Configurations	IEEE 802.1ac MCS0/Nss1 20MHz Ch 36 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 12, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4964.15	43.32	54.00	-10.68	41.63	3.37	33.33	35.01	Average	157	320	HORIZONTAL
2	4964.17	49.21	74.00	-24.79	47.52	3.37	33.33	35.01	Peak	157	320	HORIZONTAL
3	5395.80	44.44	54.00	-9.56	41.93	3.50	34.09	35.08	Average	100	330	HORIZONTAL
4	5395.96	51.24	74.00	-22.76	48.73	3.50	34.09	35.08	Peak	100	330	HORIZONTAL
5	15540.33	36.55	54.00	-17.45	28.08	6.13	37.65	35.31	Average	100	291	HORIZONTAL
6	15540.35	49.62	74.00	-24.38	41.15	6.13	37.65	35.31	Peak	100	291	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4964.15	54.17	74.00	-19.83	52.48	3.37	33.33	35.01	Peak	100	24	VERTICAL
2	4964.17	50.14	54.00	-3.86	48.45	3.37	33.33	35.01	Average	100	24	VERTICAL
3	5395.84	53.41	54.00	-0.59	50.90	3.50	34.09	35.08	Average	100	355	VERTICAL
4	5395.85	59.24	74.00	-14.76	56.73	3.50	34.09	35.08	Peak	100	355	VERTICAL
5	15540.00	58.88	74.00	-15.12	50.37	6.13	37.69	35.31	Peak	108	286	VERTICAL
6	15540.50	41.45	54.00	-12.55	32.94	6.13	37.69	35.31	Average	108	286	VERTICAL



Temperature	24°C	Humidity	51%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0/Nss1 20MHz Ch 40 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 12, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4983.16	48.41	74.00	-25.59	46.68	3.38	33.36	35.01	Peak	157	296	HORIZONTAL
2	4983.31	41.02	54.00	-12.98	39.29	3.38	33.36	35.01	Average	157	296	HORIZONTAL
3	5416.68	44.72	54.00	-9.28	42.14	3.51	34.15	35.08	Average	142	235	HORIZONTAL
4	5416.73	50.43	74.00	-23.57	47.85	3.51	34.15	35.08	Peak	142	235	HORIZONTAL
5	15599.09	36.41	54.00	-17.59	28.02	6.13	37.60	35.34	Average	100	115	HORIZONTAL
6	15599.72	49.58	74.00	-24.42	41.19	6.13	37.60	35.34	Peak	100	115	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4983.27	53.96	74.00	-20.04	52.22	3.38	33.37	35.01	Peak	113	330	VERTICAL
2	4983.33	48.37	54.00	-5.63	46.63	3.38	33.37	35.01	Average	113	330	VERTICAL
3	5416.66	52.34	54.00	-1.66	49.76	3.51	34.15	35.08	Average	100	331	VERTICAL
4	5416.79	57.47	74.00	-16.53	54.89	3.51	34.15	35.08	Peak	100	331	VERTICAL
5	15599.39	50.49	74.00	-23.51	42.10	6.13	37.60	35.34	Peak	100	231	VERTICAL
6	15600.33	36.51	54.00	-17.49	28.12	6.13	37.60	35.34	Average	100	231	VERTICAL



Temperature	24°C	Humidity	51%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0/Nss1 20MHz Ch 48 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 12, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5021.70	42.65	54.00	-11.35	40.84	3.40	33.42	35.01 Average	127	289	HORIZONTAL
2	5021.75	47.66	74.00	-26.34	45.85	3.40	33.42	35.01 Peak	127	289	HORIZONTAL
3	5458.29	41.01	54.00	-12.99	38.39	3.52	34.19	35.09 Average	100	308	HORIZONTAL
4	5458.37	47.71	74.00	-26.29	45.09	3.52	34.19	35.09 Peak	100	308	HORIZONTAL
5	15720.01	49.63	74.00	-24.37	41.40	6.14	37.48	35.39 Peak	100	286	HORIZONTAL
6	15720.23	37.42	54.00	-16.58	29.19	6.14	37.48	35.39 Average	100	286	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5021.69	55.77	74.00	-18.23	53.95	3.40	33.43	35.01 Peak	100	328	VERTICAL
2	5021.70	50.94	54.00	-3.06	49.12	3.40	33.43	35.01 Average	100	328	VERTICAL
3	5458.27	58.64	74.00	-15.36	56.00	3.52	34.21	35.09 Peak	100	348	VERTICAL
4	5458.35	53.97	54.00	-0.03	51.33	3.52	34.21	35.09 Average	100	348	VERTICAL
5	15719.03	49.69	74.00	-24.31	41.46	6.14	37.48	35.39 Peak	100	312	VERTICAL
6	15720.07	36.43	54.00	-17.57	28.20	6.14	37.48	35.39 Average	100	312	VERTICAL

Temperature	24°C	Humidity	51%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0/Nss1 40MHz Ch 38 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 12, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5622.50	51.78	74.00	-22.22	49.01	3.57	34.32	35.12	Peak	157	274	HORIZONTAL
2	5622.50	47.70	54.00	-6.30	44.93	3.57	34.32	35.12	Average	157	274	HORIZONTAL
3	15569.64	36.51	54.00	-17.49	28.08	6.13	37.63	35.33	Average	100	160	HORIZONTAL
4	15570.27	50.39	74.00	-23.61	41.96	6.13	37.63	35.33	Peak	100	160	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5622.44	53.07	54.00	-0.93	50.30	3.57	34.32	35.12	Average	100	209	VERTICAL
2	5622.50	57.26	74.00	-16.74	54.49	3.57	34.32	35.12	Peak	100	209	VERTICAL
3	15569.90	40.22	54.00	-13.78	31.77	6.13	37.65	35.33	Average	100	279	VERTICAL
4	15570.40	58.69	74.00	-15.31	50.24	6.13	37.65	35.33	Peak	100	279	VERTICAL



Temperature	24°C	Humidity	51%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0/Nss1 40MHz Ch 46 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 12, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4793.94	49.24	74.00	-24.76	48.00	3.29	32.99	35.04	Peak	100	24 HORIZONTAL
2	4794.23	38.76	54.00	-15.24	37.52	3.29	32.99	35.04	Average	100	109 HORIZONTAL
3	5665.82	51.92	74.00	-22.08	49.13	3.59	34.33	35.13	Peak	124	279 HORIZONTAL
4	5665.83	47.92	54.00	-6.08	45.13	3.59	34.33	35.13	Average	124	279 HORIZONTAL
5	15690.09	49.12	74.00	-24.88	40.84	6.14	37.51	35.37	Peak	100	154 HORIZONTAL
6	15690.35	36.62	54.00	-17.38	28.34	6.14	37.51	35.37	Average	100	154 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4794.04	47.77	74.00	-26.23	46.53	3.29	32.99	35.04	Peak	119	338 VERTICAL
2	4794.17	42.33	54.00	-11.67	41.09	3.29	32.99	35.04	Average	119	338 VERTICAL
3	5665.80	53.72	54.00	-0.28	50.93	3.59	34.33	35.13	Average	121	171 VERTICAL
4	5665.82	57.91	74.00	-16.09	55.12	3.59	34.33	35.13	Peak	121	171 VERTICAL
5	15689.83	36.61	54.00	-17.39	28.33	6.14	37.51	35.37	Average	100	272 VERTICAL
6	15690.43	48.98	74.00	-25.02	40.70	6.14	37.51	35.37	Peak	100	272 VERTICAL



Temperature	24°C	Humidity	51%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0/Nss1 80MHz Ch 42 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 12, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5788.85	53.87	68.30	-14.43	51.04	3.63	34.36	35.16 Peak	164	268	HORIZONTAL
2	15626.86	49.89	74.00	-24.11	41.54	6.14	37.56	35.35 Peak	100	166	HORIZONTAL
3	15630.00	36.49	54.00	-17.51	28.14	6.14	37.56	35.35 Average	100	166	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5788.91	60.39	68.30	-7.91	57.56	3.63	34.36	35.16 Peak	100	358	VERTICAL
2	15632.00	48.85	74.00	-25.15	40.50	6.14	37.56	35.35 Peak	100	231	VERTICAL
3	15632.24	36.00	54.00	-18.00	27.65	6.14	37.56	35.35 Average	100	231	VERTICAL



Temperature	24°C	Humidity	51%
Test Engineer	David Tseng	Configurations	IEEE 802.11a Ch 36 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 11, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4964.18	41.56	54.00	-12.44	39.87	3.37	33.33	35.01	Average	156	331	HORIZONTAL
2	4964.25	48.52	74.00	-25.48	46.83	3.37	33.33	35.01	Peak	156	331	HORIZONTAL
3	5395.84	44.34	54.00	-9.66	41.83	3.50	34.09	35.08	Average	156	322	HORIZONTAL
4	5395.85	49.99	74.00	-24.01	47.48	3.50	34.09	35.08	Peak	156	322	HORIZONTAL
5	15537.96	49.85	74.00	-24.15	41.38	6.13	37.65	35.31	Peak	100	216	HORIZONTAL
6	15539.60	37.08	54.00	-16.92	28.61	6.13	37.65	35.31	Average	100	216	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4964.15	49.73	54.00	-4.27	48.04	3.37	33.33	35.01	Average	100	332	VERTICAL
2	4964.25	53.71	74.00	-20.29	52.02	3.37	33.33	35.01	Peak	100	332	VERTICAL
3	5395.83	58.45	74.00	-15.55	55.94	3.50	34.09	35.08	Peak	101	356	VERTICAL
4	5395.83	53.98	54.00	-0.02	51.47	3.50	34.09	35.08	Average	101	356	VERTICAL
5	15538.64	39.96	54.00	-14.04	31.45	6.13	37.69	35.31	Average	100	283	VERTICAL
6	15541.44	57.13	74.00	-16.87	48.62	6.13	37.69	35.31	Peak	100	283	VERTICAL



Temperature	24°C	Humidity	51%
Test Engineer	David Tseng	Configurations	IEEE 802.11a Ch 40 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 11, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4983.35	39.35	54.00	-14.65	37.62	3.38	33.36	35.01	Average	100	196	HORIZONTAL
2	4983.36	46.93	74.00	-27.07	45.20	3.38	33.36	35.01	Peak	100	196	HORIZONTAL
3	5416.69	48.22	74.00	-25.78	45.64	3.51	34.15	35.08	Peak	100	210	HORIZONTAL
4	5416.70	42.24	54.00	-11.76	39.66	3.51	34.15	35.08	Average	100	210	HORIZONTAL
5	15599.50	36.93	54.00	-17.07	28.54	6.13	37.60	35.34	Average	100	255	HORIZONTAL
6	15600.28	50.67	74.00	-23.33	42.28	6.13	37.60	35.34	Peak	100	255	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4983.35	53.25	74.00	-20.75	51.51	3.38	33.37	35.01	Peak	100	333	VERTICAL
2	4983.35	49.96	54.00	-4.04	48.22	3.38	33.37	35.01	Average	100	333	VERTICAL
3	5416.67	53.90	54.00	-0.10	51.32	3.51	34.15	35.08	Average	100	356	VERTICAL
4	5416.68	58.11	74.00	-15.89	55.53	3.51	34.15	35.08	Peak	100	356	VERTICAL
5	15599.64	50.19	74.00	-23.81	41.80	6.13	37.60	35.34	Peak	100	229	VERTICAL
6	15599.96	37.04	54.00	-16.96	28.65	6.13	37.60	35.34	Average	100	229	VERTICAL

Temperature	24°C	Humidity	51%
Test Engineer	David Tseng	Configurations	IEEE 802.11a Ch 48 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 11, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5021.66	43.41	54.00	-10.59	41.60	3.40	33.42	35.01	Average	148	277	HORIZONTAL
2	5021.67	48.97	74.00	-25.03	47.16	3.40	33.42	35.01	Peak	148	277	HORIZONTAL
3	5458.27	44.06	54.00	-9.94	41.44	3.52	34.19	35.09	Average	184	228	HORIZONTAL
4	5458.31	51.20	74.00	-22.80	48.58	3.52	34.19	35.09	Peak	184	228	HORIZONTAL
5	15716.67	36.73	54.00	-17.27	28.50	6.14	37.48	35.39	Average	100	68	HORIZONTAL
6	15729.36	50.30	74.00	-23.70	42.09	6.14	37.46	35.39	Peak	100	68	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5021.66	52.19	54.00	-1.81	50.37	3.40	33.43	35.01	Average	100	335	VERTICAL
2	5021.67	54.99	74.00	-19.01	53.17	3.40	33.43	35.01	Peak	100	335	VERTICAL
3	5458.30	53.94	54.00	-0.06	51.30	3.52	34.21	35.09	Average	100	358	VERTICAL
4	5458.38	58.52	74.00	-15.48	55.88	3.52	34.21	35.09	Peak	100	358	VERTICAL
5	15722.79	37.48	54.00	-16.52	29.25	6.14	37.48	35.39	Average	100	106	VERTICAL
6	15728.62	50.09	74.00	-23.91	41.88	6.14	37.46	35.39	Peak	100	106	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, in case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

For Non-beamforming mode

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode

The EUT was programmed to be in beamforming transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24°C	Humidity	51%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0/Nss1 20MHz Ch 36, 40, 48 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 12, 2013		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5108.00	66.15	74.00	-7.85	27.20	5.97	32.98	0.00	127	45 VERTICAL	Peak
2 !	5108.40	53.92	54.00	-0.08	14.97	5.97	32.98	0.00	127	45 VERTICAL	Average
3	5188.00	101.97			62.90	6.02	33.05	0.00	127	45 VERTICAL	Average
4 pk	5188.20	112.85			73.78	6.02	33.05	0.00	127	45 VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5120.83	63.90	74.00	-10.10	26.86	3.43	33.61	0.00	116	39 VERTICAL	Peak
2	5122.76	53.93	54.00	-0.07	16.89	3.43	33.61	0.00	116	39 VERTICAL	Average
3	5202.56	100.33			63.12	3.45	33.76	0.00	116	39 VERTICAL	Average
4	5203.21	110.81			73.60	3.45	33.76	0.00	116	39 VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5124.52	55.25	74.00	-18.75	18.21	3.43	33.61	0.00	103	313 VERTICAL	Peak
2	5125.00	42.30	54.00	-11.70	5.26	3.43	33.61	0.00	103	313 VERTICAL	Average
3	5243.37	102.08			64.80	3.46	33.82	0.00	103	313 VERTICAL	Average
4	5244.33	113.14			75.86	3.46	33.82	0.00	103	313 VERTICAL	Peak
5	5364.42	44.31	54.00	-9.69	6.79	3.49	34.03	0.00	103	313 VERTICAL	Average
6	5366.35	55.58	74.00	-18.42	18.03	3.49	34.06	0.00	103	313 VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	24°C	Humidity	51%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0/Nss1 40MHz Ch 38, 46 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 12, 2013		

Channel 38

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1 !	5113.40	53.60	54.00	-0.40	14.64	5.97	32.99	0.00	101	360	VERTICAL Average
2	5150.00	66.10	74.00	-7.90	27.09	5.99	33.02	0.00	101	360	VERTICAL Peak
3	5193.40	101.81			62.74	6.02	33.05	0.00	101	360	VERTICAL Average
4 pk	5195.00	112.02			72.95	6.02	33.05	0.00	101	360	VERTICAL Peak

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5141.67	65.06	74.00	-8.94	27.99	3.43	33.64	0.00	103	323	VERTICAL Peak
2	5149.04	53.79	54.00	-0.21	16.69	3.43	33.67	0.00	103	323	VERTICAL Average
3	5222.63	102.16			64.91	3.46	33.79	0.00	103	323	VERTICAL Average
4	5228.72	113.31			76.03	3.46	33.82	0.00	103	323	VERTICAL Peak

Item 3, 4 are the fundamental frequency at 5230 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



Temperature	24°C	Humidity	51%
Test Engineer	David Tseng	Configurations	IEEE 802.11ac MCS0/Nss1 80MHz Ch 42 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 10, 2013		

Channel 42

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5141.50	64.71	74.00	-9.29	25.71	5.99	33.01	0.00	101	11 VERTICAL	Peak
2 !	5150.00	53.41	54.00	-0.59	14.40	5.99	33.02	0.00	101	11 VERTICAL	Average
3 pk	5188.00	109.12			70.05	6.02	33.05	0.00	101	11 VERTICAL	Peak
4	5222.00	98.42			59.30	6.04	33.08	0.00	101	11 VERTICAL	Average
5	5358.00	43.86	54.00	-10.14	4.29	6.12	33.45	0.00	101	11 VERTICAL	Average
6	5359.00	56.79	74.00	-17.21	17.22	6.12	33.45	0.00	101	11 VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	24°C	Humidity	51%
Test Engineer	David Tseng	Configurations	IEEE 802.11a Ch 36, 40, 48 / Chain 1 + Chain 2 + Chain 3
Test Date	Jul. 11, 2013		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5098.72	49.91	54.00	-4.09	12.91	3.42	33.58	0.00	Average	100	304	VERTICAL
2	5098.72	61.69	74.00	-12.31	24.69	3.42	33.58	0.00	Peak	100	304	VERTICAL
3	5178.72	99.36			62.19	3.44	33.73	0.00	Average	100	304	VERTICAL
4	5178.72	109.43			72.26	3.44	33.73	0.00	Peak	100	304	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5118.59	50.34	54.00	-3.66	13.30	3.43	33.61	0.00	Average	102	302	VERTICAL
2	5118.91	60.73	74.00	-13.27	23.69	3.43	33.61	0.00	Peak	102	302	VERTICAL
3	5198.40	99.18			61.97	3.45	33.76	0.00	Average	102	302	VERTICAL
4	5198.72	109.81			72.60	3.45	33.76	0.00	Peak	102	302	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5118.75	42.48	54.00	-11.52	5.44	3.43	33.61	0.00	Average	139	297	VERTICAL
2	5118.75	53.66	74.00	-20.34	16.62	3.43	33.61	0.00	Peak	139	297	VERTICAL
3	5238.56	111.25			73.97	3.46	33.82	0.00	Peak	139	297	VERTICAL
4	5239.04	100.67			63.39	3.46	33.82	0.00	Average	139	297	VERTICAL
5	5359.14	44.50	54.00	-9.50	6.98	3.49	34.03	0.00	Average	139	297	VERTICAL
6	5359.62	55.49	74.00	-18.51	17.97	3.49	34.03	0.00	Peak	139	297	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $0^\circ\text{C} \sim 40^\circ\text{C}$.

4.8.4. Test Setup Layout

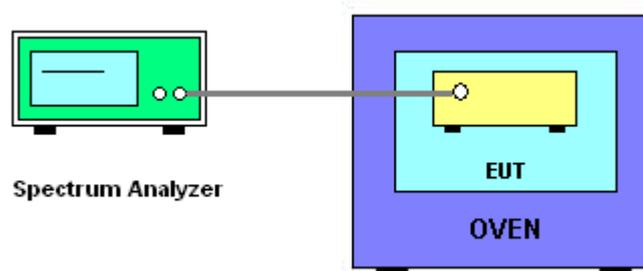

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Test Date	Jul. 19, 2013

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200
126.50	5200.0054
110.00	5200.0048
93.50	5200.0036
Max. Deviation (MHz)	0.005400
Max. Deviation (ppm)	1.04

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200
0	5200.0058
10	5200.0054
20	5200.0048
30	5200.0024
40	5200.0003
Max. Deviation (MHz)	0.005800
Max. Deviation (ppm)	1.12

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Ju1. 17, 2012	Conduction (CO01-CB)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz~30MHz	Feb. 21, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9kHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz - 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz - 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 04, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 28, 2012	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. MEASUREMENT UNCERTAINTY

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch				
Receiver VSWR 1=	-0.080	dB	U-shaped	0.060
AMN/LISN VSWR 2=				
Combined standard uncertainty $U_c(y)$				1.2
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				2.4

Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.173	dB	K=1	0.086
Cable loss	± 0.174	dB	K=2	0.087
Antenna gain	± 0.169	dB	K=2	0.084
Site imperfection	± 0.433	dB	Triangular	0.214
Pre-amplifier gain	± 0.366	dB	K=2	0.183
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.778
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.555

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.191	dB	K=1	0.095
Cable loss	±0.169	dB	K=2	0.084
Antenna gain	±0.191	dB	K=2	0.096
Site imperfection	±0.582	dB	Triangular	0.291
Pre-amplifier gain	±0.304	dB	K=2	0.152
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.839
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.678

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.186	dB	K=1	0.093
Cable loss	±0.167	dB	K=2	0.083
Antenna gain	±0.190	dB	K=2	0.095
Site imperfection	±0.488	dB	Triangular	0.244
Pre-amplifier gain	±0.269	dB	K=2	0.134
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.771
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.541

Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	±0.038	dB	K=2	0.019
Attenuator	±0.047	dB	K=2	0.024
Power Meter specification	±0.300	dB	Triangular	0.150
Power Sensor specification	±0.300	dB	Rectangular	0.150
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				0.863
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				1.726