


FCC Test Report

FCC ID : PY313200235
Equipment : LTE Gateway
Model No. : LG6100D
Brand Name : NETGEAR
Applicant : NETGEAR, Inc.
Address : 350 East Plumeria Drive, San Jose, California
95134, USA
Standard : 47 CFR FCC Part 15.247
Received Date : Oct. 11, 2013
Tested Date : Oct. 11 ~ Nov. 01, 2013

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

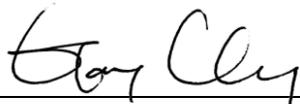

Gary Chang / Manager



Testing Laboratory
2732

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	9
1.4	The Equipment List	10
1.5	Test Standards	12
1.6	Measurement Uncertainty	12
2	TEST CONFIGURATION	13
2.1	Testing Condition	13
2.2	The Worst Test Modes and Channel Details	13
3	TRANSMITTER TEST RESULTS.....	14
3.1	Conducted Emissions.....	14
3.2	6dB and Occupied Bandwidth	19
3.3	RF Output Power	22
3.4	Power Spectral Density	24
3.5	Unwanted Emissions into Restricted Frequency Bands	26
3.6	Unwanted Emissions into Non-Restricted Frequency Bands	50
4	TEST LABORATORY INFORMATION	58

Release Record

Report No.	Version	Description	Issued Date
FR3O2308AI	Rev. 01	Initial issue	Nov. 11, 2013

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.595MHz 40.67 (Margin -5.33dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]:61.78 MHz 38.25 (Margin -1.75dB) - QP	Pass
15.247(b)(3)	Fundamental Emission Output Power	Power [dBm]: 11a: 23.56 HT20: 23.63 HT40: 23.31 VHT20: 23.76 VHT40: 23.38 VHT80: 18.89	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
5725-5850	a	5745-5825	149-165 [5]	2	6-54 Mbps
5725-5850	n (HT20)	5745-5825	149-165 [5]	2	MCS 0-7
5725-5850	n (HT40)	5755-5795	151-159 [2]	2	MCS 0-7
5725-5850	ac (VHT20)	5745-5825	149-165 [5]	2	MCS 0-9
5725-5850	ac (VHT40)	5755-5795	151-159 [2]	2	MCS 0-9
5725-5850	ac (VHT80)	5775	155 [1]	2	MCS 0-9

Note 1: RF output power specifies that Maximum Conducted Average Power
 Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Model	Type	Operating Frequency (MHz) / Gain (dBi)					Connector
		2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5825	
401-10006-01	PCB Dipole Antenna	2.4	---	---	---	---	U.FL
401-10007-01	PCB Dipole Antenna	---	2.9	---	---	3.0	U.FL

1.1.3 EUT Operational Condition

Power Supply Type	12Vdc from AC adapter
--------------------------	-----------------------

1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	AC adapter 1	Brand Name: NETGEAR Model Name: P030WF120B Power Rating: I/P: 100-240Vac, 50-60Hz, 1.0A O/P: 12Vdc, 2.5A Power Line: DC 1.8m non-shielded cable w/o core
2	AC adapter 2	Brand Name: NETGEAR Model Name: MU30-5120250-A1 Power Rating: I/P: 100-240Vac, 50-60Hz, 0.8A O/P: 12Vdc, 2.5A Power Line: DC 1.8m non-shielded cable w/o core
3	AC adapter 3	Brand Name: NETGEAR Model Name: SAS030F1 Power Rating: I/P: 100-120Vac, 47-63Hz, 0.9A O/P: 12Vdc, 2.5A Power Line: DC 1.8m non-shielded cable w/o core

1.1.5 Channel List

Frequency band (MHz)		5725~5850			
802.11 a / HT20 / ac VHT20		802.11n HT40 / ac VHT40		802.11ac VHT80	
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
149	5745	151	5755	155	5775
153	5765	159	5795	---	---
157	5785	---	---	---	---
161	5805	---	---	---	---
165	5825	---	---	---	---

1.1.6 Test Tool and Duty Cycle

Test tool	CART V4.9
Duty Cycle Of Test Signal (%)	98.26% - IEEE 802.11a 98.14% - IEEE 802.11ac (VHT20) 94.78% - IEEE 802.11ac (VHT40) 89.45% - IEEE 802.11ac (VHT80)
Duty Factor	0.08 - IEEE 802.11a 0.08 - IEEE 802.11ac (VHT20) 0.23 - IEEE 802.11ac (VHT40) 0.48 - IEEE 802.11ac (VHT80)

1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)					
	a / n HT20 / ac VHT20			n HT40 / ac VHT40		ac VHT80
	5745	5785	5825	5755	5795	5775
a	22	22	22	---	---	---
n (HT20)	22	22	22	---	---	---
n (HT40)	---	---	---	20	23	---
ac (VHT20)	22	22	22	---	---	---
ac (VHT40)	---	---	---	20	23	---
ac (VHT80)	---	---	---	---	---	17



1.2 Local Support Equipment List

Support Equipment List						
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	E6430	---	DoC	RJ45, 8m non-shielded w/o core.
2	POE	PowerDsine	PD-3001G C/AC	---	DoC	RJ45, 8m non-shielded w/o core.

Note:

- 1) No. 2 was supplied by applicant.
- 2) POE is for POE mode only.

1.3 Test Setup Chart

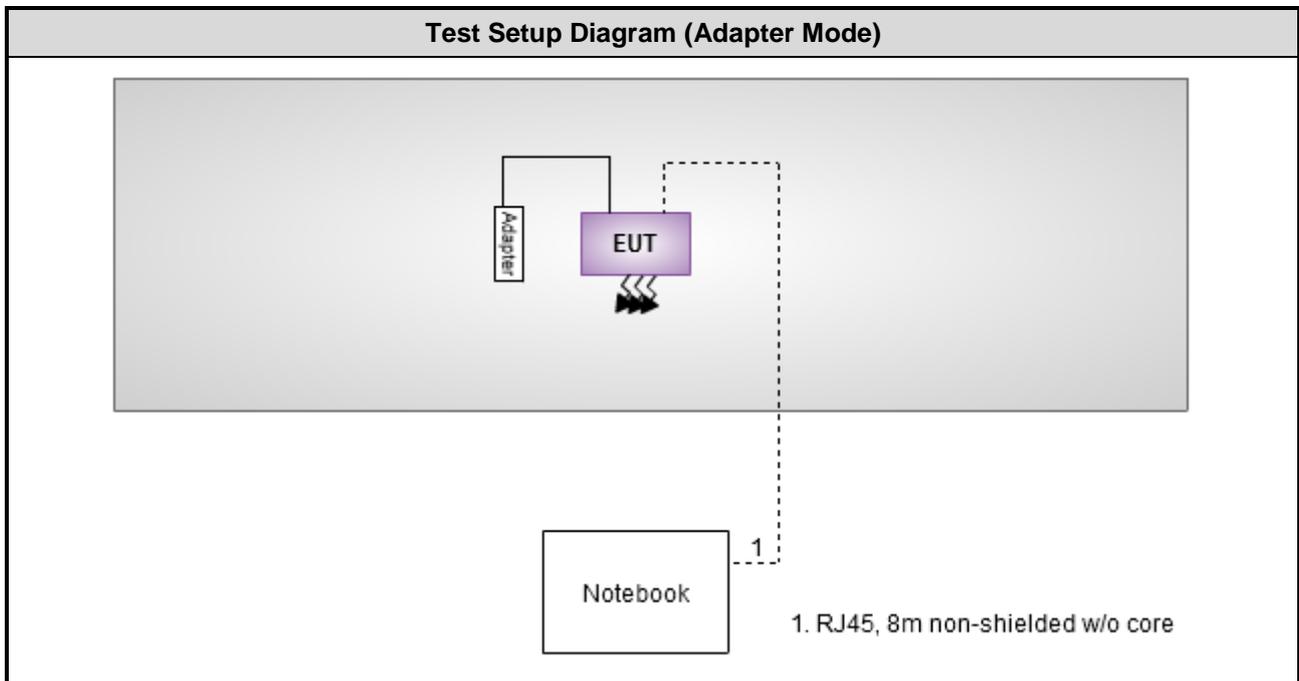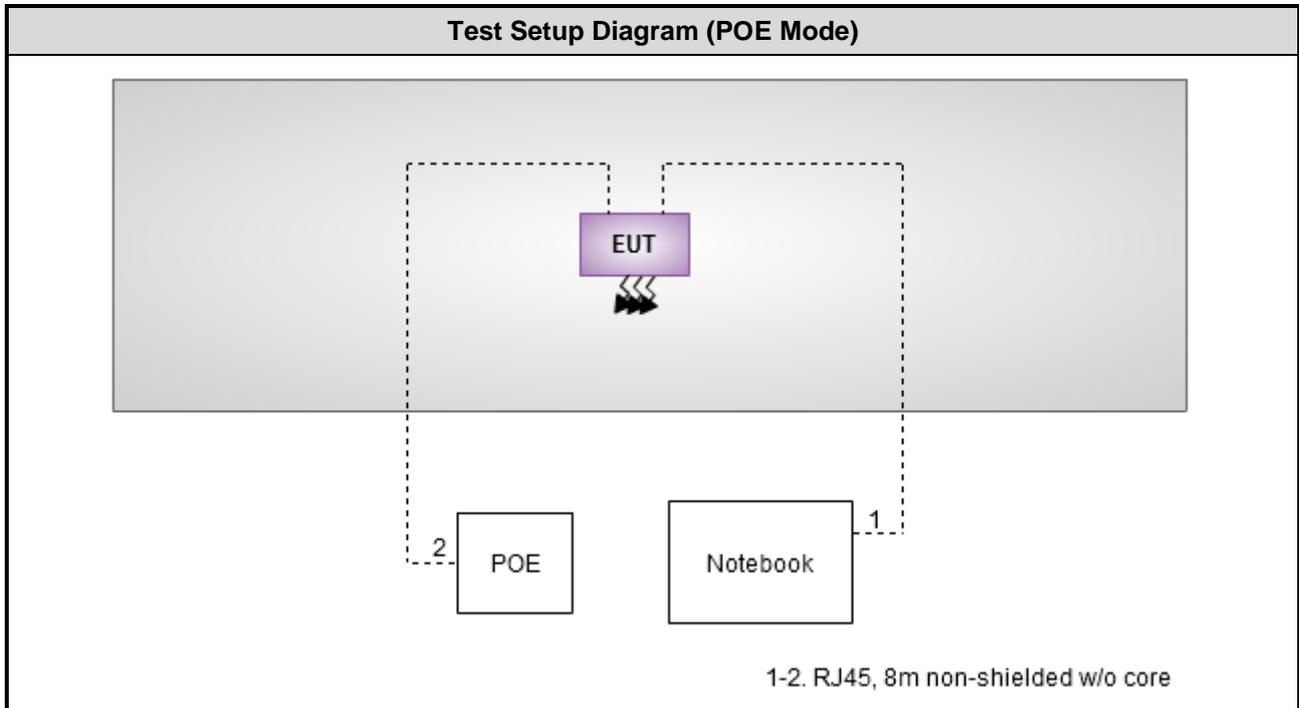

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 15, 2013	Oct. 14, 2014
LISN	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-667	Dec. 04, 2012	Dec. 03, 2013
LISN (Support Unit)	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-666	Dec. 04, 2012	Dec. 03, 2013
ISN	TESEQ	ISN T800	34406	Apr. 08, 2013	Apr. 07, 2014
ISN	TESEQ	ISN T200A	30494	Apr. 09, 2013	Apr. 08, 2014
ISN	TESEQ	ISN ST08	22589	Jan. 24, 2013	Jan. 23, 2014
RF Current Probe	FCC	F-33-4	121630	Dec. 04, 2012	Dec. 03, 2013
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 25, 2012	Dec. 24, 2013
ESH3-Z6 V-Network(+)	R&S	ESH3-Z6	100920	Nov. 21, 2012	Nov. 20, 2013
ESH3-Z6 V-Network(-)	R&S	ESH3-Z6	100951	Jan. 30, 2013	Jan. 29, 2014
Two-Line V-Network	R&S	ENV216	101579	Jan. 07, 2013	Jan. 06, 2014
50 ohm terminal	NA	50	01	Apr. 22, 2013	Apr. 21, 2014
50 ohm terminal	NA	50	02	Apr. 22, 2013	Apr. 21, 2014
50 ohm terminal	NA	50	03	Apr. 22, 2013	Apr. 21, 2014
50 ohm terminal (Support Unit)	NA	50	04	Apr. 22, 2013	Apr. 21, 2014
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV 40	101063	Feb. 18, 2013	Feb. 17, 2014
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Nov. 29, 2012	Nov. 28, 2013
Power Meter	Anritsu	ML2495A	1241002	Oct. 24, 2013	Oct. 23, 2014
Power Sensor	Anritsu	MA2411B	1027366	Oct. 24, 2013	Oct. 23, 2014
Signal Generator	R&S	SMB100A	175727	Jan. 14, 2013	Jan. 13, 2014
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission above 1GHz				
Test Site	966 chamber 2 / (03CH02-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
3m semi-anechoic chamber	CHAMPRO	SAC-03	03CH02-WS	Jan. 02, 2013	Jan. 01, 2014
Spectrum Analyzer	R&S	FSV40	101499	Jan. 28, 2013	Jan. 27, 2014
Receiver	R&S	ESR3	101657	Jan. 30, 2013	Jan. 29, 2014
Bilog Antenna	Schwarzbeck	VULB9168	VULB9168-524	Jan. 11, 2013	Jan. 10, 2014
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120D	BBHA 9120 D 1095	Jan. 29, 2013	Jan. 28, 2014
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Jan. 14, 2013	Jan. 13, 2014
Amplifier	Burgeon	BPA-530	100218	Dec. 14, 2012	Dec. 13, 2013
Amplifier	Agilent	83017A	MY39501309	Dec. 18, 2012	Dec. 17, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R03m	Woken	CFD400NL-LW	CFD400NL-003	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R10m	Woken	CFD400NL-LW	CFD400NL-004	Dec. 25, 2012	Dec. 24, 2013
control	EM Electronics	EM1000	060608	N/A	N/A
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission above 1GHz				
Test Site	966 chamber 2 / (03CH02-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014
Amplifier	MITEQ	AMF-6F-260400	9121372	Apr. 19, 2013	Apr. 18, 2015
Note: Calibration Interval of instruments listed above is two year.					

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2009

FCC KDB 558074 D01 DTS Meas Guidance v03r01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 35.286 Hz
Conducted power	± 0.536 dB
Frequency error	± 35.286 Hz
Temperature	± 0.3 °C
Conducted emission	± 2.946 dB
AC conducted emission	± 2.43 dB
Radiated emission	± 2.49 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	22°C / 61%	Skys Huang
Radiated Emissions	03CH02-WS	24°C / 64% 26°C / 63% 25°C / 64%	Haru Yang Anderson Hong Mark Liao
RF Conducted	TH01-WS	23°C / 62%	Felix Sung

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-2

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data rate (Mbps)	Test Configuration
Conducted Emissions	VHT20	5825	MCS 0	1, 2
Radiated Emissions (below 1GHz)	VHT20	5825	MCS 0	1, 2
Radiated Emissions (above 1GHz)	11a	5745 / 5785 / 5825	6	---
	VHT20	5745 / 5785 / 5825	MCS 0	
	VHT40	5755 / 5795	MCS 0	
	VHT80	5775	MCS 0	
Fundamental Emission Output Power	11a	5745 / 5785 / 5825	6	---
	HT20 / VHT20	5745 / 5785 / 5825	MCS 0	
	HT40 / VHT40	5755 / 5795	MCS 0	
	VHT80	5775	MCS 0	
6dB bandwidth Power spectral density	11a	5745 / 5785 / 5825	6	---
	VHT20	5745 / 5785 / 5825	MCS 0	
	VHT40	5755 / 5795	MCS 0	
	VHT80	5775	MCS 0	

NOTE:

- Three adapters had been pretested and found that adapter 2 (model: MU30-5120250-A1) was the worst case and was chosen for final test.
- EUT has 2 types of power supply, each type is selected to perform radiated emission and conduction emission test as below test configuration.
 - Configuration 1 : POE Mode.
 - Configuration 2 : Adapter Mode.

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures


1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

3.1.3 Test Setup

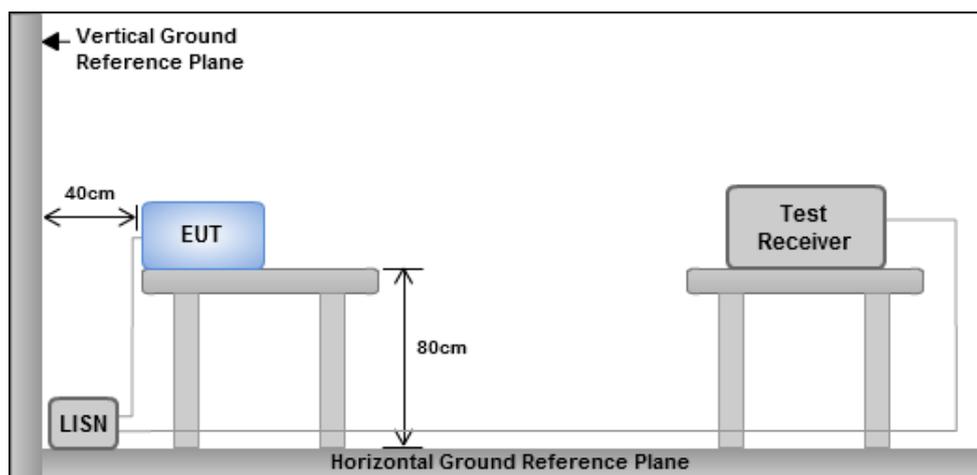


- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

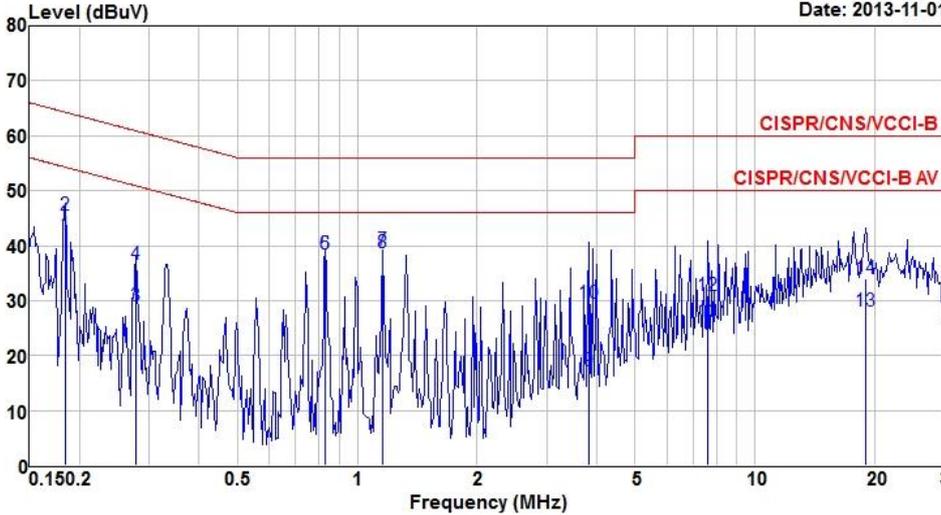Modulation Mode	VHT20	Test Freq. (MHz)	5825																																																																																																																																																									
Power Phase	Line	Test Mode	1																																																																																																																																																									
Date: 2013-11-01																																																																																																																																																												
																																																																																																																																																												
<table border="1"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>LISN</th> <th>cable</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>factor</th> <th>loss</th> <th></th> </tr> <tr> <th></th> <th></th> <th></th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>0.184</td><td>42.02</td><td>54.28</td><td>-12.26</td><td>41.84</td><td>0.03</td><td>0.15</td><td>Average</td></tr> <tr><td>2</td><td>0.184</td><td>45.65</td><td>64.28</td><td>-18.63</td><td>45.47</td><td>0.03</td><td>0.15</td><td>QP</td></tr> <tr><td>3</td><td>0.277</td><td>28.96</td><td>50.90</td><td>-21.94</td><td>28.81</td><td>0.03</td><td>0.12</td><td>Average</td></tr> <tr><td>4</td><td>0.277</td><td>36.49</td><td>60.90</td><td>-24.41</td><td>36.34</td><td>0.03</td><td>0.12</td><td>QP</td></tr> <tr><td>5</td><td>0.830</td><td>38.43</td><td>46.00</td><td>-7.57</td><td>38.36</td><td>0.03</td><td>0.04</td><td>Average</td></tr> <tr><td>6</td><td>0.830</td><td>38.38</td><td>56.00</td><td>-17.62</td><td>38.31</td><td>0.03</td><td>0.04</td><td>QP</td></tr> <tr><td>7</td><td>1.160</td><td>39.23</td><td>46.00</td><td>-6.77</td><td>39.12</td><td>0.04</td><td>0.07</td><td>Average</td></tr> <tr><td>8</td><td>1.160</td><td>38.62</td><td>56.00</td><td>-17.38</td><td>38.51</td><td>0.04</td><td>0.07</td><td>QP</td></tr> <tr><td>9</td><td>3.820</td><td>17.13</td><td>46.00</td><td>-28.87</td><td>16.84</td><td>0.06</td><td>0.23</td><td>Average</td></tr> <tr><td>10</td><td>3.820</td><td>29.57</td><td>56.00</td><td>-26.43</td><td>29.28</td><td>0.06</td><td>0.23</td><td>QP</td></tr> <tr><td>11</td><td>7.606</td><td>26.14</td><td>50.00</td><td>-23.86</td><td>25.90</td><td>0.09</td><td>0.15</td><td>Average</td></tr> <tr><td>12</td><td>7.606</td><td>31.00</td><td>60.00</td><td>-29.00</td><td>30.76</td><td>0.09</td><td>0.15</td><td>QP</td></tr> <tr><td>13</td><td>19.021</td><td>28.11</td><td>50.00</td><td>-21.89</td><td>27.81</td><td>0.12</td><td>0.18</td><td>Average</td></tr> <tr><td>14</td><td>19.021</td><td>34.04</td><td>60.00</td><td>-25.96</td><td>33.74</td><td>0.12</td><td>0.18</td><td>QP</td></tr> </tbody> </table>					Freq	Level	Limit	Over	Read	LISN	cable	Remark		MHz	dBuV	Line	Limit	Level	factor	loss					dBuV	dB	dBuV	dB	dB		1	0.184	42.02	54.28	-12.26	41.84	0.03	0.15	Average	2	0.184	45.65	64.28	-18.63	45.47	0.03	0.15	QP	3	0.277	28.96	50.90	-21.94	28.81	0.03	0.12	Average	4	0.277	36.49	60.90	-24.41	36.34	0.03	0.12	QP	5	0.830	38.43	46.00	-7.57	38.36	0.03	0.04	Average	6	0.830	38.38	56.00	-17.62	38.31	0.03	0.04	QP	7	1.160	39.23	46.00	-6.77	39.12	0.04	0.07	Average	8	1.160	38.62	56.00	-17.38	38.51	0.04	0.07	QP	9	3.820	17.13	46.00	-28.87	16.84	0.06	0.23	Average	10	3.820	29.57	56.00	-26.43	29.28	0.06	0.23	QP	11	7.606	26.14	50.00	-23.86	25.90	0.09	0.15	Average	12	7.606	31.00	60.00	-29.00	30.76	0.09	0.15	QP	13	19.021	28.11	50.00	-21.89	27.81	0.12	0.18	Average	14	19.021	34.04	60.00	-25.96	33.74	0.12	0.18	QP
	Freq	Level	Limit	Over	Read	LISN	cable	Remark																																																																																																																																																				
	MHz	dBuV	Line	Limit	Level	factor	loss																																																																																																																																																					
			dBuV	dB	dBuV	dB	dB																																																																																																																																																					
1	0.184	42.02	54.28	-12.26	41.84	0.03	0.15	Average																																																																																																																																																				
2	0.184	45.65	64.28	-18.63	45.47	0.03	0.15	QP																																																																																																																																																				
3	0.277	28.96	50.90	-21.94	28.81	0.03	0.12	Average																																																																																																																																																				
4	0.277	36.49	60.90	-24.41	36.34	0.03	0.12	QP																																																																																																																																																				
5	0.830	38.43	46.00	-7.57	38.36	0.03	0.04	Average																																																																																																																																																				
6	0.830	38.38	56.00	-17.62	38.31	0.03	0.04	QP																																																																																																																																																				
7	1.160	39.23	46.00	-6.77	39.12	0.04	0.07	Average																																																																																																																																																				
8	1.160	38.62	56.00	-17.38	38.51	0.04	0.07	QP																																																																																																																																																				
9	3.820	17.13	46.00	-28.87	16.84	0.06	0.23	Average																																																																																																																																																				
10	3.820	29.57	56.00	-26.43	29.28	0.06	0.23	QP																																																																																																																																																				
11	7.606	26.14	50.00	-23.86	25.90	0.09	0.15	Average																																																																																																																																																				
12	7.606	31.00	60.00	-29.00	30.76	0.09	0.15	QP																																																																																																																																																				
13	19.021	28.11	50.00	-21.89	27.81	0.12	0.18	Average																																																																																																																																																				
14	19.021	34.04	60.00	-25.96	33.74	0.12	0.18	QP																																																																																																																																																				
<p>Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB). 2: Over Limit (dBuV) = Limit Line (dBuV) – Level (dBuV).</p>																																																																																																																																																												


Modulation Mode	VHT20	Test Freq. (MHz)	5825
Power Phase	Neutral	Test Mode	1

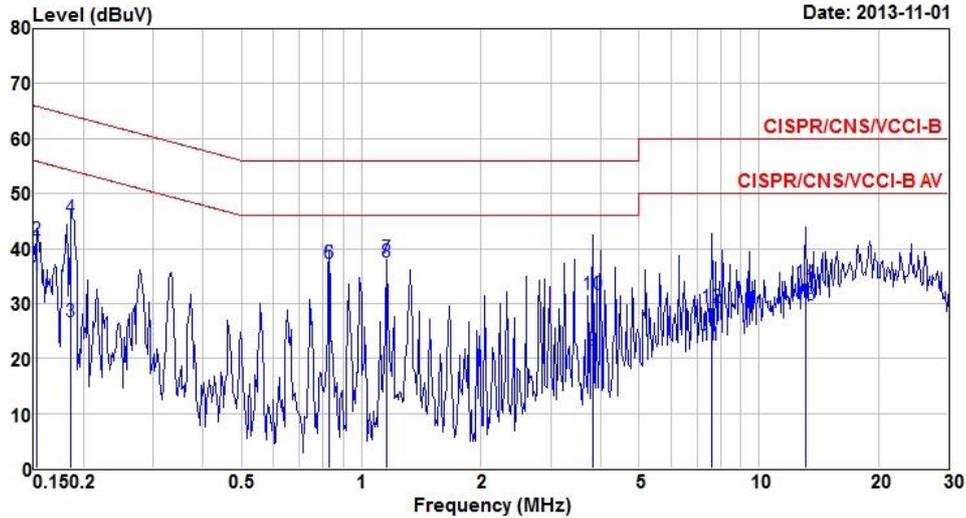

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.152	34.91	55.87	-20.96	34.82	0.02	0.07	Average
2	0.152	41.59	65.87	-24.28	41.50	0.02	0.07	QP
3	0.186	26.61	54.20	-27.59	26.44	0.02	0.15	Average
4	0.186	45.59	64.20	-18.61	45.42	0.02	0.15	QP
5	0.830	37.23	46.00	-8.77	37.17	0.02	0.04	Average
6	0.830	37.38	56.00	-18.62	37.32	0.02	0.04	QP
7	1.160	38.26	46.00	-7.74	38.16	0.03	0.07	Average
8	1.160	37.64	56.00	-18.36	37.54	0.03	0.07	QP
9	3.820	21.54	46.00	-24.46	21.26	0.05	0.23	Average
10	3.820	31.66	56.00	-24.34	31.38	0.05	0.23	QP
11	7.606	22.55	50.00	-27.45	22.32	0.08	0.15	Average
12	7.606	29.32	60.00	-30.68	29.09	0.08	0.15	QP
13	13.127	29.65	50.00	-20.35	29.40	0.13	0.12	Average
14	13.127	33.70	60.00	-26.30	33.45	0.13	0.12	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 Note 2: Over Limit (dBuV) = Limit Line (dBuV) – Level (dBuV).


Modulation Mode	VHT20	Test Freq. (MHz)	5825
Power Phase	Line	Test Mode	2

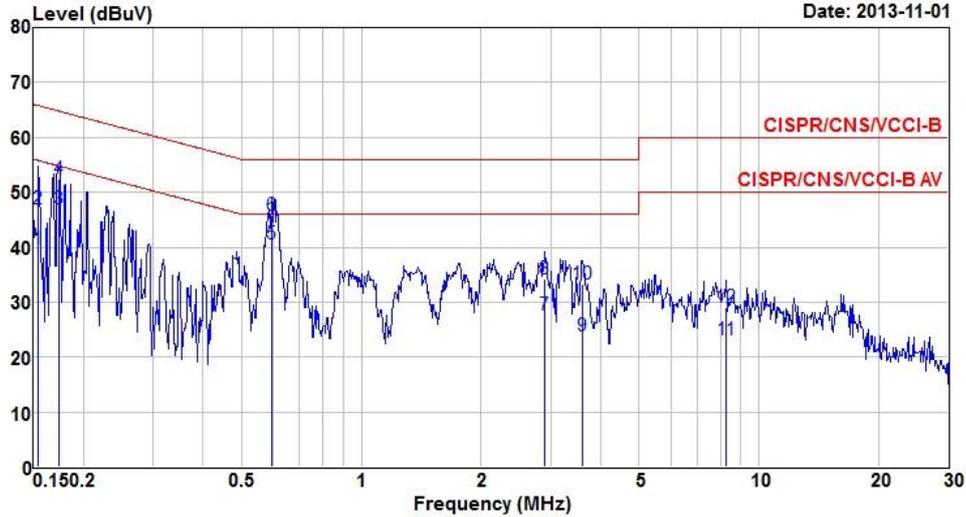

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.154	39.58	55.78	-16.20	39.48	0.03	0.07	Average
2	0.154	46.97	65.78	-18.81	46.87	0.03	0.07	QP
3	0.173	46.92	54.81	-7.89	46.77	0.03	0.12	Average
4	0.173	52.31	64.81	-12.50	52.16	0.03	0.12	QP
5	0.595	40.67	46.00	-5.33	40.59	0.03	0.05	Average
6	0.595	45.79	56.00	-10.21	45.71	0.03	0.05	QP
7	2.900	27.56	46.00	-18.44	27.31	0.05	0.20	Average
8	2.900	34.13	56.00	-21.87	33.88	0.05	0.20	QP
9	3.603	23.92	46.00	-22.08	23.63	0.06	0.23	Average
10	3.603	33.22	56.00	-22.78	32.93	0.06	0.23	QP
11	8.279	23.25	50.00	-26.75	23.02	0.09	0.14	Average
12	8.279	28.94	60.00	-31.06	28.71	0.09	0.14	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dBuV) = Limit Line (dBuV) – Level (dBuV).

Modulation Mode	VHT20	Test Freq. (MHz)	5825
Power Phase	Neutral	Test Mode	2

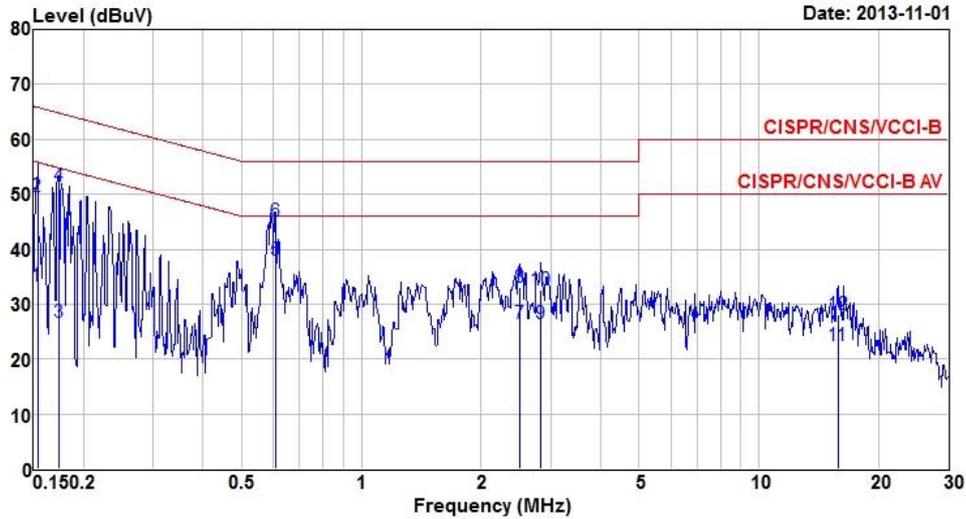

	Freq	Level	Limit	Over	Read	LISN	cable	
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark
			dBuV	dB	dBuV	dB	dB	
1	0.153	33.38	55.82	-22.44	33.29	0.02	0.07	Average
2	0.153	49.64	65.82	-16.18	49.55	0.02	0.07	QP
3	0.173	26.71	54.81	-28.10	26.57	0.02	0.12	Average
4	0.173	51.38	64.81	-13.43	51.24	0.02	0.12	QP
5	0.608	37.92	46.00	-8.08	37.85	0.02	0.05	Average
6	0.608	45.07	56.00	-10.93	45.00	0.02	0.05	QP
7	2.500	26.47	46.00	-19.53	26.24	0.04	0.19	Average
8	2.500	33.05	56.00	-22.95	32.82	0.04	0.19	QP
9	2.824	26.51	46.00	-19.49	26.27	0.04	0.20	Average
10	2.824	32.52	56.00	-23.48	32.28	0.04	0.20	QP
11	15.801	22.47	50.00	-27.53	22.22	0.11	0.14	Average
12	15.801	28.06	60.00	-31.94	27.81	0.11	0.14	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).
 Note 2: Over Limit (dBUV) = Limit Line (dBUV) – Level (dBUV).

3.2 6dB and Occupied Bandwidth


3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

3.2.3 Test Setup

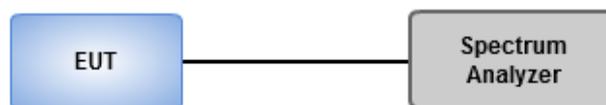


3.2.4 Test Result of 6dB and Occupied Bandwidth

Modulation Mode	N _{TX}	Freq. (MHz)	6dB Bandwidth (MHz)				Limit (kHz)
			Chain 0	Chain 1	Chain 2	Chain 3	
11a	2	5745	16.35	16.35	---	---	500
11a	2	5785	16.35	16.35	---	---	500
11a	2	5825	16.35	16.35	---	---	500
VHT20	2	5745	17.22	17.62	---	---	500
VHT20	2	5785	17.57	17.57	---	---	500
VHT20	2	5825	17.57	17.51	---	---	500
VHT40	2	5755	36.29	36.29	---	---	500
VHT40	2	5795	35.83	36.29	---	---	500
VHT80	2	5775	75.83	75.59	---	---	500

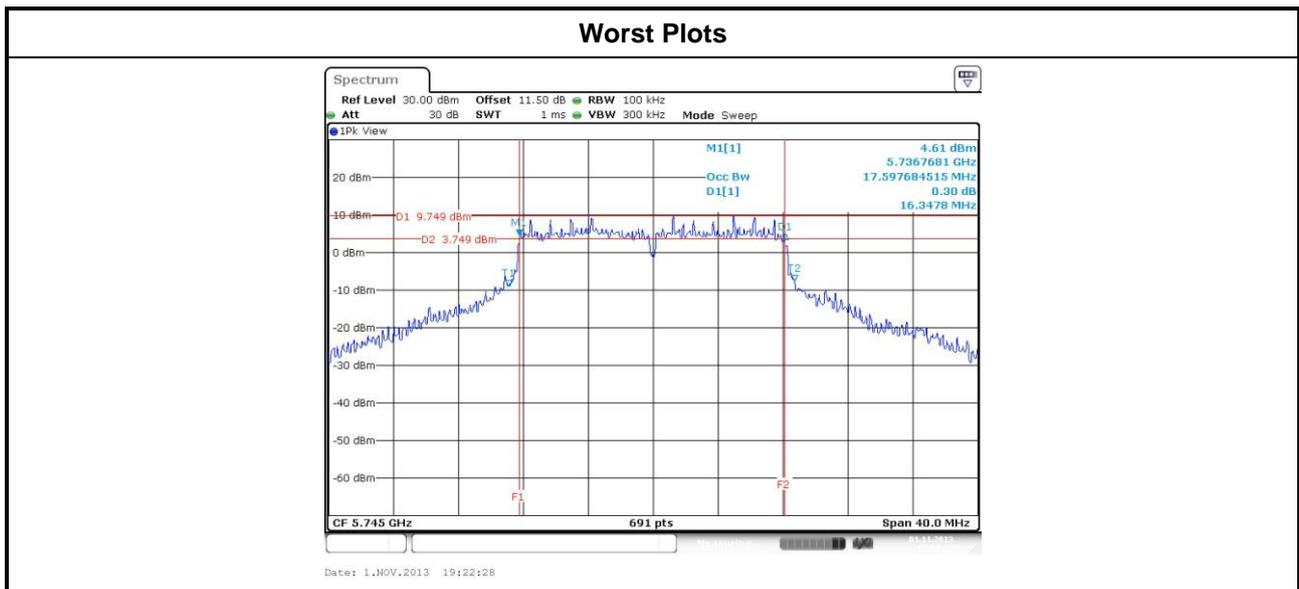

Modulation Mode	N _{TX}	Freq. (MHz)	99% Occupied Bandwidth (MHz)			
			Chain 0	Chain 1	Chain 2	Chain 3
11a	2	5745	21.53	23.33	---	---
11a	2	5785	20.43	24.02	---	---
11a	2	5825	19.86	24.14	---	---
VHT20	2	5745	21.71	24.25	---	---
VHT20	2	5785	20.96	24.20	---	---
VHT20	2	5825	21.13	25.47	---	---
VHT40	2	5755	41.33	44.23	---	---
VHT40	2	5795	40.87	44.69	---	---
VHT80	2	5775	76.41	76.18	---	---

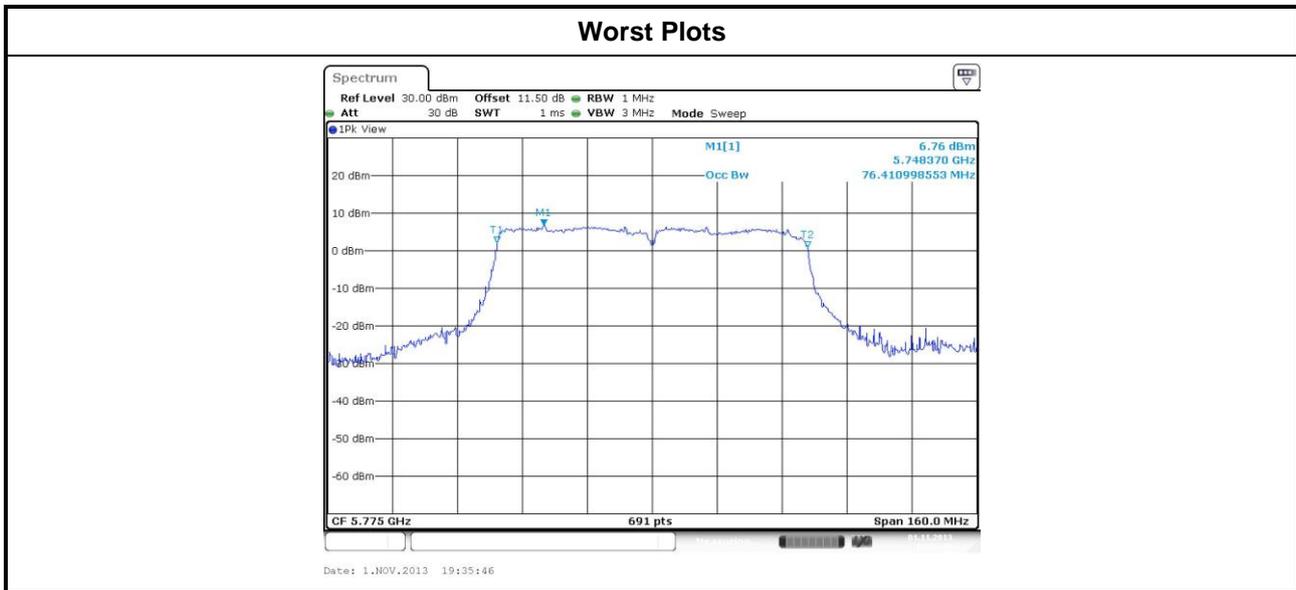

3.3 RF Output Power

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.

- Antenna gain \leq 6dBi, no any corresponding reduction is in output power limit.
- Antenna gain $>$ 6dBi
 - Non Fixed, point to point operations.
The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB
 - Fixed, point to point operations
Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations ,no any corresponding reduction is in transmitter peak output power

3.3.2 Test Procedures

- Maximum Peak Conducted Output Power
 - Spectrum analyzer**
 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.
 - Power meter**
 1. A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power
 - Spectrum analyzer**
 1. Set RBW = 1MHz, VBW = 3MHz, Detector = RMS.
 2. Set the sweep time to: $\geq 10 \times$ (number of measurement points in sweep) \times (maximum data rate per stream).
 3. Perform the measurement over a single sweep.
 4. Use the spectrum analyzer's band power measurement function with band limits set equal to the EBW(26dBc) band edges.
 - Power meter**
 1. A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



3.3.4 Test Result of Maximum Output Power

Modulation Mode	N _{TX}	Freq. (MHz)	Conducted (average) output power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	2	5745	20.72	20.32	---	---	225.679	23.53	30
11a	2	5785	20.56	20.53	---	---	226.742	23.56	30
11a	2	5825	20.19	20.52	---	---	217.192	23.37	30
HT20	2	5745	20.67	20.56	---	---	230.444	23.63	30
HT20	2	5785	20.43	20.62	---	---	225.753	23.54	30
HT20	2	5825	20.11	20.81	---	---	223.069	23.48	30
HT40	2	5755	18.53	18.71	---	---	145.587	21.63	30
HT40	2	5795	20.11	20.48	---	---	214.252	23.31	30
VHT20	2	5745	20.82	20.67	---	---	237.462	23.76	30
VHT20	2	5785	20.29	20.75	---	---	225.756	23.54	30
VHT20	2	5825	20.36	20.83	---	---	229.702	23.61	30
VHT40	2	5755	18.66	18.83	---	---	149.835	21.76	30
VHT40	2	5795	20.22	20.52	---	---	217.916	23.38	30
VHT80	2	5775	15.83	15.92	---	---	77.367	18.89	30

3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
 1. Set the RBW = 30kHz, VBW = 100kHz.
 2. Detector = Peak, Sweep time = auto couple.
 3. Trace mode = max hold, allow trace to fully stabilize.
 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit. (For 11a / VHT20)
 1. Set the RBW = 30kHz, VBW = 100 kHz.
 2. Detector = RMS, Sweep time = auto couple.
 3. Employ trace averaging mode over a minimum of 100 traces
 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit. (For VHT40 / VHT80)
 - 1 Set the RBW = 30kHz, VBW = 100 kHz.
 - 2 Detector = RMS, Sweep time = auto couple.
 - 3 Set the sweep time to: $\geq 10 \times (\text{number of measurement points in sweep}) \times (\text{maximum data rate per stream})$.
 - 4 Perform the measurement over a single sweep.
 - 5 Use the peak marker function to determine the maximum amplitude level.


3.4.3 Test Setup

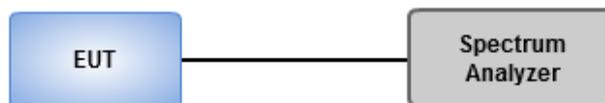

3.4.4 Test Result of Power Spectral Density

Modulation Mode	N _{TX}	Freq. (MHz)	Total Power Spectral Density (dBm/30kHz)	Limit (dBm/3kHz)
11a	2	5745	-1.90	8
11a	2	5785	-1.97	8
11a	2	5825	-1.94	8
VHT20	2	5745	-2.00	8
VHT20	2	5785	-1.66	8
VHT20	2	5825	-2.00	8
VHT40	2	5755	-5.71	8
VHT40	2	5795	-5.94	8
VHT80	2	5775	-11.99	8

Note: Test result is bin-by-bin summing measured value of each TX port.

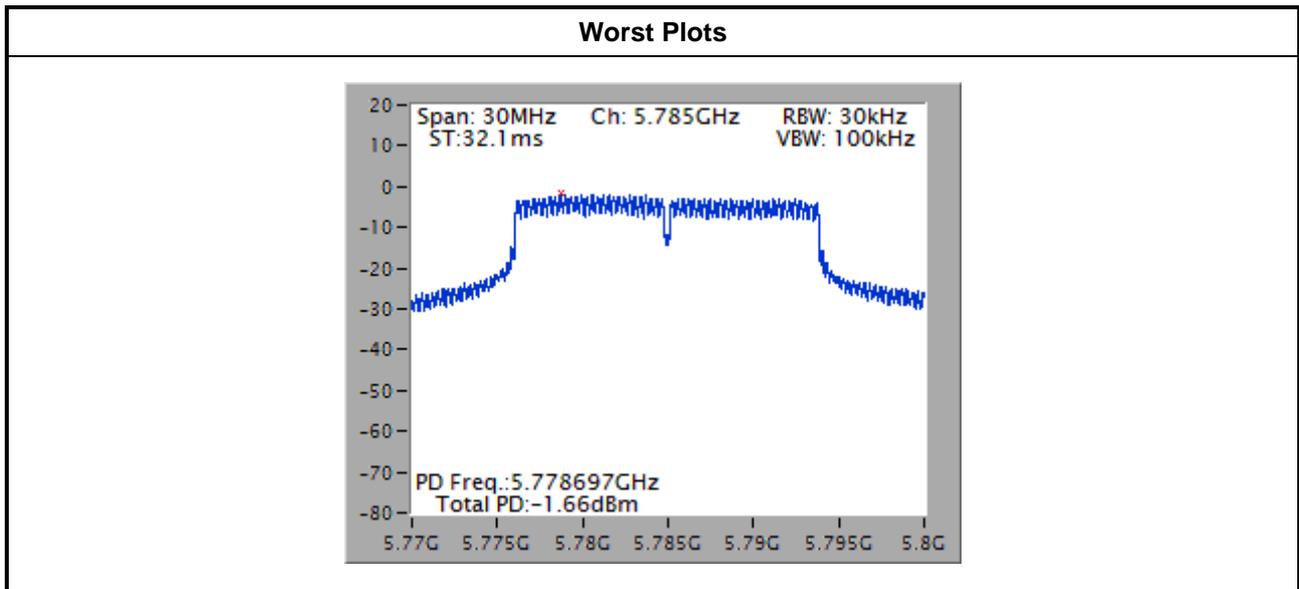

3.5 Unwanted Emissions into Restricted Frequency Bands

3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.


3.5.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup

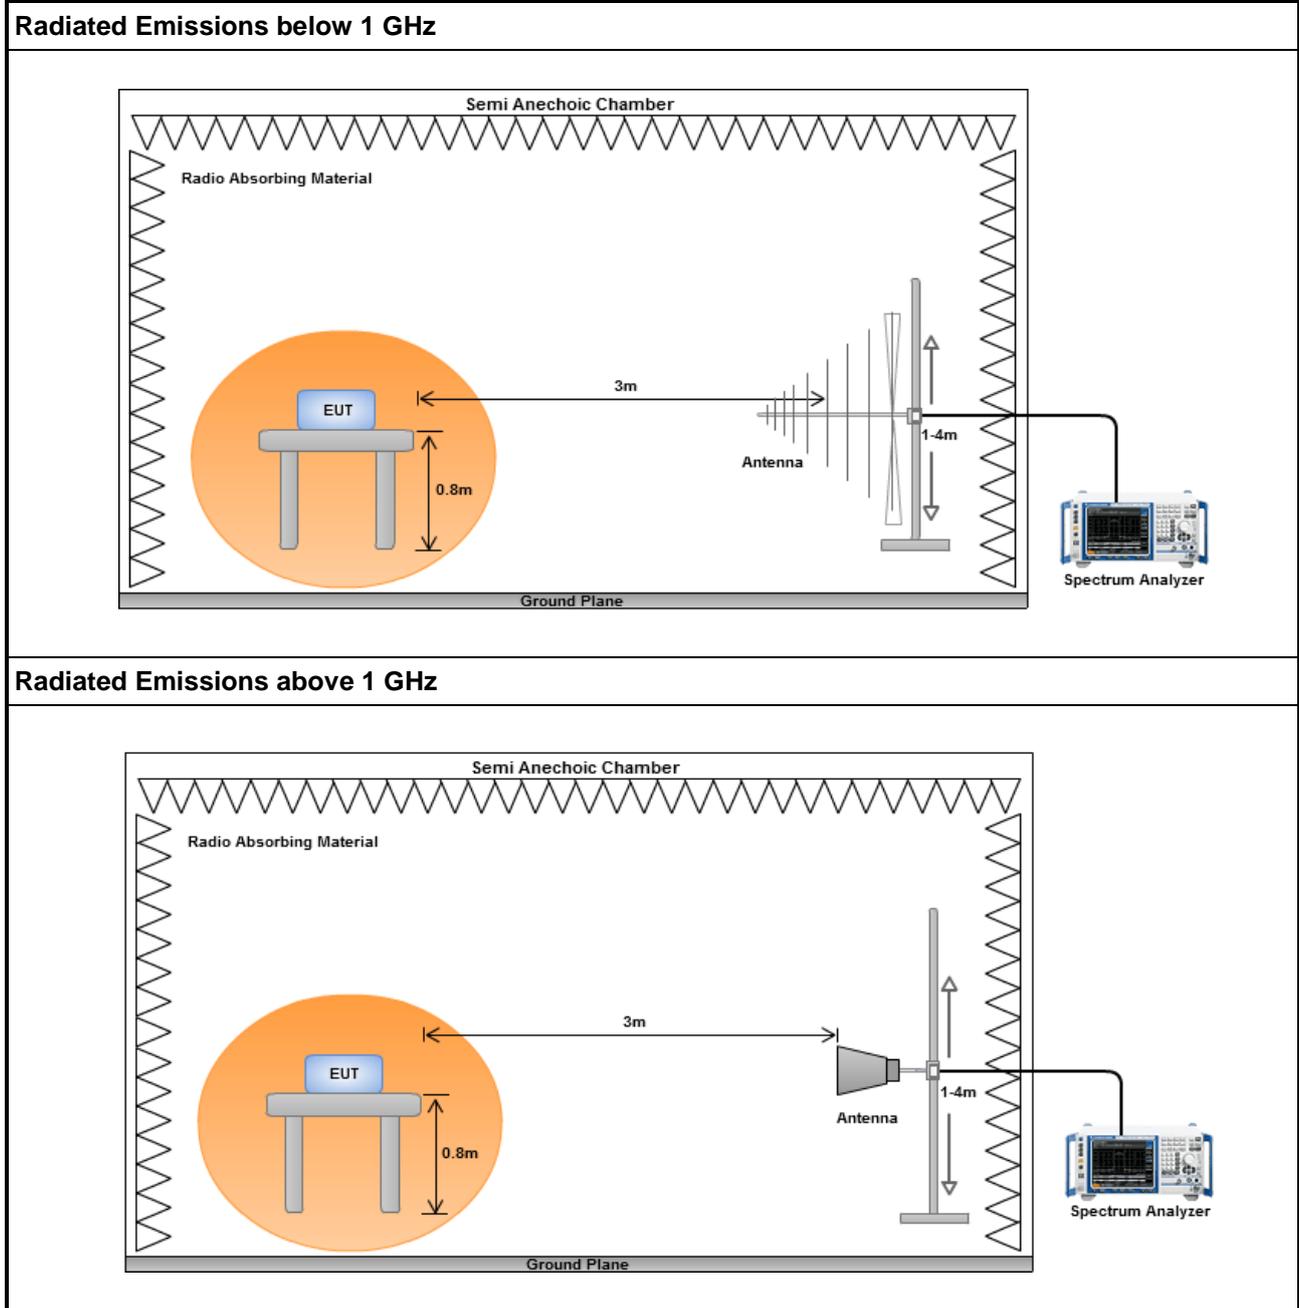

3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Horizontal	Test Configuration	1

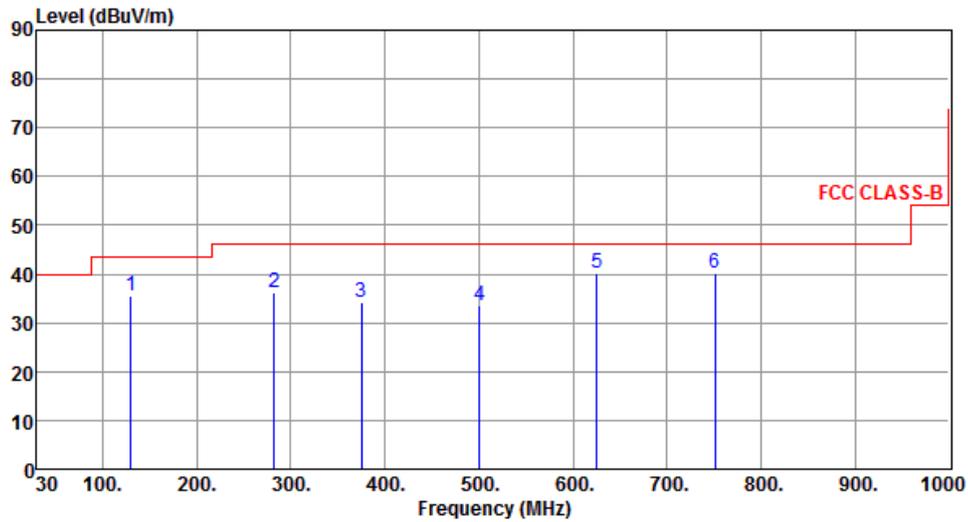


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	129.91	35.56	43.50	-7.94	53.38	-17.82	Peak	---	---
2	282.20	36.23	46.00	-9.77	52.23	-16.00	Peak	---	---
3	375.32	34.34	46.00	-11.66	48.04	-13.70	Peak	---	---
4	500.45	33.67	46.00	-12.33	44.61	-10.94	Peak	---	---
5	625.58	40.08	46.00	-5.92	48.66	-8.58	Peak	---	---
6	750.71	40.16	46.00	-5.84	46.77	-6.61	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Vertical	Test Configuration	1

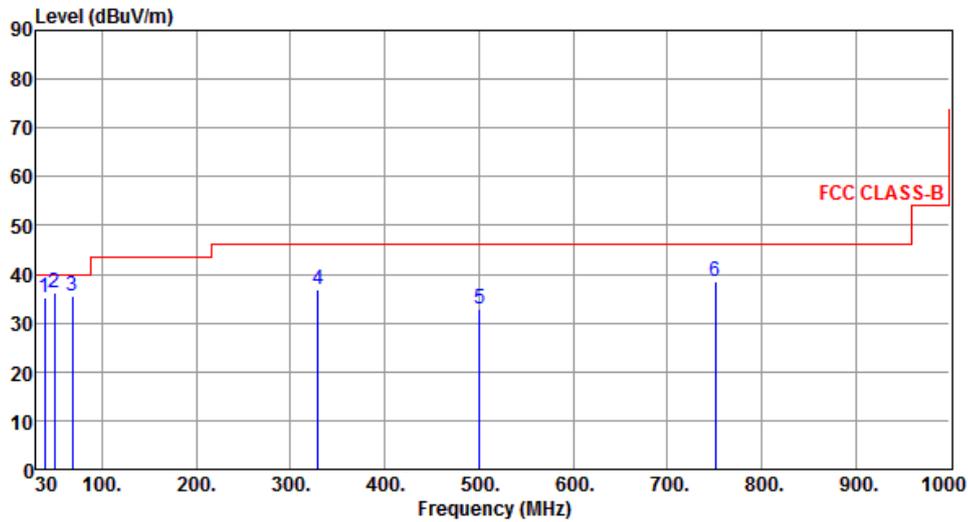


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	38.77	35.27	40.00	-4.73	51.76	-16.49	QP	---	---
2	49.20	36.29	40.00	-3.71	52.26	-15.97	QP	---	---
3	68.86	35.49	40.00	-4.51	53.94	-18.45	QP	---	---
4	328.76	36.87	46.00	-9.13	51.77	-14.90	Peak	---	---
5	500.45	32.77	46.00	-13.23	43.71	-10.94	Peak	---	---
6	750.71	38.64	46.00	-7.36	45.25	-6.61	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Horizontal	Test Configuration	2

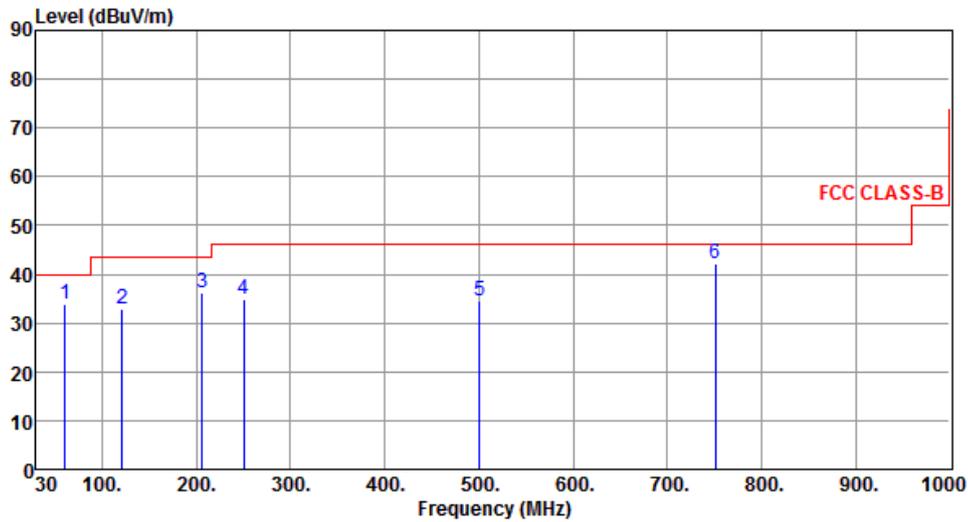


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	61.04	33.89	40.00	-6.11	50.79	-16.90	Peak	---	---
2	121.18	32.72	43.50	-10.78	51.33	-18.61	Peak	---	---
3	206.54	36.06	43.50	-7.44	55.00	-18.94	Peak	---	---
4	250.19	34.94	46.00	-11.06	52.28	-17.34	Peak	---	---
5	500.45	34.62	46.00	-11.38	45.56	-10.94	Peak	---	---
6	750.71	42.15	46.00	-3.85	48.76	-6.61	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Vertical	Test Configuration	2

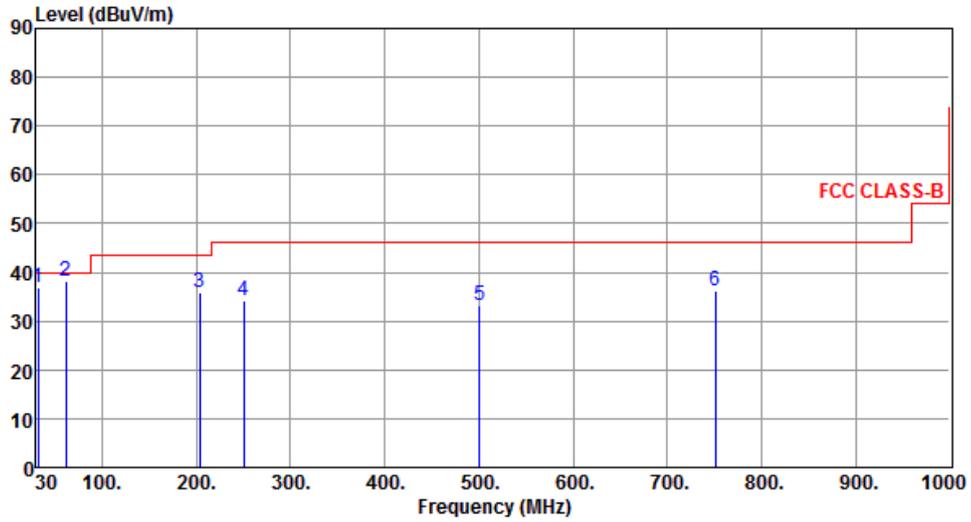

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	32.01	36.96	40.00	-3.04	53.89	-16.93	QP	---	---
2	61.78	38.25	40.00	-1.75	55.30	-17.05	QP	---	---
3	203.63	35.86	43.50	-7.64	54.90	-19.04	Peak	---	---
4	250.19	34.15	46.00	-11.85	51.49	-17.34	Peak	---	---
5	500.45	33.36	46.00	-12.64	44.30	-10.94	Peak	---	---
6	750.71	36.18	46.00	-9.82	42.79	-6.61	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Horizontal	Test Configuration	1

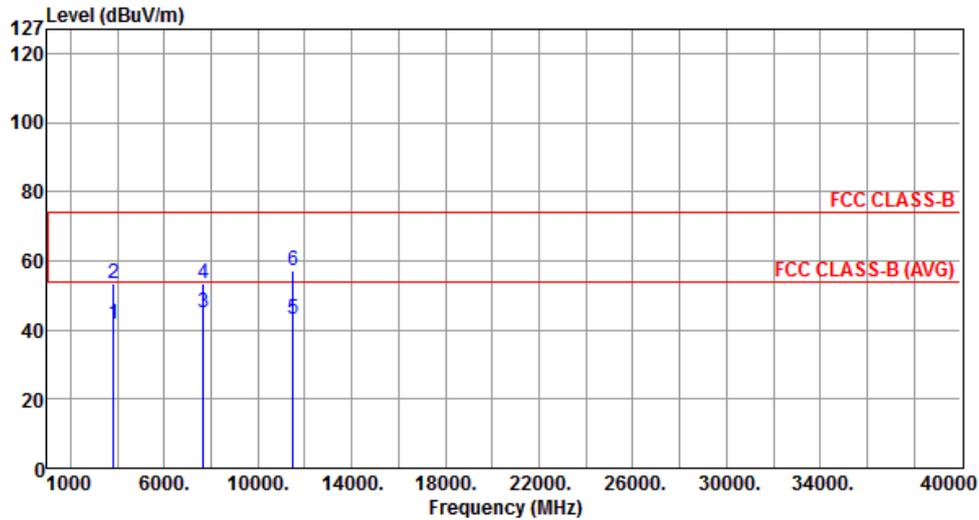


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	41.74	54.00	-12.26	39.70	2.04	Average	---	---
2	3830.00	53.64	74.00	-20.36	51.60	2.04	Peak	---	---
3	7660.00	45.02	54.00	-8.98	35.09	9.93	Average	---	---
4	7660.00	53.48	74.00	-20.52	43.55	9.93	Peak	---	---
5	11490.00	43.21	54.00	-10.79	28.39	14.82	Average	---	---
6	11490.00	57.15	74.00	-16.85	42.33	14.82	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Vertical	Test Configuration	1

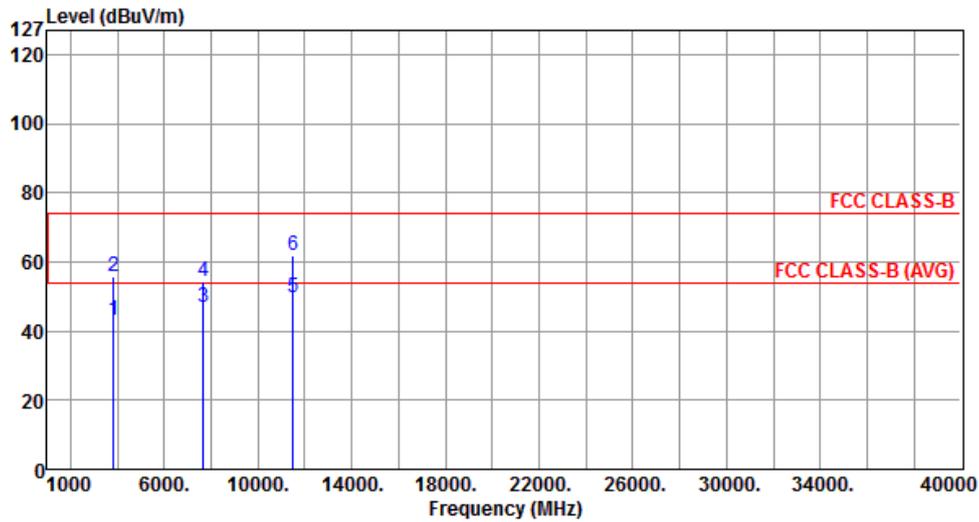


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	43.24	54.00	-10.76	41.20	2.04	Average	---	---
2	3830.00	55.64	74.00	-18.36	53.60	2.04	Peak	---	---
3	7660.00	46.98	54.00	-7.02	37.05	9.93	Average	---	---
4	7660.00	54.52	74.00	-19.48	44.59	9.93	Peak	---	---
5	11490.00	49.82	54.00	-4.18	35.00	14.82	Average	---	---
6	11490.00	61.75	74.00	-12.25	46.93	14.82	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Horizontal	Test Configuration	1

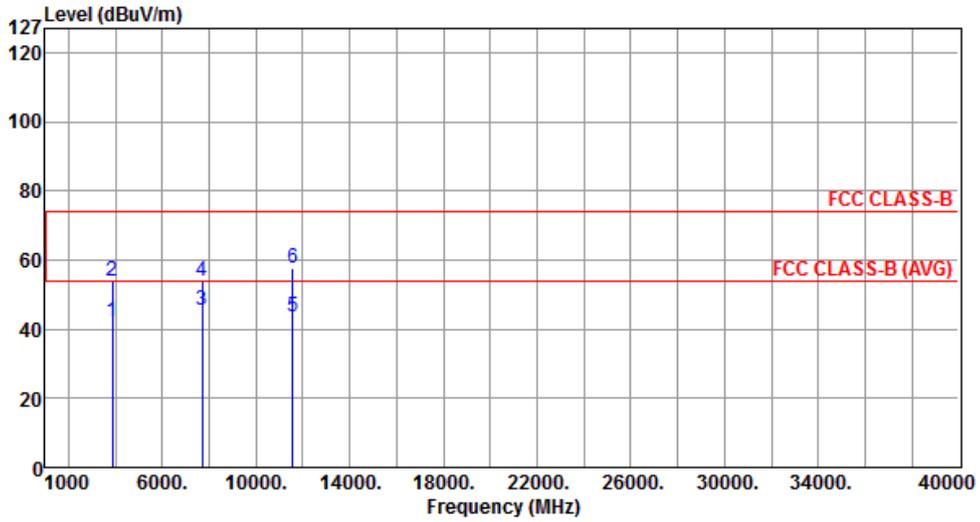


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.70	42.10	54.00	-11.90	40.01	2.09	Average	---	---
2	3856.70	53.86	74.00	-20.14	51.77	2.09	Peak	---	---
3	7713.30	45.40	54.00	-8.60	35.47	9.93	Average	---	---
4	7713.30	53.83	74.00	-20.17	43.90	9.93	Peak	---	---
5	11570.00	43.61	54.00	-10.39	28.91	14.70	Average	---	---
6	11570.00	57.49	74.00	-16.51	42.79	14.70	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Vertical	Test Configuration	1

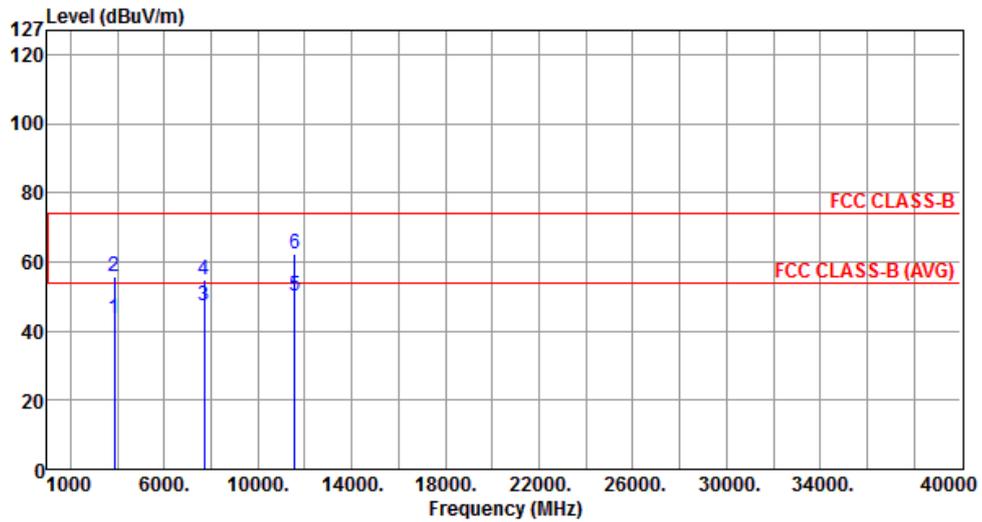


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.70	43.58	54.00	-10.42	41.49	2.09	Average	---	---
2	3856.70	55.93	74.00	-18.07	53.84	2.09	Peak	---	---
3	7713.30	47.31	54.00	-6.69	37.38	9.93	Average	---	---
4	7713.30	54.80	74.00	-19.20	44.87	9.93	Peak	---	---
5	11570.00	50.18	54.00	-3.82	35.48	14.70	Average	---	---
6	11570.00	62.22	74.00	-11.78	47.52	14.70	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5825
Polarization	Horizontal	Test Configuration	1

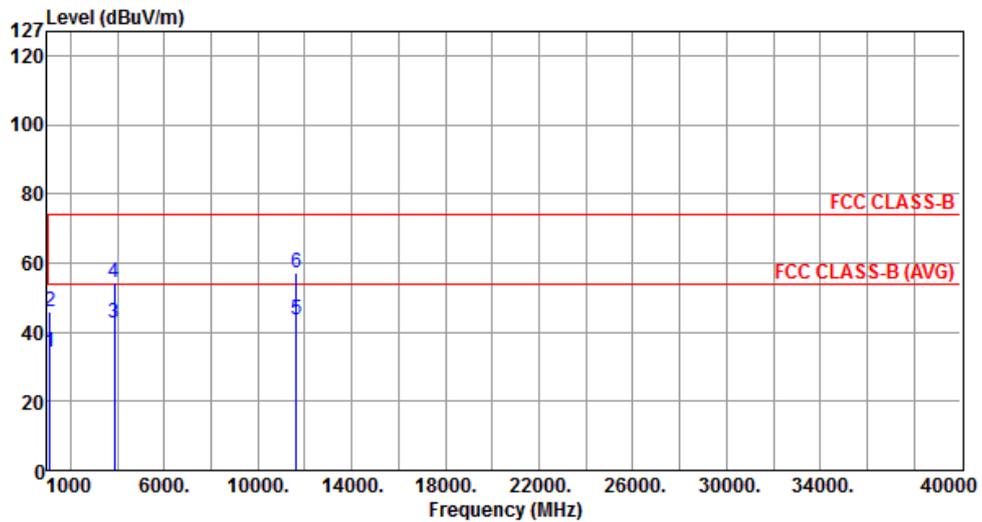


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1125.00	34.30	54.00	-19.70	43.39	-9.09	Average	---	---
2	1125.00	45.90	74.00	-28.10	54.99	-9.09	Peak	---	---
3	3883.30	42.43	54.00	-11.57	40.28	2.15	Average	---	---
4	3883.30	54.21	74.00	-19.79	52.06	2.15	Peak	---	---
5	11650.00	43.43	54.00	-10.57	28.86	14.57	Average	---	---
6	11650.00	57.11	74.00	-16.89	42.54	14.57	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5825
Polarization	Vertical	Test Configuration	1

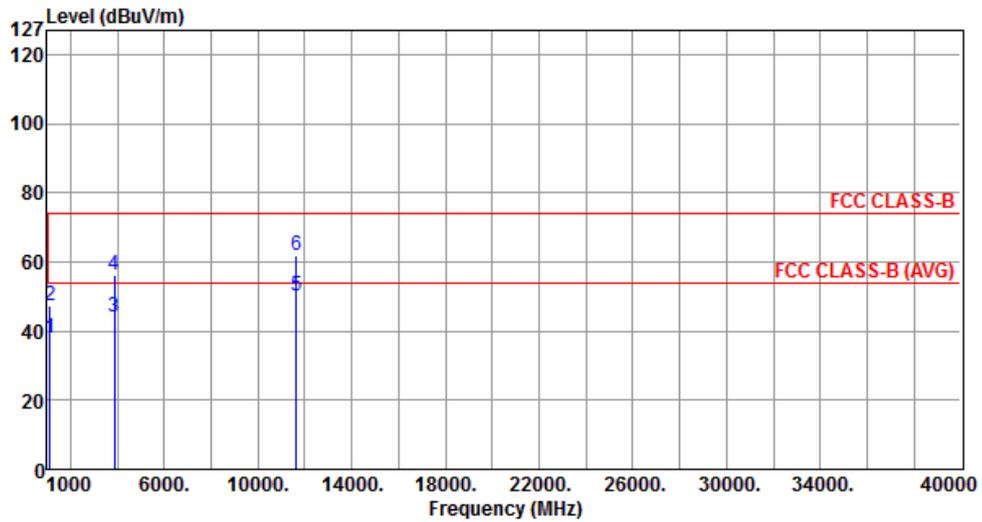

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1125.00	37.90	54.00	-16.10	46.99	-9.09	Average	---	---
2	1125.00	47.50	74.00	-26.50	56.59	-9.09	Peak	---	---
3	3883.30	43.82	54.00	-10.18	41.67	2.15	Average	---	---
4	3883.30	56.23	74.00	-17.77	54.08	2.15	Peak	---	---
5	11650.00	50.02	54.00	-3.98	35.45	14.57	Average	---	---
6	11650.00	61.86	74.00	-12.14	47.29	14.57	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

Modulation	VHT20	Test Freq. (MHz)	5745
Polarization	Horizontal	Test Configuration	1

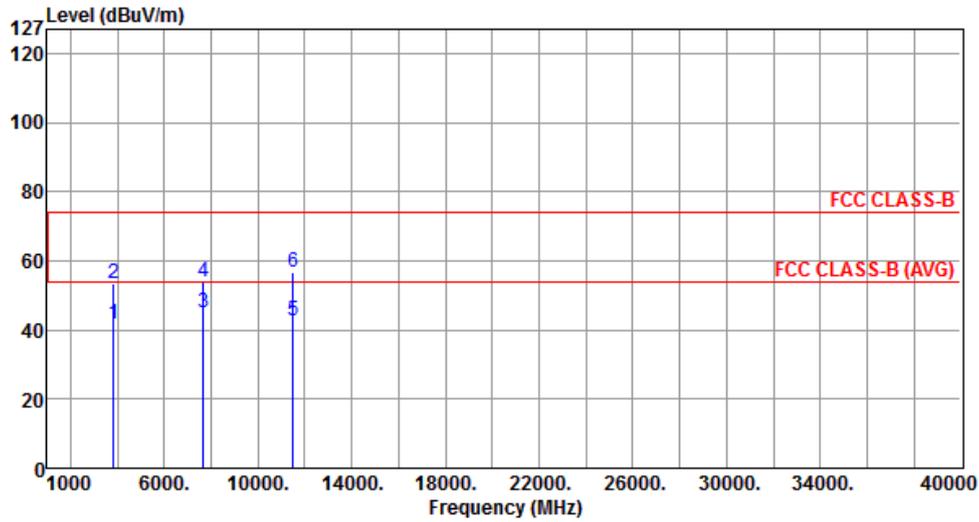


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	41.48	54.00	-12.52	39.44	2.04	Average	---	---
2	3830.00	53.32	74.00	-20.68	51.28	2.04	Peak	---	---
3	7660.00	44.76	54.00	-9.24	34.83	9.93	Average	---	---
4	7660.00	53.82	74.00	-20.18	43.89	9.93	Peak	---	---
5	11490.00	42.86	54.00	-11.14	28.04	14.82	Average	---	---
6	11490.00	56.91	74.00	-17.09	42.09	14.82	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5745
Polarization	Vertical	Test Configuration	1

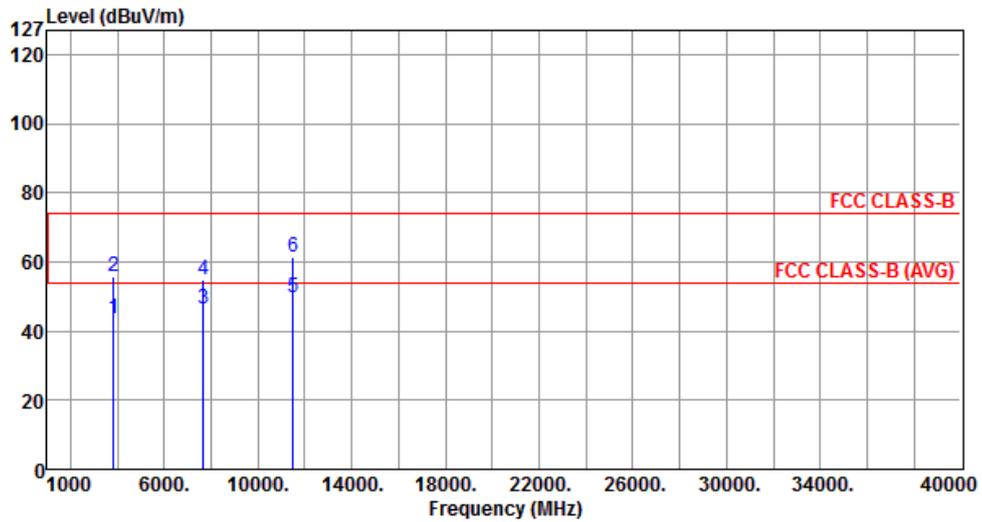


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3830.00	43.51	54.00	-10.49	41.47	2.04	Average	---	---
2	3830.00	55.96	74.00	-18.04	53.92	2.04	Peak	---	---
3	7660.00	46.58	54.00	-7.42	36.65	9.93	Average	---	---
4	7660.00	54.66	74.00	-19.34	44.73	9.93	Peak	---	---
5	11490.00	49.53	54.00	-4.47	34.71	14.82	Average	---	---
6	11490.00	61.48	74.00	-12.52	46.66	14.82	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5785
Polarization	Horizontal	Test Configuration	1

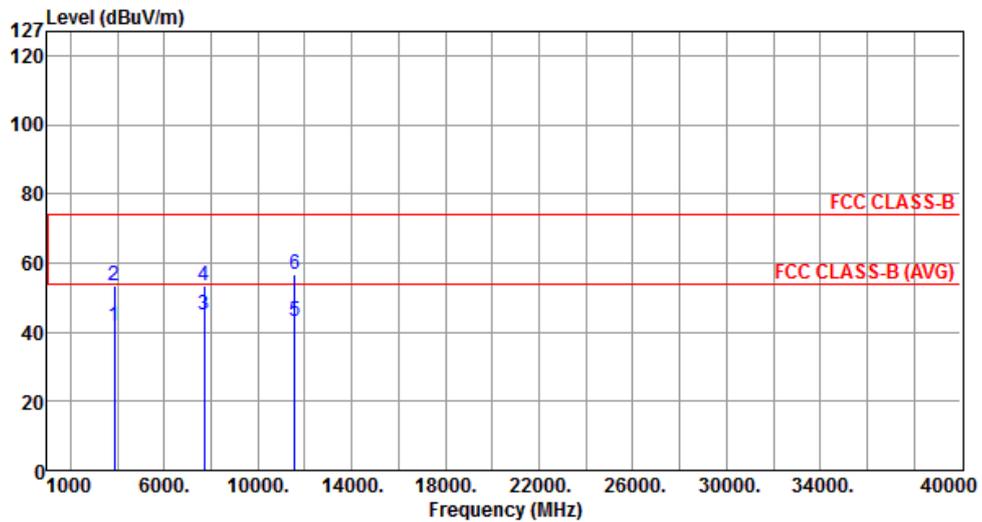


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.70	41.75	54.00	-12.25	39.66	2.09	Average	---	---
2	3856.70	53.45	74.00	-20.55	51.36	2.09	Peak	---	---
3	7713.30	45.11	54.00	-8.89	35.18	9.93	Average	---	---
4	7713.30	53.42	74.00	-20.58	43.49	9.93	Peak	---	---
5	11570.00	43.02	54.00	-10.98	28.32	14.70	Average	---	---
6	11570.00	56.88	74.00	-17.12	42.18	14.70	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5785
Polarization	Vertical	Test Configuration	1

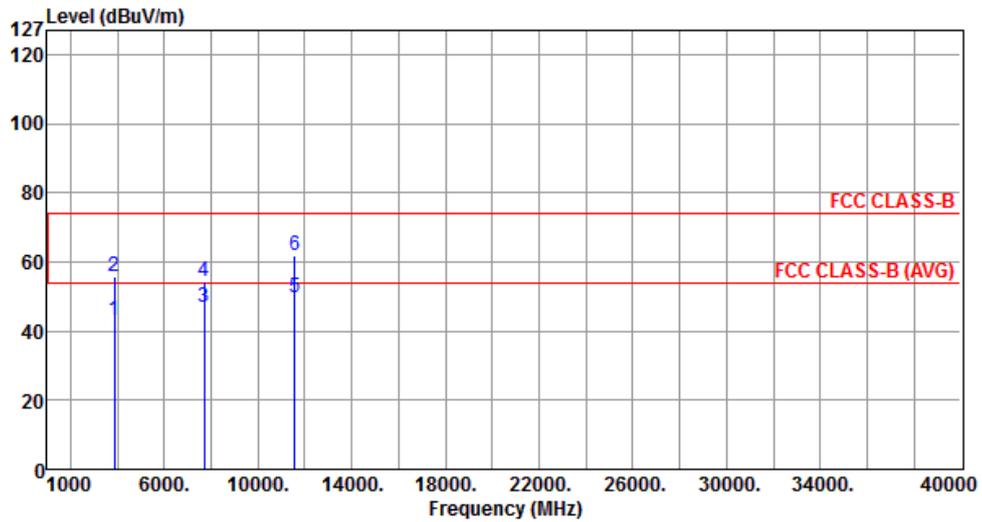


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.70	43.24	54.00	-10.76	41.15	2.09	Average	---	---
2	3856.70	55.58	74.00	-18.42	53.49	2.09	Peak	---	---
3	7713.30	46.92	54.00	-7.08	36.99	9.93	Average	---	---
4	7713.30	54.33	74.00	-19.67	44.40	9.93	Peak	---	---
5	11570.00	49.72	54.00	-4.28	35.02	14.70	Average	---	---
6	11570.00	61.84	74.00	-12.16	47.14	14.70	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Horizontal	Test Configuration	1

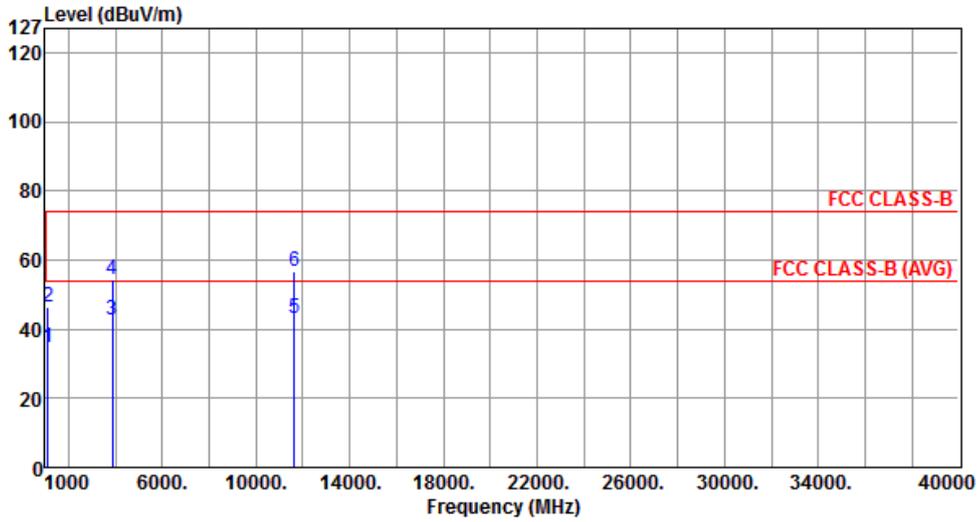


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1125.00	34.82	54.00	-19.18	43.91	-9.09	Average	---	---
2	1125.00	46.23	74.00	-27.77	55.32	-9.09	Peak	---	---
3	3883.30	42.73	54.00	-11.27	40.58	2.15	Average	---	---
4	3883.30	54.59	74.00	-19.41	52.44	2.15	Peak	---	---
5	11650.00	43.21	54.00	-10.79	28.64	14.57	Average	---	---
6	11650.00	56.92	74.00	-17.08	42.35	14.57	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5825
Polarization	Vertical	Test Configuration	1

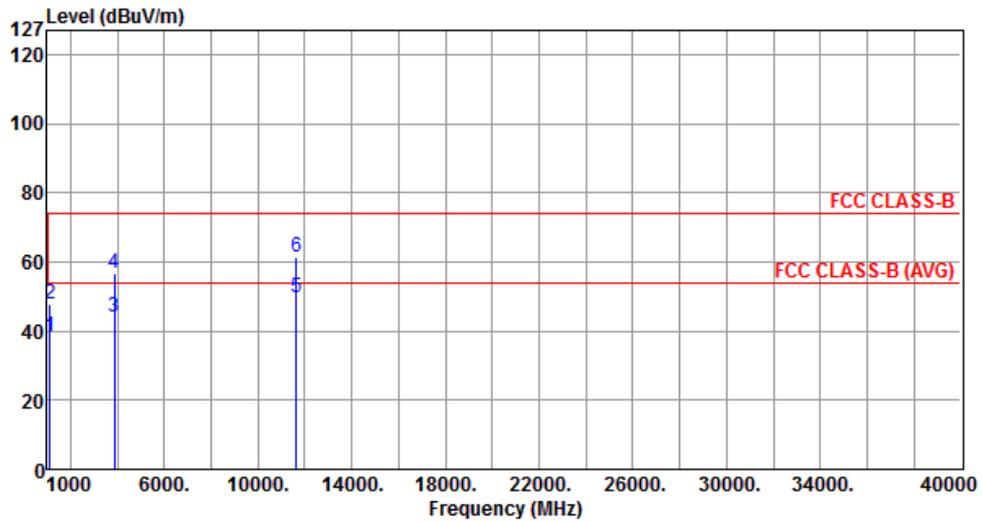

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1125.00	38.22	54.00	-15.78	47.31	-9.09	Average	---	---
2	1125.00	47.82	74.00	-26.18	56.91	-9.09	Peak	---	---
3	3883.30	44.15	54.00	-9.85	42.00	2.15	Average	---	---
4	3883.30	56.53	74.00	-17.47	54.38	2.15	Peak	---	---
5	11650.00	49.81	54.00	-4.19	35.24	14.57	Average	---	---
6	11650.00	61.52	74.00	-12.48	46.95	14.57	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

Modulation	VHT40	Test Freq. (MHz)	5755
Polarization	Horizontal	Test Configuration	1

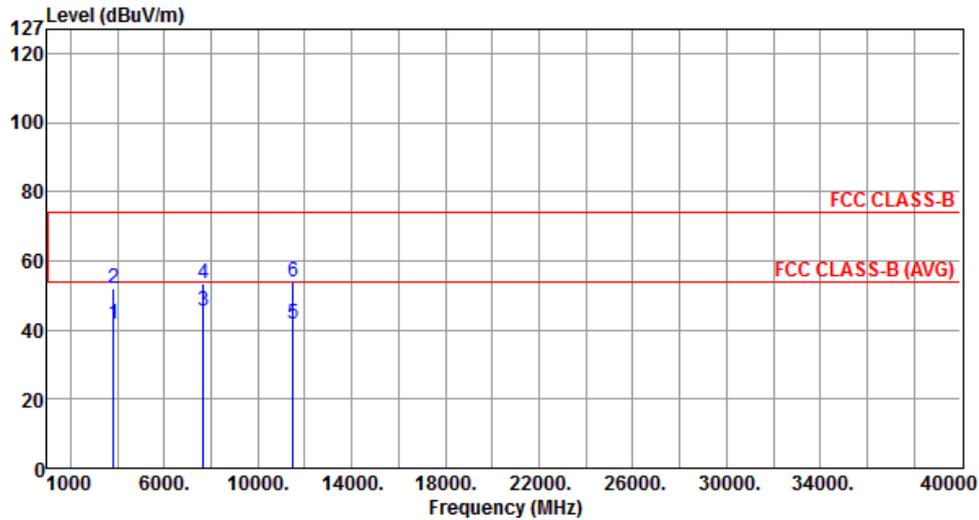


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3836.50	41.52	54.00	-12.48	39.46	2.06	Average	---	---
2	3836.50	51.87	74.00	-22.13	49.81	2.06	Peak	---	---
3	7673.00	45.52	54.00	-8.48	35.58	9.94	Average	---	---
4	7673.00	53.21	74.00	-20.79	43.27	9.94	Peak	---	---
5	11510.00	41.78	54.00	-12.22	26.98	14.80	Average	---	---
6	11510.00	53.94	74.00	-20.06	39.14	14.80	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5755
Polarization	Vertical	Test Configuration	1

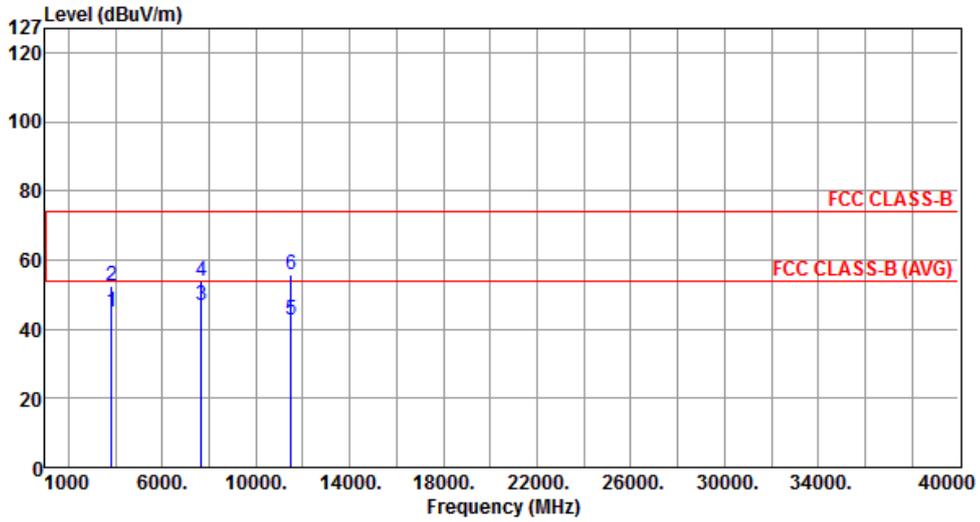


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3836.50	44.82	54.00	-9.18	42.76	2.06	Average	---	---
2	3836.50	52.53	74.00	-21.47	50.47	2.06	Peak	---	---
3	7673.00	47.01	54.00	-6.99	37.07	9.94	Average	---	---
4	7673.00	53.99	74.00	-20.01	44.05	9.94	Peak	---	---
5	11510.00	42.70	54.00	-11.30	27.90	14.80	Average	---	---
6	11510.00	55.62	74.00	-18.38	40.82	14.80	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Horizontal	Test Configuration	1

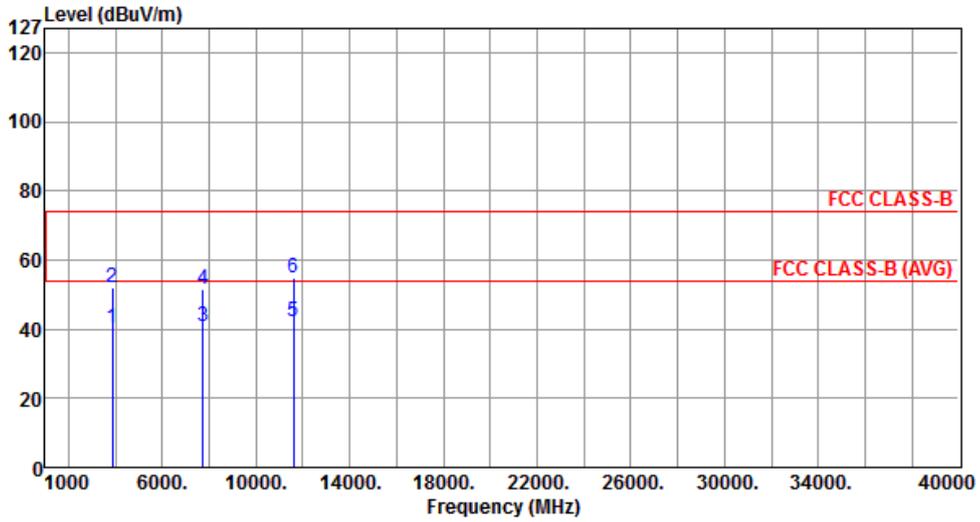


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3863.00	40.27	54.00	-13.73	38.16	2.11	Average	---	---
2	3863.00	51.89	74.00	-22.11	49.78	2.11	Peak	---	---
3	7726.50	40.72	54.00	-13.28	30.79	9.93	Average	---	---
4	7726.50	51.63	74.00	-22.37	41.70	9.93	Peak	---	---
5	11590.00	42.28	54.00	-11.72	27.62	14.66	Average	---	---
6	11590.00	54.60	74.00	-19.40	39.94	14.66	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Vertical	Test Configuration	1

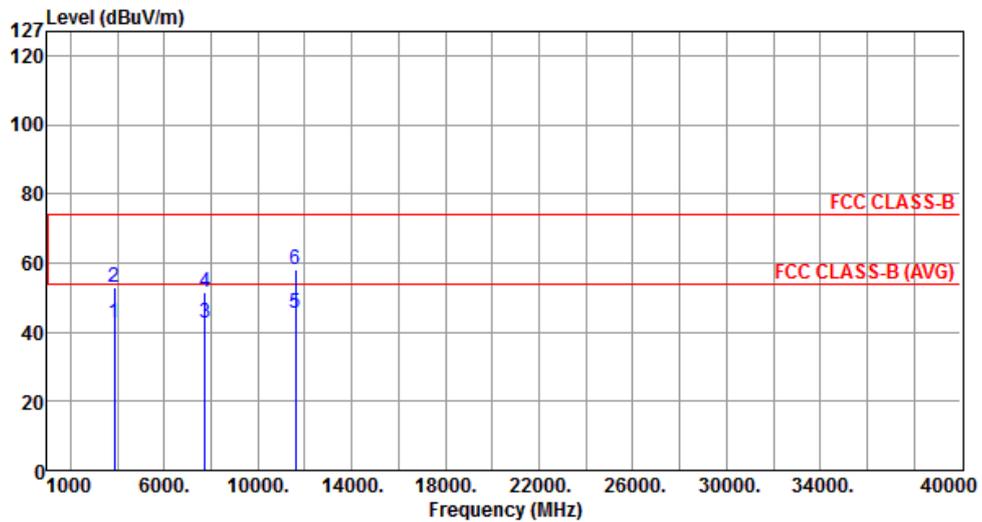

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3863.00	42.70	54.00	-11.30	40.59	2.11	Average	---	---
2	3863.00	52.90	74.00	-21.10	50.79	2.11	Peak	---	---
3	7726.50	42.85	54.00	-11.15	32.92	9.93	Average	---	---
4	7726.50	51.51	74.00	-22.49	41.58	9.93	Peak	---	---
5	11590.00	45.37	54.00	-8.63	30.71	14.66	Average	---	---
6	11590.00	58.03	74.00	-15.97	43.37	14.66	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

Modulation	VHT80	Test Freq. (MHz)	5775
Polarization	Horizontal	Test Configuration	1

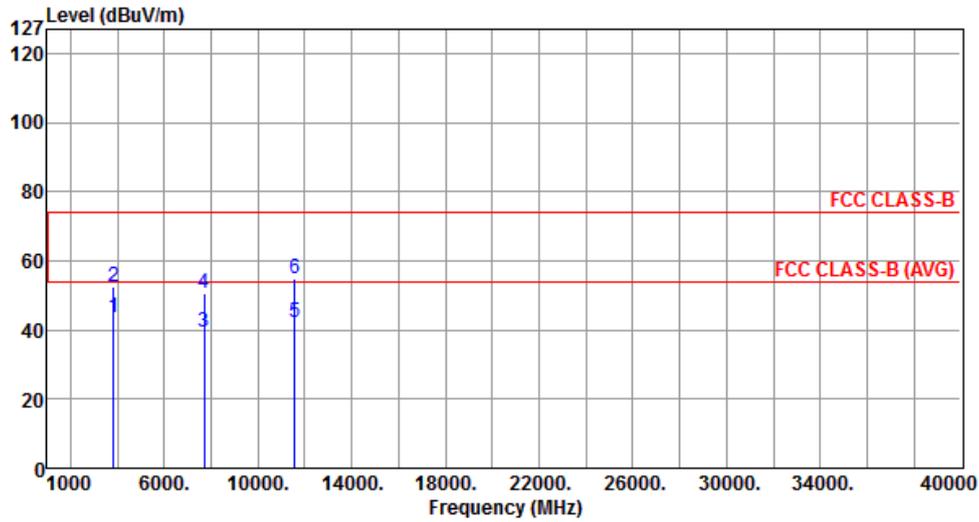


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3850.00	43.39	54.00	-10.61	41.31	2.08	Average	---	---
2	3850.00	52.58	74.00	-21.42	50.50	2.08	Peak	---	---
3	7699.00	39.25	54.00	-14.75	29.31	9.94	Average	---	---
4	7699.00	50.81	74.00	-23.19	40.87	9.94	Peak	---	---
5	11550.00	42.04	54.00	-11.96	27.31	14.73	Average	---	---
6	11550.00	54.78	74.00	-19.22	40.05	14.73	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5775
Polarization	Vertical	Test Configuration	1

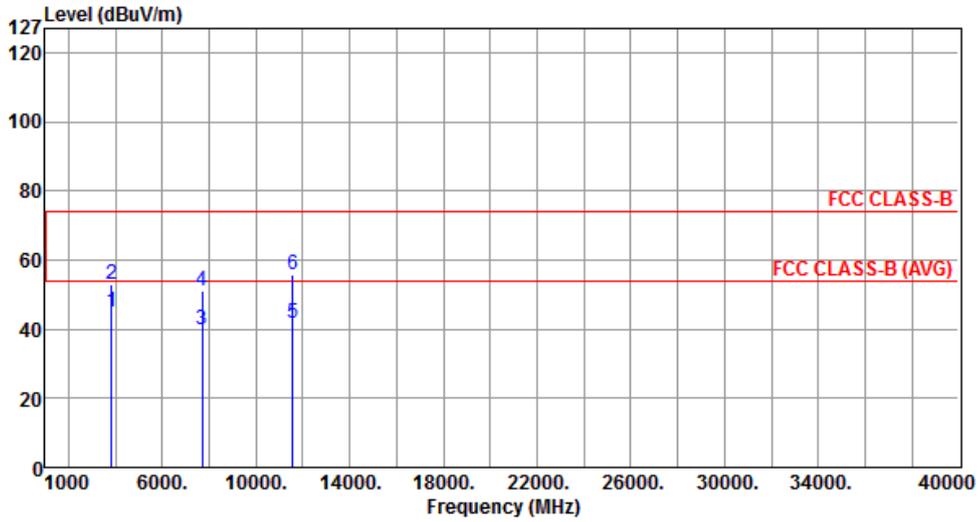

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3850.00	45.18	54.00	-8.82	43.10	2.08	Average	---	---
2	3850.00	53.13	74.00	-20.87	51.05	2.08	Peak	---	---
3	7699.00	39.83	54.00	-14.17	29.89	9.94	Average	---	---
4	7699.00	51.15	74.00	-22.85	41.21	9.94	Peak	---	---
5	11550.00	41.68	54.00	-12.32	26.95	14.73	Average	---	---
6	11550.00	55.62	74.00	-18.38	40.89	14.73	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6 Unwanted Emissions into Non-Restricted Frequency Bands

3.6.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

- The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.
- The peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.6.2 Test Procedures


Reference Level Measurement

1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Set Sweep time = auto couple, Trace mode = max hold.
3. Allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

Unwanted Emissions Level Measurement


1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Trace Mode = max hold, Sweep = auto couple.
3. Allow the trace to stabilize.
4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


3.6.3 Test Setup

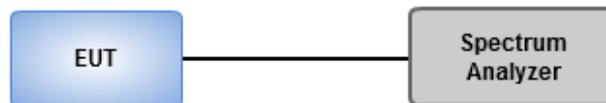


3.6.4 Unwanted Emissions into Non-Restricted Frequency Bands


802.11a

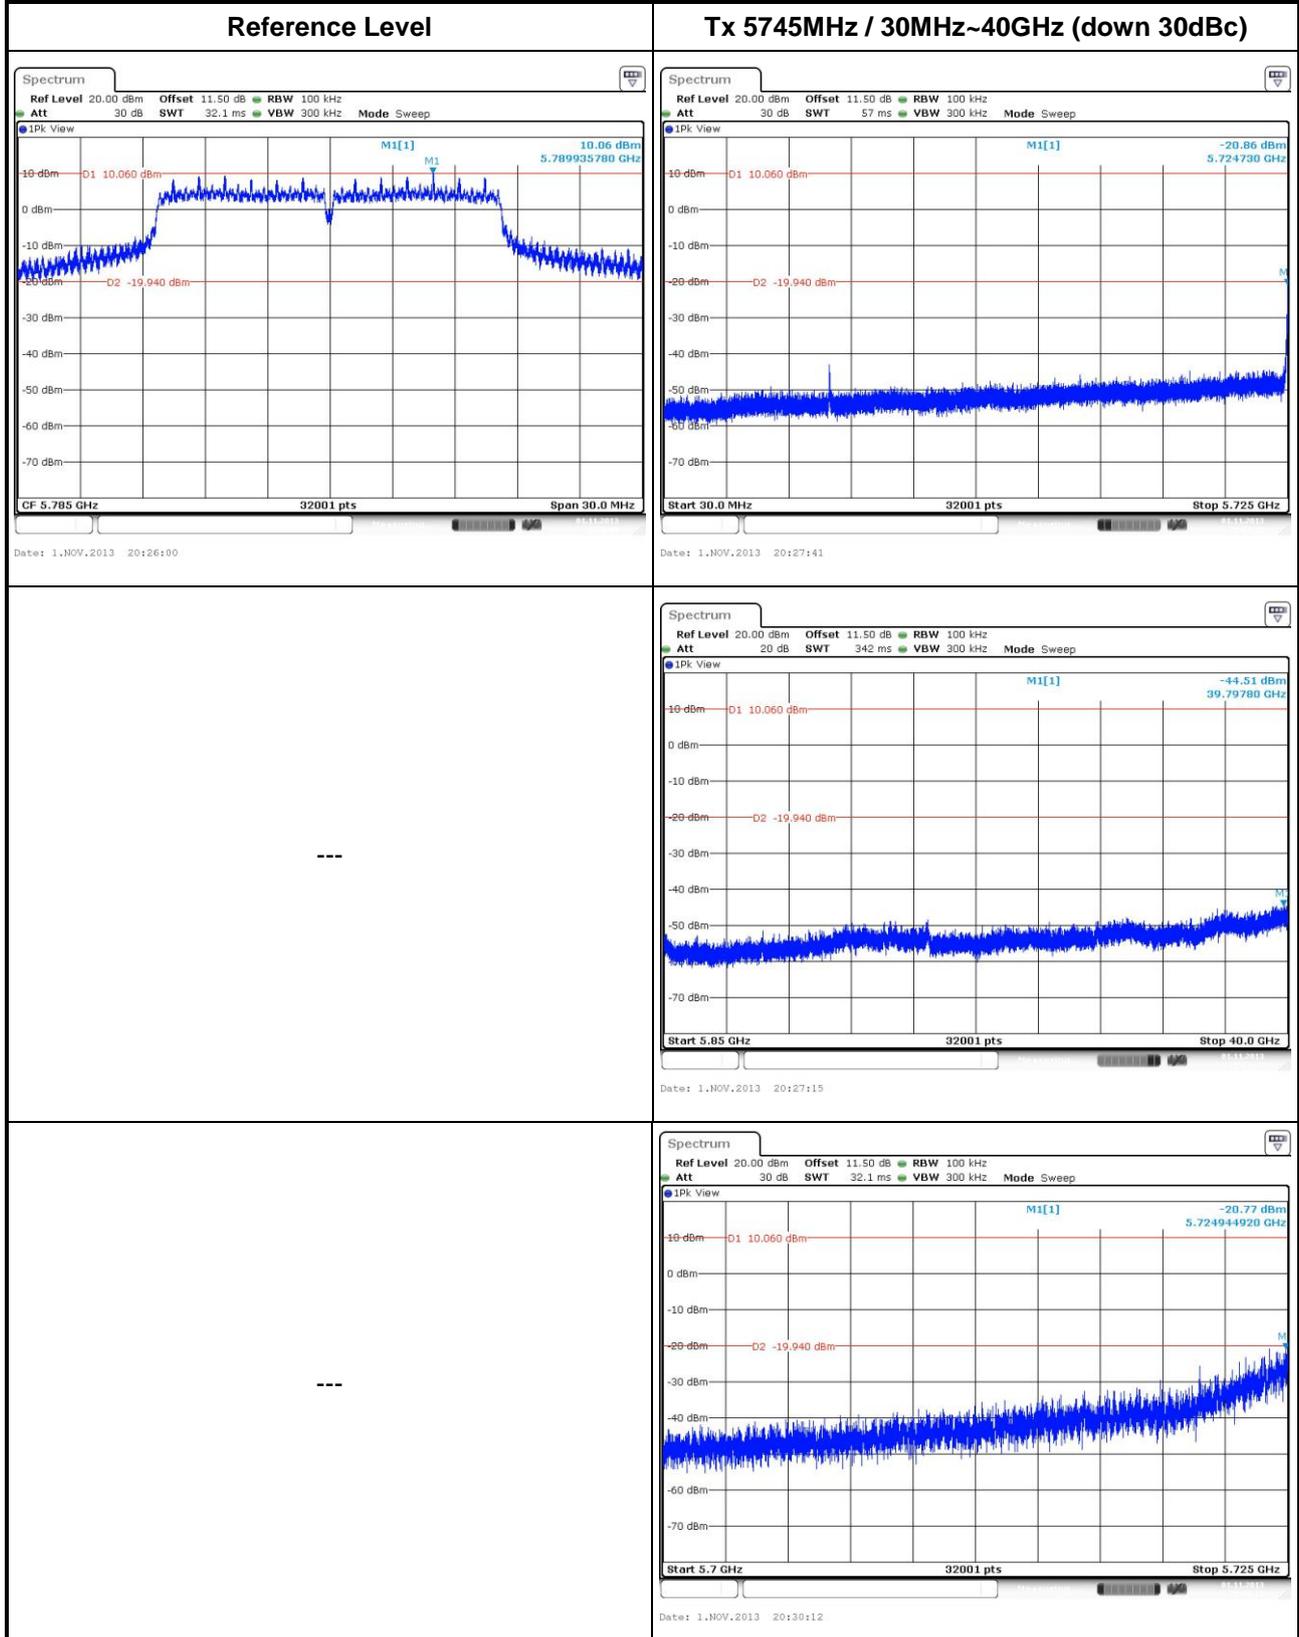

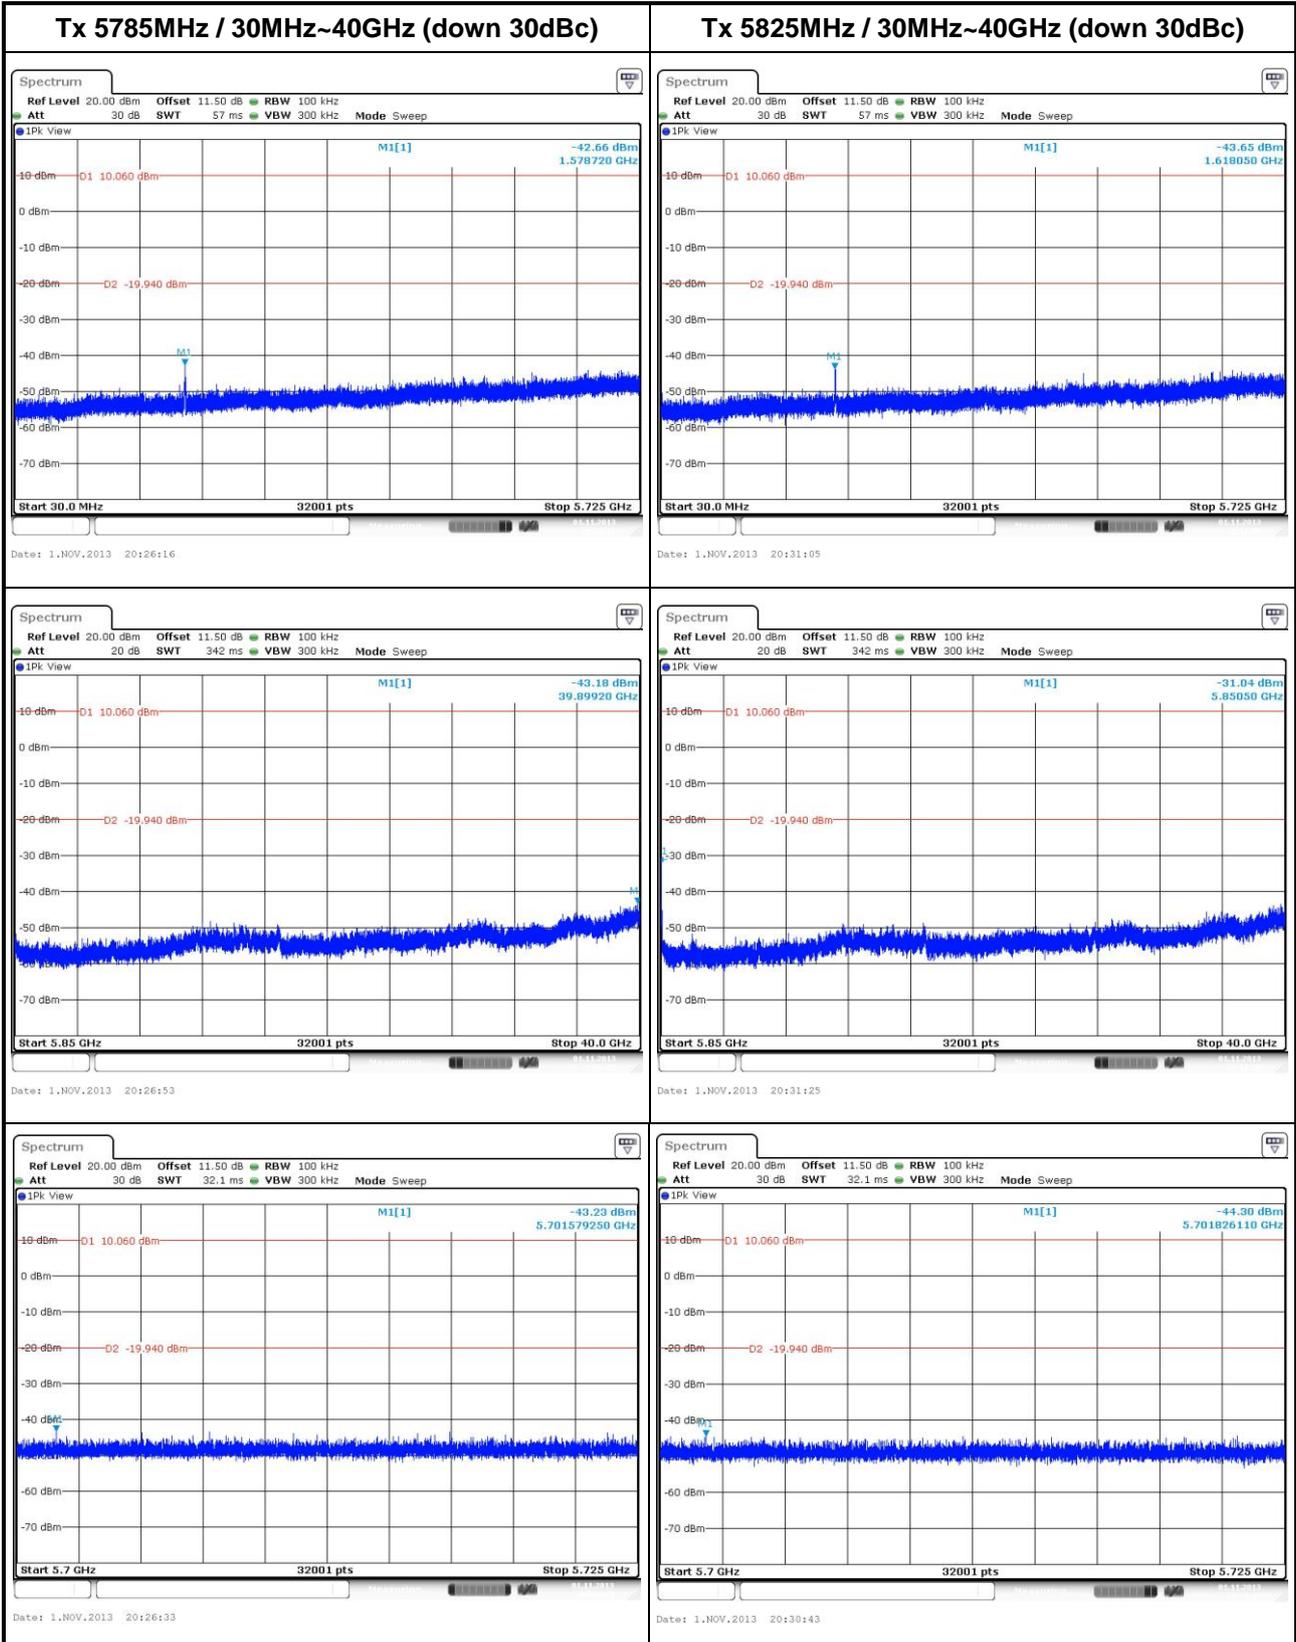





802.11ac VHT20

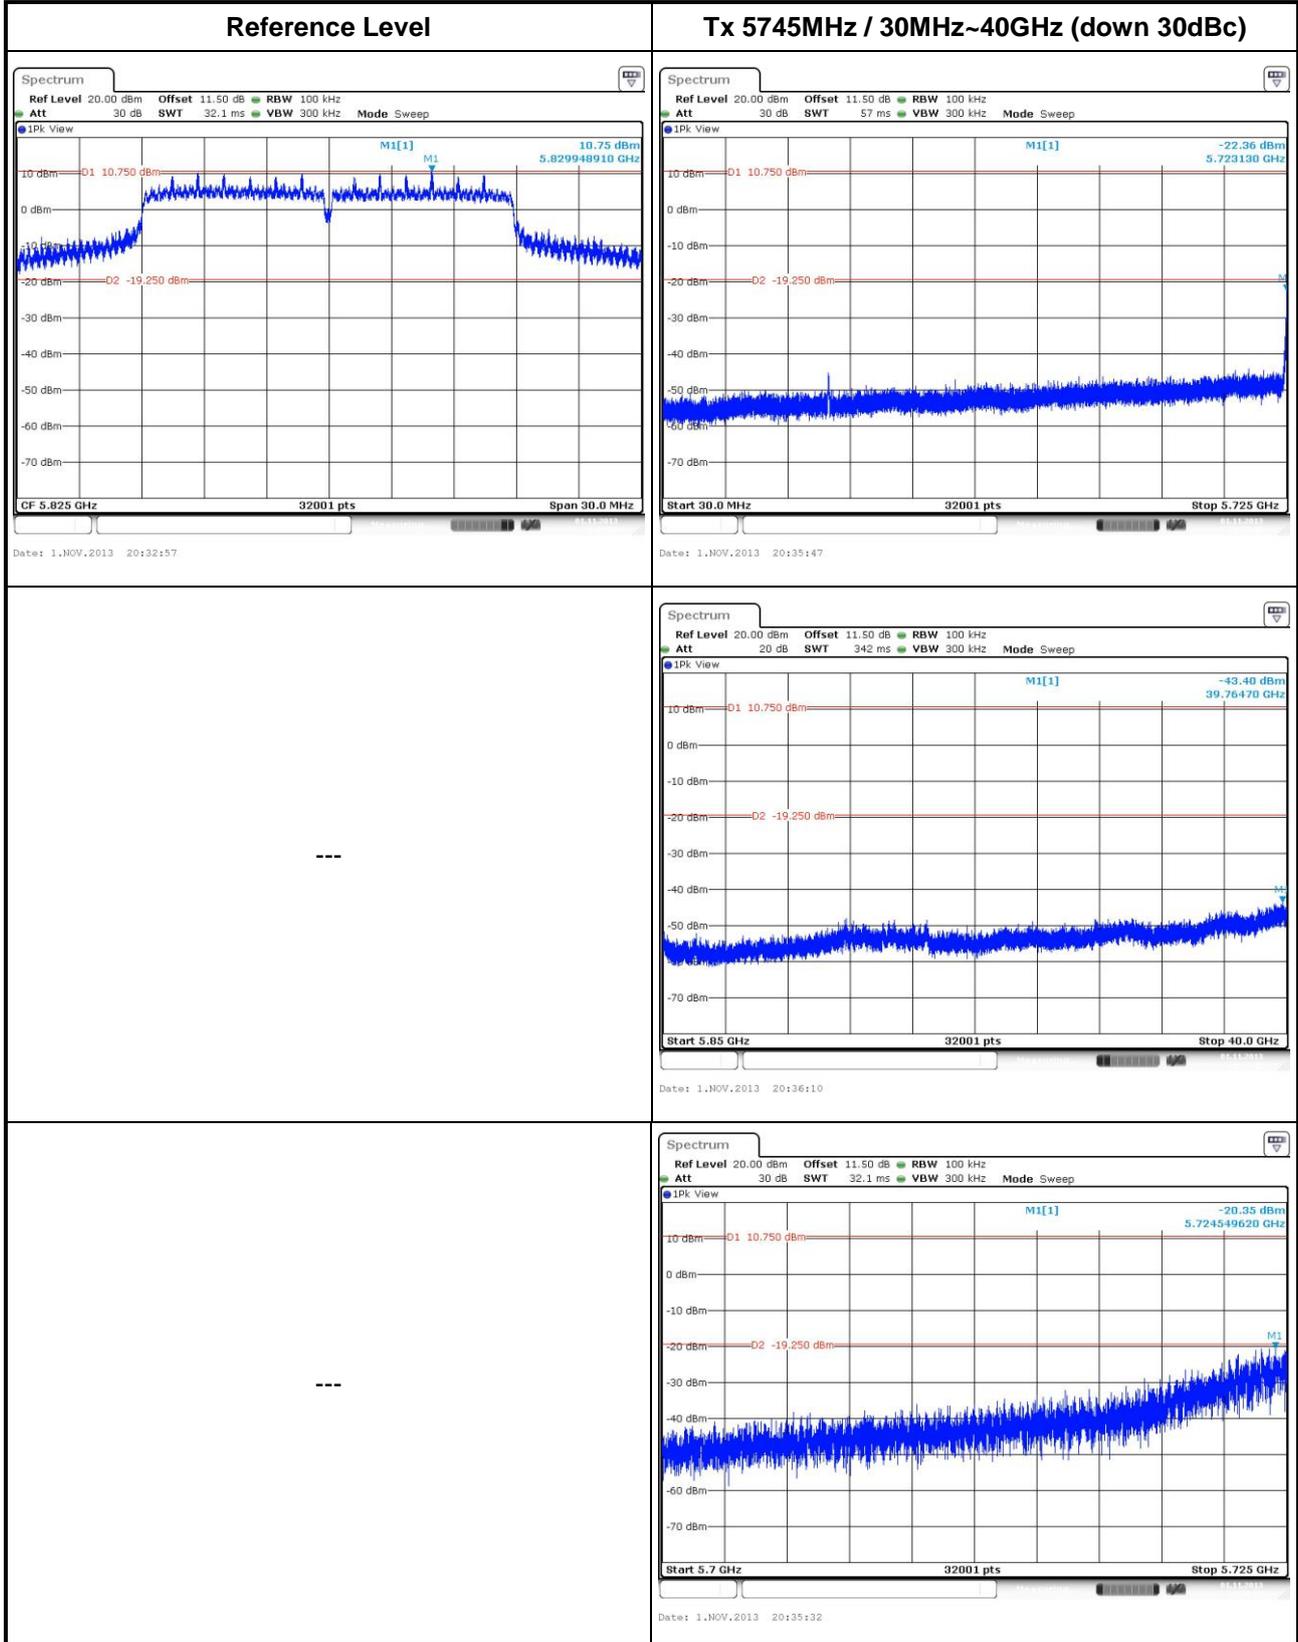

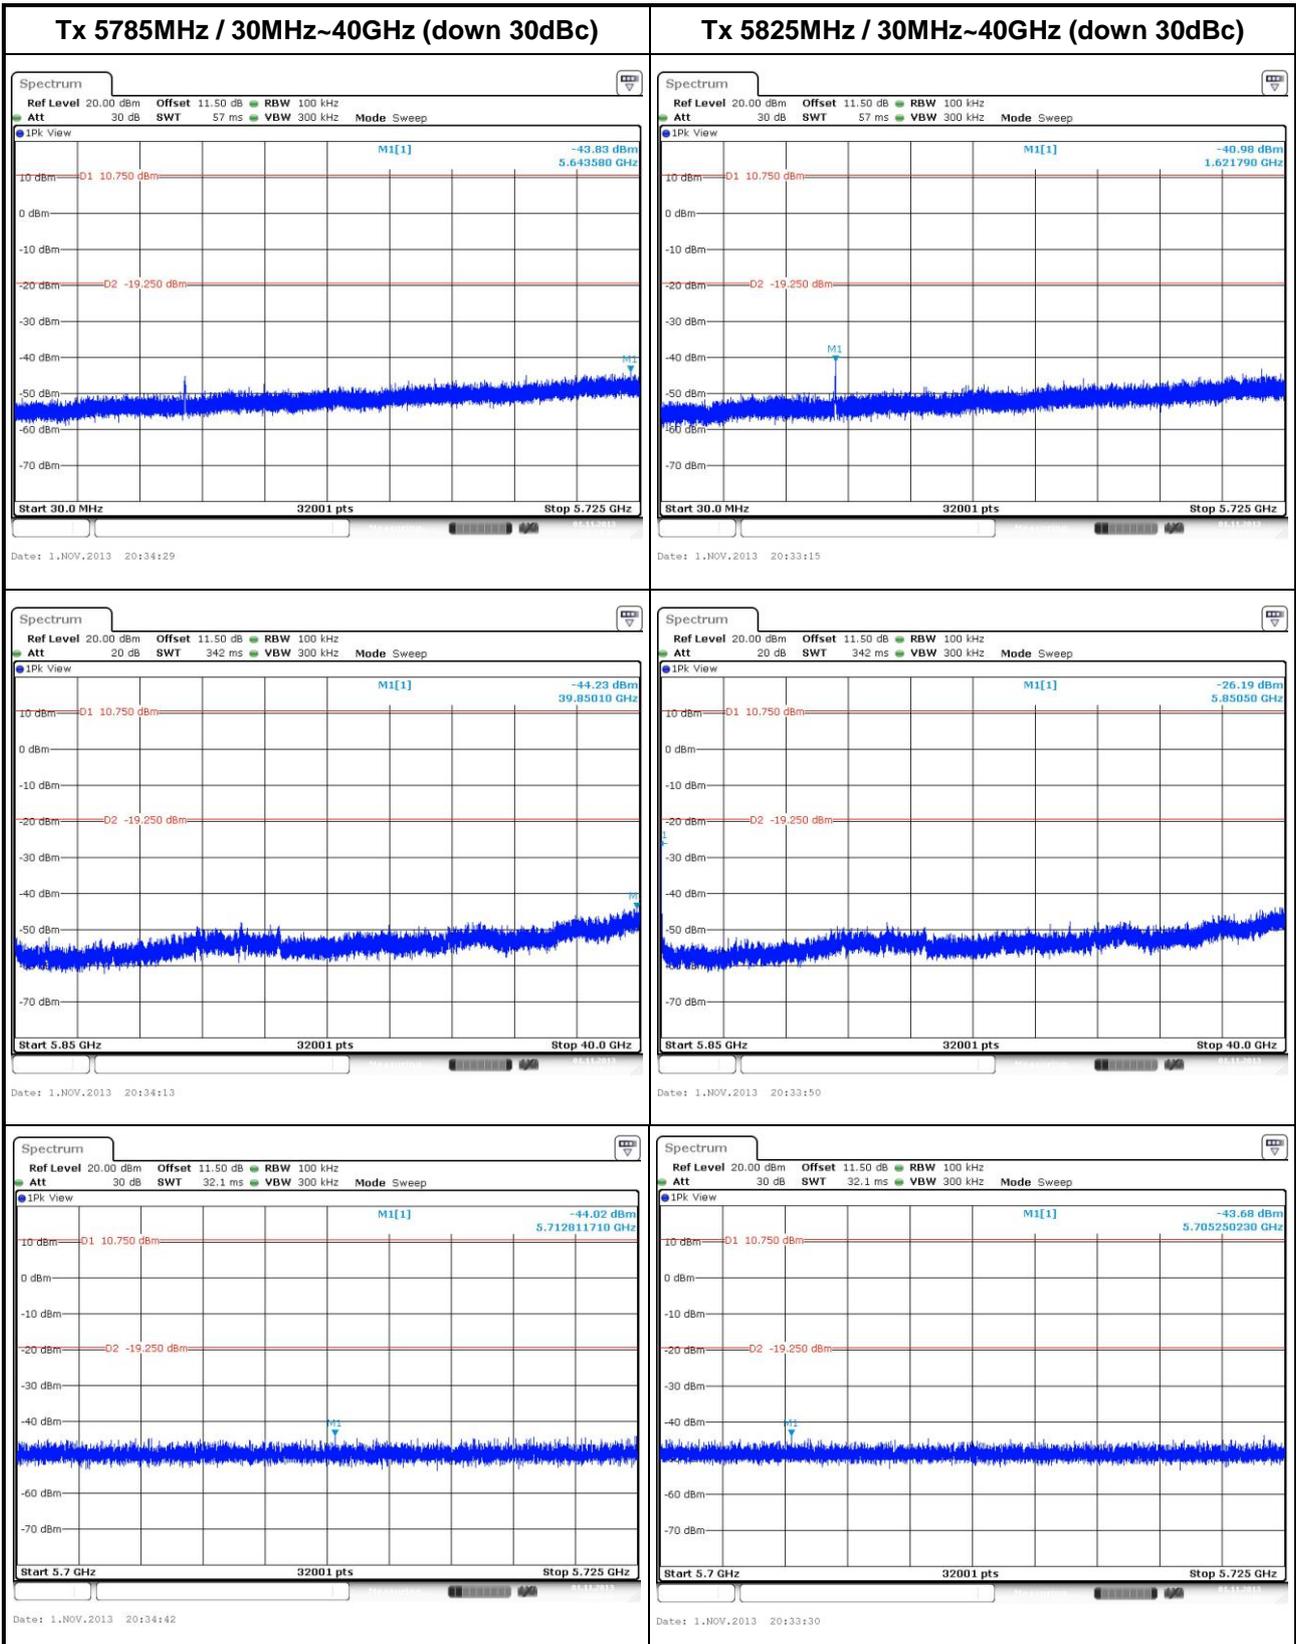


802.11ac VHT40

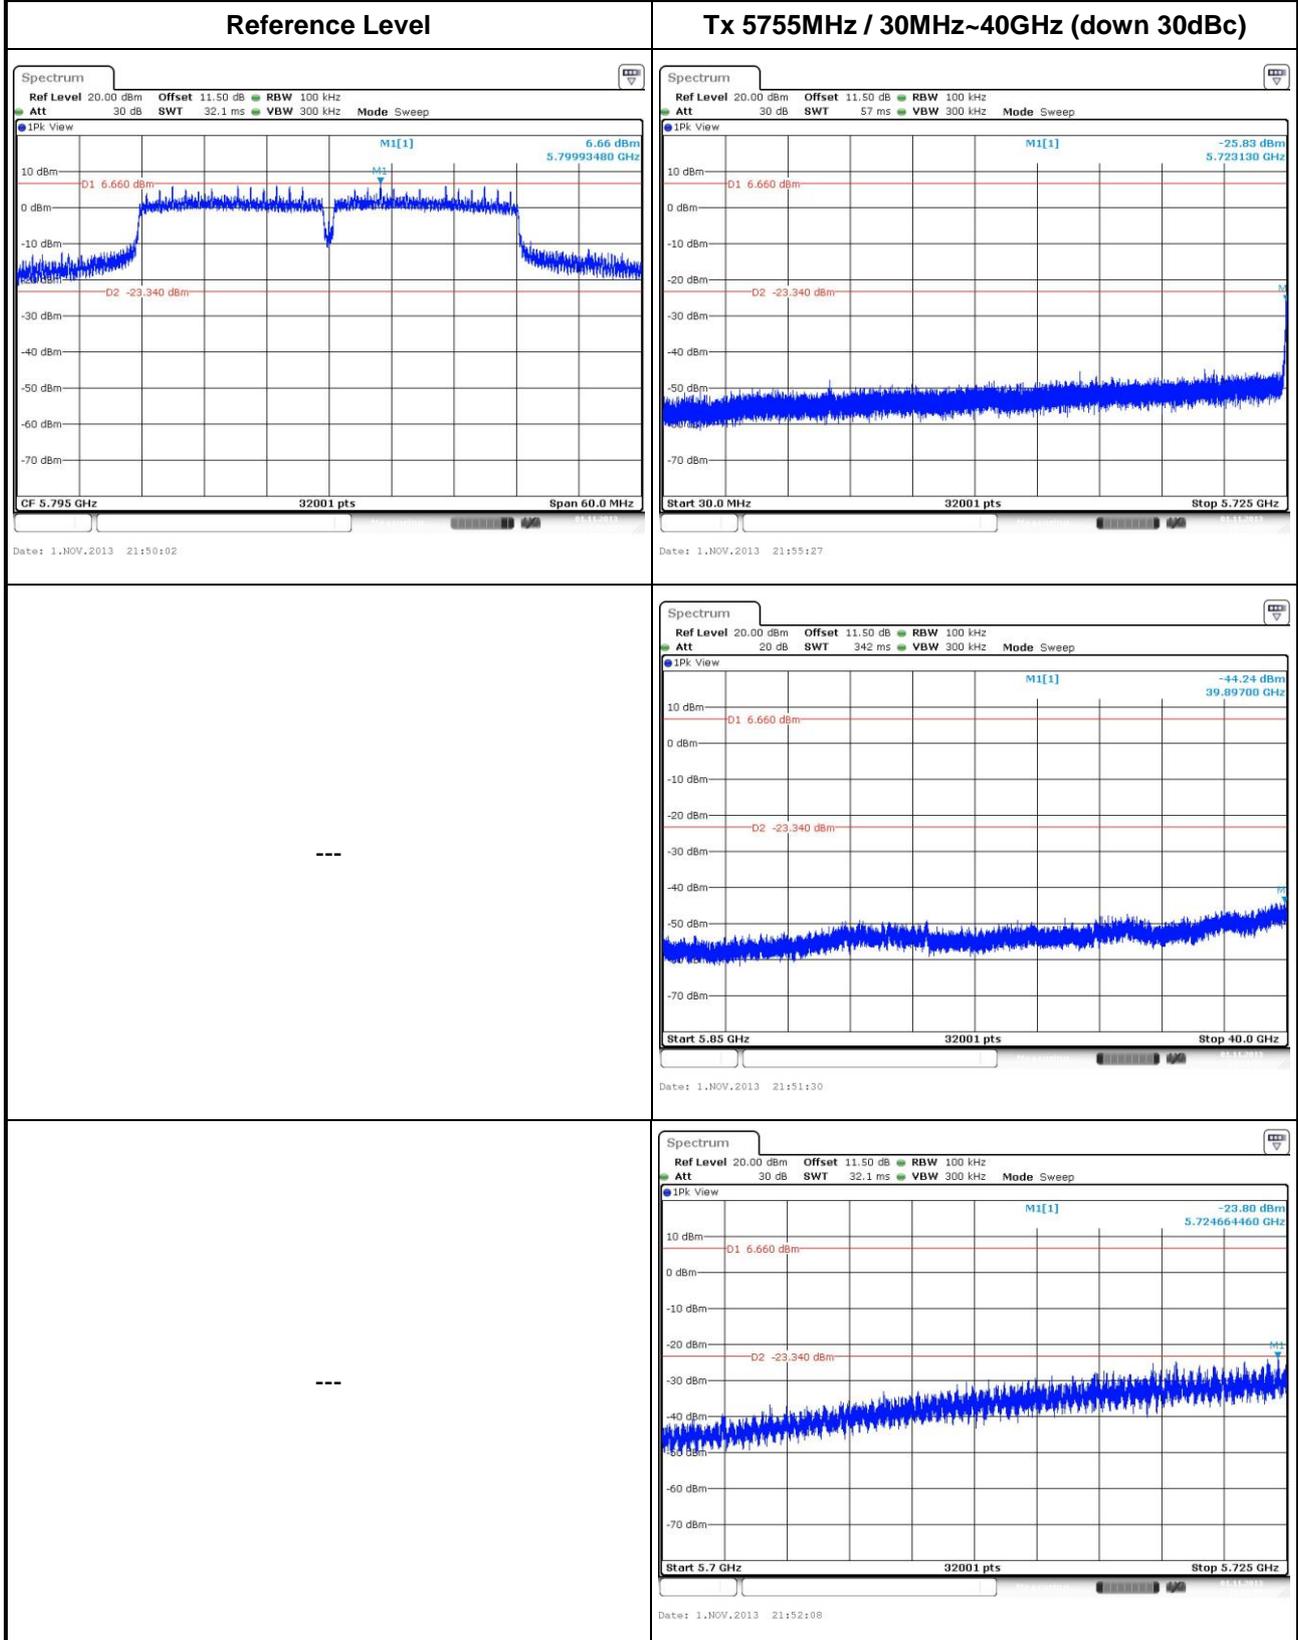

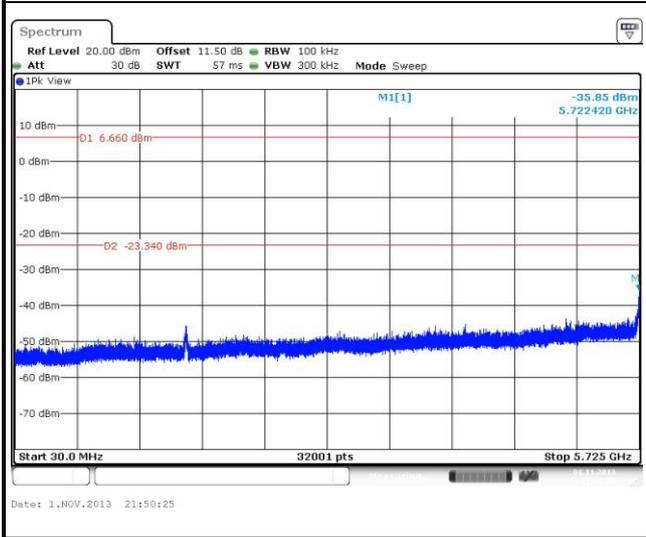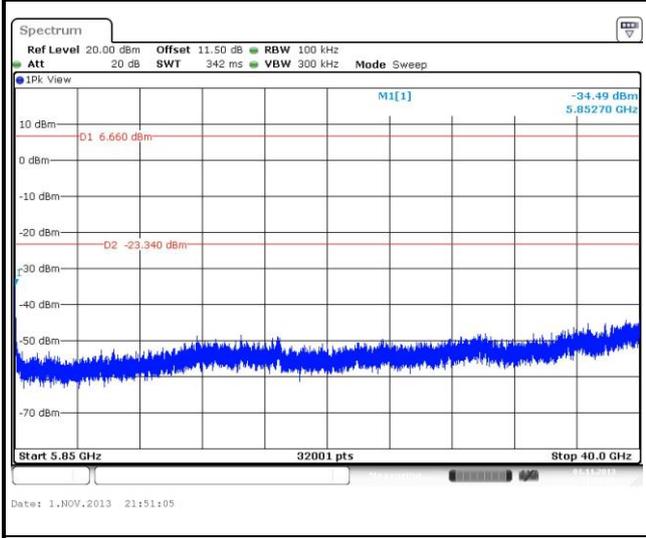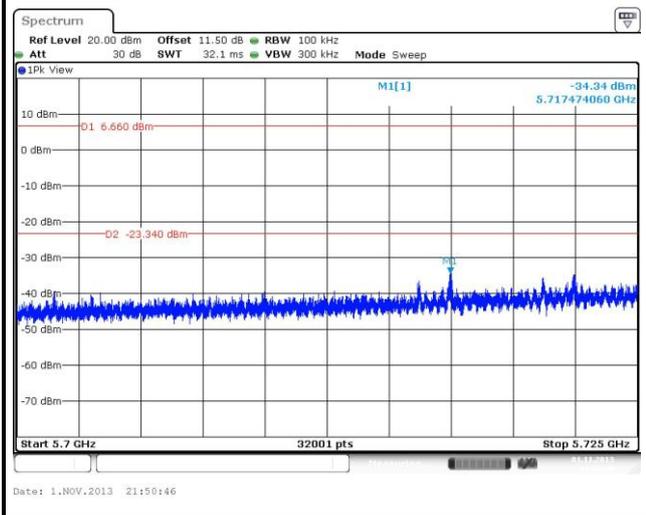Tx 5795MHz / 30MHz~40GHz (down 30dBc)	---
 <p>Spectrum Ref Level 20.00 dBm Offset 11.50 dB RBW 100 kHz Att 30 dB SWT 57 ms VBW 300 kHz Mode Sweep IPk View M1[1] -35.85 dBm 5.722420 GHz D1 6.660 dBm D2 -23.340 dBm Start 30.0 MHz 32001 pts Stop 5.725 GHz Date: 1.NOV.2013 21:50:25</p>	---
 <p>Spectrum Ref Level 20.00 dBm Offset 11.50 dB RBW 100 kHz Att 20 dB SWT 342 ms VBW 300 kHz Mode Sweep IPk View M1[1] -34.49 dBm 5.85270 GHz D1 6.660 dBm D2 -23.340 dBm Start 5.85 GHz 32001 pts Stop 40.0 GHz Date: 1.NOV.2013 21:51:05</p>	---
 <p>Spectrum Ref Level 20.00 dBm Offset 11.50 dB RBW 100 kHz Att 30 dB SWT 32.1 ms VBW 300 kHz Mode Sweep IPk View M1[1] -34.34 dBm 5.717474060 GHz D1 6.660 dBm D2 -23.340 dBm Start 5.7 GHz 32001 pts Stop 5.725 GHz Date: 1.NOV.2013 21:50:46</p>	---

802.11ac VHT80

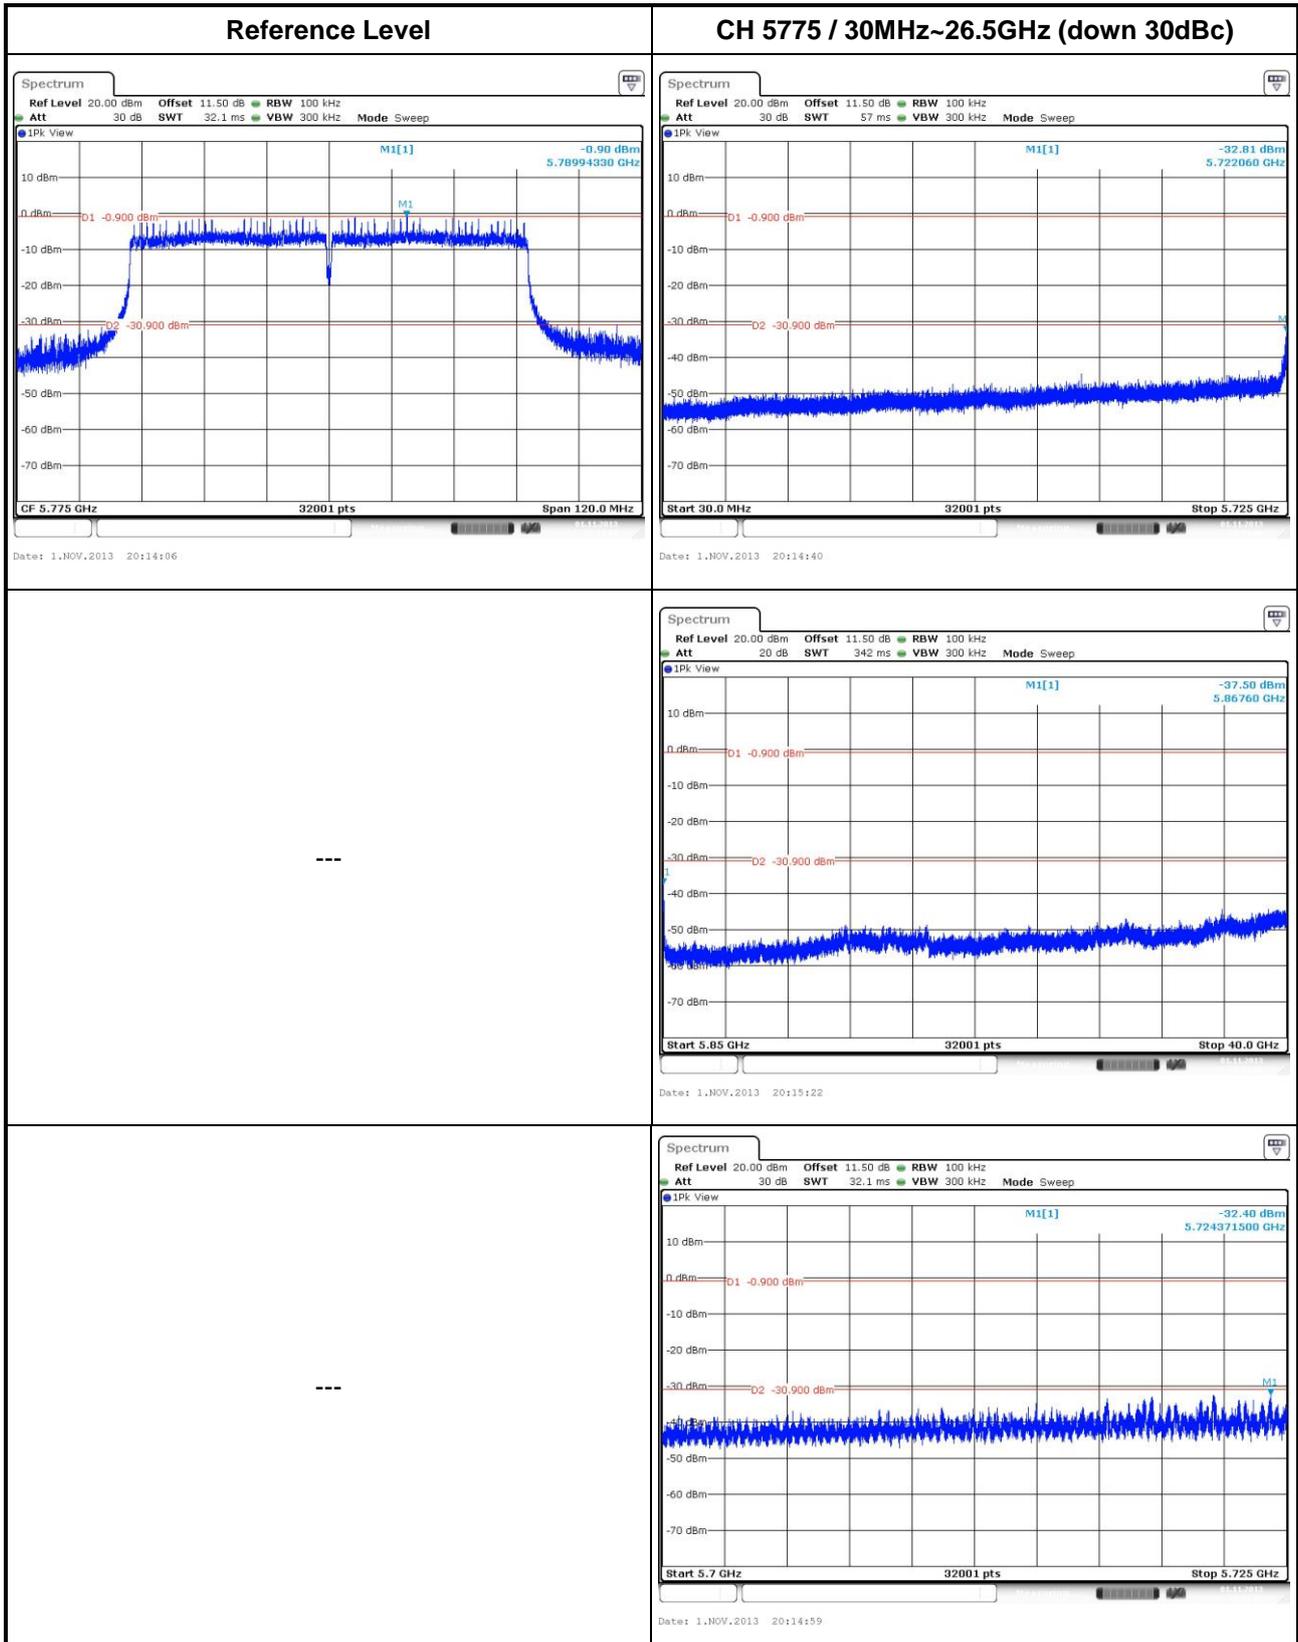

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==