


FCC SAR Test Report

APPLICANT : NETGEAR, Inc.
EQUIPMENT : WiFi USB Adapter
BRAND NAME : NETGEAR
MODEL NAME : A6210
FCC ID : PY313400249
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



Table of Contents

1. Statement of Compliance 4

2. Administration Data 4

3. Guidance Standard 5

4. Equipment Under Test (EUT) 5

 4.1 General Information 5

 4.2 Maximum Tune-up Limit 6

5. RF Exposure Limits 7

 5.1 Uncontrolled Environment 7

 5.2 Controlled Environment 7

6. Specific Absorption Rate (SAR) 8

 6.1 Introduction 8

 6.2 SAR Definition 8

7. System Description and Setup 9

8. Measurement Procedures 10

 8.1 Spatial Peak SAR Evaluation 10

 8.2 Power Reference Measurement 11

 8.3 Area Scan 11

 8.4 Zoom Scan 12

 8.5 Volume Scan Procedures 12

 8.6 Power Drift Monitoring 12

9. Test Equipment List 13

10. System Verification 14

 10.1 Tissue Verification 14

 10.2 System Performance Check Results 15

11. RF Exposure Positions 16

12. Conducted RF Output Power (Unit: dBm) 17

13. Antenna Location 20

14. SAR Test Results 21

 14.1 Body SAR 21

 14.2 Repeated SAR Measurement 25

15. Uncertainty Assessment 26

16. References 29

Appendix A. Plots of System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASYS Calibration Certificate

Appendix D. Test Setup Photos



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **NETGEAR, Inc., WiFi USB Adapter, A6210**, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary
		Body 1g SAR (W/kg)
DTS	WLAN 2.4GHz Band	1.07
	WLAN 5.8GHz Band	1.10
NII	WLAN 5.2GHz Band	1.08
	WLAN 5.3GHz Band	1.06
	WLAN 5.5GHz Band	1.17
Date of Testing:		04/30/2014 ~ 05/26/2014

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	NETGEAR, Inc.
Address	350 East Plumeria Drive, San Jose, California 95134, USA

Manufacturer	
Company Name	NETGEAR, Inc.
Address	350 East Plumeria Drive, San Jose, California 95134, USA



3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 447498 D02 SAR Procedures for Dongle Xmtr v02
- FCC KDB 248227 D01 SAR meas for 802 11abg v01r02
- FCC KDB 644545 D01 Guidance for IEEE 802 11ac v01r02

4. Equipment Under Test (EUT)

4.1 General Information

Product Feature & Specification	
Equipment Name	WiFi USB Adapter
Brand Name	NETGEAR
Model Name	A6210
FCC ID	PY313400249
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz
Mode	• 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80
Remark:	
1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.	
2. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.	



4.2 Maximum Tune-up Limit

Band / Frequency (MHz)		IEEE 802.11 Average Power (dBm)			
		Ant 0+1			
		11b	11g	HT20	HT40
2.4GHz Band	2412	15.5	15.5	15.5	
	2422				14.5
	2437	15.5	15.5	15.5	15.5
	2452				14.0
	2462	15.5	15.0	15.0	

Band / Frequency (MHz)		IEEE 802.11 Average Power (dBm)							
		Ant 0+1							
		11a	HT20	HT40	VHT20	VHT40	VHT80		
5.2GHz Band		15.5	15.5	15.5	15.5	15.5	14.5		
5.3GHz Band		15.5	15.5	15.5	15.5	15.5	14.5		
5.5GHz Band	5500	17.5	17.5		17.5				
	5510			15.5		15.5			
	5520								
	5530							14.5	
	5540								
	5550			17.5		17.5	17.5	17.5	
	5560								
	5580								
	5660								
	5670						15.5	15.5	
5680									
5700									
5.8GHz Band		17.5	17.5	17.5	17.5	17.5	17.5		



5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

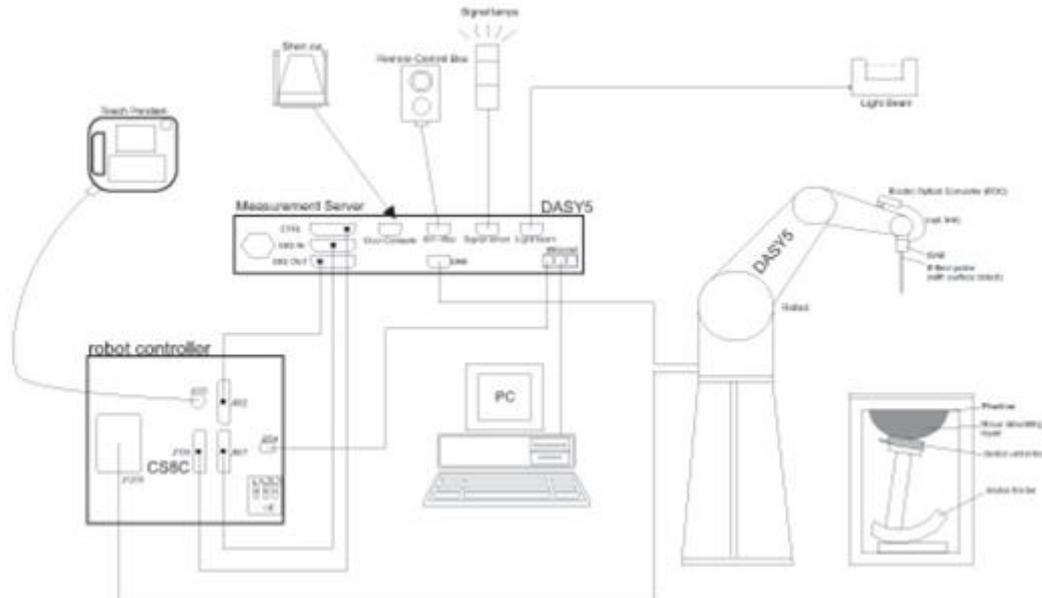

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.



8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz v01r01.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz v01r01.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	924	Nov. 13, 2013	Nov. 12, 2014
SPEAG	5GHz System Validation Kit	D5GHzV2	1128	Jul. 24, 2013	Jul. 23, 2014
SPEAG	Data Acquisition Electronics	DAE4	1425	Mar. 03, 2014	Mar. 02, 2015
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 07, 2013	Nov. 06, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Sep. 10, 2013	Sep. 09, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 12, 2013	Nov. 11, 2014
H.M.IRIS	Thermometer	TH-08	TM658	Oct. 22, 2013	Oct. 21, 2014
WonDer	Thermometer	WD-5015	TM225	Dec. 02, 2013	Dec. 01, 2014
SPEAG	Device Holder	N/A	N/A	NCR	NCR
Agilent	Signal Generator	E4438C	MY49070755	Oct. 08, 2013	Oct. 07, 2014
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 23, 2013	Jul. 22, 2014
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 07, 2014	Feb. 06, 2015
Anritsu	Power Meter	ML2495A	1349001	Dec. 04, 2013	Dec. 03, 2014
Anritsu	Power Sensor	MA2411B	1306099	Dec. 03, 2013	Dec. 02, 2014
R&S	Spectrum Analyzer	FSP 7	101131	Jul. 09, 2013	Jul. 08, 2014
Agilent	Dual Directional Coupler	778D	50422	Note 2	
Woken	Attenuator	WK0602-XX	N/A	Note 2	
PE	Attenuator	PE7005-10	N/A	Note 2	
PE	Attenuator	PE7005- 3	N/A	Note 2	
AR	Power Amplifier	5S1G4M2	0328767	Note 2	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note 2	
Mini-Circuits	Power Amplifier	ZHL-42W+	13440021344	Note 2	

General Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
2450	Body	22.3	2.015	53.957	1.95	52.70	3.33	2.39	±5	2014/5/6
2450	Body	22.3	2.015	53.957	1.95	52.70	3.33	2.39	±5	2014/5/6
2450	Body	22.4	1.922	53.185	1.95	52.70	-1.44	0.92	±5	2014/5/26
5200	Body	22.6	5.257	47.536	5.30	49.00	-0.81	-2.99	±5	2014/4/30
5200	Body	22.4	5.143	47.437	5.30	49.00	-2.96	-3.19	±5	2014/5/25
5300	Body	22.6	5.405	47.298	5.42	48.88	-0.28	-3.24	±5	2014/5/1
5300	Body	22.4	5.274	47.199	5.42	48.88	-2.69	-3.44	±5	2014/5/25
5600	Body	22.5	5.868	46.726	5.77	48.47	1.70	-3.60	±5	2014/5/2
5600	Body	22.3	5.681	48.192	5.77	48.47	-1.54	-0.57	±5	2014/5/5
5600	Body	22.4	5.654	46.749	5.77	48.47	-2.01	-3.55	±5	2014/5/25
5800	Body	22.5	6.179	46.434	6.00	48.20	2.98	-3.66	±5	2014/5/3
5800	Body	22.4	5.988	46.473	6.00	48.20	-0.20	-3.58	±5	2014/5/25

Table 8.2.1 Measuring Results for Simulating Liquid

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured SAR (W/kg)	Targeted SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
2014/5/6	2450	Body	250	D2450V2-924	3955	1399	13.30	50.20	53.20	5.98
2014/5/6	2450	Body	250	D2450V2-924	3931	1425	13.20	50.20	52.80	5.18
2014/5/26	2450	Body	250	D2450V2-924	3955	1399	12.70	50.20	50.80	1.20
2014/4/30	5200	Body	100	D5GHzV2-1128	3955	1399	7.80	73.40	78.00	6.27
2014/5/25	5200	Body	100	D5GHzV2-1128	3955	1399	7.63	73.40	76.30	3.95
2014/5/1	5300	Body	100	D5GHzV2-1128	3955	1399	7.86	74.30	78.60	5.79
2014/5/25	5300	Body	100	D5GHzV2-1128	3955	1399	7.89	74.30	78.90	6.19
2014/5/2	5600	Body	100	D5GHzV2-1128	3955	1399	7.51	77.80	75.10	-3.47
2014/5/5	5600	Body	100	D5GHzV2-1128	3955	1399	7.70	77.80	77.00	-1.03
2014/5/25	5600	Body	100	D5GHzV2-1128	3955	1399	7.24	77.80	72.40	-6.94
2014/5/3	5800	Body	100	D5GHzV2-1128	3955	1399	6.97	72.20	69.70	-3.46
2014/5/25	5800	Body	100	D5GHzV2-1128	3955	1399	7.16	72.20	71.60	-0.83

Table 8.3.1 Target and Measurement SAR after Normalized

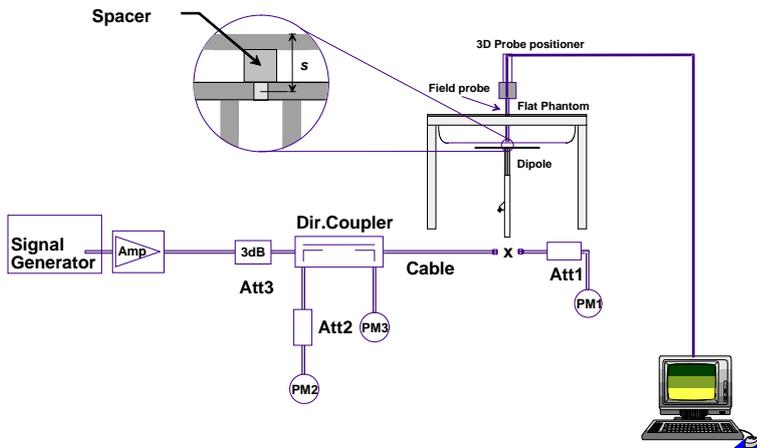


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

This EUT was tested in four different USB configurations. They are “direct laptop plug-in for configuration 1 and 3”, “USB cable plug-in for configuration 2 and 4”, and “USB cable plug-in for Tip Mode (the tip of the EUT)” shown as below. Both direct laptop plug-in and USB cable plug-in test configurations are tested with 5 cm separation between the particular dongle orientation and the flat phantom. Please refer to Appendix D for the test setup photos.

			
<p>Configuration 1 (Horizontal Up)</p>	<p>Configuration 2 (Horizontal Down)</p>	<p>Configuration 3 (Vertical Front)</p>	<p>Configuration 4 (Vertical Back)</p>

12. Conducted RF Output Power (Unit: dBm)

<WLAN Conducted Power>

General Note:

1. For IEEE802.11b/g SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were selected for SAR evaluation. 802.11g were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of 802.11b mode.
2. For IEEE802.11n, SAR testing can be conducted on channel with the highest output power when taking into consideration tune-up tolerance for same test configuration that was identified during SAR evaluations for IEEE802.11b/g (as applicable) provided bandwidth and test position are the same.
3. For IEEE802.11n with multiple channel BW configurations, highest channel BW configuration with highest output power limit shall be tested.
4. Testing of lower BW configurations is not required when the maximum average output of the default test channels in each lower BW configuration is less than 1/4dB higher than the default test channel in the highest BW configuration.

<2.4GHZ WLAN>

WLAN 2.4GHz 802.11b Average Power (dBm)					
Power vs. Channel			Power vs. Data Rate		
Channel	Frequency (MHz)	Data Rate	2Mbps	5.5Mbps	11Mbps
		1Mbps			
CH 1	2412	15.26	15.24	15.21	15.25
CH 6	2437	15.28			
CH 11	2462	14.83			

WLAN 2.4GHz 802.11g Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps							
CH 1	2412	15.14	15.21	15.21	15.19	15.18	15.19	15.19	15.16
CH 6	2437	15.24							
CH 11	2462	14.75							

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 1	2412	15.15	15.10	15.15	15.11	15.14	15.11	15.10	15.11
CH 6	2437	15.17							
CH 11	2462	14.70							

WLAN 2.4GHz 802.11n-HT40 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 3	2422	14.03	15.11	15.09	15.13	15.09	15.08	15.05	15.08
CH 6	2437	15.15							
CH 9	2452	13.80							



<5GHz WLAN>

WLAN 5GHz 802.11a Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps							
CH 36	5180	15.18	15.28	15.26	15.29	15.27	15.25	15.29	15.27
CH 40	5200	15.32							
CH 44	5220	15.21							
CH 48	5240	15.14							
CH 52	5260	15.12	15.20	15.19	15.18	15.20	15.21	15.21	15.15
CH 56	5280	15.18							
CH 60	5300	15.24							
CH 64	5320	15.15							
CH 100	5500	16.68	17.02	17.02	17.01	16.96	16.99	17.03	17.01
CH 104	5520	16.71							
CH 108	5540	16.64							
CH 112	5560	16.82							
CH 116	5580	17.06							
CH 132	5660	16.64							
CH 136	5680	16.71							
CH 140	5700	16.65							
CH 149	5745	17.28	17.31	17.29	17.30	17.27	17.27	17.26	17.27
CH 153	5765	17.19							
CH 157	5785	17.35							
CH 161	5805	17.20							
CH 165	5825	17.29							

WLAN 5GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 36	5180	15.09	15.18	15.16	15.15	15.13	15.15	15.18	15.20
CH 40	5200	15.22							
CH 44	5220	15.10							
CH 48	5240	15.09							
CH 52	5260	15.07	15.08	15.07	15.08	15.08	15.08	15.06	15.08
CH 56	5280	15.08							
CH 60	5300	15.12							
CH 64	5320	15.05							
CH 100	5500	16.58	16.85	16.86	16.86	16.85	16.86	16.82	16.83
CH 104	5520	16.58							
CH 108	5540	16.62							
CH 112	5560	16.76							
CH 116	5580	16.90							
CH 132	5660	16.54							
CH 136	5680	16.59							
CH 140	5700	16.55							
CH 149	5745	17.16	17.20	17.15	17.18	17.16	17.17	17.18	17.17
CH 153	5765	17.10							
CH 157	5785	17.24							
CH 161	5805	17.11							
CH 165	5825	17.17							




WLAN 5GHz 802.11n-HT40 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 38	5190	15.17	15.13	15.15	15.14	15.11	15.07	15.10	15.09
CH 46	5230	15.10							
CH 54	5270	15.14	15.02	15.03	14.99	15.03	15.01	15.03	15.02
CH 62	5310	15.14							
CH 102	5510	15.02	16.77	16.77	16.82	16.78	16.79	16.78	16.82
CH 110	5550	16.84							
CH 134	5670	15.00							
CH 151	5755	17.02							
CH 159	5795	16.99	16.97	16.92	16.95	16.97	16.98	16.98	16.98

WLAN 5GHz 802.11ac-VHT20 Average Power (dBm)											
Power vs. Channel			Power vs. MCS Index								
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0									
CH 36	5180	15.14	15.20	15.20	15.22	15.22	15.21	15.19	15.21	15.23	15.23
CH 40	5200	15.27									
CH 44	5220	15.18									
CH 48	5240	15.11									
CH 52	5260	15.07	15.10	15.08	15.13	15.09	15.08	15.09	15.09	15.10	15.11
CH 56	5280	15.10									
CH 60	5300	15.15									
CH 64	5320	15.09									
CH 100	5500	16.62									
CH 104	5520	16.70									
CH 108	5540	16.71	16.91	16.89	16.88	16.88	16.89	16.90	16.86	16.89	16.88
CH 112	5560	16.78									
CH 116	5580	16.95									
CH 132	5660	16.57									
CH 136	5680	16.64									
CH 140	5700	16.59									
CH 149	5745	17.22	17.25	17.25	17.24	17.26	17.23	17.22	17.22	17.26	17.25
CH 153	5765	17.14									
CH 157	5785	17.29									
CH 161	5805	17.14									
CH 165	5825	17.24									

WLAN 5GHz 802.11ac-VHT40 Average Power (dBm)											
Power vs. Channel			Power vs. MCS Index								
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0									
CH 38	5190	15.23	15.21	15.16	15.19	15.18	15.19	15.18	15.19	15.15	15.22
CH 46	5230	15.16									
CH 54	5270	15.21	15.08	15.06	15.11	15.07	15.05	15.06	15.09	15.08	15.04
CH 62	5310	15.18									
CH 102	5510	15.10	16.86	16.88	16.88	16.88	16.88	16.89	16.87	16.90	16.89
CH 110	5550	16.93									
CH 134	5670	15.06									
CH 151	5755	17.08									
CH 159	5795	17.04	17.04	17.03	17.01	17.01	17.04	17.04	17.02	16.99	17.02

WLAN 5GHz 802.11ac-VHT80 Average Power (dBm)											
Power vs. Channel			Power vs. MCS Index								
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0									
CH 42	5210	14.18	14.13	14.14	14.13	14.12	14.12	14.10	14.15	14.12	14.14
CH 58	5290	14.23	14.20	14.17	14.18	14.20	14.17	14.20	14.19	14.18	14.19
CH 106	5530	14.09	14.04	14.04	14.05	14.03	14.03	14.06	14.03	14.06	14.02
CH 155	5775	17.12	17.08	17.04	17.04	17.04	17.00	17.07	17.09	17.09	17.08

13. Antenna Location

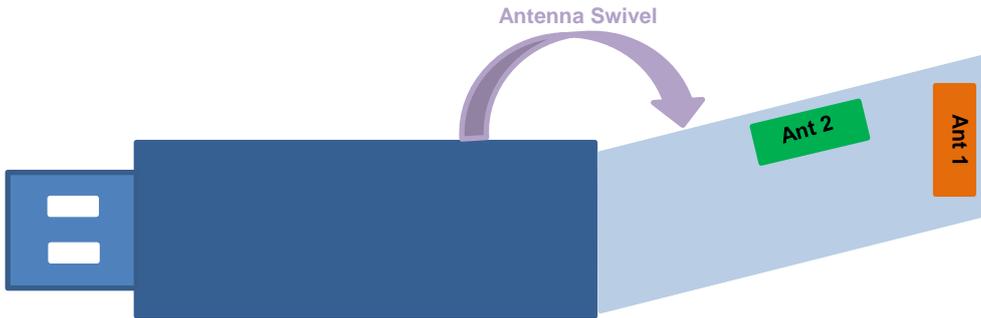

14. SAR Test Results

General Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg) * Tune-up scaling factor
2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

14.1 Body SAR

<2.4GHz WLAN>

Plot No.	Band	Mode	Test Position	Gap (cm)	Swivel (degree)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Horizontal Up	0.5cm	Swivel 0	6	2437	15.28	15.50	1.051	0.06	0.085	0.089
	WLAN2.4GHz	802.11b 1Mbps	Horizontal Down	0.5cm	Swivel 0	6	2437	15.28	15.50	1.051	-0.05	0.756	0.795
	WLAN2.4GHz	802.11b 1Mbps	Vertical Back	0.5cm	Swivel 0	6	2437	15.28	15.50	1.051	0.1	0.020	0.021
	WLAN2.4GHz	802.11b 1Mbps	Vertical Back	0.5cm	Swivel 0	6	2437	15.28	15.50	1.051	-0.09	0.254	0.267
	WLAN2.4GHz	802.11b 1Mbps	Tip Mode	0.5cm	Swivel 0	6	2437	15.28	15.50	1.051	-0.1	0.009	0.010
	WLAN2.4GHz	802.11b 1Mbps	Horizontal UP	0.5cm	Swivel 90	6	2437	15.28	15.50	1.051	0.02	0.079	0.083
	WLAN2.4GHz	802.11b 1Mbps	Horizontal Down	0.5cm	Swivel 90	6	2437	15.28	15.50	1.051	-0.12	0.223	0.234
	WLAN2.4GHz	802.11b 1Mbps	Vertical Front	0.5cm	Swivel 90	6	2437	15.28	15.50	1.051	-0.08	0.092	0.097
	WLAN2.4GHz	802.11b 1Mbps	Vertical Back	0.5cm	Swivel 90	6	2437	15.28	15.50	1.051	-0.12	0.173	0.182
	WLAN2.4GHz	802.11b 1Mbps	Tip Mode	0.5cm	Swivel 90	6	2437	15.28	15.50	1.051	-0.16	0.741	0.779
	WLAN2.4GHz	802.11b 1Mbps	Horizontal Up	0.5cm	Swivel 135	6	2437	15.28	15.50	1.051	0	0.038	0.040
	WLAN2.4GHz	802.11b 1Mbps	Horizontal Down	0.5cm	Swivel 135	6	2437	15.28	15.50	1.051	-0.15	1.010	1.062
	WLAN2.4GHz	802.11b 1Mbps	Horizontal Down	0.5cm	Swivel 135	1	2412	15.26	15.50	1.056	0.06	0.948	1.001
	WLAN2.4GHz	802.11n-HT40 MCS0	Horizontal Down	0.5cm	Swivel 135	6	2437	15.15	15.50	1.083	-0.06	0.665	0.720
01	WLAN2.4GHz	802.11b 1Mbps	Horizontal Down	0.5cm	Swivel 135	11	2462	14.83	15.50	1.167	-0.01	0.917	1.070
	WLAN2.4GHz	802.11b 1Mbps	Vertical Front	0.5cm	Swivel 135	6	2437	15.28	15.50	1.051	-0.11	0.076	0.080
	WLAN2.4GHz	802.11b 1Mbps	Vertical Back	0.5cm	Swivel 135	6	2437	15.28	15.50	1.051	-0.07	0.178	0.187



<5.8GHz WLAN>

Plot No.	Band	Mode	Test Position	Gap (cm)	Swivel (degree)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Horizontal Up	0.5cm	Swivel 0	157	5785	17.35	17.50	1.035	0	< 0.001	< 0.001
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 0	157	5785	17.35	17.50	1.035	-0.16	0.432	0.447
	WLAN5GHz	802.11a 6Mbps	Vertical Front	0.5cm	Swivel 0	157	5785	17.35	17.50	1.035	0.11	0.045	0.047
	WLAN5GHz	802.11a 6Mbps	Vertical Back	0.5cm	Swivel 0	157	5785	17.35	17.50	1.035	-0.17	0.227	0.235
	WLAN5GHz	802.11a 6Mbps	Tip Mode	0.5cm	Swivel 0	157	5785	17.35	17.50	1.035	0	< 0.001	< 0.001
	WLAN5GHz	802.11a 6Mbps	Horizontal UP	0.5cm	Swivel 90	157	5785	17.35	17.50	1.035	0.1	0.011	0.011
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 90	157	5785	17.35	17.50	1.035	-0.06	0.690	0.714
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 90	149	5745	17.28	17.50	1.052	0.02	0.692	0.728
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 90	165	5825	17.29	17.50	1.051	-0.12	0.634	0.666
	WLAN5GHz	802.11a 6Mbps	Vertical Front	0.5cm	Swivel 90	157	5785	17.35	17.50	1.035	-0.08	0.253	0.262
	WLAN5GHz	802.11a 6Mbps	Vertical Back	0.5cm	Swivel 90	157	5785	17.35	17.50	1.035	-0.05	0.495	0.512
	WLAN5GHz	802.11a 6Mbps	Tip Mode	0.5cm	Swivel 90	157	5785	17.35	17.50	1.035	-0.09	0.730	0.756
	WLAN5GHz	802.11a 6Mbps	Tip Mode	0.5cm	Swivel 90	149	5745	17.28	17.50	1.052	-0.07	0.775	0.816
	WLAN5GHz	802.11a 6Mbps	Tip Mode	0.5cm	Swivel 90	165	5825	17.29	17.50	1.051	-0.02	0.656	0.689
	WLAN5GHz	802.11a 6Mbps	Horizontal Up	0.5cm	Swivel 135	157	5785	17.35	17.50	1.035	0.06	0.088	0.091
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 135	157	5785	17.35	17.50	1.035	0.06	1.030	1.066
02	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 135	149	5745	17.28	17.50	1.052	-0.03	1.040	1.095
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 135	165	5825	17.29	17.50	1.051	-0.01	0.928	0.975
	WLAN5GHz	802.11ac-VHT80 MCS0	Horizontal Down	0.5cm	Swivel 135	155	5775	17.12	17.50	1.093	-0.03	0.613	0.670
	WLAN5GHz	802.11a 6Mbps	Vertical Front	0.5cm	Swivel 135	157	5785	17.35	17.50	1.035	0.01	0.085	0.088
	WLAN5GHz	802.11a 6Mbps	Vertical Back	0.5cm	Swivel 135	157	5785	17.35	17.50	1.035	-0.12	0.384	0.397

<5.2GHz WLAN>

Plot No.	Band	Mode	Test Position	Gap (cm)	Swivel (degree)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Horizontal Up	0.5cm	Swivel 0	40	5200	15.32	15.50	1.042	0.18	0.021	0.022
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 0	40	5200	15.32	15.50	1.042	-0.02	0.658	0.686
	WLAN5GHz	802.11a 6Mbps	Vertical Front	0.5cm	Swivel 0	40	5200	15.32	15.50	1.042	-0.14	0.049	0.051
	WLAN5GHz	802.11a 6Mbps	Vertical Back	0.5cm	Swivel 0	40	5200	15.32	15.50	1.042	-0.17	0.238	0.248
	WLAN5GHz	802.11a 6Mbps	Tip Mode	0.5cm	Swivel 0	40	5200	15.32	15.50	1.042	0	< 0.001	< 0.001
	WLAN5GHz	802.11a 6Mbps	Horizontal UP	0.5cm	Swivel 90	40	5200	15.32	15.50	1.042	0	< 0.001	< 0.001
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 90	40	5200	15.32	15.50	1.042	-0.03	0.511	0.533
	WLAN5GHz	802.11a 6Mbps	Vertical Front	0.5cm	Swivel 90	40	5200	15.32	15.50	1.042	0.11	0.081	0.084
	WLAN5GHz	802.11a 6Mbps	Vertical Back	0.5cm	Swivel 90	40	5200	15.32	15.50	1.042	-0.04	0.295	0.307
	WLAN5GHz	802.11a 6Mbps	Tip Mode	0.5cm	Swivel 90	40	5200	15.32	15.50	1.042	-0.15	0.887	0.924
	WLAN5GHz	802.11a 6Mbps	Tip Mode	0.5cm	Swivel 90	44	5220	15.21	15.50	1.069	-0.14	0.502	0.537
	WLAN5GHz	802.11a 6Mbps	Horizontal Up	0.5cm	Swivel 135	40	5200	15.32	15.50	1.042	-0.06	0.076	0.079
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 135	40	5200	15.32	15.50	1.042	0.19	1.000	1.042
03	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 135	44	5220	15.21	15.50	1.069	0.15	1.010	1.079
	WLAN5GHz	802.11n-HT40 MCS0	Horizontal Down	0.5cm	Swivel 135	38	5190	15.17	15.50	1.079	0.15	0.825	0.890
	WLAN5GHz	802.11n-HT40 MCS0	Horizontal Down	0.5cm	Swivel 135	46	5230	15.10	15.50	1.096	-0.02	0.745	0.817
	WLAN5GHz	802.11ac-VHT20 MCS0	Horizontal Down	0.5cm	Swivel 135	40	5200	15.27	15.50	1.055	-0.15	0.897	0.947
	WLAN5GHz	802.11ac-VHT20 MCS0	Horizontal Down	0.5cm	Swivel 135	44	5220	15.18	15.50	1.076	-0.03	0.908	0.977
	WLAN5GHz	802.11ac-VHT40 MCS0	Horizontal Down	0.5cm	Swivel 135	38	5190	15.23	15.50	1.064	-0.06	0.695	0.739
	WLAN5GHz	802.11ac-VHT80 MCS0	Horizontal Down	0.5cm	Swivel 135	42	5210	14.18	14.50	1.078	0.14	0.536	0.578
	WLAN5GHz	802.11a 6Mbps	Vertical Front	0.5cm	Swivel 135	40	5200	15.32	15.50	1.042	-0.14	0.098	0.102
	WLAN5GHz	802.11a 6Mbps	Vertical Back	0.5cm	Swivel 135	40	5200	15.32	15.50	1.042	-0.1	0.200	0.208



<5.3GHz WLAN>

Plot No.	Band	Mode	Test Position	Gap (cm)	Swivel (degree)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Horizontal Up	0.5cm	Swivel 0	60	5300	15.24	15.50	1.063	0.16	0.008	0.008
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 0	60	5300	15.24	15.50	1.063	-0.11	0.581	0.618
	WLAN5GHz	802.11a 6Mbps	Vertical Front	0.5cm	Swivel 0	60	5300	15.24	15.50	1.063	0.01	0.061	0.065
	WLAN5GHz	802.11a 6Mbps	Vertical Back	0.5cm	Swivel 0	60	5300	15.24	15.50	1.063	-0.04	0.124	0.132
	WLAN5GHz	802.11a 6Mbps	Tip Mode	0.5cm	Swivel 0	60	5300	15.24	15.50	1.063	0	< 0.001	< 0.001
	WLAN5GHz	802.11a 6Mbps	Horizontal UP	0.5cm	Swivel 90	60	5300	15.24	15.50	1.063	0	< 0.001	< 0.001
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 90	60	5300	15.24	15.50	1.063	-0.04	0.539	0.573
	WLAN5GHz	802.11a 6Mbps	Vertical Front	0.5cm	Swivel 90	60	5300	15.24	15.50	1.063	-0.02	0.074	0.079
	WLAN5GHz	802.11a 6Mbps	Vertical Back	0.5cm	Swivel 90	60	5300	15.24	15.50	1.063	-0.06	0.317	0.337
	WLAN5GHz	802.11a 6Mbps	Tip Mode	0.5cm	Swivel 90	60	5300	15.24	15.50	1.063	0	0.946	1.005
	WLAN5GHz	802.11a 6Mbps	Tip Mode	0.5cm	Swivel 90	56	5280	15.18	15.50	1.076	-0.05	0.556	0.598
	WLAN5GHz	802.11a 6Mbps	Horizontal Up	0.5cm	Swivel 135	60	5300	15.24	15.50	1.063	0.01	0.108	0.115
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 135	60	5300	15.24	15.50	1.063	-0.19	0.962	1.022
04	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 135	56	5280	15.18	15.50	1.076	-0.08	0.980	1.055
	WLAN5GHz	802.11n-HT40 MCS0	Horizontal Down	0.5cm	Swivel 135	54	5270	15.14	15.50	1.086	0.13	0.737	0.800
	WLAN5GHz	802.11n-HT40 MCS0	Horizontal Down	0.5cm	Swivel 135	62	5310	15.14	15.50	1.087	0.03	0.743	0.808
	WLAN5GHz	802.11ac-VHT20 MCS0	Horizontal Down	0.5cm	Swivel 135	60	5300	15.15	15.50	1.085	-0.11	0.798	0.866
	WLAN5GHz	802.11ac-VHT20 MCS0	Horizontal Down	0.5cm	Swivel 135	56	5280	15.10	15.50	1.098	-0.08	0.835	0.917
	WLAN5GHz	802.11ac-VHT40 MCS0	Horizontal Down	0.5cm	Swivel 135	54	5270	15.21	15.50	1.069	-0.04	0.789	0.843
	WLAN5GHz	802.11ac-VHT40 MCS0	Horizontal Down	0.5cm	Swivel 135	62	5310	15.18	15.50	1.076	-0.12	0.740	0.796
	WLAN5GHz	802.11ac-VHT80 MCS0	Horizontal Down	0.5cm	Swivel 135	58	5290	14.23	14.50	1.064	-0.03	0.461	0.491
	WLAN5GHz	802.11a 6Mbps	Vertical Front	0.5cm	Swivel 135	60	5300	15.24	15.50	1.063	0	0.091	0.097
	WLAN5GHz	802.11a 6Mbps	Vertical Back	0.5cm	Swivel 135	60	5300	15.24	15.50	1.063	-0.12	0.371	0.394



<5.5GHz WLAN>

Plot No.	Band	Mode	Test Position	Gap (cm)	Swivel (degree)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Horizontal Up	0.5cm	Swivel 0	116	5580	17.06	17.50	1.107	0	< 0.001	< 0.001
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 0	116	5580	17.06	17.50	1.107	0.01	0.492	0.544
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 0	104	5520	16.71	17.50	1.201	-0.01	0.461	0.554
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 0	136	5680	16.71	17.50	1.200	0	0.404	0.485
	WLAN5GHz	802.11a 6Mbps	Vertical Front	0.5cm	Swivel 0	116	5580	17.06	17.50	1.107	-0.01	0.065	0.072
	WLAN5GHz	802.11a 6Mbps	Vertical Back	0.5cm	Swivel 0	116	5580	17.06	17.50	1.107	0.09	0.071	0.079
	WLAN5GHz	802.11a 6Mbps	Tip Mode	0.5cm	Swivel 0	116	5580	17.06	17.50	1.107	0	< 0.001	< 0.001
	WLAN5GHz	802.11a 6Mbps	Horizontal UP	0.5cm	Swivel 90	116	5580	17.06	17.50	1.107	-0.04	0.023	0.025
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 90	116	5580	17.06	17.50	1.107	-0.03	0.632	0.699
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 90	104	5520	16.71	17.50	1.201	0	0.615	0.738
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 90	136	5680	16.71	17.50	1.200	-0.04	0.612	0.734
	WLAN5GHz	802.11a 6Mbps	Vertical Front	0.5cm	Swivel 90	116	5580	17.06	17.50	1.107	-0.04	0.142	0.157
	WLAN5GHz	802.11a 6Mbps	Vertical Back	0.5cm	Swivel 90	116	5580	17.06	17.50	1.107	-0.12	0.414	0.458
	WLAN5GHz	802.11a 6Mbps	Vertical Back	0.5cm	Swivel 90	104	5520	16.71	17.50	1.201	-0.07	0.373	0.448
	WLAN5GHz	802.11a 6Mbps	Vertical Back	0.5cm	Swivel 90	136	5680	16.71	17.50	1.200	0.02	0.393	0.472
	WLAN5GHz	802.11a 6Mbps	Tip Mode	0.5cm	Swivel 90	116	5580	17.06	17.50	1.107	-0.14	0.892	0.987
	WLAN5GHz	802.11a 6Mbps	Tip Mode	0.5cm	Swivel 90	104	5520	16.71	17.50	1.201	-0.06	0.836	1.004
	WLAN5GHz	802.11a 6Mbps	Tip Mode	0.5cm	Swivel 90	136	5680	16.71	17.50	1.200	-0.05	0.840	1.008
	WLAN5GHz	802.11a 6Mbps	Horizontal Up	0.5cm	Swivel 135	116	5580	17.06	17.50	1.107	-0.14	0.080	0.089
05	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 135	116	5580	17.06	17.50	1.107	0.11	1.060	1.173
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 135	104	5520	16.71	17.50	1.201	0.14	0.962	1.155
	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 135	136	5680	16.71	17.50	1.200	0.17	0.970	1.164
	WLAN5GHz	802.11n-HT40 MCS0	Horizontal Down	0.5cm	Swivel 135	110	5550	16.84	17.50	1.164	-0.18	1.000	1.164
	WLAN5GHz	802.11n-HT40 MCS0	Horizontal Down	0.5cm	Swivel 135	102	5510	15.02	15.50	1.117	0	0.691	0.772
	WLAN5GHz	802.11n-HT40 MCS0	Horizontal Down	0.5cm	Swivel 135	134	5670	15.00	15.50	1.122	-0.09	0.731	0.820
	WLAN5GHz	802.11ac-VHT20 MCS0	Horizontal Down	0.5cm	Swivel 135	116	5580	16.95	17.50	1.136	-0.16	0.927	1.053
	WLAN5GHz	802.11ac-VHT20 MCS0	Horizontal Down	0.5cm	Swivel 135	108	5540	16.71	17.50	1.199	-0.11	0.855	1.025
	WLAN5GHz	802.11ac-VHT20 MCS0	Horizontal Down	0.5cm	Swivel 135	136	5680	16.64	17.50	1.218	-0.14	0.877	1.068
	WLAN5GHz	802.11ac-VHT40 MCS0	Horizontal Down	0.5cm	Swivel 135	110	5550	16.93	17.50	1.140	-0.09	0.918	1.047
	WLAN5GHz	802.11ac-VHT40 MCS0	Horizontal Down	0.5cm	Swivel 135	102	5510	15.10	15.50	1.096	-0.06	0.573	0.628
	WLAN5GHz	802.11ac-VHT40 MCS0	Horizontal Down	0.5cm	Swivel 135	134	5670	15.06	15.50	1.106	-0.1	0.620	0.686
	WLAN5GHz	802.11ac-VHT80 MCS0	Horizontal Down	0.5cm	Swivel 135	106	5530	14.09	14.50	1.100	-0.15	0.395	0.434
	WLAN5GHz	802.11a 6Mbps	Vertical Front	0.5cm	Swivel 135	116	5580	17.06	17.50	1.107	-0.18	0.196	0.217
	WLAN5GHz	802.11a 6Mbps	Vertical Back	0.5cm	Swivel 135	116	5580	17.06	17.50	1.107	-0.14	0.471	0.521
	WLAN5GHz	802.11a 6Mbps	Vertical Back	0.5cm	Swivel 135	104	5520	16.71	17.50	1.201	-0.09	0.465	0.558
	WLAN5GHz	802.11a 6Mbps	Vertical Back	0.5cm	Swivel 135	136	5680	16.71	17.50	1.200	0.03	0.534	0.641



14.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (cm)	Swivel (degree)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	802.11b 1Mbps	Horizontal Down	0.5cm	Swivel 135	6	2437	15.28	15.50	1.051	-0.15	1.010	-	1.062
2nd	WLAN2.4GHz	802.11b 1Mbps	Horizontal Down	0.5cm	Swivel 135	6	2437	15.28	15.50	1.051	0.06	0.975	1.04	1.025
1st	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 135	44	5220	15.21	15.50	1.069	0.15	1.010	-	1.079
2nd	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 135	44	5220	15.21	15.50	1.069	-0.03	0.986	1.03	1.054
1st	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 135	56	5280	15.18	15.50	1.076	-0.08	0.980	-	1.055
2nd	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 135	56	5280	15.18	15.50	1.076	0.1	0.960	1.02	1.033
1st	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 135	116	5580	17.06	17.50	1.107	0.11	1.060	-	1.173
2nd	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 135	116	5580	17.06	17.50	1.107	0.12	1.050	1.01	1.162
1st	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 135	149	5745	17.28	17.50	1.052	-0.03	1.040	-	1.095
2nd	WLAN5GHz	802.11a 6Mbps	Horizontal Down	0.5cm	Swivel 135	149	5745	17.28	17.50	1.052	-0.17	0.971	1.07	1.022

General Note:

1. Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$
2. Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

Test Engineer : Ken Lee, Jack Wu, Angelo Chang, Tom Jiang, Nick Yu, and Galen Zhang

15. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observations is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 14.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 17.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 17.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz



Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.55	Normal	1	1	1	± 6.55 %	± 6.55 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	2.0	Rectangular	√3	1	1	± 1.2 %	± 1.2 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Probe Positioning	9.9	Rectangular	√3	1	1	± 5.7 %	± 5.7 %
Max. SAR Eval.	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 12.8 %	± 12.6 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 25.6 %	± 25.2 %

Table 17.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz



16. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 644545 D01 v01r02, "Guidance for IEEE 802.11ac and Pre-ac Device Emission Testing", Oct 2013
- [8] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [9] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.