



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	NETGEAR, Inc.
Applicant Address	350 East Plumeria Drive, San Jose, California 95134, USA
FCC ID	PY313400249

Product Name	WiFi USB Adapter
Brand Name	NETGEAR
Model No.	A6210
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5725 ~ 5850 MHz
Received Date	Jul. 24, 2015
Final Test Date	Sep. 25, 2015
Submission Type	Class II Change

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D03 v01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes	6
3.6. Table for Testing Locations.....	7
3.7. Table for Class II Change	8
3.8. Table for Supporting Units	8
3.9. Table for Parameters of Test Software Setting	9
3.10. EUT Operation during Test	9
3.11. Duty Cycle.....	9
3.12. Test Configurations	10
4. TEST RESULT	11
4.1. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	11
4.2. 6dB Spectrum Bandwidth Measurement	20
4.3. Maximum Conducted Output Power Measurement.....	26
4.4. Power Spectral Density Measurement	29
4.5. Radiated Emissions Measurement	36
4.6. Band Edge Emissions Measurement	53
4.7. Frequency Stability Measurement	60
4.8. Antenna Requirements	64
5. LIST OF MEASURING EQUIPMENTS	65
6. MEASUREMENT UNCERTAINTY	66
APPENDIX A. TEST PHOTOS	A1 ~ A2



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR422533-03	Rev. 01	Initial issue of report	Oct. 06, 2015



1. VERIFICATION OF COMPLIANCE

Product Name : WIFI USB Adapter
Brand Name : NETGEAR
Model No. : A6210
Applicant : NETGEAR, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 24, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink, appearing to read 'Sam Chen', is written over a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.2	15.407(e)	6dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	12.70 dB
4.4	15.407(a)	Power Spectral Density	Complies	28.13 dB
4.5	15.407(b)	Radiated Emissions	Complies	9.94 dB
4.6	15.407(b)	Band Edge Emissions	Complies	0.06 dB
4.7	15.407(g)	Frequency Stability	Complies	-
4.8	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From host system
Modulation	IEEE 802.11a: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	5725 ~ 5850 MHz
Channel Number	5 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	IEEE 802.11a: 17.40 MHz IEEE 802.11n MCS0 (HT20): 18.84 MHz IEEE 802.11n MCS0 (HT40): 39.00 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 18.12 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 37.80 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 75.60 MHz
Maximum Conducted Output Power	IEEE 802.11a: 17.30 dBm IEEE 802.11n MCS0 (HT20): 17.25 dBm IEEE 802.11n MCS0 (HT40): 17.02 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 17.26 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 17.07 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 15.02 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming
Operating Mode	<input type="checkbox"/> Outdoor access point	
	<input type="checkbox"/> Indoor access point	
	<input type="checkbox"/> Fixed point-to-point access points	
	<input checked="" type="checkbox"/> Mobile and portable client devices	

Antenna and Band width

Antenna	Two (TX)		
	20 MHz	40 MHz	80 MHz
Band width Mode			
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15
802.11ac (VHT20)	2	MCS 0-9/Nss1-2
802.11ac (VHT40)	2	MCS 0-9/Nss1-2
802.11ac (VHT80)	2	MCS 0-9/Nss1-2

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

Description
USB cradle*1: Shielded, 0.85m

3.3. Table for Filed Antenna

Ant.	Antenna Type	Connector	Gain (dBi)
1	Diple Antenna	UFL	3.4
2	Diple Antenna	UFL	3.3

Note: The EUT has two antennas.

Chain 1 and Chain 2 could transmit/receive simultaneously.



3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

For 80MHz bandwidth systems, use Channel 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
Max. Conducted Output Power	11a/BPSK	Band 4	6Mbps	149/157/165	1+2
	11n HT20	Band 4	MCS0	149/157/165	1+2
	11n HT40	Band 4	MCS0	151/159	1+2
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	1+2
	11ac VHT40	Band 4	MCS0/Nss1	151/159	1+2
	11ac VHT80	Band 4	MCS0/Nss1	155	1+2
Power Spectral Density	11a/BPSK	Band 4	6Mbps	149/157/165	1+2
	11n HT20	Band 4	MCS0	149/157/165	1+2
	11n HT40	Band 4	MCS0	151/159	1+2
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	1+2
	11ac VHT40	Band 4	MCS0/Nss1	151/159	1+2
	11ac VHT80	Band 4	MCS0/Nss1	155	1+2
26dB Spectrum Bandwidth & 99% Occupied Bandwidth Measurement	11a/BPSK	Band 4	6Mbps	149/157/165	1+2
	11n HT20	Band 4	MCS0	149/157/165	1+2
	11n HT40	Band 4	MCS0	151/159	1+2
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	1+2
	11ac VHT40	Band 4	MCS0/Nss1	151/159	1+2
	11ac VHT80	Band 4	MCS0/Nss1	155	1+2
6dB Spectrum Bandwidth Measurement	11a/BPSK	Band 4	6Mbps	149/157/165	1+2
	11n HT20	Band 4	MCS0	149/157/165	1+2
	11n HT40	Band 4	MCS0	151/159	1+2
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	1+2
	11ac VHT40	Band 4	MCS0/Nss1	151/159	1+2
	11ac VHT80	Band 4	MCS0/Nss1	155	1+2
Radiated Emission Above 1GHz	11a/BPSK	Band 4	6Mbps	149/157/165	1+2
	11n HT20	Band 4	MCS0	149/157/165	1+2
	11n HT40	Band 4	MCS0	151/159	1+2
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	1+2
	11ac VHT40	Band 4	MCS0/Nss1	151/159	1+2
	11ac VHT80	Band 4	MCS0/Nss1	155	1+2

Band Edge Emission	11a/BPSK	Band 4	6Mbps	149/157/165	1+2
	11n HT20	Band 4	MCS0	149/157/165	1+2
	11n HT40	Band 4	MCS0	151/159	1+2
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	1+2
	11ac VHT40	Band 4	MCS0/Nss1	151/159	1+2
	11ac VHT80	Band 4	MCS0/Nss1	155	1+2
Frequency Stability	20 MHz	Band 4	-	157	1
	40 MHz	Band 4	-	151	1
	80 MHz	Band 4	-	155	1

The following test modes were performed for all tests:

For Radiated Emission Above 1GHz test:

The radiated emission above 1GHz test was performed according to the worst case of original test. For radiated emission above 1GHz test, the following modes was performed:

Mode 1. Device with USB cradle and 90° antenna angle (antenna open)

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Class II Change

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
Changing 5GHz Band 4 to "New Rules" from "Old Rules".	<ol style="list-style-type: none"> 1. 26dB Spectrum Bandwidth and 99% Occupied Bandwidth. 2. 6dB Spectrum Bandwidth. 3. Max. Conducted Output Power. 4. Power Spectral Density. 5. Radiated Emission Above 1GHz. 6. Band Edge Emission. 7. Frequency Stability.

3.8. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	MT7662 QA V1.0.3.2		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
	5745 MHz	5785 MHz	5825 MHz
802.11a	22/24	22/24	22/24
802.11n MCS0 HT20	22/24	22/24	23/24
802.11ac MCS0/Nss1 VHT20	22/24	22/24	23/24
Mode	NCB: 40MHz		
	5755 MHz	5795 MHz	
802.11n MCS0 HT40	21/23	21/23	
802.11ac MCS0/Nss1 VHT40	21/23	21/23	
Mode	NCB: 80MHz		
802.11ac MCS0/Nss1 VHT80	5775 MHz		
	1E/1F		

3.10. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.11. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	1.427	1.641	86.93	0.61	0.70
802.11n MCS0 HT20	1.314	1.536	85.55	0.68	0.76
802.11n MCS0 HT40	0.628	0.867	72.39	1.40	1.59
802.11ac MCS0/Nss1 VHT20	1.348	1.562	86.30	0.64	0.74
802.11ac MCS0/Nss1 VHT40	0.634	0.873	72.62	1.39	1.58
802.11ac MCS0/Nss1 VHT80	1.000	1.000	100.00	0.00	0.01

3.12. Test Configurations

3.12.1. Radiation Emissions Test Configuration

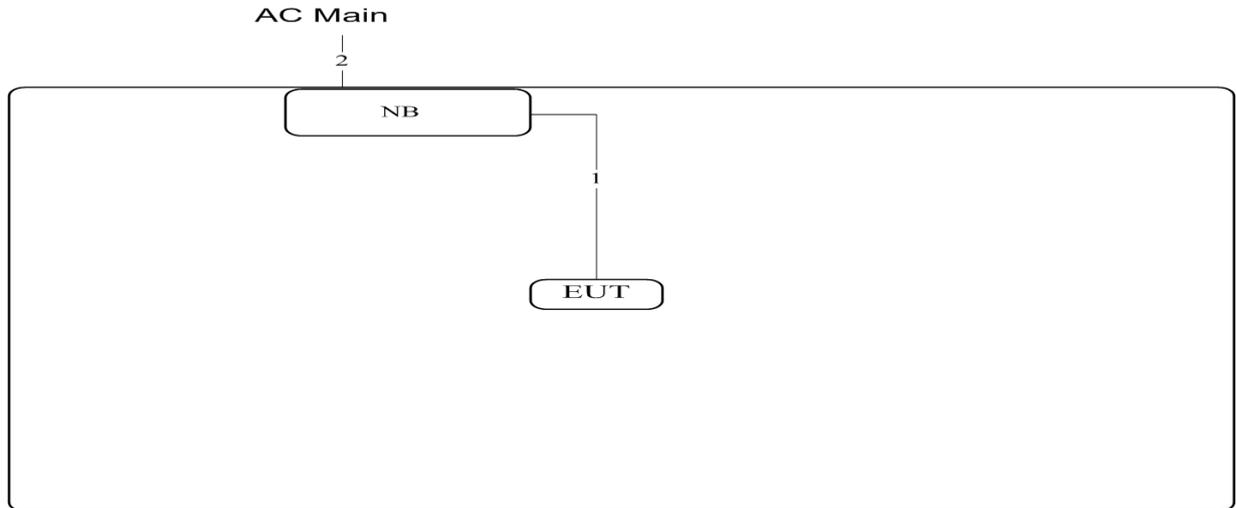

Item	Connection	Shielded	Length
1	USB Cable	YES	0.3m
2	Power Cale	No	2.6m

4. TEST RESULT

4.1. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.1.1. Limit

No restriction limits.

4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold

4.1.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.1.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.1.5. Test Deviation

There is no deviation with the original standard.

4.1.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.1.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	25°C	Humidity	45%
Test Engineer	Lucas Huang		


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745 MHz	29.04	17.16
	5785 MHz	30.00	17.40
	5825 MHz	32.52	17.40
802.11n MCS0 HT20	5745 MHz	35.40	18.84
	5785 MHz	28.56	18.12
	5825 MHz	31.32	18.12
802.11n MCS0 HT40	5755 MHz	80.60	39.00
	5795 MHz	52.00	37.80
802.11ac MCS0/Nss1 VHT20	5745 MHz	27.24	18.00
	5785 MHz	27.12	18.00
	5825 MHz	30.96	18.12
802.11ac MCS0/Nss1 VHT40	5755 MHz	46.00	36.80
	5795 MHz	81.20	37.80
802.11ac MCS0/Nss1 VHT80	5775 MHz	110.00	75.60

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5745 MHz

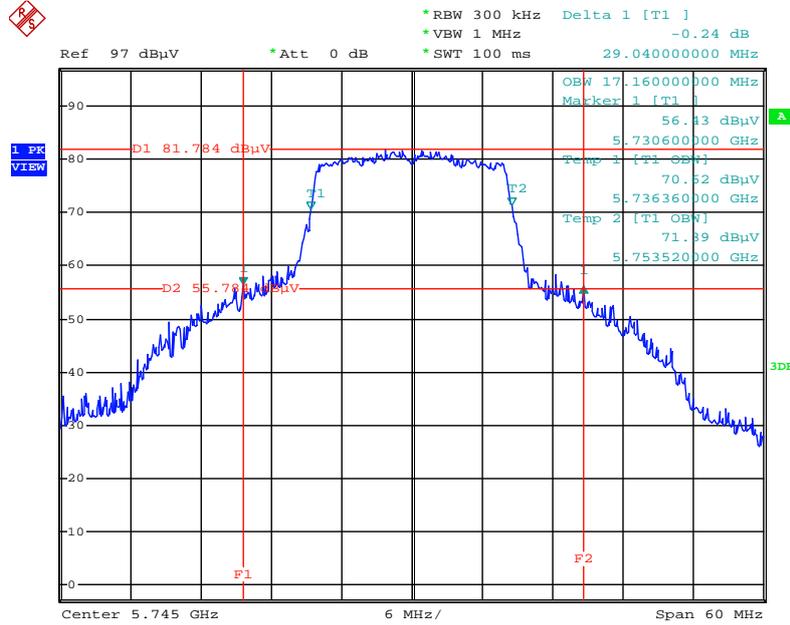


Date: 25.SEP.2015 14:20:05

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5785 MHz

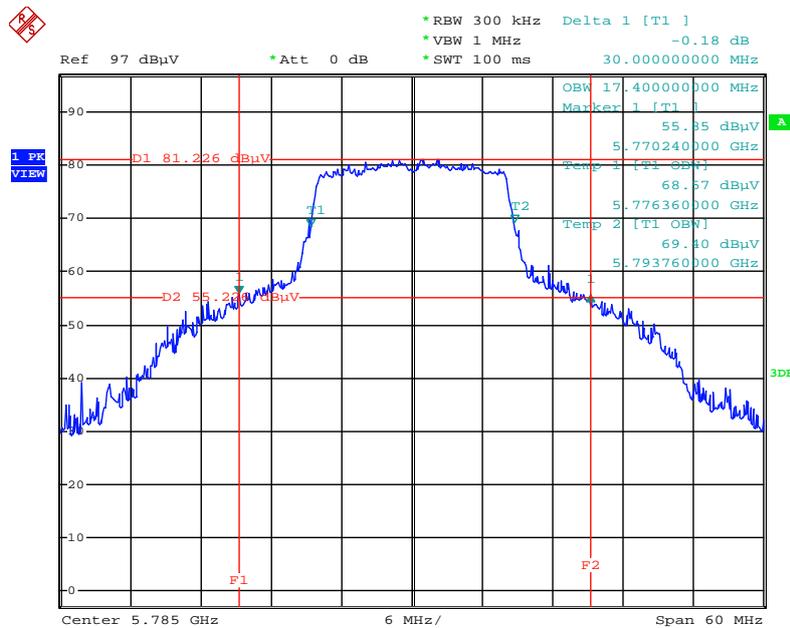


Date: 25.SEP.2015 14:20:53

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5825 MHz

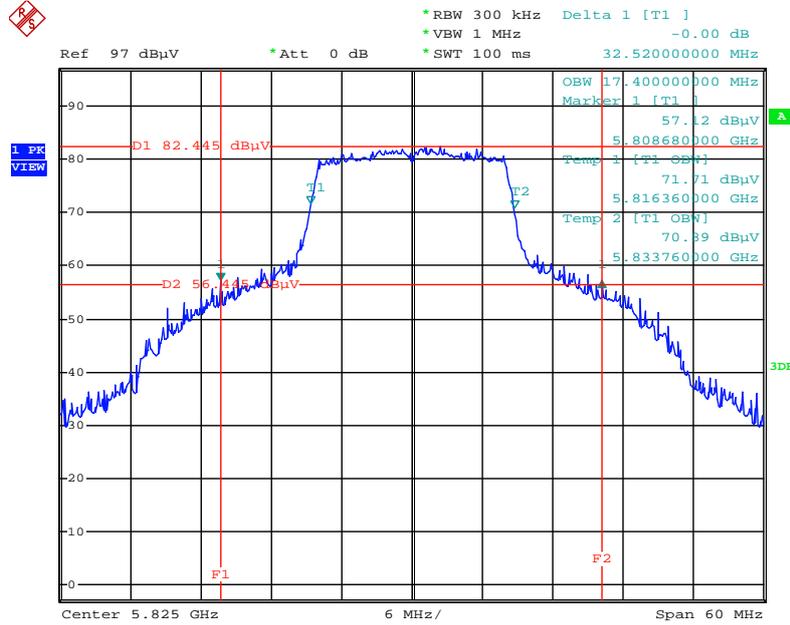


Date: 25.SEP.2015 14:22:19

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2 / 5745 MHz

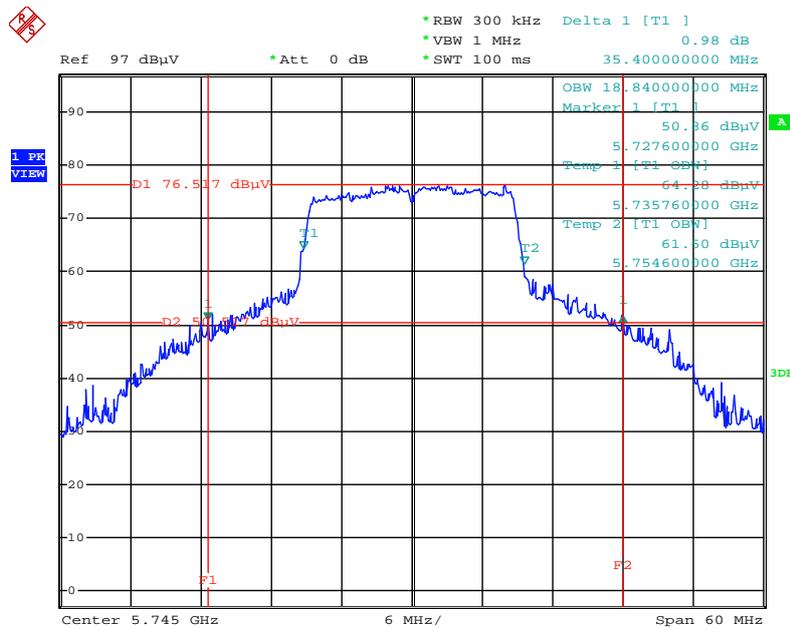


Date: 25.SEP.2015 14:23:16

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2 / 5785 MHz

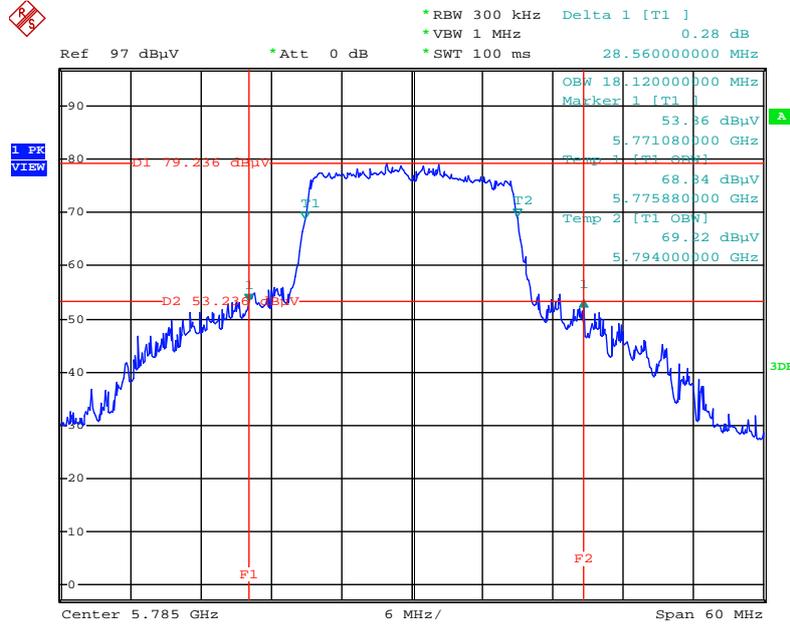


Date: 25.SEP.2015 14:24:46

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2 / 5825 MHz

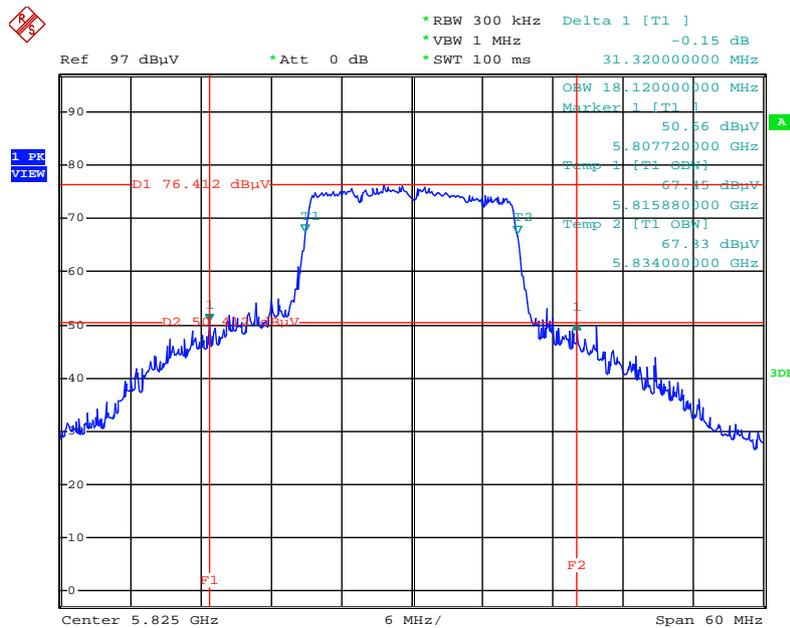


Date: 25.SEP.2015 14:25:19

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2 / 5755 MHz

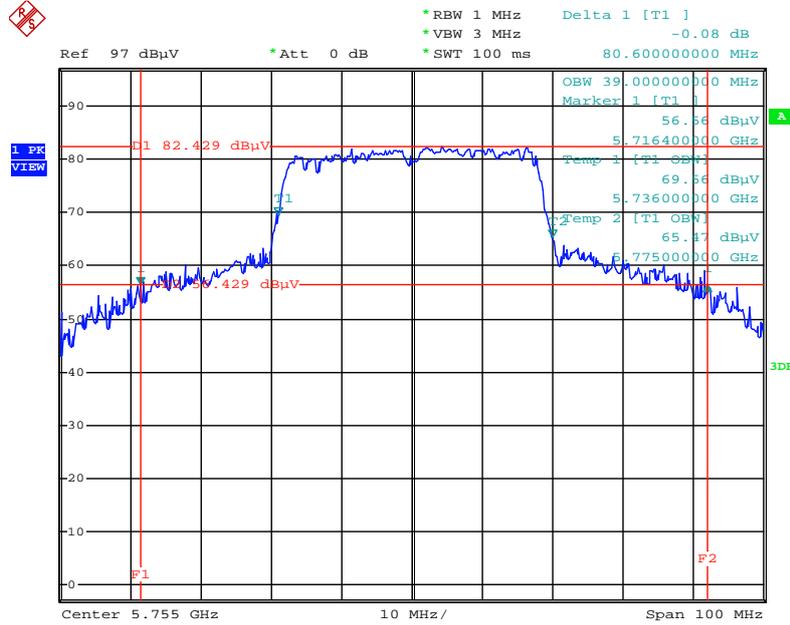


Date: 25.SEP.2015 14:31:29

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2 / 5795 MHz

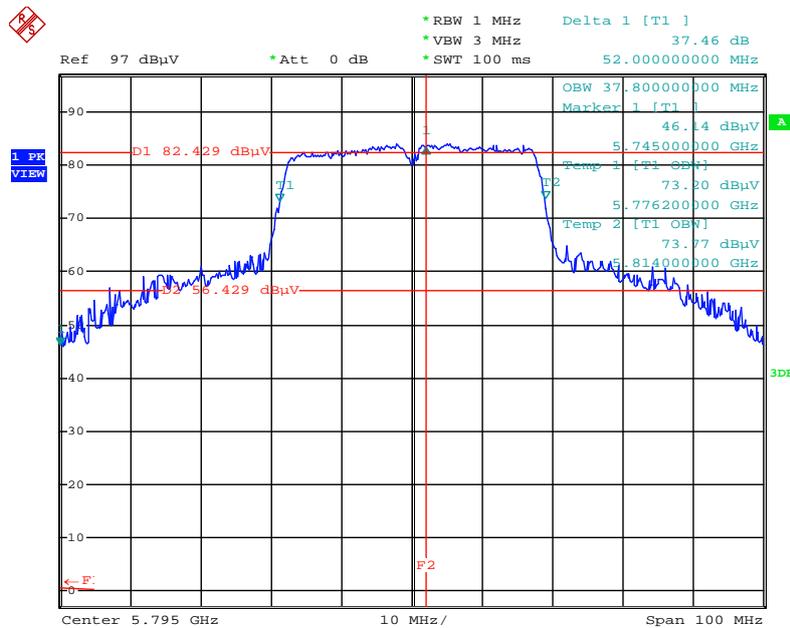


Date: 25.SEP.2015 14:32:25

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5745 MHz

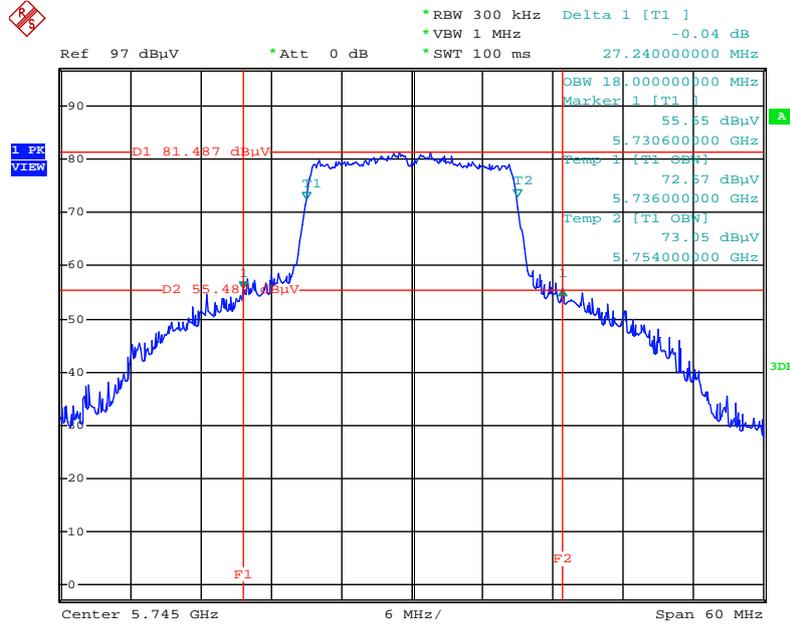


Date: 25.SEP.2015 14:26:56

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5785 MHz

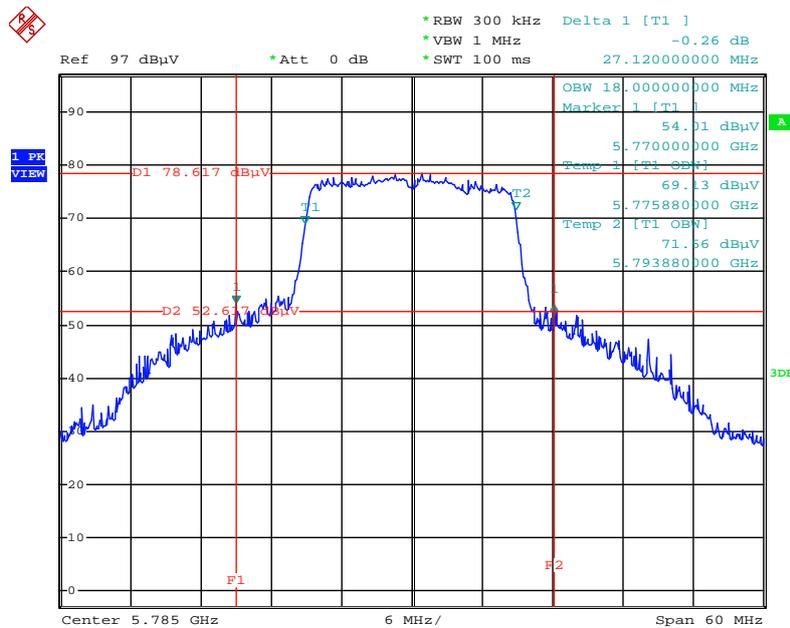


Date: 25.SEP.2015 14:27:25

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5825 MHz

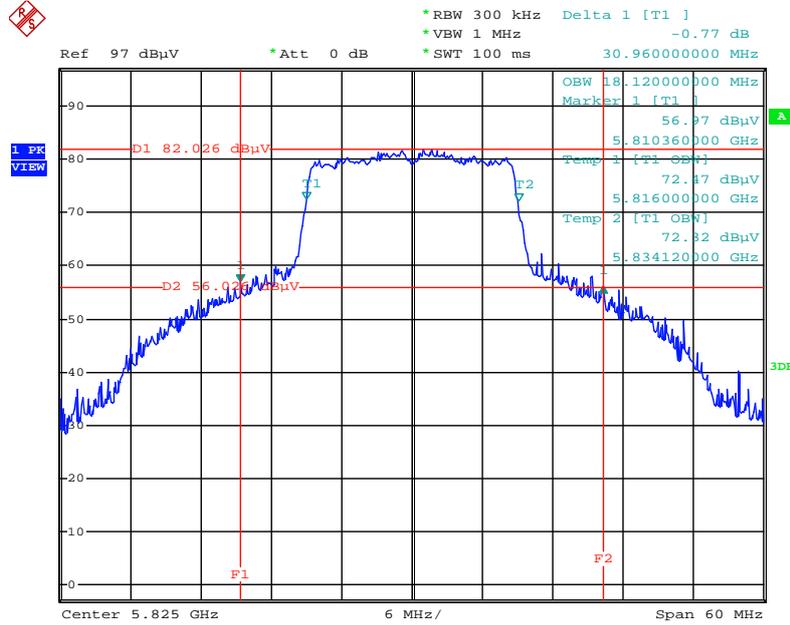


Date: 25.SEP.2015 14:28:19

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5755 MHz

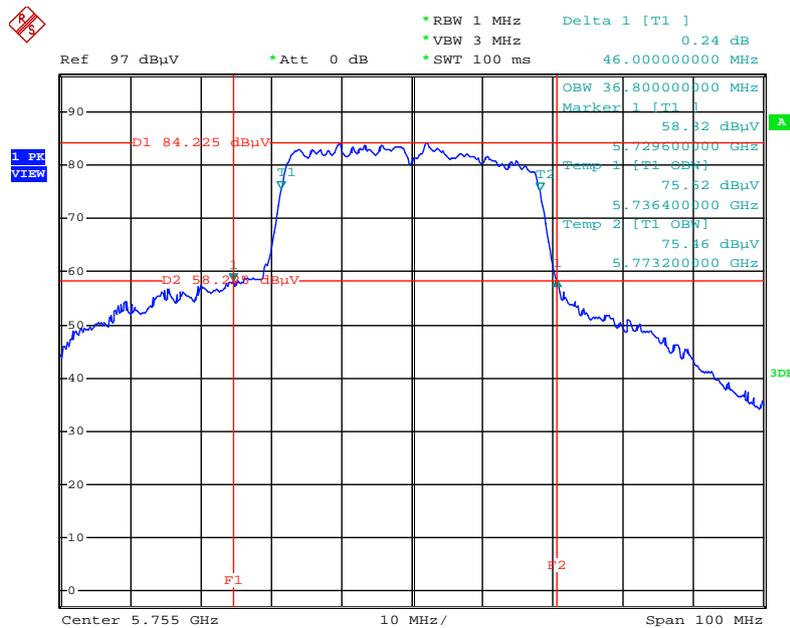


Date: 25.SEP.2015 14:37:49

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5795 MHz

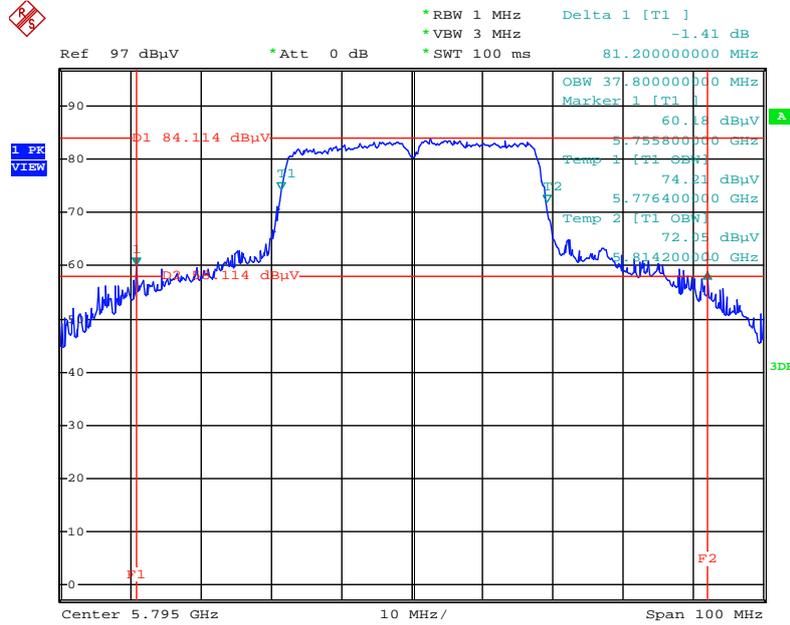

Date: 25.SEP.2015 14:40:18

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5775 MHz

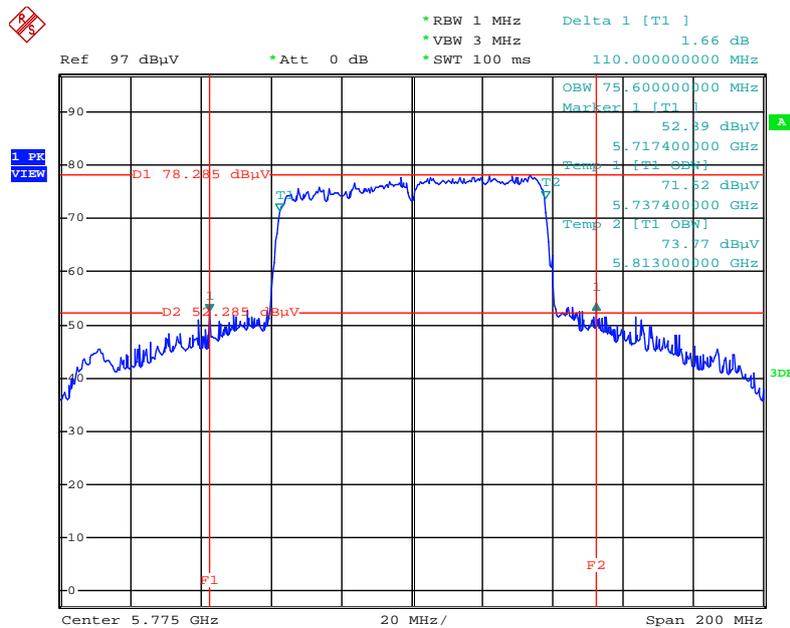

Date: 25.SEP.2015 14:42:03

4.2. 6dB Spectrum Bandwidth Measurement

4.2.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.2.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 6dB Spectrum Bandwidth


Temperature	25°C	Humidity	45%
Test Engineer	Lucas Huang		

Mode	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11a	5745 MHz	15.84	500	Complies
	5785 MHz	15.68	500	Complies
	5825 MHz	16.32	500	Complies
802.11n MCS0 HT20	5745 MHz	17.28	500	Complies
	5785 MHz	16.88	500	Complies
	5825 MHz	17.20	500	Complies
802.11n MCS0 HT40	5755 MHz	35.36	500	Complies
	5795 MHz	36.32	500	Complies
802.11ac MCS0/Nss1 VHT20	5745 MHz	17.04	500	Complies
	5785 MHz	16.40	500	Complies
	5825 MHz	16.56	500	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	36.32	500	Complies
	5795 MHz	34.56	500	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	75.20	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5785 MHz

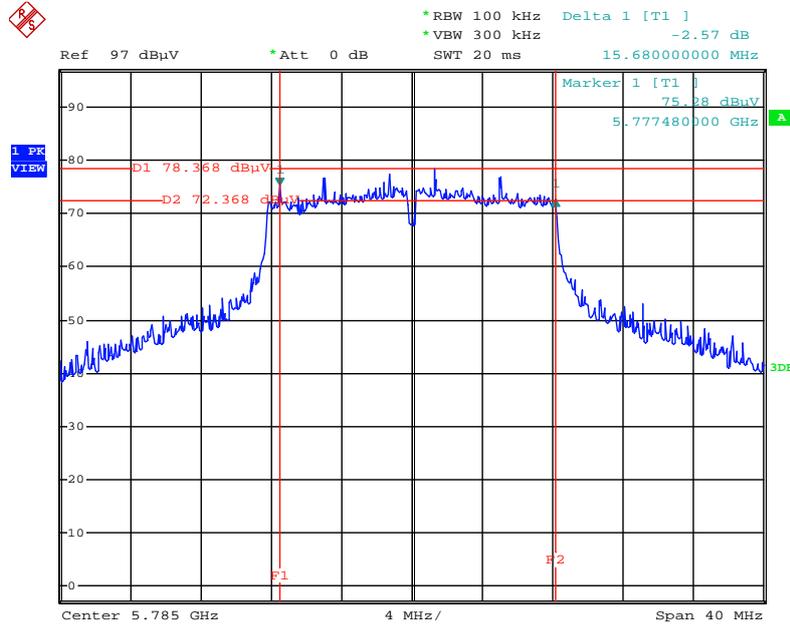


Date: 25.SEP.2015 14:21:14

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2 / 5785 MHz

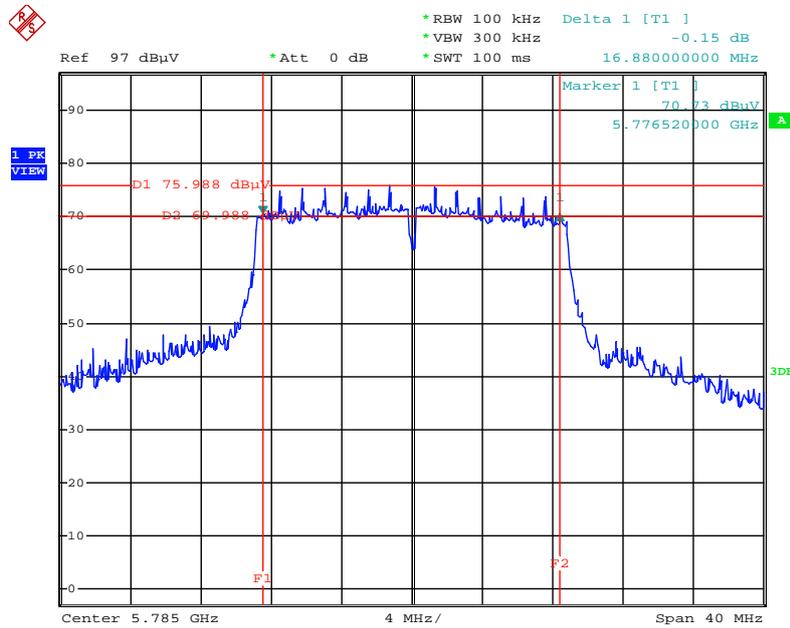


Date: 25.SEP.2015 14:24:33

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2 / 5755 MHz

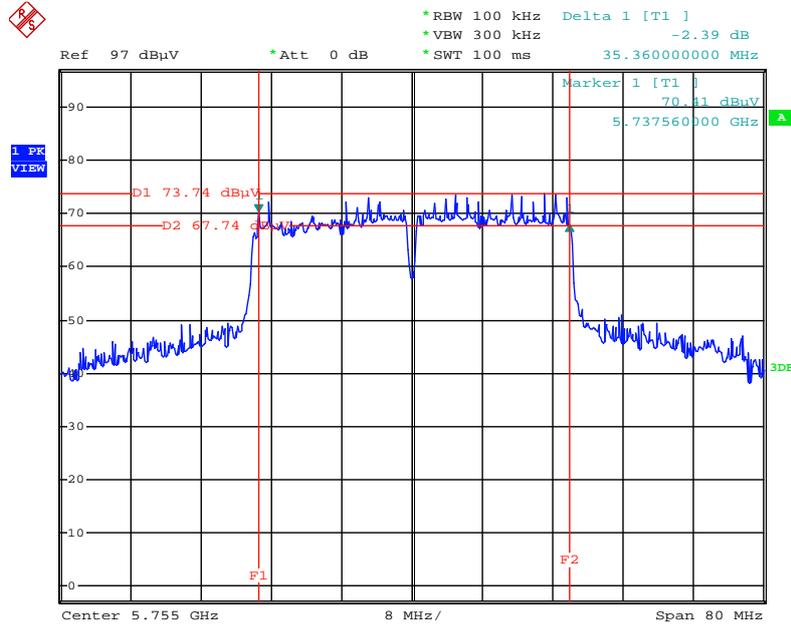


Date: 25.SEP.2015 14:31:02

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5785 MHz

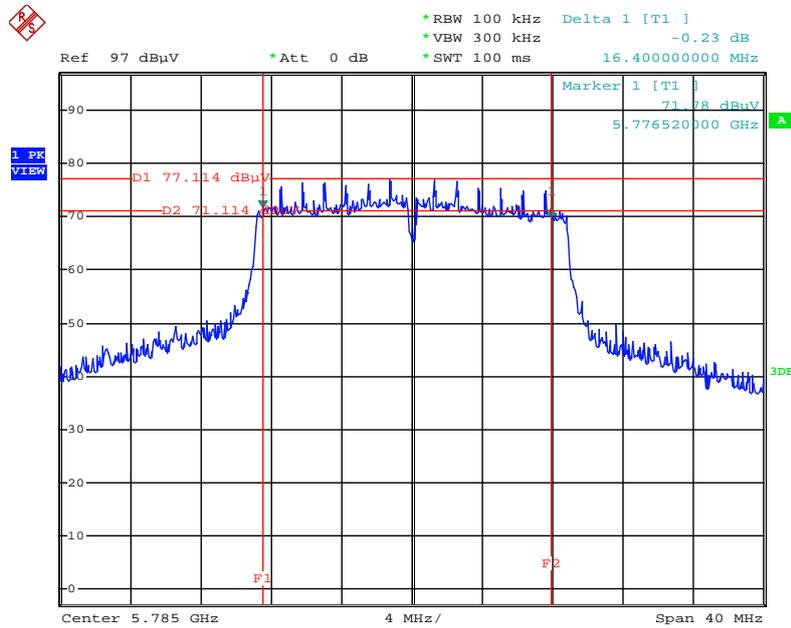


Date: 25.SEP.2015 14:29:21

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5795 MHz

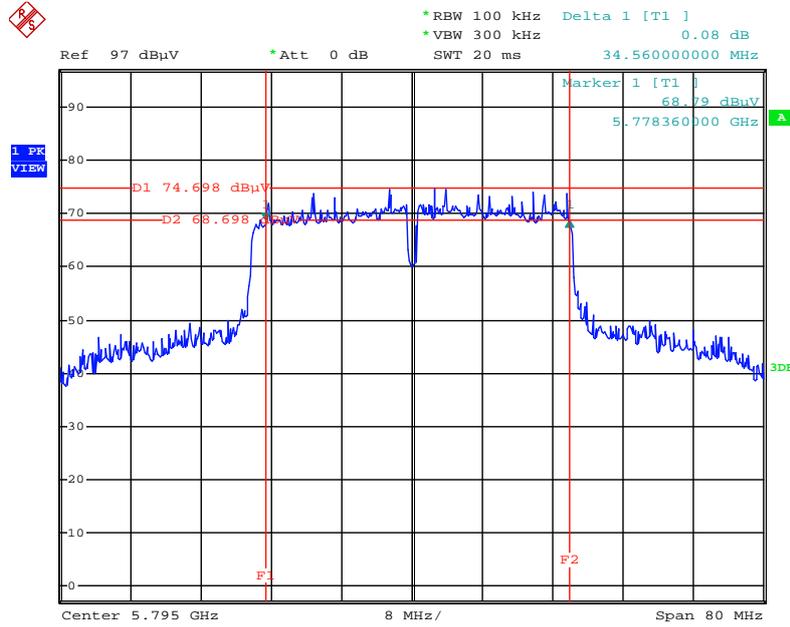

Date: 25.SEP.2015 14:40:40

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5775 MHz

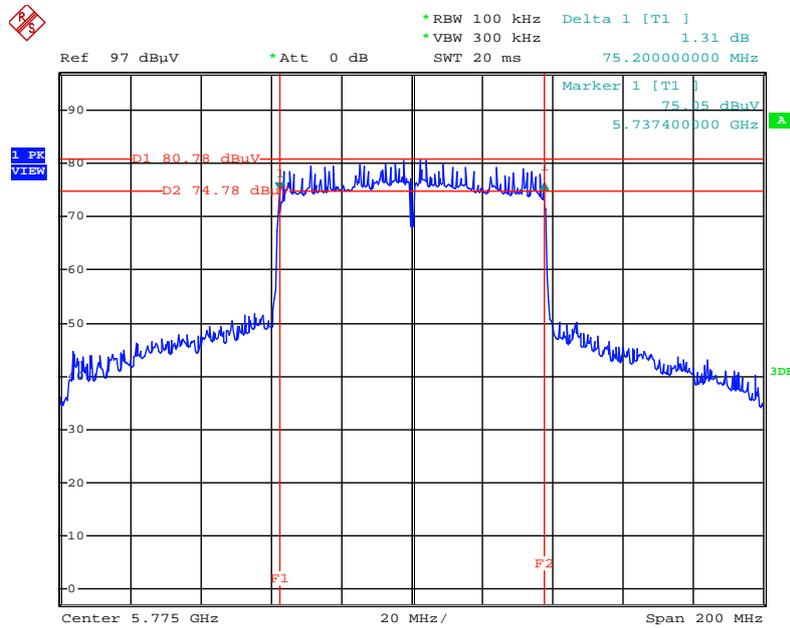

Date: 25.SEP.2015 16:09:27

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

Frequency Band	Limit
<input checked="" type="checkbox"/> 5.725~5.85 GHz	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout

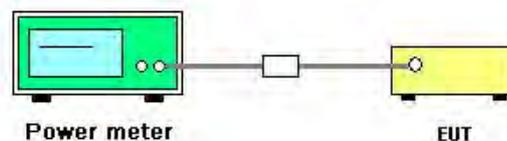

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	45%
Test Engineer	Lucas Huang	Test Date	Sep. 25, 2015

Mode	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
802.11a	5745 MHz	14.05	14.23	17.15	30.00	Complies
	5785 MHz	14.26	14.31	17.30	30.00	Complies
	5825 MHz	14.12	14.35	17.25	30.00	Complies
802.11n MCS0 HT20	5745 MHz	14.02	14.28	17.16	30.00	Complies
	5785 MHz	14.11	14.36	17.25	30.00	Complies
	5825 MHz	14.05	14.29	17.18	30.00	Complies
802.11n MCS0 HT40	5755 MHz	13.84	14.17	17.02	30.00	Complies
	5795 MHz	13.91	14.03	16.98	30.00	Complies
802.11ac MCS0/Nss1 VHT20	5745 MHz	14.17	14.26	17.23	30.00	Complies
	5785 MHz	14.21	14.28	17.26	30.00	Complies
	5825 MHz	14.14	14.32	17.24	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	13.97	14.08	17.04	30.00	Complies
	5795 MHz	13.95	14.16	17.07	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	11.98	12.03	15.02	30.00	Complies

4.4. Power Spectral Density Measurement

4.4.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

	Frequency Band	Limit
<input checked="" type="checkbox"/>	5.725~5.85 GHz	30 dBm/500kHz

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.
5. For 5.725~5.85 GHz, the measured result of PSD level must add $10\log(500\text{kHz}/\text{RBW})$ and the final result should ≤ 30 dBm.

4.4.4. Test Setup Layout

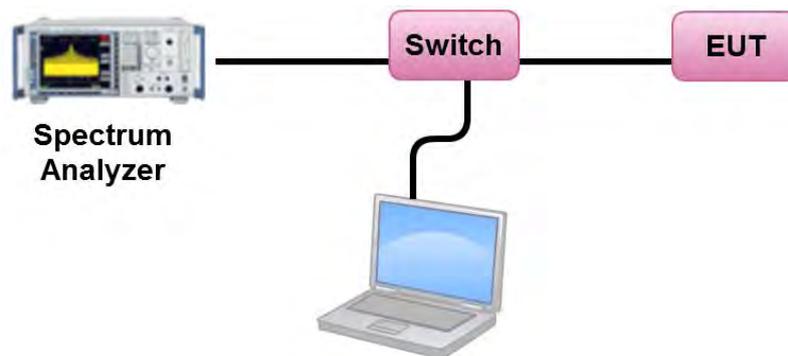

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	45%
Test Engineer	Lucas Huang	Test Date	Sep. 25, 2015

Configuration IEEE 802.11a / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	3.77	-3.01	0.76	29.64	Complies
157	5785 MHz	4.50	-3.01	1.49	29.64	Complies
165	5825 MHz	4.52	-3.01	1.51	29.64	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}}g_{j,k}\right\}^2}{N_{ANT}}\right] = 6.36\text{dBi} > 6\text{dBi}$, so limit = $30 - (6.36 - 6) = 29.64\text{dBm}/500\text{kHz}$.

Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	3.98	-3.01	0.97	29.64	Complies
157	5785 MHz	4.29	-3.01	1.28	29.64	Complies
165	5825 MHz	4.03	-3.01	1.02	29.64	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}}g_{j,k}\right\}^2}{N_{ANT}}\right] = 6.36\text{dBi} > 6\text{dBi}$, so limit = $30 - (6.36 - 6) = 29.64\text{dBm}/500\text{kHz}$.

Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
151	5755 MHz	0.72	-3.01	-2.29	29.64	Complies
159	5795 MHz	1.42	-3.01	-1.59	29.64	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}}g_{j,k}\right\}^2}{N_{ANT}}\right] = 6.36\text{dBi} > 6\text{dBi}$, so limit = $30 - (6.36 - 6) = 29.64\text{dBm}/500\text{kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	3.97	-3.01	0.96	29.64	Complies
157	5785 MHz	4.31	-3.01	1.30	29.64	Complies
165	5825 MHz	4.02	-3.01	1.01	29.64	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}}g_{j,k}\right\}^2}{N_{ANT}}\right] = 6.36\text{dBi} > 6\text{dBi}$, so limit = $30 - (6.36 - 6) = 29.64\text{dBm}/500\text{kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
151	5755 MHz	1.08	-3.01	-1.93	29.64	Complies
159	5795 MHz	1.52	-3.01	-1.49	29.64	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}}g_{j,k}\right\}^2}{N_{ANT}}\right] = 6.36\text{dBi} > 6\text{dBi}$, so limit = $30 - (6.36 - 6) = 29.64\text{dBm}/500\text{kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2


Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
155	5775 MHz	-4.34	-3.01	-7.35	29.64	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{K=1}^{N_{ANT}}g_{j,k}\right\}^2}{N_{ANT}}\right] = 6.36\text{dBi} > 6\text{dBi}$, so limit = $30 - (6.36 - 6) = 29.64\text{dBm}/500\text{kHz}$.


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 / 5825 MHz

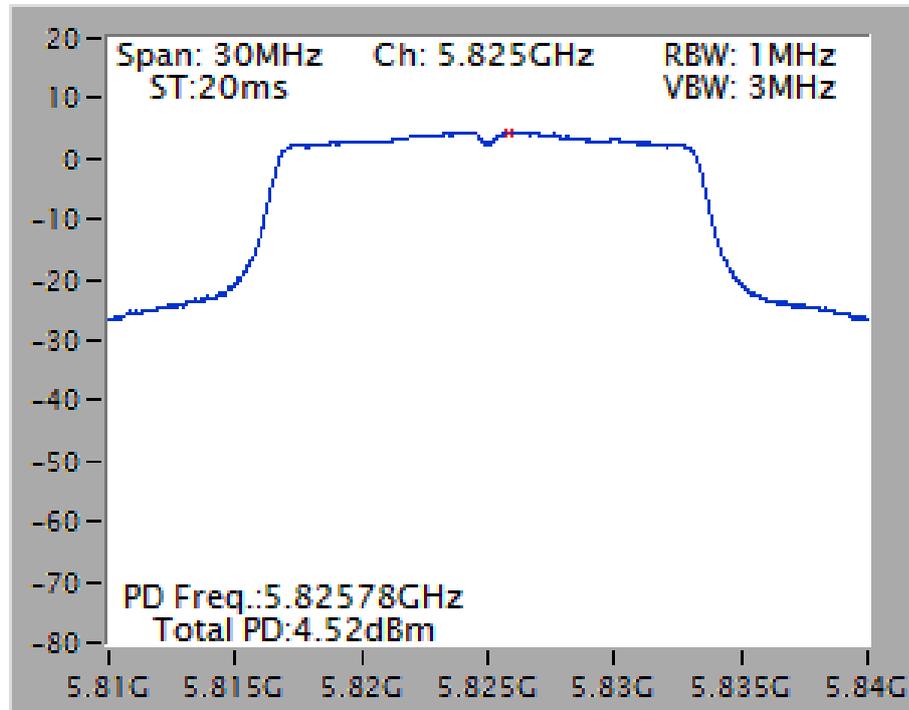


Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2 / 5785 MHz

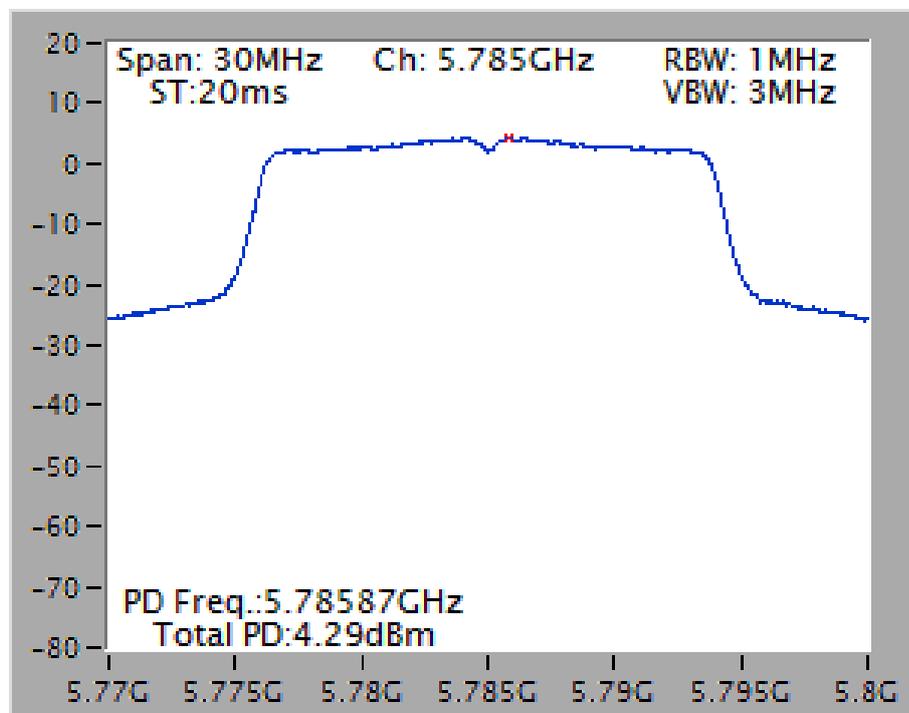


Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2 / 5795 MHz

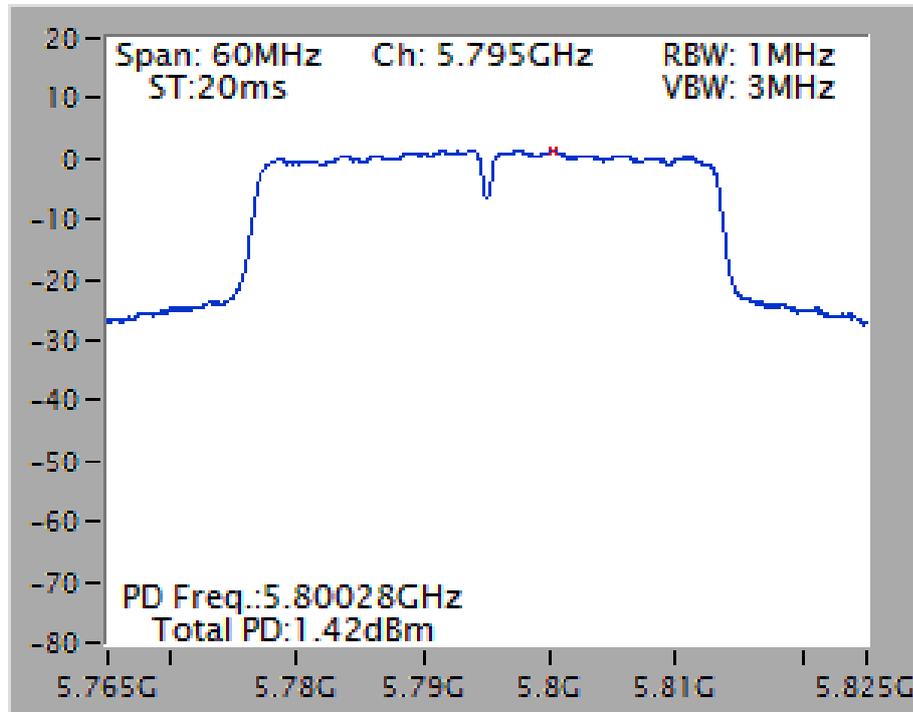


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 / 5785 MHz

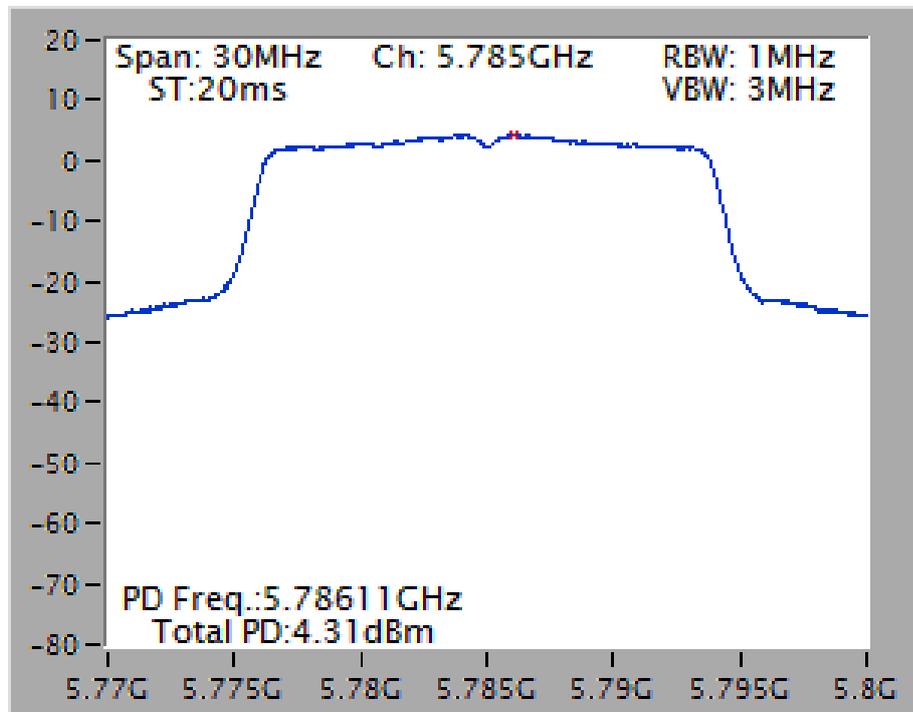

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 / 5795 MHz

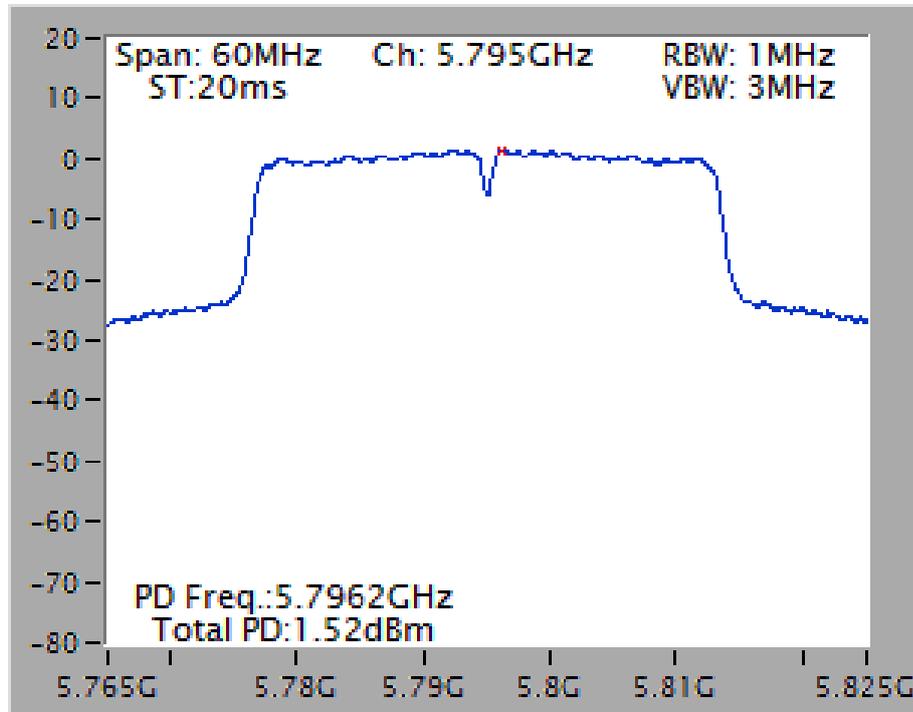

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 / 5775 MHz

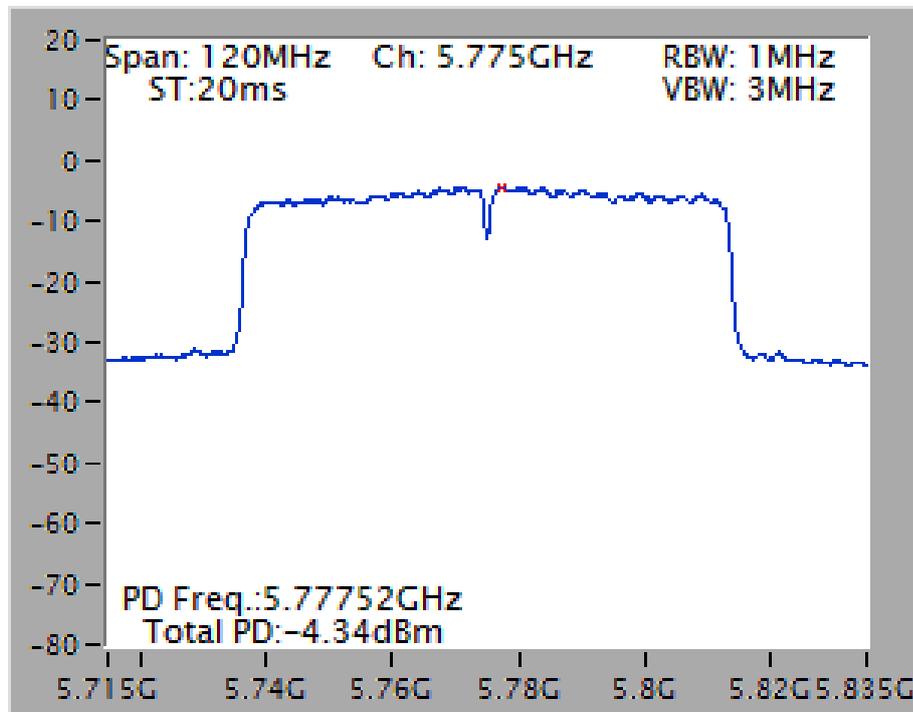

4.5. Radiated Emissions Measurement

4.5.1. Limit

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

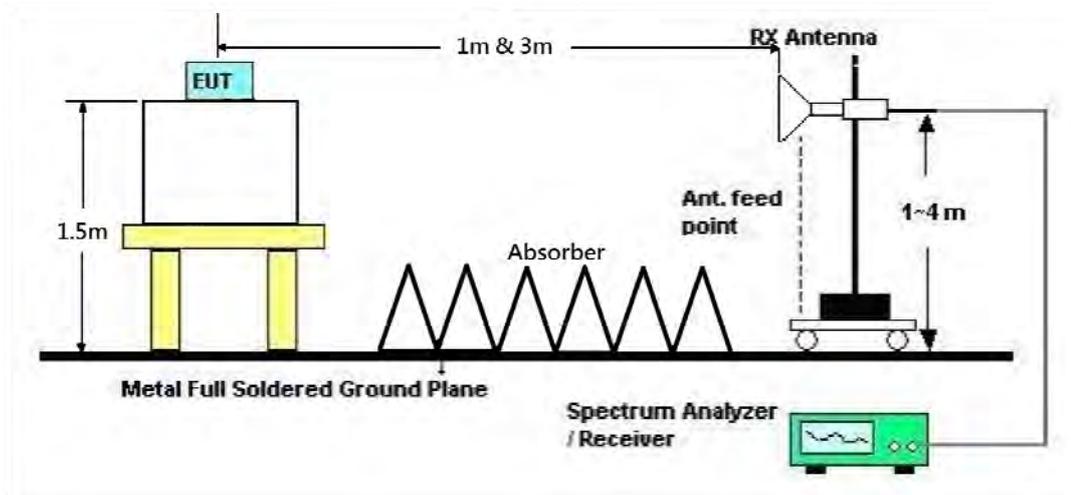

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results for Radiated Emissions (1GHz~40GHz)

Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11a CH 149 / Chain 1 + Chain 2
Test Date	Sep. 16, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11481.72	52.58	74.00	-21.42	41.97	6.53	38.70	34.62	113	151	Peak	HORIZONTAL
2	11489.72	44.06	54.00	-9.94	33.45	6.53	38.70	34.62	113	151	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11480.32	41.01	54.00	-12.99	30.40	6.53	38.70	34.62	120	131	Average	VERTICAL
2	11497.52	54.78	74.00	-19.22	44.16	6.54	38.70	34.62	120	131	Peak	VERTICAL



Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11a CH 157 / Chain 1 + Chain 2
Test Date	Sep. 16, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	11566.12	54.53	74.00	-19.47	43.91	6.55	38.71	151	130	Peak	HORIZONTAL
2	11569.22	41.40	54.00	-12.60	30.78	6.55	38.71	151	130	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	11566.60	54.49	74.00	-19.51	43.87	6.55	38.71	256	199	Peak	VERTICAL
2	11571.34	40.40	54.00	-13.60	29.79	6.55	38.71	256	199	Average	VERTICAL



Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11a CH 165 / Chain 1 + Chain 2
Test Date	Sep. 16, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	11648.12	41.93	54.00	-12.07	31.32	6.56	38.73	148	124	Average	HORIZONTAL
2	11649.74	54.45	74.00	-19.55	43.84	6.56	38.73	148	124	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	11646.44	40.88	54.00	-13.12	30.27	6.56	38.73	232	154	Average	VERTICAL
2	11646.52	52.90	74.00	-21.10	42.29	6.56	38.73	232	154	Peak	VERTICAL



Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11n MCS0 HT20 CH 149 / Chain 1 + Chain 2
Test Date	Sep. 16, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11486.28	41.57	54.00	-12.43	30.96	6.53	38.70	34.62	314	155	Average	HORIZONTAL
2	11490.84	54.37	74.00	-19.63	43.76	6.53	38.70	34.62	314	155	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11490.02	52.84	74.00	-21.16	42.23	6.53	38.70	34.62	274	185	Peak	VERTICAL
2	11490.04	40.34	54.00	-13.66	29.73	6.53	38.70	34.62	274	185	Average	VERTICAL



Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11n MCS0 HT20 CH 157 / Chain 1 + Chain 2
Test Date	Sep. 16, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11565.52	54.23	74.00	-19.77	43.61	6.55	38.71	34.64	223	101	Peak	HORIZONTAL
2	11571.52	41.38	54.00	-12.62	30.77	6.55	38.71	34.65	223	101	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11570.64	41.50	54.00	-12.50	30.89	6.55	38.71	34.65	240	147	Average	VERTICAL
2	11571.24	54.09	74.00	-19.91	43.48	6.55	38.71	34.65	240	147	Peak	VERTICAL



Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11n MCS0 HT20 CH 165 / Chain 1 + Chain 2
Test Date	Sep. 16, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11649.42	54.50	74.00	-19.50	43.89	6.56	38.73	34.68	206	179	Peak	HORIZONTAL
2	11651.00	41.83	54.00	-12.17	31.22	6.56	38.73	34.68	206	179	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11652.98	54.56	74.00	-19.44	43.95	6.56	38.73	34.68	150	150	Peak	VERTICAL
2	11653.70	41.55	54.00	-12.45	30.94	6.56	38.73	34.68	150	150	Average	VERTICAL



Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11n MCS0 HT40 CH 151 / Chain 1 + Chain 2
Test Date	Sep. 16, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11510.02	42.26	54.00	-11.74	31.64	6.54	38.70	34.62	145	148	Average	HORIZONTAL
2	11513.76	54.58	74.00	-19.42	43.96	6.54	38.70	34.62	145	148	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11506.52	54.40	74.00	-19.60	43.78	6.54	38.70	34.62	130	124	Peak	VERTICAL
2	11510.56	41.56	54.00	-12.44	30.94	6.54	38.70	34.62	130	124	Average	VERTICAL



Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11n MCS0 HT40 CH 159 / Chain 1 + Chain 2
Test Date	Sep. 16, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11589.72	53.90	74.00	-20.10	43.28	6.55	38.72	34.65	118	123	Peak	HORIZONTAL
2	11590.28	41.26	54.00	-12.74	30.64	6.55	38.72	34.65	118	123	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11589.50	54.13	74.00	-19.87	43.51	6.55	38.72	34.65	146	150	Peak	VERTICAL
2	11589.86	41.46	54.00	-12.54	30.84	6.55	38.72	34.65	146	150	Average	VERTICAL



Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Chain 1 + Chain 2
Test Date	Sep. 16, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11489.56	41.36	54.00	-12.64	30.75	6.53	38.70	34.62	187	177	Average	HORIZONTAL
2	11491.90	54.44	74.00	-19.56	43.83	6.53	38.70	34.62	187	177	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11486.66	56.38	74.00	-17.62	45.77	6.53	38.70	34.62	102	198	Peak	VERTICAL
2	11487.24	42.39	54.00	-11.61	31.78	6.53	38.70	34.62	102	198	Average	VERTICAL



Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Chain 1 + Chain 2
Test Date	Sep. 16, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11566.72	41.25	54.00	-12.75	30.63	6.55	38.71	34.64	145	137	Average	HORIZONTAL
2	11567.72	54.01	74.00	-19.99	43.39	6.55	38.71	34.64	145	137	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11567.50	41.77	54.00	-12.23	31.15	6.55	38.71	34.64	76	103	Average	VERTICAL
2	11574.98	54.69	74.00	-19.31	44.08	6.55	38.71	34.65	76	103	Peak	VERTICAL



Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Chain 1 + Chain 2
Test Date	Sep. 16, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11649.96	41.84	54.00	-12.16	31.23	6.56	38.73	34.68	60	133	Average	HORIZONTAL
2	11652.18	54.30	74.00	-19.70	43.69	6.56	38.73	34.68	60	133	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11645.06	41.79	54.00	-12.21	31.17	6.56	38.73	34.67	108	153	Average	VERTICAL
2	11647.30	55.75	74.00	-18.25	45.14	6.56	38.73	34.68	108	153	Peak	VERTICAL



Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Chain 1 + Chain 2
Test Date	Sep. 16, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11509.40	54.71	74.00	-19.29	44.09	6.54	38.70	34.62	111	169	Peak	HORIZONTAL
2	11510.76	41.92	54.00	-12.08	31.30	6.54	38.70	34.62	111	169	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11507.56	41.10	54.00	-12.90	30.48	6.54	38.70	34.62	162	149	Average	VERTICAL
2	11516.04	54.05	74.00	-19.95	43.43	6.54	38.70	34.62	162	149	Peak	VERTICAL



Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Chain 1 + Chain 2
Test Date	Sep. 16, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11586.44	40.97	54.00	-13.03	30.35	6.55	38.72	34.65	153	150	Average	HORIZONTAL
2	11592.08	53.21	74.00	-20.79	42.59	6.55	38.72	34.65	153	150	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11583.96	54.22	74.00	-19.78	43.60	6.55	38.72	34.65	206	175	Peak	VERTICAL
2	11598.76	41.19	54.00	-12.81	30.58	6.55	38.72	34.66	206	175	Average	VERTICAL



Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 1 + Chain 2
Test Date	Sep. 16, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11549.36	53.73	74.00	-20.27	43.11	6.55	38.71	34.64	252	237	Peak	HORIZONTAL
2	11549.60	40.94	54.00	-13.06	30.32	6.55	38.71	34.64	252	237	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11540.72	52.93	74.00	-21.07	42.31	6.54	38.71	34.63	211	190	Peak	VERTICAL
2	11547.64	40.87	54.00	-13.13	30.26	6.54	38.71	34.64	211	190	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11a CH 149, 157, 165 / Chain 1 + Chain 2
Test Date	Sep. 15, 2015		

Channel 149

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5714.80	59.58	68.20	-8.62	55.08	4.49	34.52	34.51	296	193 Peak	HORIZONTAL
2	5724.80	71.69	78.20	-6.51	67.13	4.50	34.57	34.51	296	193 Peak	HORIZONTAL
3	5746.20	99.47			94.87	4.50	34.62	34.52	296	193 Average	HORIZONTAL
4	5746.40	108.67			104.07	4.50	34.62	34.52	296	193 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5713.80	57.73	68.20	-10.47	53.23	4.49	34.52	34.51	294	172 Peak	HORIZONTAL
2	5723.00	58.99	78.20	-19.21	54.43	4.50	34.57	34.51	294	172 Peak	HORIZONTAL
3	5783.40	100.79			96.07	4.52	34.73	34.53	294	172 Average	HORIZONTAL
4	5784.20	110.03			105.31	4.52	34.73	34.53	294	172 Peak	HORIZONTAL
5	5853.60	59.90	78.20	-18.30	54.90	4.55	34.99	34.54	294	172 Peak	HORIZONTAL
6	5876.60	59.06	68.20	-9.14	54.01	4.55	35.04	34.54	294	172 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5826.20	100.55			95.67	4.53	34.88	34.53	292	188 Average	HORIZONTAL
2	5827.40	109.57			104.69	4.53	34.88	34.53	292	188 Peak	HORIZONTAL
3	5850.40	65.04	78.20	-13.16	60.11	4.54	34.93	34.54	292	188 Peak	HORIZONTAL
4	5863.80	59.06	68.20	-9.14	54.06	4.55	34.99	34.54	292	188 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11n MCS0 HT20 CH 149, 157, 165 / Chain 1 + Chain 2
Test Date	Sep. 15, 2015		

Channel 149

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5712.80	60.23	68.20	-7.97	55.73	4.49	34.52	34.51	356	172 Peak	HORIZONTAL
2	5724.60	77.33	78.20	-0.87	72.77	4.50	34.57	34.51	356	172 Peak	HORIZONTAL
3	5745.40	111.48			106.88	4.50	34.62	34.52	356	172 Peak	HORIZONTAL
4	5745.60	101.82			97.22	4.50	34.62	34.52	356	172 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5712.60	58.48	68.20	-9.72	53.98	4.49	34.52	34.51	290	190 Peak	HORIZONTAL
2	5724.60	57.51	78.20	-20.69	52.95	4.50	34.57	34.51	290	190 Peak	HORIZONTAL
3	5784.20	110.33			105.61	4.52	34.73	34.53	290	190 Peak	HORIZONTAL
4	5784.60	100.74			96.02	4.52	34.73	34.53	290	190 Average	HORIZONTAL
5	5851.20	59.65	78.20	-18.55	54.72	4.54	34.93	34.54	290	190 Peak	HORIZONTAL
6	5861.60	58.22	68.20	-9.98	53.22	4.55	34.99	34.54	290	190 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5824.00	110.56			105.68	4.53	34.88	34.53	291	187 Peak	HORIZONTAL
2	5825.60	101.07			96.19	4.53	34.88	34.53	291	187 Average	HORIZONTAL
3	5850.00	64.64	78.20	-13.56	59.71	4.54	34.93	34.54	291	187 Peak	HORIZONTAL
4	5860.40	59.81	68.20	-8.39	54.81	4.55	34.99	34.54	291	187 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5825 MHz.



Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11n MCS0 HT40 CH 151, 159 / Chain 1 + Chain 2
Test Date	Aug. 24, 2015 / Sep. 15, 2015		

Channel 151

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5715.00	64.45	68.20	-3.75	59.95	4.49	34.52	34.51	8	217 Peak	HORIZONTAL
2	5723.80	70.97	78.20	-7.23	66.41	4.50	34.57	34.51	8	217 Peak	HORIZONTAL
3	5753.00	101.29			96.62	4.51	34.68	34.52	8	217 Peak	HORIZONTAL
4	5753.40	91.43			86.76	4.51	34.68	34.52	8	217 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5755 MHz.

Channel 159

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5713.80	58.21	68.20	-9.99	53.71	4.49	34.52	34.51	168	148 Peak	VERTICAL
2	5723.40	58.20	78.20	-20.00	53.64	4.50	34.57	34.51	168	148 Peak	VERTICAL
3	5793.00	96.31			91.54	4.52	34.78	34.53	168	148 Peak	VERTICAL
4	5793.40	86.87			82.10	4.52	34.78	34.53	168	148 Average	VERTICAL
5	5850.00	57.17	78.20	-21.03	52.24	4.54	34.93	34.54	168	148 Peak	VERTICAL
6	5862.80	58.79	68.20	-9.41	53.79	4.55	34.99	34.54	168	148 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5795 MHz.

Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149, 157, 165 / Chain 1 + Chain 2
Test Date	Sep. 15, 2015		

Channel 149

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5708.80	58.93	68.20	-9.27	54.43	4.49	34.52	34.51	301	183 Peak	HORIZONTAL
2	5724.80	71.91	78.20	-6.29	67.35	4.50	34.57	34.51	301	183 Peak	HORIZONTAL
3	5744.20	107.56			102.96	4.50	34.62	34.52	301	183 Peak	HORIZONTAL
4	5745.60	98.01			93.41	4.50	34.62	34.52	301	183 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5711.80	57.11	68.20	-11.09	52.61	4.49	34.52	34.51	168	167 Peak	VERTICAL
2	5724.60	56.35	78.20	-21.85	51.79	4.50	34.57	34.51	168	167 Peak	VERTICAL
3	5784.20	97.62			92.90	4.52	34.73	34.53	168	167 Peak	VERTICAL
4	5785.80	88.46			83.69	4.52	34.78	34.53	168	167 Average	VERTICAL
5	5850.40	57.43	78.20	-20.77	52.50	4.54	34.93	34.54	168	167 Peak	VERTICAL
6	5860.00	58.02	68.20	-10.18	53.02	4.55	34.99	34.54	168	167 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5825.40	110.60			105.72	4.53	34.88	34.53	301	180 Peak	HORIZONTAL
2	5825.60	100.93			96.05	4.53	34.88	34.53	301	180 Average	HORIZONTAL
3	5850.00	65.60	78.20	-12.60	60.67	4.54	34.93	34.54	301	180 Peak	HORIZONTAL
4	5867.40	59.48	68.20	-8.72	54.48	4.55	34.99	34.54	301	180 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151, 159 / Chain 1 + Chain 2
Test Date	Aug. 24, 2015 / Sep. 15, 2015		

Channel 151

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5715.00	66.75	68.20	-1.45	62.25	4.49	34.52	34.51	4	242 Peak	HORIZONTAL
2	5723.40	72.86	78.20	-5.34	68.30	4.50	34.57	34.51	4	242 Peak	HORIZONTAL
3	5753.00	102.71			98.04	4.51	34.68	34.52	4	242 Peak	HORIZONTAL
4	5753.40	92.80			88.13	4.51	34.68	34.52	4	242 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5755 MHz.

Channel 159

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	5715.00	59.11	68.20	-9.09	54.61	4.49	34.52	34.51	290	187 Peak	HORIZONTAL
2	5725.00	58.43	78.20	-19.77	53.87	4.50	34.57	34.51	290	187 Peak	HORIZONTAL
3	5793.00	107.19			102.42	4.52	34.78	34.53	290	187 Peak	HORIZONTAL
4	5793.40	97.48			92.71	4.52	34.78	34.53	290	187 Average	HORIZONTAL
5	5850.00	59.29	78.20	-18.91	54.36	4.54	34.93	34.54	290	187 Peak	HORIZONTAL
6	5862.40	59.75	68.20	-8.45	54.75	4.55	34.99	34.54	290	187 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5795 MHz.



Temperature	23.1°C	Humidity	60%
Test Engineer	Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 1 + Chain 2
Test Date	Aug. 24, 2015 / Sep. 15, 2015		

Channel 155

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5715.00	68.14	68.20	-0.06	63.64	4.49	34.52	34.51	360	239	Peak	HORIZONTAL
2	5724.00	70.57	78.20	-7.63	66.01	4.50	34.57	34.51	360	239	Peak	HORIZONTAL
3	5773.00	89.88			85.16	4.52	34.73	34.53	360	239	Average	HORIZONTAL
4	5780.00	100.51			95.79	4.52	34.73	34.53	360	239	Peak	HORIZONTAL
5	5851.00	64.80	78.20	-13.40	59.87	4.54	34.93	34.54	360	239	Peak	HORIZONTAL
6	5860.00	61.27	68.20	-6.93	56.27	4.55	34.99	34.54	360	239	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5775 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.7. Frequency Stability Measurement

4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
7. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
8. Extreme temperature is $-20^\circ\text{C} \sim 50^\circ\text{C}$.

4.7.4. Test Setup Layout

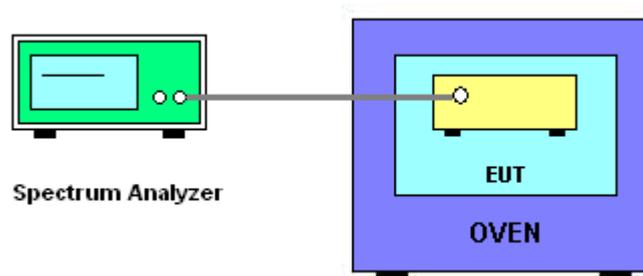

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.7.7. Test Result of Frequency Stability

Temperature	25°C	Humidity	45%
Test Engineer	Lucas Huang	Test Date	Sep. 25, 2015

Mode: 20 MHz / Chain 1

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5785.0137	5785.0123	5785.0105	5785.0084
110.00	5785.0125	5785.0112	5785.0096	5785.0077
93.50	5785.0111	5785.0100	5785.0088	5785.0066
Max. Deviation (MHz)	0.0137	0.0123	0.0105	0.0084
Max. Deviation (ppm)	2.37	2.13	1.82	1.45
Result	Complies			

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5785.0179	5785.0166	5785.0149	5785.0125
-10	5785.0164	5785.0152	5785.0136	5785.0117
0	5785.0150	5785.0138	5785.0119	5785.0097
10	5785.0137	5785.0124	5785.0109	5785.0091
20	5785.0125	5785.0112	5785.0096	5785.0077
30	5785.0111	5785.0100	5785.0086	5785.0070
40	5785.0095	5785.0080	5785.0064	5785.0044
50	5785.0078	5785.0066	5785.0051	5785.0024
Max. Deviation (MHz)	0.0179	0.0166	0.0149	0.0125
Max. Deviation (ppm)	3.09	2.87	2.58	2.16
Result	Complies			

Mode: 40 MHz / Chain 1

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5755.0226	5755.0212	5755.0194	5755.0173
110.00	5755.0214	5755.0201	5755.0185	5755.0166
93.50	5755.0200	5755.0189	5755.0177	5755.0155
Max. Deviation (MHz)	0.0226	0.0212	0.0194	0.0173
Max. Deviation (ppm)	3.93	3.68	3.37	3.01
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5755.0268	5755.0255	5755.0238	5755.0214
-10	5755.0253	5755.0241	5755.0225	5755.0206
0	5755.0239	5755.0227	5755.0208	5755.0186
10	5755.0226	5755.0213	5755.0198	5755.0180
20	5755.0214	5755.0201	5755.0185	5755.0166
30	5755.0200	5755.0189	5755.0175	5755.0159
40	5755.0184	5755.0169	5755.0153	5755.0133
50	5755.0167	5755.0155	5755.0140	5755.0113
Max. Deviation (MHz)	0.0268	0.0255	0.0238	0.0214
Max. Deviation (ppm)	4.66	4.43	4.14	3.72
Result	Complies			

Mode: 80 MHz / Chain 1

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5775 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5775.0277	5775.0263	5775.0245	5775.0224
110.00	5775.0265	5775.0252	5775.0236	5775.0217
93.50	5775.0251	5775.0240	5775.0228	5775.0206
Max. Deviation (MHz)	0.0277	0.0263	0.0245	0.0224
Max. Deviation (ppm)	4.80	4.55	4.24	3.88
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5775 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5775.0322	5775.0309	5775.0292	5775.0268
-10	5775.0307	5775.0295	5775.0279	5775.0260
0	5775.0293	5775.0281	5775.0262	5775.0240
10	5775.0280	5775.0267	5775.0252	5775.0234
20	5775.0265	5775.0255	5775.0239	5775.0220
30	5775.0254	5775.0243	5775.0229	5775.0213
40	5775.0238	5775.0223	5775.0207	5775.0187
50	5775.0221	5775.0209	5775.0194	5775.0167
Max. Deviation (MHz)	0.0322	0.0309	0.0292	0.0268
Max. Deviation (ppm)	5.58	5.35	5.06	4.64
Result	Complies			

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%