



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	NETGEAR, Inc.
Applicant Address	350 East Plumeria Drive, San Jose, California 95134, USA
FCC ID	PY314300288

Product Name	AC2350 Smart WiFi Router
Brand Name	NETGEAR
Model No.	R7500
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Mar. 30, 2014
Final Test Date	Jul. 28, 2014
Submission Type	Original Equipment
Operating Mode	Master

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units	9
3.8. Table for Parameters of Test Software Setting	10
3.9. EUT Operation during Test	11
3.10. Duty Cycle.....	11
3.11. Test Configurations	12
4. TEST RESULT	15
4.1. AC Power Line Conducted Emissions Measurement.....	15
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	19
4.3. Maximum Conducted Output Power Measurement.....	30
4.4. Power Spectral Density Measurement	33
4.5. Radiated Emissions Measurement	43
4.6. Band Edge Emissions Measurement	66
4.7. Frequency Stability Measurement	75
4.8. Antenna Requirements	77
5. LIST OF MEASURING EQUIPMENTS	78
6. MEASUREMENT UNCERTAINTY.....	80
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT	C1 ~ C3




History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR433001-03AB	Rev. 01	Initial issue of report	Jul. 31, 2014

1. CERTIFICATE OF COMPLIANCE

Product Name : AC2350 Smart WiFi Router
Brand Name : NETGEAR
Model No. : R7500
Applicant : NETGEAR, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 30, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

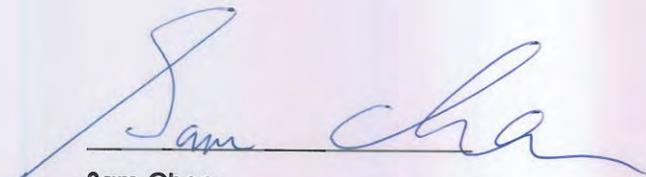

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	15.04 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.32 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.29 dB
4.5	15.407(b)	Radiated Emissions	Complies	0.51 dB
4.6	15.407(b)	Band Edge Emissions	Complies	0.11 dB
4.7	15.407(g)	Frequency Stability	Complies	-
4.8	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (4TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	For non-beamforming mode: 802.11ac MCS0/Nss1 (VHT20): 19.04 MHz ; 802.11ac MCS0/Nss1 (VHT40): 36.80 MHz ; 802.11ac MCS0/Nss1 (VHT80): 74.24 MHz For beamforming mode: 802.11ac MCS0/Nss1 (VHT20): 18.24 MHz ; 802.11ac MCS0/Nss1 (VHT40): 36.48 MHz ; 802.11ac MCS0/Nss1 (VHT80): 75.52 MHz
Maximum Conducted Output Power	For non-beamforming mode: 802.11ac MCS0/Nss1 (VHT20): 27.39 dBm ; 802.11ac MCS0/Nss1 (VHT40): 28.80 dBm ; 802.11ac MCS0/Nss1 (VHT80): 19.85 dBm For beamforming mode: 802.11ac MCS0/Nss1 (VHT20): 27.39 dBm ; 802.11ac MCS0/Nss1 (VHT40): 27.35 dBm ; 802.11ac MCS0/Nss1 (VHT80): 20.51 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a

Items	Description
Product Type	WLAN (4TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250MHz
Channel Number	4
Channel Band Width (99%)	20.64 MHz
Maximum Conducted Output Power	28.17 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input checked="" type="checkbox"/> With beamforming	<input type="checkbox"/> Without beamforming

Note: The product has beamforming function for 802.11ac VHT20/40/80 in 5150-5250MHz and 5725-5850MHz.

Antenna and Band width

Antenna	Four (TX)		
	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	4	MCS 0-31
802.11n (HT40)	4	MCS 0-31
802.11ac (VHT20)	4	MCS 0-9/Nss1-4
802.11ac (VHT40)	4	MCS 0-9/Nss1-4
802.11ac (VHT80)	4	MCS 0-9/Nss1-4

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

Power	Brand	Model No.	P/N	Rating
Adapter 1	NETGEAR	AD898F20	332-10613-01	Input: 100-240Vac, 50/60Hz, 1.0A Output: 12Vdc, 3.5A
Adapter 2	LEI	MU42-1120350-A1	332-10728-01	Input: 100-240Vac, 50/60Hz, 1.5A Output: 12Vdc, 3.5A

3.3. Table for Filed Antenna

Ant.	Brand	Model No.	Antenna Type	Connector
1	NETGEAR	R7500	Dipole Antenna	Reversed-SMA

Note: The EUT has four external antennas.

2.4GHz Band			
Frequency	Gain (dBi)	Frequency	Gain (dBi)
2412 MHz	0.9	2452 MHz	0.9
2422 MHz	1.1	2462 MHz	0.8
2437 MHz	1.1	-	-

5GHz Band 1		5GHz Band 4	
Frequency	Gain (dBi)	Frequency	Gain (dBi)
5180 MHz	2.0	5745 MHz	3.0
5190 MHz	2.1	5755 MHz	3.0
5200 MHz	2.1	5775 MHz	2.9
5210 MHz	2.2	5785 MHz	2.9
5230 MHz	2.3	5795 MHz	3.0
5240 MHz	2.3	5825 MHz	3.0


Note:

For 2.4GHz Band (3TX/3RX)

Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

For 5GHz Band (4TX/4RX)

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

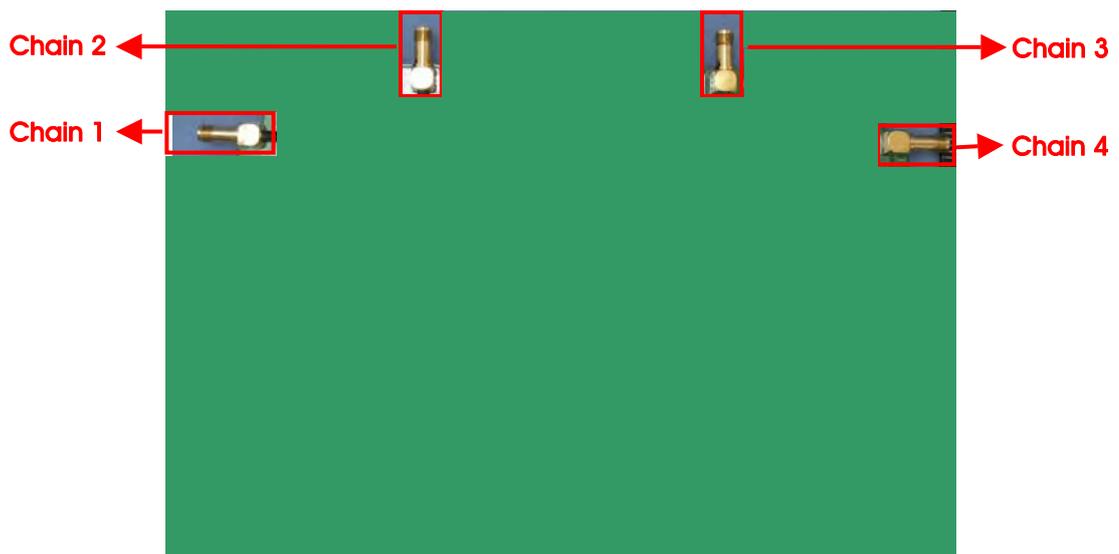

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain	
AC Power Conducted Emission	CTX	-	-	-	
Max. Conducted Output Power	Non-beamforming Mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	Beamforming Mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
	Power Spectral Density	Non-beamforming Mode			
11ac VHT20		Band 1	MCS0/Nss1	36/40/48	1+2+3+4
11ac VHT40		Band 1	MCS0/Nss1	38/46	1+2+3+4
11ac VHT80		Band 1	MCS0/Nss1	42	1+2+3+4
11a/BPSK		Band 1	6Mbps	36/40/48	1+2+3+4
Beamforming Mode					
11ac VHT20		Band 1	MCS0/Nss1	36/40/48	1+2+3+4
11ac VHT40		Band 1	MCS0/Nss1	38/46	1+2+3+4
11ac VHT80		Band 1	MCS0/Nss1	42	1+2+3+4
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement		Non-beamforming Mode			
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	Beamforming Mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4

Radiated Emission Below 1GHz	CTX	-	-	-	
Radiated Emission Above 1GHz	Non-beamforming Mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	Beamforming Mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
Band Edge Emission	Non-beamforming Mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	Beamforming Mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
Frequency Stability	Un-modulation	-	40	1+2+3+4	

Note: VHT20/VHT40 covers HT20/HT40, due to same modulation.

The following test modes were performed for all tests:

For AC Power Line Conducted Emissions test:

Mode 1. EUT + Adapter 1

Mode 2. EUT + Adapter 2

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission below 1GHz test:

Mode 1. EUT laying + Adapter 1

Mode 2. EUT standing + Adapter 1

Mode 1 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3 will follow this same test mode.

Mode 3. EUT laying + Adapter 2

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission above 1GHz and Radiated Emission Co-location tests:

There are two modes of EUT, one is laying, and the other is standing.

Laying has been evaluated to be the worst case after evaluating.

Consequently, measurement for Radiated Emission above 1GHz and Radiated Emission Co-location tests will follow this same test mode.

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units
Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC

Test Site No: 03CH01-CB (below 1GHz)

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC

Test Site No: 03CH01-CB (above 1GHz)
For non-beamforming Mode:

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC

For beamforming Mode:

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
NB	DELL	M1330	DoC
WiFi USB Adapter	NETGEAR	A6200	PY312200200

Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6220	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For non-beamforming mode:

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	DOS		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0/Nss1 VHT20	19	20	20

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	DOS	
Frequency	5190 MHz	5230 MHz
MCS0/Nss1 VHT40	15	23

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	DOS
Frequency	5210 MHz
MCS0/Nss1 VHT80	15

Power Parameters of IEEE 802.11a

Test Software Version	DOS		
Frequency	5180 MHz	5200 MHz	5240 MHz
802.11a	21	21	21

For beamforming mode:

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	DOS		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0/Nss1 VHT20	20	20	20

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	DOS	
Frequency	5190 MHz	5230 MHz
MCS0/Nss1 VHT40	14	20

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	DOS
Frequency	5210 MHz
MCS0/Nss1 VHT80	13

3.9. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by WiFi USB
Adapte and transmit duty cycle no less 98%


3.10. Duty Cycle

Mode	On Time(ms)	On+Off Time(ms)	Duty Cycle(%)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	5.000	5.040	99.21	0.01
802.11ac MCS0/Nss1 VHT40	2.430	2.480	97.98	0.41
802.11ac MCS0/Nss1 VHT80	1.146	1.188	96.46	0.87
802.11a	5.300	5.420	97.79	0.19

3.11. Test Configurations

3.11.1. AC Power Line Conduction Emissions and Radiation Emissions Below 1GHz Test Configuration


Test Mode: Mode 1

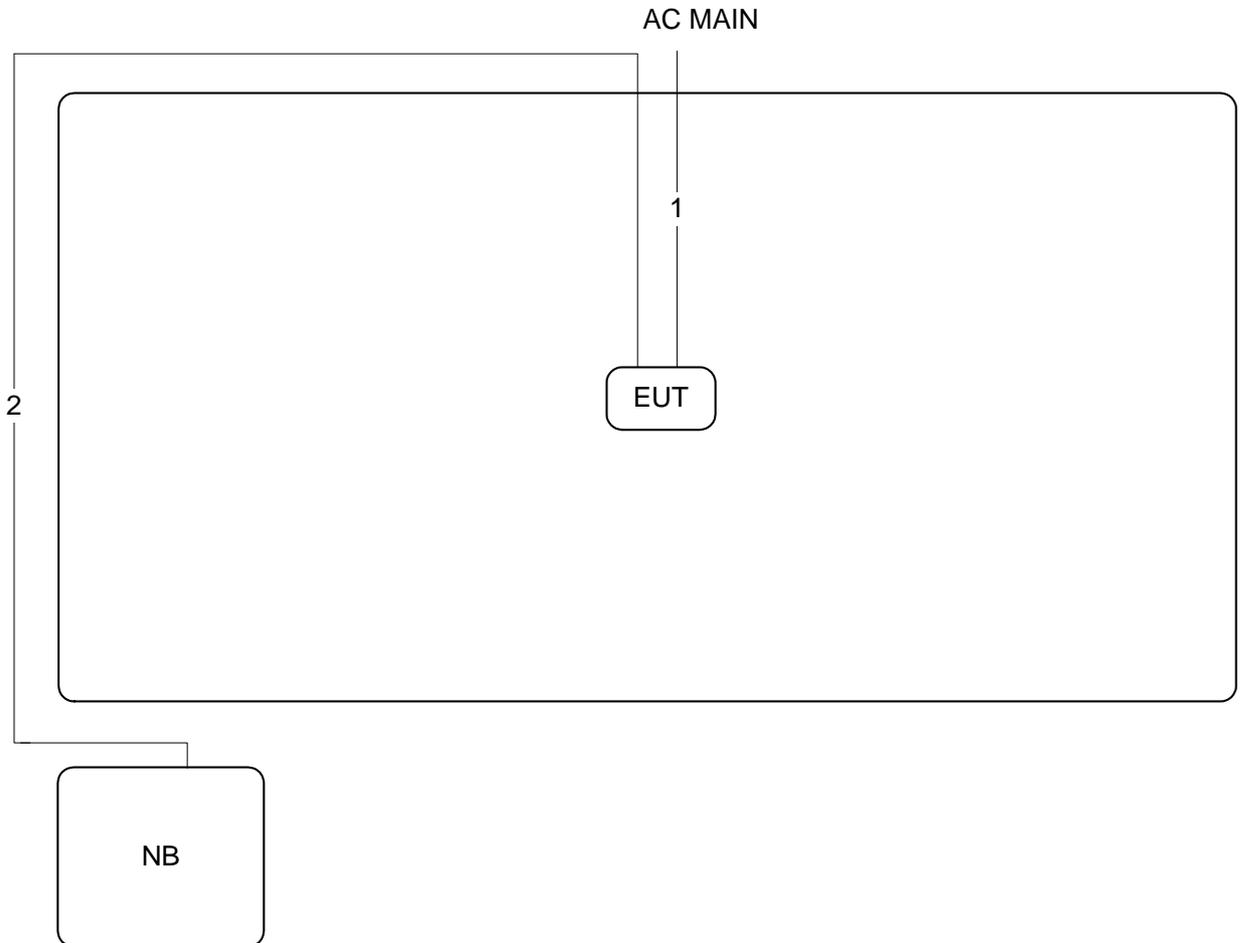

Item	Connection	Shielded	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m


3.11.2. Radiation Emissions Above 1GHz Test Configuration

For non-beamforming mode:

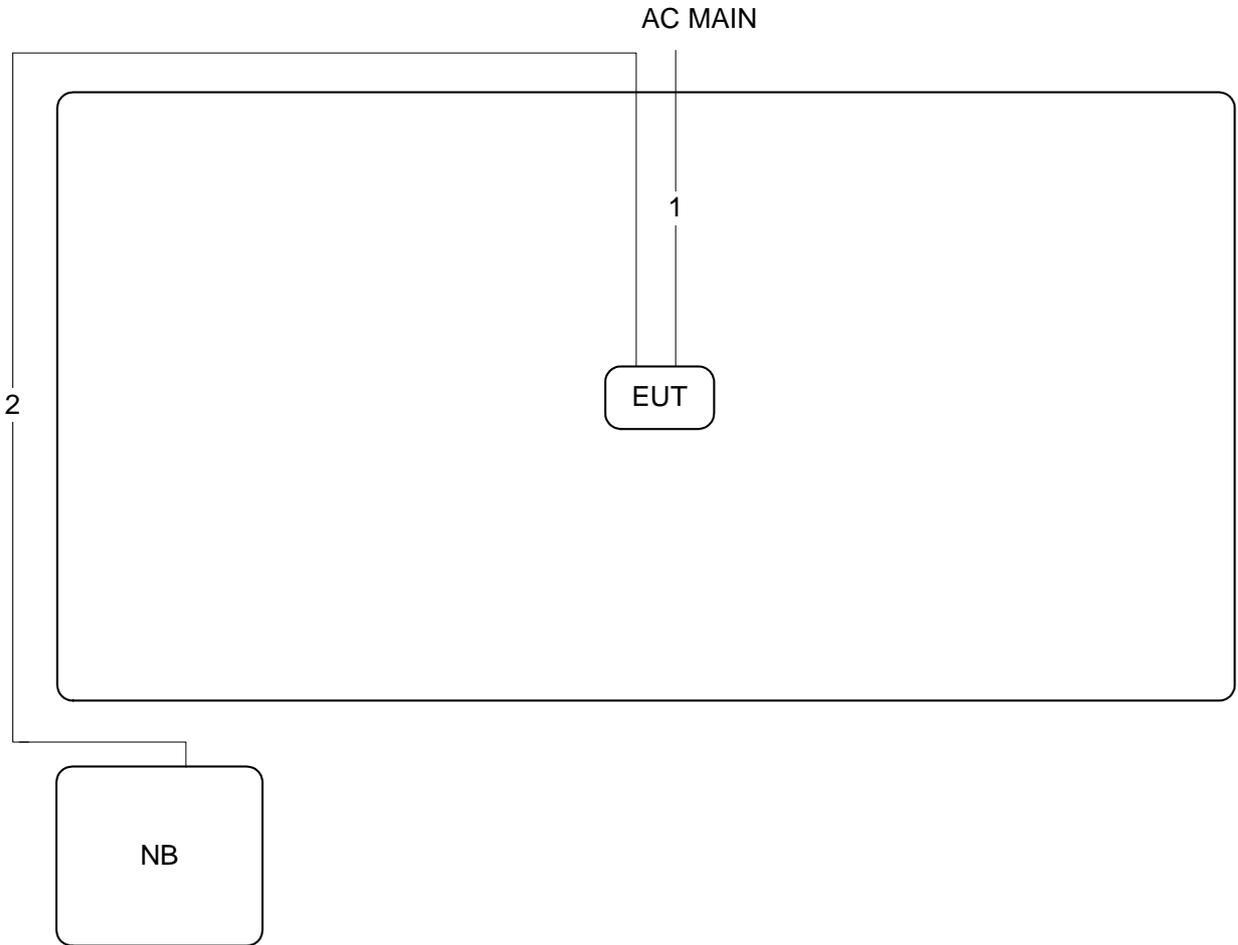

Item	Connection	Shielded	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m

For beamforming mode:

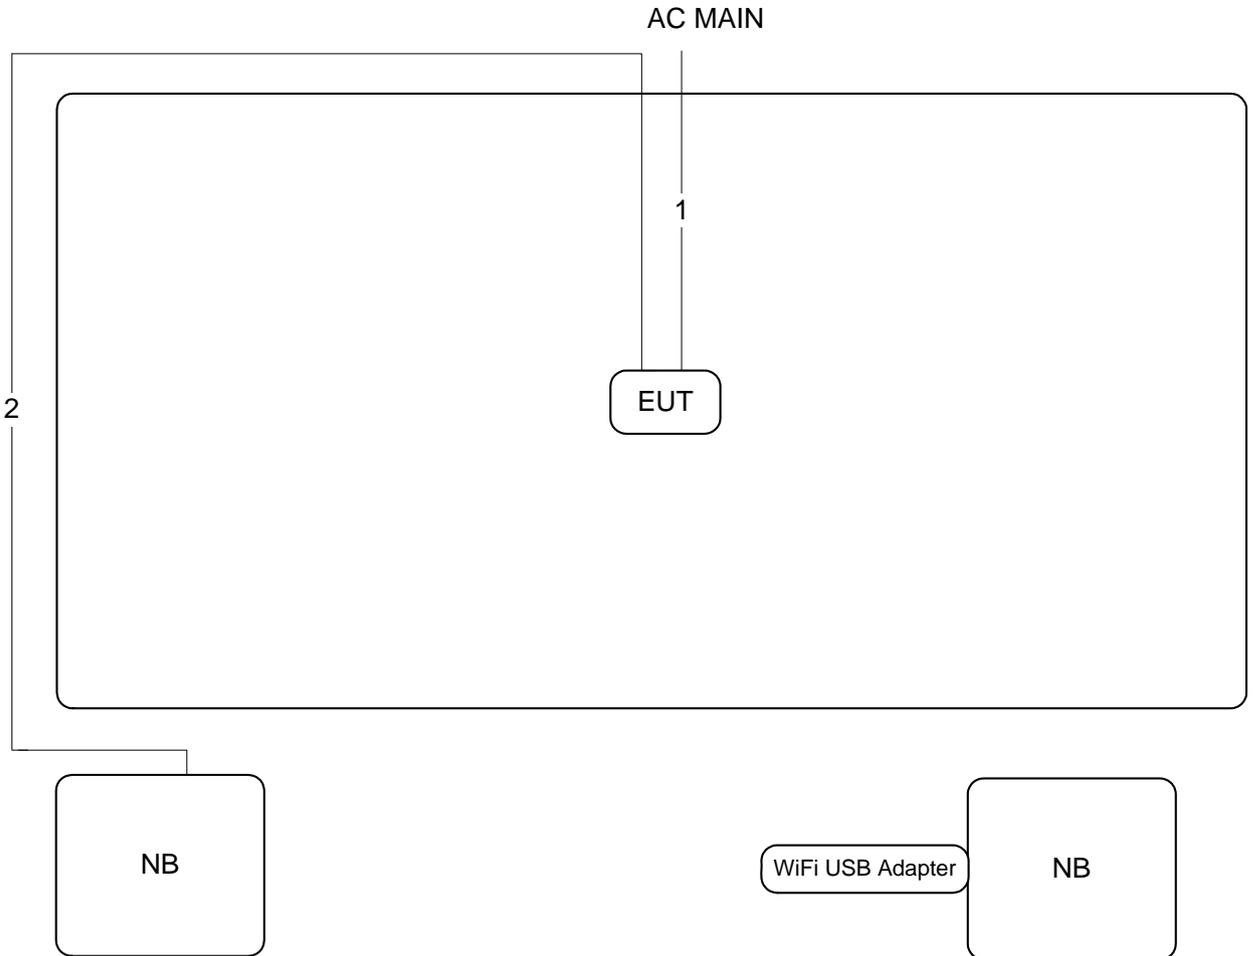

Item	Connection	Shielded	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

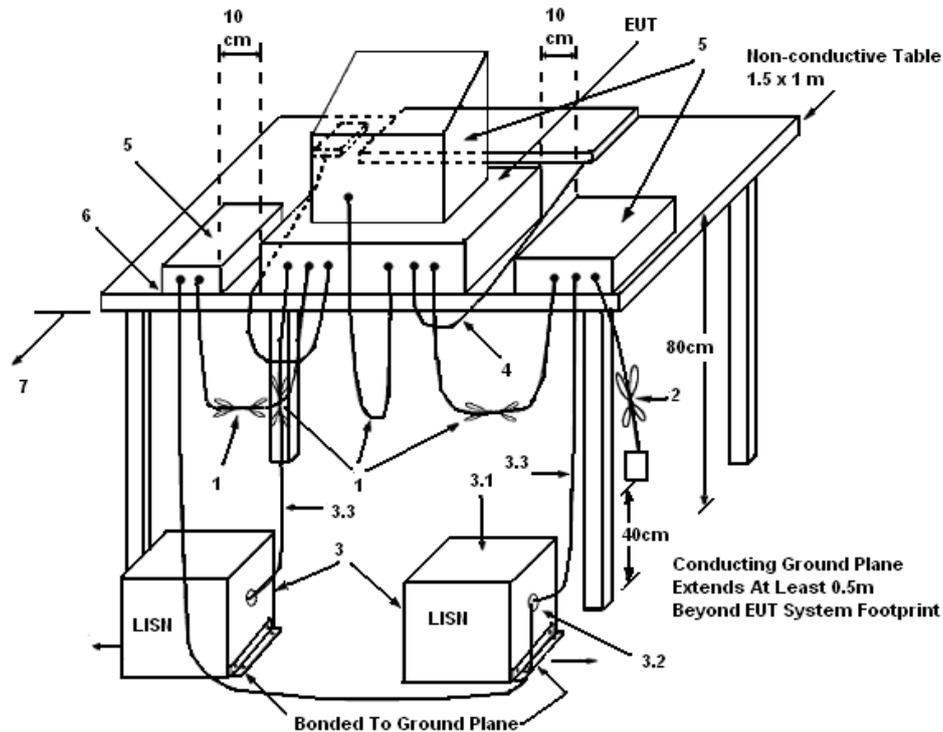

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	51%
Test Engineer	Parody Lin	Phase	Line
Configuration	CTX	Test Mode	Mode 1

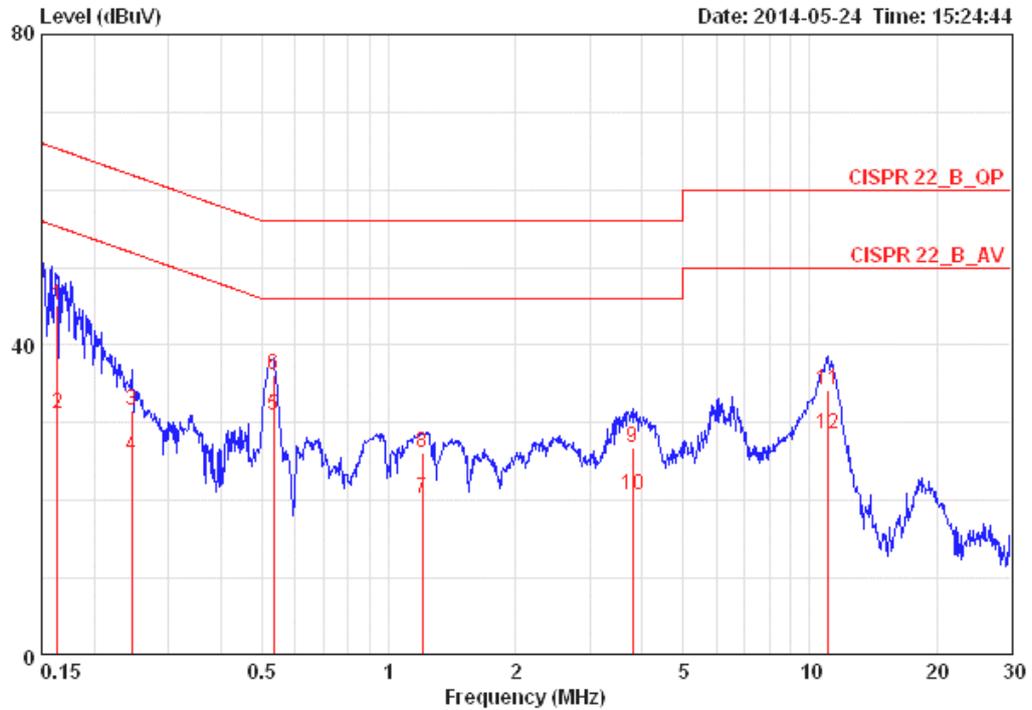

	Freq	Level	Over Limit	Limit Line	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.16327	45.15	-20.15	65.30	0.08	44.91	0.16	LINE	QP
2	0.16327	31.28	-24.02	55.30	0.08	31.04	0.16	LINE	AVERAGE
3	0.24552	31.50	-30.41	61.91	0.08	31.25	0.17	LINE	QP
4	0.24552	25.71	-26.20	51.91	0.08	25.46	0.17	LINE	AVERAGE
5	0.53215	30.96	-15.04	46.00	0.08	30.69	0.19	LINE	AVERAGE
6	0.53215	36.21	-19.79	56.00	0.08	35.94	0.19	LINE	QP
7	1.203	20.27	-25.73	46.00	0.10	19.96	0.21	LINE	AVERAGE
8	1.203	26.24	-29.76	56.00	0.10	25.93	0.21	LINE	QP
9	3.799	26.78	-29.22	56.00	0.15	26.34	0.30	LINE	QP
10	3.799	20.63	-25.37	46.00	0.15	20.19	0.30	LINE	AVERAGE
11	11.080	34.23	-25.77	60.00	0.27	33.57	0.39	LINE	QP
12	11.080	28.61	-21.39	50.00	0.27	27.95	0.39	LINE	AVERAGE

Temperature	24°C	Humidity	51%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	CTX	Test Mode	Mode 1

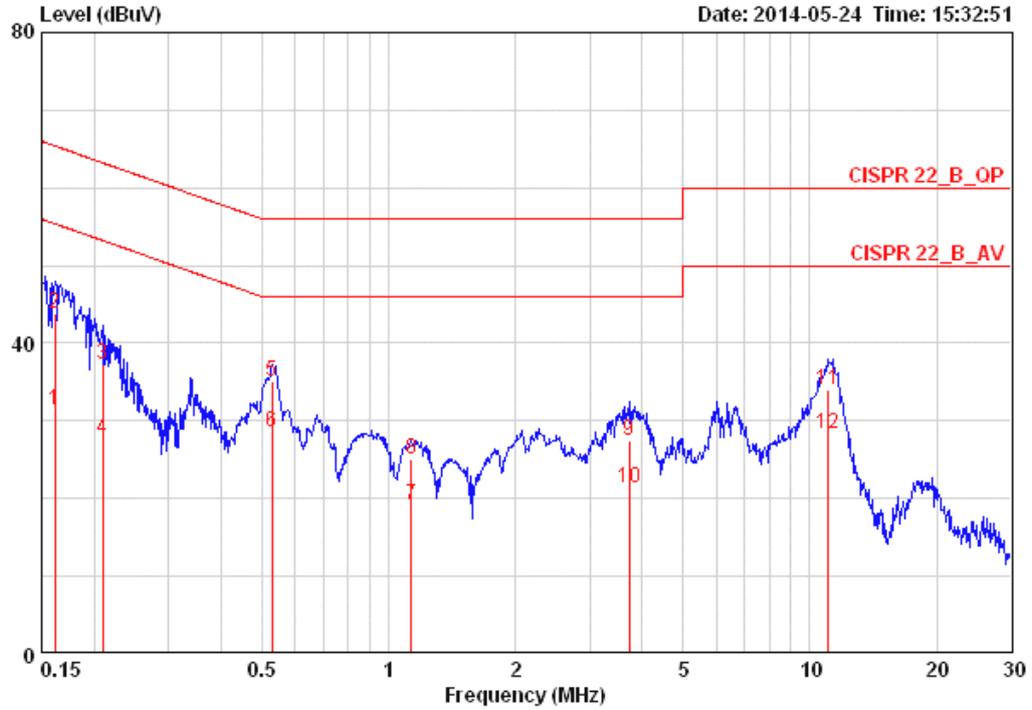

	Freq	Level	Over Limit	Limit Line	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.16155	31.34	-24.04	55.38	0.08	31.10	0.16	NEUTRAL	AVERAGE
2	0.16155	43.91	-21.47	65.38	0.08	43.67	0.16	NEUTRAL	QP
3	0.20944	37.27	-25.96	63.23	0.08	37.02	0.17	NEUTRAL	QP
4	0.20944	27.72	-25.51	53.23	0.08	27.47	0.17	NEUTRAL	AVERAGE
5	0.52934	35.12	-20.88	56.00	0.09	34.84	0.19	NEUTRAL	QP
6	0.52934	28.59	-17.41	46.00	0.09	28.31	0.19	NEUTRAL	AVERAGE
7	1.129	19.26	-26.74	46.00	0.09	18.96	0.21	NEUTRAL	AVERAGE
8	1.129	25.04	-30.96	56.00	0.09	24.74	0.21	NEUTRAL	QP
9	3.720	27.54	-28.46	56.00	0.15	27.09	0.29	NEUTRAL	QP
10	3.720	21.32	-24.68	46.00	0.15	20.87	0.29	NEUTRAL	AVERAGE
11	11.080	34.03	-25.97	60.00	0.27	33.37	0.39	NEUTRAL	QP
12	11.080	28.42	-21.58	50.00	0.27	27.76	0.39	NEUTRAL	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Deviation

There is no deviation with the original standard.

4.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.6. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

For non-beamforming mode:

Temperature	20°C	Humidity	53%
Test Engineer	Magic Lai / Robert Chang	Configurations	IEEE 802.11ac/a

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	23.84	19.04
40	5200 MHz	23.20	18.72
48	5240 MHz	30.88	18.40

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	38.40	34.24
46	5230 MHz	69.44	36.80

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	78.72	74.24

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	25.76	20.64
40	5200 MHz	25.44	19.84
48	5240 MHz	24.80	19.68

For beamforming mode:

Temperature	20°C	Humidity	53%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	24.48	18.24
40	5200 MHz	24.32	18.24
48	5240 MHz	23.84	18.08

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	40.00	36.48
46	5230 MHz	40.32	36.48

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	80.64	75.52


For non-beamforming mode:

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

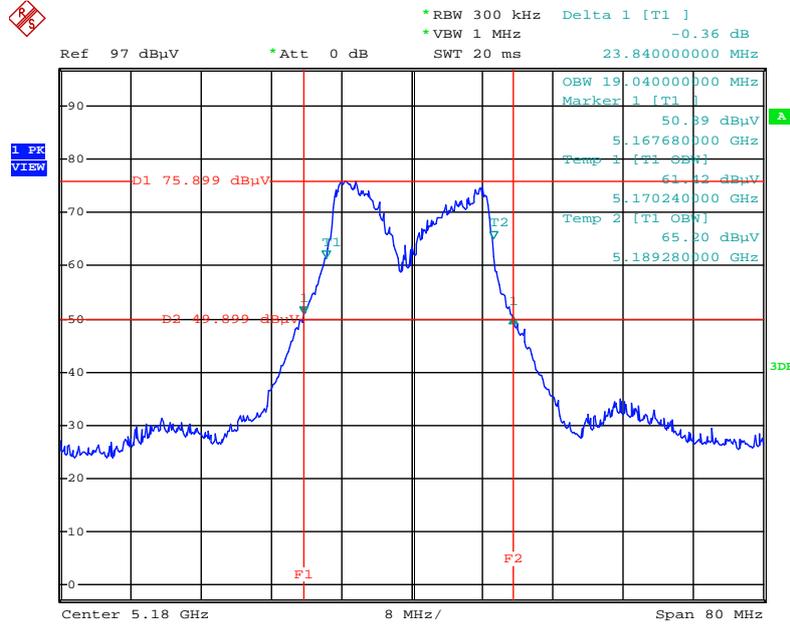


Date: 28.JUL.2014 12:56:12

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

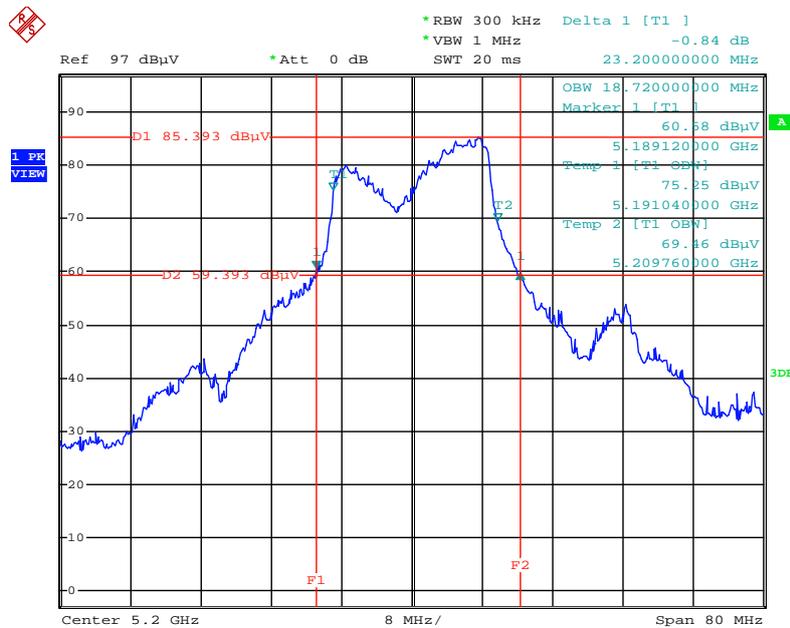


Date: 28.JUL.2014 13:05:55

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

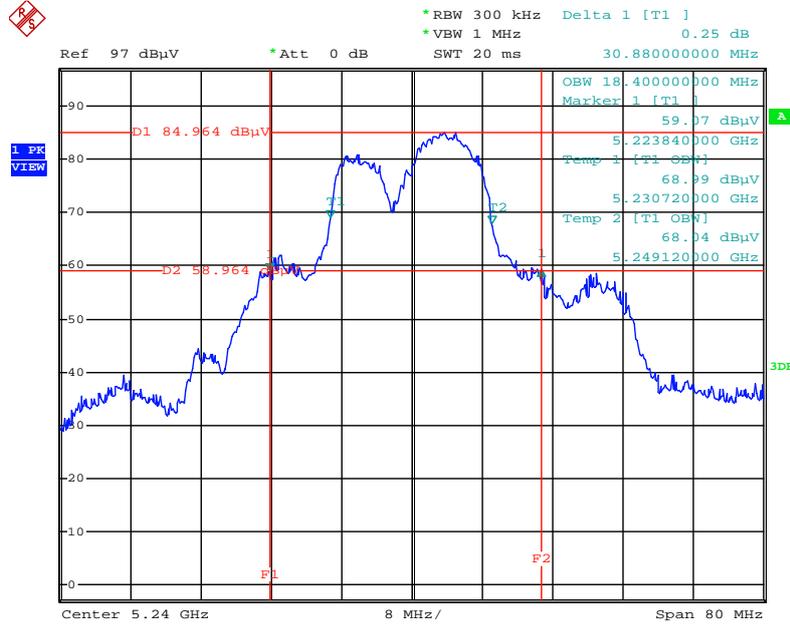


Date: 28.JUL.2014 13:07:33

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5190 MHz

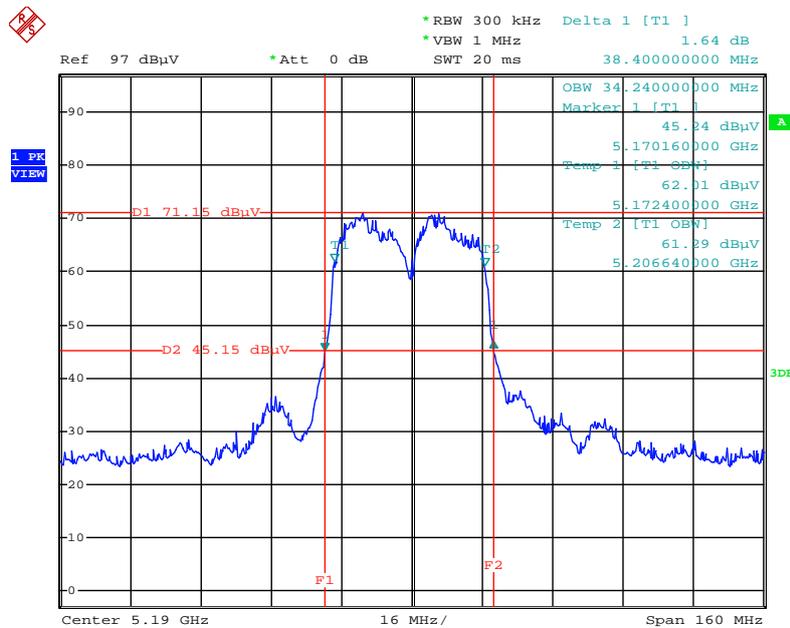


Date: 28.JUL.2014 13:08:45

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

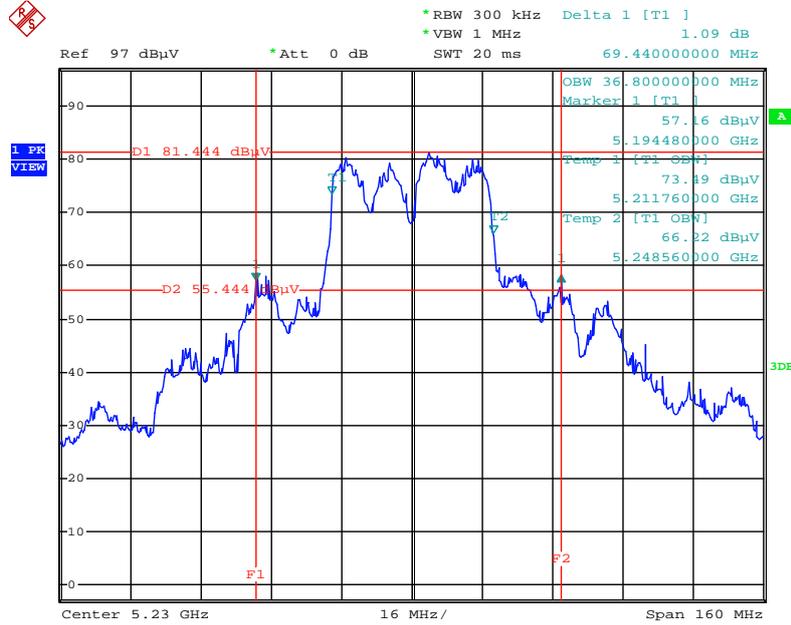


Date: 28.JUL.2014 13:09:56

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

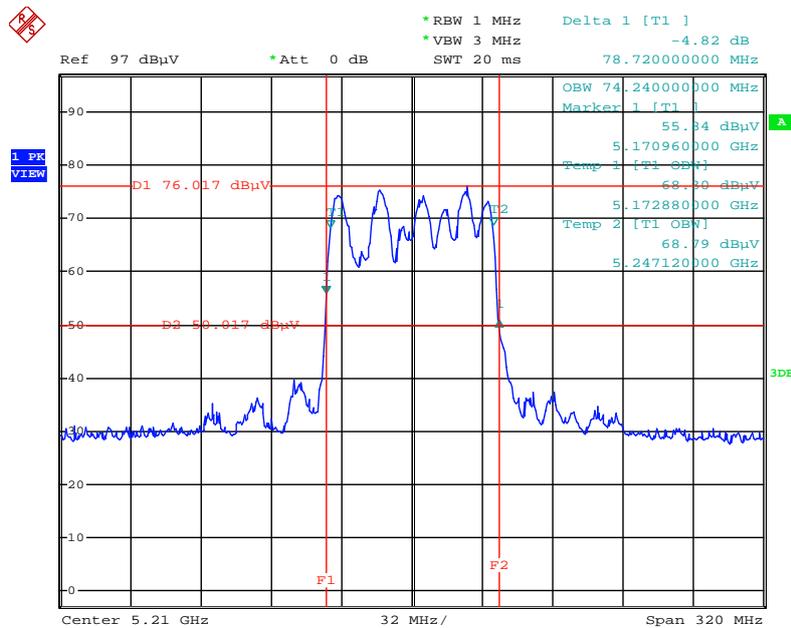


Date: 28.JUL.2014 13:11:23

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

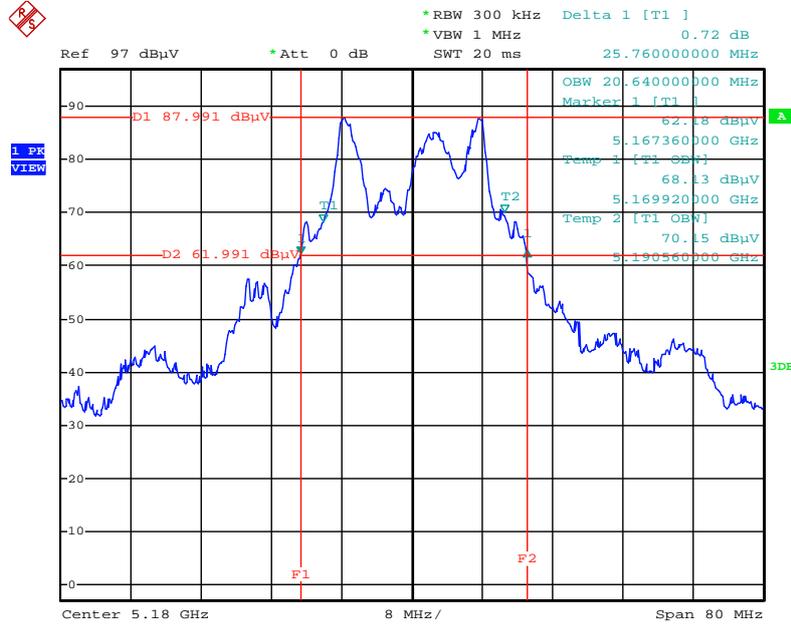


Date: 23.MAY.2014 23:10:29

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

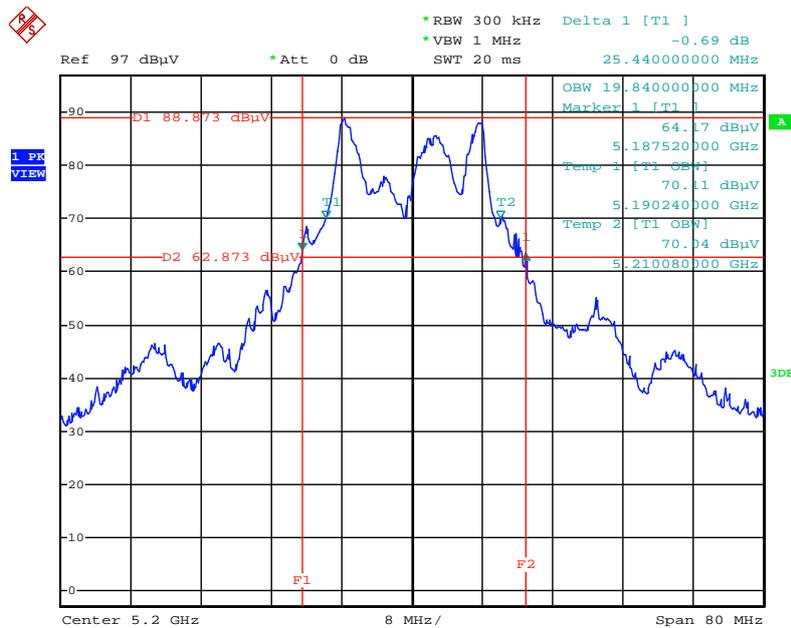

Date: 23.MAY.2014 23:11:02


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

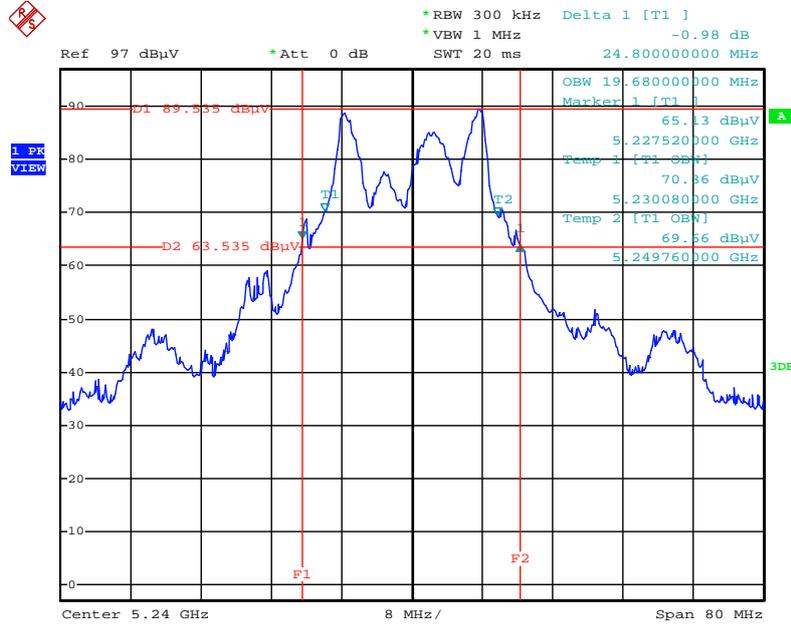

Date: 24.MAY.2014 01:51:45


For beamforming mode:

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

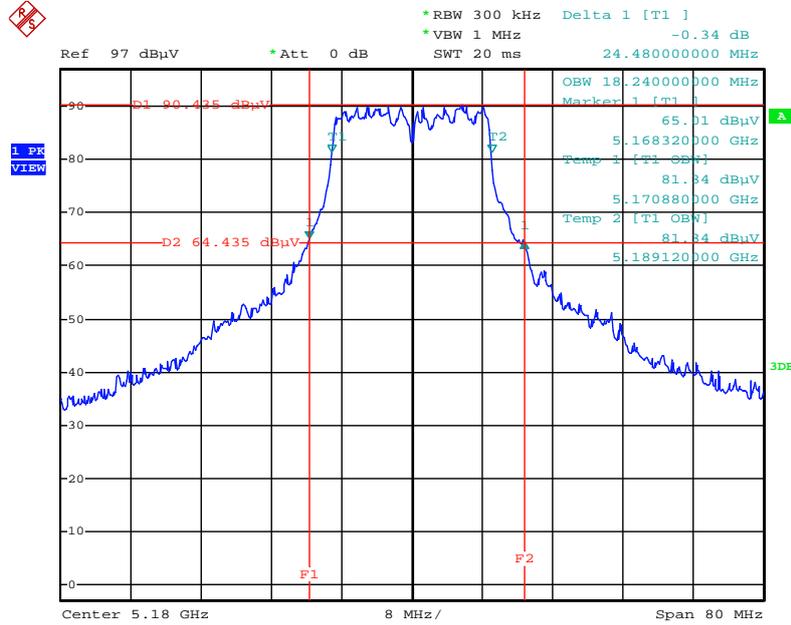


Date: 24.MAY.2014 01:55:26

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

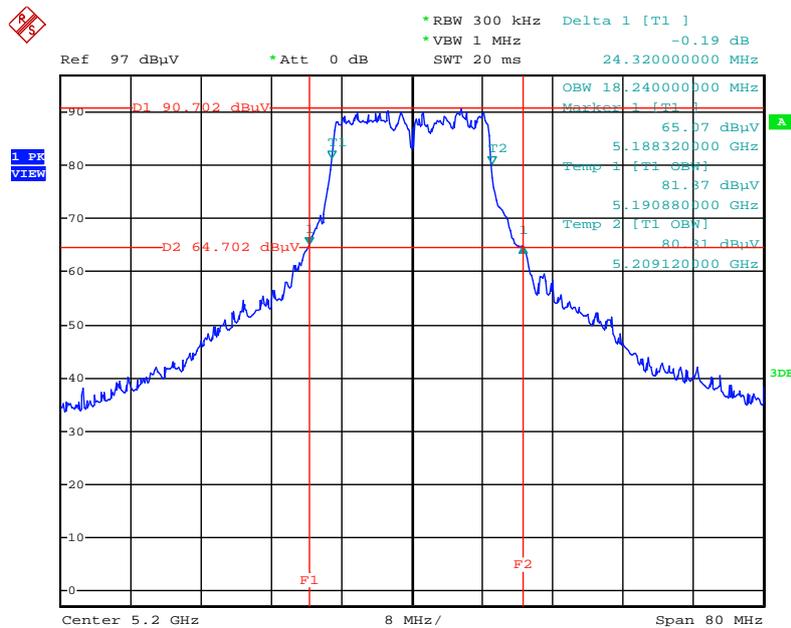


Date: 24.MAY.2014 01:54:49

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

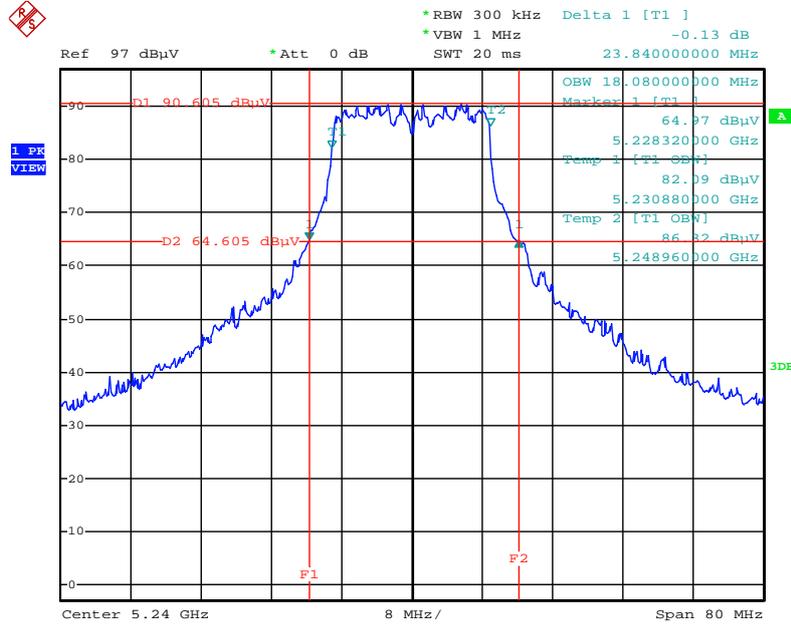


Date: 24.MAY.2014 01:54:09

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5190 MHz

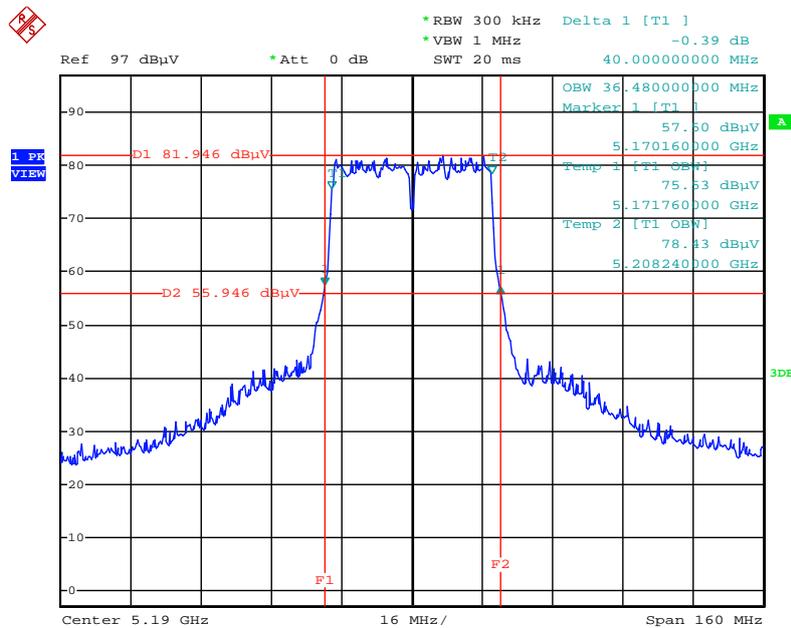


Date: 24.MAY.2014 01:56:17

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

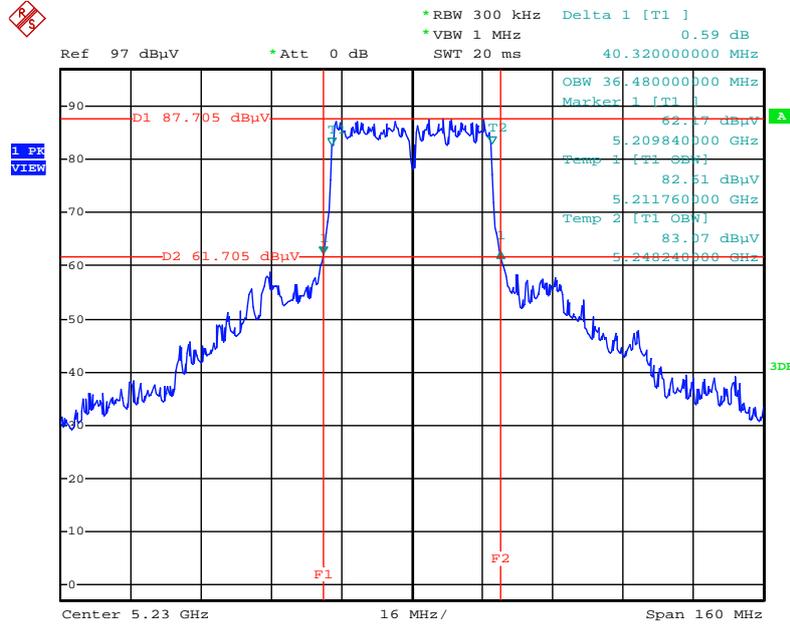

Date: 24.MAY.2014 01:56:54

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

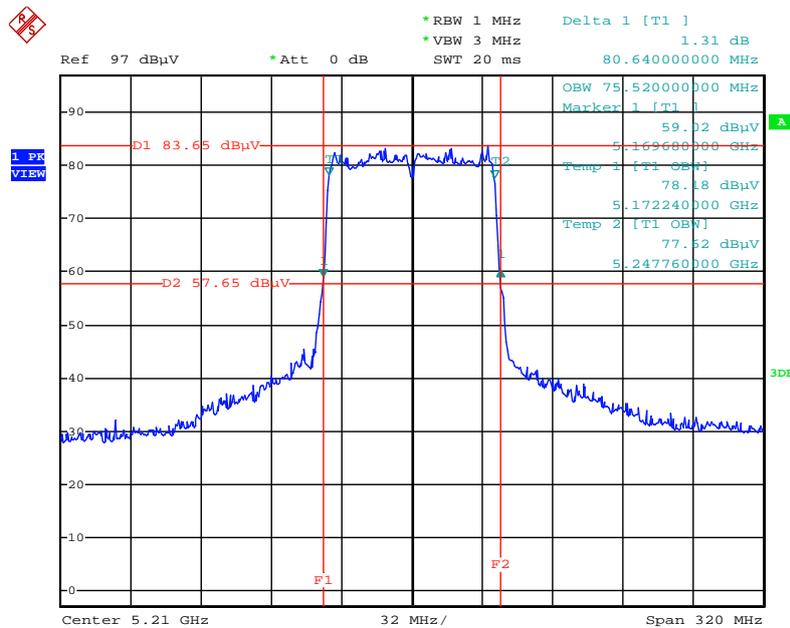

Date: 24.MAY.2014 01:57:39

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout

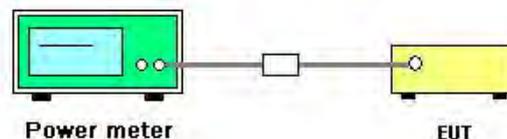

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

For non-beamforming mode:

Temperature	20°C	Humidity	53%
Test Engineer	Magic Lai / Robert Chang	Configurations	IEEE 802.11ac/a
Test Date	May 23, 2014 ~ Jul. 28, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
36	5180 MHz	19.19	21.34	20.08	20.37	26.33	30.00	Complies
40	5200 MHz	21.44	21.03	21.64	21.36	27.39	30.00	Complies
48	5240 MHz	21.56	21.06	21.42	21.31	27.36	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
38	5190 MHz	14.92	15.86	14.04	14.43	20.89	30.00	Complies
46	5230 MHz	22.37	22.01	23.03	23.56	28.80	30.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
42	5210 MHz	14.34	13.79	13.23	13.87	19.85	30.00	Complies

Configuration IEEE 802.11a

Channel	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
36	5180 MHz	19.74	19.61	20.86	20.53	26.24	30.00	Complies
40	5200 MHz	22.31	22.06	21.95	22.28	28.17	30.00	Complies
48	5240 MHz	21.87	21.95	22.12	21.96	28.00	30.00	Complies

For beamforming mode:

Temperature	20°C	Humidity	53%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac
Test Date	May 23, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
36	5180 MHz	21.12	21.23	21.35	21.68	27.37	27.98	Complies
40	5200 MHz	21.44	21.03	21.64	21.36	27.39	27.88	Complies
48	5240 MHz	21.56	21.06	21.42	21.31	27.36	27.68	Complies

Note:

$$\text{CH36} = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SK}} \left\{ \sum_{k=1}^{N_{ASK}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.02\text{dBi} > 6\text{dBi}, \text{ so power limit} = 30 - (8.02 - 6) = 27.98\text{dBm}$$

$$\text{CH40} = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SK}} \left\{ \sum_{k=1}^{N_{ASK}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.12\text{dBi} > 6\text{dBi}, \text{ so power limit} = 30 - (8.12 - 6) = 27.88\text{dBm}$$

$$\text{CH48} = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SK}} \left\{ \sum_{k=1}^{N_{ASK}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.32\text{dBi} > 6\text{dBi}, \text{ so power limit} = 30 - (8.32 - 6) = 27.68\text{dBm}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
38	5190 MHz	15.41	15.38	16.24	15.62	21.70	27.88	Complies
46	5230 MHz	21.65	21.12	21.46	21.04	27.35	27.68	Complies

Note:

$$\text{CH38} = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SK}} \left\{ \sum_{k=1}^{N_{ASK}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.12\text{dBi} > 6\text{dBi}, \text{ so power limit} = 30 - (8.12 - 6) = 27.88\text{dBm}$$

$$\text{CH46} = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SK}} \left\{ \sum_{k=1}^{N_{ASK}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.32\text{dBi} > 6\text{dBi}, \text{ so power limit} = 30 - (8.32 - 6) = 27.68\text{dBm}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
42	5210 MHz	14.46	14.24	14.81	14.43	20.51	27.78	Complies

Note:

$$\text{CH42} = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SK}} \left\{ \sum_{k=1}^{N_{ASK}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.22\text{dBi} > 6\text{dBi}, \text{ so power limit} = 30 - (8.22 - 6) = 27.78\text{dBm}$$

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	17

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

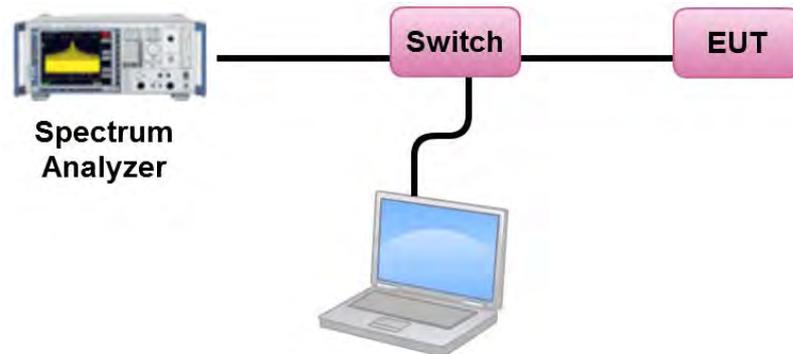

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

For non-beamforming mode:

Temperature	20°C	Humidity	53%
Test Engineer	Magic Lai / Robert Chang	Configurations	IEEE 802.11ac/a
Test Date	May 23, 2014 ~ Jul. 28, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	10.35	14.98	Complies
40	5200 MHz	13.79	14.88	Complies
48	5240 MHz	13.80	14.68	Complies

Note:

$$\text{CH36} = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{i=1}^M \left\{ \sum_{j=1}^N S_{i,j} \right\}^2}{N_{\text{ant}}} \right] = 8.02\text{dBi} > 6\text{dBi}, \text{ so power density limit} = 17 - (8.02 - 6) = 14.98\text{dBm/MHz}$$

$$\text{CH40} = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{i=1}^M \left\{ \sum_{j=1}^N S_{i,j} \right\}^2}{N_{\text{ant}}} \right] = 8.12\text{dBi} > 6\text{dBi}, \text{ so power density limit} = 17 - (8.12 - 6) = 14.88\text{dBm/MHz}$$

$$\text{CH48} = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{i=1}^M \left\{ \sum_{j=1}^N S_{i,j} \right\}^2}{N_{\text{ant}}} \right] = 8.32\text{dBi} > 6\text{dBi}, \text{ so power density limit} = 17 - (8.32 - 6) = 14.68\text{dBm/MHz}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	5.48	14.88	Complies
46	5230 MHz	12.47	14.68	Complies

Note:

$$\text{CH38} = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{i=1}^M \left\{ \sum_{j=1}^N S_{i,j} \right\}^2}{N_{\text{ant}}} \right] = 8.12\text{dBi} > 6\text{dBi}, \text{ so power density limit} = 17 - (8.12 - 6) = 14.88\text{dBm/MHz}$$

$$\text{CH46} = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{i=1}^M \left\{ \sum_{j=1}^N S_{i,j} \right\}^2}{N_{\text{ant}}} \right] = 8.32\text{dBi} > 6\text{dBi}, \text{ so power density limit} = 17 - (8.32 - 6) = 14.68\text{dBm/MHz}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	1.12	14.78	Complies

Note:

$$CH42 = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{i=1}^M \left\{ \sum_{j=1}^N S_{i,j} \right\}^2}{N_{ANT}} \right] = 8.22\text{dBi} > 6\text{dBi}, \text{ so power density limit} = 17 - (8.22 - 6) = 14.78\text{dBm/MHz}$$

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	14.23	14.98	Complies
40	5200 MHz	14.28	14.88	Complies
48	5240 MHz	14.39	14.68	Complies

Note:

$$CH36 = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{i=1}^M \left\{ \sum_{j=1}^N S_{i,j} \right\}^2}{N_{ANT}} \right] = 8.02\text{dBi} > 6\text{dBi}, \text{ so power density limit} = 17 - (8.02 - 6) = 14.98\text{dBm/MHz}$$

$$CH40 = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{i=1}^M \left\{ \sum_{j=1}^N S_{i,j} \right\}^2}{N_{ANT}} \right] = 8.12\text{dBi} > 6\text{dBi}, \text{ so power density limit} = 17 - (8.12 - 6) = 14.88\text{dBm/MHz}$$

$$CH48 = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{i=1}^M \left\{ \sum_{j=1}^N S_{i,j} \right\}^2}{N_{ANT}} \right] = 8.32\text{dBi} > 6\text{dBi}, \text{ so power density limit} = 17 - (8.32 - 6) = 14.68\text{dBm/MHz}$$

For beamforming mode:

Temperature	20°C	Humidity	53%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac
Test Date	May 23, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	13.61	14.98	Complies
40	5200 MHz	13.79	14.88	Complies
48	5240 MHz	13.80	14.68	Complies

Note:

$$CH36 = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{i=1}^M \left\{ \sum_{j=1}^N |S_{i,j}|^2 \right\}}{N_{ANT}} \right] = 8.02\text{dBi} > 6\text{dBi}, \text{ so power density limit} = 17 - (8.02 - 6) = 14.98\text{dBm/MHz}$$

$$CH40 = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{i=1}^M \left\{ \sum_{j=1}^N |S_{i,j}|^2 \right\}}{N_{ANT}} \right] = 8.12\text{dBi} > 6\text{dBi}, \text{ so power density limit} = 17 - (8.12 - 6) = 14.88\text{dBm/MHz}$$

$$CH48 = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{i=1}^M \left\{ \sum_{j=1}^N |S_{i,j}|^2 \right\}}{N_{ANT}} \right] = 8.32\text{dBi} > 6\text{dBi}, \text{ so power density limit} = 17 - (8.32 - 6) = 14.68\text{dBm/MHz}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	5.26	14.88	Complies
46	5230 MHz	10.78	14.68	Complies

Note:

$$CH38 = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{i=1}^M \left\{ \sum_{j=1}^N |S_{i,j}|^2 \right\}}{N_{ANT}} \right] = 8.12\text{dBi} > 6\text{dBi}, \text{ so power density limit} = 17 - (8.12 - 6) = 14.88\text{dBm/MHz}$$

$$CH46 = \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{i=1}^M \left\{ \sum_{j=1}^N |S_{i,j}|^2 \right\}}{N_{ANT}} \right] = 8.32\text{dBi} > 6\text{dBi}, \text{ so power density limit} = 17 - (8.32 - 6) = 14.68\text{dBm/MHz}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	0.84	14.78	Complies

Note:


CH42=
$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{i=1}^{N_{ant}} \left\{ \sum_{j=1}^{N_{ant}} S_{i,j} \right\}^2}{N_{ant}} \right] = 8.22dBi > 6dBi, \text{ so power density limit} = 17 - (8.22 - 6) = 14.78dBm/MHz$$

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

For non-beamforming mode:


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

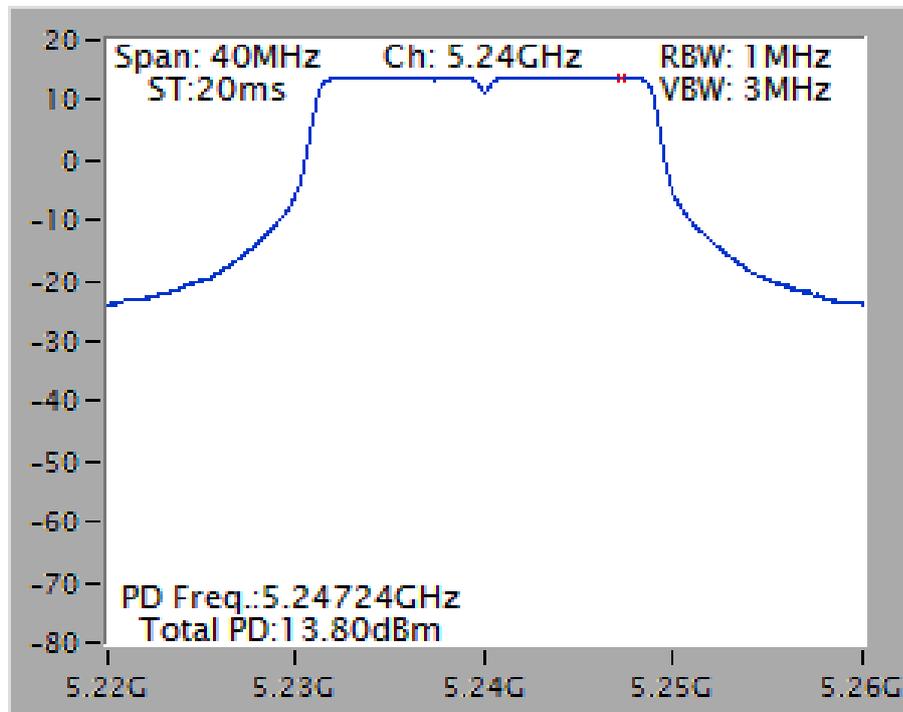


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

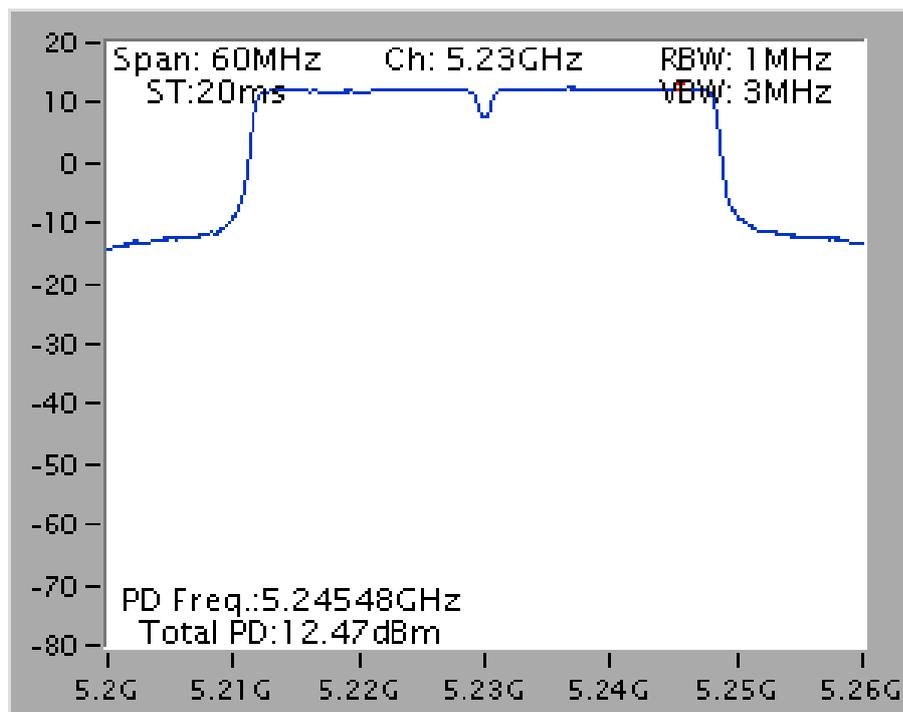

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

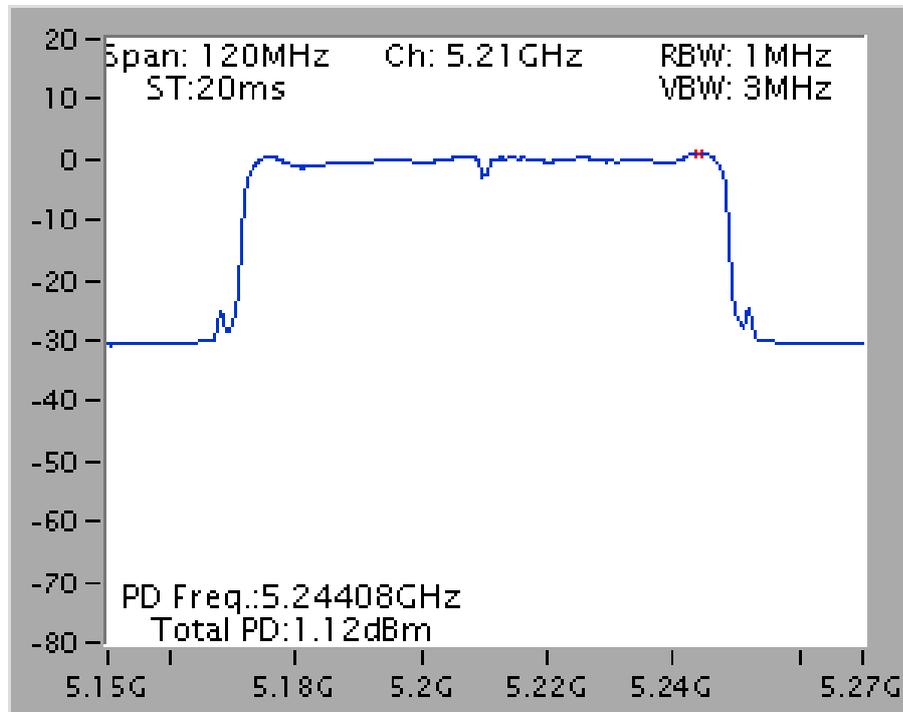


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

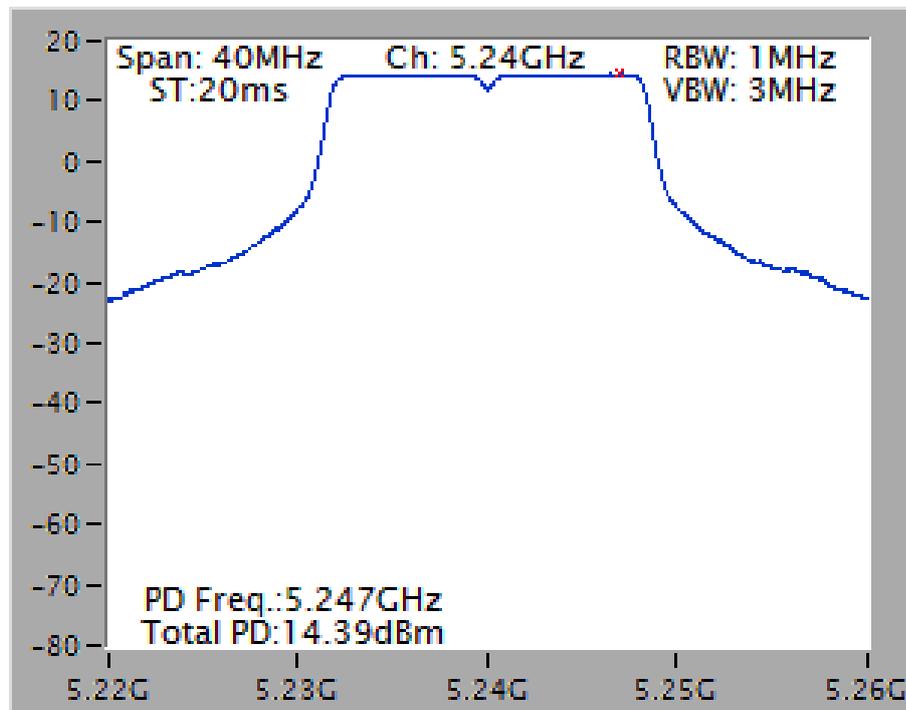


For beamforming mode:


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

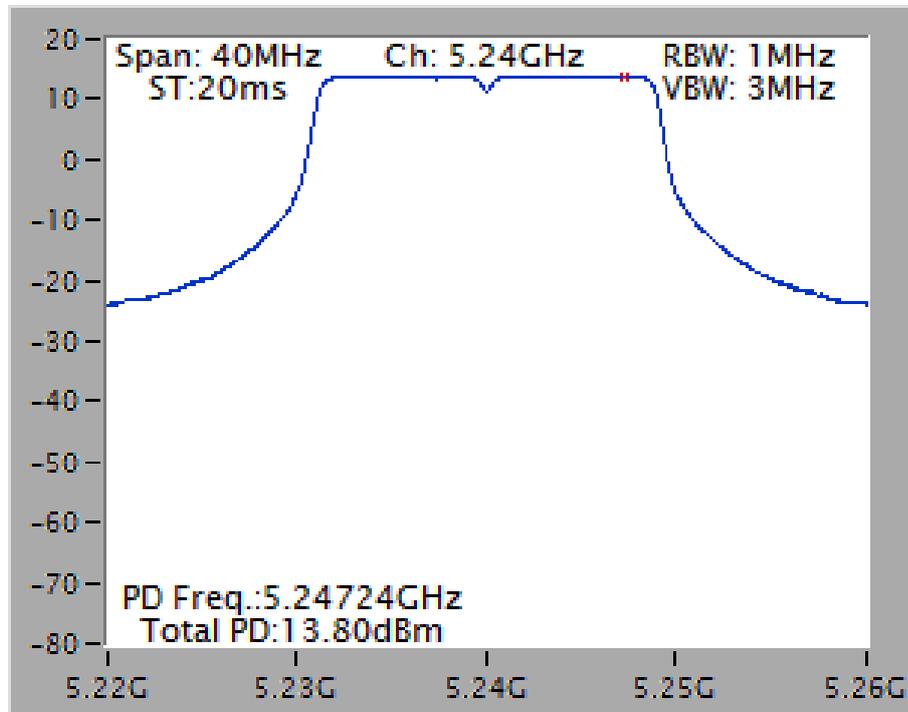

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

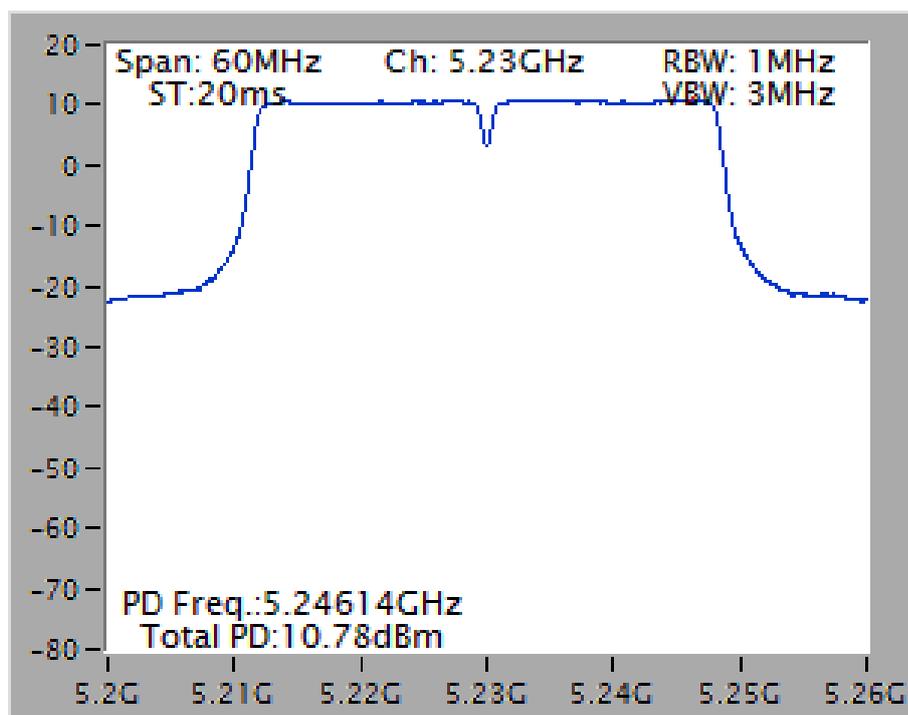

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

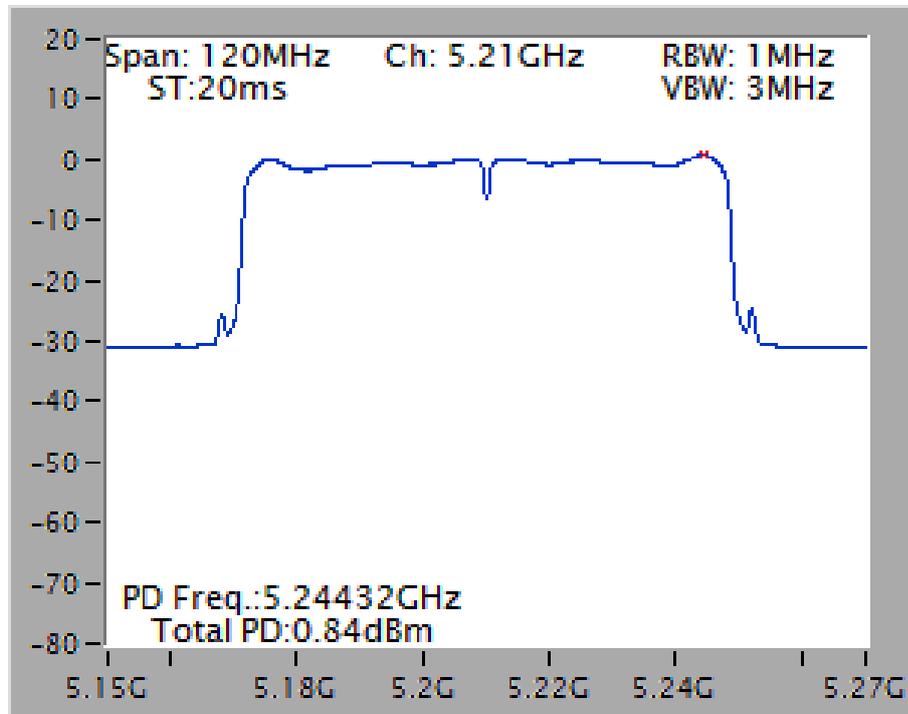

4.5. Radiated Emissions Measurement

4.5.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, Please refer to section 3.10 for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Deviation

There is no deviation with the original standard.

4.5.5. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.5.6. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	CTX
Test Date	May 27, 2014	Test Mode	Mode 1

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.7. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	CTX
Test Mode	Mode 1		

Horizontal

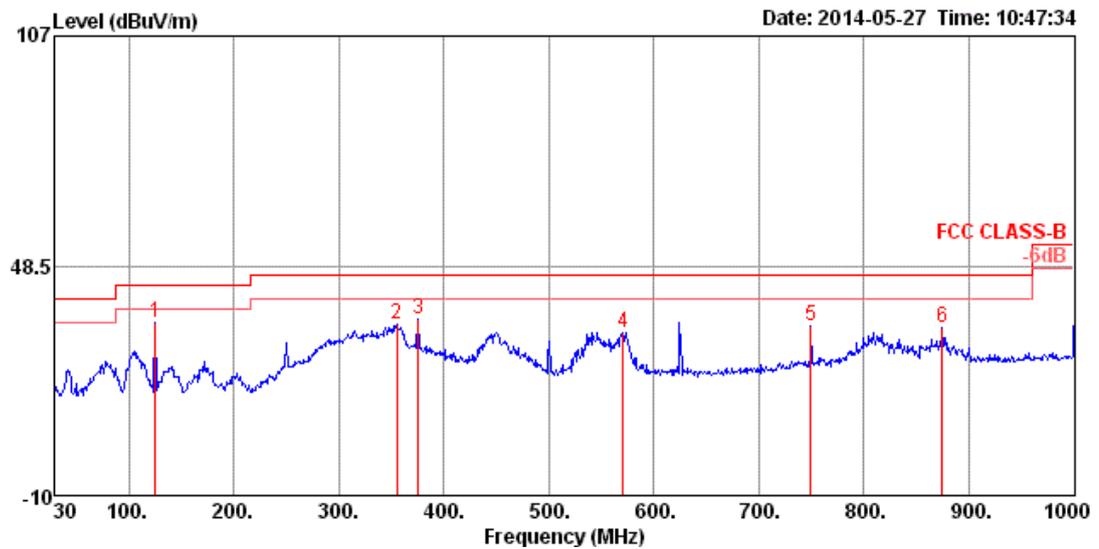

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	125.06	33.91	43.50	-9.59	52.42	1.33	11.73	31.57	300	268	HORIZONTAL Peak
2	354.95	33.62	46.00	-12.38	48.14	2.33	14.49	31.34	100	327	HORIZONTAL Peak
3	375.32	34.78	46.00	-11.22	48.84	2.44	14.93	31.43	100	122	HORIZONTAL Peak
4	570.29	31.57	46.00	-14.43	41.41	3.00	18.37	31.21	150	140	HORIZONTAL Peak
5	749.74	33.02	46.00	-12.98	41.17	3.53	19.69	31.37	100	215	HORIZONTAL Peak
6	874.87	32.60	46.00	-13.40	39.62	3.89	20.24	31.15	100	110	HORIZONTAL Peak

Vertical

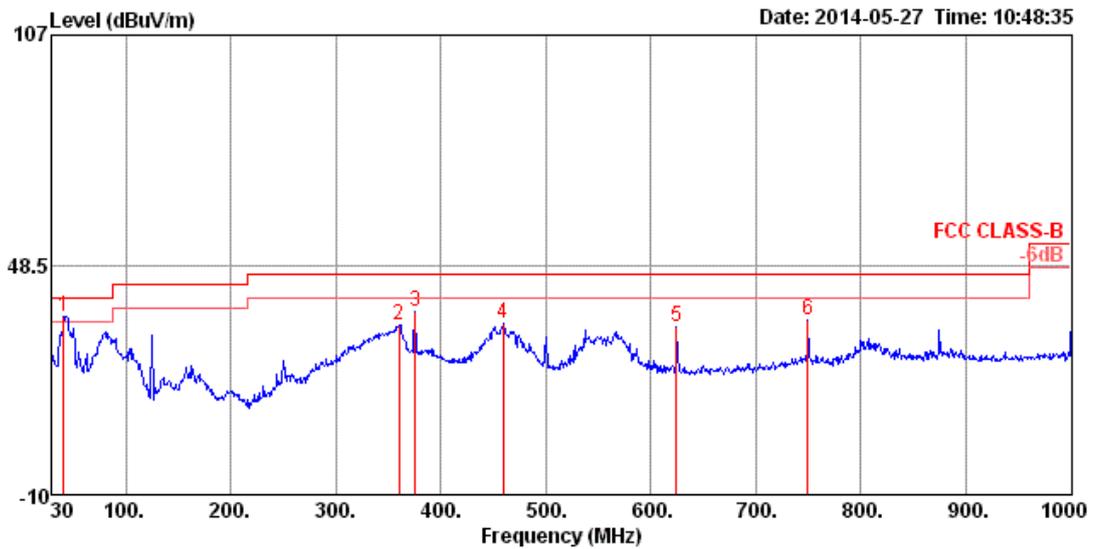

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	40.67	35.51	40.00	-4.49	54.78	0.75	11.85	31.87	100	89 VERTICAL	Peak
2	359.80	33.17	46.00	-12.83	47.49	2.35	14.66	31.33	100	185 VERTICAL	Peak
3	375.32	36.80	46.00	-9.20	50.86	2.44	14.93	31.43	125	205 VERTICAL	Peak
4	459.71	33.48	46.00	-12.52	45.66	2.68	16.33	31.19	125	97 VERTICAL	Peak
5	624.61	32.56	46.00	-13.44	42.17	3.18	18.61	31.40	100	5 VERTICAL	Peak
6	749.74	34.56	46.00	-11.44	42.71	3.53	19.69	31.37	150	18 VERTICAL	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.8. Results for Radiated Emissions (1GHz~40GHz)

For non-beamforming mode:

Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15527.84	55.16	74.00	-18.84	43.43	7.85	38.67	34.79	Peak	187	100	HORIZONTAL
2	15551.30	43.09	54.00	-10.91	31.38	7.86	38.66	34.81	Average	187	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15551.25	56.74	74.00	-17.26	45.03	7.86	38.66	34.81	Peak	326	143	VERTICAL
2	15553.46	43.90	54.00	-10.10	32.19	7.86	38.66	34.81	Average	326	143	VERTICAL



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15598.41	62.96	74.00	-11.04	51.29	7.88	38.62	34.83	Peak	108	100	HORIZONTAL
2	15598.56	48.47	54.00	-5.53	36.80	7.88	38.62	34.83	Average	108	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15606.73	66.93	74.00	-7.07	55.29	7.88	38.62	34.86	Peak	69	183	VERTICAL
2	15608.03	51.26	54.00	-2.74	39.62	7.88	38.62	34.86	Average	69	183	VERTICAL



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15721.15	61.40	74.00	-12.60	49.90	7.92	38.52	34.94	Peak	170	100	HORIZONTAL
2	15722.21	48.05	54.00	-5.95	36.55	7.92	38.52	34.94	Average	170	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15720.82	50.80	54.00	-3.20	39.30	7.92	38.52	34.94	Average	44	210	VERTICAL
2	15721.30	66.87	74.00	-7.13	55.37	7.92	38.52	34.94	Peak	44	210	VERTICAL



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15559.98	55.48	74.00	-18.52	43.77	7.86	38.66	34.81	Peak	255	100	HORIZONTAL
2	15563.03	42.43	54.00	-11.57	30.74	7.86	38.64	34.81	Average	255	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15570.40	42.59	54.00	-11.41	30.90	7.86	38.64	34.81	Average	158	100	VERTICAL
2	15575.61	55.11	74.00	-18.89	43.44	7.86	38.64	34.83	Peak	158	100	VERTICAL



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15688.91	60.36	74.00	-13.64	48.83	7.90	38.55	34.92	Peak	107	100	HORIZONTAL
2	15689.94	47.28	54.00	-6.72	35.75	7.90	38.55	34.92	Average	107	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15687.63	48.80	54.00	-5.20	37.27	7.90	38.55	34.92	Average	10	184	VERTICAL
2	15687.95	62.15	74.00	-11.85	50.62	7.90	38.55	34.92	Peak	10	184	VERTICAL



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 15, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15619.87	55.80	74.00	-18.20	44.18	7.88	38.60	34.86	Peak	75	100	HORIZONTAL
2	15668.46	42.19	54.00	-11.81	30.63	7.90	38.56	34.90	Average	75	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15647.18	42.43	54.00	-11.57	30.84	7.89	38.58	34.88	Average	234	100	VERTICAL
2	15664.36	55.63	74.00	-18.37	44.07	7.90	38.56	34.90	Peak	240	100	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11a CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Apr. 04, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15550.43	46.65	54.00	-7.35	34.94	7.86	38.66	34.81	Average	110	100	HORIZONTAL
2	15550.87	58.93	74.00	-15.07	47.22	7.86	38.66	34.81	Peak	110	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15553.65	60.26	74.00	-13.74	48.55	7.86	38.66	34.81	Peak	303	131	VERTICAL
2	15553.80	48.36	54.00	-5.64	36.65	7.86	38.66	34.81	Average	303	131	VERTICAL



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11a CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 16, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	10407.60	44.32	54.00	-9.68	34.56	6.56	38.34	35.14	Average	81	100	HORIZONTAL
2	10421.00	51.98	74.00	-22.02	42.20	6.57	38.35	35.14	Peak	81	100	HORIZONTAL
3	15600.20	48.38	54.00	-5.62	36.67	7.88	38.62	34.79	Average	305	100	HORIZONTAL
4	15638.60	56.26	74.00	-17.74	44.59	7.89	38.59	34.81	Peak	305	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	10410.20	49.93	54.00	-4.07	40.15	6.57	38.35	35.14	Average	295	116	VERTICAL
2	10410.50	63.33	74.00	-10.67	53.55	6.57	38.35	35.14	Peak	295	116	VERTICAL
3	15595.80	51.09	54.00	-2.91	39.36	7.88	38.62	34.77	Average	131	186	VERTICAL
4	15596.60	64.43	74.00	-9.57	52.70	7.88	38.62	34.77	Peak	131	186	VERTICAL



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11a CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 16, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	10486.10	56.47	74.00	-17.53	46.53	6.63	38.39	35.08	Peak	346	100	HORIZONTAL
2	10487.60	44.08	54.00	-9.92	34.14	6.63	38.39	35.08	Average	346	100	HORIZONTAL
3	15720.30	46.78	54.00	-7.22	35.22	7.92	38.52	34.88	Average	167	100	HORIZONTAL
4	15722.40	60.18	74.00	-13.82	48.62	7.92	38.52	34.88	Peak	167	100	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	10486.40	48.96	54.00	-5.04	39.02	6.63	38.39	35.08	Average	24	100	VERTICAL
2	10487.20	61.70	74.00	-12.30	51.76	6.63	38.39	35.08	Peak	24	100	VERTICAL
3	15721.80	65.68	74.00	-8.32	54.12	7.92	38.52	34.88	Peak	136	207	VERTICAL
4	15722.50	51.51	54.00	-2.49	39.95	7.92	38.52	34.88	Average	136	207	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



For beamforming mode:

Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15539.62	46.31	54.00	-7.69	34.51	7.85	38.67	34.72	Average	44	107	HORIZONTAL
2	15539.97	60.66	74.00	-13.34	48.86	7.85	38.67	34.72	Peak	44	107	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15539.62	65.68	74.00	-8.32	53.88	7.85	38.67	34.72	Peak	44	103	VERTICAL
2	15539.70	51.15	54.00	-2.85	39.35	7.85	38.67	34.72	Average	44	103	VERTICAL



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 15, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15599.56	62.72	74.00	-11.28	51.01	7.88	38.62	34.79	Peak	44	100 HORIZONTAL
2	15599.85	49.38	54.00	-4.62	37.67	7.88	38.62	34.79	Average	44	100 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15599.68	69.18	74.00	-4.82	57.47	7.88	38.62	34.79	Peak	38	177 VERTICAL
2	15599.96	53.49	54.00	-0.51	41.78	7.88	38.62	34.79	Average	38	177 VERTICAL



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15719.68	48.18	54.00	-5.82	36.62	7.92	38.52	34.88	Average	133	100	HORIZONTAL
2	15720.35	62.34	74.00	-11.66	50.78	7.92	38.52	34.88	Peak	133	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15719.57	51.54	54.00	-2.46	39.98	7.92	38.52	34.88	Average	36	176	VERTICAL
2	15719.70	67.00	74.00	-7.00	55.44	7.92	38.52	34.88	Peak	36	176	VERTICAL



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15570.25	46.59	54.00	-7.41	34.83	7.86	38.64	34.74	Average	38	100	HORIZONTAL
2	15570.25	59.49	74.00	-14.51	47.73	7.86	38.64	34.74	Peak	38	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15569.84	62.63	74.00	-11.37	50.87	7.86	38.64	34.74	Peak	43	100	VERTICAL
2	15570.36	49.27	54.00	-4.73	37.51	7.86	38.64	34.74	Average	43	100	VERTICAL



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15689.80	46.78	54.00	-7.22	35.18	7.90	38.55	34.85	Average	180	100	HORIZONTAL
2	15690.28	58.84	74.00	-15.16	47.24	7.90	38.55	34.85	Peak	180	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15689.52	49.31	54.00	-4.69	37.71	7.90	38.55	34.85	Average	42	174	VERTICAL
2	15689.96	63.16	74.00	-10.84	51.56	7.90	38.55	34.85	Peak	42	174	VERTICAL



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 15, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15629.66	54.45	74.00	-19.55	42.78	7.89	38.59	34.81	Peak	210	100 HORIZONTAL
2	15630.00	41.62	54.00	-12.38	29.95	7.89	38.59	34.81	Average	210	100 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15629.88	55.13	74.00	-18.87	43.46	7.89	38.59	34.81	Peak	58	100 VERTICAL
2	15629.88	41.75	54.00	-12.25	30.08	7.89	38.59	34.81	Average	50	100 VERTICAL



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11a CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 15, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15550.43	46.65	54.00	-7.35	34.94	7.86	38.66	34.81	Average	110	100	HORIZONTAL
2	15550.87	58.93	74.00	-15.07	47.22	7.86	38.66	34.81	Peak	110	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	15553.65	60.26	74.00	-13.74	48.55	7.86	38.66	34.81	Peak	303	131	VERTICAL
2	15553.80	48.36	54.00	-5.64	36.65	7.86	38.66	34.81	Average	303	131	VERTICAL



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11a CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 16, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	10407.60	44.32	54.00	-9.68	34.56	6.56	38.34	35.14	Average	81	100	HORIZONTAL
2	10421.00	51.98	74.00	-22.02	42.20	6.57	38.35	35.14	Peak	81	100	HORIZONTAL
3	15600.20	48.38	54.00	-5.62	36.67	7.88	38.62	34.79	Average	305	100	HORIZONTAL
4	15638.60	56.26	74.00	-17.74	44.59	7.89	38.59	34.81	Peak	305	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	10410.20	49.93	54.00	-4.07	40.15	6.57	38.35	35.14	Average	295	116	VERTICAL
2	10410.50	63.33	74.00	-10.67	53.55	6.57	38.35	35.14	Peak	295	116	VERTICAL
3	15595.80	51.09	54.00	-2.91	39.36	7.88	38.62	34.77	Average	131	186	VERTICAL
4	15596.60	64.43	74.00	-9.57	52.70	7.88	38.62	34.77	Peak	131	186	VERTICAL



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11a CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 16, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	10486.10	56.47	74.00	-17.53	46.53	6.63	38.39	35.08	Peak	346	100	HORIZONTAL
2	10487.60	44.08	54.00	-9.92	34.14	6.63	38.39	35.08	Average	346	100	HORIZONTAL
3	15720.30	46.78	54.00	-7.22	35.22	7.92	38.52	34.88	Average	167	100	HORIZONTAL
4	15722.40	60.18	74.00	-13.82	48.62	7.92	38.52	34.88	Peak	167	100	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	10486.40	48.96	54.00	-5.04	39.02	6.63	38.39	35.08	Average	24	100	VERTICAL
2	10487.20	61.70	74.00	-12.30	51.76	6.63	38.39	35.08	Peak	24	100	VERTICAL
3	15721.80	65.68	74.00	-8.32	54.12	7.92	38.52	34.88	Peak	136	207	VERTICAL
4	15722.50	51.51	54.00	-2.49	39.95	7.92	38.52	34.88	Average	136	207	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, Please refer to section 3.10 for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.6.3. Test Procedures

- The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.

4.6.4. Test Deviation

There is no deviation with the original standard.

4.6.5. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.6.6. Test Result of Band Edge and Fundamental Emissions

For non-beamforming mode:

Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Apr. 04, 2014 ~ Jul. 28, 2014		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5147.12	53.29	54.00	-0.71	50.66	3.43	34.11	34.91	Average	238	151	VERTICAL
2	5148.40	68.18	80.00	-11.82	65.55	3.43	34.11	34.91	Peak	238	151	VERTICAL
3	5186.89	107.17			104.48	3.44	34.16	34.91	Average	238	151	VERTICAL
4	5187.53	117.97			115.28	3.44	34.16	34.91	Peak	238	151	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5143.60	60.14	74.00	-13.86	57.19	4.34	33.14	34.53	Peak	218	171	VERTICAL
2	5150.00	46.23	54.00	-7.77	43.28	4.34	33.14	34.53	Average	213	171	VERTICAL
3	5200.40	106.86			103.80	4.37	33.22	34.53	Average	218	171	VERTICAL
4	5201.60	117.73			114.67	4.37	33.22	34.53	Peak	218	171	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5147.60	57.46	74.00	-16.54	54.51	4.34	33.14	34.53	Peak	210	170	VERTICAL
2	5150.00	45.31	54.00	-8.69	42.36	4.34	33.14	34.53	Average	210	170	VERTICAL
3	5235.80	118.25			115.12	4.39	33.27	34.53	Peak	210	170	VERTICAL
4	5237.00	107.38			104.25	4.39	33.27	34.53	Average	210	170	VERTICAL
5	5359.60	47.62	54.00	-6.38	44.22	4.47	33.46	34.53	Average	210	170	VERTICAL
6	5366.80	60.85	74.00	-13.15	57.41	4.48	33.49	34.53	Peak	210	170	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Apr. 04, 2014 ~ Jul. 28, 2014		

Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5150.00	53.22	54.00	-0.78	50.59	3.43	34.11	34.91	Average	202	175	VERTICAL
2	5150.00	65.72	80.00	-14.28	63.09	3.43	34.11	34.91	Peak	202	175	VERTICAL
3	5188.72	111.21			108.52	3.44	34.16	34.91	Peak	202	175	VERTICAL
4	5189.04	100.29			97.60	3.44	34.16	34.91	Average	202	175	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5150.00	65.86	74.00	-8.14	62.91	4.34	33.14	34.53	VERTICAL	233	165	Peak
2	5150.00	53.39	54.00	-0.61	50.44	4.34	33.14	34.53	VERTICAL	233	165	Average
3	5214.00	106.65			103.55	4.38	33.25	34.53	VERTICAL	233	165	Average
4	5234.00	117.66			114.53	4.39	33.27	34.53	VERTICAL	233	165	Peak

Item 3, 4 are the fundamental frequency at 5230 MHz.



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Jul. 28, 2014		

Channel 42

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor		cm	deg	
1	5145.19	53.42	54.00	-0.58	50.79	3.43	34.11	34.91	Average	188	167	VERTICAL
2	5146.80	69.59	80.00	-10.41	66.96	3.43	34.11	34.91	Peak	188	167	VERTICAL
3	5243.65	110.68			107.88	3.46	34.25	34.91	Peak	188	167	VERTICAL
4	5244.46	99.39			96.59	3.46	34.25	34.91	Average	188	167	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11a CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Apr. 04, 2014 ~ May 16, 2014		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5150.00	67.75	74.00	-6.25	64.80	4.34	33.14	34.53	Peak	260	233	VERTICAL
2	5150.00	53.64	54.00	-0.36	50.69	4.34	33.14	34.53	Average	260	233	VERTICAL
3	5187.20	101.12			98.10	4.36	33.19	34.53	Average	260	233	VERTICAL
4	5187.60	116.35			113.33	4.36	33.19	34.53	Peak	260	233	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5148.00	62.76	74.00	-11.24	59.81	4.34	33.14	34.53	Peak	179	242	VERTICAL
2	5148.00	51.76	54.00	-2.24	48.81	4.34	33.14	34.53	Average	179	242	VERTICAL
3	5207.00	121.79			118.73	4.37	33.22	34.53	Peak	179	242	VERTICAL
4	5207.00	111.79			108.73	4.37	33.22	34.53	Average	179	242	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5060.00	61.62	74.00	-12.38	58.86	4.28	33.01	34.53	Peak	315	245	VERTICAL
2	5150.00	49.08	54.00	-4.92	46.13	4.34	33.14	34.53	Average	315	245	VERTICAL
3	5234.00	122.34			119.21	4.39	33.27	34.53	Peak	315	245	VERTICAL
4	5235.00	112.17			109.04	4.39	33.27	34.53	Average	315	245	VERTICAL
5	5354.00	51.49	54.00	-2.51	48.09	4.47	33.46	34.53	Average	315	245	VERTICAL
6	5376.00	63.81	74.00	-10.19	60.37	4.48	33.49	34.53	Peak	315	245	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

For beamforming mode:

Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 14, 2014		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5143.59	53.51	54.00	-0.49	50.56	4.34	33.14	34.53	Average	218	212	VERTICAL
2	5145.51	69.14	74.00	-4.86	66.19	4.34	33.14	34.53	Peak	218	212	VERTICAL
3	5186.89	122.98			119.96	4.36	33.19	34.53	Peak	218	212	VERTICAL
4	5186.89	110.64			107.62	4.36	33.19	34.53	Average	218	212	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5149.36	64.96	74.00	-9.04	62.01	4.34	33.14	34.53	Peak	219	222	VERTICAL
2	5150.00	51.68	54.00	-2.32	48.73	4.34	33.14	34.53	Average	219	222	VERTICAL
3	5195.83	125.04			121.98	4.37	33.22	34.53	Peak	219	222	VERTICAL
4	5198.72	112.91			109.85	4.37	33.22	34.53	Average	219	222	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5132.21	61.96	74.00	-12.04	59.05	4.33	33.11	34.53	Peak	182	224	VERTICAL
2	5150.00	49.33	54.00	-4.67	46.38	4.34	33.14	34.53	Average	182	224	VERTICAL
3	5241.92	124.68			121.51	4.40	33.30	34.53	Peak	182	224	VERTICAL
4	5243.85	113.15			109.98	4.40	33.30	34.53	Average	182	224	VERTICAL
5	5353.37	63.77	74.00	-10.23	60.37	4.47	33.46	34.53	Peak	182	224	VERTICAL
6	5360.10	51.21	54.00	-2.79	47.81	4.47	33.46	34.53	Average	182	224	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 14, 2014		

Channel 38

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5150.00	67.81	74.00	-6.19	64.86	4.34	33.14	34.53	Peak	219	212 VERTICAL
2	5150.00	53.89	54.00	-0.11	50.94	4.34	33.14	34.53	Average	219	212 VERTICAL
3	5187.12	99.99			96.97	4.36	33.19	34.53	Average	219	212 VERTICAL
4	5187.76	115.07			112.05	4.36	33.19	34.53	Peak	219	212 VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5150.00	67.81	74.00	-6.19	64.86	4.34	33.14	34.53	Peak	218	221 VERTICAL
2	5150.00	53.60	54.00	-0.40	50.65	4.34	33.14	34.53	Average	218	221 VERTICAL
3	5227.44	123.52			120.39	4.39	33.27	34.53	Peak	218	221 VERTICAL
4	5227.76	108.16			105.03	4.39	33.27	34.53	Average	218	221 VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.



Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 15, 2014		

Channel 42

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5148.40	67.24	74.00	-6.76	64.29	4.34	33.14	34.53	Peak	218	212 VERTICAL
2	5150.00	53.37	54.00	-0.63	50.42	4.34	33.14	34.53	Average	218	212 VERTICAL
3	5225.22	110.84			107.71	4.39	33.27	34.53	Peak	218	212 VERTICAL
4	5226.03	98.33			95.20	4.39	33.27	34.53	Average	218	212 VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

4.7. Frequency Stability Measurement

4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-30^\circ\text{C} \sim 50^\circ\text{C}$.

4.7.4. Test Setup Layout

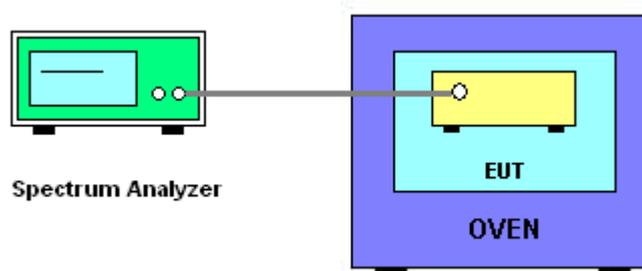

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.7.7. Test Result of Frequency Stability

Temperature	20°C	Humidity	53%
Test Engineer	Robert Chang	Test Date	May 23, 2014

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200 MHz
126.50	5199.9946
110.00	5199.9946
93.50	5199.9942
Max. Deviation (MHz)	0.0058
Max. Deviation (ppm)	1.12

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200 MHz
-30	5199.9862
-20	5199.9878
-10	5199.9900
0	5199.9918
10	5199.9936
20	5199.9946
30	5199.9964
40	5199.9982
50	5199.9998
Max. Deviation (MHz)	0.0138
Max. Deviation (ppm)	2.65

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
MXE EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8 GHz	Dec. 25, 2013	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150 kHz ~ 100 MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 11, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150 kHz ~ 30 MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Teseq GmbH	CBL 6112D	35236	30MHz ~ 2GHz	Nov. 29, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz - 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz - 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 04, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz - 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%