


Appendix C. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	57%
Test Engineer	James Chou	Configurations	2.4G + 5G

Horizontal

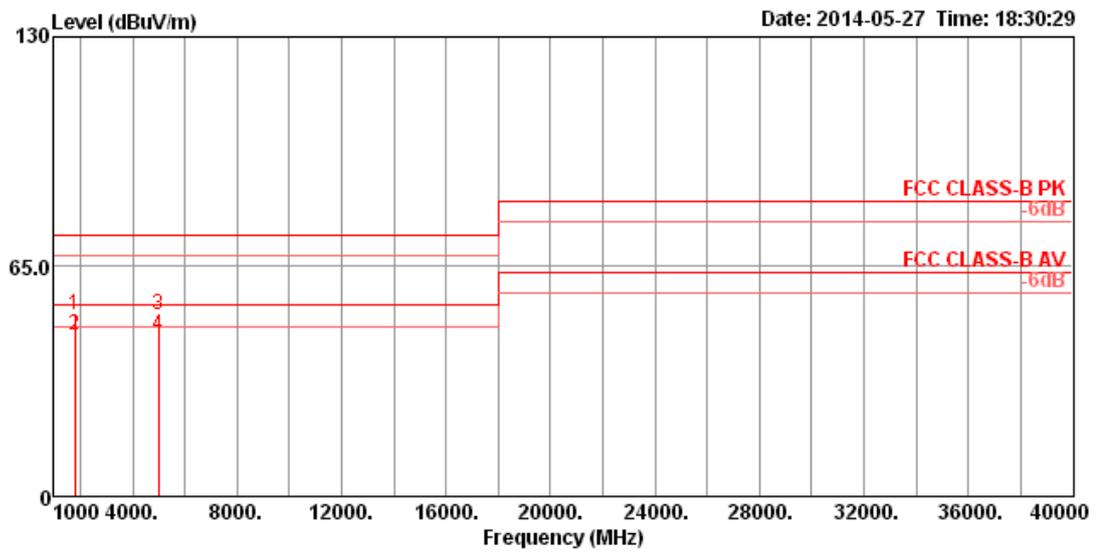

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1800.57	51.55	74.00	-22.45	58.57	3.22	26.07	36.31	100	290	HORIZONTAL	Peak
2	1800.79	45.55	54.00	-8.45	52.52	3.22	26.12	36.31	100	290	HORIZONTAL	Average
3	5000.12	51.42	74.00	-22.58	47.98	5.90	32.90	35.36	100	108	HORIZONTAL	Peak
4	5001.22	45.42	54.00	-8.58	41.98	5.90	32.90	35.36	100	108	HORIZONTAL	Average

Vertical

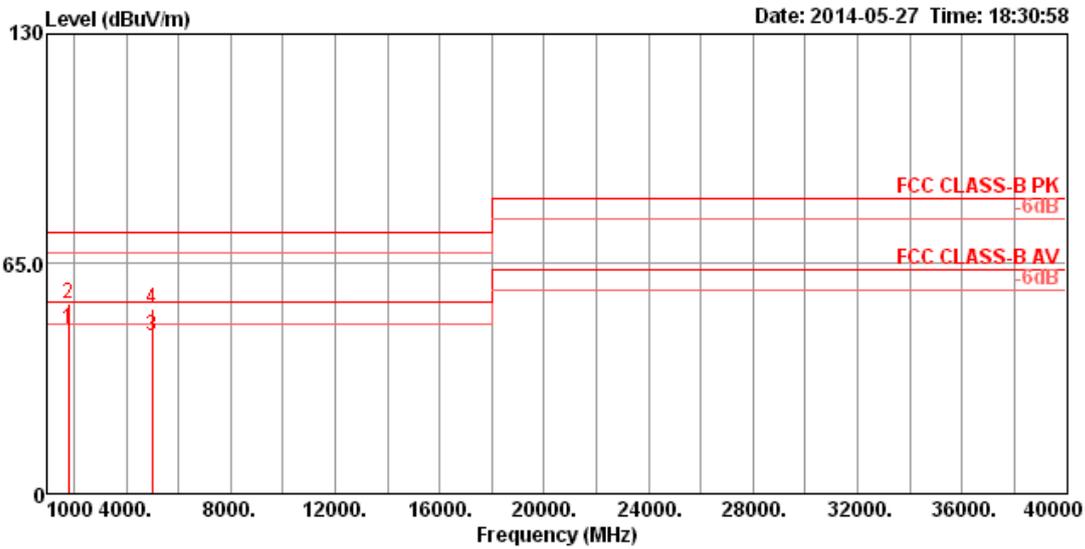

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1799.89	46.55	54.00	-7.45	53.58	3.22	26.07	36.32	127	29 VERTICAL	Average
2	1800.00	53.55	74.00	-20.45	60.58	3.22	26.07	36.32	127	29 VERTICAL	Peak
3	4999.97	44.42	54.00	-9.58	40.98	5.90	32.90	35.36	100	229 VERTICAL	Average
4	5000.77	52.42	74.00	-21.58	48.98	5.90	32.90	35.36	100	229 VERTICAL	Peak