



FCC TEST REPORT

(15.407)

REPORT NO.: RF140710C34-1
MODEL NO.: WM2500RP
FCC ID: PY314300289
RECEIVED: Jul. 04, 2014
TESTED: Jul. 13 ~ Sep. 10, 2014
ISSUED: Sep. 12, 2014

APPLICANT: NETGEAR INC.

ADDRESS: 350 East Plumeria Drive, San Jose, CA 95134,
USA

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1. CERTIFICATION.....	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION.....	7
3.1 GENERAL DESCRIPTION OF EUT.....	7
3.2 DESCRIPTION OF TEST MODES.....	9
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	10
3.3 DUTY CYCLE OF TEST SIGNAL.....	12
3.4 DESCRIPTION OF SUPPORT UNITS.....	14
3.4.1 CONFIGURATION OF SYSTEM UNDER TEST.....	14
3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	15
4. TEST TYPES AND RESULTS	16
4.1 RADIATED EMISSION AND BANDEGE MEASUREMENT	16
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT.....	16
4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	16
4.1.3 TEST INSTRUMENTS.....	17
4.1.4 TEST PROCEDURES	18
4.1.5 DEVIATION FROM TEST STANDARD	18
4.1.6 TEST SETUP.....	19
4.1.7 EUT OPERATING CONDITION	20
4.1.8 TEST RESULTS	21
4.2 CONDUCTED EMISSION MEASUREMENT	39
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	39
4.2.2 TEST INSTRUMENTS.....	39
4.2.3 TEST PROCEDURES	40
4.2.4 DEVIATION FROM TEST STANDARD	40
4.2.5 TEST SETUP.....	40
4.2.6 EUT OPERATING CONDITIONS.....	40
4.2.7 TEST RESULTS	41
4.3 TRANSMIT POWER MEASUREMENT.....	45
4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT	45
4.3.2 TEST SETUP.....	45
4.3.3 TEST INSTRUMENTS.....	46
4.3.4 TEST PROCEDURE.....	46
4.3.5 DEVIATION FROM TEST STANDARD	46
4.3.6 EUT OPERATING CONDITIONS.....	46
4.3.7 TEST RESULTS	47
4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT	48
4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	48
4.4.2 TEST SETUP.....	48
4.4.3 TEST INSTRUMENTS.....	48
4.4.4 TEST PROCEDURES	48
4.4.5 DEVIATION FROM TEST STANDARD	49
4.4.6 EUT OPERATING CONDITIONS.....	49
4.4.7 TEST RESULTS	50
4.5 FREQUENCY STABILITY	54
4.5.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT.....	54
4.5.2 TEST SETUP.....	54
4.5.3 TEST INSTRUMENTS.....	54
4.5.4 TEST PROCEDURE.....	55
4.5.5 DEVIATION FROM TEST STANDARD	55
4.5.6 EUT OPERATING CONDITION	55
4.5.7 TEST RESULTS	56



A D T

4.6	6DB BANDWIDTH MEASUREMENT	57
4.6.1	LIMITS OF 6DB BANDWIDTH MEASUREMENT	57
4.6.2	TEST SETUP	57
4.6.3	TEST INSTRUMENTS	57
4.6.4	TEST PROCEDURE	57
4.6.5	DEVIATION FROM TEST STANDARD	57
4.6.6	EUT OPERATING CONDITIONS	57
4.6.7	TEST RESULTS	58
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	60
6.	INFORMATION ON THE TESTING LABORATORIES	61
7.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	62



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF140710C34-1	Original release	Sep. 12, 2014



1. CERTIFICATION

PRODUCT: MoCA 2.0 N600 WiFi bridge / extender

MODEL: WM2500RP

BRAND: NETGEAR

APPLICANT: NETGEAR INC.

TESTED: Jul. 13 ~ Sep. 10, 2014

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart E (Section 15.407)

ANSI C63.10-2009

The above equipment (model: WM2500RP) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Polly Chien , **DATE :** Sep. 12, 2014
Polly Chien / Specialist

APPROVED BY : Ken Liu , **DATE :** Sep. 12, 2014
Ken Liu / Senior Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -11.19dB at 0.21647MHz.
15.407(b)(1/2/3/4/6)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 5714.90MHz, 5860.10MHz, 10460.00MHz, 10400.00MHz, 11650.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(e)	6dB bandwidth	PASS	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is IPEX not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.19 dB
	200MHz ~ 1000MHz	3.21 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	MoCA 2.0 N600 WiFi bridge / extender
MODEL NO.	WM2500RP
POWER SUPPLY	12Vdc (Adapter)
MODULATION TYPE	64QAM, 16QAM, QPSK, BPSK
MODULATION TECHNOLOGY	OFDM
TRANSFER RATE	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps
OPERATING FREQUENCY	5180 ~ 5240MHz, 5745 ~ 5825MHz
NUMBER OF CHANNEL	5180 ~ 5240MHz: 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 5745 ~ 5825MHz: 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
OUTPUT POWER	5180 ~ 5240MHz: 36.025mW 5745 ~ 5825MHz: 185.378mW
ANTENNA TYPE	PCB antenna with 3dBi gain
ANTENNA CONNECTOR	IPEX
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Adapter

NOTE:

- The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

MODULATION MODE	TX FUNCTION
802.11a	2TX
802.11n (20MHz)	2TX
802.11n (40MHz)	2TX

2. The EUT consumes power from the following adapters.

Adapter 1	
BRAND:	I.T.E
MODEL:	MT18-9120150-A1 (P/N: 332-10221-01)
INPUT:	120Vac, 60Hz, 0.5A
OUTPUT:	12Vdc, 1.5A
POWER LINE:	1.8m power cable w/o core attached on adapter

Adapter 2	
BRAND:	NETGEAR
MODEL:	AD817F10
INPUT:	100-120Vac, 50/60Hz, 0.56A
OUTPUT:	12Vdc, 1.5A
POWER LINE:	1.8m power cable w/o core attached on adapter

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190 MHz	46	5230 MHz

FOR 5745 ~ 5825MHz

5 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
A	√	√	√	√	Power from adapter 1
B	-	√	√	-	Power from adapter 2

Where **RE \geq 1G**: Radiated Emission above 1GHz **RE $<$ 1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.
2. "-" means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
A	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	7.2
A	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	15.0
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	BPSK	7.2
A	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	15.0

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11n (20MHz)	5180-5240, 5745-5825	36 to 48, 149 to 165	165	OFDM	BPSK	7.2



POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11n (20MHz)	5180-5240, 5745-5825	36 to 48, 149 to 165	165	OFDM	BPSK	7.2

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
A	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	7.2
A	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	15.0
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	BPSK	7.2
A	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	15.0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE>1G	26deg. C, 62%RH	120Vac, 60Hz	Brad Tung
	26deg. C, 62%RH	120Vac, 60Hz	Alan Wu
RE<1G	27deg. C, 61%RH	120Vac, 60Hz	Alan Wu
	21deg. C, 66%RH	120Vac, 60Hz	Brad Tung
PLC	27deg. C, 61%RH	120Vac, 60Hz	Alan Wu
	24deg. C, 67%RH	120Vac, 60Hz	Brad Tung
APCM	25deg. C, 60%RH	120Vac, 60Hz	Nick Chen


3.3 DUTY CYCLE OF TEST SIGNAL

For U-NII-1 Band:

802.11a: Duty cycle = $2.020/2.070 = 0.976$, Duty factor = $10 * \log(1/0.976) = 0.11$

802.11n (20MHz): Duty cycle = $1.882/1.955 = 0.963$, Duty factor = $10 * \log(1/0.963) = 0.16$

802.11n (40MHz): Duty cycle = $0.924/0.969 = 0.954$, Duty factor = $10 * \log(1/0.966) = 0.20$

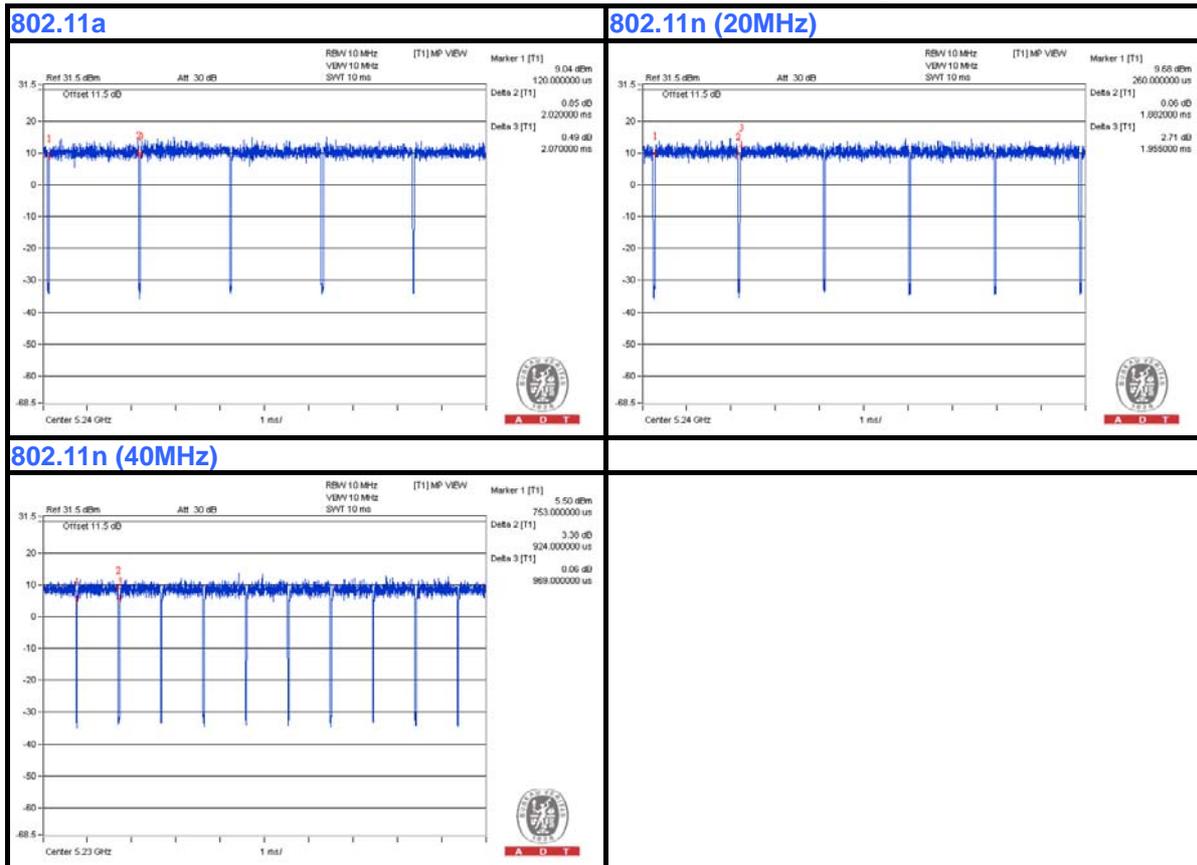



A D T

For U-NII-3 Band:

802.11a: Duty cycle = $2.020/2.070 = 0.976$, Duty factor = $10 * \log(1/0.976) = 0.11$

802.11n (20MHz): Duty cycle = $1.882/1.934 = 0.973$, Duty factor = $10 * \log(1/0.973) = 0.12$

802.11n (40MHz): Duty cycle = $0.924/0.959 = 0.964$, Duty factor = $10 * \log(1/0.964) = 0.16$



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	E5420	33MKMQ1	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m RJ45 UTP cable without core

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 1 acted as a communication partner to transfer data.

3.4.1 CONFIGURATION OF SYSTEM UNDER TEST

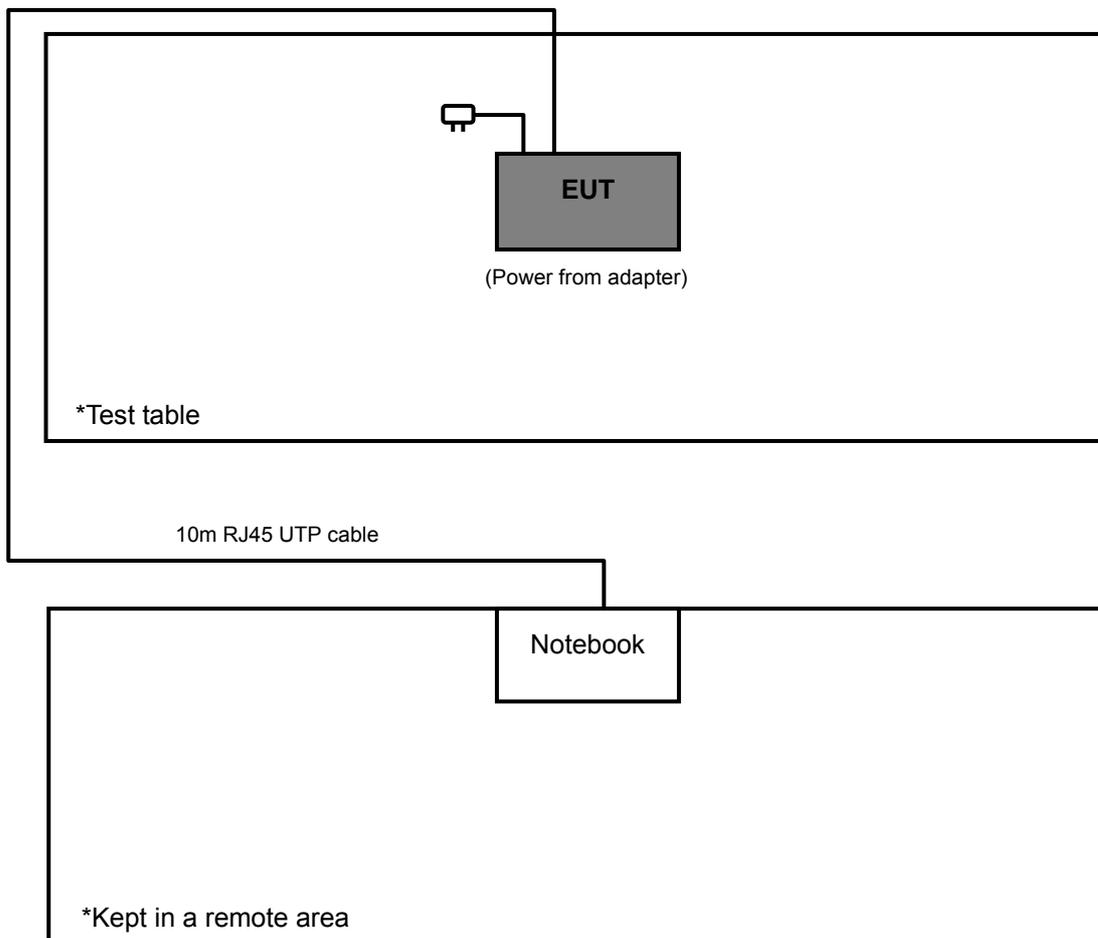

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specification of the EUT declared by the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D02 General UNII Test Procedures New Rules v01

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedures New Rules v01	FIELD STRENGTH AT 3m	
	PK: 74 (dBµV/m)	AV: 54 (dBµV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBµV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)	PK: -27 (dBm/MHz) ^{*1} PK: -17 (dBm/MHz) ^{*2}	PK: 68.2 (dBµV/m) ^{*1} PK: 78.2 (dBµV/m) ^{*2}

NOTE: ^{*1} beyond 10MHz of the band edge ^{*2} within 10 MHz of band edge

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$



4.1.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	Jan. 02, 2014	Jan. 01, 2015
Spectrum Analyzer ROHDE & SCHWARZ	FSU 43	100115	Dec. 18, 2013	Dec. 17, 2014
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Feb. 26, 2014	Feb. 25, 2015
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Jan. 05, 2014	Jan. 04, 2015
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Feb. 17, 2014	Feb. 16, 2015
Loop Antenna	HFH2-Z2	100070	Mar. 06, 2014	Mar. 05, 2016
Preamplifier Agilent	8449B	3008A01961	Oct. 28, 2013	Oct. 27, 2014
Preamplifier Agilent	8447D	2944A10738	Oct. 18, 2013	Oct. 17, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309220/4	Aug. 26, 2013	Aug. 25, 2014
			Aug. 09, 2014	Aug. 08, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250724/4	Aug. 26, 2013	Aug. 25, 2014
			Aug. 09, 2014	Aug. 08, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295012/4	Aug. 26, 2013	Aug. 25, 2014
			Aug. 09, 2014	Aug. 08, 2015
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA	NA
Turn Table BV ADT	TT100.	TT93021704	NA	NA
Turn Table Controller BV ADT	SC100.	SC93021704	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 18, 2013	Oct. 17, 2014
High Speed Peak Power Meter	ML2495A	0824011	Jul. 29, 2013	Jul. 28, 2014
			Jul. 26, 2014	Jul. 25, 2015
Power Sensor	MA2411B	0738171	Jul. 29, 2013	Jul. 28, 2014
			Jul. 26, 2014	Jul. 25, 2015
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 9, 2014	Jun. 08, 2015

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. The test was performed in HwaYa Chamber 4.
 4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 5. The FCC Site Registration No. is 460141.
 6. The IC Site Registration No. is IC7450F-4.

4.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.5 DEVIATION FROM TEST STANDARD


No deviation.

4.1.6 TEST SETUP

Frequency range 30MHz~1GHz

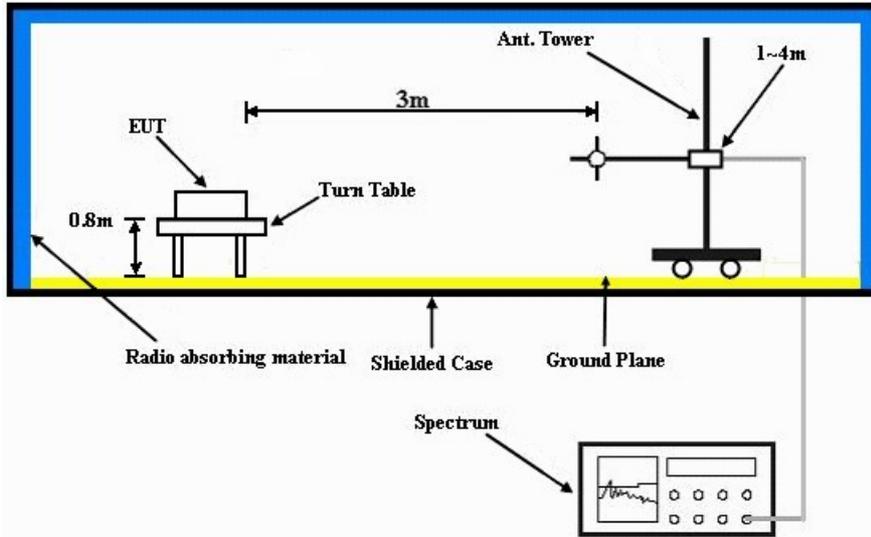

Frequency range above 1GHz

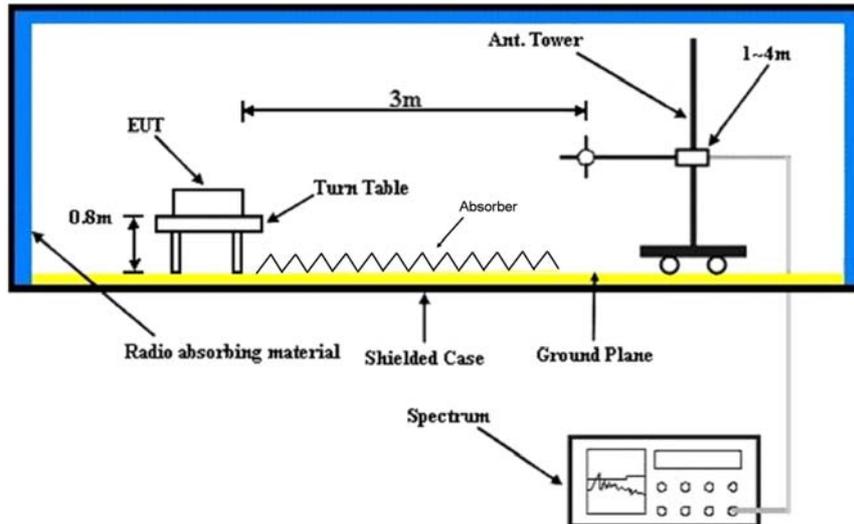

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.7 EUT OPERATING CONDITION

- a. Placed the EUT on the testing table.
- b. Prepared notebook to act as a communication partner and placed it outside of testing area.
- c. The communication partners connected with EUT via a RJ45 cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".

4.1.8 TEST RESULTS

ABOVE 1GHz DATA

For U-NII-1 Band

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.7 PK	74.0	-16.3	1.00 H	113	52.30	5.40
2	5150.00	46.4 AV	54.0	-7.6	1.00 H	113	41.00	5.40
3	*5180.00	103.1 PK			1.00 H	113	63.80	39.30
4	*5180.00	92.0 AV			1.00 H	113	52.70	39.30
5	#10360.00	62.3 PK	68.2	-5.9	1.12 H	253	46.10	16.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.4 PK	74.0	-17.6	1.10 V	145	51.00	5.40
2	5150.00	45.0 AV	54.0	-9.0	1.10 V	145	39.60	5.40
3	*5180.00	97.6 PK			1.10 V	145	58.30	39.30
4	*5180.00	87.9 AV			1.10 V	145	48.60	39.30
5	#10360.00	67.8 PK	68.2	-0.4	1.00 V	260	51.60	16.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	102.7 PK			1.00 H	106	63.40	39.30
2	*5200.00	92.4 AV			1.00 H	106	53.10	39.30
3	#10400.00	63.9 PK	68.2	-4.3	1.11 H	257	47.50	16.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	99.4 PK			1.09 V	144	60.10	39.30
2	*5200.00	89.2 AV			1.09 V	144	49.90	39.30
3	#10400.00	68.1 PK	68.2	-0.1	1.51 V	261	51.70	16.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	101.5 PK			1.00 H	105	62.20	39.30
2	*5240.00	91.1 AV			1.00 H	105	51.80	39.30
3	5350.00	57.6 PK	74.0	-16.4	1.00 H	105	52.10	5.50
4	5350.00	46.0 AV	54.0	-8.0	1.00 H	105	40.50	5.50
5	#10480.00	63.7 PK	68.2	-4.5	1.12 H	254	46.40	17.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	98.6 PK			1.18 V	136	59.30	39.30
2	*5240.00	88.8 AV			1.18 V	136	49.50	39.30
3	5350.00	57.5 PK	74.0	-16.5	1.18 V	136	52.00	5.50
4	5350.00	45.5 AV	54.0	-8.5	1.18 V	136	40.00	5.50
5	#10480.00	68.0 PK	68.2	-0.2	1.06 V	262	50.70	17.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (20MHz)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.4 PK	74.0	-15.6	1.03 H	115	53.00	5.40
2	5150.00	47.4 AV	54.0	-6.6	1.03 H	115	42.00	5.40
3	*5180.00	104.3 PK			1.03 H	115	65.00	39.30
4	*5180.00	93.8 AV			1.03 H	115	54.50	39.30
5	#10360.00	62.6 PK	68.2	-5.6	1.05 H	259	46.40	16.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.8 PK	74.0	-17.2	1.00 V	144	51.40	5.40
2	5150.00	44.0 AV	54.0	-10.0	1.00 V	144	38.60	5.40
3	*5180.00	98.8 PK			1.00 V	144	59.50	39.30
4	*5180.00	88.5 AV			1.00 V	144	49.20	39.30
5	#10360.00	67.9 PK	68.2	-0.3	1.00 V	259	51.70	16.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	101.7 PK			1.00 H	115	62.40	39.30
2	*5200.00	91.6 AV			1.00 H	115	52.30	39.30
3	#10400.00	63.3 PK	68.2	-4.9	1.10 H	259	46.90	16.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	98.3 PK			1.09 V	140	59.00	39.30
2	*5200.00	88.1 AV			1.09 V	140	48.80	39.30
3	#10400.00	67.6 PK	68.2	-0.6	1.52 V	263	51.20	16.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	103.3 PK			1.00 H	112	64.00	39.30
2	*5240.00	93.0 AV			1.00 H	112	53.70	39.30
3	5350.00	57.9 PK	74.0	-16.1	1.00 H	112	52.40	5.50
4	5350.00	44.7 AV	54.0	-9.3	1.00 H	112	39.20	5.50
5	#10480.00	63.6 PK	68.2	-4.6	1.11 H	255	46.30	17.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	98.9 PK			1.19 V	133	59.60	39.30
2	*5240.00	89.0 AV			1.19 V	133	49.70	39.30
3	5350.00	56.4 PK	74.0	-17.6	1.19 V	133	50.90	5.50
4	5350.00	43.4 AV	54.0	-10.6	1.19 V	133	37.90	5.50
5	#10480.00	67.9 PK	68.2	-0.3	1.50 V	265	50.60	17.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

802.11n (40MHz)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.3 PK	74.0	-14.7	1.00 H	114	53.90	5.40
2	5150.00	46.7 AV	54.0	-7.3	1.00 H	114	41.30	5.40
3	*5190.00	100.3 PK			1.00 H	114	61.00	39.30
4	*5190.00	90.5 AV			1.00 H	114	51.20	39.30
5	#10380.00	61.7 PK	68.2	-6.5	1.03 H	253	45.30	16.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.2 PK	74.0	-16.8	1.19 V	141	51.80	5.40
2	5150.00	44.9 AV	54.0	-9.1	1.19 V	141	39.50	5.40
3	*5190.00	98.7 PK			1.19 V	141	59.40	39.30
4	*5190.00	88.7 AV			1.19 V	141	49.40	39.30
5	#10380.00	68.0 PK	68.2	-0.2	1.50 V	262	51.60	16.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	101.3 PK			1.00 H	113	62.00	39.30
2	*5230.00	90.5 AV			1.00 H	113	51.20	39.30
3	5350.00	58.5 PK	74.0	-15.5	1.00 H	113	53.00	5.50
4	5350.00	45.7 AV	54.0	-8.3	1.00 H	113	40.20	5.50
5	#10460.00	61.9 PK	68.2	-6.3	1.11 H	257	44.90	17.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	98.7 PK			1.03 V	107	59.40	39.30
2	*5230.00	88.2 AV			1.03 V	107	48.90	39.30
3	5350.00	56.9 PK	74.0	-17.1	1.03 V	107	51.40	5.50
4	5350.00	44.3 AV	54.0	-9.7	1.03 V	107	38.80	5.50
5	#10460.00	68.1 PK	68.2	-0.1	1.49 V	263	51.10	17.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

For U-NII-3 Band

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.90	71.0 PK	74.0	-3.0	1.00 H	262	64.80	6.20
2	#5714.90	50.6 AV	54.0	-3.4	1.00 H	262	44.40	6.20
3	#5722.90	76.8 PK	78.2	-1.4	1.00 H	262	70.60	6.20
4	*5745.00	112.9 PK			1.00 H	262	72.80	40.10
5	*5745.00	102.4 AV			1.00 H	262	62.30	40.10
6	11490.00	65.1 PK	74.0	-8.9	1.20 H	255	46.30	18.80
7	11490.00	49.6 AV	54.0	-4.4	1.20 H	255	30.80	18.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.90	71.4 PK	74.0	-2.6	1.25 V	130	65.20	6.20
2	#5714.90	51.4 AV	54.0	-2.6	1.25 V	130	45.20	6.20
3	#5722.90	77.7 PK	78.2	-0.5	1.25 V	130	71.50	6.20
4	*5745.00	109.8 PK			1.25 V	130	69.70	40.10
5	*5745.00	100.0 AV			1.25 V	130	59.90	40.10
6	11490.00	69.1 PK	74.0	-4.9	1.00 V	220	50.30	18.80
7	11490.00	53.3 AV	54.0	-0.7	1.00 V	220	34.50	18.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	113.8 PK			1.00 H	271	73.60	40.20
2	*5785.00	103.2 AV			1.00 H	271	63.00	40.20
3	11570.00	65.5 PK	74.0	-8.5	1.18 H	243	46.70	18.80
4	11570.00	50.0 AV	54.0	-4.0	1.18 H	243	31.20	18.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	111.9 PK			1.22 V	141	71.70	40.20
2	*5785.00	101.1 AV			1.22 V	141	60.90	40.20
3	11570.00	68.8 PK	74.0	-5.2	1.00 V	217	50.00	18.80
4	11570.00	53.6 AV	54.0	-0.4	1.00 V	217	34.80	18.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	114.3 PK			1.08 H	260	74.00	40.30
2	*5825.00	103.1 AV			1.08 H	260	62.80	40.30
3	#5852.10	77.5 PK	78.2	-0.7	1.08 H	260	71.00	6.50
4	#5860.10	70.6 PK	74.0	-3.4	1.08 H	260	64.10	6.50
5	#5860.10	49.0 AV	54.0	-5.0	1.08 H	260	42.50	6.50
6	11650.00	65.7 PK	74.0	-8.3	1.15 H	246	46.80	18.90
7	11650.00	50.2 AV	54.0	-3.8	1.15 H	246	31.30	18.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	112.0 PK			1.26 V	130	71.70	40.30
2	*5825.00	101.8 AV			1.26 V	130	61.50	40.30
3	#5852.10	75.7 PK	78.2	-2.5	1.26 V	130	69.20	6.50
4	#5860.10	69.4 PK	74.0	-4.6	1.26 V	130	62.90	6.50
5	#5860.10	50.0 AV	54.0	-4.0	1.26 V	130	43.50	6.50
6	11650.00	69.4 PK	74.0	-4.6	1.00 V	212	50.50	18.90
7	11650.00	53.9 AV	54.0	-0.1	1.00 V	212	35.00	18.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.90	69.8 PK	74.0	-4.2	1.12 H	262	63.60	6.20
2	#5714.90	49.0 AV	54.0	-5.0	1.12 H	262	42.80	6.20
3	#5722.90	70.0 PK	78.2	-8.2	1.12 H	262	63.80	6.20
4	*5745.00	111.1 PK			1.12 H	262	71.00	40.10
5	*5745.00	100.7 AV			1.12 H	262	60.60	40.10
6	11490.00	65.0 PK	74.0	-9.0	1.20 H	263	46.20	18.80
7	11490.00	49.4 AV	54.0	-4.6	1.20 H	263	30.60	18.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.90	69.5 PK	74.0	-4.5	1.18 V	136	63.30	6.20
2	#5714.90	48.2 AV	54.0	-5.8	1.18 V	136	42.00	6.20
3	#5722.90	77.6 PK	78.2	-0.6	1.18 V	136	71.40	6.20
4	*5745.00	111.7 PK			1.18 V	136	71.60	40.10
5	*5745.00	101.0 AV			1.18 V	136	60.90	40.10
6	11490.00	68.0 PK	74.0	-6.0	1.00 V	208	49.20	18.80
7	11490.00	52.6 AV	54.0	-1.4	1.00 V	208	33.80	18.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	111.9 PK			1.10 H	254	71.70	40.20
2	*5785.00	101.4 AV			1.10 H	254	61.20	40.20
3	11570.00	63.9 PK	74.0	-10.1	1.16 H	275	45.10	18.80
4	11570.00	50.4 AV	54.0	-3.6	1.16 H	275	31.60	18.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	112.3 PK			1.18 V	146	72.10	40.20
2	*5785.00	101.8 AV			1.18 V	146	61.60	40.20
3	11570.00	66.9 PK	74.0	-7.1	1.00 V	77	48.10	18.80
4	11570.00	53.7 AV	54.0	-0.3	1.00 V	77	34.90	18.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	112.3 PK			1.00 H	260	72.00	40.30
2	*5825.00	101.3 AV			1.00 H	260	61.00	40.30
3	#5852.10	69.5 PK	78.2	-8.7	1.00 H	260	63.00	6.50
4	#5860.10	70.5 PK	74.0	-3.5	1.00 H	260	64.00	6.50
5	#5860.10	49.8 AV	54.0	-4.2	1.00 H	260	43.30	6.50
6	11650.00	63.7 PK	74.0	-10.3	1.18 H	266	44.80	18.90
7	11650.00	50.5 AV	54.0	-3.5	1.18 H	266	31.60	18.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	112.7 PK			1.17 V	144	72.40	40.30
2	*5825.00	101.7 AV			1.17 V	144	61.40	40.30
3	#5852.10	70.5 PK	78.2	-7.7	1.17 V	144	64.00	6.50
4	#5860.10	71.4 PK	74.0	-2.6	1.17 V	144	64.90	6.50
5	#5860.10	51.1 AV	54.0	-2.9	1.17 V	144	44.60	6.50
6	11650.00	66.9 PK	74.0	-7.1	1.00 V	75	48.00	18.90
7	11650.00	53.5 AV	54.0	-0.5	1.00 V	75	34.60	18.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.90	73.8 PK	74.0	-0.2	1.00 H	265	67.60	6.20
2	#5714.90	53.9 AV	54.0	-0.1	1.00 H	265	47.70	6.20
3	#5722.90	76.0 PK	78.2	-2.2	1.00 H	265	69.80	6.20
4	*5755.00	107.7 PK			1.00 H	265	67.50	40.20
5	*5755.00	96.9 AV			1.00 H	265	56.70	40.20
6	11510.00	62.6 PK	74.0	-11.4	1.00 H	260	43.80	18.80
7	11510.00	50.4 AV	54.0	-3.6	1.00 H	260	31.60	18.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.90	72.4 PK	74.0	-1.6	1.08 V	144	66.20	6.20
2	#5714.90	53.0 AV	54.0	-1.0	1.08 V	144	46.80	6.20
3	#5722.90	77.8 PK	78.2	-0.4	1.08 V	144	71.60	6.20
4	*5755.00	107.6 PK			1.08 V	144	67.40	40.20
5	*5755.00	96.9 AV			1.08 V	144	56.70	40.20
6	11510.00	62.6 PK	74.0	-11.4	1.00 V	260	43.80	18.80
7	11510.00	50.4 AV	54.0	-3.6	1.00 V	260	31.60	18.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	111.0 PK			1.00 H	264	70.80	40.20
2	*5795.00	100.4 AV			1.00 H	264	60.20	40.20
3	#5852.10	71.4 PK	78.2	-6.8	1.00 H	264	64.90	6.50
4	#5860.10	72.3 PK	74.0	-1.7	1.00 H	264	65.80	6.50
5	#5860.10	53.5 AV	54.0	-0.5	1.00 H	264	47.00	6.50
6	11590.00	64.3 PK	74.0	-9.7	1.00 H	225	45.40	18.90
7	11590.00	51.7 AV	54.0	-2.3	1.00 H	225	32.80	18.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	111.5 PK			1.18 V	139	71.30	40.20
2	*5795.00	101.1 AV			1.18 V	139	60.90	40.20
3	#5852.10	74.1 PK	78.2	-4.1	1.18 V	139	67.60	6.50
4	#5860.10	71.8 PK	74.0	-2.2	1.18 V	139	65.30	6.50
5	#5860.10	53.9 AV	54.0	-0.1	1.18 V	139	47.40	6.50
6	11590.00	66.9 PK	74.0	-7.1	1.00 V	142	48.00	18.90
7	11590.00	53.5 AV	54.0	-0.5	1.00 V	142	34.60	18.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

BELOW 1GHz WORST-CASE DATA

802.11n (20MHz)

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.89	25.0 QP	40.0	-15.0	3.00 H	278	39.90	-14.90
2	187.07	30.5 QP	43.5	-13.0	1.49 H	117	46.50	-16.00
3	266.63	32.8 QP	46.0	-13.2	1.00 H	89	46.40	-13.60
4	375.29	32.9 QP	46.0	-13.1	1.00 H	293	44.00	-11.10
5	625.60	36.5 QP	46.0	-9.5	1.24 H	257	42.60	-6.10
6	875.91	33.1 QP	46.0	-12.9	1.49 H	146	35.10	-2.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.89	35.5 QP	40.0	-4.5	1.00 V	319	50.40	-14.90
2	107.52	30.1 QP	43.5	-13.4	1.75 V	251	47.50	-17.40
3	375.29	32.8 QP	46.0	-13.2	1.25 V	230	43.90	-11.10
4	474.25	35.3 QP	46.0	-10.7	1.00 V	289	44.60	-9.30
5	600.38	35.8 QP	46.0	-10.2	1.49 V	7	42.60	-6.80
6	875.91	37.7 QP	46.0	-8.3	1.25 V	263	39.70	-2.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	128.86	29.0 QP	43.5	-14.5	1.49 H	297	44.30	-15.30
2	239.46	36.8 QP	46.0	-9.2	1.00 H	314	51.60	-14.80
3	315.14	33.8 QP	46.0	-12.2	1.25 H	100	45.80	-12.00
4	600.38	34.2 QP	46.0	-11.8	1.49 H	228	41.00	-6.80
5	625.60	34.8 QP	46.0	-11.2	1.49 H	12	40.90	-6.10
6	825.46	34.8 QP	46.0	-11.2	2.00 H	19	37.50	-2.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.66	30.0 QP	40.0	-10.0	1.00 V	322	44.90	-14.90
2	57.07	29.3 QP	40.0	-10.7	2.00 V	339	43.60	-14.30
3	299.62	31.1 QP	46.0	-14.9	1.50 V	8	43.50	-12.40
4	553.81	27.8 QP	46.0	-18.2	1.25 V	137	35.90	-8.10
5	598.44	30.4 QP	46.0	-15.6	1.00 V	121	37.30	-6.90
6	825.46	36.0 QP	46.0	-10.0	1.00 V	13	38.70	-2.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 29, 2013	Nov. 28, 2014
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 27, 2013	Dec. 26, 2014
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 13, 2014	Feb. 12, 2015
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 17, 2013	Jul. 16, 2014
			Jul. 21, 2014	Jul. 20, 2015
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

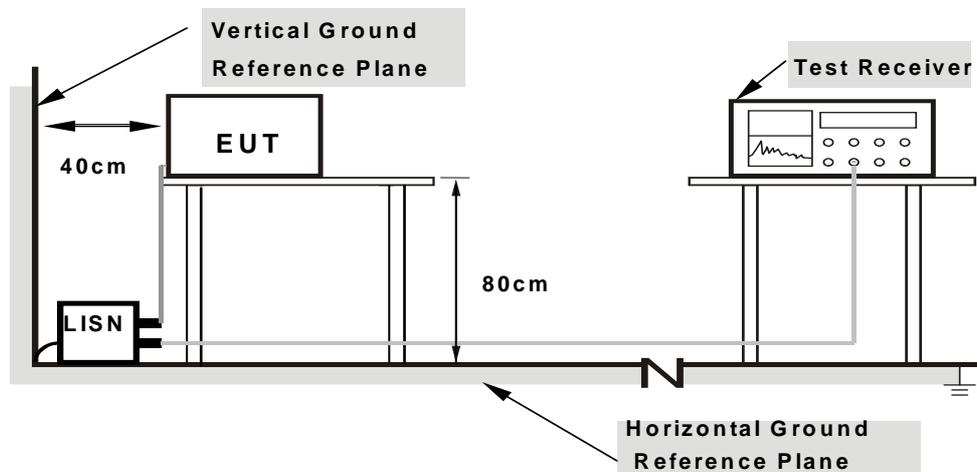

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.7.


4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA : 802.11n (20MHz)

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.21282	0.09	47.14	39.63	47.23	39.72	63.09	53.09	-15.86	-13.37
2	0.28685	0.10	40.04	31.87	40.14	31.97	60.62	50.62	-20.48	-18.65
3	0.34550	0.10	28.78	16.14	28.88	16.24	59.07	49.07	-30.19	-32.83
4	0.48626	0.12	32.43	20.60	32.55	20.72	56.23	46.23	-23.68	-25.51
5	11.25049	0.62	32.07	25.85	32.69	26.47	60.00	50.00	-27.31	-23.53
6	17.89358	0.99	35.92	30.23	36.91	31.22	60.00	50.00	-23.09	-18.78


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

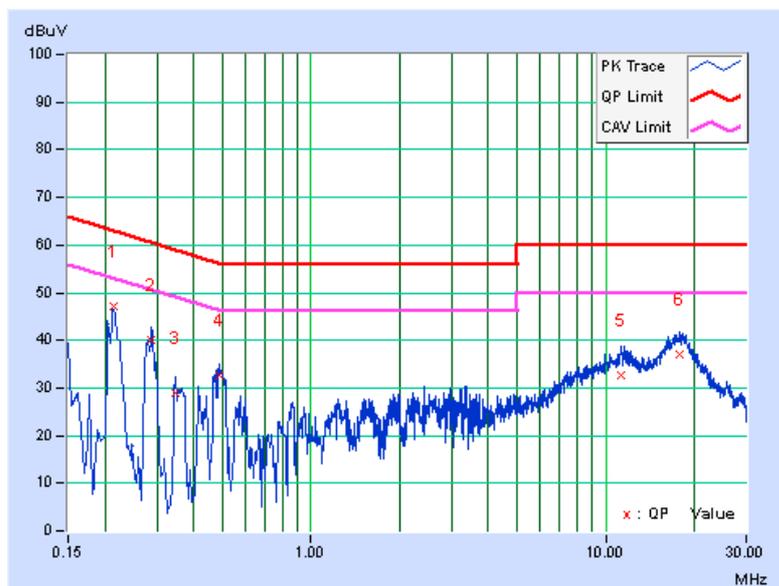

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.21647	0.10	48.35	41.67	48.45	41.77	62.95	52.95	-14.51	-11.19
2	0.27553	0.12	43.12	31.77	43.24	31.89	60.95	50.95	-17.71	-19.06
3	0.36048	0.15	32.99	24.51	33.14	24.66	58.72	48.72	-25.57	-24.05
4	0.49454	0.18	39.77	30.27	39.95	30.45	56.09	46.09	-16.14	-15.64
5	0.58010	0.19	34.45	25.12	34.64	25.31	56.00	46.00	-21.36	-20.69
6	17.74500	0.91	36.09	30.40	37.00	31.31	60.00	50.00	-23.00	-18.69

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

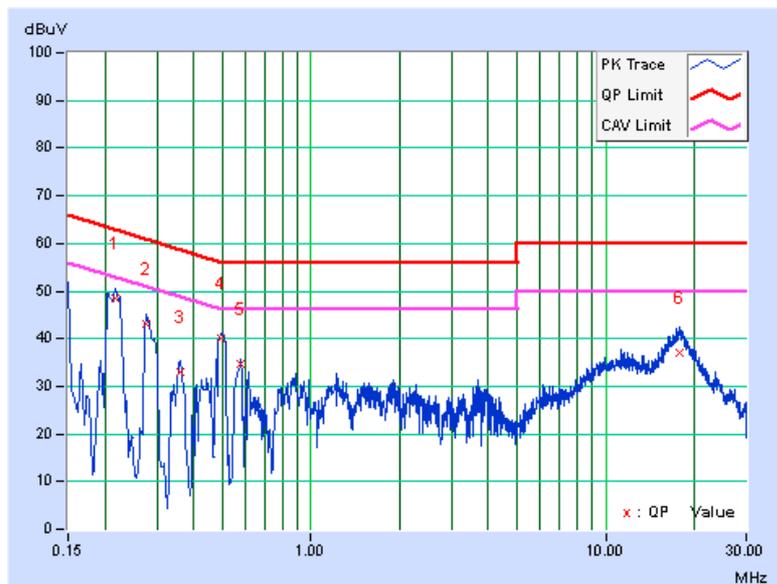




PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16955	0.10	40.97	32.89	41.07	32.99	64.98	54.98	-23.91	-21.99
2	0.42370	0.11	31.86	25.02	31.97	25.13	57.38	47.38	-25.40	-22.24
3	4.85373	0.30	22.88	15.46	23.18	15.76	56.00	46.00	-32.82	-30.24
4	16.23183	0.90	27.54	19.97	28.44	20.87	60.00	50.00	-31.56	-29.13
5	20.66968	1.13	28.28	19.13	29.41	20.26	60.00	50.00	-30.59	-29.74
6	24.27079	1.24	27.69	20.49	28.93	21.73	60.00	50.00	-31.07	-28.27

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

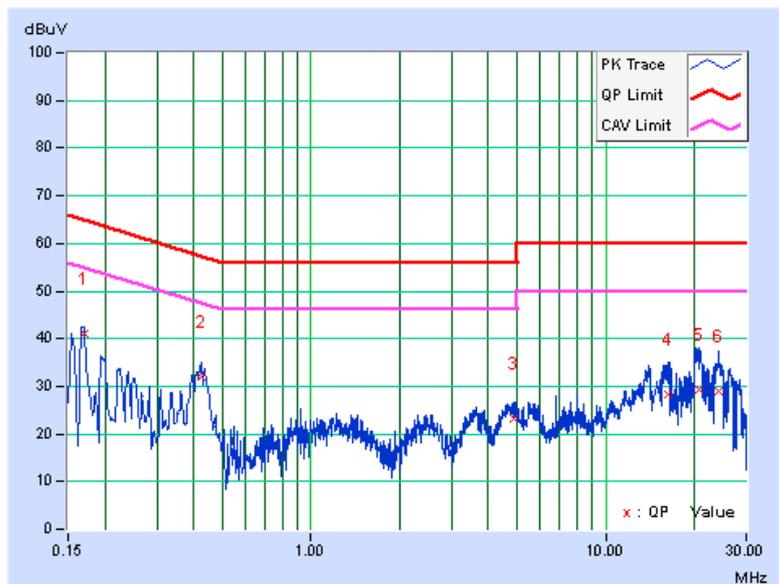




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16955	0.07	40.14	26.29	40.21	26.36	64.98	54.98	-24.78	-28.63
2	0.25166	0.11	34.28	24.19	34.39	24.30	61.70	51.70	-27.31	-27.40
3	0.43152	0.17	32.94	21.48	33.11	21.65	57.22	47.22	-24.11	-25.57
4	4.64650	0.29	17.36	11.35	17.65	11.64	56.00	46.00	-38.35	-34.36
5	17.69026	0.91	25.90	18.16	26.81	19.07	60.00	50.00	-33.19	-30.93
6	24.63442	1.13	28.90	16.71	30.03	17.84	60.00	50.00	-29.97	-32.16

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

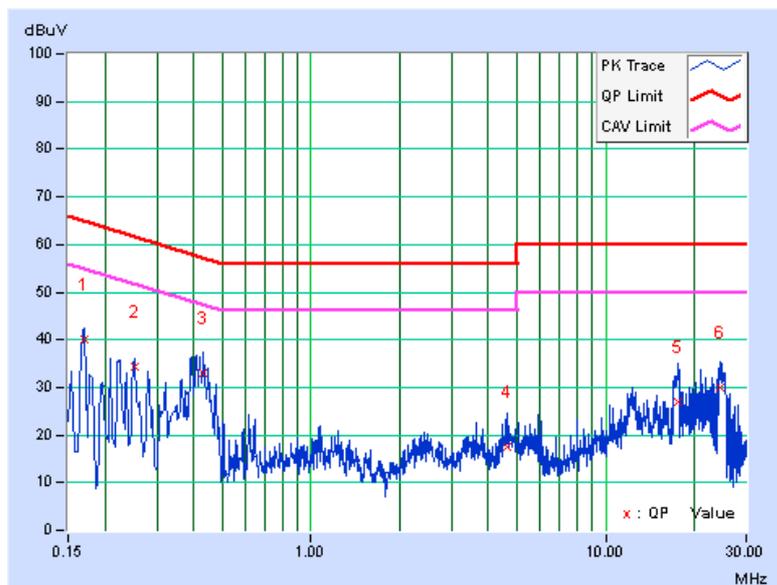

4.3 TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A		---	250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C		---	250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√	---	1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 D01 Multiple Transmitter Output v02r01 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for NANT \leq 4;

Array Gain = 0 dB (i.e., no array gain) for channel widths \geq 40 MHz for any NANT;

Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT \geq 5.

For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.

4.3.2 TEST SETUP

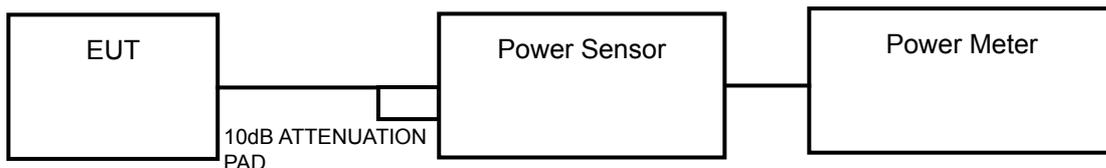

4.3.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.3.4 TEST PROCEDURE

FOR AVERAGE POWER MEASUREMENT

For 802.11a, 802.11n (20MHz), 802.11n (40MHz)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



4.3.7 TEST RESULTS

POWER OUTPUT:

802.11a

CHAN.	FREQ. (MHz)	MAXIMUM CONDUCTED POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	11.01	10.98	25.149	14.01	30	PASS
40	5200	10.36	10.17	21.263	13.28	30	PASS
48	5240	9.49	9.39	17.582	12.45	30	PASS
149	5745	17.21	17.10	103.888	20.17	30	PASS
157	5785	17.78	18.03	123.512	20.92	30	PASS
165	5825	18.13	17.97	127.674	21.06	30	PASS

802.11n (20MHz)

CHAN.	FREQ. (MHz)	MAXIMUM CONDUCTED POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	12.28	11.81	32.075	15.06	30	PASS
40	5200	11.31	10.69	25.243	14.02	30	PASS
48	5240	11.12	10.61	24.450	13.88	30	PASS
149	5745	16.01	15.77	77.659	18.90	30	PASS
157	5785	18.05	17.84	124.640	20.96	30	PASS
165	5825	18.25	17.88	128.210	21.08	30	PASS

802.11n (40MHz)


CHAN.	FREQ. (MHz)	MAXIMUM CONDUCTED POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
38	5190	12.96	12.11	36.025	15.57	30	PASS
46	5230	12.81	11.90	34.587	15.39	30	PASS
151	5755	15.85	15.95	77.814	18.91	30	PASS
159	5795	19.72	19.62	185.378	22.68	30	PASS

4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Mobile and Portable client device	
U-NII-2A		---	11dBm/ MHz
U-NII-2C		---	11dBm/ MHz
U-NII-3	√	---	30dBm/ MHz

4.4.2 TEST SETUP



4.4.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.4.4 TEST PROCEDURES

For U-NII-1 band:

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 30 kHz, Set VBW ≥ 1 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to “free run”.
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add 10 log (1/duty cycle)

For U-NII-3 band:

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 500 kHz, Set VBW \geq 3 RBW, Detector = RMS
- 3) Sweep time = auto, trigger set to “free run”.
- 4) Trace average at least 100 traces in power averaging mode.
- 5) Record the max value and add $10 \log (1/\text{duty cycle})$
- 6) Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where
$$\text{BWCF} = 10\log(500 \text{ kHz}/300\text{kHz})$$

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6.

4.4.7 TEST RESULTS

For U-NII-1 band

802.11a

CHAN.	FREQ. (MHz)	PSD (dBm)		TOTAL PSD W/O DUTY FACTOR (dBm)	DUTY FACTOR	TOTAL PSD WITH DUTY FACTOR (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1					
36	5180	-3.11	-3.71	-0.39	0.11	-0.28	16.99	PASS
40	5200	-3.62	-4.09	-0.84	0.11	-0.73	16.99	PASS
48	5240	-4.41	-3.99	-1.19	0.11	-1.08	16.99	PASS

NOTE: 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

2. For U-NII-1 Band:

Directional gain = $3\text{dBi} + 10\log(2) = 6.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(6.01-6) = 16.99\text{dBm}$.

3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (20MHz)

CHAN.	FREQ. (MHz)	PSD (dBm)		TOTAL PSD W/O DUTY FACTOR (dBm)	DUTY FACTOR	TOTAL PSD WITH DUTY FACTOR (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1					
36	5180	-3.00	-3.82	-0.38	0.16	-0.22	16.99	PASS
40	5200	-4.34	-4.62	-1.46	0.16	-1.30	16.99	PASS
48	5240	-4.01	-4.44	-1.21	0.16	-1.05	16.99	PASS

NOTE: 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

2. For U-NII-1 Band:

Directional gain = $3\text{dBi} + 10\log(2) = 6.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(6.01-6) = 16.99\text{dBm}$.

3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (40MHz)


CHAN.	FREQ. (MHz)	PSD (dBm)		TOTAL PSD W/O DUTY FACTOR (dBm)	DUTY FACTOR	TOTAL PSD WITH DUTY FACTOR (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1					
38	5190	-5.39	-6.07	-2.70	0.20	-2.50	16.99	PASS
46	5230	-5.30	-5.90	-2.58	0.20	-2.38	16.99	PASS

NOTE: 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

2. For U-NII-1 Band:

Directional gain = 3dBi + 10log(2) = 6.01dBi > 6dBi , so the power density limit shall be reduced to 17-(6.01-6) = 16.99dBm.

3. Refer to section 3.3 for duty cycle spectrum plot.

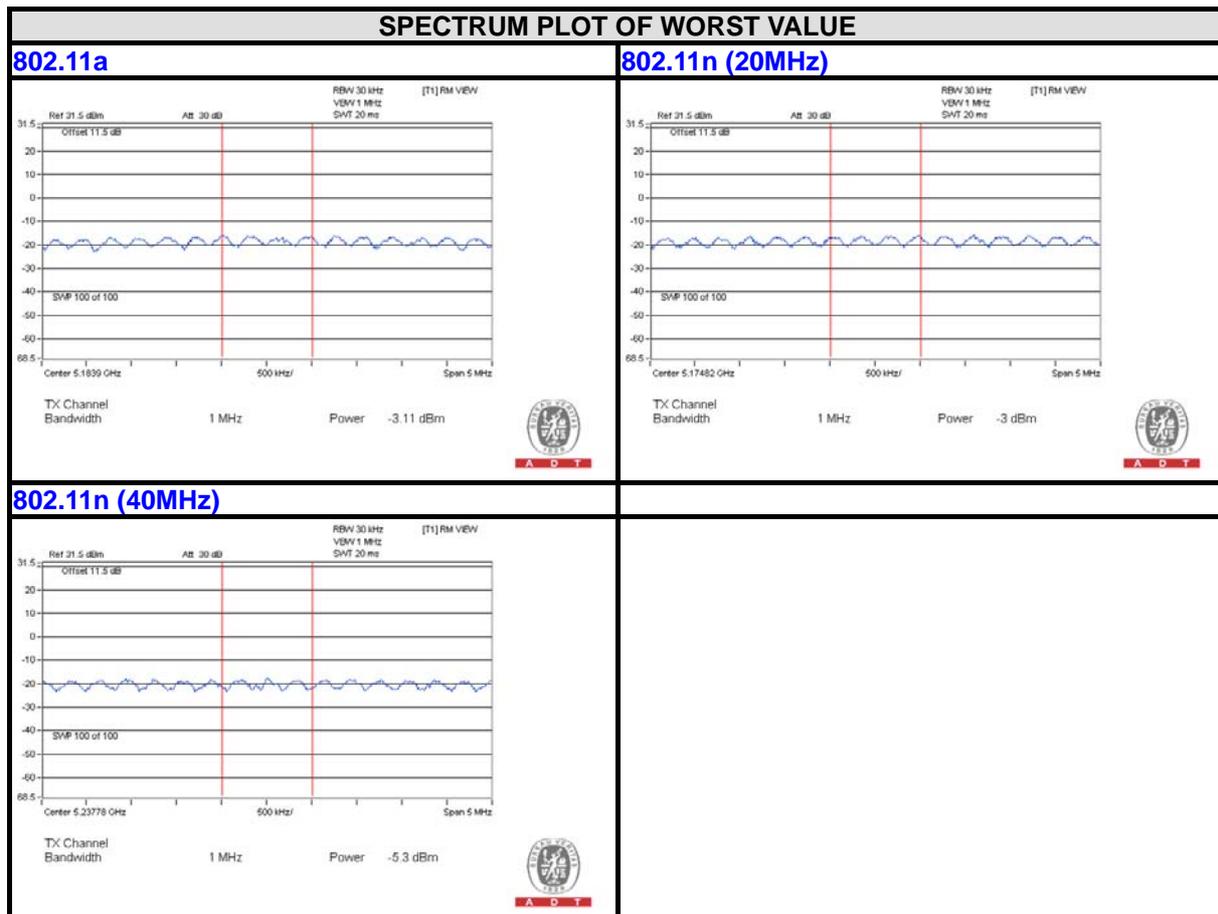

For U-NII-3 band

802.11a

TX chain	Channel	Freq. (MHz)	PSD (dBm/300 kHz)	PSD (dBm/500 kHz)	10 log (N=3) dB	Duty Factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	PASS /FAIL
0	149	5745	-6.93	-4.71	3.01	0.11	-1.81	29.99	PASS
	157	5785	-5.92	-3.70	3.01	0.11	-0.80	29.99	PASS
	165	5825	-5.85	-3.63	3.01	0.11	-0.73	29.99	PASS
1	149	5745	-6.74	-4.52	3.01	0.11	-1.62	29.99	PASS
	157	5785	-5.91	-3.69	3.01	0.11	-0.79	29.99	PASS
	165	5825	-6.09	-3.87	3.01	0.11	-0.97	29.99	PASS

NOTE: Directional gain = $3\text{dBi} + 10\log(2) = 6.01 > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (6.01 - 6) = 29.99\text{dBm}$.

802.11n (20MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300 kHz)	PSD (dBm/500 kHz)	10 log (N=3) dB	Duty Factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	PASS /FAIL
0	149	5745	-7.96	-5.74	3.01	0.12	-2.85	29.99	PASS
	157	5785	-6.29	-4.07	3.01	0.12	-1.18	29.99	PASS
	165	5825	-6.24	-4.02	3.01	0.12	-1.13	29.99	PASS
1	149	5745	-8.63	-6.41	3.01	0.12	-3.52	29.99	PASS
	157	5785	-6.49	-4.27	3.01	0.12	-1.38	29.99	PASS
	165	5825	-6.35	-4.13	3.01	0.12	-1.24	29.99	PASS

NOTE: Directional gain = $3\text{dBi} + 10\log(2) = 6.01 > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (6.01 - 6) = 29.99\text{dBm}$.

802.11n (40MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300 kHz)	PSD (dBm/500 kHz)	10 log (N=3) dB	Duty Factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	PASS /FAIL
0	151	5755	-11.91	-9.69	3.01	0.16	-6.84	29.99	PASS
	159	5795	-8.00	-5.78	3.01	0.16	-2.93	29.99	PASS
1	151	5755	-12.52	-10.30	3.01	0.16	-7.45	29.99	PASS
	159	5795	-8.40	-6.18	3.01	0.16	-3.33	29.99	PASS


NOTE: Directional gain = $3\text{dBi} + 10\log(2) = 6.01 > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (6.01 - 6) = 29.99\text{dBm}$.




A D T

SPECTRUM PLOT OF WORST VALUE


802.11a

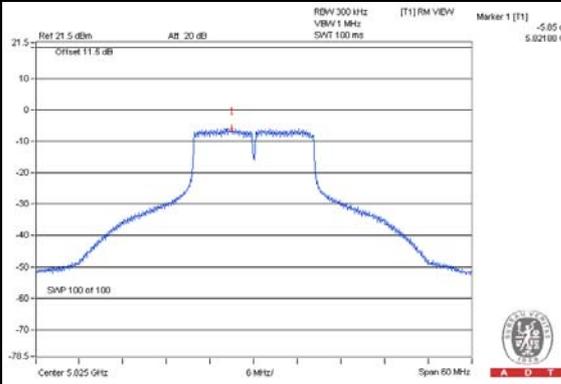

802.11n (20MHz)

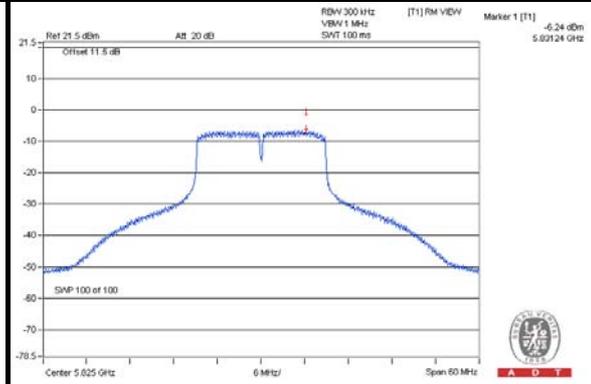

802.11n (40MHz)

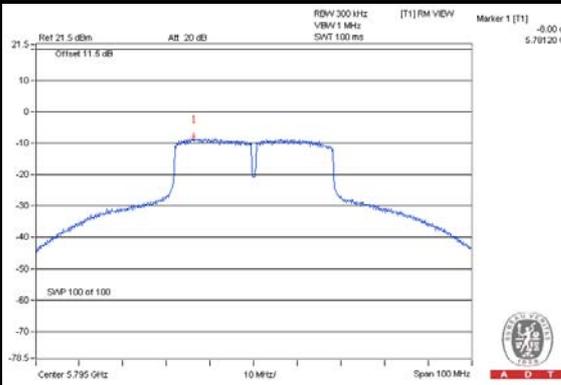


4.5 FREQUENCY STABILITY

4.5.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

4.5.2 TEST SETUP

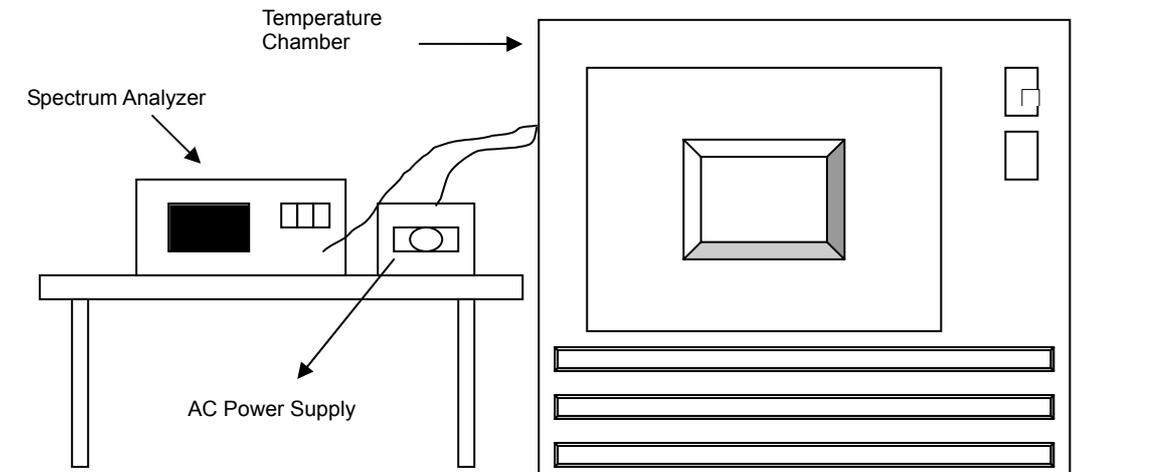

4.5.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.5.4 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



4.5.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5240MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)						
50	120	5240.0223	0.00043	5240.0185	0.00035	5240.0204	0.00039	5240.0212	0.00040
40	120	5239.9964	-0.00007	5240.0011	0.00002	5239.9994	-0.00001	5239.9985	-0.00003
30	120	5240.0023	0.00004	5240.0043	0.00008	5240.0039	0.00007	5240.0048	0.00009
20	120	5240.0094	0.00018	5240.0094	0.00018	5240.0094	0.00018	5240.0064	0.00012
10	120	5240.0002	0.00000	5239.9995	-0.00001	5240	0.00000	5240.0012	0.00002
0	120	5239.9866	-0.00026	5239.9842	-0.00030	5239.9847	-0.00029	5239.9868	-0.00025
-10	120	5240.0176	0.00034	5240.0147	0.00028	5240.0156	0.00030	5240.0164	0.00031
-20	120	5240.0055	0.00010	5240.0079	0.00015	5240.0042	0.00008	5240.007	0.00013
-30	120	5239.9978	-0.00004	5240.0014	0.00003	5239.9993	-0.00001	5239.9984	-0.00003


FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5240MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)						
20	138	5240.0102	0.00019	5240.0104	0.00020	5240.0094	0.00018	5240.0073	0.00014
	120	5240.0094	0.00018	5240.0094	0.00018	5240.0094	0.00018	5240.0064	0.00012
	102	5240.0091	0.00017	5240.0099	0.00019	5240.0091	0.00017	5240.0063	0.00012

4.6 6dB BANDWIDTH MEASUREMENT

4.6.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.6.2 TEST SETUP



4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.6.7 TEST RESULTS

802.11a

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	16.37	16.36	0.5	PASS
157	5785	16.32	16.36	0.5	PASS
165	5825	16.34	16.38	0.5	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	17.57	17.56	0.5	PASS
157	5785	17.24	17.32	0.5	PASS
165	5825	17.56	17.10	0.5	PASS

802.11n (40MHz)


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
151	5755	35.91	36.10	0.5	PASS
159	5795	36.14	35.78	0.5	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11a

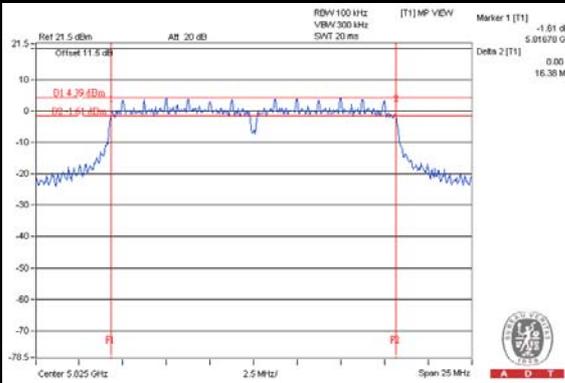

802.11n (20MHz)

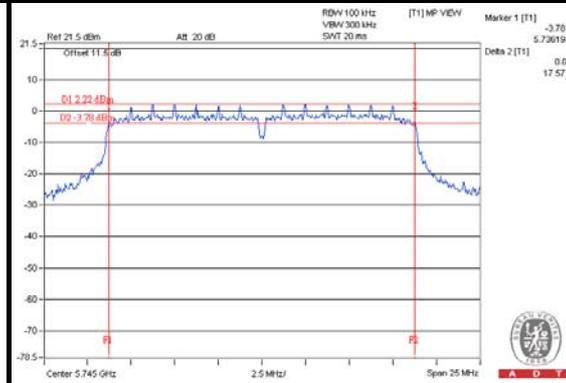

802.11n (40MHz)

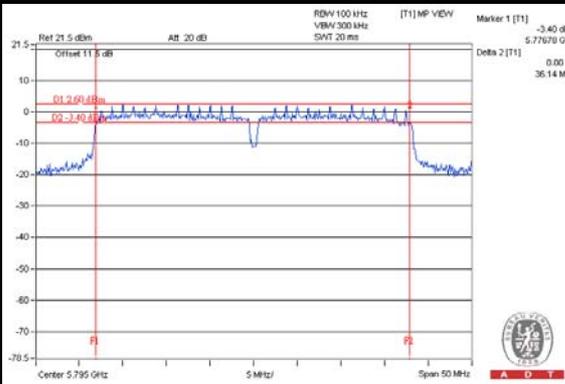

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---