

FCC Test Report

Report No.: RF141106E03B-1

FCC ID: PY314300292

Test Model: C6250

Received Date: July 16, 2015

Test Date: July 31 to Aug. 04, 2015

Issued Date: Sep. 10, 2015

Applicant: NETGEAR, Inc.

Address: 350 East Plumeria Drive San Jose, CA 95134

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.

Test Location (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.

Test Location (3): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City, Taiwan
R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	10
3.2.1 Test Mode Applicability and Tested Channel Detail.....	11
3.3 Duty Cycle of Test Signal.....	13
3.4 Description of Support Units.....	14
3.4.1 Configuration of System under Test.....	15
3.5 General Description of Applied Standard.....	16
4 Test Types and Results	17
4.1 Radiated Emission and Bandedge Measurement.....	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	17
4.1.2 Test Instruments.....	18
4.1.3 Test Procedure.....	19
4.1.4 Deviation from Test Standard.....	19
4.1.5 Test Setup.....	20
4.1.6 EUT Operating Condition.....	20
4.1.7 Test Results.....	21
4.2 Transmit Power Measurement.....	31
4.2.1 Limits of Transmit Power Measurement.....	31
4.2.2 Test Setup.....	31
4.2.3 Test Instruments.....	31
4.2.4 Test Procedure.....	31
4.2.5 Deviation from Test Standard.....	31
4.2.6 EUT Operating Condition.....	31
4.2.7 Test Result.....	32
4.3 Peak Power Spectral Density Measurement.....	33
4.3.1 Limits of Peak Power Spectral Density Measurement.....	33
4.3.2 Test Setup.....	33
4.3.3 Test Instruments.....	33
4.3.4 Test Procedure.....	33
4.3.5 Deviation from Test Standard.....	34
4.3.6 EUT Operating Condition.....	34
4.3.7 Test Results.....	35
4.4 Frequency Stability Measurement.....	38
4.4.1 Limits of Frequency Stability Measurement.....	38
4.4.2 Test Setup.....	38
4.4.3 Test Instruments.....	38
4.4.4 Test Procedure.....	38
4.4.5 Deviation from Test Standard.....	38
4.4.6 EUT Operating Condition.....	38
4.4.7 Test Results.....	39
4.5 6dB Bandwidth Measurement.....	40
4.5.1 Limits of 6dB Bandwidth Measurement.....	40
4.5.2 Test Setup.....	40
4.5.3 Test Instruments.....	40
4.5.4 Test Procedure.....	40
4.5.5 Deviation from Test Standard.....	40
4.5.6 EUT Operating Condition.....	40



4.5.7 Test Results	41
5 Pictures of Test Arrangements.....	43
Appendix – Information on the Testing Laboratories	44



A D T

Release Control Record

Issue No.	Description	Date Issued
RF141106E03B-1	Original release.	Sep. 10, 2015

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (SECTION 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b) (1/2/3/4/6)	Radiated Emissions & Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.2dB at 5850.00MHz & 5715.00MHz
15.407(a)(1/2 /3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
15.407(a)(1/2 /3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is i-pex(MHF) not a standard connector.

Note: This report is prepared for FCC Class II change. (U-NII-3 band: upgrade the standard to section 15.407)

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.37 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.65 dB
	6GHz ~ 18GHz	3.88 dB
	18GHz ~ 40GHz	4.11 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Wireless Cable Gateway
Brand	NETGEAR
Test Model	C6250
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 12V from adapter power
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a: up to 54Mbps 802.11n: up to 450Mbps 802.11ac: up to 1300Mbps
Operating Frequency	For 15.407 5.18 ~ 5.24GHz, 5.745 ~ 5.825GHz
	For 15.247 2.412 ~ 2.462GHz
Number of Channel	For 15.407 9 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 4 for 802.11n (HT40), 802.11ac (VHT40) 2 for 802.11ac (VHT80)
	For 15.247 11 for 802.11b, 802.11g, 802.11n (HT20), VHT20 7 for 802.11n (HT40), VHT40
Output Power	For 15.407 (U-NII-3 band) CDD Mode: 802.11a: 428.828mW Beamforming Mode: 802.11ac (VHT20): 438.619mW 802.11ac (VHT40): 131.623mW 802.11ac (VHT80): 49.91mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	RJ-45 cable (Unshielded or Shielded, 1.5m)

Note:

- This report is prepared for FCC Class II change. The difference compared with the original report design is as the following:
 - ◆ Upgrade the standard to section 15.407 under new rule for U-NII-3 band.
- According to above conditions, all test items of U-NII-3 band test item need to be performed, except for AC power conducted emission test item. And all data was verified to meet the requirements.
- 2.4GHz and 5GHz technology can transmit at same time.
- The emission of the simultaneous operation (2.4GHz & 5GHz) has been evaluated and no non-compliance was found.

5. The EUT must be supplied with a adapter, there are two different models could be chosen as following table:

No	Brand	Model No.	P/N No.	Spec.
1	NETGEAR	P030WF120B	332-10200-02	Input: 100-240V, 1.0A, 50-60Hz Output: 12V, 2.5A DC output cable (Unshielded, 1.8m)
2	NETGEAR	SAS030F1 NA	332-10451-01	Input: 100-120V, 0.9A, 47-63Hz Output: 12V, 2.5A DC output cable (Unshielded, 1.8m)
3	NETGEAR	ADS-40FPA-12 12030GPCU	332-10757-01	Input: 100-240V, 1.0A, 50/60Hz Output: 12V, 2.5A DC output cable (Unshielded, 1.8m)
4	NETGEAR	2ABL030F 1 NA	332-10758-01	Input: 100-240V, 1.0A, 50/60Hz Output: 12V, 2.5A DC output cable (Unshielded, 1.8m)

In original report, for radiated test, the EUT was pre-tested with above adapters, the worse case was found in **adapter 1**. Therefore only the test data of the adapter was recorded in this report.

6. The antennas provided to the EUT, please refer to the following table:

2.4GHz							
PCB Chain No.	Brand	Model	Antenna Gain(dBi) < including cable loss>	Frequency range	Antenna Type	Connector Type	Cable Length (mm)
Chain 0	Netgear	NA	3.8	2.4~2.4835 GHz	PCB	i-pex(MHF)	125
Chain 1	Netgear	NA	3.3	2.4~2.4835 GHz	PCB	i-pex(MHF)	250
5GHz							
PCB Chain No.	Brand	Model	Antenna Gain(dBi) < including cable loss>	Frequency range	Antenna Type	Connector Type	Cable Length (mm)
Chain 0	Netgear	NA	3.5	5.15~5.85 GHz	PCB	i-pex(MHF)	113
Chain 1	Netgear	NA	3.6	5.15~5.85 GHz	PCB	i-pex(MHF)	125
Chain 2	Netgear	NA	2.8	5.15~5.85 GHz	PCB	i-pex(MHF)	75

7. The EUT incorporates a MIMO function.

2.4GHz			
MODULATION MODE	DATA RATE (MCS)	TX / RX CONFIGURATION	
802.11b	1 ~ 11Mbps	1TX (Fixed Chain 1)	2RX
802.11g	6 ~ 54Mbps	2TX	2RX
802.11n (HT20) & 802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
5GHz			
MODULATION MODE	DATA RATE (MCS)	TX / RX CONFIGURATION	
802.11a	6 ~ 54Mbps	3TX	3RX
802.11n (HT20) & 802.11n (HT40)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
802.11ac (VHT20)	MCS0~8 Nss= 1	3TX	3RX
	MCS0~8 Nss= 2	3TX	3RX
	MCS0~9 Nss= 3	3TX	3RX
802.11ac (VHT40) & 802.11ac (VHT80)	MCS0~9 Nss= 1	3TX	3RX
	MCS0~9 Nss= 2	3TX	3RX
	MCS0~9 Nss= 3	3TX	3RX

Note: The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

8. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	-	√	-

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE:

1. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD MODE						
MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
Beamforming MODE						
MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11ac (VHT20)	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)		155	155	OFDM	BPSK	29.3

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Beamforming MODE						
MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11ac (VHT20)	5745-5825	149 to 165	157	OFDM	BPSK	6.5

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD MODE						
MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
Beamforming MODE						
MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11ac (VHT20)	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)		155	155	OFDM	BPSK	29.3

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	19deg. C, 64%RH	120Vac, 60Hz	Tim Ho
RE<1G	28deg. C, 66%RH	120Vac, 60Hz	Weiwei Lo
APCM	25deg. C, 60%RH	120Vac, 60Hz	Gary Cheng

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.



If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11a: Duty cycle = $2.06 \text{ ms} / 2.098 \text{ ms} = 0.982$

802.11ac (VHT20): Duty cycle = $1.926 \text{ ms} / 1.948 \text{ ms} = 0.989$

802.11ac (VHT40): Duty cycle = $0.95 \text{ ms} / 0.969 \text{ ms} = 0.98$

802.11ac (VHT80): Duty cycle = $0.461 \text{ ms} / 0.479 \text{ ms} = 0.962$, Duty factor = $10 * \log(1/0.962) = 0.17$

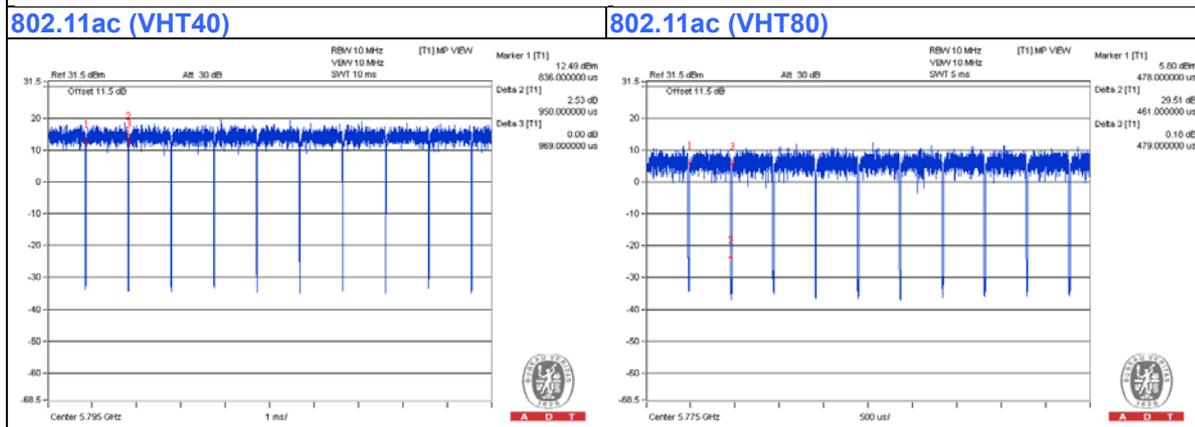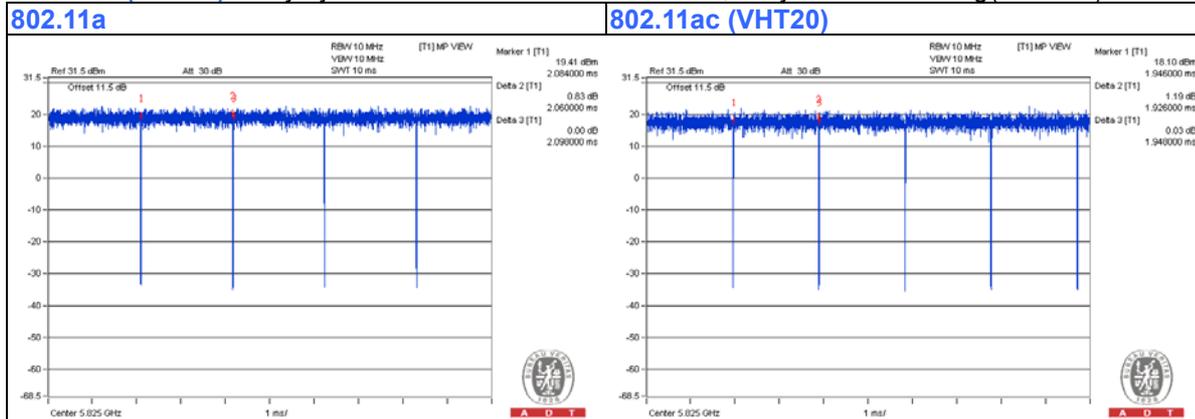

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


No.	Product	Brand	Model No.	Serial No.	FCC ID	Remark
A	iPod shuffle	Apple	MC749TA/A	CC4DN25WDFD M	NA	Provided by Lab
B	NOTEBOOK COMPUTER	DELL	PP32LA	HSLB32S	FCC DoC	Provided by Lab
C	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC	Provided by Lab

NOTE:

1. All power cords of the above support units are non-shielded (1.8 m).

No.	Cable	Qty.	Length (m)	Shielded (Yes/ No)	Cores (Number)	Remark
1	DC	1	1.8	No	0	Supplied by client
2	USB	1	0.1	Yes	0	Provided by Lab
3	Coaxial	1	10	No	0	Provided by Lab
4	RJ-45	1	10	No	0	Provided by Lab

3.4.1 Configuration of System under Test

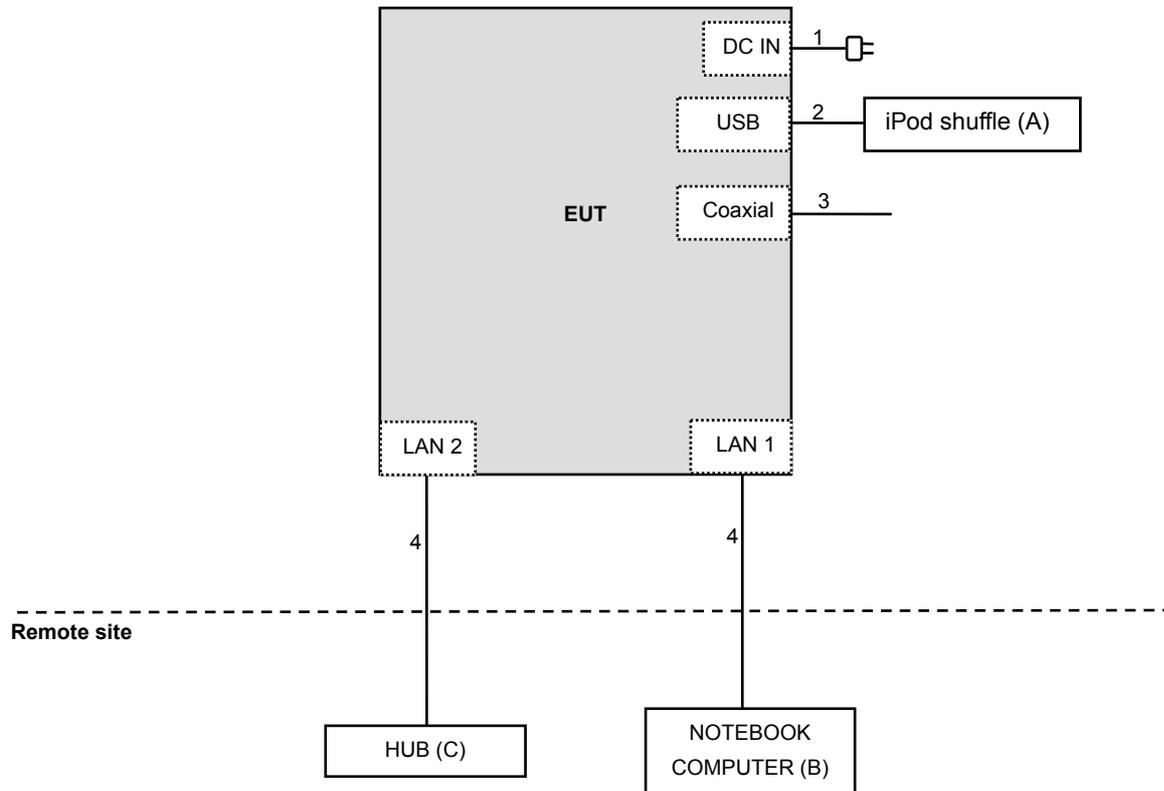

3.5 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)
789033 D02 General UNII Test Procedure New Rules v01
662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedure New Rules v01	FIELD STRENGTH AT 3m	
	PK:74 (dBuV/m)	AV:54 (dBuV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBuV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)	PK:-27 (dBm/MHz) ^{*1} PK:-17 (dBm/MHz) ^{*2}	PK: 68.2(dBuV/m) ^{*1} PK:78.2 (dBuV/m) ^{*2}

NOTE: ^{*1} beyond 10MHz of the band edge ^{*2} within 10 MHz of band edge

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$



4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 12, 2014	Dec. 11, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 12, 2014	Nov. 11, 2015
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 06, 2015	Feb. 05, 2016
RF Cable	8D-FB	CHGCAB-001-1 CHGCAB-001-2	Oct. 04, 2014	Oct. 03, 2015
	RF-141	CHGCAB-004	Oct. 04, 2014	Oct. 03, 2015
Horn_Antenna AISI	AIH.8018	0000320091110	Feb. 09, 2015	Feb. 08, 2016
Pre-Amplifier Agilent	8449B	3008A02578	June 23, 2015	June 22, 2016
RF Cable	NA	131205 131216 131217 SNMY23684/4	Jan. 16, 2015	Jan. 15, 2016
Spectrum Analyzer R&S	FSV40	100964	June 26, 2015	June 25, 2016
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Dec. 12, 2014	Dec. 11, 2015
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Feb. 05, 2015	Feb. 04, 2016
RF Cable	NA	329751/4 RF104-204	Dec. 11, 2014	Dec. 10, 2015
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA
SPECTRUM ANALYZER R&S	FSV 40	100964	June 26, 2015	June 25, 2016
Temperature & Humidity Chamber GIANTFORCE	GTH-150-40-S P-AR	MAA0812-008	Jan. 12, 2015	Jan. 11, 2016
Power Meter Anritsu	ML2495A	1014008	Apr. 28, 2015	Apr. 27, 2016
Power Sensor Anritsu	MA2411B	0917122	Apr. 28, 2015	Apr. 27, 2016

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. G.
3. The FCC Site Registration No. is 966073.
4. The VCCI Site Registration No. is G-137.
5. The CANADA Site Registration No. is IC 7450H-2.
6. Tested Date: July 31 to Aug. 04, 2015

4.1.3 Test Procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle \geq 98%) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup

<Frequency Range below 1GHz>

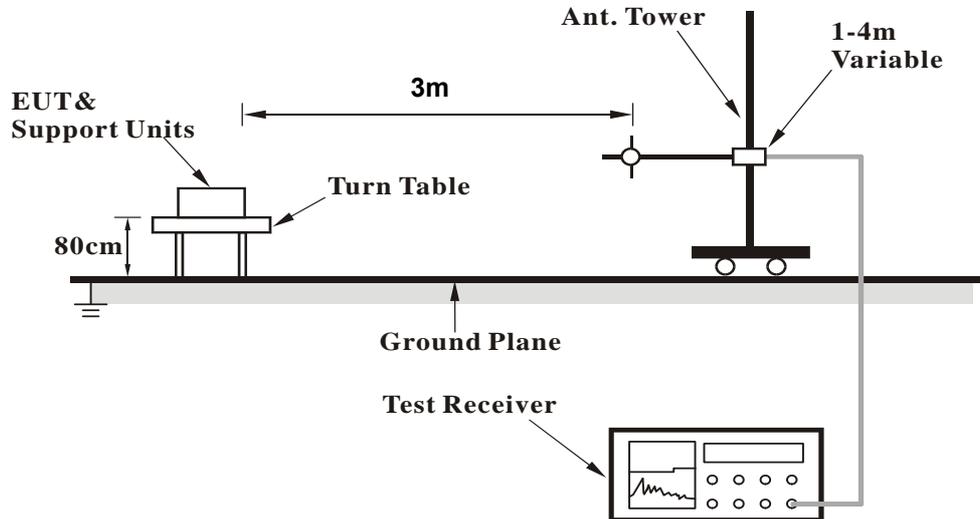

<Frequency Range above 1GHz>

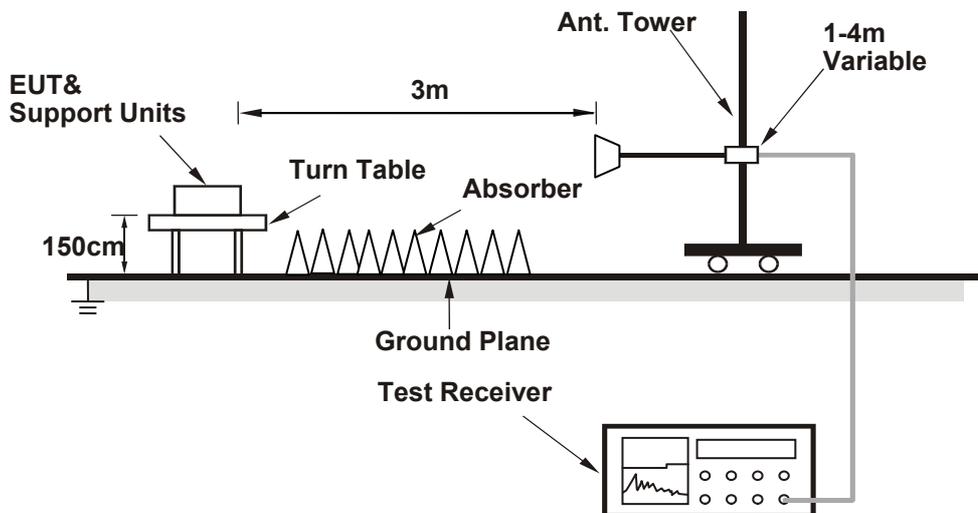

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Condition

1. Placed the EUT on testing table.
2. Prepared computer system (support unit B) to act as communication partner.
3. The communication partner ran test program (MTool.exe) to enable EUT under transmission/receiving condition continuously.

4.1.7 Test Results
Above 1GHz Data
CDD Mode
802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5664.00	58.5 PK	74.0	-15.5	1.06 H	247	48.96	9.54
2	#5664.00	47.4 AV	54.0	-6.6	1.06 H	247	37.86	9.54
3	#5725.00	74.7 PK	78.2	-3.5	1.05 H	262	65.00	9.70
4	*5745.00	108.8 PK			1.06 H	256	99.04	9.76
5	*5745.00	98.6 AV			1.06 H	256	88.84	9.76
6	#5984.00	55.6 PK	74.0	-18.4	1.03 H	271	45.27	10.33
7	#5984.00	46.5 AV	54.0	-7.5	1.03 H	271	36.17	10.33
8	11490.00	60.0 PK	74.0	-14.0	1.12 H	28	45.14	14.86
9	11490.00	47.4 AV	54.0	-6.6	1.12 H	28	32.54	14.86
10	#17235.00	65.4 PK	74.0	-8.6	1.14 H	151	42.17	23.23
11	#17235.00	51.9 AV	54.0	-2.1	1.14 H	151	28.67	23.23

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5664.00	62.1 PK	74.0	-11.9	1.03 V	193	52.56	9.54
2	#5664.00	50.8 AV	54.0	-3.2	1.03 V	193	41.26	9.54
3	#5725.00	77.3 PK	78.2	-0.9	1.01 V	196	67.60	9.70
4	*5745.00	115.7 PK			1.01 V	196	105.94	9.76
5	*5745.00	105.6 AV			1.01 V	196	95.84	9.76
6	#5984.00	59.1 PK	74.0	-14.9	1.00 V	258	48.77	10.33
7	#5984.00	49.9 AV	54.0	-4.1	1.00 V	258	39.57	10.33
8	11490.00	57.5 PK	74.0	-16.5	1.07 V	340	42.64	14.86
9	11490.00	44.3 AV	54.0	-9.7	1.07 V	340	29.44	14.86
10	#17235.00	64.0 PK	74.0	-10.0	1.21 V	334	40.77	23.23
11	#17235.00	51.3 AV	54.0	-2.7	1.21 V	334	28.07	23.23

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5619.00	63.4 PK	68.2	-4.8	1.11 H	253	53.98	9.42
2	#5703.50	63.2 PK	68.2	-5.0	1.00 H	273	53.56	9.64
3	#5715.00	53.3 PK	74.0	-20.7	1.08 H	256	43.62	9.68
4	#5715.00	41.1 AV	54.0	-12.9	1.08 H	256	31.42	9.68
5	*5785.00	113.8 PK			1.04 H	258	103.95	9.85
6	*5785.00	103.8 AV			1.04 H	258	93.95	9.85
7	#5863.40	60.8 PK	74.0	-13.2	1.08 H	246	50.87	9.93
8	#5863.40	49.8 AV	54.0	-4.2	1.08 H	246	39.87	9.93
9	#5943.70	63.2 PK	68.2	-5.0	1.06 H	236	53.05	10.15
10	11570.00	59.4 PK	74.0	-14.6	1.17 H	26	44.20	15.20
11	11570.00	47.0 AV	54.0	-7.0	1.17 H	26	31.80	15.20
12	#17355.00	65.9 PK	74.0	-8.1	1.19 H	147	42.34	23.56
13	#17355.00	52.3 AV	54.0	-1.7	1.19 H	147	28.74	23.56

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5619.00	67.7 PK	68.2	-0.5	1.10 V	94	58.28	9.42
2	#5703.50	66.2 PK	68.2	-2.0	1.00 V	195	56.56	9.64
3	#5715.00	56.3 PK	74.0	-17.7	1.00 V	195	46.62	9.68
4	#5715.00	44.2 AV	54.0	-9.8	1.00 V	195	34.52	9.68
5	*5785.00	120.8 PK			1.00 V	195	110.95	9.85
6	*5785.00	110.8 AV			1.00 V	195	100.95	9.85
7	#5863.40	63.2 PK	74.0	-10.8	1.00 V	253	53.27	9.93
8	#5863.40	52.4 AV	54.0	-1.6	1.00 V	253	42.47	9.93
9	#5943.70	66.2 PK	68.2	-2.0	1.00 V	197	56.05	10.15
10	11570.00	56.9 PK	74.0	-17.1	1.02 V	332	41.70	15.20
11	11570.00	43.8 AV	54.0	-10.2	1.02 V	332	28.60	15.20
12	#17355.00	64.0 PK	74.0	-10.0	1.19 V	339	40.44	23.56
13	#17355.00	51.1 AV	54.0	-2.9	1.19 V	339	27.54	23.56

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5664.00	60.6 PK	74.0	-13.4	1.06 H	263	51.06	9.54
2	#5664.00	50.4 AV	54.0	-3.6	1.06 H	263	40.86	9.54
3	*5825.00	110.2 PK			1.00 H	248	100.29	9.91
4	*5825.00	100.5 AV			1.00 H	248	90.59	9.91
5	#5850.00	71.5 PK	78.2	-6.7	1.01 H	275	61.58	9.92
6	#5986.00	60.0 PK	74.0	-14.0	1.03 H	275	49.66	10.34
7	#5986.00	49.3 AV	54.0	-4.7	1.03 H	275	38.96	10.34
8	11650.00	59.4 PK	74.0	-14.6	1.17 H	22	44.00	15.40
9	11650.00	47.0 AV	54.0	-7.0	1.17 H	22	31.60	15.40
10	#17475.00	65.7 PK	74.0	-8.3	1.14 H	154	41.61	24.09
11	#17475.00	52.3 AV	54.0	-1.7	1.14 H	154	28.21	24.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5664.00	63.9 PK	74.0	-10.1	1.08 V	91	54.36	9.54
2	#5664.00	53.7 AV	54.0	-0.3	1.08 V	91	44.16	9.54
3	*5825.00	117.7 PK			1.00 V	197	107.79	9.91
4	*5825.00	108.0 AV			1.00 V	197	98.09	9.91
5	#5850.00	78.0 PK	78.2	-0.2	1.00 V	197	68.08	9.92
6	#5986.00	63.0 PK	74.0	-11.0	1.00 V	250	52.66	10.34
7	#5986.00	52.4 AV	54.0	-1.6	1.00 V	250	42.06	10.34
8	11650.00	57.2 PK	74.0	-16.8	1.08 V	341	41.80	15.40
9	11650.00	43.9 AV	54.0	-10.1	1.08 V	341	28.50	15.40
10	#17475.00	64.2 PK	74.0	-9.8	1.24 V	348	40.11	24.09
11	#17475.00	51.2 AV	54.0	-2.8	1.24 V	348	27.11	24.09

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Beamforming Mode
802.11ac (VHT20)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5666.00	56.9 PK	74.0	-17.1	1.04 H	233	47.35	9.55
2	#5666.00	46.2 AV	54.0	-7.8	1.04 H	233	36.65	9.55
3	#5725.00	74.6 PK	78.2	-3.6	1.10 H	277	64.90	9.70
4	*5745.00	103.5 PK			1.01 H	246	93.74	9.76
5	*5745.00	92.3 AV			1.01 H	246	82.54	9.76
6	11490.00	60.0 PK	74.0	-14.0	1.09 H	25	45.14	14.86
7	11490.00	47.4 AV	54.0	-6.6	1.09 H	25	32.54	14.86
8	#17235.00	65.2 PK	74.0	-8.8	1.13 H	148	41.97	23.23
9	#17235.00	51.4 AV	54.0	-2.6	1.13 H	148	28.17	23.23

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5666.00	60.2 PK	74.0	-13.8	1.03 V	190	50.65	9.55
2	#5666.00	49.2 AV	54.0	-4.8	1.03 V	190	39.65	9.55
3	#5725.00	77.9 PK	78.2	-0.3	1.66 V	229	68.20	9.70
4	*5745.00	110.3 PK			1.66 V	229	100.54	9.76
5	*5745.00	99.1 AV			1.66 V	229	89.34	9.76
6	11490.00	57.8 PK	74.0	-16.2	1.03 V	328	42.94	14.86
7	11490.00	44.8 AV	54.0	-9.2	1.03 V	328	29.94	14.86
8	#17235.00	64.5 PK	74.0	-9.5	1.17 V	348	41.27	23.23
9	#17235.00	51.6 AV	54.0	-2.4	1.17 V	348	28.37	23.23

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5627.00	63.5 PK	68.2	-4.7	1.09 H	237	54.05	9.45
2	#5705.00	63.8 PK	68.2	-4.4	1.05 H	266	54.15	9.65
3	*5785.00	113.6 PK			1.08 H	275	103.75	9.85
4	*5785.00	103.2 AV			1.08 H	275	93.35	9.85
5	#5860.00	59.0 PK	74.0	-15.0	1.05 H	278	49.07	9.93
6	#5860.00	49.7 AV	54.0	-4.3	1.05 H	278	39.77	9.93
7	#5864.20	63.2 PK	68.2	-5.0	1.00 H	260	53.27	9.93
8	#5946.10	62.1 PK	68.2	-6.1	1.05 H	234	51.94	10.16
9	11570.00	59.3 PK	74.0	-14.7	1.12 H	37	44.10	15.20
10	11570.00	46.9 AV	54.0	-7.1	1.12 H	37	31.70	15.20
11	#17355.00	65.7 PK	74.0	-8.3	1.14 H	146	42.14	23.56
12	#17355.00	52.1 AV	54.0	-1.9	1.14 H	146	28.54	23.56

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5627.00	67.8 PK	68.2	-0.4	1.03 V	187	58.35	9.45
2	#5705.00	66.7 PK	68.2	-1.5	1.01 V	188	57.05	9.65
3	*5785.00	120.6 PK			1.00 V	186	110.75	9.85
4	*5785.00	110.4 AV			1.00 V	186	100.55	9.85
5	#5860.00	62.1 PK	74.0	-11.9	1.00 V	186	52.17	9.93
6	#5860.00	52.8 AV	54.0	-1.2	1.00 V	186	42.87	9.93
7	#5864.20	66.1 PK	68.2	-2.1	1.00 V	189	56.17	9.93
8	#5946.10	65.6 PK	68.2	-2.6	1.08 V	199	55.44	10.16
9	11570.00	57.6 PK	74.0	-16.4	1.05 V	346	42.40	15.20
10	11570.00	44.6 AV	54.0	-9.4	1.05 V	346	29.40	15.20
11	#17355.00	63.3 PK	74.0	-10.7	1.25 V	335	39.74	23.56
12	#17355.00	50.8 AV	54.0	-3.2	1.25 V	335	27.24	23.56

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5664.00	60.2 PK	74.0	-13.8	1.08 H	264	50.66	9.54
2	#5664.00	50.8 AV	54.0	-3.2	1.08 H	264	41.26	9.54
3	*5825.00	110.8 PK			1.00 H	271	100.89	9.91
4	*5825.00	99.9 AV			1.00 H	271	89.99	9.91
5	#5850.00	74.5 PK	78.2	-3.7	1.07 H	272	64.58	9.92
6	#5894.30	58.7 PK	74.0	-15.3	1.07 H	235	48.75	9.95
7	#5894.30	48.3 AV	54.0	-5.7	1.07 H	235	38.35	9.95
8	11650.00	60.1 PK	74.0	-13.9	1.14 H	44	44.70	15.40
9	11650.00	47.7 AV	54.0	-6.3	1.14 H	44	32.30	15.40
10	#17475.00	65.7 PK	74.0	-8.3	1.19 H	137	41.61	24.09
11	#17475.00	51.9 AV	54.0	-2.1	1.19 H	137	27.81	24.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5664.00	63.1 PK	74.0	-10.9	1.06 V	92	53.56	9.54
2	#5664.00	53.0 AV	54.0	-1.0	1.06 V	92	43.46	9.54
3	*5825.00	118.0 PK			1.00 V	185	108.09	9.91
4	*5825.00	107.3 AV			1.00 V	185	97.39	9.91
5	#5850.00	77.6 PK	78.2	-0.6	1.00 V	185	67.68	9.92
6	#5894.30	61.8 PK	74.0	-12.2	1.00 V	260	51.85	9.95
7	#5894.30	51.1 AV	54.0	-2.9	1.00 V	260	41.15	9.95
8	11650.00	56.8 PK	74.0	-17.2	1.05 V	351	41.40	15.40
9	11650.00	43.9 AV	54.0	-10.1	1.05 V	351	28.50	15.40
10	#17475.00	63.3 PK	74.0	-10.7	1.21 V	343	39.21	24.09
11	#17475.00	50.8 AV	54.0	-3.2	1.21 V	343	26.71	24.09

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT40)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	67.0 PK	74.0	-7.0	1.08 H	255	57.32	9.68
2	#5715.00	50.8 AV	54.0	-3.2	1.08 H	255	41.12	9.68
3	#5725.00	73.7 PK	78.2	-4.5	1.09 H	258	64.00	9.70
4	*5755.00	100.5 PK			1.07 H	269	90.73	9.77
5	*5755.00	88.8 AV			1.07 H	269	79.03	9.77
6	11510.00	59.8 PK	74.0	-14.2	1.11 H	40	44.95	14.85
7	11510.00	47.5 AV	54.0	-6.5	1.11 H	40	32.65	14.85
8	#17265.00	64.8 PK	74.0	-9.2	1.10 H	140	41.57	23.23
9	#17265.00	51.5 AV	54.0	-2.5	1.10 H	140	28.27	23.23

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	71.8 PK	74.0	-2.2	1.80 V	262	62.12	9.68
2	#5715.00	53.8 AV	54.0	-0.2	1.80 V	262	44.12	9.68
3	#5725.00	75.5 PK	78.2	-2.7	1.80 V	262	65.80	9.70
4	*5755.00	107.3 PK			1.80 V	262	97.53	9.77
5	*5755.00	95.6 AV			1.80 V	262	85.83	9.77
6	11510.00	57.0 PK	74.0	-17.0	1.08 V	352	42.15	14.85
7	11510.00	43.9 AV	54.0	-10.1	1.08 V	352	29.05	14.85
8	#17265.00	64.2 PK	74.0	-9.8	1.22 V	328	40.97	23.23
9	#17265.00	51.5 AV	54.0	-2.5	1.22 V	328	28.27	23.23

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	66.8 PK	74.0	-7.2	1.00 H	275	57.12	9.68
2	#5715.00	47.8 AV	54.0	-6.2	1.00 H	275	38.12	9.68
3	#5725.00	66.5 PK	78.2	-11.7	1.00 H	275	56.80	9.70
4	*5795.00	104.4 PK			1.00 H	275	94.52	9.88
5	*5795.00	93.8 AV			1.00 H	275	83.92	9.88
6	#5850.00	55.4 PK	78.2	-22.8	1.04 H	252	45.48	9.92
7	#5860.00	70.4 PK	74.0	-3.6	1.00 H	275	60.47	9.93
8	#5860.00	47.7 AV	54.0	-6.3	1.00 H	275	37.77	9.93
9	11590.00	59.7 PK	74.0	-14.3	1.16 H	17	44.39	15.31
10	11590.00	47.0 AV	54.0	-7.0	1.16 H	17	31.69	15.31
11	#17385.00	65.1 PK	74.0	-8.9	1.13 H	145	41.34	23.76
12	#17385.00	51.4 AV	54.0	-2.6	1.13 H	145	27.64	23.76

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	69.8 PK	74.0	-4.2	1.85 V	260	60.12	9.68
2	#5715.00	50.8 AV	54.0	-3.2	1.85 V	260	41.12	9.68
3	#5725.00	72.5 PK	78.2	-5.7	1.85 V	260	62.80	9.70
4	*5795.00	111.0 PK			1.85 V	260	101.12	9.88
5	*5795.00	99.4 AV			1.85 V	260	89.52	9.88
6	#5850.00	77.5 PK	78.2	-0.7	1.85 V	260	67.58	9.92
7	#5860.00	73.0 PK	74.0	-1.0	1.85 V	260	63.07	9.93
8	#5860.00	50.7 AV	54.0	-3.3	1.85 V	260	40.77	9.93
9	11590.00	57.4 PK	74.0	-16.6	1.03 V	326	42.09	15.31
10	11590.00	44.2 AV	54.0	-9.8	1.03 V	326	28.89	15.31
11	#17385.00	63.8 PK	74.0	-10.2	1.16 V	334	40.04	23.76
12	#17385.00	50.9 AV	54.0	-3.1	1.16 V	334	27.14	23.76

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	68.0 PK	74.0	-6.0	1.11 H	273	58.32	9.68
2	#5715.00	50.6 AV	54.0	-3.4	1.11 H	273	40.92	9.68
3	#5725.00	68.2 PK	78.2	-10.0	1.08 H	284	58.50	9.70
4	*5775.00	96.9 PK			1.01 H	252	87.07	9.83
5	*5775.00	84.6 AV			1.01 H	252	74.77	9.83
6	#5850.00	60.5 PK	78.2	-17.7	1.06 H	269	50.58	9.92
7	#5860.00	57.3 PK	74.0	-16.7	1.09 H	260	47.37	9.93
8	#5860.00	43.2 AV	54.0	-10.8	1.09 H	260	33.27	9.93
9	11550.00	59.7 PK	74.0	-14.3	1.15 H	19	44.61	15.09
10	11550.00	47.2 AV	54.0	-6.8	1.15 H	19	32.11	15.09
11	#17325.00	65.6 PK	74.0	-8.4	1.13 H	165	42.22	23.38
12	#17325.00	51.8 AV	54.0	-2.2	1.13 H	165	28.42	23.38

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5715.00	71.0 PK	74.0	-3.0	1.01 V	188	61.32	9.68
2	#5715.00	53.8 AV	54.0	-0.2	1.01 V	188	44.12	9.68
3	#5725.00	71.2 PK	78.2	-7.0	1.01 V	188	61.50	9.70
4	*5775.00	103.9 PK			1.01 V	188	94.07	9.83
5	*5775.00	91.6 AV			1.01 V	188	81.77	9.83
6	#5850.00	63.5 PK	78.2	-14.7	1.01 V	188	53.58	9.92
7	#5860.00	60.3 PK	74.0	-13.7	1.01 V	188	50.37	9.93
8	#5860.00	46.2 AV	54.0	-7.8	1.01 V	188	36.27	9.93
9	11550.00	57.3 PK	74.0	-16.7	1.08 V	346	42.21	15.09
10	11550.00	44.0 AV	54.0	-10.0	1.08 V	346	28.91	15.09
11	#17325.00	63.7 PK	74.0	-10.3	1.21 V	337	40.32	23.38
12	#17325.00	50.8 AV	54.0	-3.2	1.21 V	337	27.42	23.38

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Data
Beamforming Mode
802.11ac (VHT20)

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	49.26	31.9 QP	40.0	-8.1	2.00 H	283	44.96	-13.07
2	130.40	37.2 QP	43.5	-6.3	2.00 H	157	51.37	-14.18
3	165.80	37.9 QP	43.5	-5.7	2.00 H	275	51.14	-13.29
4	500.01	36.8 QP	46.0	-9.2	2.00 H	0	43.63	-6.83
5	625.00	40.7 QP	46.0	-5.3	1.50 H	360	44.44	-3.74
6	875.02	39.1 QP	46.0	-6.9	1.00 H	328	38.86	0.24

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	63.08	36.0 QP	40.0	-4.1	1.00 V	17	50.16	-14.21
2	101.15	38.6 QP	43.5	-4.9	1.50 V	283	55.97	-17.36
3	374.98	31.7 QP	46.0	-14.3	1.50 V	94	41.68	-9.98
4	499.97	37.8 QP	46.0	-8.2	1.00 V	306	44.59	-6.83
5	625.00	41.2 QP	46.0	-4.8	1.50 V	0	44.95	-3.74
6	875.02	36.8 QP	46.0	-9.2	1.00 V	344	36.60	0.24

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Transmit Power Measurement

4.2.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = 5 log(N_{ANT}/N_{SS}) dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = 10 log(N_{ANT}/N_{SS}) dB.

4.2.2 Test Setup

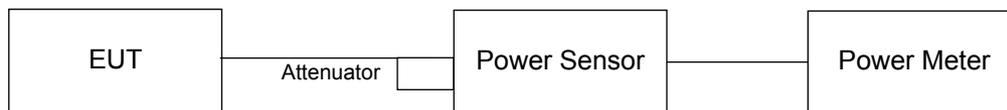

4.2.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.2.4 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.2.5 Deviation from Test Standard

No deviation.

4.2.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.2.7 Test Result

CDD Mode

POWER OUTPUT:

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
802.11a								
149	5745	15.71	15.37	14.97	103.079	20.13	30	Pass
157	5785	22.20	21.32	21.05	428.828	26.32	30	Pass
165	5825	18.13	18.14	17.48	186.152	22.70	30	Pass

Beamforming Mode

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
802.11ac (VHT20)								
149	5745	15.84	15.50	15.05	105.841	20.25	27.92	Pass
157	5785	22.16	21.40	21.34	438.619	26.42	27.92	Pass
165	5825	16.88	16.89	16.23	139.594	21.45	27.92	Pass
802.11ac (VHT40)								
151	5755	15.46	14.81	14.65	94.599	19.76	27.92	Pass
159	5795	16.63	16.79	15.78	131.623	21.19	27.92	Pass
802.11ac (VHT80)								
155	5775	12.29	12.10	12.24	49.91	16.98	27.92	Pass


Note: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.08\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (8.08 - 6) = 27.92\text{dBm}$.

4.3 Peak Power Spectral Density Measurement

4.3.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-2A			11dBm/ MHz
U-NII-2C			11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.3.2 Test Setup

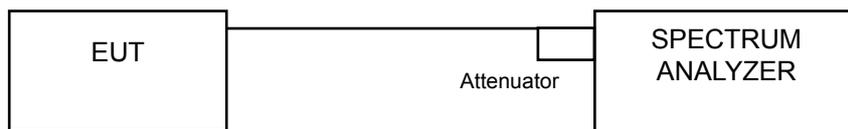

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

For AVG. power (duty cycle ≥ 98%)

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW ≥ 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value

For AVG. power (duty cycle < 98%)

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW ≥ 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value and add $10 \log (1/\text{duty cycle})$



4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Condition

Same as Item 4.2.6.

4.3.7 Test Results

CDD Mode

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=3) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
802.11a								
0	149	5745	-5.78	-3.56	4.77	1.21	27.92	Pass
	157	5785	-1.20	1.02	4.77	5.79	27.92	Pass
	165	5825	-3.74	-1.52	4.77	3.25	27.92	Pass
1	149	5745	-5.93	-3.71	4.77	1.06	27.92	Pass
	157	5785	-1.25	0.97	4.77	5.74	27.92	Pass
	165	5825	-3.24	-1.02	4.77	3.75	27.92	Pass
2	149	5745	-5.98	-3.76	4.77	1.01	27.92	Pass
	157	5785	-1.13	1.09	4.77	5.86	27.92	Pass
	165	5825	-3.32	-1.10	4.77	3.67	27.92	Pass

Note: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.08\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (8.08 - 6) = 27.92\text{dBm}$.

Beamforming Mode





TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=3) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
802.11ac (VHT20)								
0	149	5745	-6.09	-3.87	4.77	0.90	27.92	Pass
	157	5785	-1.35	0.87	4.77	5.64	27.92	Pass
	165	5825	-4.99	-2.77	4.77	2.00	27.92	Pass
1	149	5745	-6.10	-3.88	4.77	0.89	27.92	Pass
	157	5785	-1.47	0.75	4.77	5.52	27.92	Pass
	165	5825	-4.95	-2.73	4.77	2.04	27.92	Pass
2	149	5745	-6.74	-4.52	4.77	0.25	27.92	Pass
	157	5785	-1.80	0.42	4.77	5.19	27.92	Pass
	165	5825	-4.91	-2.69	4.77	2.08	27.92	Pass
802.11ac (VHT40)								
0	151	5755	-9.79	-7.57	4.77	-2.80	27.92	Pass
	159	5795	-8.67	-6.45	4.77	-1.68	27.92	Pass
1	151	5755	-10.26	-8.04	4.77	-3.27	27.92	Pass
	159	5795	-8.53	-6.31	4.77	-1.54	27.92	Pass
2	151	5755	-10.45	-8.23	4.77	-3.46	27.92	Pass
	159	5795	-8.98	-6.76	4.77	-1.99	27.92	Pass

Note: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.08\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (8.08 - 6) = 27.92\text{dBm}$.

TX chain	Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor		10 log (N=3) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
			(dBm/300kHz)	(dBm/500kHz)					
802.11ac (VHT80)									
0	155	5775	-15.86	-13.64	4.77	0.17	-8.70	27.92	Pass
1	155	5775	-16.11	-13.89	4.77	0.17	-8.95	27.92	Pass
2	155	5775	-16.35	-14.13	4.77	0.17	-9.19	27.92	Pass

Note: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.08\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (8.08 - 6) = 27.92\text{dBm}$.

2. Refer to section 3.3 for duty cycle spectrum plot.

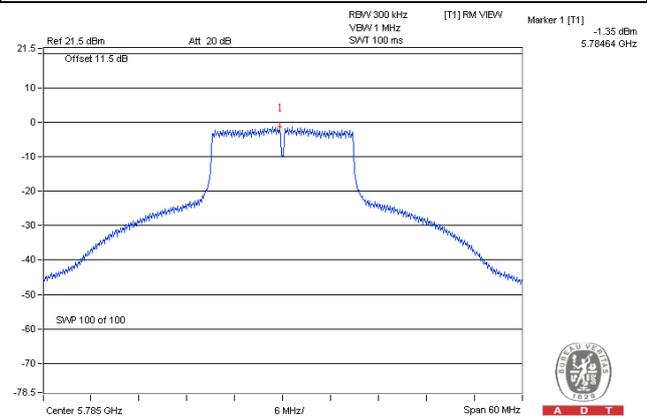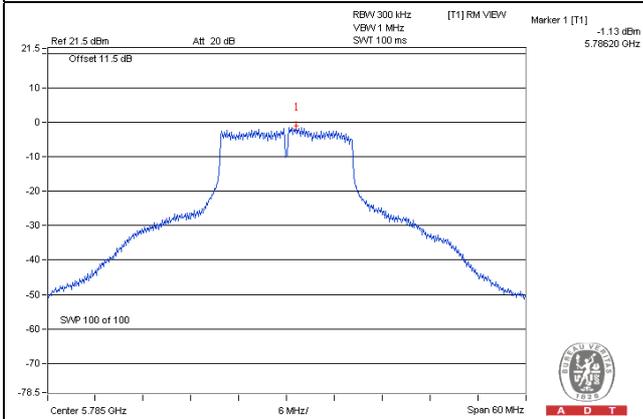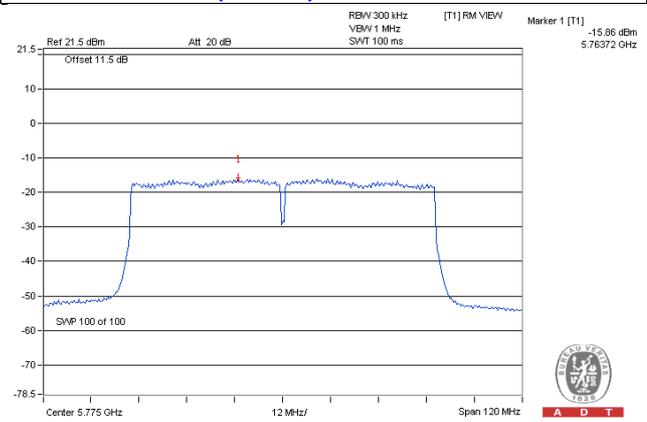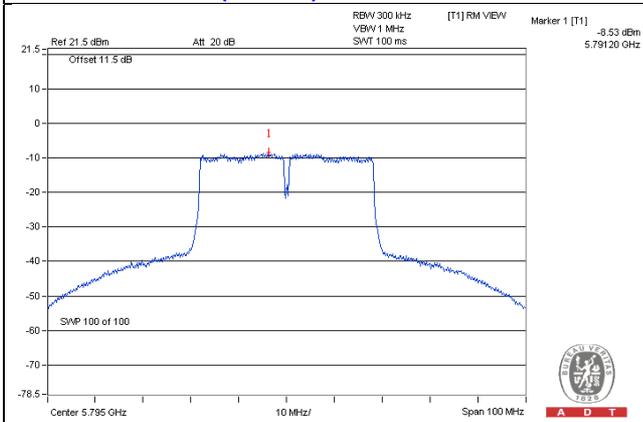
Spectrum Plot of Worst Value**802.11a – Chain 2: CH 157****802.11ac (VHT20) – Chain 0: CH 157****802.11ac (VHT40) – Chain 1: CH 159****802.11ac (VHT80) – Chain 0: CH 155**

4.4 Frequency Stability Measurement

4.4.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.4.2 Test Setup

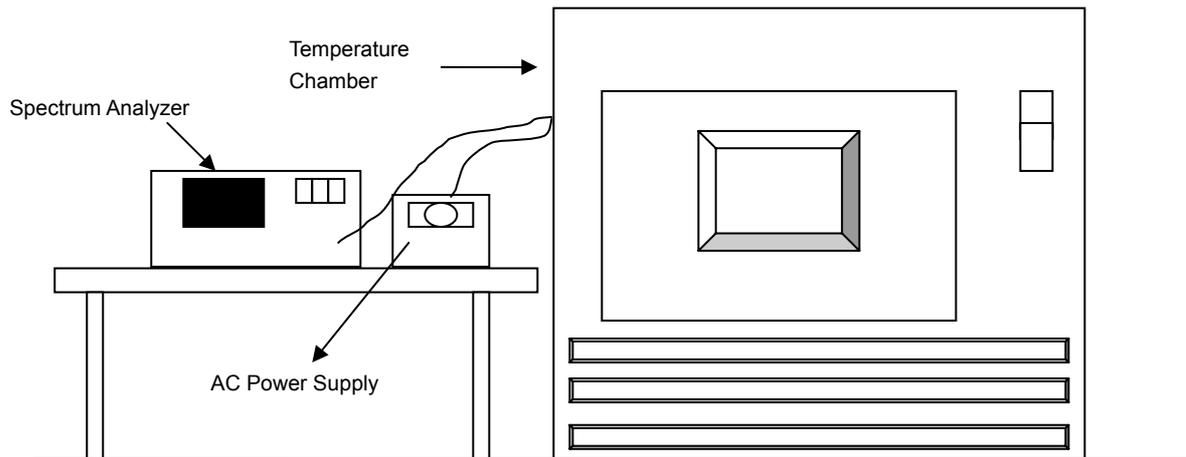

4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.4.7 Test Results

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5825MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
50	120	5825.0008	0.00001	5825.002	0.00003	5825.0032	0.00005	5825.0004	0.00001
40	120	5824.9856	-0.00025	5824.9808	-0.00033	5824.9854	-0.00025	5824.9836	-0.00028
30	120	5825.0023	0.00004	5825.0032	0.00005	5825.0077	0.00013	5825.0023	0.00004
20	120	5824.9804	-0.00034	5824.9793	-0.00036	5824.9793	-0.00036	5824.9799	-0.00035
10	120	5825.0052	0.00009	5825.0037	0.00006	5825.0046	0.00008	5825.0049	0.00008
0	120	5824.9813	-0.00032	5824.983	-0.00029	5824.9817	-0.00031	5824.9849	-0.00026
-10	120	5825.0121	0.00021	5825.0101	0.00017	5825.0143	0.00025	5825.0141	0.00024
-20	120	5825.0276	0.00047	5825.0285	0.00049	5825.0265	0.00045	5825.027	0.00046
-30	120	5825.0245	0.00042	5825.0198	0.00034	5825.0245	0.00042	5825.0196	0.00034


FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5825MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	138	5824.9811	-0.00032	5824.9799	-0.00035	5824.979	-0.00036	5824.9805	-0.00033
	120	5824.9804	-0.00034	5824.9793	-0.00036	5824.9793	-0.00036	5824.9799	-0.00035
	102	5824.9797	-0.00035	5824.9795	-0.00035	5824.9795	-0.00035	5824.9798	-0.00035

4.5 6dB Bandwidth Measurement

4.5.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.5.2 Test Setup

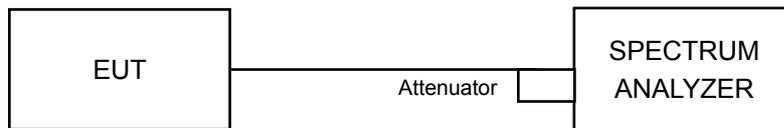

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.





4.5.7 Test Results

CDD Mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
802.11a						
149	5745	16.40	16.41	16.41	0.5	Pass
157	5785	16.38	16.36	15.80	0.5	Pass
165	5825	16.39	16.38	16.35	0.5	Pass

Beamforming Mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
802.11ac (VHT20)						
149	5745	17.63	17.65	17.63	0.5	Pass
157	5785	17.64	17.64	17.32	0.5	Pass
165	5825	17.64	17.65	17.63	0.5	Pass
802.11ac (VHT40)						
151	5755	36.43	36.19	36.45	0.5	Pass
159	5795	36.32	36.32	35.81	0.5	Pass
802.11ac (VHT80)						
155	5775	75.89	75.89	75.50	0.5	Pass

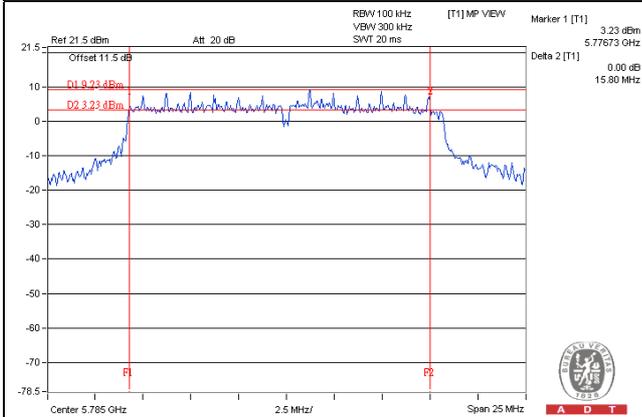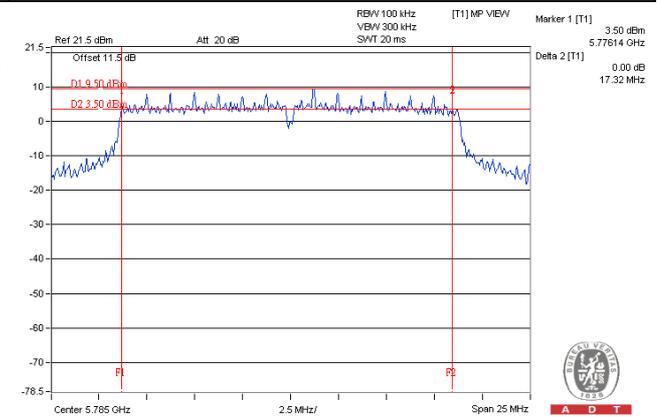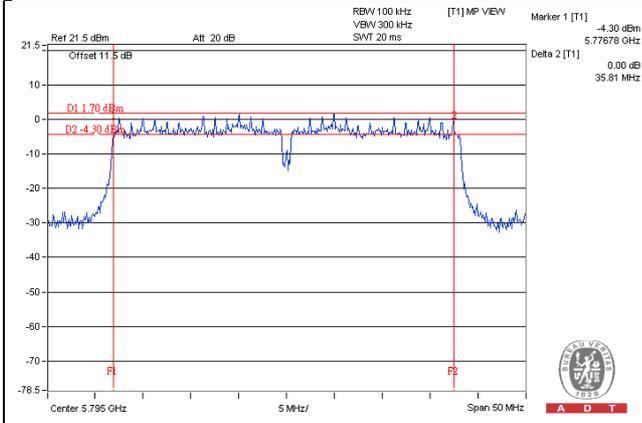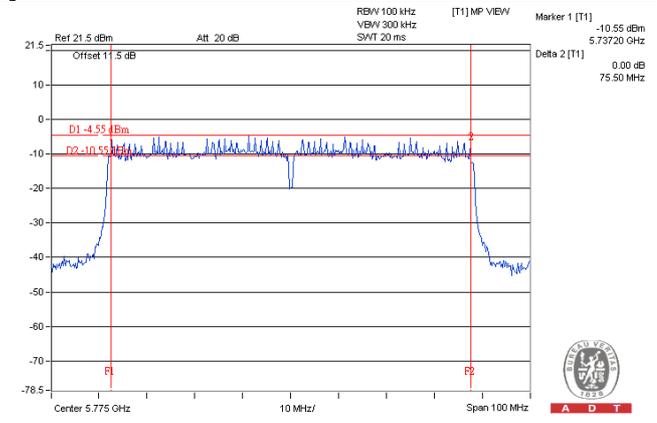SPECTRUM PLOT OF WORST VALUE**802.11a – Chain 2: CH 157****802.11ac (VHT20) – Chain 2: CH157****802.11ac (VHT40) – Chain 2: CH159****802.11ac (VHT80) – Chain 2: CH155**

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---