

## FCC Test Report (15.407)

**Report No.:** RF150430E02-1

**FCC ID:** PY315200309

**Test Model:** R8500

**Received Date:** May 06, 2015

**Test Date:** May 07 to 15, 2015

**Issued Date:** May 21, 2015

**Applicant:** NETGEAR, Inc.

**Address:** 350 East Plumeria Drive San Jose, CA 95134

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin  
Chu Hsien 307, Taiwan R.O.C.

**Test Lab (A):** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Test Location (1):** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin  
Chu Hsien 307, Taiwan R.O.C.

**Test Location (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin  
Chu Hsien 307, Taiwan R.O.C.

**Test Lab (B):** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Test Location (1):** No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies. This report contains Radiated Emissions & Band Edge Measurement (above 1GHz) test data that were produced under subcontract by Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Lin Kou Laboratories.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Modification Record .....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Description of Test Modes .....	11
3.2.1 Test Mode Applicability and Tested Channel Detail.....	12
3.3 Duty Cycle of Test Signal .....	15
3.4 Description of Support Units .....	16
3.4.1 Configuration of System under Test .....	16
3.5 General Description of Applied Standard.....	17
<b>4 Test Types and Results</b> .....	<b>18</b>
4.1 Radiated Emission and Bandedge Measurement.....	18
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	18
4.1.2 Test Instruments .....	19
4.1.3 Test Procedure .....	21
4.1.4 Deviation from Test Standard .....	21
4.1.5 Test Setup.....	22
4.1.6 EUT Operating Condition .....	22
4.1.7 Test Results (Mode 1).....	23
4.1.8 Test Results (Mode 2).....	33
4.2 Conducted Emission Measurement .....	43
4.2.1 Limits of Conducted Emission Measurement .....	43
4.2.2 Test Instruments .....	43
4.2.3 Test Procedure .....	44
4.2.4 Deviation from Test Standard .....	44
4.2.5 Test Setup.....	44
4.2.6 EUT Operating Condition .....	44
4.2.7 Test Results .....	45
4.3 Transmit Power Measurement .....	47
4.3.1 Limits of Transmit Power Measurement .....	47
4.3.2 Test Setup.....	47
4.3.3 Test Instruments .....	47
4.3.4 Test Procedure .....	48
4.3.5 Deviation from Test Standard .....	48
4.3.6 EUT Operating Condition .....	48
4.3.7 Test Result (Mode 1) .....	49
4.3.8 Test Result (Mode 2) .....	50
4.4 Peak Power Spectral Density Measurement .....	51
4.4.1 Limits of Peak Power Spectral Density Measurement .....	51
4.4.2 Test Setup.....	51
4.4.3 Test Instruments .....	51
4.4.4 Test Procedure .....	52
4.4.5 Deviation from Test Standard .....	52
4.4.6 EUT Operating Condition .....	52
4.4.7 Test Results (Mode 1).....	53
4.4.8 Test Results (Mode 2).....	55
4.5 Frequency Stability Measurement .....	58
4.5.1 Limits of Frequency Stability Measurement .....	58
4.5.2 Test Setup.....	58
4.5.3 Test Instruments .....	58



4.5.4 Test Procedure .....	58
4.5.5 Deviation from Test Standard .....	59
4.5.6 EUT Operating Condition .....	59
4.5.7 Test Results (Mode 1).....	60
4.5.8 Test Results (Mode 2).....	61
<b>5 Pictures of Test Arrangements.....</b>	<b>62</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>63</b>



A D T

### Release Control Record

Issue No.	Description	Date Issued
RF150430E02-1	Original release.	May 21, 2015



A D T

## 1 Certificate of Conformity

**Product:** Nighthawk X8 Tri Band WiFi Router

**Brand:** NETGEAR

**Test Model:** R8500

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** NETGEAR, Inc.

**Test Date:** May 07 to 15, 2015

**Standard:** 47 CFR FCC Part 15, Subpart E (Section 15.407)  
ANSI C63.10:2009

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report. This report contains Radiated Emissions & Band Edge Measurement (above 1GHz) test data that were produced under subcontract by Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Lin Kou Laboratories.

Prepared by :

Date:

May 21, 2015

Midoli Peng / Specialist

Approved by :

Date:

May 21, 2015

May Chen / Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (SECTION 15.407 Under New Rule)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -9.51dB at 12.57422MHz.
15.407(b)(1/2/3/4/6)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 5150.00MHz & 15600.00MHz
15.407(a)(1/2/3)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(e)	6dB bandwidth	PASS	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

**NOTE:** 1. The EUT was operating in 2.400 ~ 2.4835GHz, 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 2.400 ~ 2.4835GHz and 5.725~5.850GHz. For the 5.15~5.25GHz RF parameters was recorded in another test report.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.86 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.43 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	Nighthawk X8 Tri Band WiFi Router
Brand	NETGEAR
Test Model	R8500
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	19Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a: up to 54Mbps 802.11n: up to 600Mbps 802.11ac: up to 1733.3Mbps
Operating Frequency	<b>For 15.407</b> 5.18 ~ 5.24GHz
	<b>For 15.247</b> <b>2.4GHz:</b> 2.412 ~ 2.462GHz <b>5GHz:</b> 5.745 ~ 5.825GHz
Number of Channel	<b>For 15.407</b> 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80)
	<b>For 15.247 (2.4GHz)</b> 11 for 802.11b <b>For 15.247 (5GHz)</b> 5 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80)

Output Power	<p><b>For 15.407 – Int. Ant.</b>  <b>CDD Mode:</b>              802.11a: 527.785mW              802.11ac (VHT20): 536.511mW              802.11ac (VHT40): 965.588mW              802.11ac (VHT80): 191.201mW  <b>Beamforming Mode:</b>              802.11ac (VHT20): 389.388mW              802.11ac (VHT40): 386.485mW              802.11ac (VHT80): 191.201mW</p> <p><b>For 15.407 – Ext. Ant.</b>  <b>CDD Mode:</b>              802.11a: 862.421mW  <b>Beamforming Mode:</b>              802.11ac (VHT20): 997.542mW              802.11ac (VHT40): 796.139mW              802.11ac (VHT80): 296.907mW</p>
	<p><b>For 15.247(5GHz) – Int. Ant.</b>  <b>CDD Mode:</b>              802.11a: 949.109mW              802.11ac (VHT20): 943.649mW              802.11ac (VHT40): 938.686mW              802.11ac (VHT80): 745.822mW  <b>Beamforming Mode:</b>              802.11ac (VHT20): 379.43mW              802.11ac (VHT40): 391.755mW              802.11ac (VHT80): 368.735mW</p> <p><b>For 15.247(5GHz) – Ext. Ant.</b>  <b>CDD Mode:</b>              802.11a: 922.296mW  <b>Beamforming Mode:</b>              802.11ac (VHT20): 929.207mW              802.11ac (VHT40): 957.105mW              802.11ac (VHT80): 709.223mW</p>
	<p><b>For 15.247(2.4GHz)</b>  <b>CDD Mode:</b>              802.11b: 940.551mW</p>
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	Ethernet cable (shielded, 1.5m)

Note:

1. The EUT must be supplied with a power adapter as following table:

Brand	NETGEAR
Model	AD2003F10
P/N	332-10631-01
Input Power	100-120Vac, 50/60Hz, 1.5A
Output Power	19Vdc, 3.16A
Power Line	DC output cable: Unshielded, 1.8m

2. The antennas provided to the EUT, please refer to the following table:

Antenna No.	Ant. Gain(dBi)	Frequency range (GHz to GHz)	Antenna Type	Connecter Type
Internal (1)	3.99	5.15~5.25GHz	Dipole	i-pex(MHF)
Internal (2)	3.71	5.25~5.35GHz	Dipole	i-pex(MHF)
Internal (3)	3.71	5.47~5.725GHz	Dipole	i-pex(MHF)
Internal (4)	3.98	5.725~5.85GHz	Dipole	i-pex(MHF)
External (1)	0.67	2.4~2.4835GHz	Dipole	i-pex(MHF)
	-0.84	5.15~5.25GHz	Dipole	i-pex(MHF)
	-1.38	5.25~5.35GHz	Dipole	i-pex(MHF)
	-1.6	5.47~5.725GHz	Dipole	i-pex(MHF)
	-1.79	5.725~5.85GHz	Dipole	i-pex(MHF)
External (2)	0.67	2.4~2.4835GHz	Dipole	i-pex(MHF)
	-0.84	5.15~5.25GHz	Dipole	i-pex(MHF)
	-1.38	5.25~5.35GHz	Dipole	i-pex(MHF)
	-1.6	5.47~5.725GHz	Dipole	i-pex(MHF)
	-1.79	5.725~5.85GHz	Dipole	i-pex(MHF)
External (3)	0.67	2.4~2.4835GHz	Dipole	i-pex(MHF)
	-0.84	5.15~5.25GHz	Dipole	i-pex(MHF)
	-1.38	5.25~5.35GHz	Dipole	i-pex(MHF)
	-1.6	5.47~5.725GHz	Dipole	i-pex(MHF)
	-1.79	5.725~5.85GHz	Dipole	i-pex(MHF)
External (4)	0.67	2.4~2.4835GHz	Dipole	i-pex(MHF)
	-0.84	5.15~5.25GHz	Dipole	i-pex(MHF)
	-1.38	5.25~5.35GHz	Dipole	i-pex(MHF)
	-1.6	5.47~5.725GHz	Dipole	i-pex(MHF)
	-1.79	5.725~5.85GHz	Dipole	i-pex(MHF)

3. The coexistence mode:

Condition	Technology		
	1	WLAN(2.4GHz) - External Antenna	WLAN(5GHz <5150~5250MHz>) - External Antenna
2	WLAN(2.4GHz) - External Antenna	WLAN(5GHz <5150~5250MHz>) - Internal Antenna	WLAN(5GHz <5725~5850MHz>) - External Antenna

**Note:** The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The EUT incorporates a MIMO function with beamforming for 5GHz (802.11n & 802.11ac mode).

For 2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	4TX	4RX
For 5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	4TX	4RX
802.11n (HT20)	MCS 0~7	4TX	4RX
	MCS 8~15	4TX	4RX
	MCS 16~23	4TX	4RX
	MCS 24~31	4TX	4RX
802.11n (HT40)	MCS 0~7	4TX	4RX
	MCS 8~15	4TX	4RX
	MCS 16~23	4TX	4RX
	MCS 24~31	4TX	4RX
802.11ac (VHT20)	MCS 0~8, Nss=1	4TX	4RX
	MCS 0~8, Nss=2	4TX	4RX
	MCS 0~9, Nss=3	4TX	4RX
	MCS 0~9, Nss=4	4TX	4RX
802.11ac (VHT40)	MCS 0~9, Nss=1	4TX	4RX
	MCS 0~9, Nss=2	4TX	4RX
	MCS 0~9, Nss=3	4TX	4RX
	MCS 0~9, Nss=4	4TX	4RX
802.11ac (VHT80)	MCS 0~9, Nss=1	4TX	4RX
	MCS 0~9, Nss=2	4TX	4RX
	MCS 0~9, Nss=3	4TX	4RX
	MCS 0~9, Nss=4	4TX	4RX

Note: The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

#### For 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
1	√	√	-	√	With Internal antenna
2	√	√	√	√	With External antenna

Where **RE≥1G**: Radiated Emission above 1GHz & Bandedge Measurement      **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:**

1. The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **X-plane**.
2. "-" means no effect.

#### **Radiated Emission Test (Above 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

<b>CDD MODE</b>							
EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
1, 2	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
1	802.11ac (VHT20)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
1	802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
1	802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
<b>Beamforming MODE</b>							
EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
2	802.11ac (VHT20)	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.5
2	802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
2	802.11ac (VHT80)		42	42	OFDM	BPSK	29.3

#### **Radiated Emission Test (Below 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

<b>Beamforming MODE</b>							
EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
1	802.11ac (VHT40)	5180-5240	38 to 46	46	OFDM	BPSK	13.5
2	802.11ac (VHT20)		36 to 48	48	OFDM	BPSK	6.5

**Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

<b>Beamforming MODE</b>							
<b>EUT CONFIGURE MODE</b>	<b>MODE</b>	<b>FREQ. BAND (MHz)</b>	<b>AVAILABLE CHANNEL</b>	<b>TESTED CHANNEL</b>	<b>MODULATION TECHNOLOGY</b>	<b>MODULATION TYPE</b>	<b>DATA RATE (Mbps)</b>
2	802.11ac (VHT20)	5180-5240	36 to 48	48	OFDM	BPSK	6.5

**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

<b>For Transmit Power Measurement</b>							
<b>CDD MODE</b>							
EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
1, 2	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
1	802.11ac (VHT20)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
1	802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
1	802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
<b>Beamforming MODE</b>							
EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
1, 2	802.11ac (VHT20)	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.5
1, 2	802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
1, 2	802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
<b>For Peak Power Spectral Density Measurement</b>							
<b>CDD MODE</b>							
EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
1, 2	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
1	802.11ac (VHT20)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
1	802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
1	802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
<b>Beamforming MODE</b>							
EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
2	802.11ac (VHT20)	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.5
2	802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
2	802.11ac (VHT80)		42	42	OFDM	BPSK	29.3

**Test Condition:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
<b>RE≥1G</b>	25deg. C, 68%RH	120Vac, 60Hz	Robert Cheng
	22deg. C, 71%RH		Nick Chen
<b>RE&lt;1G</b>	25deg. C, 69%RH	120Vac, 60Hz	Gary Cheng
<b>PLC</b>	25deg. C, 70%RH	120Vac, 60Hz	Mike Hsieh
<b>APCM</b>	25deg. C, 60%RH	120Vac, 60Hz	Gary Cheng

### 3.3 Duty Cycle of Test Signal

If duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.  
 If duty cycle of test signal is  $< 98\%$ , duty factor shall be considered.


**802.11a:** Duty cycle =  $2.062 \text{ ms} / 2.083 \text{ ms} = 0.99$

**802.11ac (VHT20):** Duty cycle =  $1.925 \text{ ms} / 1.948 \text{ ms} = 0.988$


**802.11ac (VHT40):** Duty cycle =  $0.952 \text{ ms} / 0.970 \text{ ms} = 0.981$

**802.11ac (VHT80):** Duty cycle =  $0.457 \text{ ms} / 0.48 \text{ ms} = 0.952$ , Duty factor =  $10 * \log(1/0.952) = 0.21$

**802.11a** **802.11ac (VHT20)**

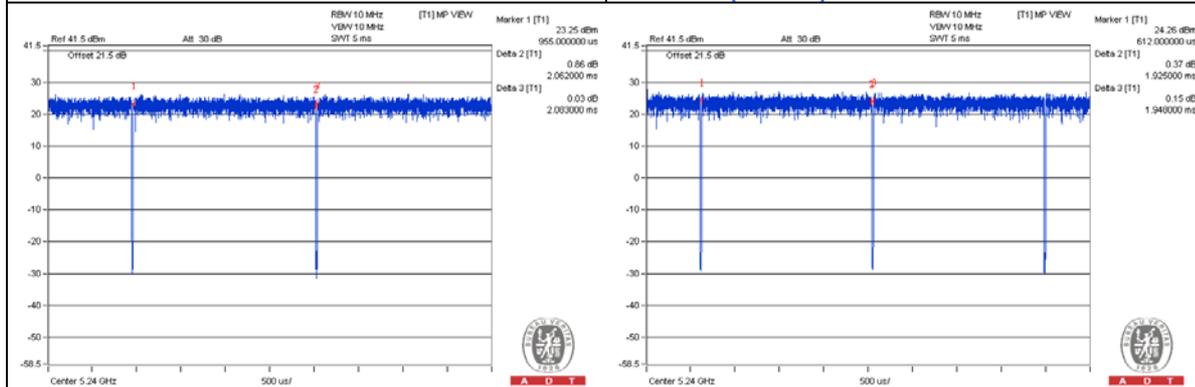

**802.11ac (VHT40)** **802.11ac (VHT80)**

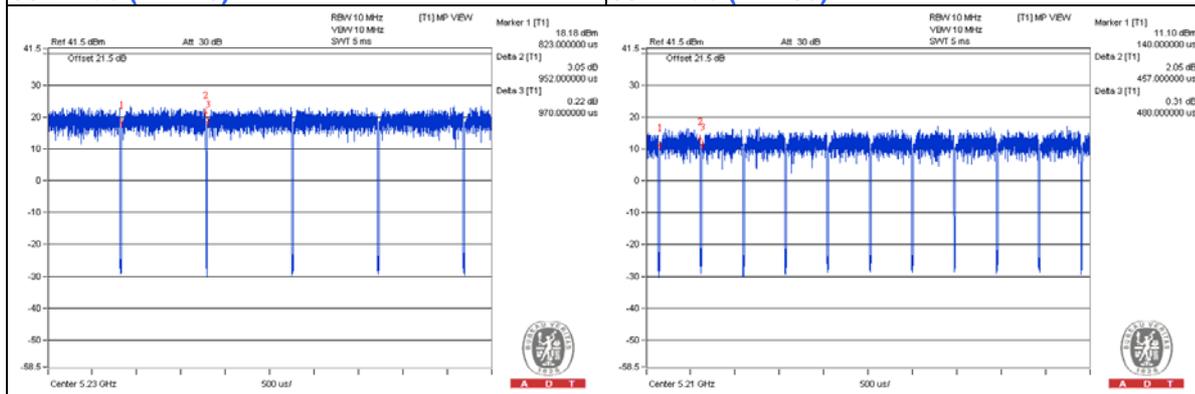

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


No.	Product	Brand	Model No.	Serial No.	FCC ID	Remark
A	USB Flash Driver	Transcend	JetFlash 790	NA	NA	Provided by Lab
B	USB Flash Driver	Transcend	JetFlash 790	NA	NA	Provided by Lab
C	NOTEBOOK COMPUTER	DELL	PP32LA	HSLB32S	FCC DoC	Provided by Lab
D	NOTEBOOK COMPUTER	DELL	E5430	4YV4VY1	FCC DoC	Provided by Lab
E	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC	Provided by Lab

**NOTE:**

- All power cords of the above support units are non-shielded (1.8 m).

No.	Cable	Qty.	Length (m)	Shielded (Yes/ No)	Cores (Number)	Remark
1	DC	1	1.8	No	0	Supplied by Client
2	RJ45	1	10	No	0	Provided by Lab
3	RJ45	5	10	No	0	Provided by Lab
4	RJ45	1	10	No	0	Provided by Lab

#### 3.4.1 Configuration of System under Test

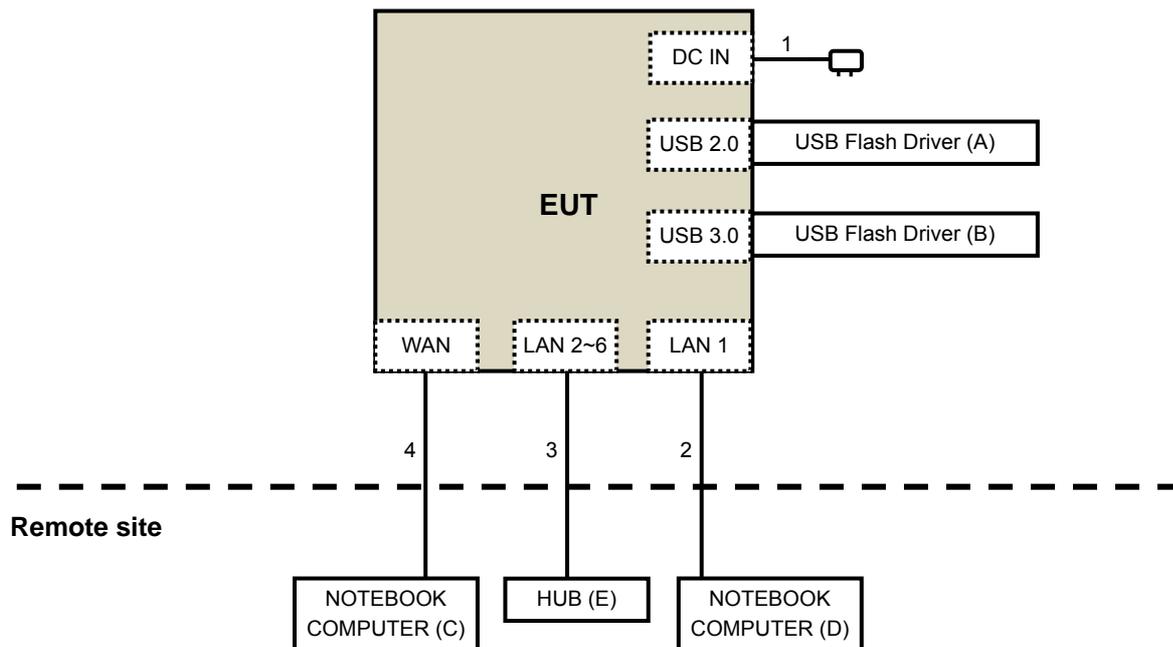

### 3.5 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart E (15.407)**  
**789033 D02 General UNII Test Procedure New Rules v01**  
**662911 D01 Multiple Transmitter Output v02r01**  
ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

**LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS**

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedure New Rules v01	FIELD STRENGTH AT 3m	
	PK:74 (dBuV/m)	AV:54 (dBuV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBuV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)	PK:-27 (dBm/MHz) <sup>*1</sup> PK:-17 (dBm/MHz) <sup>*2</sup>	PK: 68.2(dBuV/m) <sup>*1</sup> PK:78.2 (dBuV/m) <sup>*2</sup>

**NOTE:** <sup>\*1</sup> beyond 10MHz of the band edge <sup>\*2</sup> within 10 MHz of band edge

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).$$

#### 4.1.2 Test Instruments

##### For above 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Oct. 06, 2014	Oct. 05, 2015
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	July 25, 2014	July 24, 2015
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Feb. 06, 2015	Feb. 05, 2016
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Feb. 05, 2015	Feb. 04, 2016
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Feb. 09, 2015	Feb. 08, 2016
Preamplifier Agilent	8449B	3008A01961	Oct. 18, 2014	Oct. 17, 2015
Preamplifier Agilent	8447D	2944A10738	Oct. 18, 2014	Oct. 17, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309220/4	Aug. 09, 2014	Aug. 08, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250724/4	Aug. 09, 2014	Aug. 08, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295012/4	Aug. 09, 2014	Aug. 08, 2015
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA	NA
Turn Table BV ADT	TT100	TT93021704	NA	NA
Turn Table Controller BV ADT	SC100	SC93021704	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 18, 2014	Oct. 17, 2015

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 4.

3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

4. The FCC Site Registration No. is 460141.

5. The IC Site Registration No. is IC7450F-4.

6. Tested Date: May 12, 2015

**For below 1GHz**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY50010156	Aug. 11, 2014	Aug. 10, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 12, 2014	Nov. 11, 2015
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Feb. 06, 2015	Feb. 05, 2016
RF Cable	NA	CHHCAB_001	Oct. 05, 2014	Oct. 04, 2015
Horn_Antenna AISI	AIH.8018	0000220091110	Feb. 06, 2015	Feb. 05, 2016
Pre-Amplifier Agilent	8449B	300801923	Oct. 28, 2014	Oct. 27, 2015
RF Cable	NA	131206 131213 131215 SNMY23685/4	Jan. 16, 2015	Jan. 15, 2016
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Dec. 12, 2014	Dec. 11, 2015
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Feb. 05, 2015	Feb. 04, 2016
RF Cable	NA	329751/4 RF104-204	Dec. 11, 2014	Dec. 10, 2015
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
- 5 The CANADA Site Registration No. is IC 7450H-3.
- 6 Tested Date: May 12, 2015

#### 4.1.3 Test Procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Note:


1. For emission measurements above 1 GHz, the EUT shall be placed at a height of 1.5 m above the ground at 3 meter chamber room for test
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ( $10 \log(1/\text{duty cycle})$ ).
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
6. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup

##### <Frequency Range below 1GHz>

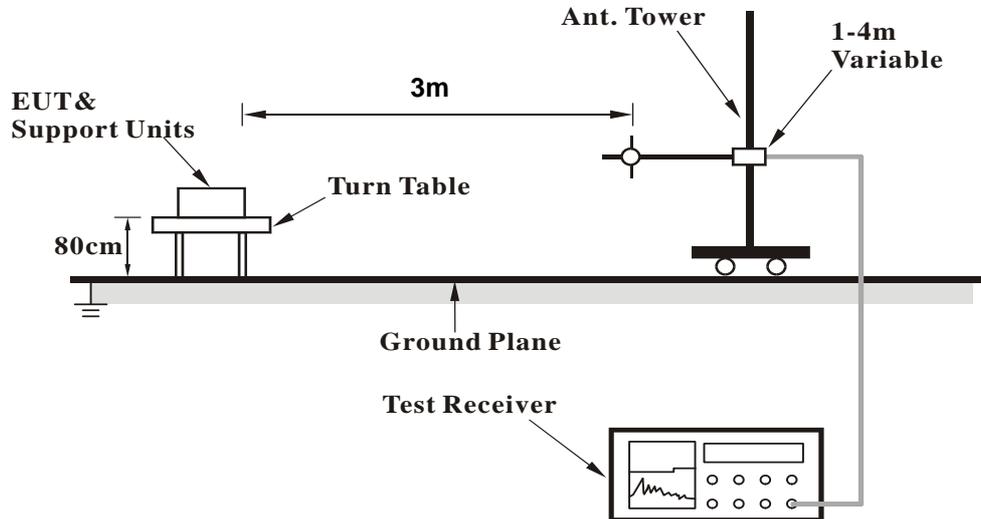

##### <Frequency Range above 1GHz>

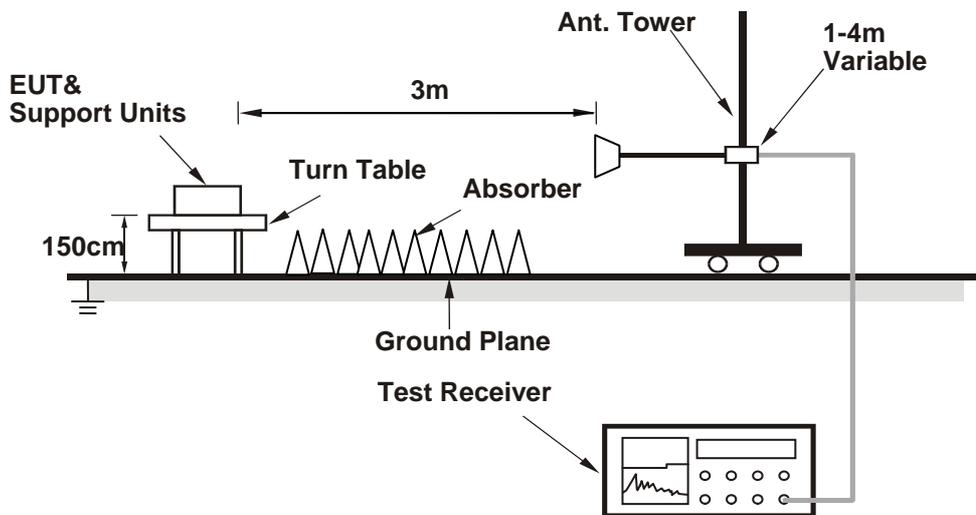

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Condition

1. Connect the EUT with the support units C-D (NOTEBOOK COMPUTER) which is placed on remote site.
2. Controlling software (Mtool.exe\_2\_0\_2\_7) has been activated to set the EUT on specific status.

4.1.7 Test Results (Mode 1)

Above 1GHz Data (Subcontract Item)

CDD Mode

802.11a

<b>CHANNEL</b>	TX Channel 36	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.2 PK	74.0	-7.8	1.62 H	125	59.73	6.47
2	5150.00	51.4 AV	54.0	-2.6	1.62 H	125	44.93	6.47
3	*5180.00	118.6 PK			1.62 H	125	111.95	6.65
4	*5180.00	108.4 AV			1.62 H	125	101.75	6.65
5	#10360.00	60.6 PK	74.0	-13.4	1.21 H	196	46.39	14.21
6	#10360.00	46.5 AV	54.0	-7.5	1.21 H	196	32.29	14.21
7	15540.00	61.3 PK	74.0	-12.7	1.46 H	232	42.54	18.76
8	15540.00	49.6 AV	54.0	-4.4	1.46 H	232	30.84	18.76

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.0 PK	74.0	-6.0	1.59 V	50	61.53	6.47
2	5150.00	53.5 AV	54.0	-0.5	1.59 V	50	47.03	6.47
3	*5180.00	120.1 PK			1.59 V	50	113.45	6.65
4	*5180.00	110.5 AV			1.59 V	50	103.85	6.65
5	#10360.00	62.9 PK	74.0	-11.1	1.14 V	240	48.69	14.21
6	#10360.00	48.5 AV	54.0	-5.5	1.14 V	240	34.29	14.21
7	15540.00	62.7 PK	74.0	-11.3	1.61 V	13	43.94	18.76
8	15540.00	50.4 AV	54.0	-3.6	1.61 V	13	31.64	18.76

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

<b>CHANNEL</b>	TX Channel 40	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.3 PK	74.0	-9.7	1.56 H	120	57.83	6.47
2	5150.00	50.1 AV	54.0	-3.9	1.56 H	120	43.63	6.47
3	*5200.00	119.6 PK			1.56 H	120	112.83	6.77
4	*5200.00	109.4 AV			1.56 H	120	102.63	6.77
5	#10400.00	60.2 PK	74.0	-13.8	1.23 H	207	45.98	14.22
6	#10400.00	48.6 AV	54.0	-5.4	1.23 H	207	34.38	14.22
7	15600.00	65.9 PK	74.0	-8.1	1.41 H	244	47.56	18.34
8	15600.00	52.1 AV	54.0	-1.9	1.41 H	244	33.76	18.34

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.5 PK	74.0	-7.5	1.76 V	79	60.03	6.47
2	5150.00	52.4 AV	54.0	-1.6	1.76 V	79	45.93	6.47
3	*5200.00	121.6 PK			1.76 V	79	114.83	6.77
4	*5200.00	111.7 AV			1.76 V	79	104.93	6.77
5	#10400.00	62.6 PK	74.0	-11.4	1.11 V	28	48.38	14.22
6	#10400.00	50.9 AV	54.0	-3.1	1.11 V	28	36.68	14.22
7	15600.00	67.2 PK	74.0	-6.8	1.55 V	351	48.86	18.34
8	15600.00	53.8 AV	54.0	-0.2	1.55 V	351	35.46	18.34

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

<b>CHANNEL</b>	TX Channel 48	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5081.00	58.3 PK	74.0	-15.7	1.54 H	134	52.14	6.16
2	5081.00	47.6 AV	54.0	-6.4	1.54 H	134	41.44	6.16
3	*5240.00	119.1 PK			1.54 H	134	112.28	6.82
4	*5240.00	110.3 AV			1.54 H	134	103.48	6.82
5	#10480.00	60.6 PK	74.0	-13.4	1.18 H	216	46.61	13.99
6	#10480.00	48.7 AV	54.0	-5.3	1.18 H	216	34.71	13.99
7	15720.00	66.2 PK	74.0	-7.8	1.39 H	234	47.17	19.03
8	15720.00	52.1 AV	54.0	-1.9	1.39 H	234	33.07	19.03

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5081.00	60.2 PK	74.0	-13.8	1.50 V	83	54.04	6.16
2	5081.00	49.6 AV	54.0	-4.4	1.50 V	83	43.44	6.16
3	*5240.00	121.9 PK			1.50 V	83	115.08	6.82
4	*5240.00	112.2 AV			1.50 V	83	105.38	6.82
5	#10480.00	61.9 PK	74.0	-12.1	1.10 V	243	47.91	13.99
6	#10480.00	49.1 AV	54.0	-4.9	1.10 V	243	35.11	13.99
7	15720.00	66.2 PK	74.0	-7.8	1.57 V	16	47.17	19.03
8	15720.00	53.0 AV	54.0	-1.0	1.57 V	16	33.97	19.03

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

**802.11ac (VHT20)**

<b>CHANNEL</b>	TX Channel 36	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.5 PK	74.0	-7.5	1.60 H	121	60.03	6.47
2	5150.00	51.5 AV	54.0	-2.5	1.60 H	121	45.03	6.47
3	*5180.00	116.5 PK			1.60 H	121	109.85	6.65
4	*5180.00	106.4 AV			1.60 H	121	99.75	6.65
5	#10360.00	59.8 PK	74.0	-14.2	1.24 H	181	45.59	14.21
6	#10360.00	46.0 AV	54.0	-8.0	1.24 H	181	31.79	14.21
7	15540.00	60.9 PK	74.0	-13.1	1.42 H	221	42.14	18.76
8	15540.00	49.3 AV	54.0	-4.7	1.42 H	221	30.54	18.76

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.2 PK	74.0	-5.8	1.16 V	89	61.73	6.47
2	5150.00	53.5 AV	54.0	-0.5	1.16 V	89	47.03	6.47
3	*5180.00	118.2 PK			1.16 V	89	111.55	6.65
4	*5180.00	108.2 AV			1.16 V	89	101.55	6.65
5	#10360.00	61.0 PK	74.0	-13.0	1.79 V	7	46.79	14.21
6	#10360.00	49.1 AV	54.0	-4.9	1.79 V	7	34.89	14.21
7	15540.00	63.9 PK	74.0	-10.1	1.42 V	325	45.14	18.76
8	15540.00	50.3 AV	54.0	-3.7	1.42 V	325	31.54	18.76

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

<b>CHANNEL</b>	TX Channel 40	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5146.00	64.4 PK	74.0	-9.6	1.62 H	121	57.95	6.45
2	5146.00	50.1 AV	54.0	-3.9	1.62 H	121	43.65	6.45
3	*5200.00	119.7 PK			1.62 H	121	112.93	6.77
4	*5200.00	109.8 AV			1.62 H	121	103.03	6.77
5	#10400.00	60.8 PK	74.0	-13.2	1.19 H	221	46.58	14.22
6	#10400.00	48.9 AV	54.0	-5.1	1.19 H	221	34.68	14.22
7	15600.00	65.6 PK	74.0	-8.4	1.40 H	248	47.26	18.34
8	15600.00	51.8 AV	54.0	-2.2	1.40 H	248	33.46	18.34

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5146.00	69.0 PK	74.0	-5.0	1.44 V	82	62.55	6.45
2	5146.00	52.2 AV	54.0	-1.8	1.44 V	82	45.75	6.45
3	*5200.00	121.1 PK			1.44 V	82	114.33	6.77
4	*5200.00	111.8 AV			1.44 V	82	105.03	6.77
5	#10400.00	62.8 PK	74.0	-11.2	1.21 V	32	48.58	14.22
6	#10400.00	50.6 AV	54.0	-3.4	1.21 V	32	36.38	14.22
7	15600.00	64.8 PK	74.0	-9.2	1.55 V	13	46.46	18.34
8	15600.00	52.4 AV	54.0	-1.6	1.55 V	13	34.06	18.34

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

<b>CHANNEL</b>	TX Channel 48	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5086.00	63.9 PK	74.0	-10.1	1.57 H	126	57.74	6.16
2	5086.00	49.6 AV	54.0	-4.4	1.57 H	126	43.44	6.16
3	*5240.00	119.6 PK			1.57 H	126	112.78	6.82
4	*5240.00	109.7 AV			1.57 H	126	102.88	6.82
5	#10480.00	60.3 PK	74.0	-13.7	1.24 H	218	46.31	13.99
6	#10480.00	48.4 AV	54.0	-5.6	1.24 H	218	34.41	13.99
7	15720.00	66.0 PK	74.0	-8.0	1.45 H	229	46.97	19.03
8	15720.00	50.8 AV	54.0	-3.2	1.45 H	229	31.77	19.03

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5086.00	58.6 PK	74.0	-15.4	1.15 V	87	52.44	6.16
2	5086.00	46.6 AV	54.0	-7.4	1.15 V	87	40.44	6.16
3	*5240.00	121.5 PK			1.15 V	87	114.68	6.82
4	*5240.00	111.5 AV			1.15 V	87	104.68	6.82
5	#10480.00	61.4 PK	74.0	-12.6	1.24 V	30	47.41	13.99
6	#10480.00	49.4 AV	54.0	-4.6	1.24 V	30	35.41	13.99
7	15720.00	64.5 PK	74.0	-9.5	1.57 V	348	45.47	19.03
8	15720.00	51.8 AV	54.0	-2.2	1.57 V	348	32.77	19.03

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

**802.11ac (VHT40)**

<b>CHANNEL</b>	TX Channel 38	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5146.00	65.8 PK	74.0	-8.2	1.57 H	120	59.35	6.45
2	5146.00	51.4 AV	54.0	-2.6	1.57 H	120	44.95	6.45
3	*5190.00	109.6 PK			1.57 H	120	102.90	6.70
4	*5190.00	99.2 AV			1.57 H	120	92.50	6.70
5	#10380.00	57.6 PK	74.0	-16.4	1.20 H	176	43.39	14.21
6	#10380.00	44.6 AV	54.0	-9.4	1.20 H	176	30.39	14.21
7	15570.00	60.4 PK	74.0	-13.6	1.45 H	220	41.85	18.55
8	15570.00	48.3 AV	54.0	-5.7	1.45 H	220	29.75	18.55

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5146.00	67.6 PK	74.0	-6.4	1.08 V	83	61.15	6.45
2	5146.00	53.5 AV	54.0	-0.5	1.08 V	83	47.05	6.45
3	*5190.00	111.4 PK			1.08 V	83	104.70	6.70
4	*5190.00	101.4 AV			1.08 V	83	94.70	6.70
5	#10380.00	59.1 PK	74.0	-14.9	1.20 V	103	44.89	14.21
6	#10380.00	46.0 AV	54.0	-8.0	1.20 V	103	31.79	14.21
7	15570.00	61.4 PK	74.0	-12.6	1.64 V	19	42.85	18.55
8	15570.00	49.6 AV	54.0	-4.4	1.64 V	19	31.05	18.55

**REMARKS:**

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

<b>CHANNEL</b>	TX Channel 46	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5141.00	65.4 PK	74.0	-8.6	1.66 H	125	58.97	6.43
2	5141.00	51.3 AV	54.0	-2.7	1.66 H	125	44.87	6.43
3	*5230.00	116.8 PK			1.66 H	125	109.99	6.81
4	*5230.00	106.6 AV			1.66 H	125	99.79	6.81
5	#10460.00	58.6 PK	74.0	-15.4	1.18 H	162	44.55	14.05
6	#10460.00	45.8 AV	54.0	-8.2	1.18 H	162	31.75	14.05
7	15690.00	61.4 PK	74.0	-12.6	1.49 H	234	42.53	18.87
8	15690.00	49.6 AV	54.0	-4.4	1.49 H	234	30.73	18.87

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5141.00	67.5 PK	74.0	-6.5	1.15 V	89	61.07	6.43
2	5141.00	53.4 AV	54.0	-0.6	1.15 V	89	46.97	6.43
3	*5230.00	119.2 PK			1.15 V	89	112.39	6.81
4	*5230.00	108.7 AV			1.15 V	89	101.89	6.81
5	#10460.00	60.9 PK	74.0	-13.1	1.07 V	244	46.85	14.05
6	#10460.00	47.8 AV	54.0	-6.2	1.07 V	244	33.75	14.05
7	15690.00	64.3 PK	74.0	-9.7	1.67 V	16	45.43	18.87
8	15690.00	51.1 AV	54.0	-2.9	1.67 V	16	32.23	18.87

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

**802.11ac (VHT80)**

<b>CHANNEL</b>	TX Channel 42	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5147.00	63.5 PK	74.0	-10.5	1.65 H	120	57.05	6.45
2	5147.00	51.6 AV	54.0	-2.4	1.65 H	120	45.15	6.45
3	*5210.00	104.2 PK			1.65 H	120	97.42	6.78
4	*5210.00	95.3 AV			1.65 H	120	88.52	6.78
5	#10420.00	58.3 PK	74.0	-15.7	1.10 H	160	44.15	14.15
6	#10420.00	45.4 AV	54.0	-8.6	1.10 H	160	31.25	14.15
7	15630.00	60.2 PK	74.0	-13.8	1.52 H	230	41.68	18.52
8	15630.00	48.4 AV	54.0	-5.6	1.52 H	230	29.88	18.52

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5147.00	65.3 PK	74.0	-8.7	1.00 V	82	58.85	6.45
2	5147.00	53.6 AV	54.0	-0.4	1.00 V	82	47.15	6.45
3	*5210.00	106.4 PK			1.00 V	82	99.62	6.78
4	*5210.00	97.3 AV			1.00 V	82	90.52	6.78
5	#10420.00	59.1 PK	74.0	-14.9	1.16 V	228	44.95	14.15
6	#10420.00	46.9 AV	54.0	-7.1	1.16 V	228	32.75	14.15
7	15630.00	61.2 PK	74.0	-12.8	1.71 V	21	42.68	18.52
8	15630.00	49.5 AV	54.0	-4.5	1.71 V	21	30.98	18.52

**REMARKS:**

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

**Below 1GHz Worst-Case Data**

**Beamforming MODE**

**802.11ac (VHT40)**

<b>CHANNEL</b>	TX Channel 46	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	Below 1GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	125.01	37.9 QP	43.5	-5.6	1.50 H	1	52.53	-14.62
2	324.25	42.9 QP	46.0	-3.1	1.00 H	320	53.82	-10.95
3	388.42	40.4 QP	46.0	-5.6	1.00 H	204	50.30	-9.88
4	625.00	41.8 QP	46.0	-4.3	1.50 H	134	46.08	-4.33
5	749.99	43.0 QP	46.0	-3.0	1.00 H	55	44.97	-1.99
6	874.97	41.8 QP	46.0	-4.2	1.00 H	294	42.20	-0.36

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	99.99	38.3 QP	43.5	-5.2	1.50 V	264	55.56	-17.24
2	125.01	40.3 QP	43.5	-3.2	1.00 V	305	54.96	-14.62
3	326.63	42.9 QP	46.0	-3.1	1.50 V	355	53.81	-10.90
4	336.48	43.0 QP	46.0	-3.0	1.50 V	360	53.76	-10.77
5	625.00	42.9 QP	46.0	-3.1	1.00 V	102	47.24	-4.33
6	874.97	42.0 QP	46.0	-4.0	1.00 V	360	42.40	-0.36

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.1.8 Test Results (Mode 2)

Above 1GHz Data (Subcontract Item)

CDD Mode

802.11a

<b>CHANNEL</b>	TX Channel 36	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.0 PK	74.0	-7.0	1.04 H	40	57.03	9.97
2	5150.00	52.1 AV	54.0	-1.9	1.04 H	40	42.13	9.97
3	*5180.00	116.1 PK			1.02 H	52	105.94	10.16
4	*5180.00	106.4 AV			1.02 H	52	96.24	10.16
5	#10360.00	56.3 PK	74.0	-17.7	1.00 H	270	39.32	16.98
6	#10360.00	44.3 AV	54.0	-9.7	1.00 H	270	27.32	16.98
7	15540.00	64.0 PK	74.0	-10.0	1.00 H	136	42.07	21.93
8	15540.00	48.5 AV	54.0	-5.5	1.00 H	136	26.57	21.93

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	73.2 PK	74.0	-0.8	1.22 V	235	63.23	9.97
2	5150.00	53.6 AV	54.0	-0.4	1.22 V	235	43.63	9.97
3	*5180.00	118.5 PK			1.22 V	235	108.34	10.16
4	*5180.00	108.9 AV			1.22 V	235	98.74	10.16
5	#10360.00	60.5 PK	74.0	-13.5	1.08 V	114	43.52	16.98
6	#10360.00	47.2 AV	54.0	-6.8	1.08 V	114	30.22	16.98
7	15540.00	66.3 PK	74.0	-7.7	1.19 V	306	44.37	21.93
8	15540.00	52.2 AV	54.0	-1.8	1.19 V	306	30.27	21.93

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

<b>CHANNEL</b>	TX Channel 40	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	115.7 PK			1.00 H	49	105.44	10.26
2	*5200.00	106.2 AV			1.00 H	49	95.94	10.26
3	#10400.00	57.5 PK	74.0	-16.5	1.04 H	292	40.44	17.06
4	#10400.00	45.0 AV	54.0	-9.0	1.04 H	292	27.94	17.06
5	15600.00	64.6 PK	74.0	-9.4	1.00 H	131	42.32	22.28
6	15600.00	48.7 AV	54.0	-5.3	1.00 H	131	26.42	22.28

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	118.8 PK			1.30 V	235	108.54	10.26
2	*5200.00	109.2 AV			1.30 V	235	98.94	10.26
3	#10400.00	61.2 PK	74.0	-12.8	1.14 V	253	44.14	17.06
4	#10400.00	49.0 AV	54.0	-5.0	1.14 V	253	31.94	17.06
5	15600.00	68.0 PK	74.0	-6.0	1.48 V	128	45.72	22.28
6	15600.00	53.9 AV	54.0	-0.1	1.48 V	128	31.62	22.28

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

<b>CHANNEL</b>	TX Channel 48	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	116.3 PK			1.00 H	43	105.97	10.33
2	*5240.00	106.8 AV			1.00 H	43	96.47	10.33
3	5406.00	64.2 PK	74.0	-9.8	1.00 H	43	53.48	10.72
4	5406.00	48.3 AV	54.0	-5.7	1.00 H	43	37.58	10.72
5	#10480.00	57.5 PK	74.0	-16.5	1.00 H	306	40.77	16.73
6	#10480.00	44.8 AV	54.0	-9.2	1.00 H	306	28.07	16.73
7	15720.00	64.5 PK	74.0	-9.5	1.00 H	150	41.87	22.63
8	15720.00	48.7 AV	54.0	-5.3	1.00 H	150	26.07	22.63

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5081.00	56.5 PK	74.0	-17.5	1.00 V	61	46.86	9.64
2	5081.00	45.2 AV	54.0	-8.8	1.00 V	61	35.56	9.64
3	*5240.00	116.5 PK			1.00 V	61	106.17	10.33
4	*5240.00	107.7 AV			1.00 V	61	97.37	10.33
5	5406.00	61.5 PK	74.0	-12.5	1.51 V	139	50.78	10.72
6	5406.00	50.5 AV	54.0	-3.5	1.51 V	139	39.78	10.72
7	#10480.00	61.0 PK	74.0	-13.0	1.12 V	258	44.27	16.73
8	#10480.00	49.0 AV	54.0	-5.0	1.12 V	258	32.27	16.73
9	15720.00	69.9 PK	74.0	-4.1	1.18 V	126	47.27	22.63
10	15720.00	53.7 AV	54.0	-0.3	1.18 V	126	31.07	22.63

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

**Beamforming MODE**

**802.11ac (VHT20)**

<b>CHANNEL</b>	TX Channel 36	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.3 PK	74.0	-6.7	1.00 H	48	57.33	9.97
2	5150.00	52.3 AV	54.0	-1.7	1.00 H	48	42.33	9.97
3	*5180.00	115.8 PK			1.00 H	27	105.64	10.16
4	*5180.00	105.1 AV			1.00 H	27	94.94	10.16
5	#10360.00	56.4 PK	74.0	-17.6	1.00 H	270	39.42	16.98
6	#10360.00	44.2 AV	54.0	-9.8	1.00 H	270	27.22	16.98
7	15540.00	64.0 PK	74.0	-10.0	1.03 H	148	42.07	21.93
8	15540.00	48.4 AV	54.0	-5.6	1.03 H	148	26.47	21.93

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.9 PK	74.0	-2.1	1.33 V	134	61.93	9.97
2	<b>5150.00</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>1.33 V</b>	<b>134</b>	<b>43.93</b>	<b>9.97</b>
3	*5180.00	118.1 PK			1.33 V	134	107.94	10.16
4	*5180.00	107.5 AV			1.33 V	134	97.34	10.16
5	#10360.00	60.2 PK	74.0	-13.8	1.00 V	133	43.22	16.98
6	#10360.00	48.7 AV	54.0	-5.3	1.00 V	133	31.72	16.98
7	15540.00	64.5 PK	74.0	-9.5	1.66 V	304	42.57	21.93
8	15540.00	51.9 AV	54.0	-2.1	1.66 V	304	29.97	21.93

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

<b>CHANNEL</b>	TX Channel 40	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	116.0 PK			1.00 H	31	105.74	10.26
2	*5200.00	106.3 AV			1.00 H	31	96.04	10.26
3	#10400.00	57.8 PK	74.0	-16.2	1.06 H	287	40.74	17.06
4	#10400.00	45.2 AV	54.0	-8.8	1.06 H	287	28.14	17.06
5	15600.00	64.4 PK	74.0	-9.6	1.00 H	123	42.12	22.28
6	15600.00	48.5 AV	54.0	-5.5	1.00 H	123	26.22	22.28

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	118.9 PK			1.45 V	232	108.64	10.26
2	*5200.00	108.5 AV			1.45 V	232	98.24	10.26
3	#10400.00	60.9 PK	74.0	-13.1	1.24 V	257	43.84	17.06
4	#10400.00	49.2 AV	54.0	-4.8	1.24 V	257	32.14	17.06
5	15600.00	67.3 PK	74.0	-6.7	1.42 V	227	45.02	22.28
6	15600.00	53.9 AV	54.0	-0.1	1.42 V	227	31.62	22.28

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

<b>CHANNEL</b>	TX Channel 48	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.1 PK			1.00 H	23	106.77	10.33
2	*5240.00	107.7 AV			1.00 H	23	97.37	10.33
3	5392.00	64.1 PK	74.0	-9.9	1.00 H	38	53.43	10.67
4	5392.00	48.1 AV	54.0	-5.9	1.00 H	38	37.43	10.67
5	#10480.00	57.5 PK	74.0	-16.5	1.00 H	302	40.77	16.73
6	#10480.00	44.6 AV	54.0	-9.4	1.00 H	302	27.87	16.73
7	15720.00	64.5 PK	74.0	-9.5	1.00 H	141	41.87	22.63
8	15720.00	48.6 AV	54.0	-5.4	1.00 H	141	25.97	22.63

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5082.00	60.1 PK	74.0	-13.9	2.04 V	55	50.46	9.64
2	5082.00	48.7 AV	54.0	-5.3	2.04 V	55	39.06	9.64
3	*5240.00	120.9 PK			2.04 V	55	110.57	10.33
4	*5240.00	110.2 AV			2.04 V	55	99.87	10.33
5	5392.00	61.2 PK	74.0	-12.8	1.45 V	154	50.53	10.67
6	5392.00	50.2 AV	54.0	-3.8	1.45 V	154	39.53	10.67
7	#10480.00	61.3 PK	74.0	-12.7	1.01 V	257	44.57	16.73
8	#10480.00	49.3 AV	54.0	-4.7	1.01 V	257	32.57	16.73
9	15720.00	68.1 PK	74.0	-5.9	1.46 V	128	45.47	22.63
10	15720.00	53.5 AV	54.0	-0.5	1.46 V	128	30.87	22.63

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

**802.11ac (VHT40)**

<b>CHANNEL</b>	TX Channel 38	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.4 PK	74.0	-6.6	1.04 H	46	57.43	9.97
2	5150.00	52.5 AV	54.0	-1.5	1.04 H	46	42.53	9.97
3	*5190.00	109.7 PK			1.04 H	45	99.50	10.20
4	*5190.00	99.8 AV			1.04 H	45	89.60	10.20
5	#10380.00	56.2 PK	74.0	-17.8	1.05 H	298	39.18	17.02
6	#10380.00	44.4 AV	54.0	-9.6	1.05 H	298	27.38	17.02
7	15570.00	64.6 PK	74.0	-9.4	1.10 H	127	42.50	22.10
8	15570.00	48.7 AV	54.0	-5.3	1.10 H	127	26.60	22.10

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.0 PK	74.0	-4.0	1.42 V	135	60.03	9.97
2	<b>5150.00</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>1.42 V</b>	<b>135</b>	<b>43.93</b>	<b>9.97</b>
3	*5190.00	112.1 PK			1.34 V	135	101.90	10.20
4	*5190.00	102.2 AV			1.34 V	135	92.00	10.20
5	#10380.00	58.9 PK	74.0	-15.1	1.00 V	22	41.88	17.02
6	#10380.00	46.8 AV	54.0	-7.2	1.00 V	22	29.78	17.02
7	15570.00	64.2 PK	74.0	-9.8	1.45 V	90	42.10	22.10
8	15570.00	48.8 AV	54.0	-5.2	1.45 V	90	26.70	22.10

**REMARKS:**

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

<b>CHANNEL</b>	TX Channel 46	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.2 PK	74.0	-6.8	1.07 H	25	57.23	9.97
2	5150.00	52.5 AV	54.0	-1.5	1.07 H	25	42.53	9.97
3	*5230.00	113.8 PK			1.00 H	47	103.48	10.32
4	*5230.00	103.8 AV			1.00 H	47	93.48	10.32
5	5375.00	64.6 PK	74.0	-9.4	1.00 H	49	53.97	10.63
6	5375.00	48.6 AV	54.0	-5.4	1.00 H	49	37.97	10.63
7	#10460.00	56.8 PK	74.0	-17.2	1.10 H	295	39.98	16.82
8	#10460.00	45.1 AV	54.0	-8.9	1.10 H	295	28.28	16.82
9	15690.00	64.1 PK	74.0	-9.9	1.02 H	155	41.58	22.52
10	15690.00	48.5 AV	54.0	-5.5	1.02 H	155	25.98	22.52

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.4 PK	74.0	-7.6	1.60 V	120	56.43	9.97
2	5150.00	53.5 AV	54.0	-0.5	1.60 V	120	43.53	9.97
3	*5230.00	116.5 PK			2.08 V	53	106.18	10.32
4	*5230.00	106.3 AV			2.08 V	53	95.98	10.32
5	5375.00	61.2 PK	74.0	-12.8	1.49 V	163	50.57	10.63
6	5375.00	50.1 AV	54.0	-3.9	1.49 V	163	39.47	10.63
7	#10460.00	58.4 PK	74.0	-15.6	1.09 V	22	41.58	16.82
8	#10460.00	45.7 AV	54.0	-8.3	1.09 V	22	28.88	16.82
9	15690.00	65.0 PK	74.0	-9.0	1.57 V	107	42.48	22.52
10	15690.00	49.3 AV	54.0	-4.7	1.57 V	107	26.78	22.52

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

**802.11ac (VHT80)**

<b>CHANNEL</b>	TX Channel 42	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.9 PK	74.0	-10.1	1.00 H	26	53.93	9.97
2	5150.00	47.9 AV	54.0	-6.1	1.00 H	26	37.93	9.97
3	*5210.00	104.3 PK			1.00 H	39	94.03	10.27
4	*5210.00	94.2 AV			1.00 H	39	83.93	10.27
5	5350.00	67.5 PK	74.0	-6.5	1.08 H	33	56.95	10.55
6	5350.00	52.9 AV	54.0	-1.1	1.08 H	33	42.35	10.55
7	#10420.00	57.2 PK	74.0	-16.8	1.11 H	309	40.22	16.98
8	#10420.00	44.8 AV	54.0	-9.2	1.11 H	309	27.82	16.98
9	15630.00	64.6 PK	74.0	-9.4	1.02 H	141	42.23	22.37
10	15630.00	48.7 AV	54.0	-5.3	1.02 H	141	26.33	22.37

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.7 PK	74.0	-9.3	1.34 V	120	54.73	9.97
2	5150.00	53.6 AV	54.0	-0.4	1.34 V	120	43.63	9.97
3	*5210.00	106.7 PK			2.04 V	58	96.43	10.27
4	*5210.00	96.6 AV			2.04 V	58	86.33	10.27
5	5350.00	61.0 PK	74.0	-13.0	1.45 V	172	50.45	10.55
6	5350.00	49.8 AV	54.0	-4.2	1.45 V	172	39.25	10.55
7	#10420.00	57.3 PK	74.0	-16.7	1.04 V	40	40.32	16.98
8	#10420.00	45.5 AV	54.0	-8.5	1.04 V	40	28.52	16.98
9	15630.00	64.4 PK	74.0	-9.6	1.46 V	108	42.03	22.37
10	15630.00	48.9 AV	54.0	-5.1	1.46 V	108	26.53	22.37

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

below 1GHz worst-case data

**Beamforming MODE**

802.11ac (VHT20)

<b>CHANNEL</b>	TX Channel 48	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	Below 1GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	214.56	37.8 QP	43.5	-5.7	1.64 H	270	53.83	-16.06
2	325.62	42.7 QP	46.0	-3.3	1.34 H	100	53.64	-10.93
3	354.34	40.6 QP	46.0	-5.4	1.24 H	247	51.24	-10.65
4	370.72	39.4 QP	46.0	-6.6	1.24 H	241	49.70	-10.28
5	388.54	41.0 QP	46.0	-5.0	1.10 H	201	50.85	-9.88
6	624.81	41.6 QP	46.0	-4.4	1.34 H	145	45.94	-4.33

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	34.31	36.6 QP	40.0	-3.4	1.64 V	211	50.96	-14.35
2	61.94	36.2 QP	40.0	-3.8	1.37 V	200	50.65	-14.41
3	125.24	40.6 QP	43.5	-2.9	1.34 V	200	55.24	-14.63
4	335.64	42.5 QP	46.0	-3.5	1.24 V	144	53.31	-10.77
5	396.61	42.7 QP	46.0	-3.3	1.24 V	244	52.43	-9.72
6	500.22	42.2 QP	46.0	-3.8	1.24 V	301	49.39	-7.15

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100375	May 06, 2015	May 05, 2016
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-522	Sep. 15, 2014	Sep. 14, 2015
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ENV216	100071	Nov. 10, 2014	Nov. 09, 2015
RF Cable (JYEBAO)	5D-FB	COCCAB-001	Mar. 09, 2015	Mar. 08, 2016
50 ohms Terminator	N/A	EMC-03	Sep. 22, 2014	Sep. 21, 2015
50 ohms Terminator	N/A	EMC-02	Sep. 30, 2014	Sep. 29, 2015
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: May 07, 2015

4.2.3 Test Procedure


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

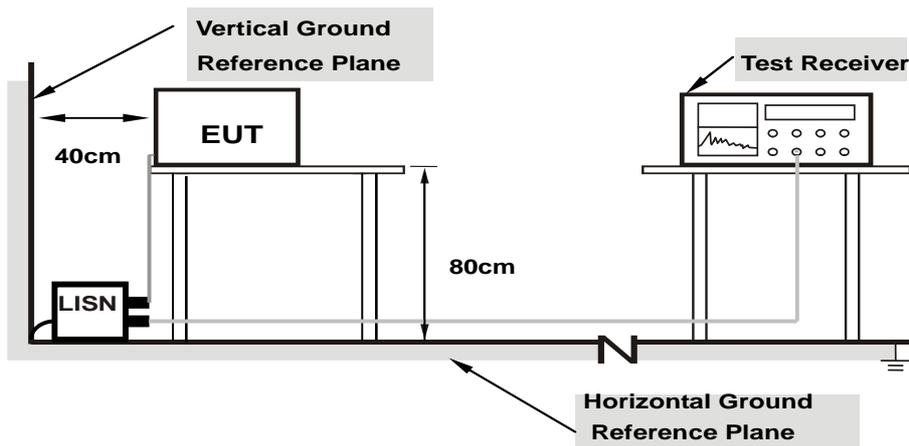

- Note:**
- 1.Support units were connected to second LISN.
  - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

Same as 4.1.6.

4.2.7 Test Results


**Beamforming MODE**

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.08	48.91	24.79	48.99	24.87	66.00	56.00	-17.01	-31.13
2	0.29453	0.09	40.79	32.35	40.88	32.44	60.40	50.40	-19.51	-17.95
3	1.45703	0.15	32.86	25.56	33.01	25.71	56.00	46.00	-22.99	-20.29
4	3.88672	0.22	39.27	31.48	39.49	31.70	56.00	46.00	-16.51	-14.30
5	10.03906	0.45	42.91	37.66	43.36	38.11	60.00	50.00	-16.64	-11.89
6	12.19922	0.50	42.96	38.23	43.46	38.73	60.00	50.00	-16.54	-11.27

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

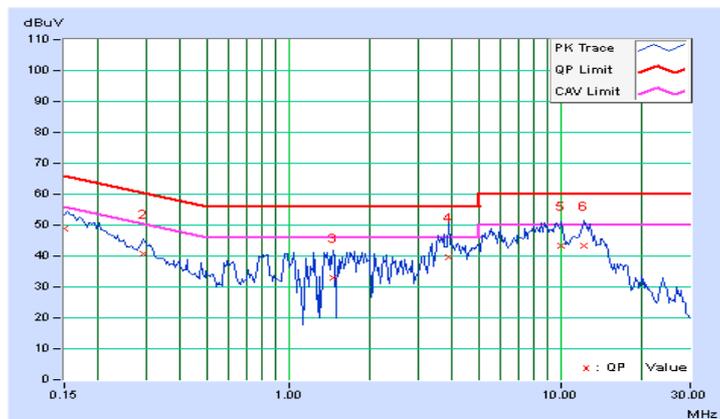


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.08	47.77	26.04	47.85	26.12	66.00	56.00	-18.15	-29.88
2	0.29716	0.09	41.83	32.31	41.92	32.40	60.32	50.32	-18.40	-17.92
3	0.99766	0.13	39.33	25.69	39.46	25.82	56.00	46.00	-16.54	-20.18
4	3.84766	0.23	43.32	32.67	43.55	32.90	56.00	46.00	-12.45	-13.10
5	9.57422	0.44	46.31	39.93	46.75	40.37	60.00	50.00	-13.25	-9.63
<b>6</b>	<b>12.57422</b>	<b>0.53</b>	<b>45.21</b>	<b>39.96</b>	<b>45.74</b>	<b>40.49</b>	<b>60.00</b>	<b>50.00</b>	<b>-14.26</b>	<b>-9.51</b>

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

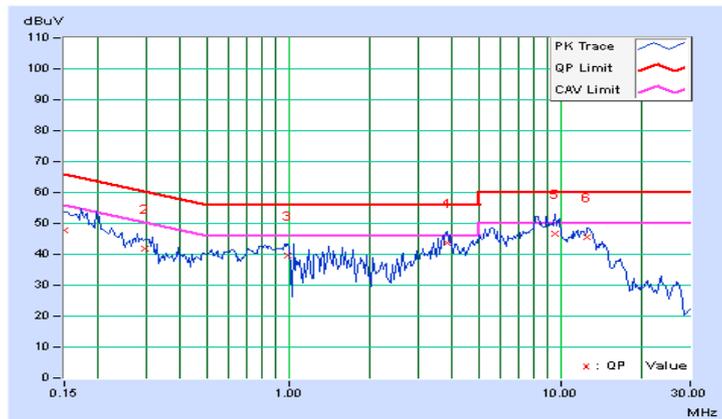

### 4.3 Transmit Power Measurement

#### 4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		LIMIT
U-NII-1	---	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	---	Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
	---	Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	---		1 Watt (30 dBm)

\*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(N_{ANT}/N_{SS})$  dB.

#### 4.3.2 Test Setup

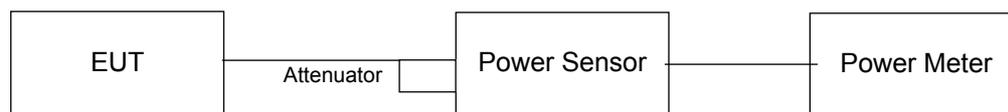

#### 4.3.3 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter Anritsu	ML2495A	0824006	May 22, 2014	May 21, 2015
Power Sensor Anritsu	MA2411B	0738172	May 22, 2014	May 21, 2015

- NOTE:**
1. The test was performed in Oven room B.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. Tested Date: May 15, 2015

#### 4.3.4 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Result (Mode 1)

##### CDD Mode

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
<b>802.11a</b>									
36	5180	20.31	20.75	21.13	20.93	479.847	26.81	30	Pass
40	5200	21.10	20.88	20.90	21.60	518.858	27.15	30	Pass
48	5240	21.20	21.16	21.38	21.07	527.785	27.22	30	Pass
<b>802.11ac (VHT20)</b>									
36	5180	20.12	20.65	21.44	21.13	487.981	26.88	30	Pass
40	5200	21.04	21.07	21.32	21.24	523.559	27.19	30	Pass
48	5240	21.33	21.24	21.30	21.23	536.511	27.30	30	Pass
<b>802.11ac (VHT40)</b>									
38	5190	18.41	18.37	19.04	19.26	302.551	24.81	30	Pass
46	5230	23.68	23.70	23.90	24.02	965.588	29.85	30	Pass
<b>802.11ac (VHT80)</b>									
42	5210	16.47	16.55	16.56	17.51	191.201	22.81	30	Pass

##### Beamforming MODE

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
<b>802.11ac (VHT20)</b>									
36	5180	19.20	19.75	20.24	19.96	382.347	25.82	25.99	Pass
40	5200	19.54	19.63	19.99	19.75	375.959	25.75	25.99	Pass
48	5240	19.75	19.96	19.92	19.90	389.388	25.90	25.99	Pass
<b>802.11ac (VHT40)</b>									
38	5190	18.41	18.37	19.04	19.26	302.551	24.81	25.99	Pass
46	5230	19.65	19.88	19.76	20.10	386.485	25.87	25.99	Pass
<b>802.11ac (VHT80)</b>									
42	5210	16.47	16.55	16.56	17.51	191.201	22.81	25.99	Pass

Note: Directional gain =  $3.99\text{dBi} + 10\log(4) = 10.01\text{dBi} > 6\text{dBi}$  , so the power limit shall be reduced to  $30 - (10.01 - 6) = 25.99\text{dBm}$ .

#### 4.3.8 Test Result (Mode 2)

##### CDD Mode

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
<b>802.11a</b>									
36	5180	21.90	21.93	22.31	22.57	661.77	28.21	30	Pass
40	5200	23.18	23.13	23.28	23.73	862.421	29.36	30	Pass
48	5240	23.04	22.81	23.16	23.65	831.11	29.20	30	Pass

##### Beamforming Mode

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
<b>802.11ac (VHT20)</b>									
36	5180	22.04	21.89	22.02	22.65	657.779	28.18	30	Pass
40	5200	23.28	23.45	23.43	23.91	900.453	29.54	30	Pass
48	5240	23.70	23.66	24.04	24.43	997.542	29.99	30	Pass
<b>802.11ac (VHT40)</b>									
38	5190	19.44	19.55	19.71	20.09	373.694	25.73	30	Pass
46	5230	22.60	22.89	22.94	23.48	796.139	29.01	30	Pass
<b>802.11ac (VHT80)</b>									
42	5210	18.34	18.57	18.55	19.30	296.907	24.73	30	Pass


**NOTE:** Directional gain =  $-0.84\text{dBi} + 10\log(4) = 5.18\text{dBi} < 6\text{dBi}$  , so the power limit shall not be reduced.

#### 4.4 Peak Power Spectral Density Measurement

##### 4.4.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		LIMIT
U-NII-1	---	Outdoor Access Point	17dBm/ MHz
	---	Fixed point-to-point Access Point	
	√	Indoor Access Point	
	---	Mobile and Portable client device	11dBm/ MHz
U-NII-2A	---		11dBm/ MHz
U-NII-2C	---		11dBm/ MHz
U-NII-3	---		30dBm/ 500kHz

##### 4.4.2 Test Setup

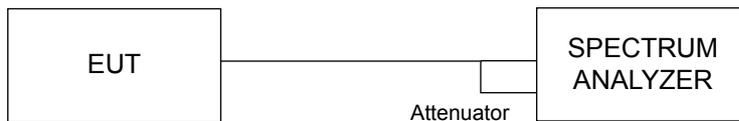

##### 4.4.3 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

- NOTE:**
1. The test was performed in Oven room B.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. Tested Date: May 15, 2015

#### 4.4.4 Test Procedure

##### For 802.11a, 802.11ac (VHT20) & 802.11ac (VHT40)

Using method SA-1

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW  $\geq$  3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value

##### For 802.11ac (VHT80)

Using method SA-2

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW  $\geq$  3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value and add  $10 \log (1/\text{duty cycle})$

#### 4.4.5 Deviation from Test Standard

No deviation.

#### 4.4.6 EUT Operating Condition

Same as Item 4.3.6.

#### 4.4.7 Test Results (Mode 1)

##### CDD Mode

Chan.	Chan. Freq. (MHz)	PSD (dBm)				Total Power Density (dBm)	MAX. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3			
<b>802.11a</b>								
36	5180	6.56	6.67	6.95	7.00	12.82	12.99	Pass
40	5200	6.46	5.94	7.09	7.15	12.71	12.99	Pass
48	5240	5.95	5.27	7.32	7.27	12.56	12.99	Pass
<b>802.11ac (VHT20)</b>								
36	5180	5.73	5.43	7.55	7.18	12.59	12.99	Pass
40	5200	6.04	5.84	7.10	7.12	12.59	12.99	Pass
48	5240	6.06	5.94	6.85	6.95	12.49	12.99	Pass
<b>802.11ac (VHT40)</b>								
38	5190	1.45	1.30	1.80	2.22	7.73	12.99	Pass
46	5230	6.41	6.83	5.87	6.19	12.36	12.99	Pass

- Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $3.99\text{dBi} + 10\log(4) = 10.01\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $17-(10.01-6) = 12.99\text{dBm}$ .



Chan.	Chan. Freq. (MHz)	PSD w/o duty factor (dBm)				Duty Factor (dB)	Total PSD with Duty Factor (dBm)	MAX. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
<b>802.11ac (VHT80)</b>									
42	5210	-3.67	-3.57	-4.07	-2.98	0.21	2.68	12.99	Pass

- Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $3.99\text{dBi} + 10\log(4) = 10.01\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $17-(10.01-6) = 12.99\text{dBm}$ .
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value



802.11a – Chain 2: CH 48

802.11ac (VHT20) – Chain 2: CH 36

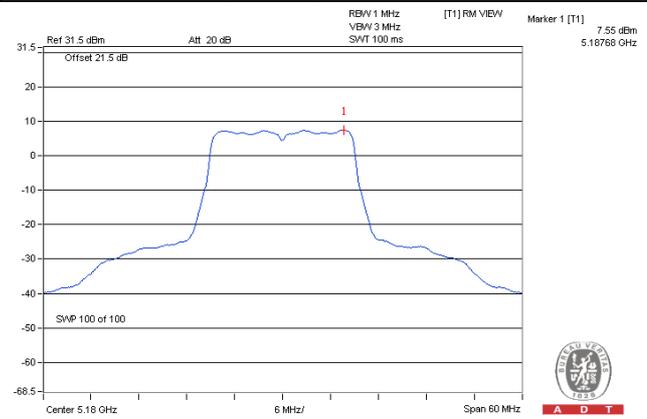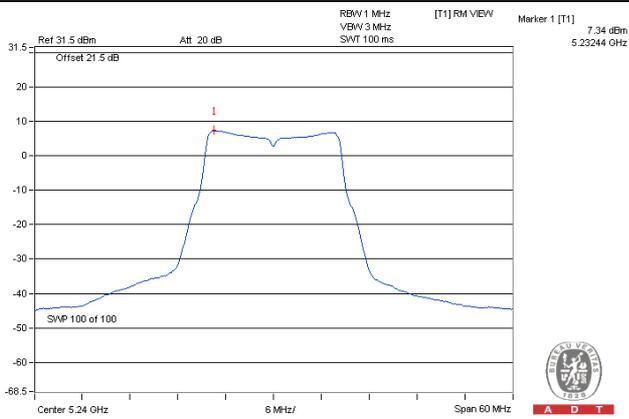

802.11ac (VHT40) – Chain 1: CH 46

802.11ac (VHT80) – Chain 3: CH 42

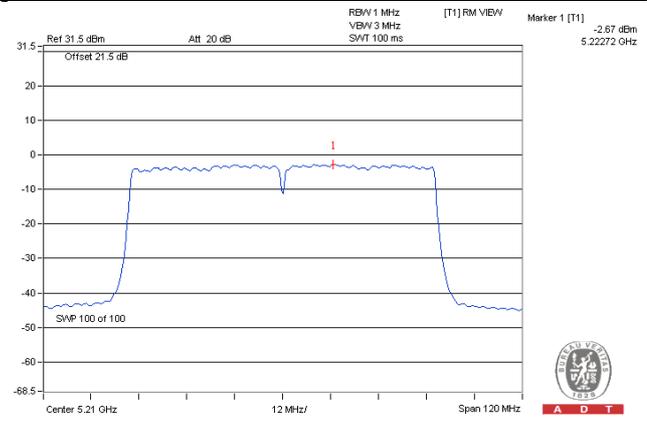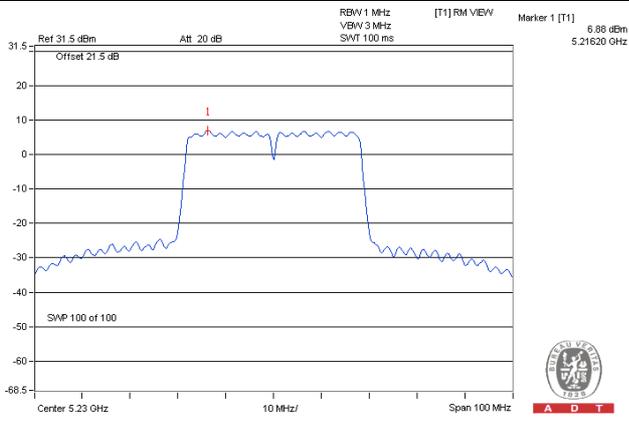

#### 4.4.8 Test Results (Mode 2)

##### CDD Mode

Chan.	Chan. Freq. (MHz)	PSD (dBm)				Total Power Density (dBm)	MAX. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3			
<b>802.11a</b>								
36	5180	7.95	7.97	7.48	7.92	13.86	17	Pass
40	5200	8.40	8.70	8.65	10.37	15.13	17	Pass
48	5240	9.14	8.41	9.07	9.05	14.95	17	Pass

Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

2. Directional gain =  $-0.84\text{dBi} + 10\log(4) = 5.18\text{dBi} < 6\text{dBi}$  , so the power density limit shall be not reduced.

**Beamforming Mode**

Chan.	Chan. Freq. (MHz)	PSD (dBm)				Total Power Density (dBm)	MAX. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3			
<b>802.11ac (VHT20)</b>								
36	5180	7.52	6.91	7.63	8.53	13.71	17	Pass
40	5200	8.65	8.78	9.03	9.69	15.08	17	Pass
48	5240	8.91	8.80	9.17	10.17	15.32	17	Pass
<b>802.11ac (VHT40)</b>								
38	5190	1.90	1.96	2.15	3.39	8.42	17	Pass
46	5230	5.12	5.20	5.76	5.90	11.53	17	Pass

- Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $-0.84\text{dBi} + 10\log(4) = 5.18\text{dBi} < 6\text{dBi}$  , so the power density limit shall be not reduced.



Chan.	Chan. Freq. (MHz)	PSD w/o duty factor (dBm)				Duty Factor (dB)	Total PSD with Duty Factor (dBm)	MAX. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
<b>802.11ac (VHT80)</b>									
42	5210	-1.63	-2.00	-1.61	-1.34	0.21	4.60	17	Pass

- Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $-0.84\text{dBi} + 10\log(4) = 5.18\text{dBi} < 6\text{dBi}$  , so the power density limit shall be not reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value



802.11a – Chain 3: CH 40

802.11ac (VHT20) – Chain 3: CH 48

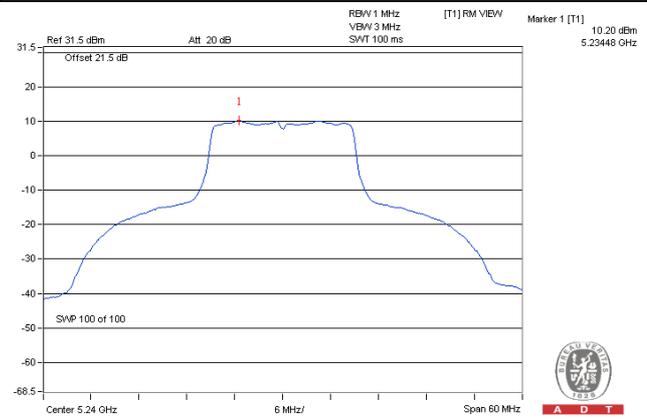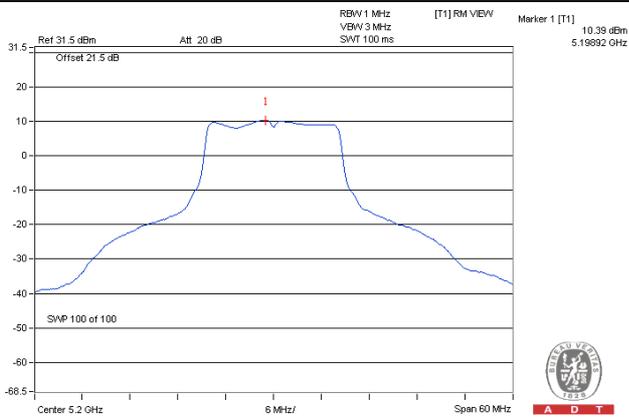

802.11ac (VHT40) – Chain 3: CH 46

802.11ac (VHT80) – Chain 3: CH 42

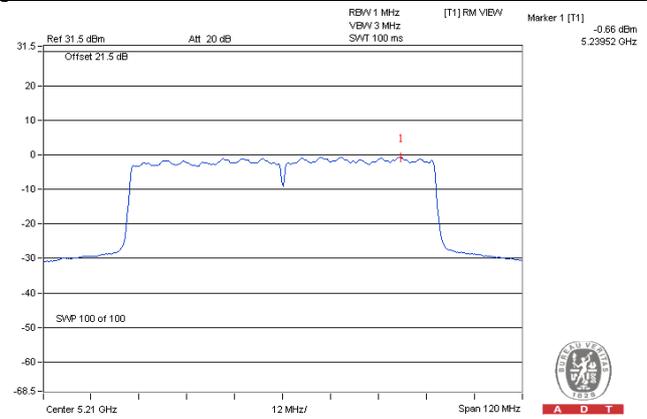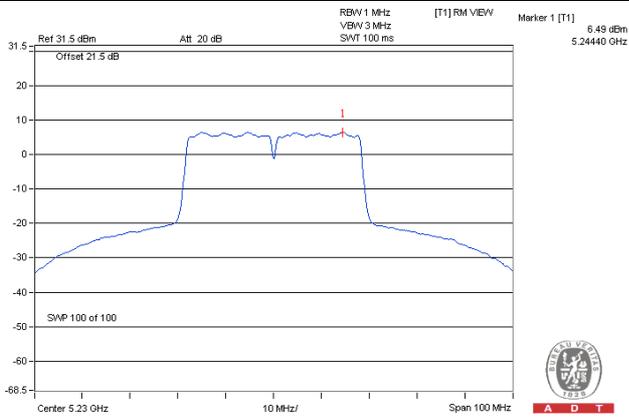


## 4.5 Frequency Stability Measurement

### 4.5.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

### 4.5.2 Test Setup

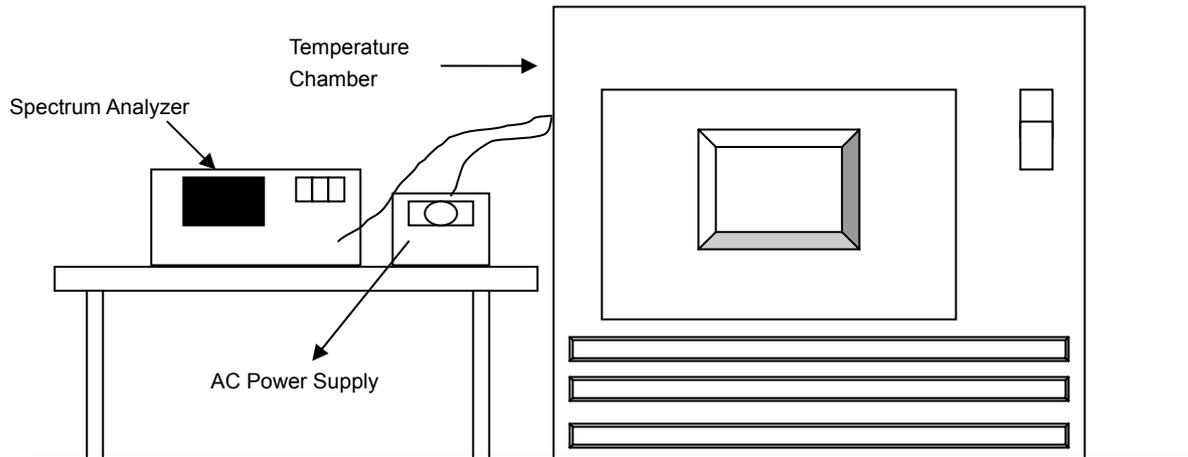

### 4.5.3 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015
Temperature & Humidity Chamber GIANTFORCE	GTH-150-40-S P-AR	MAA0812-008	Jan. 12, 2015	Jan. 11, 2016

- NOTE:**
1. The test was performed in Oven room B.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. Tested Date: May 15, 2015

### 4.5.4 Test Procedure

- a. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

#### 4.5.5 Deviation from Test Standard

No deviation.

#### 4.5.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

**4.5.7 Test Results (Mode 1)**

<b>FREQUENCY STABILITY VERSUS TEMP.</b>									
<b>OPERATING FREQUENCY: 5180MHz</b>									
<b>TEMP. (°C)</b>	<b>POWER SUPPLY (Vac)</b>	<b>0 MINUTE</b>		<b>2 MINUTE</b>		<b>5 MINUTE</b>		<b>10 MINUTE</b>	
		<b>Measured Frequency (MHz)</b>	<b>Frequency Drift (%)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Drift (%)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Drift (%)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Drift (%)</b>
50	120	5179.986	-0.00027	5179.9818	-0.00035	5179.9819	-0.00035	5179.9862	-0.00027
40	120	5180.0121	0.00023	5180.0119	0.00023	5180.0127	0.00025	5180.0092	0.00018
30	120	5179.9777	-0.00043	5179.9741	-0.00050	5179.9749	-0.00048	5179.9782	-0.00042
20	120	5180.0266	0.00051	5180.0262	0.00051	5180.0234	0.00045	5180.0258	0.00050
10	120	5180.0008	0.00002	5180.0024	0.00005	5179.9984	-0.00003	5180.0012	0.00002
0	120	5179.9894	-0.00020	5179.9923	-0.00015	5179.991	-0.00017	5179.9928	-0.00014
-10	120	5179.9754	-0.00047	5179.9745	-0.00049	5179.9744	-0.00049	5179.9739	-0.00050
-20	120	5179.9931	-0.00013	5179.9921	-0.00015	5179.9944	-0.00011	5179.9969	-0.00006
-30	120	5180.0158	0.00031	5180.0158	0.00031	5180.0164	0.00032	5180.0164	0.00032

<b>FREQUENCY STABILITY VERSUS VOLTAGE</b>									
<b>OPERATING FREQUENCY: 5180MHz</b>									
<b>TEMP. (°C)</b>	<b>POWER SUPPLY (Vac)</b>	<b>0 MINUTE</b>		<b>2 MINUTE</b>		<b>5 MINUTE</b>		<b>10 MINUTE</b>	
		<b>Measured Frequency (MHz)</b>	<b>Frequency Drift (%)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Drift (%)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Drift (%)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Drift (%)</b>
20	138	5180.0274	0.00053	5180.0263	0.00051	5180.0231	0.00045	5180.026	0.00050
	120	5180.0266	0.00051	5180.0262	0.00051	5180.0234	0.00045	5180.0258	0.00050
	102	5180.0262	0.00051	5180.0254	0.00049	5180.0244	0.00047	5180.0263	0.00051

**4.5.8 Test Results (Mode 2)**

<b>FREQUENCY STABILITY VERSUS TEMP.</b>									
<b>OPERATING FREQUENCY: 5180MHz</b>									
<b>TEMP. (°C)</b>	<b>POWER SUPPLY (Vac)</b>	<b>0 MINUTE</b>		<b>2 MINUTE</b>		<b>5 MINUTE</b>		<b>10 MINUTE</b>	
		<b>Measured Frequency (MHz)</b>	<b>Frequency Drift (%)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Drift (%)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Drift (%)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Drift (%)</b>
50	120	5179.9813	-0.00036	5179.979	-0.00041	5179.9815	-0.00036	5179.9805	-0.00038
40	120	5179.9954	-0.00009	5179.9914	-0.00017	5179.9949	-0.00010	5179.9941	-0.00011
30	120	5180.0089	0.00017	5180.0101	0.00019	5180.0121	0.00023	5180.0108	0.00021
20	120	5180.0238	0.00046	5180.0261	0.00050	5180.0243	0.00047	5180.0265	0.00051
10	120	5179.9848	-0.00029	5179.9803	-0.00038	5179.9819	-0.00035	5179.9798	-0.00039
0	120	5179.9996	-0.00001	5180.0021	0.00004	5179.9985	-0.00003	5180.0024	0.00005
-10	120	5180.018	0.00035	5180.018	0.00035	5180.0206	0.00040	5180.0216	0.00042
-20	120	5180.0088	0.00017	5180.0101	0.00019	5180.0097	0.00019	5180.0077	0.00015
-30	120	5179.9838	-0.00031	5179.9808	-0.00037	5179.9829	-0.00033	5179.985	-0.00029

<b>FREQUENCY STABILITY VERSUS VOLTAGE</b>									
<b>OPERATING FREQUENCY: 5180MHz</b>									
<b>TEMP. (°C)</b>	<b>POWER SUPPLY (Vac)</b>	<b>0 MINUTE</b>		<b>2 MINUTE</b>		<b>5 MINUTE</b>		<b>10 MINUTE</b>	
		<b>Measured Frequency (MHz)</b>	<b>Frequency Drift (%)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Drift (%)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Drift (%)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Drift (%)</b>
20	138	5180.0242	0.00047	5180.0253	0.00049	5180.0249	0.00048	5180.0262	0.00051
	120	5180.0238	0.00046	5180.0261	0.00050	5180.0243	0.00047	5180.0265	0.00051
	102	5180.0238	0.00046	5180.0268	0.00052	5180.0234	0.00045	5180.0269	0.00052

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).



## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab/Telecom Lab**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---