

## FCC Test Report

**Report No.:** RF160411C02-1

**FCC ID:** PY316100335

**Test Model:** EX6200v2

**Received Date:** Mar. 31, 2016

**Test Date:** Apr. 21 ~ Jun. 04, 2016

**Issued Date:** Jun. 04, 2016

**Applicant:** NETGEAR, INC.

**Address:** 350 East Plumeria Drive San Jose, CA 95134

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Duty Cycle of Test Signal.....	12
3.4 Description of Support Units.....	14
3.4.1 Configuration of System under Test.....	14
3.5 General Description of Applied Standard.....	15
<b>4 Test Types and Results</b> .....	<b>16</b>
4.1 Radiated Emission and Bandedge Measurement.....	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	16
4.1.2 Test Instruments.....	18
4.1.3 Test Procedure.....	19
4.1.4 Deviation from Test Standard.....	19
4.1.5 Test Setup.....	20
4.1.6 EUT Operating Conditions.....	20
4.1.7 Test Results.....	21
4.2 Conducted Emission Measurement.....	40
4.2.1 Limits of Conducted Emission Measurement.....	40
4.2.2 Test Instruments.....	40
4.2.3 Test Procedure.....	41
4.2.4 Deviation from Test Standard.....	41
4.2.5 Test Setup.....	41
4.2.6 EUT Operating Conditions.....	41
4.2.7 Test Results.....	42
4.3 Transmit Power Measurement.....	44
4.3.1 Limits of Transmit Power Measurement.....	44
4.3.2 Test Setup.....	44
4.3.3 Test Instruments.....	44
4.3.4 Test Procedure.....	45
4.3.5 Deviation from Test Standard.....	45
4.3.6 EUT Operating Conditions.....	45
4.3.7 Test Result.....	46
4.4 Peak Power Spectral Density Measurement.....	56
4.4.1 Limits of Peak Power Spectral Density Measurement.....	56
4.4.2 Test Setup.....	56
4.4.3 Test Instruments.....	56
4.4.4 Test Procedure.....	57
4.4.5 Deviation from Test Standard.....	57
4.4.6 EUT Operating Condition.....	57
4.4.7 Test Results.....	58
4.5 Frequency Stability.....	66
4.5.1 Limits of Frequency Stability Measurement.....	66
4.5.2 Test Setup.....	66
4.5.3 Test Instruments.....	66
4.5.4 Test Procedure.....	66
4.5.5 Deviation from Test Standard.....	66
4.5.6 EUT Operating Condition.....	66

4.5.7 Test Results .....	67
4.6 6dB Bandwidth Measurement.....	68
4.6.1 Limits of 6dB Bandwidth Measurement.....	68
4.6.2 Test Setup.....	68
4.6.3 Test Instruments .....	68
4.6.4 Test Procedure .....	68
4.6.5 Deviation from Test Standard .....	68
4.6.6 EUT Operating Condition .....	68
4.6.7 Test Results .....	69
<b>5 Pictures of Test Arrangements.....</b>	<b>72</b>
<b>Annex A - Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band) .....</b>	<b>73</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>76</b>

### Release Control Record

Issue No.	Description	Date Issued
RF160411C02-1	Original release.	Jun. 04, 2016

## 1 Certificate of Conformity

**Product:** AC 1200 WiFi Range Extender

**Brand:** Netgear

**Test Model:** EX6200v2

**Sample Status:** Engineering sample


**Applicant:** NETGEAR, INC.

**Test Date:** Apr. 21 ~ Jun. 04, 2016

**Standard:** 47 CFR FCC Part 15, Subpart E (Section 15.407)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the Conditions specified in this report.

**Prepared by :**

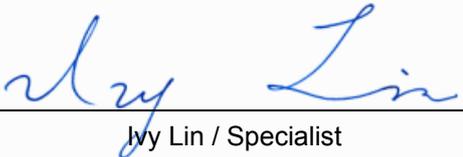  
Ivy Lin / Specialist

**Date:**

Jun. 04, 2016

**Approved by :**

  
Ken Liu / Senior Manager

**Date:**

Jun. 04, 2016

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -10.69dB at 0.29076MHz.
15.407(b)(1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement*	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 5150.00MHz, 5639.20MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(e)	6dB bandwidth	PASS	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is RSMA not a standard connector.

\*For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.44 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.59 dB
	200MHz ~ 1000MHz	3.60 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	AC 1200 WiFi Range Extender
Brand	Netgear
Test Model	EX6200v2
Sample Status	Engineering sample
Power Supply Rating	12Vdc from adapter
Modulation Type	256QAM, 64QAM, 16QAM, QPSK, BPSK
Modulation Technology	OFDM
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	5180 ~ 5240MHz, 5745 ~ 5825MHz
Number of Channel	5180 ~ 5240MHz: 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80) 5745 ~ 5825MHz: 5 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80)
Output Power	CDD Mode: 5180 ~ 5240MHz: 701.309mW 5745 ~ 5825MHz: 749.461mW Beamforming Mode: 5180 ~ 5240MHz: 698.807mW 5745 ~ 5825MHz: 769.010mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter
Data Cable Supplied	1.45m RJ45 non-shielded cable without core

**Note:**

- The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Band	Modulation Mode	Beamforming Mode	TX Function
2.4GHz	802.11b	Not Support	2TX
	802.11g	Not Support	2TX
	802.11n (HT20)	Support	2TX
	802.11n (HT40)	Support	2TX
5GHz	802.11a	Not Support	2TX
	802.11n (HT20)	Support	2TX
	802.11n (HT40)	Support	2TX
	802.11ac (VHT20)	Support	2TX
	802.11ac (VHT40)	Support	2TX
	802.11ac (VHT80)	Support	2TX

\* The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for 20MHz/40MHz, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

\* For 5GHz band 802.11n and 802.11ac, CDD mode is the worst case for final radiated emission and power line conducted emission tests after pretesting CDD mode and beamforming mode.

- The EUT uses following antenna.

Antenna Type	Dipole	
Antenna Connector	RSMA	
Antenna Gain (dBi)		
	2.4GHz Band	5GHz Band
	1.78	1.86

- The EUT uses following adapters.

Adapter 1	
Brand	NETGEAR
Model	2ABB018F 1 NA
P/N	332-10750-01
Input Power	100-120Vac, 50/60Hz, 0.6A
Output Power	12.0Vdc, 1.5A
Power Line	1.8m DC cable without core attached on adapter

Adapter 2	
Brand	NETGEAR
Model	AD2032F10
P/N	332-10751-01
Input Power	100-120Vac, 50/60Hz, 0.56A
Output Power	12Vdc, 1.5A
Power Line	1.8m DC cable without core attached on adapter

\* After pre-testing, adapter 2 was the worst case for final test.

- Spurious emission of the simultaneous operation (2.4GHz and 5GHz) has been evaluated and no non-compliance was found.

### 3.2 Description of Test Modes

#### FOR 5180 ~ 5240MHz:

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (40MHz):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

#### FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775MHz

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement  
 RE<1G: Radiated Emission below 1GHz  
 PLC: Power Line Conducted Emission  
 APCM: Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

#### Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
-	802.11ac (VHT20)		36 to 48	36, 40, 48	OFDM	BPSK	7.2
-	802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	15.0
-	802.11ac (VHT80)		42	42	OFDM	BPSK	58.5
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.0
-	802.11ac (VHT20)		149 to 165	149, 157, 165	OFDM	BPSK	7.2
-	802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	15.0
-	802.11ac (VHT80)		155	155	OFDM	BPSK	58.5

#### Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5180-5240	36 to 48	149	OFDM	BPSK	6.0
	802.11a	5745-5825	149 to 165		OFDM	BPSK	6.0

**Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5180-5320	36 to 64	149	OFDM	BPSK	6.0
	802.11a	5745-5825	149 to 165		OFDM	BPSK	6.0

**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
-	802.11ac (VHT20)		36 to 48	36, 40, 48	OFDM	BPSK	7.2
-	802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	15.0
-	802.11ac (VHT80)		42	42	OFDM	BPSK	58.5
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.0
-	802.11ac (VHT20)		149 to 165	149, 157, 165	OFDM	BPSK	7.2
-	802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	15.0
-	802.11ac (VHT80)		155	155	OFDM	BPSK	58.5

**Test Condition:**

Applicable to	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	25 deg. C, 65% RH, 25 deg. C, 66% RH	120Vac, 60Hz	Alan Wu
RE<1G	22 deg. C, 64% RH	120Vac, 60Hz	Alan Wu
PLC	24 deg. C, 64% RH	120Vac, 60Hz	Match Tsui
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Chris Lin

### 3.3 Duty Cycle of Test Signal

#### CDD Mode

802.11ac (VHT20): Duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.


802.11a, 802.11ac (VHT40), 802.11ac (VHT80): Duty cycle of test signal is  $< 98\%$ , duty factor shall be considered.

802.11a: Duty cycle =  $2.058/2.141 = 0.961$ , Duty factor =  $10 * \log(1/0.961) = 0.17$

802.11ac (VHT20): Duty cycle =  $4.995/5.080 = 0.983$

802.11ac (VHT40): Duty cycle =  $2.424/2.506 = 0.967$ , Duty factor =  $10 * \log(1/0.967) = 0.14$

802.11ac (VHT80): Duty cycle =  $1.139/1.224 = 0.931$ , Duty factor =  $10 * \log(1/0.931) = 0.31$

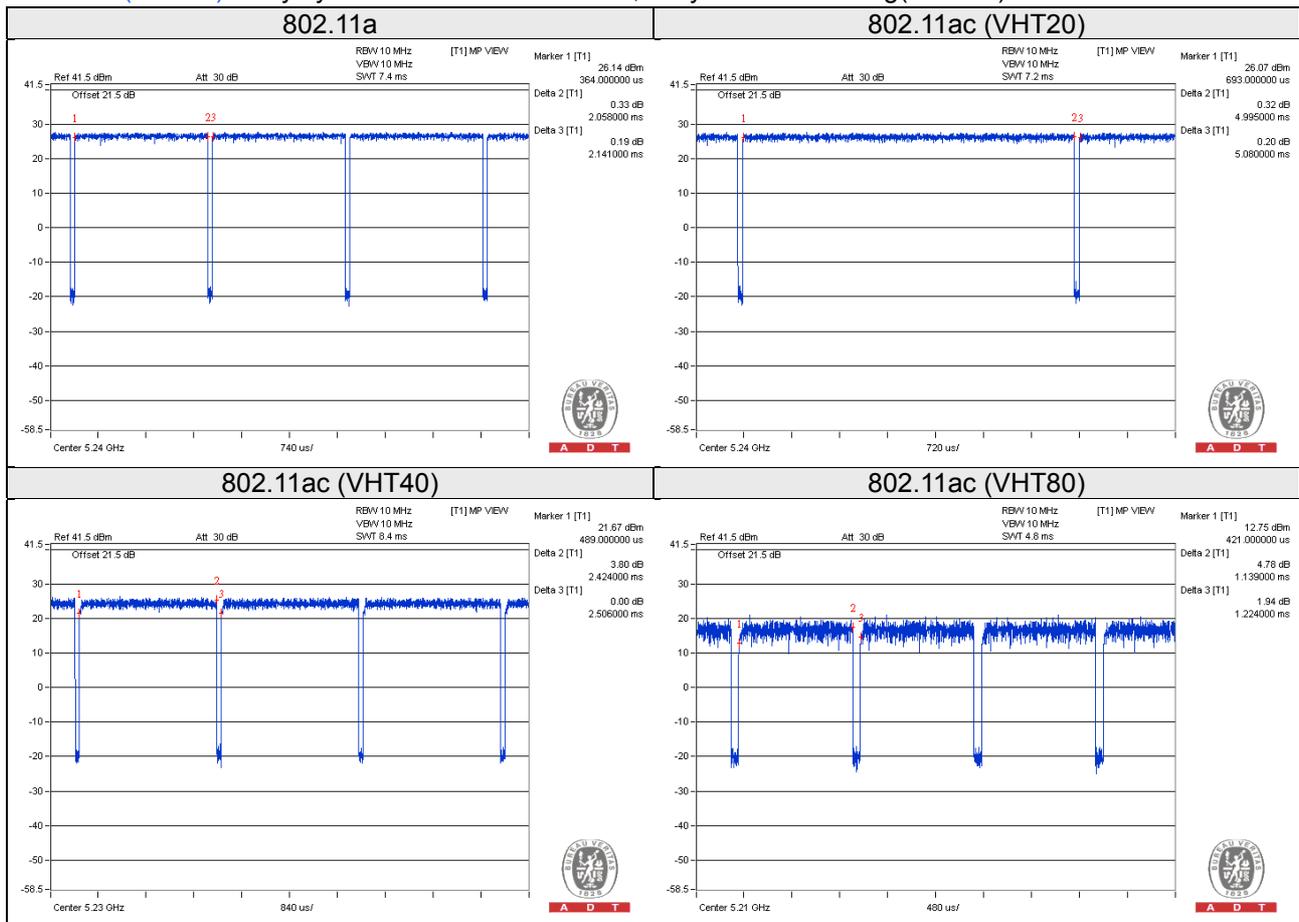

**Beamforming Mode**

802.11ac (VHT20): Duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.

802.11ac (VHT40), 802.11ac (VHT80): Duty cycle of test signal is  $< 98\%$ , duty factor shall be considered.

802.11ac (VHT20): Duty cycle =  $5.000/5.082 = 0.984$

802.11ac (VHT40): Duty cycle =  $2.427/2.509 = 0.967$ , Duty factor =  $10 * \log(1/0.967) = 0.14$

802.11ac (VHT80): Duty cycle =  $1.137/1.224 = 0.929$ , Duty factor =  $10 * \log(1/0.929) = 0.32$



### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	6RP2YM1	FCC DoC Approved	-
B.	USB 3.0 FLASH	HP	v250W	01	FCC DoC Approved	-
C.	Load	N/A	N/A	N/A	N/A	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45	4	1.8	N	0	-
2.	RJ45	1	10	N	0	-

#### 3.4.1 Configuration of System under Test

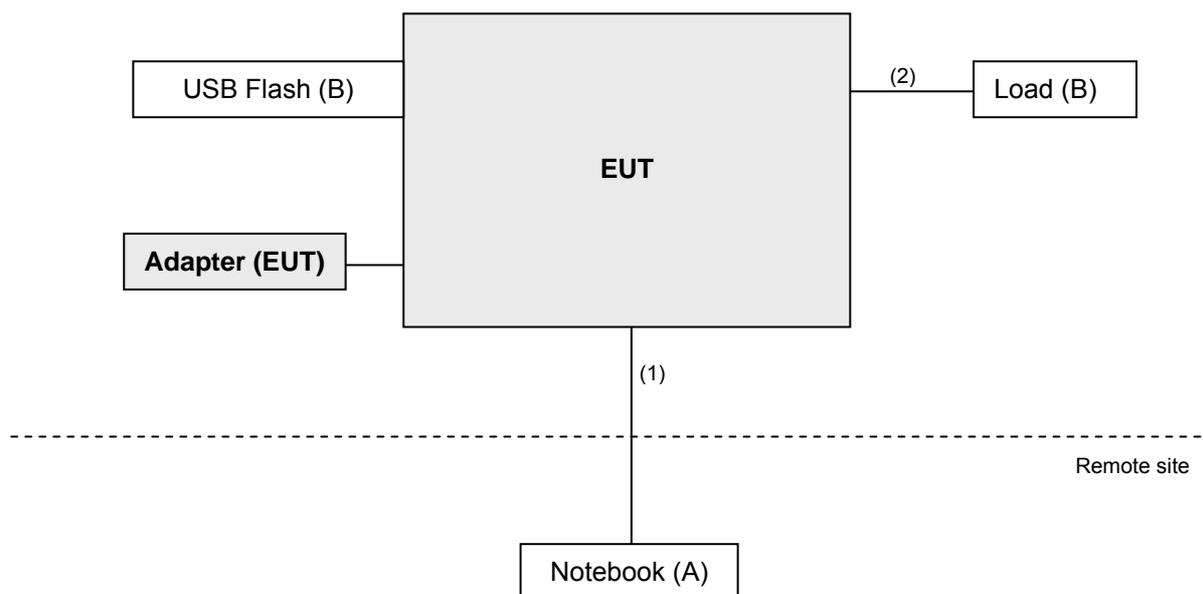

### 3.5 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart E (15.407)**

**789033 D02 General UNII Test Procedures New Rules v01r02**

**662911 D01 Multiple Transmitter Output v02r01**

ANSI C63.10:2013

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).  
The test report has been issued separately.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

**LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS**

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedures New Rules v01r02	FIELD STRENGTH AT 3m	
	PK:74 (dBµV/m)	AV:54 (dBµV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBµV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)(i)	PK:-27 (dBm/MHz) <sup>*1</sup> PK:10 (dBm/MHz) <sup>*2</sup> PK:15.6 (dBm/MHz) <sup>*3</sup> PK:27 (dBm/MHz) <sup>*4</sup>	PK: 68.2(dBµV/m) <sup>*1</sup> PK:105.2 (dBµV/m) <sup>*2</sup> PK: 110.8(dBµV/m) <sup>*3</sup> PK:122.2 (dBµV/m) <sup>*4</sup>
15.407(b)(4)(ii)	FIELD STRENGTH at 3m / § 15.247(d),	
	PK:74 (dBµV/m)	AV:54 (dBµV/m)
<sup>*1</sup> beyond 75 MHz or more above of the band edge. <sup>*2</sup> below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. <sup>*3</sup> below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. <sup>*4</sup> from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.		

**NOTE:** The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Oct. 12, 2015	Oct. 11, 2016
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Jul. 08, 2015	Jul. 07, 2016
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Jan. 07, 2016	Jan. 06, 2017
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Jan. 08, 2016	Jan. 07, 2017
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Jan. 18, 2016	Jan. 17, 2017
Preamplifier Agilent	8449B	3008A01960	Aug. 09, 2015	Aug. 08, 2016
Preamplifier Agilent	8447D	2944A10631	Aug. 09, 2015	Aug. 08, 2016
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-02(295012+309220)	Aug. 09, 2015	Aug. 08, 2016
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03(250724)	Aug. 09, 2015	Aug. 08, 2016
Software BV ADT	ADT_Radiated_V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021703	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100.	SC93021703	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 18, 2015	Oct. 17, 2016
High Speed Peak Power Meter	ML2495A	0824011	Jul. 09, 2015	Jul. 08, 2016
Power Sensor	MA2411B	0738171	Jul. 09, 2015	Jul. 08, 2016
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 08, 2015	Jun. 07, 2016

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 4.
  3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 460141.
  5. The IC Site Registration No. is IC7450F-4.

#### 4.1.3 Test Procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ( $10 \log(1/\text{duty cycle})$ ).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup

<Frequency Range 30MHz~1GHz>

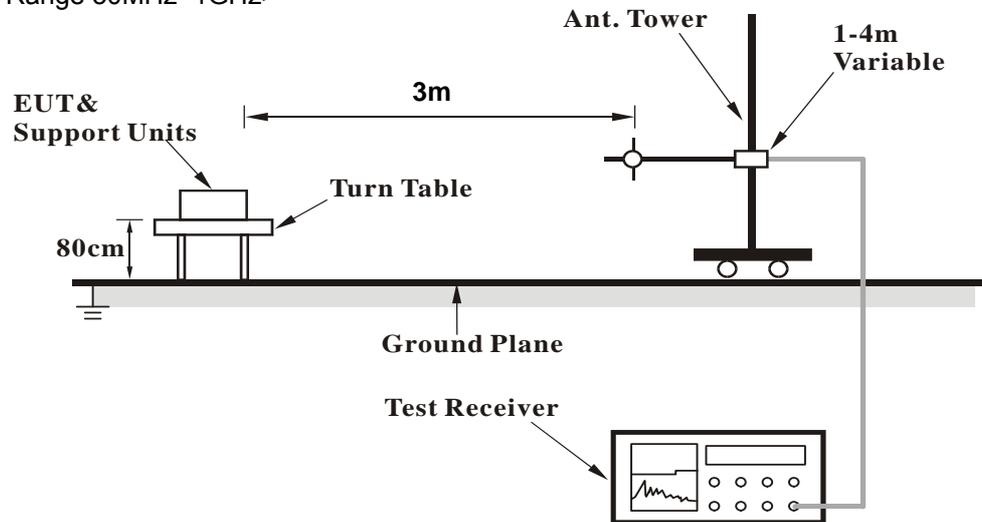

<Frequency Range above 1GHz>

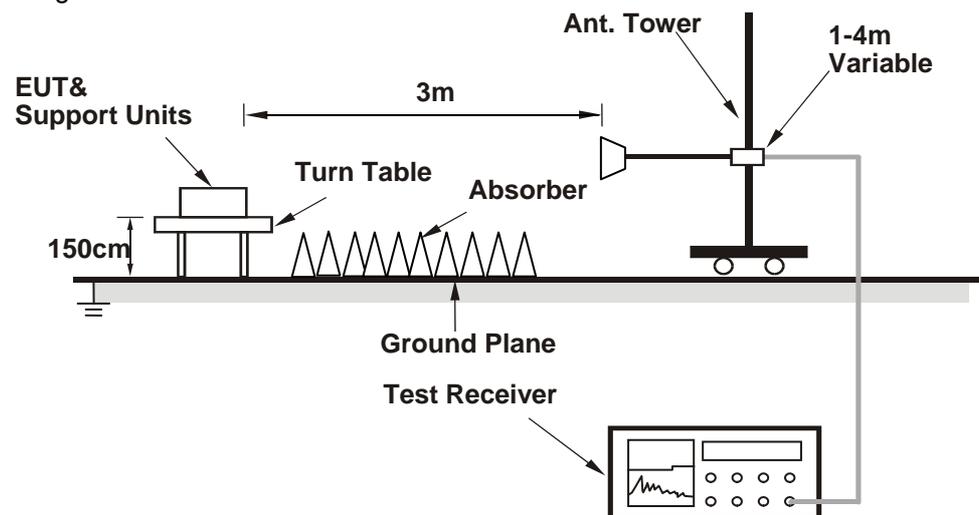

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".
- The necessary accessories enable the system in full functions.

#### 4.1.7 Test Results

Above 1GHz Worst-Case Data:

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.9 PK	74.0	-11.1	1.87 H	13	57.40	5.50
2	5150.00	48.8 AV	54.0	-5.2	1.87 H	13	43.30	5.50
3	*5180.00	111.3 PK			1.87 H	13	71.80	39.50
4	*5180.00	100.9 AV			1.87 H	13	61.40	39.50
5	#10360.00	58.1 PK	74.0	-15.9	1.00 H	327	40.60	17.50
6	#10360.00	45.9 AV	54.0	-8.1	1.00 H	327	28.40	17.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.1 PK	74.0	-4.9	1.90 V	138	63.60	5.50
2	<b>5150.00</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>1.90 V</b>	<b>138</b>	<b>48.40</b>	<b>5.50</b>
3	*5180.00	116.7 PK			1.90 V	138	77.20	39.50
4	*5180.00	106.4 AV			1.90 V	138	66.90	39.50
5	#10360.00	58.3 PK	74.0	-15.7	1.00 V	52	40.80	17.50
6	#10360.00	46.5 AV	54.0	-7.5	1.00 V	52	29.00	17.50

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.3 PK	74.0	-9.7	1.83 H	3	58.80	5.50
2	5150.00	48.4 AV	54.0	-5.6	1.83 H	3	42.90	5.50
3	*5200.00	113.4 PK			1.83 H	3	73.80	39.60
4	*5200.00	102.2 AV			1.83 H	3	62.60	39.60
5	#10400.00	59.5 PK	74.0	-14.5	1.00 H	330	41.50	18.00
6	#10400.00	46.9 AV	54.0	-7.1	1.00 H	330	28.90	18.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.9 PK	74.0	-8.1	1.00 V	106	60.40	5.50
2	5150.00	52.1 AV	54.0	-1.9	1.00 V	106	46.60	5.50
3	*5200.00	117.4 PK			1.00 V	106	77.80	39.60
4	*5200.00	107.6 AV			1.00 V	106	68.00	39.60
5	#10400.00	59.9 PK	74.0	-14.1	1.00 V	360	41.90	18.00
6	#10400.00	47.4 AV	54.0	-6.6	1.00 V	360	29.40	18.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	110.8 PK			1.89 H	15	71.20	39.60
2	*5240.00	100.2 AV			1.89 H	15	60.60	39.60
3	5350.00	57.3 PK	74.0	-16.7	1.89 H	15	51.60	5.70
4	5350.00	44.3 AV	54.0	-9.7	1.89 H	15	38.60	5.70
5	#10480.00	59.6 PK	74.0	-14.4	1.00 H	113	41.60	18.00
6	#10480.00	46.5 AV	54.0	-7.5	1.00 H	113	28.50	18.00

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.5 PK			1.74 V	173	77.90	39.60
2	*5240.00	107.2 AV			1.74 V	173	67.60	39.60
3	5350.00	59.4 PK	74.0	-14.6	1.74 V	173	53.70	5.70
4	5350.00	46.6 AV	54.0	-7.4	1.74 V	173	40.90	5.70
5	#10480.00	60.2 PK	74.0	-13.8	1.00 V	88	42.20	18.00
6	#10480.00	47.2 AV	54.0	-6.8	1.00 V	88	29.20	18.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5627.20	58.4 PK	68.2	-9.8	1.00 H	231	52.30	6.10
2	*5745.00	109.8 PK			1.00 H	231	69.40	40.40
3	*5745.00	99.6 AV			1.00 H	231	59.20	40.40
4	#5944.00	58.6 PK	68.2	-9.6	1.00 H	231	51.90	6.70
5	11490.00	60.4 PK	74.0	-13.6	1.10 H	90	41.10	19.30
6	11490.00	47.3 AV	54.0	-6.7	1.10 H	90	28.00	19.30

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5632.80	62.5 PK	68.2	-5.7	2.17 V	280	56.40	6.10
2	*5745.00	120.2 PK			2.17 V	280	79.80	40.40
3	*5745.00	110.2 AV			2.17 V	280	69.80	40.40
4	#5972.00	59.2 PK	68.2	-9.0	2.17 V	280	52.50	6.70
5	11490.00	61.4 PK	74.0	-12.6	1.25 V	130	42.10	19.30
6	11490.00	47.4 AV	54.0	-6.6	1.25 V	130	28.10	19.30

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	111.0 PK			1.22 H	230	70.50	40.50
2	*5785.00	100.7 AV			1.22 H	230	60.20	40.50
3	11570.00	59.5 PK	74.0	-14.5	1.00 H	358	40.50	19.00
4	11570.00	46.2 AV	54.0	-7.8	1.00 H	358	27.20	19.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	111.0 PK			1.22 H	230	70.50	40.50
2	*5785.00	100.7 AV			1.22 H	230	60.20	40.50
3	11570.00	59.5 PK	74.0	-14.5	1.00 H	358	40.50	19.00
4	11570.00	46.2 AV	54.0	-7.8	1.00 H	358	27.20	19.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5634.40	58.3 PK	68.2	-9.9	1.12 H	231	52.20	6.10
2	*5825.00	110.4 PK			1.12 H	231	69.80	40.60
3	*5825.00	100.3 AV			1.12 H	231	59.70	40.60
4	#5959.20	58.6 PK	68.2	-9.6	1.12 H	231	51.90	6.70
5	11650.00	59.4 PK	74.0	-14.6	1.10 H	300	40.90	18.50
6	11650.00	46.1 AV	54.0	-7.9	1.10 H	300	27.60	18.50

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5607.20	59.9 PK	68.2	-8.3	1.13 V	273	53.90	6.00
2	*5825.00	120.7 PK			1.13 V	273	80.10	40.60
3	*5825.00	110.5 AV			1.13 V	273	69.90	40.60
4	#5930.40	62.0 PK	68.2	-6.2	1.13 V	273	55.30	6.70
5	11650.00	60.7 PK	74.0	-13.3	1.12 V	330	42.20	18.50
6	11650.00	47.9 AV	54.0	-6.1	1.12 V	330	29.40	18.50

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

**802.11ac (VHT20)**

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.8 PK	74.0	-11.2	1.70 H	3	57.30	5.50
2	5150.00	49.7 AV	54.0	-4.3	1.70 H	3	44.20	5.50
3	*5180.00	110.4 PK			1.70 H	3	70.90	39.50
4	*5180.00	99.6 AV			1.70 H	3	60.10	39.50
5	#10360.00	59.2 PK	74.0	-14.8	1.00 H	30	41.70	17.50
6	#10360.00	46.8 AV	54.0	-7.2	1.00 H	30	29.30	17.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	72.3 PK	74.0	-1.7	1.91 V	111	66.80	5.50
2	5150.00	53.6 AV	54.0	-0.4	1.91 V	111	48.10	5.50
3	*5180.00	117.8 PK			1.91 V	111	78.30	39.50
4	*5180.00	106.9 AV			1.91 V	111	67.40	39.50
5	#10360.00	60.3 PK	74.0	-13.7	1.00 V	355	42.80	17.50
6	#10360.00	47.1 AV	54.0	-6.9	1.00 V	355	29.60	17.50

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.7 PK	74.0	-10.3	1.99 H	9	58.20	5.50
2	5150.00	47.1 AV	54.0	-6.9	1.99 H	9	41.60	5.50
3	*5200.00	113.1 PK			1.99 H	9	73.50	39.60
4	*5200.00	102.0 AV			1.99 H	9	62.40	39.60
5	#10400.00	59.8 PK	74.0	-14.2	1.00 H	53	41.80	18.00
6	#10400.00	47.1 AV	54.0	-6.9	1.00 H	53	29.10	18.00

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.5 PK	74.0	-5.5	1.00 V	73	63.00	5.50
2	5150.00	51.3 AV	54.0	-2.7	1.00 V	73	45.80	5.50
3	*5200.00	117.6 PK			1.00 V	73	78.00	39.60
4	*5200.00	107.5 AV			1.00 V	73	67.90	39.60
5	#10400.00	60.7 PK	74.0	-13.3	1.00 V	15	42.70	18.00
6	#10400.00	47.3 AV	54.0	-6.7	1.00 V	15	29.30	18.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	109.8 PK			2.02 H	20	70.20	39.60
2	*5240.00	99.4 AV			2.02 H	20	59.80	39.60
3	5350.00	57.8 PK	74.0	-16.2	2.02 H	20	52.10	5.70
4	5350.00	44.4 AV	54.0	-9.6	2.02 H	20	38.70	5.70
5	#10480.00	59.2 PK	74.0	-14.8	1.00 H	80	41.20	18.00
6	#10480.00	46.4 AV	54.0	-7.6	1.00 H	80	28.40	18.00

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	117.2 PK			1.74 V	172	77.60	39.60
2	*5240.00	107.0 AV			1.74 V	172	67.40	39.60
3	5350.00	59.1 PK	74.0	-14.9	1.74 V	172	53.40	5.70
4	5350.00	46.3 AV	54.0	-7.7	1.74 V	172	40.60	5.70
5	#10480.00	59.8 PK	74.0	-14.2	1.00 V	120	41.80	18.00
6	#10480.00	46.9 AV	54.0	-7.1	1.00 V	120	28.90	18.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5618.40	57.8 PK	68.2	-10.4	1.18 H	230	51.70	6.10
2	*5745.00	111.0 PK			1.18 H	230	70.60	40.40
3	*5745.00	99.9 AV			1.18 H	230	59.50	40.40
4	#5942.40	58.9 PK	68.2	-9.3	1.18 H	230	52.20	6.70
5	11490.00	60.6 PK	74.0	-13.4	1.00 H	280	41.30	19.30
6	11490.00	46.6 AV	54.0	-7.4	1.00 H	280	27.30	19.30

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5643.20	65.1 PK	68.2	-3.1	1.34 V	261	59.00	6.10
2	#5684.00	76.4 PK	93.4	-17.0	1.34 V	261	70.20	6.20
3	#5701.60	88.2 PK	105.6	-17.4	1.34 V	261	82.00	6.20
4	#5724.07	100.0 PK	120.1	-20.1	1.34 V	261	93.70	6.30
5	*5745.00	120.6 PK			1.34 V	261	80.20	40.40
6	*5745.00	109.3 AV			1.34 V	261	68.90	40.40
7	11490.00	61.0 PK	74.0	-13.0	1.10 V	320	41.70	19.30
8	11490.00	47.8 AV	54.0	-6.2	1.10 V	320	28.50	19.30

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	109.3 PK			1.00 H	231	68.80	40.50
2	*5785.00	98.8 AV			1.00 H	231	58.30	40.50
3	11570.00	60.7 PK	74.0	-13.3	1.00 H	240	41.70	19.00
4	11570.00	47.3 AV	54.0	-6.7	1.00 H	240	28.30	19.00

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	121.5 PK			2.32 V	277	81.00	40.50
2	*5785.00	110.3 AV			2.32 V	277	69.80	40.50
3	11570.00	60.9 PK	74.0	-13.1	1.20 V	250	41.90	19.00
4	11570.00	47.7 AV	54.0	-6.3	1.20 V	250	28.70	19.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5647.20	57.8 PK	68.2	-10.4	1.19 H	229	51.70	6.10
2	*5825.00	110.3 PK			1.19 H	229	69.70	40.60
3	*5825.00	99.5 AV			1.19 H	229	58.90	40.60
4	#5948.00	58.7 PK	68.2	-9.5	1.19 H	229	51.90	6.80
5	11650.00	59.6 PK	74.0	-14.4	1.10 H	330	41.10	18.50
6	11650.00	45.8 AV	54.0	-8.2	1.10 H	330	27.30	18.50

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5627.20	58.3 PK	68.2	-9.9	2.36 V	276	52.20	6.10
2	*5825.00	121.5 PK			2.36 V	276	80.90	40.60
3	*5825.00	110.3 AV			2.36 V	276	69.70	40.60
4	#5936.80	63.2 PK	68.2	-5.0	2.36 V	276	56.50	6.70
5	11650.00	60.1 PK	74.0	-13.9	1.00 V	353	41.60	18.50
6	11650.00	47.4 AV	54.0	-6.6	1.00 V	353	28.90	18.50

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

**802.11ac (VHT40)**

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.0 PK	74.0	-12.0	1.02 H	74	56.50	5.50
2	5150.00	47.5 AV	54.0	-6.5	1.02 H	74	42.00	5.50
3	*5190.00	101.7 PK			1.02 H	74	62.20	39.50
4	*5190.00	92.9 AV			1.02 H	74	53.40	39.50
5	#10380.00	56.8 PK	74.0	-17.2	1.00 H	98	39.00	17.80
6	#10380.00	45.7 AV	54.0	-8.3	1.00 H	98	27.90	17.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.8 QP	74.0	-2.2	1.65 V	140	66.30	5.50
2	5150.00	53.7 QP	54.0	-0.3	1.65 V	140	48.20	5.50
3	*5190.00	111.3 QP			1.65 V	140	71.80	39.50
4	*5190.00	101.9 QP			1.65 V	140	62.40	39.50
5	10380.00	57.5 QP	74.0	-16.5	1.00 V	50	39.70	17.80
6	10380.00	46.1 QP	54.0	-7.9	1.00 V	50	28.30	17.80

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.7 PK	74.0	-12.3	1.78 H	349	56.20	5.50
2	5150.00	48.7 AV	54.0	-5.3	1.78 H	349	43.20	5.50
3	*5230.00	108.5 PK			1.78 H	349	68.90	39.60
4	*5230.00	98.6 AV			1.78 H	349	59.00	39.60
5	#10460.00	57.5 PK	74.0	-16.5	1.00 H	86	39.50	18.00
6	#10460.00	45.9 AV	54.0	-8.1	1.00 H	86	27.90	18.00

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.4 QP	74.0	-7.6	1.28 V	63	60.90	5.50
2	5150.00	53.5 QP	54.0	-0.5	1.28 V	63	48.00	5.50
3	*5230.00	115.4 QP			1.28 V	63	75.80	39.60
4	*5230.00	105.3 QP			1.28 V	63	65.70	39.60
5	10460.00	58.0 QP	74.0	-16.0	1.00 V	54	40.00	18.00
6	10460.00	46.4 QP	54.0	-7.6	1.00 V	54	28.40	18.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.80	67.7 PK	68.2	-0.5	1.80 H	3	61.60	6.10
2	*5755.00	109.6 PK			1.80 H	3	69.10	40.50
3	*5755.00	98.9 AV			1.80 H	3	58.40	40.50
4	#5929.60	59.7 PK	68.2	-8.5	1.80 H	3	53.00	6.70
5	11510.00	61.6 PK	74.0	-12.4	1.00 H	110	42.50	19.10
6	11510.00	48.0 AV	54.0	-6.0	1.00 H	110	28.90	19.10

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5636.80	67.5 PK	68.2	-0.7	1.07 V	294	61.40	6.10
2	#5656.00	72.3 PK	72.7	-0.4	1.07 V	294	66.20	6.10
3	*5755.00	116.0 PK			1.07 V	294	75.50	40.50
4	*5755.00	104.8 AV			1.07 V	294	64.30	40.50
5	#5960.00	60.8 PK	68.2	-7.4	1.07 V	294	54.10	6.70
6	11510.00	61.4 PK	74.0	-12.6	1.10 V	60	42.30	19.10
7	11510.00	48.6 AV	54.0	-5.4	1.10 V	60	29.50	19.10

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5625.60	59.9 PK	68.2	-8.3	1.63 H	360	53.80	6.10
2	*5795.00	109.5 PK			1.63 H	360	69.00	40.50
3	*5795.00	99.0 AV			1.63 H	360	58.50	40.50
4	#5929.60	62.4 PK	68.2	-5.8	1.63 H	360	55.70	6.70
5	11590.00	59.4 PK	74.0	-14.6	1.20 H	150	40.70	18.70
6	11590.00	46.2 AV	54.0	-7.8	1.20 H	150	27.50	18.70

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5636.80	64.0 PK	68.2	-4.2	1.15 V	295	57.90	6.10
2	*5795.00	116.6 PK			1.15 V	295	76.10	40.50
3	*5795.00	105.7 AV			1.15 V	295	65.20	40.50
4	#5936.80	66.9 PK	68.2	-1.3	1.15 V	295	60.20	6.70
5	11590.00	60.2 PK	74.0	-13.8	1.00 V	95	41.50	18.70
6	11590.00	46.5 AV	54.0	-7.5	1.00 V	95	27.80	18.70

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

**802.11ac (VHT80)**

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.7 PK	74.0	-17.3	2.08 H	6	51.20	5.50
2	5150.00	43.8 AV	54.0	-10.2	2.08 H	6	38.30	5.50
3	*5210.00	100.1 PK			2.08 H	6	60.50	39.60
4	*5210.00	90.1 AV			2.08 H	6	50.50	39.60
5	#10420.00	56.9 PK	74.0	-17.1	1.00 H	98	38.90	18.00
6	#10420.00	45.3 AV	54.0	-8.7	1.00 H	98	27.30	18.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.9 PK	74.0	-5.1	1.73 V	133	63.40	5.50
2	5150.00	53.8 AV	54.0	-0.2	1.73 V	133	48.30	5.50
3	*5210.00	107.7 PK			1.73 V	133	68.10	39.60
4	*5210.00	98.1 AV			1.73 V	133	58.50	39.60
5	#10420.00	57.3 PK	74.0	-16.7	1.00 V	56	39.30	18.00
6	#10420.00	45.7 AV	54.0	-8.3	1.00 V	56	27.70	18.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5643.20	65.6 PK	68.2	-2.6	1.80 H	2	59.50	6.10
2	*5775.00	104.5 PK			1.80 H	2	64.00	40.50
3	*5775.00	94.1 AV			1.80 H	2	53.60	40.50
4	#5929.60	62.9 PK	68.2	-5.3	1.80 H	2	56.20	6.70
5	11550.00	61.1 PK	74.0	-12.9	1.00 H	290	42.10	19.00
6	11550.00	48.4 AV	54.0	-5.6	1.00 H	290	29.40	19.00

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
<b>1</b>	<b>#5639.20</b>	<b>68.1 PK</b>	<b>68.2</b>	<b>-0.1</b>	<b>1.00 V</b>	<b>293</b>	<b>62.00</b>	<b>6.10</b>
2	#5654.40	71.3 PK	71.5	-0.2	1.00 V	293	65.20	6.10
3	*5775.00	110.9 PK			1.00 V	293	70.40	40.50
4	*5775.00	101.1 AV			1.00 V	293	60.60	40.50
5	#5934.40	67.8 PK	68.2	-0.4	1.00 V	293	61.10	6.70
6	11550.00	61.2 PK	74.0	-12.8	1.00 V	340	42.20	19.00
7	11550.00	48.6 AV	54.0	-5.4	1.00 V	340	29.60	19.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Worst-Case Data: 802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	41.54	29.7 QP	40.0	-10.3	2.00 H	114	44.30	-14.60
2	124.98	34.6 QP	43.5	-8.9	2.00 H	77	50.40	-15.80
3	190.95	34.5 QP	43.5	-9.0	1.24 H	85	50.90	-16.40
4	245.28	34.2 QP	46.0	-11.8	1.24 H	248	48.90	-14.70
5	319.02	34.7 QP	46.0	-11.3	1.00 H	143	46.90	-12.20
6	559.63	26.2 QP	46.0	-19.8	1.50 H	95	34.80	-8.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	45.42	29.7 QP	40.0	-10.3	1.25 V	190	44.00	-14.30
2	97.81	32.8 QP	43.5	-10.7	1.50 V	125	51.60	-18.80
3	124.98	33.8 QP	43.5	-9.7	1.00 V	182	49.60	-15.80
4	190.95	29.3 QP	43.5	-14.2	1.00 V	16	45.70	-16.40
5	319.02	29.8 QP	46.0	-16.2	1.50 V	40	42.00	-12.20
6	555.75	24.7 QP	46.0	-21.3	1.00 V	102	33.50	-8.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 16, 2015	Nov. 15, 2016
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Dec. 26, 2015	Dec. 25, 2016
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 26, 2016	Feb. 25, 2017
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 24, 2015	Jul. 23, 2016
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-2040.

**4.2.3 Test Procedure**


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

**4.2.4 Deviation from Test Standard**

No deviation.

**4.2.5 Test Setup**

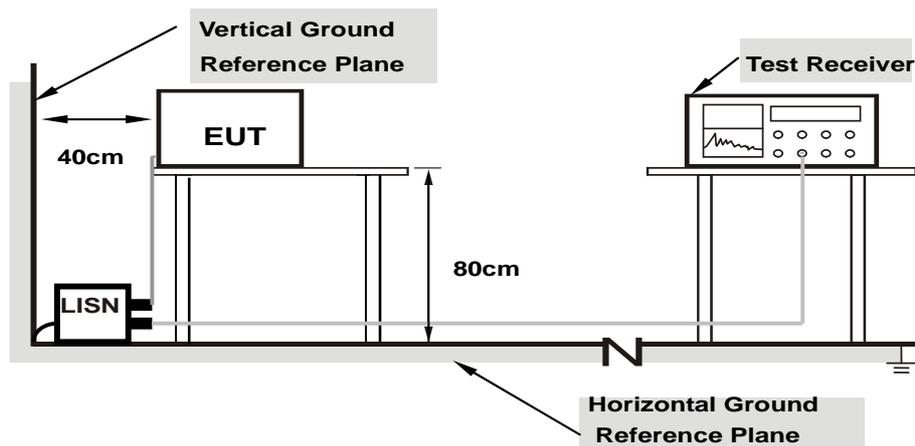

- Note:**
- 1.Support units were connected to second LISN.
  - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

**4.2.6 EUT Operating Conditions**

Same as 4.1.6.


### 4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.20783	10.08	29.60	23.13	39.68	33.21	63.29
<b>2</b>	<b>0.29076</b>	<b>10.12</b>	<b>35.16</b>	<b>29.69</b>	<b>45.28</b>	<b>39.81</b>	<b>60.50</b>	<b>50.50</b>	<b>-15.22</b>	<b>-10.69</b>
3	0.40373	10.17	18.10	13.01	28.27	23.18	57.78	47.78	-29.51	-24.60
4	1.04930	10.29	14.99	10.86	25.28	21.15	56.00	46.00	-30.72	-24.85
5	3.76284	10.46	16.34	9.17	26.80	19.63	56.00	46.00	-29.20	-26.37
6	7.07852	10.62	15.27	10.16	25.89	20.78	60.00	50.00	-34.11	-29.22

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

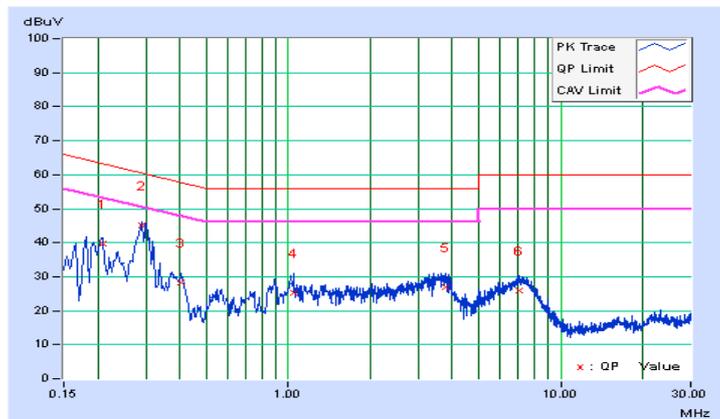


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.20474	10.08	28.85	22.72	38.93	32.80	63.42
2	0.29897	10.16	31.98	24.98	42.14	35.14	60.27	50.27	-18.13	-15.13
3	0.37304	10.22	18.31	11.27	28.53	21.49	58.43	48.43	-29.90	-26.94
4	0.89290	10.28	13.66	9.66	23.94	19.94	56.00	46.00	-32.06	-26.06
5	3.70810	10.56	17.46	9.54	28.02	20.10	56.00	46.00	-27.98	-25.90
6	7.30921	10.73	12.89	7.90	23.62	18.63	60.00	50.00	-36.38	-31.37

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

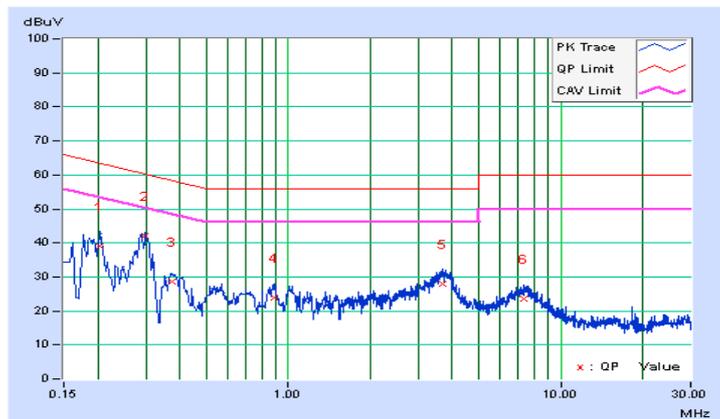

### 4.3 Transmit Power Measurement

#### 4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p 125mW (21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

\*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;


Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $N_{ANT} \geq 5$ .


For power measurements on all other devices: Array Gain =  $10 \log(N_{ANT}/N_{SS})$  dB.

#### 4.3.2 Test Setup

For Power Output Measurement

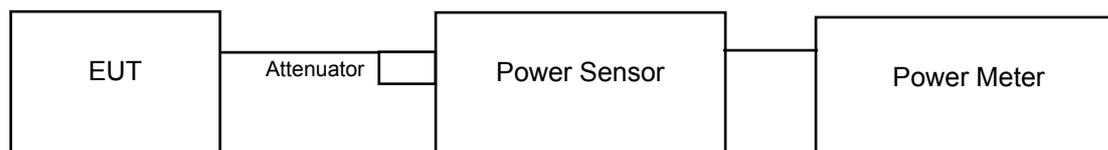

For 26dB and Occupied Bandwidth



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

##### For Average Power Measurement

##### For 802.11a, 802.11ac (VHT20), 802.11ac (VHT40)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

##### For 802.11ac (VHT80)

- a. Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- b. Set sweep trigger to "free run".
- c. Set RBW = 1 MHz
- d. Set VBW  $\geq$  3 MHz
- e. Number of points in sweep  $\geq$  2 Span / RBW
- f. Sweep time  $\leq$  (number of points in sweep) \* T
- g. Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
- h. Detector = RMS
- i. Trace mode = max hold
- j. Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

##### For Occupied Bandwidth

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to Sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission Condition continuously at lowest, middle and highest channel frequencies individually.

### 4.3.7 Test Result

Power Output:

CDD Mode

#### 802.11a

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	22.18	21.71	313.448	24.96	30	Pass
40	5200	25.88	24.97	<b>701.309</b>	28.46	30	Pass
48	5240	24.44	23.81	518.407	27.15	30	Pass
149	5745	25.98	25.48	<b>749.461</b>	28.75	30	Pass
157	5785	25.91	25.51	745.573	28.72	30	Pass
165	5825	25.94	25.39	738.584	28.68	30	Pass

#### 802.11ac (VHT20)

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	22.85	22.45	368.544	25.66	30	Pass
40	5200	25.79	24.83	683.404	28.35	30	Pass
48	5240	24.36	23.78	511.679	27.09	30	Pass
149	5745	25.85	25.39	730.531	28.64	30	Pass
157	5785	25.93	25.37	736.092	28.67	30	Pass
165	5825	25.91	25.33	731.135	28.64	30	Pass

#### 802.11ac (VHT40)

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	19.50	19.49	178.045	22.51	30	Pass
46	5230	24.37	23.52	498.432	26.98	30	Pass
151	5755	25.97	25.46	746.927	28.73	30	Pass
159	5795	25.93	25.33	732.935	28.65	30	Pass

#### 802.11ac (VHT80)

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	19.10	18.87	158.373	22.00	30	Pass
155	5775	23.18	22.57	388.687	25.90	30	Pass

### Beamforming Mode

#### 802.11ac (VHT20)

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	21.74	21.23	282.018	24.50	30	Pass
40	5200	25.86	24.96	<b>698.807</b>	28.44	30	Pass
48	5240	24.38	23.79	513.489	27.11	30	Pass
149	5745	26.09	25.42	754.780	28.78	30	Pass
157	5785	26.12	25.56	<b>769.010</b>	28.86	30	Pass
165	5825	26.15	25.32	752.506	28.77	30	Pass

#### 802.11ac (VHT40)

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	19.05	19.08	161.263	22.08	30	Pass
46	5230	24.30	23.47	491.484	26.92	30	Pass
151	5755	25.56	25.05	679.639	28.32	30	Pass
159	5795	25.93	25.36	735.300	28.66	30	Pass

#### 802.11ac (VHT80)

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	18.66	18.40	142.634	21.54	30	Pass
155	5775	23.19	22.52	387.098	25.88	30	Pass

26dB Bandwidth:

CDD Mode

802.11a

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
36	5180	34.85	37.05	Pass
40	5200	44.49	43.96	Pass
48	5240	39.35	41.62	Pass

802.11ac (VHT20)

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
36	5180	38.90	43.16	Pass
40	5200	48.59	48.81	Pass
48	5240	46.14	45.53	Pass

802.11ac (VHT40)

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
38	5190	47.73	56.46	Pass
46	5230	96.92	102.35	Pass



802.11ac (VHT80)

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
42	5210	91.93	90.92	Pass

Spectrum Plot of Worst Value



802.11a

802.11ac (VHT20)

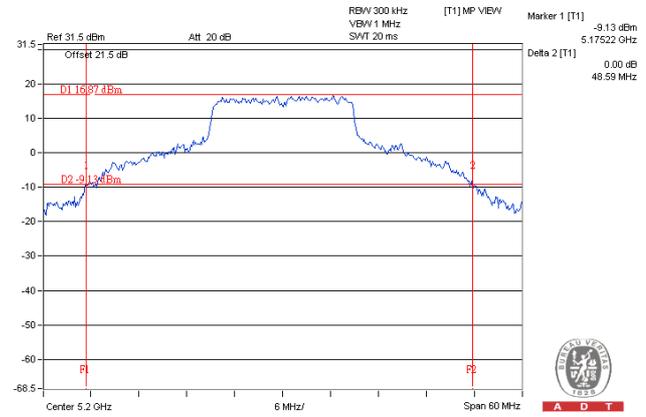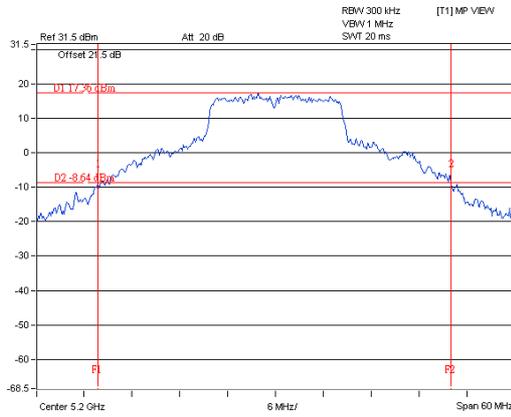

802.11ac (VHT40)

802.11ac (VHT80)

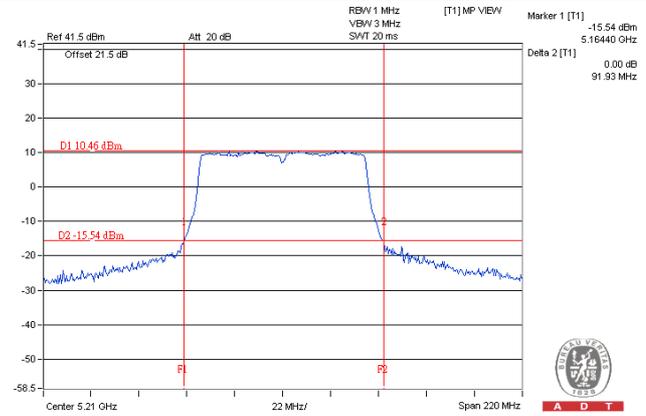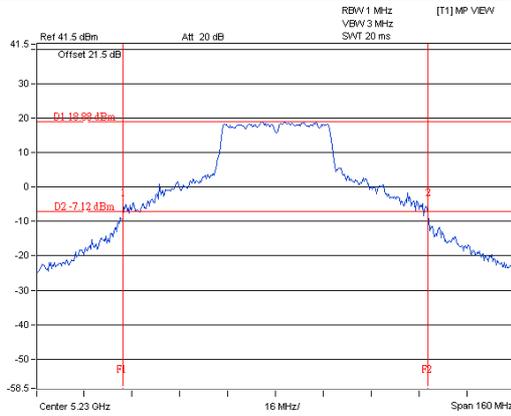

Beamforming Mode

802.11ac (VHT20)

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
36	5180	31.65	35.87	Pass
40	5200	48.93	48.73	Pass
48	5240	45.72	46.24	Pass

802.11ac (VHT40)

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
38	5190	47.43	53.26	Pass
46	5230	96.85	101.35	Pass



802.11ac (VHT80)

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
42	5210	91.17	90.23	Pass


### Spectrum Plot of Worst Value

#### 802.11ac (VHT20)

#### 802.11ac (VHT40)

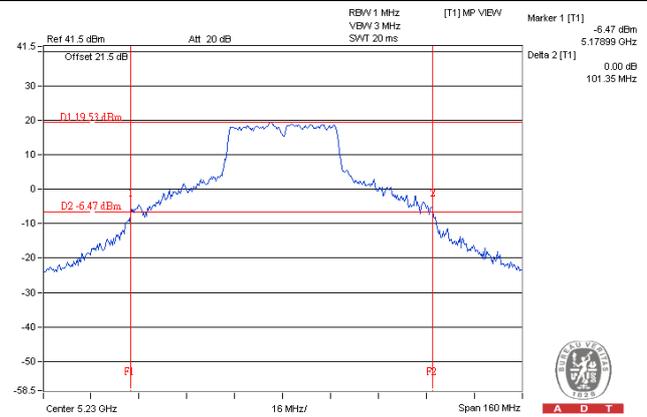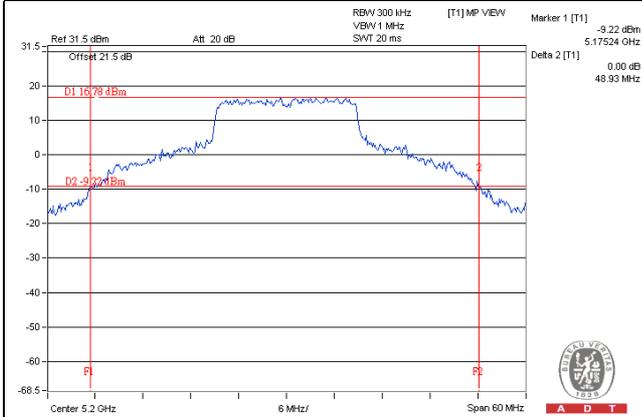

#### 802.11ac (VHT80)

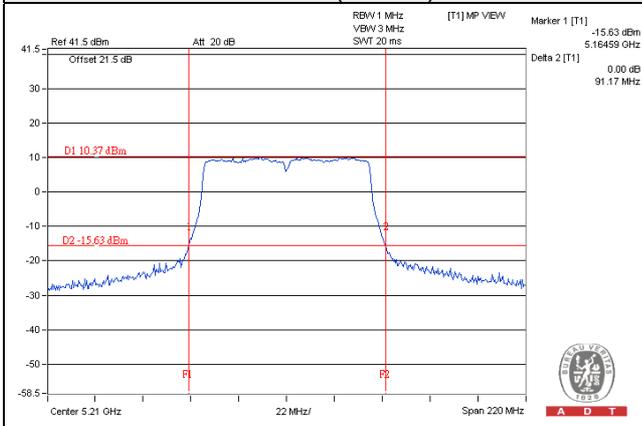

Occupied Bandwidth:

CDD Mode

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	17.64	19.20
40	5200	30.60	32.28
48	5240	22.92	24.10
149	5745	37.48	37.39
157	5785	41.52	41.04
165	5825	41.76	40.56

802.11ac (VHT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	19.08	23.04
40	5200	32.52	34.92
48	5240	24.24	24.23
149	5745	43.97	43.92
157	5785	43.80	43.56
165	5825	41.64	42.96

802.11ac (VHT40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	37.20	37.32
46	5230	41.08	41.64
151	5755	50.64	53.40
159	5795	51.36	53.16



802.11ac (VHT80)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	76.56	76.32
155	5775	80.16	85.68

### Spectrum Plot of Worst Value



#### 802.11a

#### 802.11ac (VHT20)

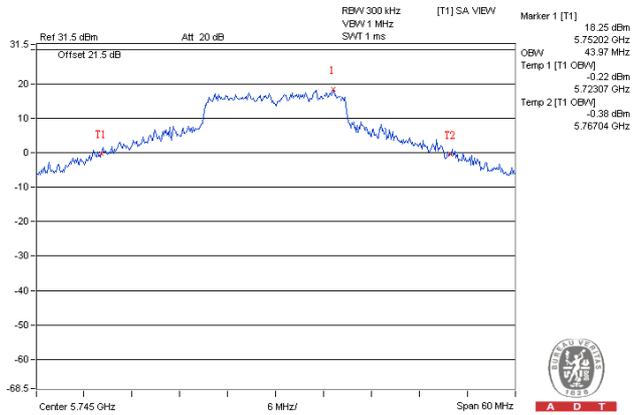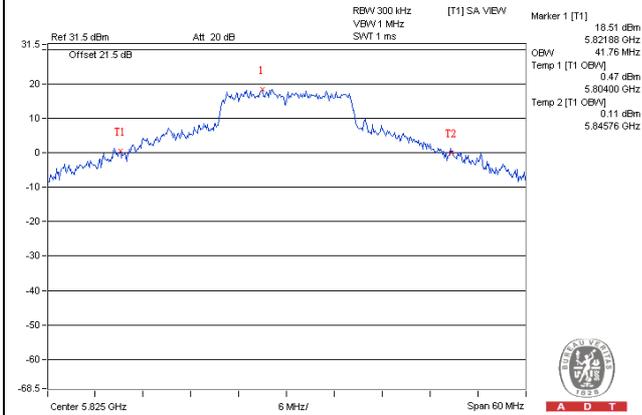

#### 802.11ac (VHT40)

#### 802.11ac (VHT80)

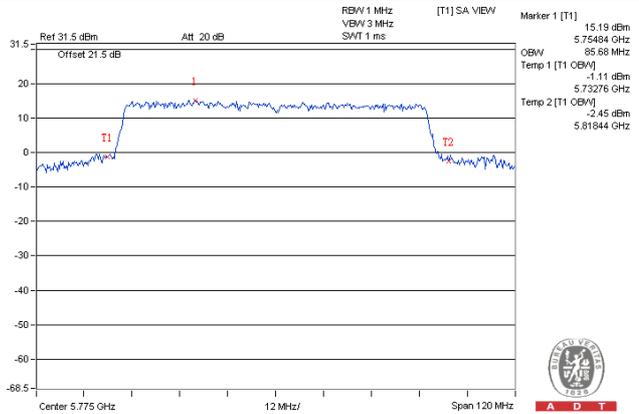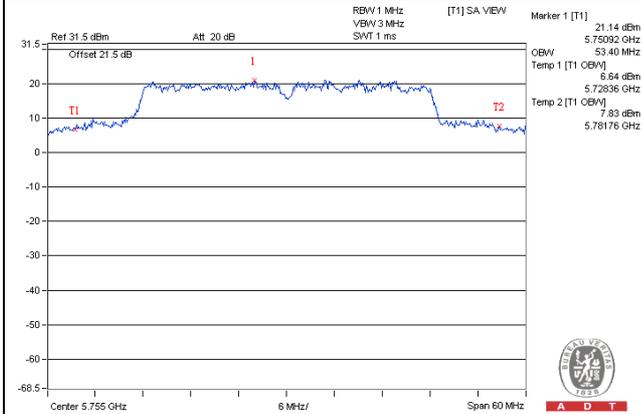

### Beamforming Mode

#### 802.11ac (VHT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	18.36	18.72
40	5200	32.52	34.80
48	5240	24.10	25.46
149	5745	40.56	44.04
157	5785	43.44	43.44
165	5825	44.40	43.32

#### 802.11ac (VHT40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	37.08	37.08
46	5230	40.88	42.03
151	5755	48.48	50.52
159	5795	51.36	53.16



#### 802.11ac (VHT80)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	76.56	76.32
155	5775	80.16	84.96


### Spectrum Plot of Worst Value

#### 802.11ac (VHT20)

#### 802.11ac (VHT40)

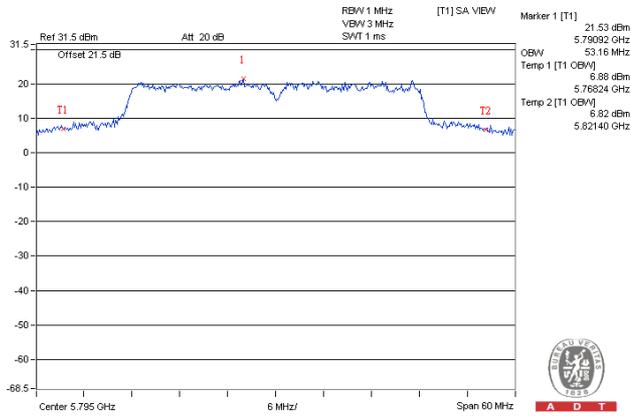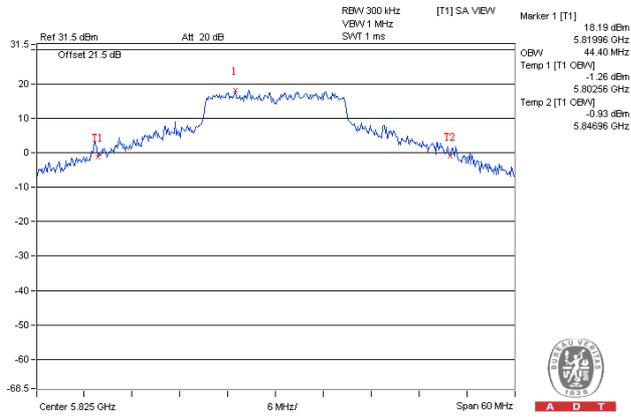

#### 802.11ac (VHT80)

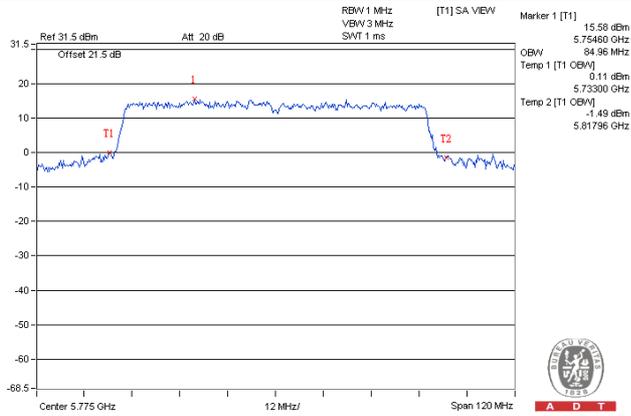


#### 4.4 Peak Power Spectral Density Measurement

##### 4.4.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-2A	---		11dBm/ MHz
U-NII-2C	---		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

##### 4.4.2 Test Setup

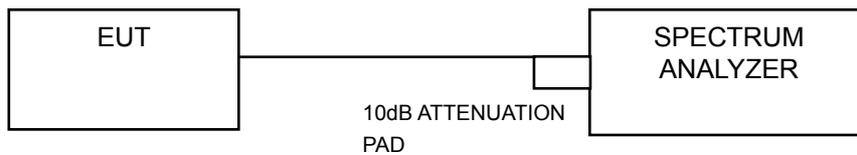

##### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.4.4 Test Procedure

##### For U-NII-1 band:

Duty cycle of test signal is  $\geq 98\%$

Using method SA-1

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 30 kHz, Set VBW  $\geq 1$  MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value

Duty cycle of test signal is  $< 98\%$

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 30 kHz, Set VBW  $\geq 1$  MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add  $10 \log (1/\text{duty cycle})$

##### For U-NII-3 band:

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 500 kHz, Set VBW  $\geq 3$  RBW, Detector = RMS
- 3) Sweep time = auto, trigger set to "free run".
- 4) Trace average at least 100 traces in power averaging mode.
- 5) Record the max value and add  $10 \log (1/\text{duty cycle})$
- 6) Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $\text{BWCF} = 10 \log (500 \text{ kHz} / 300 \text{ kHz})$

#### 4.4.5 Deviation from Test Standard

No deviation.

#### 4.4.6 EUT Operating Condition

Same as Item 4.3.6.

#### 4.4.7 Test Results

For U-NII-1 Band

CDD Mode

802.11a

Chan.	Freq. (MHz)	PSD (dBm)		Total PSD w/o duty factor (dBm)	Duty factor	Total PSD with duty factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1					
36	5180	9.69	9.59	12.65	0.17	12.82	17.00	Pass
40	5200	12.44	12.08	15.28	0.17	15.45	17.00	Pass
48	5240	11.81	11.61	14.72	0.17	14.89	17.00	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $1.86\text{dBi} + 10\log(2) = 4.87\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT20)

Chan.	Freq. (MHz)	PSD (dBm)		Total PSD (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
36	5180	9.94	9.98	12.97	17.00	Pass
40	5200	12.01	11.90	14.97	17.00	Pass
48	5240	11.19	11.32	14.27	17.00	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $1.86\text{dBi} + 10\log(2) = 4.87\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.

802.11ac (VHT40)

Chan.	Freq. (MHz)	PSD (dBm)		Total PSD w/o duty factor (dBm)	Duty factor	Total PSD with duty factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1					
38	5190	3.91	4.02	6.98	0.14	7.12	17.00	Pass
46	5230	8.37	8.21	11.31	0.14	11.45	17.00	Pass

Note:


1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $1.86\text{dBi} + 10\log(2) = 4.87\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

Chan.	Freq. (MHz)	PSD (dBm)		Total PSD w/o duty factor (dBm)	Duty factor	Total PSD with duty factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1					
42	5210	0.21	-0.19	3.03	0.31	3.34	17.00	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $1.86\text{dBi} + 10\log(2) = 4.87\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

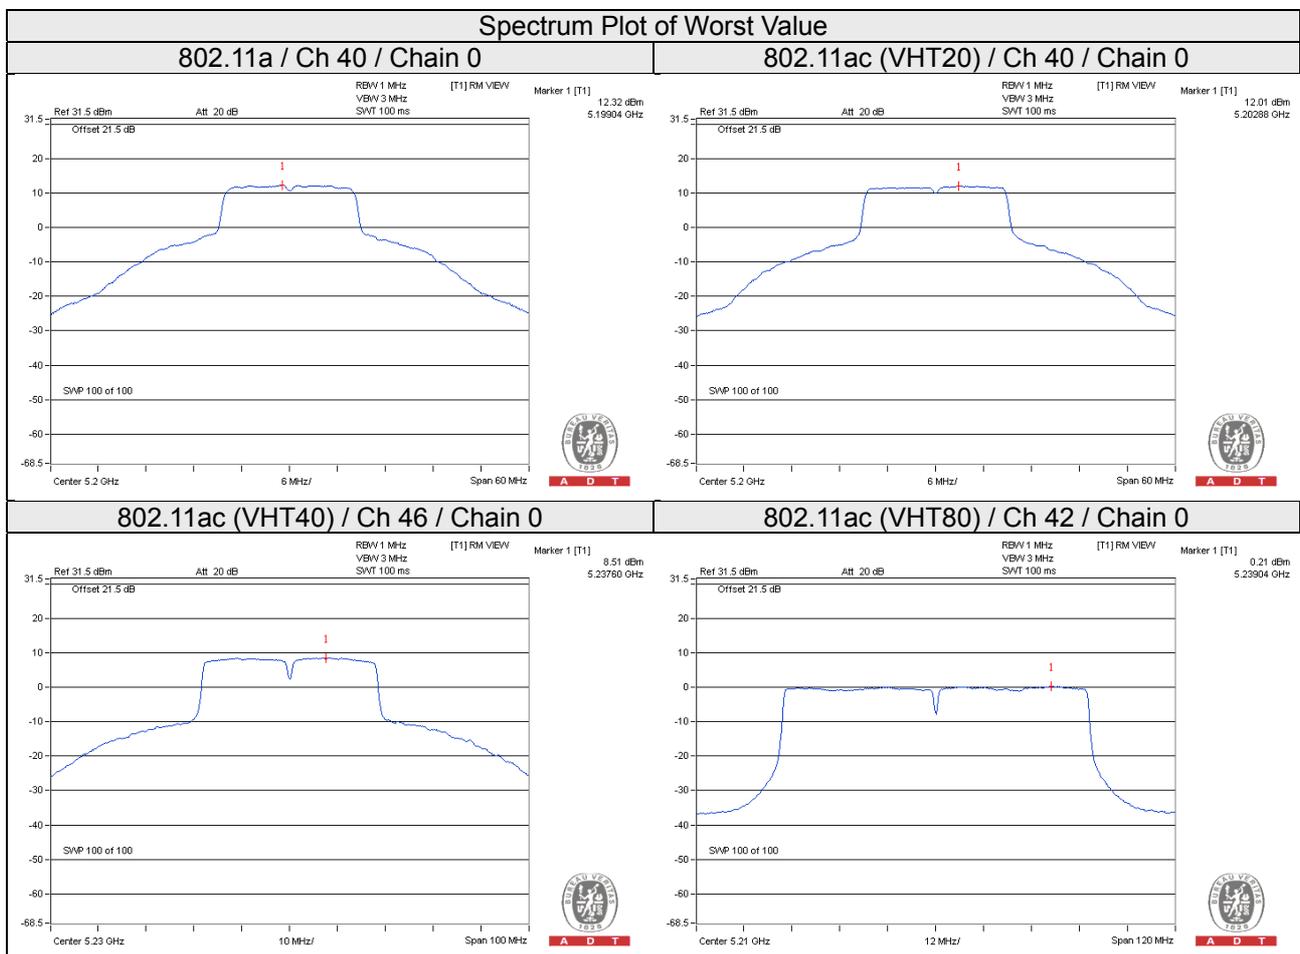

## Beamforming Mode

### 802.11ac (VHT20)

Chan.	Freq. (MHz)	PSD (dBm)		Total PSD (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
36	5180	8.94	9.29	12.13	17.00	Pass
40	5200	12.16	11.95	15.07	17.00	Pass
48	5240	11.36	11.38	14.38	17.00	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $1.86\text{dBi} + 10\log(2) = 4.87\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.

### 802.11ac (VHT40)

Chan.	Freq. (MHz)	PSD (dBm)		Total PSD w/o duty factor (dBm)	Duty factor	Total PSD with duty factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1					
38	5190	3.67	3.63	6.67	0.14	6.81	17.00	Pass
46	5230	8.52	8.17	11.36	0.14	11.50	17.00	Pass

Note:




- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $1.86\text{dBi} + 10\log(2) = 4.87\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.
- Refer to section 3.3 for duty cycle spectrum plot.

### 802.11ac (VHT80)

Chan.	Freq. (MHz)	PSD (dBm)		Total PSD w/o duty factor (dBm)	Duty factor	Total PSD with duty factor (dBm)	Max. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1					
42	5210	-0.09	-0.58	2.68	0.32	3.00	17.00	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $1.86\text{dBi} + 10\log(2) = 4.87\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.
- Refer to section 3.3 for duty cycle spectrum plot.

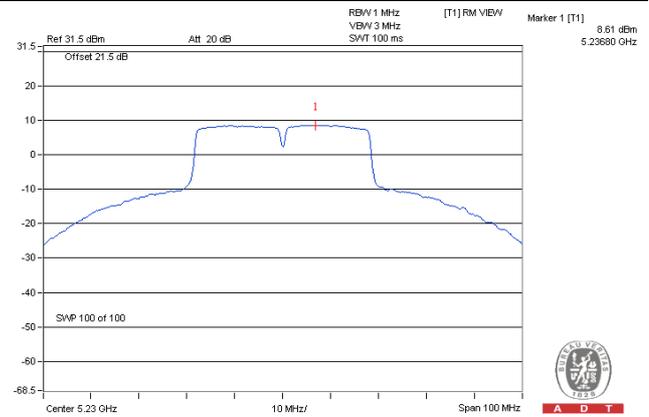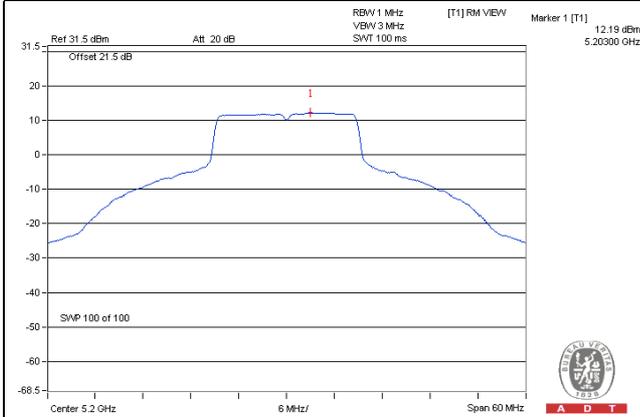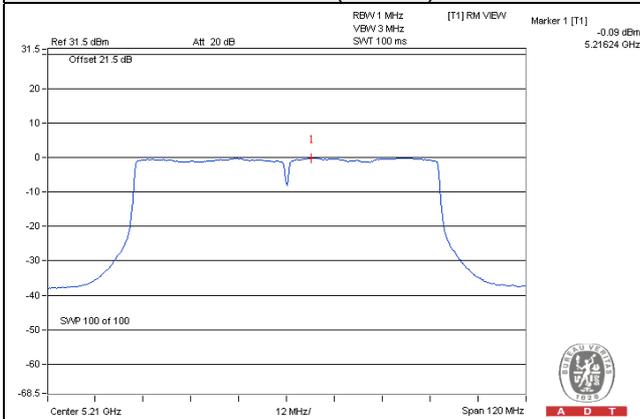**Spectrum Plot of Worst Value****802.11ac (VHT20) / Ch 40 / Chain 0****802.11ac (VHT40) / Ch 46 / Chain 0****802.11ac (VHT80)**

**For U-NII-3 Band**
**CDD Mode**
**802.11a**

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	Duty factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	149	5745	5.16	7.38	3.01	0.17	10.56	30.00	Pass
	157	5785	5.39	7.61	3.01	0.17	10.79	30.00	Pass
	165	5825	5.35	7.57	3.01	0.17	10.75	30.00	Pass
1	149	5745	5.12	7.34	3.01	0.17	10.52	30.00	Pass
	157	5785	5.01	7.23	3.01	0.17	10.41	30.00	Pass
	165	5825	4.87	7.09	3.01	0.17	10.27	30.00	Pass

**Note:**

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $1.86\text{dBi} + 10\log(2) = 4.87\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.
- Refer to section 3.3 for duty cycle spectrum plot.

**802.11ac (VHT20)**

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	149	5745	4.62	6.84	3.01	9.85	30.00	Pass
	157	5785	5.03	7.25	3.01	10.26	30.00	Pass
	165	5825	5.45	7.67	3.01	10.68	30.00	Pass
1	149	5745	4.68	6.90	3.01	9.91	30.00	Pass
	157	5785	4.66	6.88	3.01	9.89	30.00	Pass
	165	5825	4.49	6.71	3.01	9.72	30.00	Pass

**Note:**

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $1.86\text{dBi} + 10\log(2) = 4.87\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.

**802.11ac (VHT40)**

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	Duty factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	151	5755	1.30	3.52	3.01	0.14	6.67	30.00	Pass
	159	5795	1.41	3.63	3.01	0.14	6.78	30.00	Pass
1	151	5755	1.11	3.33	3.01	0.14	6.48	30.00	Pass
	159	5795	1.30	3.52	3.01	0.14	6.67	30.00	Pass

**Note:**


- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $1.86\text{dBi} + 10\log(2) = 4.87\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	Duty factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	155	5775	-4.03	-1.81	3.01	0.31	1.51	30.00	Pass
1	155	5775	-3.76	-1.54	3.01	0.31	1.78	30.00	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = 1.86dBi + 10log(2) = 4.87dBi < 6dBi, so the limit no need to reduced.
- Refer to section 3.3 for duty cycle spectrum plot.

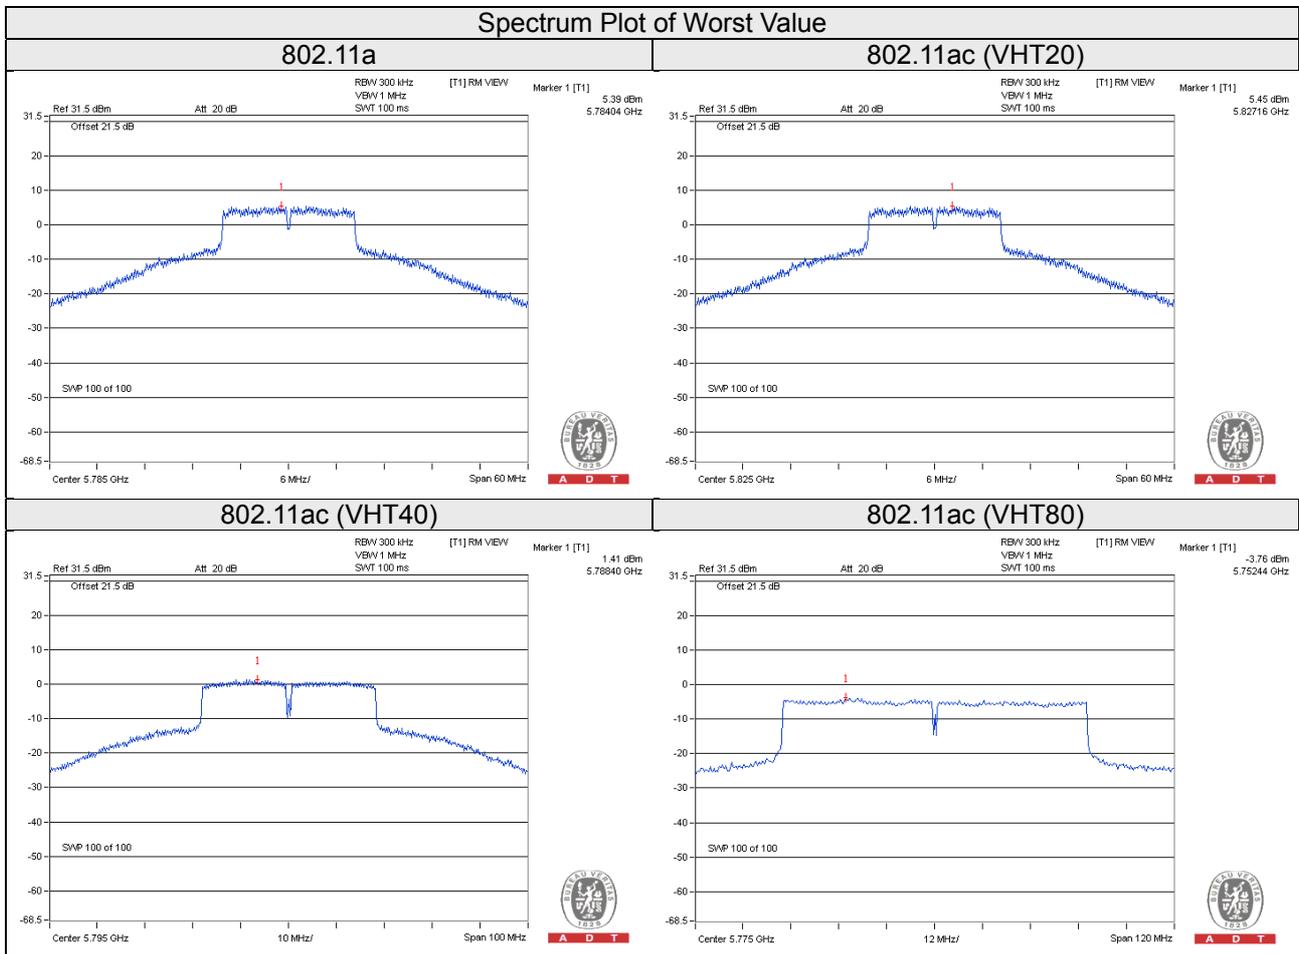

### Beamforming Mode

#### 802.11ac (VHT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	149	5745	4.68	6.90	3.01	9.91	30.00	Pass
	157	5785	4.97	7.19	3.01	10.20	30.00	Pass
	165	5825	5.01	7.23	3.01	10.24	30.00	Pass
1	149	5745	4.74	6.96	3.01	9.97	30.00	Pass
	157	5785	4.67	6.89	3.01	9.90	30.00	Pass
	165	5825	4.46	6.68	3.01	9.69	30.00	Pass

**Note:**

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $1.86\text{dBi} + 10\log(2) = 4.87\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.

#### 802.11ac (VHT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	Duty factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	151	5755	0.92	3.14	3.01	0.14	6.29	30.00	Pass
	159	5795	1.37	3.59	3.01	0.14	6.74	30.00	Pass
1	151	5755	0.62	2.84	3.01	0.14	5.99	30.00	Pass
	159	5795	1.13	3.35	3.01	0.14	6.50	30.00	Pass

**Note:**




- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $1.86\text{dBi} + 10\log(2) = 4.87\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.
- Refer to section 3.3 for duty cycle spectrum plot.

#### 802.11ac (VHT80)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	Duty factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	155	5775	-4.00	-1.78	3.01	0.32	1.55	30.00	Pass
1	155	5775	-3.87	-1.65	3.01	0.32	1.68	30.00	Pass

**Note:**

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $1.86\text{dBi} + 10\log(2) = 4.87\text{dBi} < 6\text{dBi}$ , so the limit no need to reduced.
- Refer to section 3.3 for duty cycle spectrum plot.

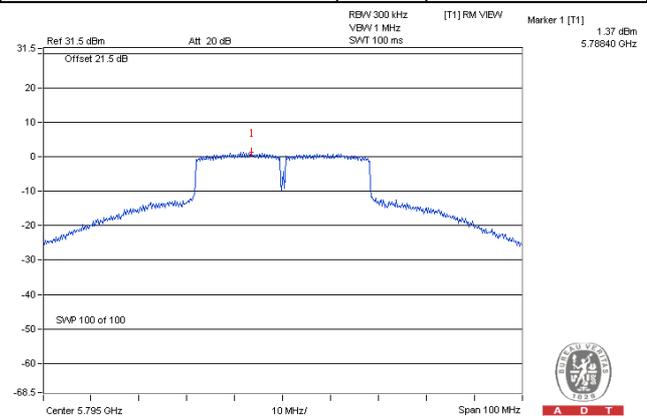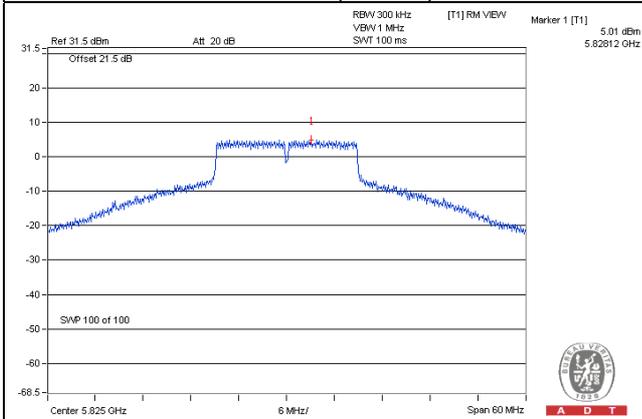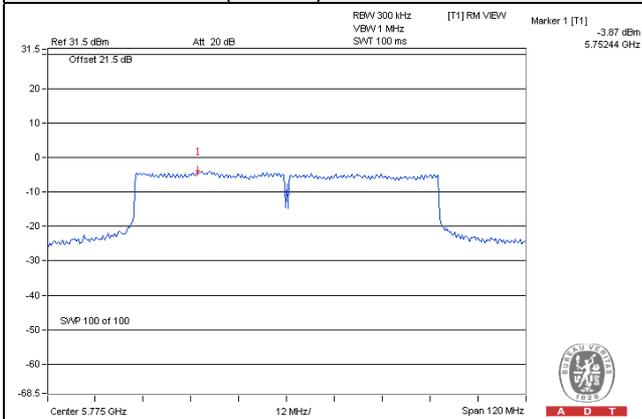
**Spectrum Plot of Worst Value****802.11ac (VHT20)****802.11ac (VHT40)****802.11ac (VHT80) / Ch 155 / Chain 1**

## 4.5 Frequency Stability

### 4.5.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

### 4.5.2 Test Setup

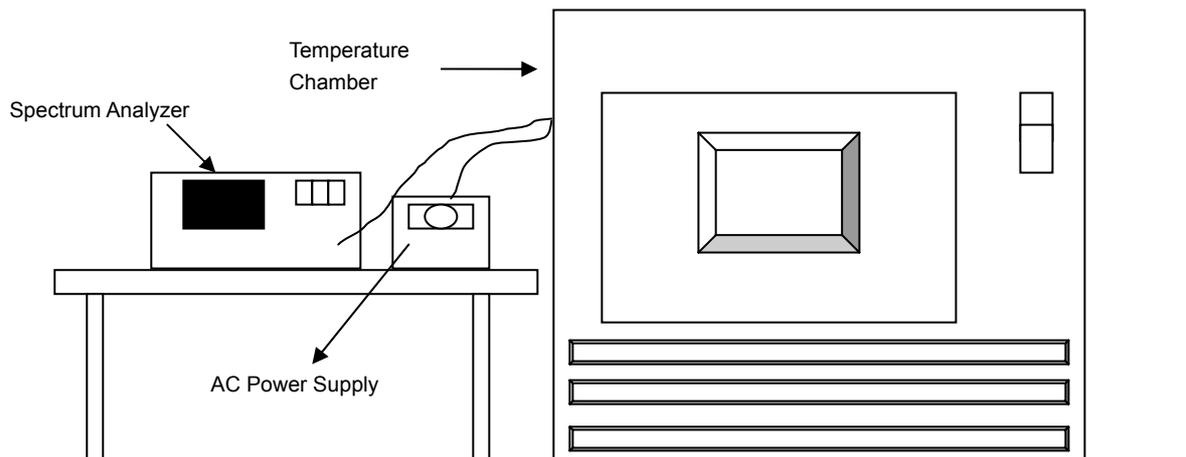

### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

- a. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

#### 4.5.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180MHz									
Temp. ( )	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Frequency Drift (%)						
50	120	5179.9985	-0.00003	5179.9951	-0.00009	5179.9942	-0.00011	5179.9977	-0.00004
40	120	5179.9823	-0.00034	5179.9827	-0.00033	5179.983	-0.00033	5179.9825	-0.00034
30	120	5180.0059	0.00011	5180.0074	0.00014	5180.0095	0.00018	5180.0103	0.00020
20	120	5180.0171	0.00033	5180.0152	0.00029	5180.0129	0.00025	5180.015	0.00029
10	120	5180.0106	0.00020	5180.0083	0.00016	5180.007	0.00014	5180.0082	0.00016
0	120	5179.9798	-0.00039	5179.9795	-0.00040	5179.9787	-0.00041	5179.9806	-0.00037
-10	120	5179.9961	-0.00008	5179.9978	-0.00004	5179.9963	-0.00007	5179.9962	-0.00007
-20	120	5180.0136	0.00026	5180.014	0.00027	5180.0135	0.00026	5180.0154	0.00030
-30	120	5179.9915	-0.00016	5179.9884	-0.00022	5179.9892	-0.00021	5179.9899	-0.00019


Frequency Stability Versus Voltage									
Operating Frequency: 5180MHz									
Temp. ( )	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Frequency Drift (%)						
20	138	5180.0169	0.00033	5180.0151	0.00029	5180.0136	0.00026	5180.0146	0.00028
	120	5180.0171	0.00033	5180.0152	0.00029	5180.0129	0.00025	5180.015	0.00029
	102	5180.0176	0.00034	5180.0159	0.00031	5180.0129	0.00025	5180.014	0.00027

## 4.6 6dB Bandwidth Measurement

### 4.6.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

### 4.6.2 Test Setup

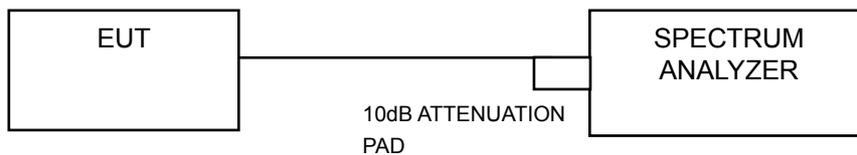

### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

### 4.6.5 Deviation from Test Standard

No deviation.

### 4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission Condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.6.7 Test Results

##### CDD Mode

##### 802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	16.35	16.35	0.5	Pass
157	5785	16.38	15.89	0.5	Pass
165	5825	16.39	16.08	0.5	Pass

##### 802.11ac (VHT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	25.00	17.25	0.5	Pass
157	5785	17.64	17.60	0.5	Pass
165	5825	16.39	17.62	0.5	Pass

##### 802.11ac (VHT40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
151	5755	35.48	36.36	0.5	Pass
159	5795	36.45	36.43	0.5	Pass



##### 802.11ac (VHT80)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
155	5775	76.11	76.21	0.5	Pass

### Spectrum Plot of Worst Value



#### 802.11a

#### 802.11ac (VHT20)

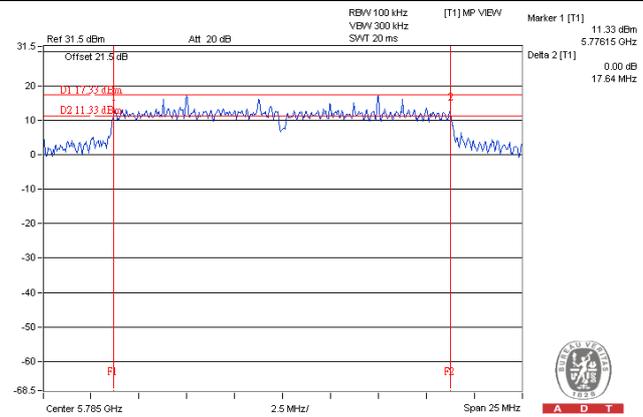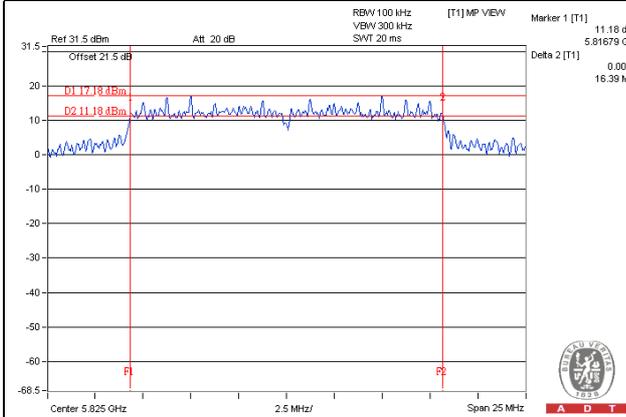

#### 802.11ac (VHT40)

#### 802.11ac (VHT80)

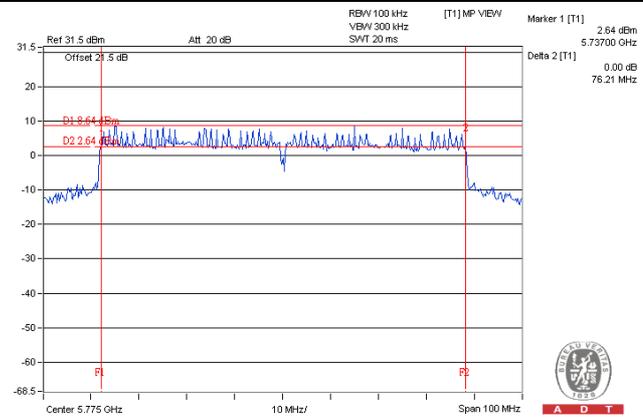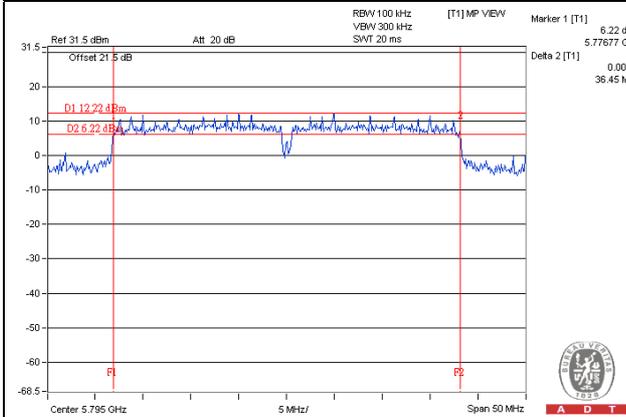

### Beamforming Mode

#### 802.11ac (VHT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	17.65	17.65	0.5	Pass
157	5785	17.64	17.62	0.5	Pass
165	5825	17.65	17.59	0.5	Pass

#### 802.11ac (VHT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
151	5755	36.35	36.33	0.5	Pass
159	5795	36.43	36.01	0.5	Pass

#### 802.11ac (VHT80)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
155	5775	76.42	75.68	0.5	Pass

### Spectrum Plot of Worst Value


#### 802.11ac (VHT20)

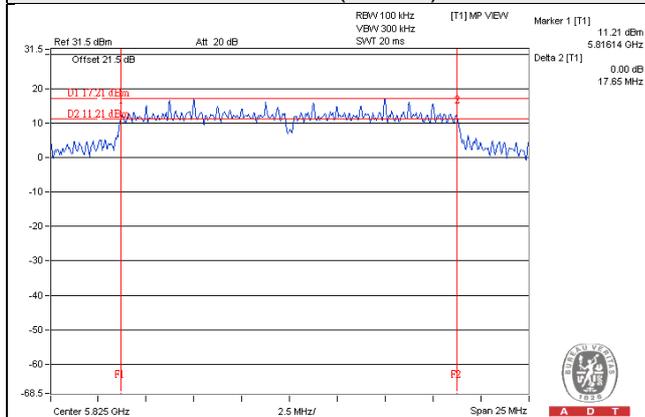

#### 802.11ac (VHT40)

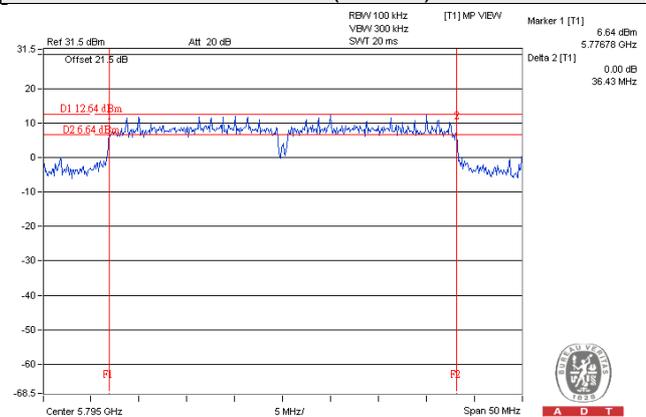

#### 802.11ac (VHT80)

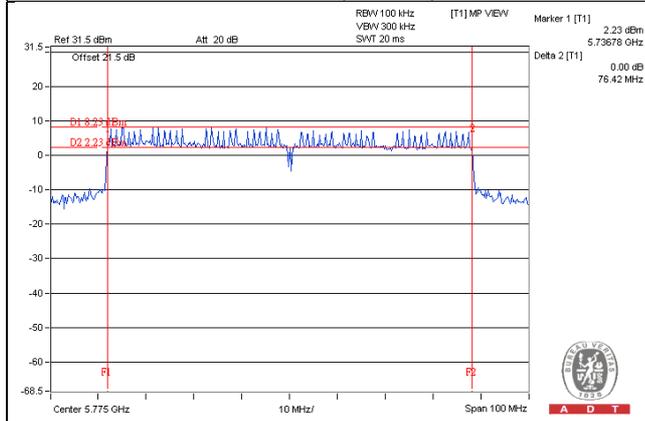




## 5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

### Annex A - Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)



802.11a

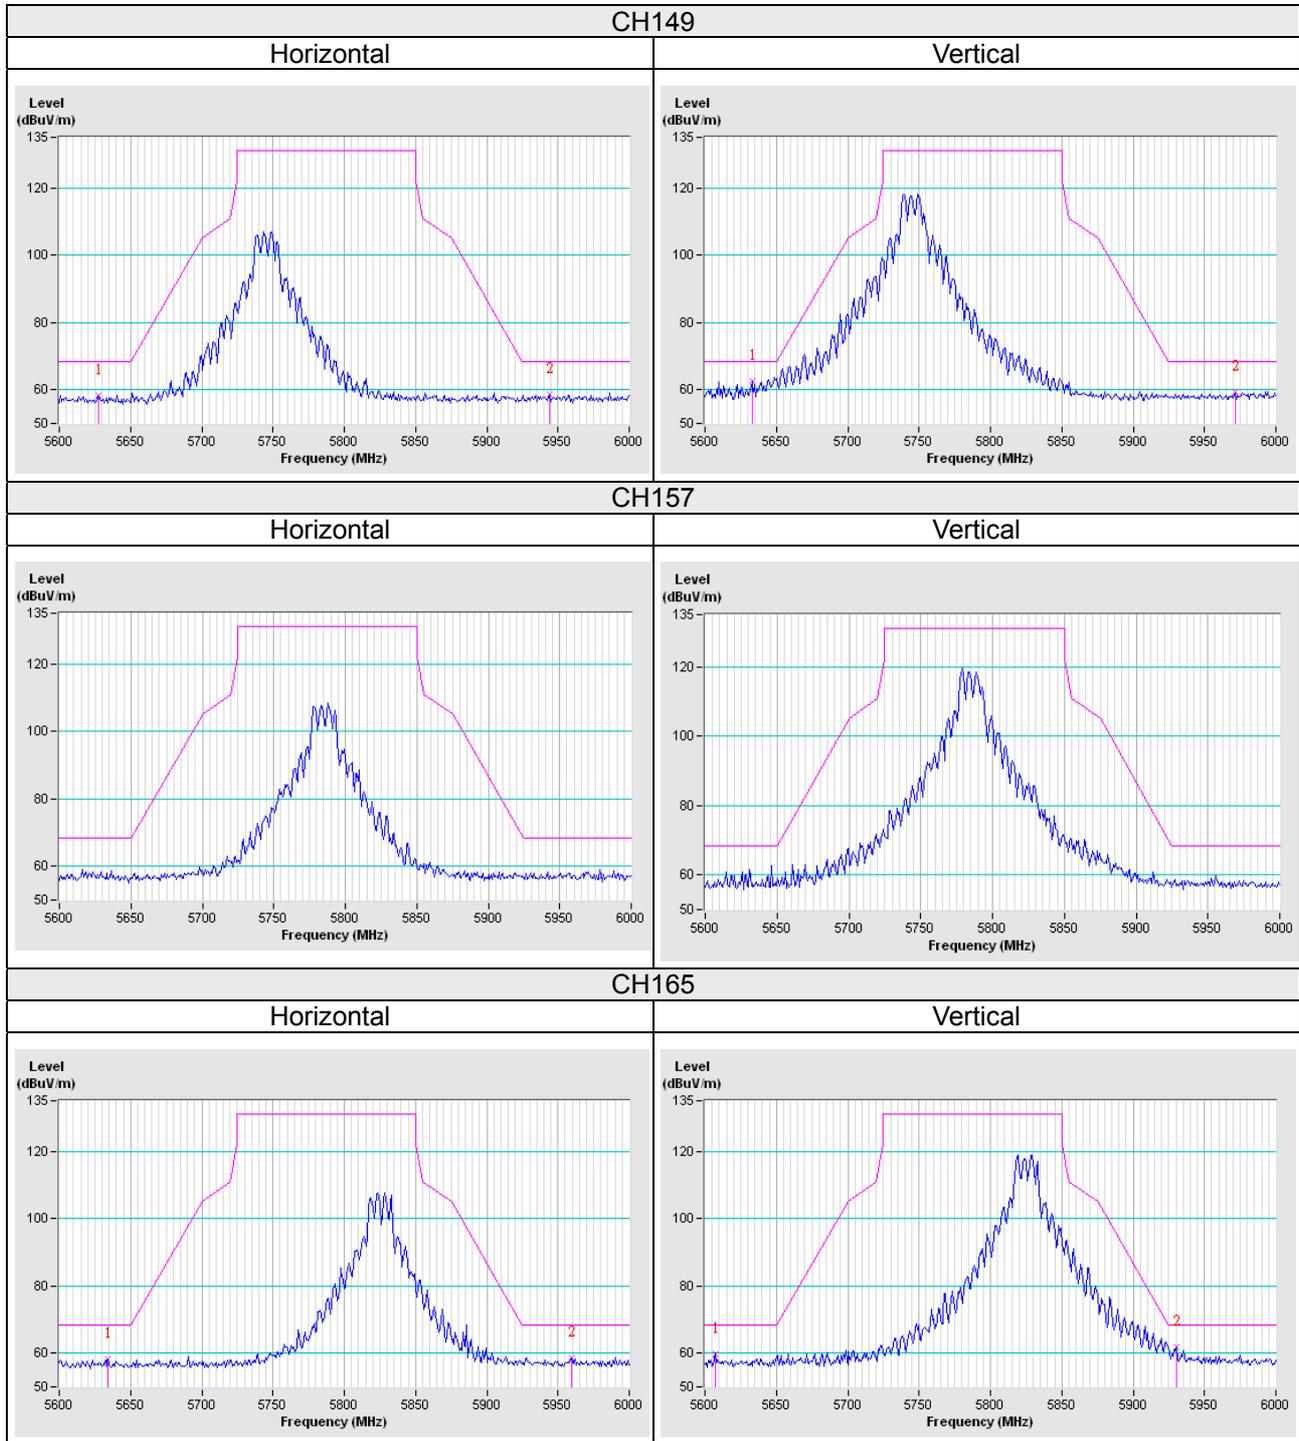


802.11ac (VHT20)

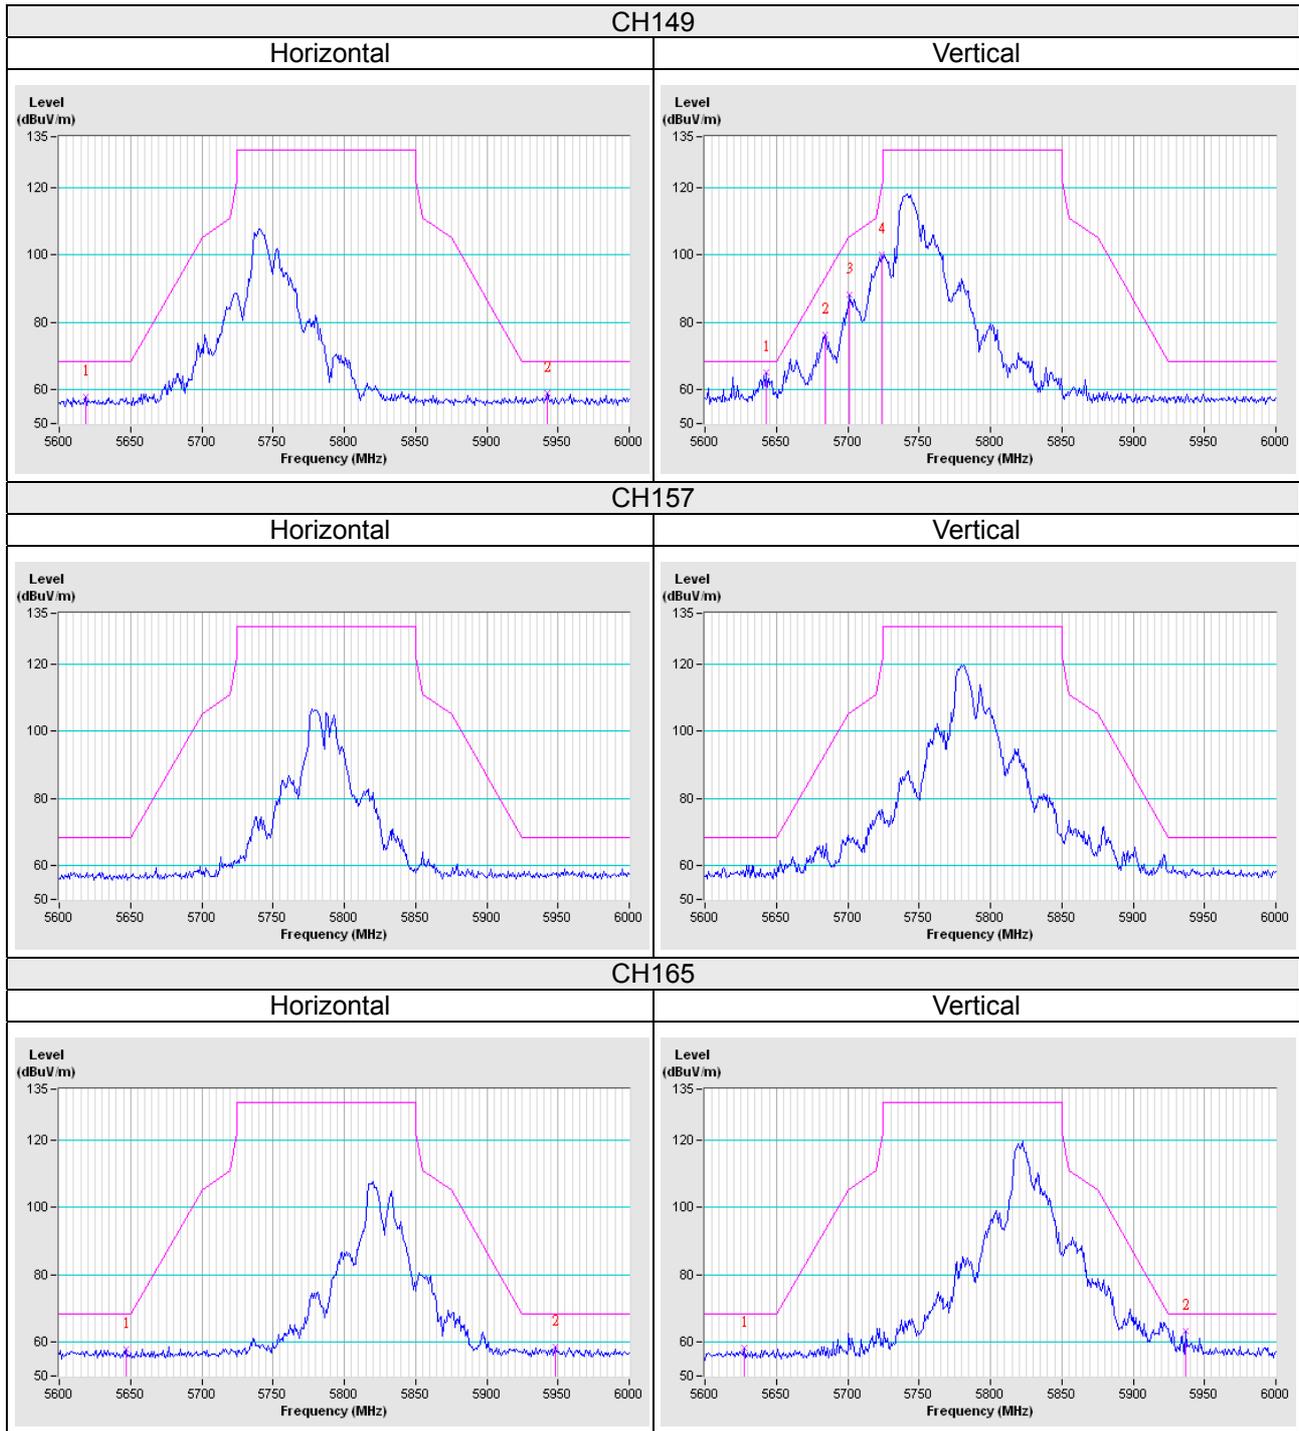

## 802.11ac (VHT40)

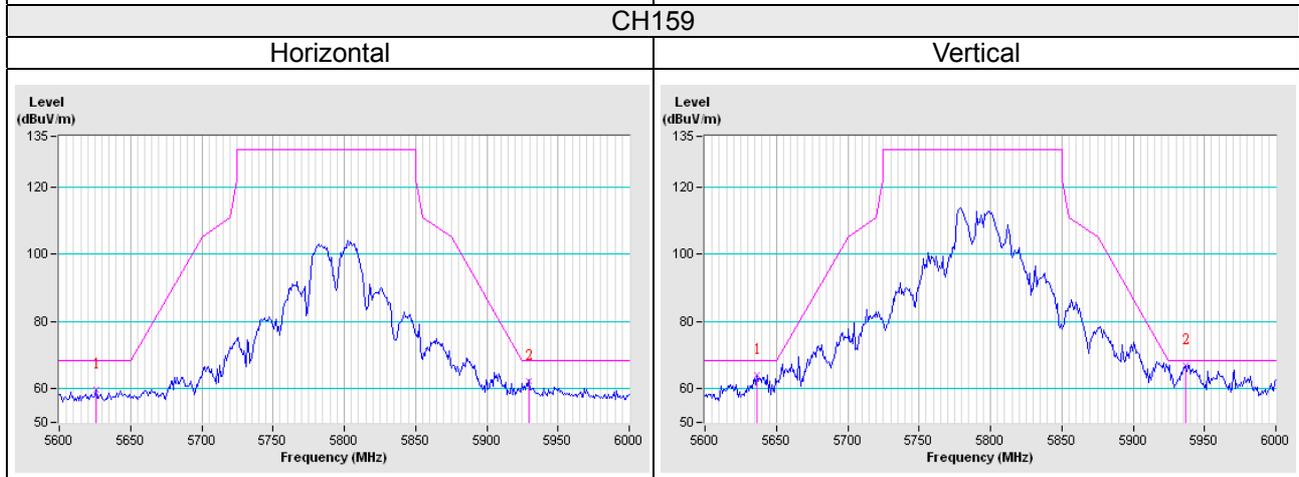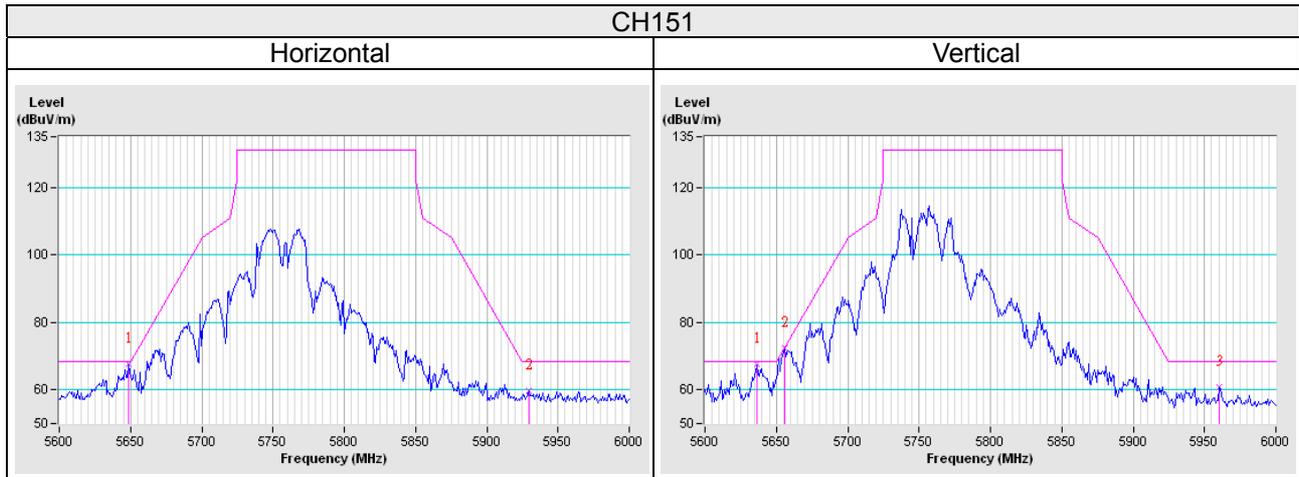

## 802.11ac (VHT80)

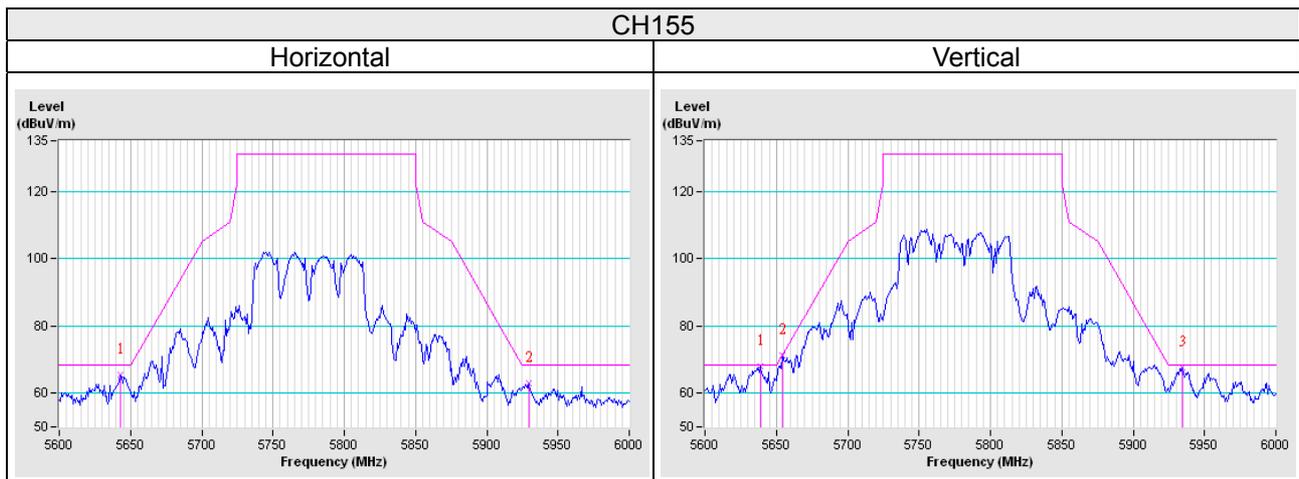

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---