

FCC Test Report

Report No.: RF171005D05

FCC ID: PY317300390

Test Model: R6260

Received Date: Oct. 5, 2017

Test Date: Oct. 16 ~ Nov. 21, 2017

Issued Date: Nov. 22, 2017

Applicant: NETGEAR INC.

Address: 350 East Plumeria Drive, San Jose, CA 95134, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

**FCC Registration /
Designation Number:** 198487 / TW2021



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	13
3.5 General Description of Applied Standards	14
4 Test Types and Results	15
4.1 Radiated Emission and Bandedge Measurement.....	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement	15
4.1.2 Test Instruments	16
4.1.3 Test Procedures.....	17
4.1.4 Deviation from Test Standard	17
4.1.5 Test Setup.....	18
4.1.6 EUT Operating Conditions.....	19
4.1.7 Test Results	20
4.2 Conducted Emission Measurement	41
4.2.1 Limits of Conducted Emission Measurement	41
4.2.2 Test Instruments	41
4.2.3 Test Procedures.....	42
4.2.4 Deviation from Test Standard	42
4.2.5 Test Setup.....	42
4.2.6 EUT Operating Conditions.....	42
4.2.7 Test Results	43
4.3 6dB Bandwidth Measurement	45
4.3.1 Limits of 6dB Bandwidth Measurement	45
4.3.2 Test Setup.....	45
4.3.3 Test Instruments	45
4.3.4 Test Procedure	45
4.3.5 Deviation from Test Standard	45
4.3.6 EUT Operating Conditions.....	45
4.3.7 Test Result.....	46
4.4 Conducted Output Power Measurement.....	48
4.4.1 Limits of Conducted Output Power Measurement	48
4.4.2 Test Setup.....	48
4.4.3 Test Instruments	48
4.4.4 Test Procedures.....	48
4.4.5 Deviation from Test Standard	48
4.4.6 EUT Operating Conditions.....	48
4.4.7 Test Results	49
4.5 Power Spectral Density Measurement.....	50
4.5.1 Limits of Power Spectral Density Measurement.....	50
4.5.2 Test Setup.....	50
4.5.3 Test Instruments	50
4.5.4 Test Procedure	50
4.5.5 Deviation from Test Standard	50

4.5.6 EUT Operating Condition	50
4.5.7 Test Results	51
4.6 Conducted Out of Band Emission Measurement.....	53
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	53
4.6.2 Test Setup.....	53
4.6.3 Test Instruments	53
4.6.4 Test Procedure	53
4.6.5 Deviation from Test Standard	53
4.6.6 EUT Operating Condition	53
4.6.7 Test Results	53
5 Pictures of Test Arrangements.....	64
Appendix – Information on the Testing Laboratories	65

Release Control Record

Issue No.	Description	Date Issued
RF171005D05	Original release.	Nov. 22, 2017

1 Certificate of Conformity

Product: AC1600 Smart WiFi Router

Brand: NETGEAR

Test Model: R6260

Sample Status: Engineering sample

Applicant: NETGEAR INC.

Test Date: Oct. 16 ~ Nov. 21, 2017

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :



Jessica Cheng / Senior Specialist

Date:

Nov. 22, 2017

Approved by :



Rex Lai / Assistant Manager

Date:

Nov. 22, 2017

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -11.82dB at 0.41563MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.15dB at 2390.00 MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is I-PEX not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.77 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	2.38 dB
	30MHz ~ 1000MHz	5.54 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	4.77 dB
	6GHz ~ 18GHz	5.48 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AC1600 Smart WiFi Router
Brand	NETGEAR
Test Model	R6260
Status of EUT	Engineering sample
Power Supply Rating	12Vdc from adapter (refer to note as below)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300Mbps
Operating Frequency	2.412 ~ 2.462GHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz)
Output Power	570.122mW
Antenna Type	Refer to note as below
Antenna Connector	Refer to note as below
Accessory Device	N/A
Data Cable Supplied	N/A

Note:

- The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

Modulation Mode	TX Function
802.11b	2TX
802.11g	2TX
802.11n (20MHz)	2TX
802.11n (40MHz)	2TX

- The EUT uses following adapter.

Adapter	1	2
Brand	LEI	CWT
Model	ML18-F120150-A1	2ABB018F 1 NJ
P/N	332-10858-01	332-10927-01
AC Input Power	100-120V~ 50/60Hz 0.5A	100-120V~ 50/60Hz 0.6A
DC Output Power	12V, 1.5A	12V, 1.5A
Plug Type	US Plug	US Plug
Cable	Non-shielded DC cable (1.8m)	Non-shielded DC cable (1.8m)

After pre-tested, the **adapter 1** was the worst case for final test.

3. The antennas provided to the EUT, please refer to the following table:

Chain No.	Antenna Type	Antenna Gain (dBi)	Connectot Type
Chain 0	Dipole	2.61	I-PEX
Chain 1	Dipole	3.15	I-PEX

4. The directional gain table:

Frequency (MHz)	Max. Gain (dBi)
2412 ~ 2462	5.89

Note:

(i) If transmit signals are *correlated*, then

Directional gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (40MHz):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE \geq 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **X-plane**.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
-	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Additional test

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	2, 10	DSSS	DBPSK	1
-	802.11g	1 to 11	2, 10	OFDM	BPSK	6
-	802.11n (20MHz)	1 to 11	2, 10	OFDM	BPSK	6.5
-	802.11n (40MHz)	3 to 9	4, 8	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11g	1 to 11	1	OFDM	BPSK	6

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11g	1 to 11	1	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
-	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
Output Power						
EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 2, 6, 10, 11	DSSS	DBPSK	1
-	802.11g	1 to 11	1, 2, 6, 10, 11	OFDM	BPSK	6
-	802.11n (20MHz)	1 to 11	1, 2, 6, 10, 11	OFDM	BPSK	6.5
-	802.11n (40MHz)	3 to 9	3, 4, 6, 8, 9	OFDM	BPSK	13.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	28deg. C, 69%RH	120Vac, 60Hz	James Wei & Ian Chang
RE<1G	27deg. C, 68%RH	120Vac, 60Hz	Ian Chang
PLC	25deg. C, 75%RH	120Vac, 60Hz	Ian Chang
APCM	25deg. C, 76%RH	120Vac, 60Hz	Saxon Lee

3.3 Duty Cycle of Test Signal


If duty cycle of test signal is $\geq 98\%$, duty factor is not required.
 If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = Duty cycle of test signal is 100 %.

802.11g: Duty cycle = $1.385/1.5 = 0.923$, Duty factor = $10 * \log(1/0.923) = 0.34$

802.11n (20MHz): Duty cycle = $1.3/1.44 = 0.903$, Duty factor = $10 * \log(1/0.903) = 0.44$

802.11n (40MHz): Duty cycle = $0.632/0.762 = 0.829$, Duty factor = $10 * \log(1/0.829) = 0.81$

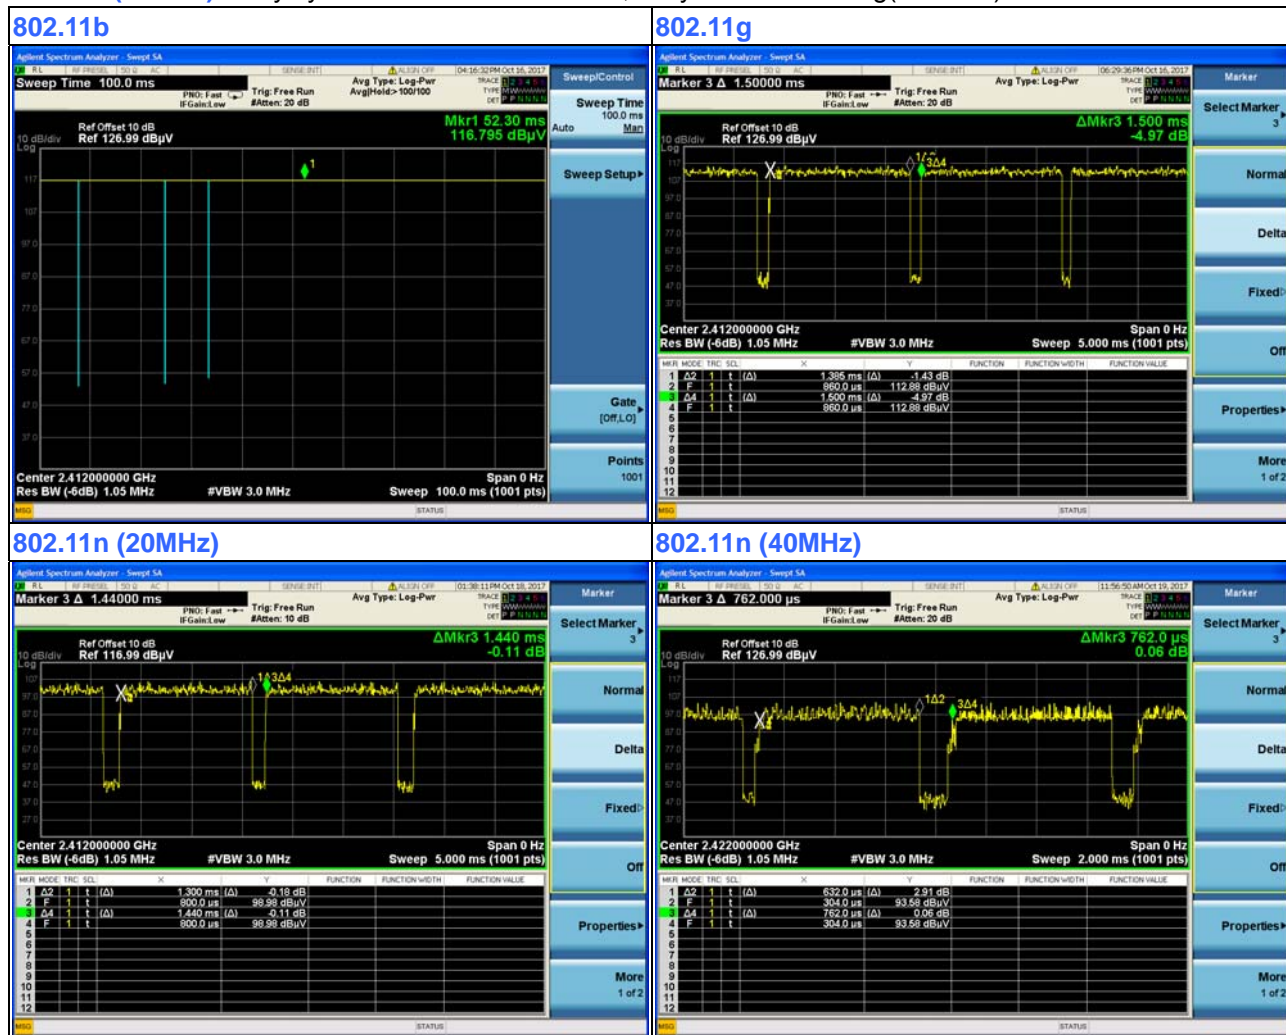

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	NOTEBOOK COMPUTER	DELL	PP27L	8SNZ12S	FCC DoC Approved	Provided by Lab


Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as communication partners to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC cable	1	1.8	N	0	Supplied by client
2.	LAN cable	1	10	N	0	Provided by Lab

Note: The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

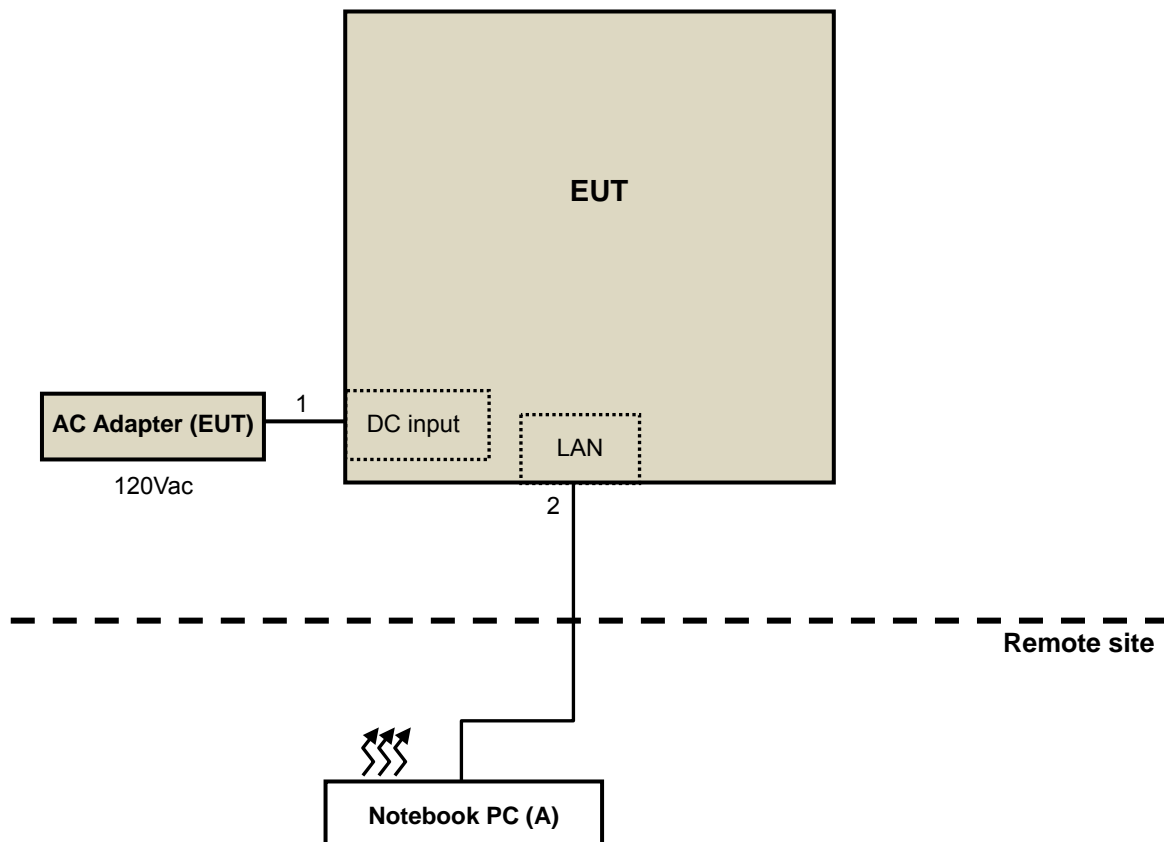

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 DTS Meas Guidance v04
KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 21, 2017	Feb. 20, 2018
HP Preamplifier	8449B	3008A01201	Feb. 22, 2017	Feb. 21, 2018
MITEQ Preamplifier	AMF-6F-260400-33-8P	892164	Feb. 21, 2017	Feb. 20, 2018
Agilent TEST RECEIVER	N9038A	MY51210129	Feb. 8, 2017	Feb. 7, 2018
Schwarzbeck Antenna	VULB 9168	139	Dec. 13, 2016	Dec. 12, 2017
Schwarzbeck Antenna	VHBA 9123	480	May 19, 2017	May 18, 2019
Schwarzbeck Horn Antenna	BBHA-9170	212	Dec. 30, 2016	Dec. 29, 2017
Schwarzbeck Horn Antenna	BBHA 9120-D1	D130	Dec. 27, 2016	Dec. 26, 2017
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	Radiated_V7.6.15.9.5	NA	NA	NA
SUHNER RF cable With 4dB PAD	SF104	CABLE-CH6	Aug. 14, 2017	Aug. 13, 2018
SUHNER RF cable With 3dB PAD	SF102	Cable-CH8-3.6m	Aug. 14, 2017	Aug. 13, 2018
KEYSIGHT MIMO Powermeasurement Test set	U2021XA	U2021XA-001	May 31,2017	May 30,2018
KEYSIGHT Spectrum Analyzer	N9030A	MY54490260	Jul. 26, 2017	Jul. 25, 2018
Loop Antenna EMCI	LPA600	270	Aug. 11, 2017	Aug. 10, 2019
EMCO Horn Antenna	3115	00028257	Dec. 15, 2016	Dec. 14, 2017
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSV40	101042	Sep. 29, 2017	Sep. 28, 2018
Anritsu Power Sensor	MA2411B	0738404	Apr. 24, 2017	Apr. 23, 2018
Anritsu Power Meter	ML2495A	0842014	Apr. 24, 2017	Apr. 23, 2018

- NOTE:**
1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in Chamber No. 6.
 4. The Industry Canada Reference No. IC 7450E-6.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

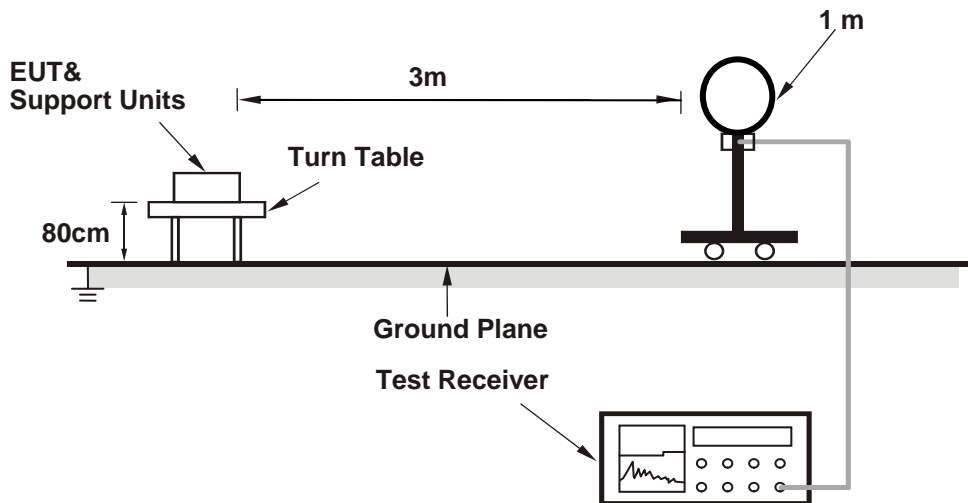

For Radiated emission 30MHz to 1GHz

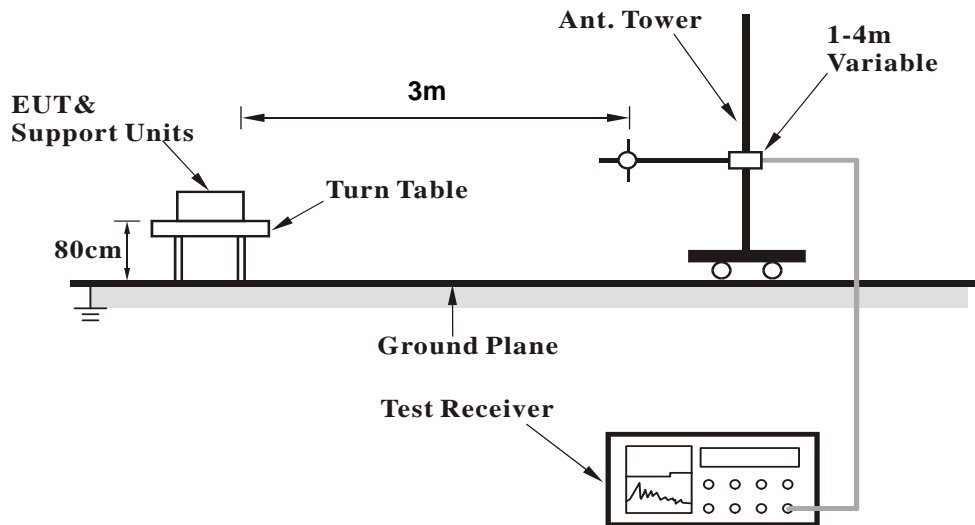

For Radiated emission above 1GHz

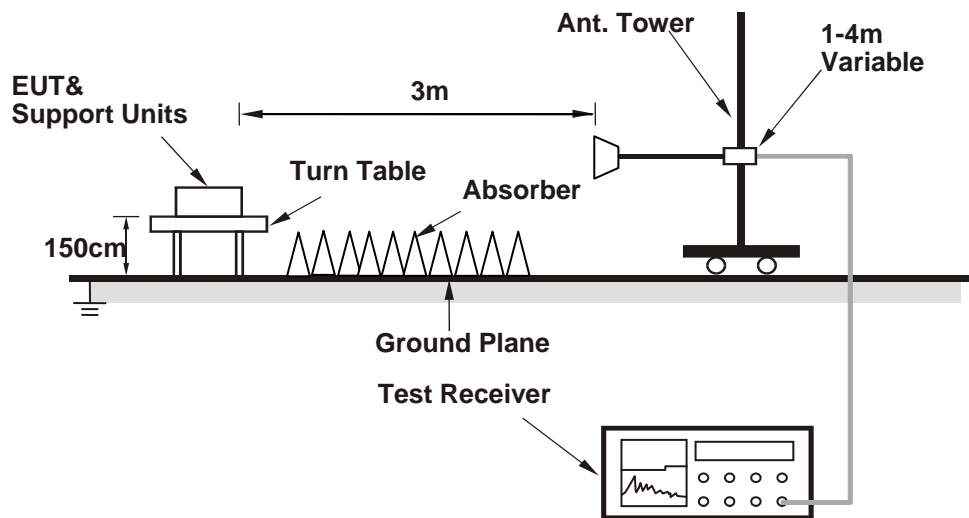

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Connected the EUT with AC adapter placed on testing table.
- b. Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.56 PK	74.00	-16.44	2.04 H	328	59.87	-2.31
2	2390.00	46.07 AV	54.00	-7.93	2.04 H	328	48.38	-2.31
3	*2412.00	104.02 PK			2.04 H	328	106.19	-2.17
4	*2412.00	100.36 AV			2.04 H	328	102.53	-2.17
5	4824.00	45.00 PK	74.00	-29.00	1.16 H	87	40.84	4.16
6	4824.00	40.04 AV	54.00	-13.96	1.16 H	87	35.88	4.16

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.52 PK	74.00	-11.48	1.14 V	155	64.83	-2.31
2	2390.00	53.71 AV	54.00	-0.29	1.14 V	155	56.02	-2.31
3	*2412.00	112.82 PK			1.14 V	155	114.99	-2.17
4	*2412.00	109.94 AV			1.14 V	151	112.11	-2.17
5	4824.00	46.29 PK	74.00	-27.71	1.61 V	224	42.13	4.16
6	4824.00	41.00 AV	54.00	-13.00	1.61 V	224	36.84	4.16

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.66 PK	74.00	-15.34	2.24 H	318	60.97	-2.31
2	2390.00	47.52 AV	54.00	-6.48	2.24 H	318	49.83	-2.31
3	*2437.00	108.82 PK			2.24 H	318	110.83	-2.01
4	*2437.00	104.97 AV			2.24 H	318	106.98	-2.01
5	4874.00	45.49 PK	74.00	-28.51	1.81 H	105	41.24	4.25
6	4874.00	40.33 AV	54.00	-13.67	1.81 H	105	36.08	4.25

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.81 PK	74.00	-11.19	1.44 V	151	65.12	-2.31
2	2390.00	53.74 AV	54.00	-0.26	1.44 V	151	56.05	-2.31
3	*2437.00	116.18 PK			1.44 V	151	118.19	-2.01
4	*2437.00	113.21 AV			1.44 V	151	115.22	-2.01
5	4874.00	47.23 PK	74.00	-26.77	1.64 V	318	42.98	4.25
6	4874.00	41.52 AV	54.00	-12.48	1.64 V	318	37.27	4.25

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.33 PK			1.89 H	299	106.18	-1.85
2	*2462.00	100.58 AV			1.89 H	299	102.43	-1.85
3	2483.50	57.18 PK	74.00	-16.82	1.89 H	299	58.89	-1.71
4	2483.50	47.63 AV	54.00	-6.37	1.89 H	299	49.34	-1.71
5	4924.00	45.27 PK	74.00	-28.73	1.88 H	241	40.97	4.30
6	4924.00	40.22 AV	54.00	-13.78	1.88 H	241	35.92	4.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.77 PK			1.42 V	193	114.62	-1.85
2	*2462.00	110.02 AV			1.42 V	193	111.87	-1.85
3	2483.50	61.73 PK	74.00	-12.27	1.42 V	193	63.44	-1.71
4	2483.50	53.66 AV	54.00	-0.34	1.42 V	193	55.37	-1.71
5	4924.00	46.83 PK	74.00	-27.17	1.82 V	154	42.53	4.30
6	4924.00	42.18 AV	54.00	-11.82	1.82 V	154	37.88	4.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.53 PK	74.00	-14.47	2.49 H	317	61.84	-2.31
2	2390.00	46.29 AV	54.00	-7.71	2.49 H	317	48.60	-2.31
3	*2412.00	105.17 PK			2.49 H	317	107.34	-2.17
4	*2412.00	95.34 AV			2.49 H	317	97.51	-2.17
5	4824.00	44.39 PK	74.00	-29.61	2.28 H	201	40.23	4.16
6	4824.00	39.74 AV	54.00	-14.26	2.28 H	201	35.58	4.16

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.93 PK	74.00	-3.07	1.44 V	210	73.24	-2.31
2	2390.00	53.85 AV	54.00	-0.15	1.44 V	210	56.16	-2.31
3	*2412.00	117.39 PK			1.44 V	210	119.56	-2.17
4	*2412.00	107.97 AV			1.44 V	210	110.14	-2.17
5	4824.00	46.99 PK	74.00	-27.01	1.44 V	228	42.83	4.16
6	4824.00	42.07 AV	54.00	-11.93	1.44 V	228	37.91	4.16

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.57 PK	74.00	-16.43	2.44 H	315	59.88	-2.31
2	2390.00	45.86 AV	54.00	-8.14	2.44 H	315	48.17	-2.31
3	*2437.00	112.22 PK			2.44 H	315	114.23	-2.01
4	*2437.00	103.97 AV			2.44 H	315	105.98	-2.01
5	2483.50	57.41 PK	74.00	-16.59	2.44 H	315	59.12	-1.71
6	2483.50	44.58 AV	54.00	-9.42	2.44 H	315	46.29	-1.71
7	4874.00	44.98 PK	74.00	-29.02	2.51 H	202	40.73	4.25
8	4874.00	40.10 AV	54.00	-13.90	2.51 H	202	35.85	4.25

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.42 PK	74.00	-15.58	1.44 V	159	60.73	-2.31
2	2390.00	45.95 AV	54.00	-8.05	1.44 V	159	48.26	-2.31
3	*2437.00	119.86 PK			1.44 V	157	121.87	-2.01
4	*2437.00	110.06 AV			1.44 V	157	112.07	-2.01
5	2483.50	59.03 PK	74.00	-14.97	1.44 V	159	60.74	-1.71
6	2483.50	46.49 AV	54.00	-7.51	1.44 V	159	48.20	-1.71
7	4874.00	48.22 PK	74.00	-25.78	1.58 V	192	43.97	4.25
8	4874.00	43.23 AV	54.00	-10.77	1.58 V	192	38.98	4.25

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.27 PK			2.59 H	298	107.12	-1.85
2	*2462.00	95.43 AV			2.59 H	298	97.28	-1.85
3	2483.50	67.52 PK	74.00	-6.48	2.59 H	298	69.23	-1.71
4	2483.50	48.84 AV	54.00	-5.16	2.59 H	298	50.55	-1.71
5	4924.00	44.73 PK	74.00	-29.27	2.35 H	189	40.43	4.30
6	4924.00	39.92 AV	54.00	-14.08	2.35 H	189	35.62	4.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.75 PK			1.62 V	160	116.60	-1.85
2	*2462.00	105.63 AV			1.62 V	160	107.48	-1.85
3	2483.50	72.29 PK	74.00	-1.71	1.62 V	160	74.00	-1.71
4	2483.50	53.73 AV	54.00	-0.27	1.62 V	160	55.44	-1.71
5	4924.00	47.27 PK	74.00	-26.73	1.58 V	243	42.97	4.30
6	4924.00	42.28 AV	54.00	-11.72	1.58 V	243	37.98	4.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.05 PK	74.00	-7.95	1.65 H	298	68.36	-2.31
2	2390.00	49.52 AV	54.00	-4.48	1.65 H	298	51.83	-2.31
3	*2412.00	105.16 PK			1.65 H	298	107.33	-2.17
4	*2412.00	94.79 AV			1.65 H	298	96.96	-2.17
5	4824.00	43.30 PK	74.00	-30.70	1.36 H	99	39.14	4.16
6	4824.00	29.64 AV	54.00	-24.36	1.36 H	99	25.48	4.16

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.56 PK	74.00	-3.44	1.74 V	151	72.87	-2.31
2	2390.00	53.72 AV	54.00	-0.28	1.74 V	151	56.03	-2.31
3	*2412.00	111.74 PK			1.74 V	151	113.91	-2.17
4	*2412.00	102.33 AV			1.74 V	151	104.50	-2.17
5	4824.00	44.39 PK	74.00	-29.61	1.16 V	206	40.23	4.16
6	4824.00	32.06 AV	54.00	-21.94	1.16 V	206	27.90	4.16

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.11 PK	74.00	-17.89	1.51 H	321	58.42	-2.31
2	2390.00	42.77 AV	54.00	-11.23	1.51 H	321	45.08	-2.31
3	*2437.00	111.44 PK			1.51 H	321	113.45	-2.01
4	*2437.00	102.11 AV			1.51 H	321	104.12	-2.01
5	4874.00	45.40 PK	74.00	-28.60	1.52 H	111	41.15	4.25
6	4874.00	35.32 AV	54.00	-18.68	1.52 H	111	31.07	4.25

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.53 PK	74.00	-14.47	2.09 V	215	61.84	-2.31
2	2390.00	46.10 AV	54.00	-7.90	2.09 V	215	48.41	-2.31
3	*2437.00	117.59 PK			2.09 V	215	119.60	-2.01
4	*2437.00	107.07 AV			2.09 V	215	109.08	-2.01
5	4874.00	47.06 PK	74.00	-26.94	1.53 V	221	42.81	4.25
6	4874.00	36.69 AV	54.00	-17.31	1.53 V	221	32.44	4.25

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.36 PK			1.58 H	313	107.21	-1.85
2	*2462.00	95.02 AV			1.58 H	313	96.87	-1.85
3	2483.50	68.16 PK	74.00	-5.84	1.58 H	313	69.87	-1.71
4	2483.50	49.46 AV	54.00	-4.54	1.58 H	313	51.17	-1.71
5	4924.00	43.78 PK	74.00	-30.22	1.57 H	76	39.48	4.30
6	4924.00	29.95 AV	54.00	-24.05	1.57 H	76	25.65	4.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.76 PK			1.73 V	207	113.61	-1.85
2	*2462.00	102.28 AV			1.73 V	207	104.13	-1.85
3	2483.50	72.36 PK	74.00	-1.64	1.73 V	207	74.07	-1.71
4	2483.50	53.74 AV	54.00	-0.26	1.73 V	207	55.45	-1.71
5	4924.00	45.13 PK	74.00	-28.87	1.52 V	198	40.83	4.30
6	4924.00	32.44 AV	54.00	-21.56	1.52 V	198	28.14	4.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.33 PK	74.00	-11.67	2.45 H	291	64.64	-2.31
2	2390.00	46.69 AV	54.00	-7.31	2.45 H	291	49.00	-2.31
3	*2422.00	98.79 PK			2.45 H	291	100.90	-2.11
4	*2422.00	89.33 AV			2.45 H	291	91.44	-2.11
5	4844.00	44.37 PK	74.00	-29.63	1.66 H	142	40.17	4.20
6	4844.00	31.38 AV	54.00	-22.62	1.66 H	142	27.18	4.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.31 PK	74.00	-4.69	1.74 V	204	71.62	-2.31
2	2390.00	53.71 AV	54.00	-0.29	1.74 V	204	56.02	-2.31
3	*2422.00	105.92 PK			1.74 V	204	108.03	-2.11
4	*2422.00	96.42 AV			1.74 V	204	98.53	-2.11
5	4844.00	45.62 PK	74.00	-28.38	1.05 V	233	41.42	4.20
6	4844.00	32.03 AV	54.00	-21.97	1.05 V	233	27.83	4.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.56 PK	74.00	-11.44	2.11 H	281	64.87	-2.31
2	2390.00	46.57 AV	54.00	-7.43	2.11 H	281	48.88	-2.31
3	*2437.00	102.82 PK			2.11 H	281	104.83	-2.01
4	*2437.00	93.26 AV			2.11 H	281	95.27	-2.01
5	4874.00	44.60 PK	74.00	-29.40	1.58 H	124	40.35	4.25
6	4874.00	31.64 AV	54.00	-22.36	1.58 H	124	27.39	4.25

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.32 PK	74.00	-6.68	1.70 V	204	69.63	-2.31
2	2390.00	53.72 AV	54.00	-0.28	1.70 V	204	56.03	-2.31
3	*2437.00	110.49 PK			1.70 V	204	112.50	-2.01
4	*2437.00	101.37 AV			1.70 V	204	103.38	-2.01
5	4874.00	46.13 PK	74.00	-27.87	1.19 V	258	41.88	4.25
6	4874.00	32.37 AV	54.00	-21.63	1.19 V	258	28.12	4.25

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	99.01 PK			1.60 H	155	100.92	-1.91
2	*2452.00	89.63 AV			1.60 H	155	91.54	-1.91
3	2483.50	61.27 PK	74.00	-12.73	1.60 H	155	62.98	-1.71
4	2483.50	46.85 AV	54.00	-7.15	1.60 H	155	48.56	-1.71
5	4904.00	44.41 PK	74.00	-29.59	1.82 H	119	40.11	4.30
6	4904.00	31.39 AV	54.00	-22.61	1.82 H	119	27.09	4.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	106.48 PK			1.39 V	154	108.39	-1.91
2	*2452.00	97.43 AV			1.39 V	154	99.34	-1.91
3	2483.50	68.09 PK	74.00	-5.91	1.39 V	154	69.80	-1.71
4	2483.50	53.77 AV	54.00	-0.23	1.39 V	154	55.48	-1.71
5	4904.00	45.53 PK	74.00	-28.47	1.18 V	245	41.23	4.30
6	4904.00	32.06 AV	54.00	-21.94	1.18 V	245	27.76	4.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

BELOW 1GHz WORST-CASE DATA

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	76.61	23.16 QP	40.00	-16.84	2.08 H	244	36.19	-13.03
2	151.35	24.94 QP	43.50	-18.56	2.15 H	114	33.96	-9.02
3	326.97	30.80 QP	46.00	-15.20	2.65 H	87	37.32	-6.52
4	649.05	33.58 QP	46.00	-12.42	1.08 H	233	33.55	0.03
5	709.19	34.34 QP	46.00	-11.66	3.31 H	227	33.00	1.34
6	913.91	35.24 QP	46.00	-10.76	2.27 H	360	30.17	5.07

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	49.40	36.38 QP	40.00	-3.62	2.21 V	298	45.34	-8.96
2	159.74	26.99 QP	43.50	-16.51	2.08 V	34	35.76	-8.77
3	377.65	32.18 QP	46.00	-13.82	1.18 V	185	37.98	-5.80
4	634.07	33.76 QP	46.00	-12.24	1.56 V	100	33.54	0.22
5	681.21	34.96 QP	46.00	-11.04	1.98 V	284	34.20	0.76
6	889.71	33.57 QP	46.00	-12.43	3.01 V	320	29.33	4.24

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

Additional test
ABOVE 1GHz DATA
802.11b

CHANNEL	TX Channel 2	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.32 PK	74.00	-17.68	2.77 H	301	58.63	-2.31
2	2390.00	45.71 AV	54.00	-8.29	2.77 H	301	48.02	-2.31
3	*2417.00	106.40 PK			2.77 H	301	108.54	-2.14
4	*2417.00	103.73 AV			2.77 H	301	105.87	-2.14
5	4834.00	45.21 PK	74.00	-28.79	1.05 H	83	41.03	4.18
6	4834.00	40.13 AV	54.00	-13.87	1.05 H	83	35.95	4.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.35 PK	74.00	-12.65	2.22 V	150	63.66	-2.31
2	2390.00	52.64 AV	54.00	-1.36	2.22 V	150	54.95	-2.31
3	*2417.00	114.59 PK			2.22 V	150	116.73	-2.14
4	*2417.00	112.21 AV			2.22 V	150	114.35	-2.14
5	4834.00	46.71 PK	74.00	-27.29	1.72 V	221	42.53	4.18
6	4834.00	41.16 AV	54.00	-12.84	1.72 V	221	36.98	4.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 10	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2457.00	106.75 PK			2.71 H	293	108.62	-1.87
2	*2457.00	104.01 AV			2.71 H	293	105.88	-1.87
3	2483.50	57.23 PK	74.00	-16.77	2.71 H	293	58.94	-1.71
4	2483.50	47.32 AV	54.00	-6.68	2.71 H	293	49.03	-1.71
5	4914.00	46.84 PK	74.00	-27.16	1.28 H	77	42.55	4.29
6	4914.00	41.25 AV	54.00	-12.75	1.28 H	77	36.96	4.29

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2457.00	114.88 PK			1.79 V	144	116.75	-1.87
2	*2457.00	112.51 AV			1.79 V	144	114.38	-1.87
3	2483.50	62.33 PK	74.00	-11.67	1.79 V	144	64.04	-1.71
4	2483.50	53.67 AV	54.00	-0.33	1.79 V	144	55.38	-1.71
5	4914.00	46.84 PK	74.00	-27.16	1.88 V	201	42.55	4.29
6	4914.00	41.25 AV	54.00	-12.75	1.88 V	201	36.96	4.29

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 2	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.57 PK	74.00	-13.43	2.81 H	300	62.88	-2.31
2	2390.00	47.24 AV	54.00	-6.76	2.81 H	300	49.55	-2.31
3	*2417.00	106.68 PK			2.81 H	300	108.82	-2.14
4	*2417.00	96.75 AV			2.81 H	300	98.89	-2.14
5	4834.00	44.73 PK	74.00	-29.27	1.44 H	21	40.55	4.18
6	4834.00	40.21 AV	54.00	-13.79	1.44 H	21	36.03	4.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.27 PK	74.00	-3.73	2.20 V	155	72.58	-2.31
2	2390.00	52.76 AV	54.00	-1.24	2.20 V	155	55.07	-2.31
3	*2417.00	118.68 PK			2.20 V	155	120.82	-2.14
4	*2417.00	109.17 AV			2.20 V	155	111.31	-2.14
5	4834.00	47.02 PK	74.00	-26.98	1.80 V	247	42.84	4.18
6	4834.00	42.19 AV	54.00	-11.81	1.80 V	247	38.01	4.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 10	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2457.00	103.89 PK			2.59 H	244	105.76	-1.87
2	*2457.00	93.92 AV			2.59 H	244	95.79	-1.87
3	2483.50	67.10 PK	74.00	-6.90	2.59 H	244	68.81	-1.71
4	2483.50	47.57 AV	54.00	-6.43	2.59 H	244	49.28	-1.71
5	4914.00	44.91 PK	74.00	-29.09	1.59 H	74	40.62	4.29
6	4914.00	40.13 AV	54.00	-13.87	1.59 H	74	35.84	4.29

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2457.00	116.00 PK			2.15 V	154	117.87	-1.87
2	*2457.00	108.66 AV			2.15 V	154	110.53	-1.87
3	2483.50	70.59 PK	74.00	-3.41	2.15 V	154	72.30	-1.71
4	2483.50	50.73 AV	54.00	-3.27	2.15 V	154	52.44	-1.71
5	4914.00	47.00 PK	74.00	-27.00	1.81 V	219	42.71	4.29
6	4914.00	41.53 AV	54.00	-12.47	1.81 V	219	37.24	4.29

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (20MHz)

CHANNEL	TX Channel 2	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.18 PK	74.00	-10.82	2.23 H	259	65.49	-2.31
2	2390.00	46.97 AV	54.00	-7.03	2.23 H	259	49.28	-2.31
3	*2417.00	107.62 PK			2.23 H	259	109.76	-2.14
4	*2417.00	96.75 AV			2.23 H	259	98.89	-2.14
5	4834.00	43.55 PK	74.00	-30.45	1.51 H	93	39.37	4.18
6	4834.00	29.90 AV	54.00	-24.10	1.51 H	93	25.72	4.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.34 PK	74.00	-6.66	1.47 V	163	69.65	-2.31
2	2390.00	49.77 AV	54.00	-4.23	1.47 V	163	52.08	-2.31
3	*2417.00	113.97 PK			1.47 V	163	116.11	-2.14
4	*2417.00	106.40 AV			1.47 V	163	108.54	-2.14
5	4834.00	44.77 PK	74.00	-29.23	1.88 V	109	40.59	4.18
6	4834.00	32.42 AV	54.00	-21.58	1.88 V	109	28.24	4.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 10	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2457.00	107.81 PK			2.83 H	266	109.68	-1.87
2	*2457.00	98.55 AV			2.83 H	266	100.42	-1.87
3	2483.50	61.68 PK	74.00	-12.32	2.83 H	266	63.39	-1.71
4	2483.50	53.56 AV	54.00	-0.44	2.83 H	266	55.27	-1.71
5	4914.00	44.01 PK	74.00	-29.99	1.72 H	44	39.72	4.29
6	4914.00	29.97 AV	54.00	-24.03	1.72 H	44	25.68	4.29

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2457.00	113.71 PK			1.77 V	154	115.58	-1.87
2	*2457.00	106.23 AV			1.77 V	154	108.10	-1.87
3	2483.50	66.23 PK	74.00	-7.77	1.77 V	154	67.94	-1.71
4	2483.50	46.86 AV	54.00	-7.14	1.77 V	154	48.57	-1.71
5	4914.00	44.60 PK	74.00	-29.40	1.81 V	105	40.31	4.29
6	4914.00	32.32 AV	54.00	-21.68	1.81 V	105	28.03	4.29

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (40MHz)

CHANNEL	TX Channel 4	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.52 PK	74.00	-10.48	2.86 H	314	65.83	-2.31
2	2390.00	47.96 AV	54.00	-6.04	2.86 H	314	50.27	-2.31
3	*2427.00	100.56 PK			2.86 H	314	102.64	-2.08
4	*2427.00	91.05 AV			2.86 H	314	93.13	-2.08
5	4854.00	44.63 PK	74.00	-29.37	1.19 H	106	40.42	4.21
6	4854.00	31.49 AV	54.00	-22.51	1.19 H	106	27.28	4.21

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.87 PK	74.00	-6.13	1.63 V	149	70.18	-2.31
2	2390.00	52.73 AV	54.00	-1.27	1.63 V	149	55.04	-2.31
3	*2427.00	108.03 PK			1.63 V	149	110.11	-2.08
4	*2427.00	97.38 AV			1.63 V	149	99.46	-2.08
5	4854.00	46.37 PK	74.00	-27.63	1.87 V	205	42.16	4.21
6	4854.00	32.45 AV	54.00	-21.55	1.87 V	205	28.24	4.21

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 8	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2447.00	99.54 PK			2.88 H	322	101.49	-1.95
2	*2447.00	90.89 AV			2.88 H	322	92.84	-1.95
3	2483.50	61.31 PK	74.00	-12.69	2.88 H	322	63.02	-1.71
4	2483.50	44.26 AV	54.00	-9.74	2.88 H	322	45.97	-1.71
5	4894.00	44.65 PK	74.00	-29.35	1.57 H	312	40.38	4.27
6	4894.00	31.56 AV	54.00	-22.44	1.57 H	312	27.29	4.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2447.00	107.94 PK			1.80 V	210	109.89	-1.95
2	*2447.00	97.64 AV			1.80 V	210	99.59	-1.95
3	2483.50	68.14 PK	74.00	-5.86	1.80 V	210	69.85	-1.71
4	2483.50	50.59 AV	54.00	-3.41	1.80 V	210	52.30	-1.71
5	4894.00	46.48 PK	74.00	-27.52	1.88 V	192	42.21	4.27
6	4894.00	32.53 AV	54.00	-21.47	1.88 V	192	28.26	4.27

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESCS 30	100276	Apr. 10, 2017	Apr. 9, 2018
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ENV216	101197	May 22, 2017	May 21, 2018
LISN With Adapter (for EUT)	AD10	C10Ada-002	May 22, 2017	May 21, 2018
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100218	Nov. 23, 2016	Nov. 22, 2017
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK8129	8129229	May 9, 2017	May 8, 2018
Software	Cond_V7.3.7.4	NA	NA	NA
RF cable (JYEBAO) With 10dB PAD	5D-FB	Cable-C10.01	Feb. 14, 2017	Feb. 13, 2018
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-011484	May 18, 2017	May 17, 2018
ROHDE & SCHWARZ Artificial Mains Network (For TV EUT)	ESH3-Z5	100220	Nov. 14, 2017	Nov. 13, 2018
LISN With Adapter (for TV EUT)	100220	N/A	Nov. 14, 2017	Nov. 13, 2018

Notes: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in Shielded Room No. 10.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

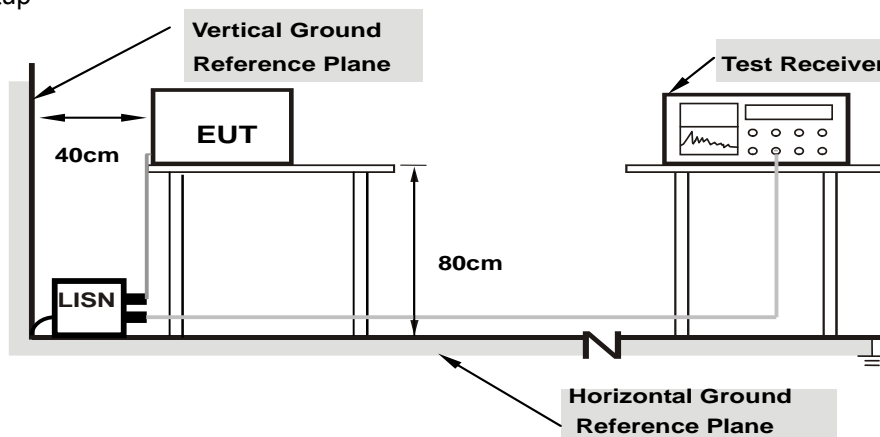

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.65	40.65	26.47	50.30	36.12	65.58	55.58	-15.28	-19.46
2	0.41563	9.69	29.96	24.36	39.65	34.05	57.54	47.54	-17.89	-13.49
3	0.89219	9.77	19.93	14.72	29.70	24.49	56.00	46.00	-26.30	-21.51
4	2.80859	9.95	17.85	12.32	27.80	22.27	56.00	46.00	-28.20	-23.73
5	4.69141	10.06	25.50	19.39	35.56	29.45	56.00	46.00	-20.44	-16.55
6	5.47266	10.08	27.71	22.04	37.79	32.12	60.00	50.00	-22.21	-17.88
7	11.32813	10.21	20.70	15.24	30.91	25.45	60.00	50.00	-29.09	-24.55

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

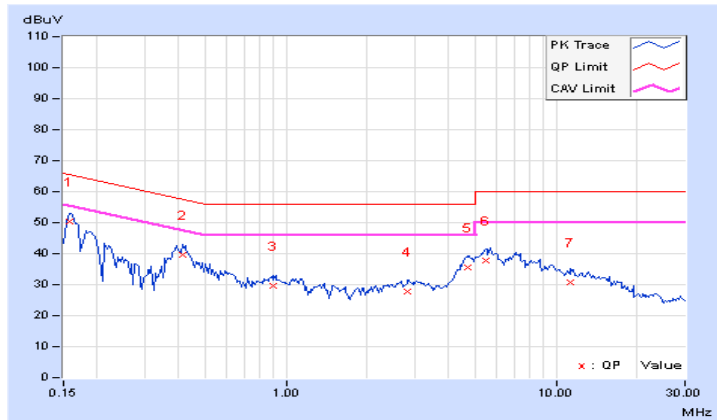


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.69	40.83	26.75	50.52	36.44	65.58	55.58	-15.06	-19.14
2	0.41563	9.73	31.60	25.99	41.33	35.72	57.54	47.54	-16.21	-11.82
3	1.11328	9.81	20.95	15.84	30.76	25.65	56.00	46.00	-25.24	-20.35
4	2.91797	10.01	16.33	9.27	26.34	19.28	56.00	46.00	-29.66	-26.72
5	5.47266	10.18	25.68	19.79	35.86	29.97	60.00	50.00	-24.14	-20.03
6	9.54688	10.25	22.36	17.06	32.61	27.31	60.00	50.00	-27.39	-22.69

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

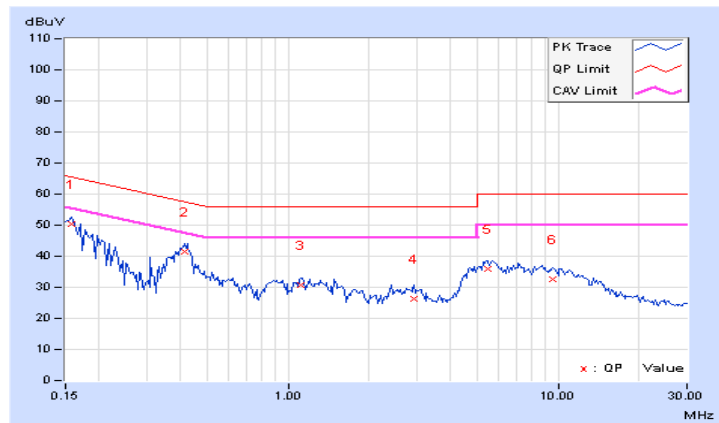


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	10.09	10.09	0.5	PASS
6	2437	10.11	10.08	0.5	PASS
11	2462	10.11	10.10	0.5	PASS

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.33	16.32	0.5	PASS
6	2437	16.38	16.34	0.5	PASS
11	2462	16.31	16.29	0.5	PASS

802.11n (20MHz)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	17.58	17.60	0.5	PASS
6	2437	17.59	17.59	0.5	PASS
11	2462	17.57	17.55	0.5	PASS

802.11n (40MHz)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	35.80	35.85	0.5	PASS
6	2437	35.17	35.78	0.5	PASS
9	2452	35.89	35.31	0.5	PASS

Spectrum Plot of Worst Value


802.11b_Chain 0 / CH 6

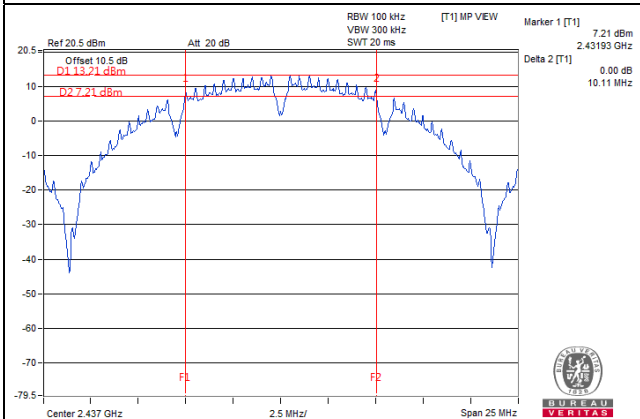


802.11g_Chain 0 / CH 6

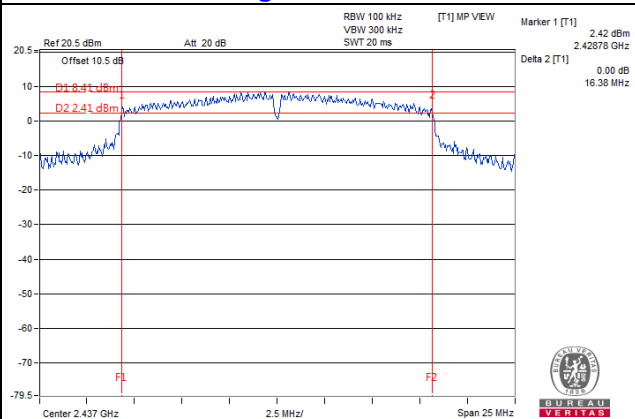

802.11n (20MHz)_Chain 1 / CH 1

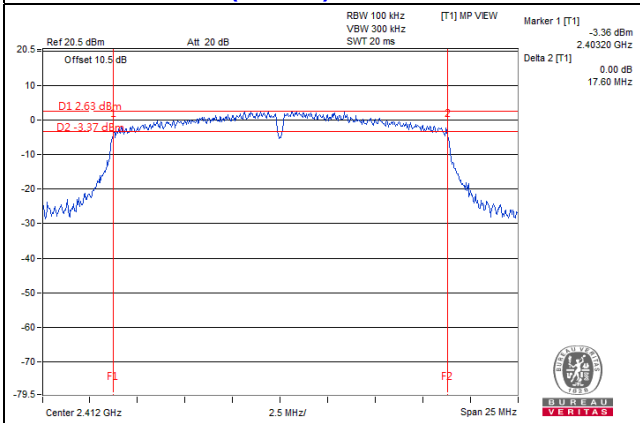

802.11n (40MHz)_Chain 0 / CH 9

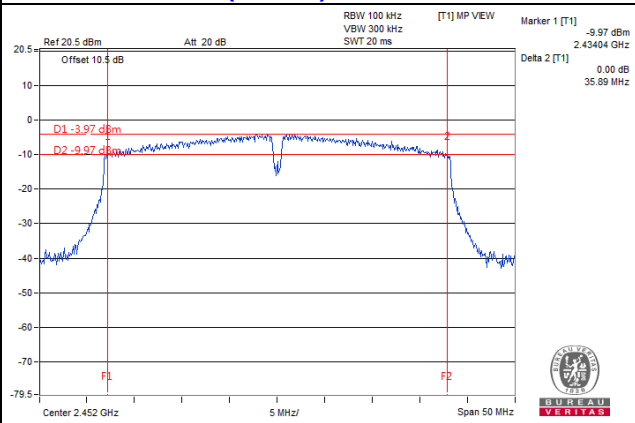

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	21.22	20.41	242.335	23.84	30	Pass
2	2417	21.70	21.87	301.726	24.80	30	Pass
6	2437	24.74	24.35	570.122	27.56	30	Pass
10	2457	21.73	21.88	303.106	24.82	30	Pass
11	2462	20.75	20.18	223.082	23.48	30	Pass

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	17.38	16.90	103.680	20.16	30	Pass
2	2417	18.32	18.12	132.783	21.23	30	Pass
6	2437	21.23	21.17	263.657	24.21	30	Pass
10	2457	19.55	19.48	178.873	22.53	30	Pass
11	2462	17.41	17.33	109.156	20.38	30	Pass

802.11n (20MHz)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	16.81	16.52	92.848	19.68	30	Pass
2	2417	17.42	17.30	108.911	20.37	30	Pass
6	2437	22.34	21.73	320.332	25.06	30	Pass
10	2457	17.39	17.31	108.655	20.36	30	Pass
11	2462	15.16	15.06	64.873	18.12	30	Pass

802.11n (40MHz)


Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	13.14	12.68	39.141	15.93	30	Pass
4	2427	15.02	14.81	62.038	17.93	30	Pass
6	2437	17.18	17.11	103.644	20.16	30	Pass
8	2447	15.06	14.79	62.193	17.94	30	Pass
9	2452	12.64	12.58	36.478	15.62	30	Pass

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 10 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Total PSD (dBm)	Limit (dBm)	Pass /Fail
0	1	2412	-2.08	3.01	0.93	8	Pass
	6	2437	0.07	3.01	3.08	8	Pass
	11	2462	-1.57	3.01	1.44	8	Pass
1	1	2412	-1.73	3.01	1.28	8	Pass
	6	2437	-0.96	3.01	2.05	8	Pass
	11	2462	-1.19	3.01	1.82	8	Pass

NOTE: Directional gain = 5.89dBi <6dBi, so the power density limit is not reduced.

802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Total PSD (dBm)	Limit (dBm)	Pass /Fail
0	1	2412	-8.35	3.01	-5.34	8	Pass
	6	2437	-3.94	3.01	-0.93	8	Pass
	11	2462	-7.66	3.01	-4.65	8	Pass
1	1	2412	-9.33	3.01	-6.32	8	Pass
	6	2437	-3.70	3.01	-0.69	8	Pass
	11	2462	-7.98	3.01	-4.97	8	Pass

NOTE: Directional gain = 5.89dBi <6dBi, so the power density limit is not reduced.

802.11n (20MHz)


TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Total PSD (dBm)	Limit (dBm)	Pass /Fail
0	1	2412	-8.92	3.01	-5.91	8	Pass
	6	2437	-4.47	3.01	-1.46	8	Pass
	11	2462	-9.69	3.01	-6.68	8	Pass
1	1	2412	-8.78	3.01	-5.77	8	Pass
	6	2437	-4.03	3.01	-1.02	8	Pass
	11	2462	-9.76	3.01	-6.75	8	Pass

NOTE: Directional gain = 5.89dBi <6dBi, so the power density limit is not reduced.

802.11n (40MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Total PSD (dBm)	Limit (dBm)	Pass /Fail
0	3	2422	-14.65	3.01	-11.64	8	Pass
	6	2437	-11.06	3.01	-8.05	8	Pass
	9	2452	-15.33	3.01	-12.32	8	Pass
1	3	2422	-14.80	3.01	-11.79	8	Pass
	6	2437	-10.78	3.01	-7.77	8	Pass
	9	2452	-15.73	3.01	-12.72	8	Pass

NOTE: Directional gain = 5.89dBi <6dBi, so the power density limit is not reduced.

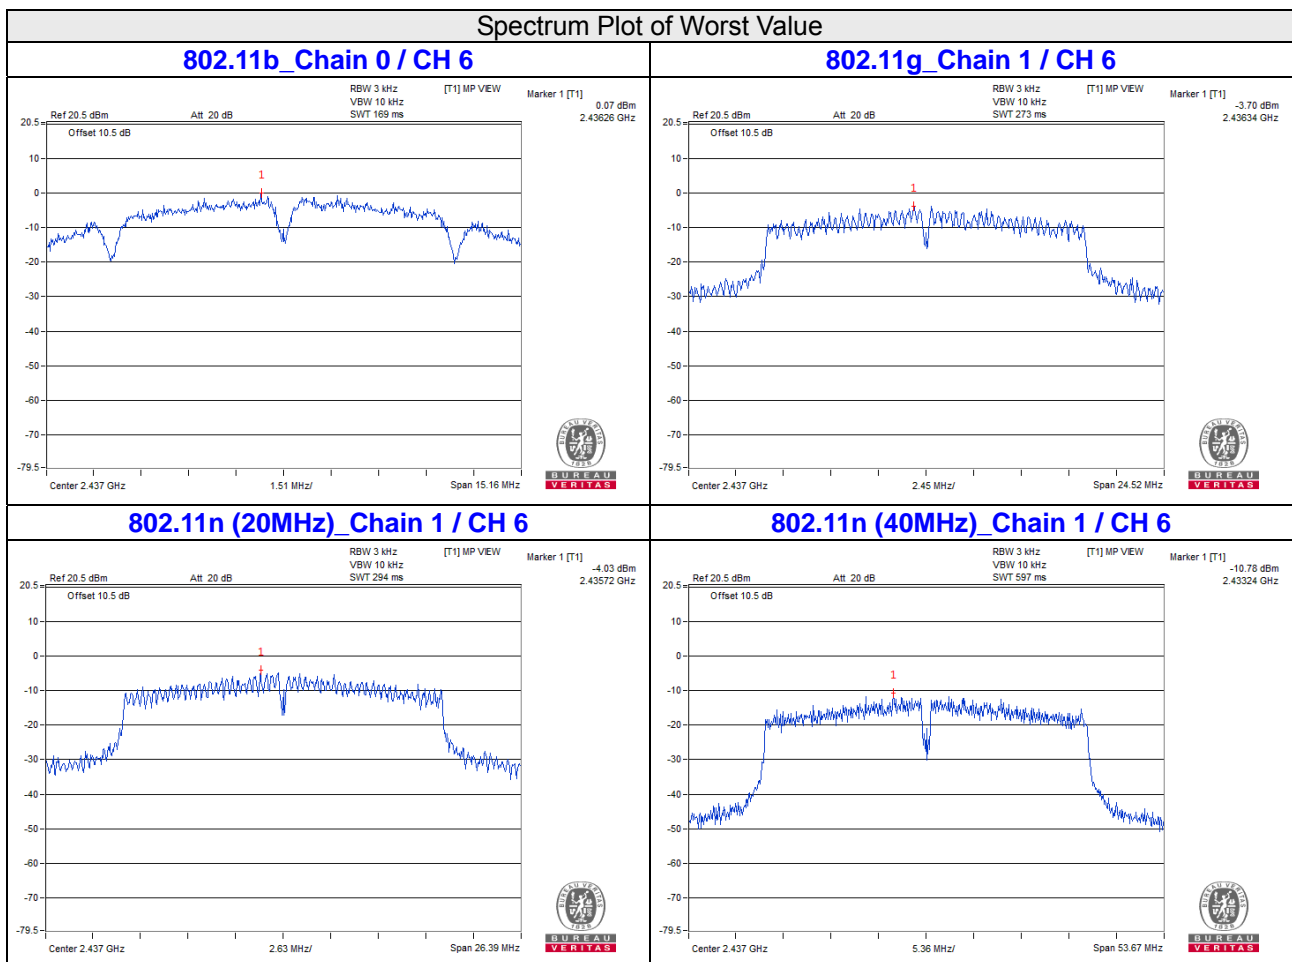


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition



Same as Item 4.3.6

4.6.7 Test Results



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b: Chain 0



CH 1

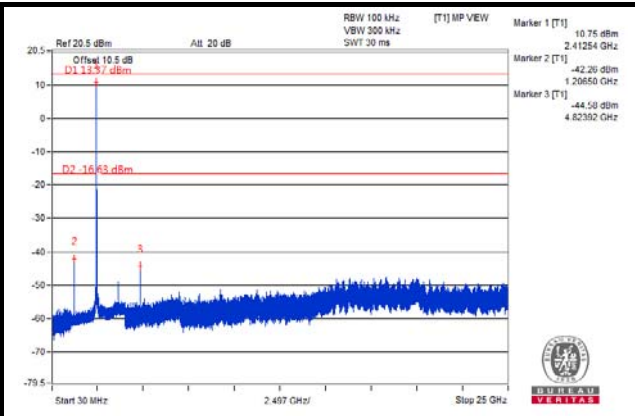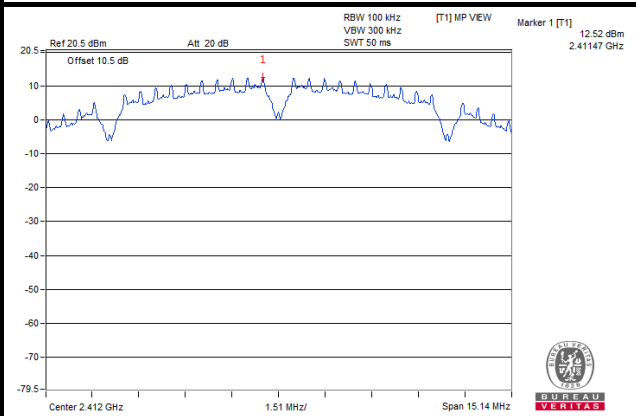


CH 6

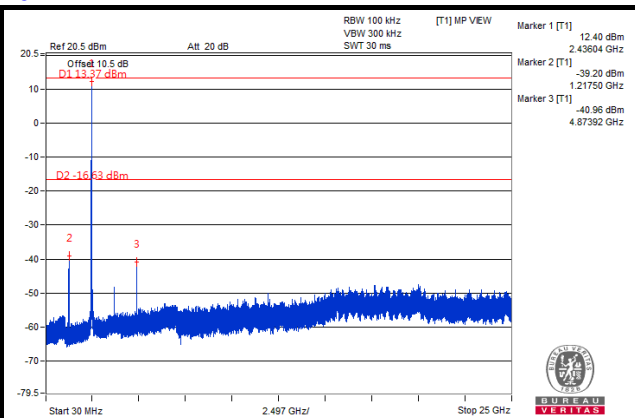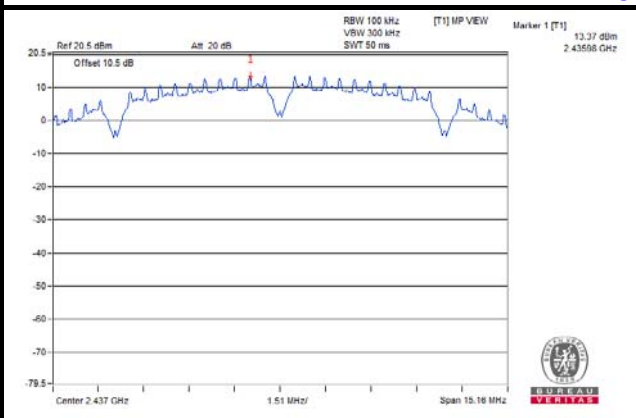


CH 11

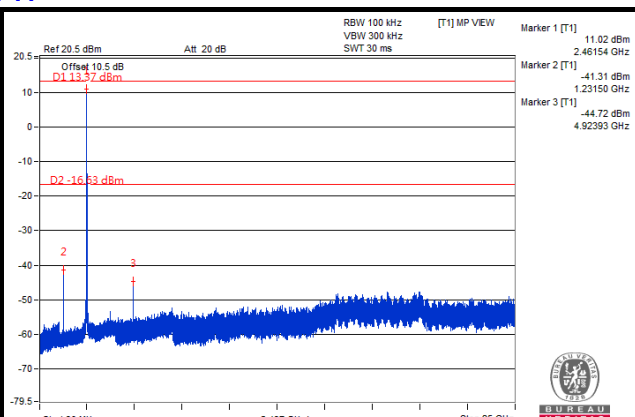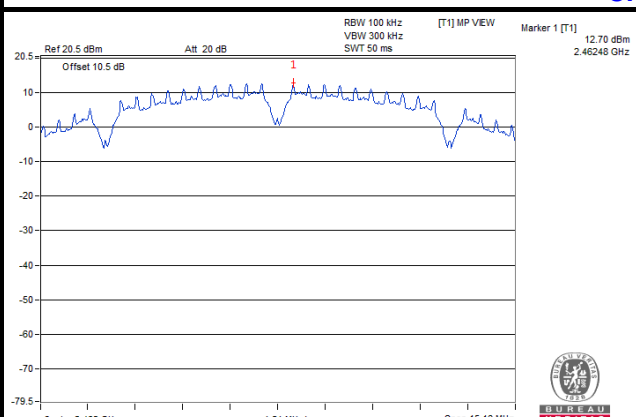

CH 1 Band edge


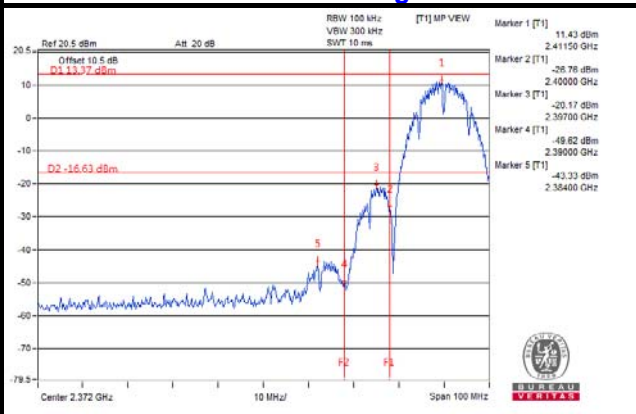


CH 11 Band edge


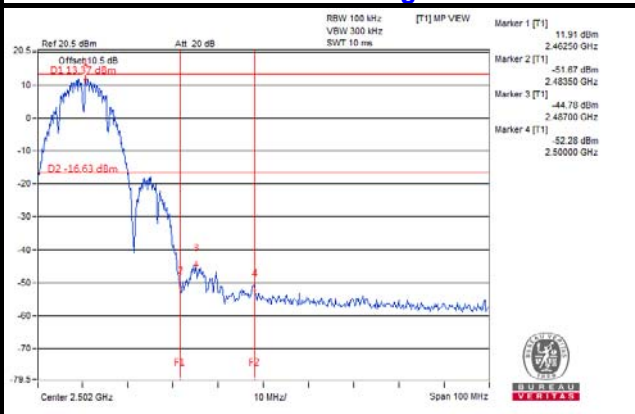


Chain 1



CH 1

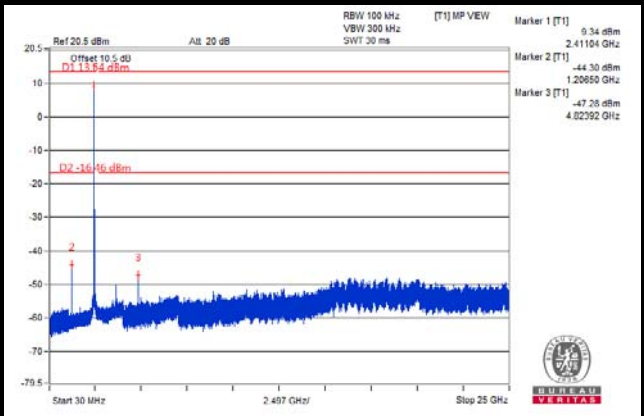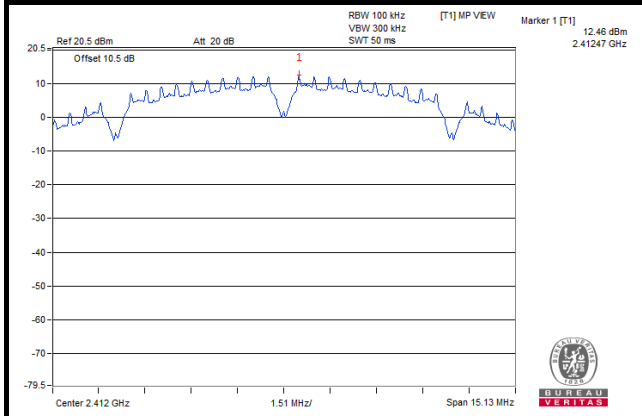


CH 6

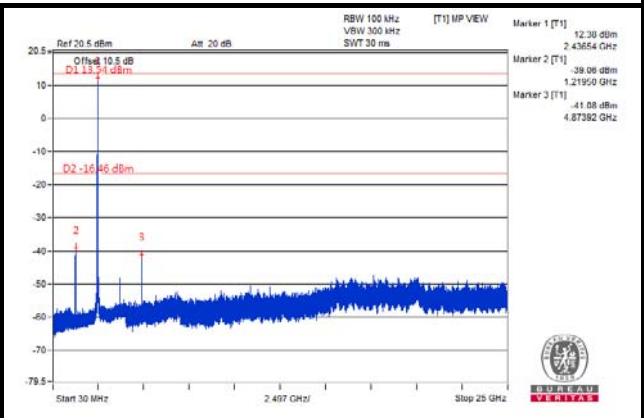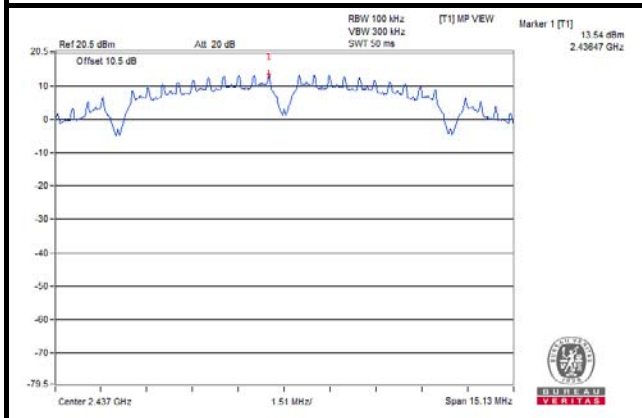


CH 11

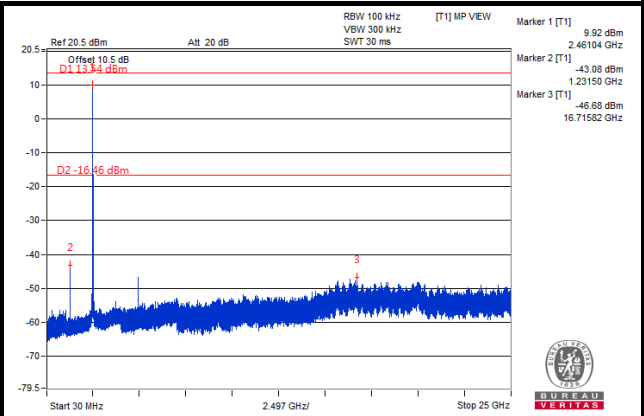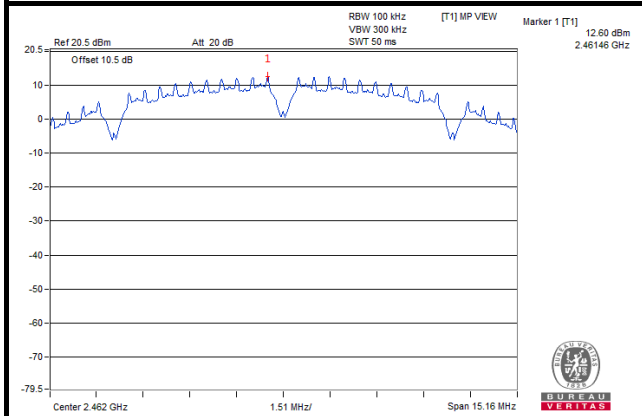

CH 1 Band edge


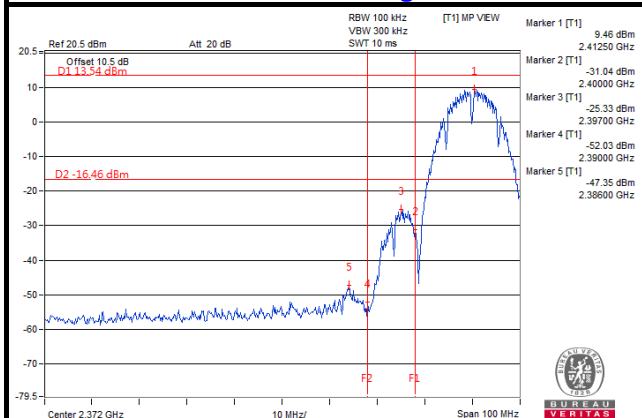


CH 11 Band edge


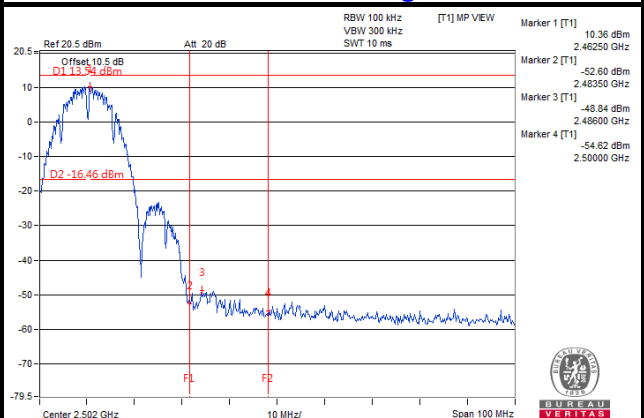


802.11g: Chain 0



CH 1

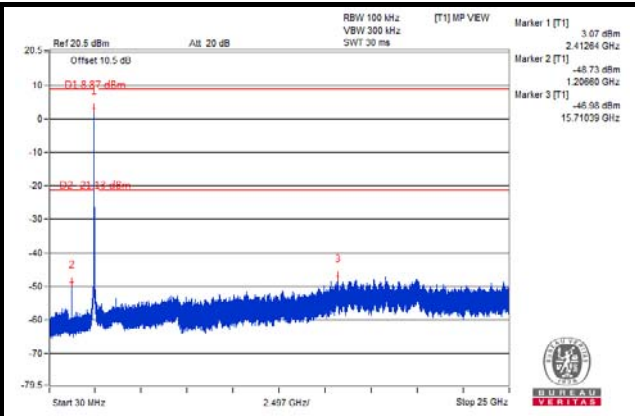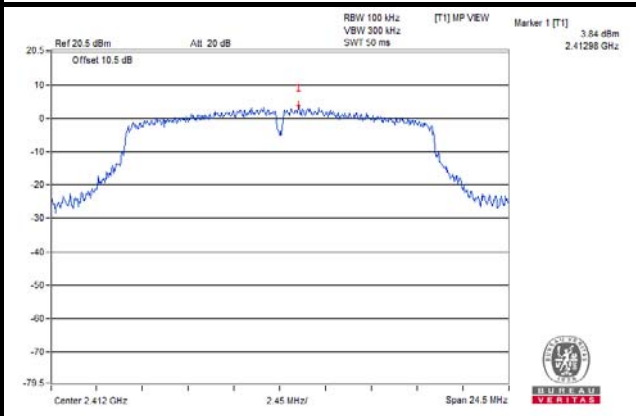


CH 6

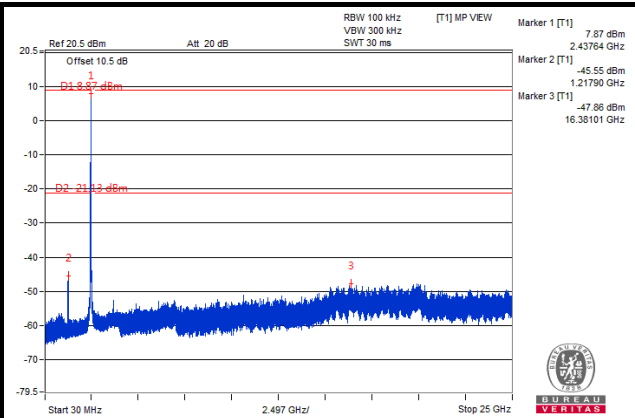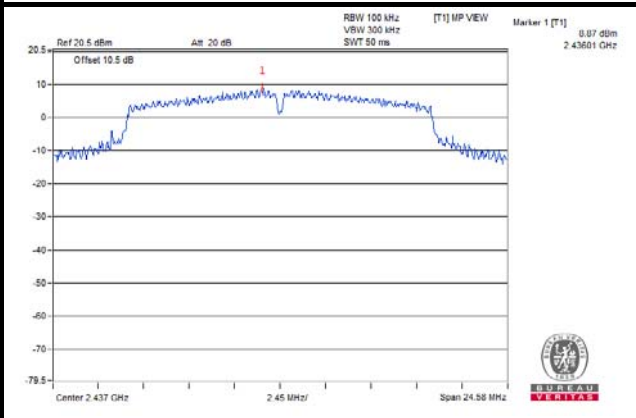


CH 11

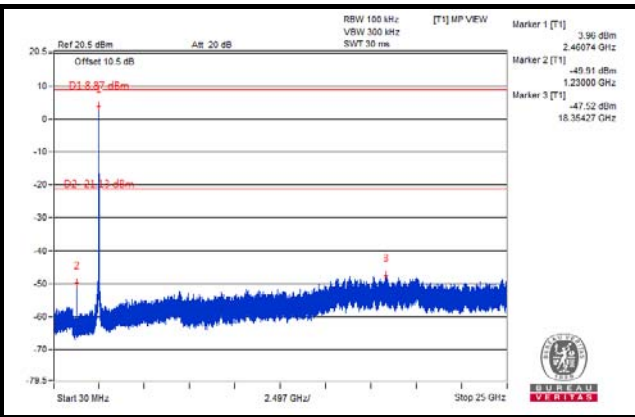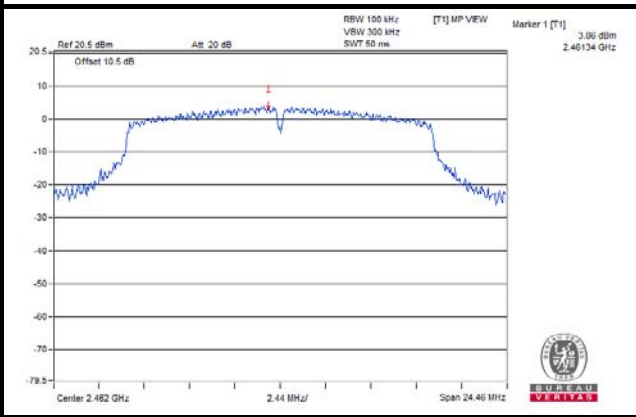

CH 1 Band edge


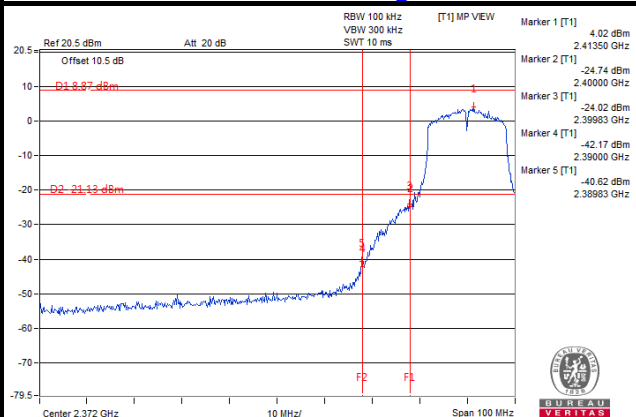


CH 11 Band edge


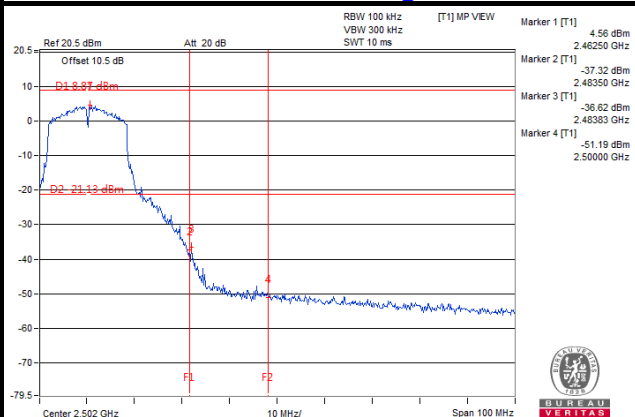


Chain 1



CH 1

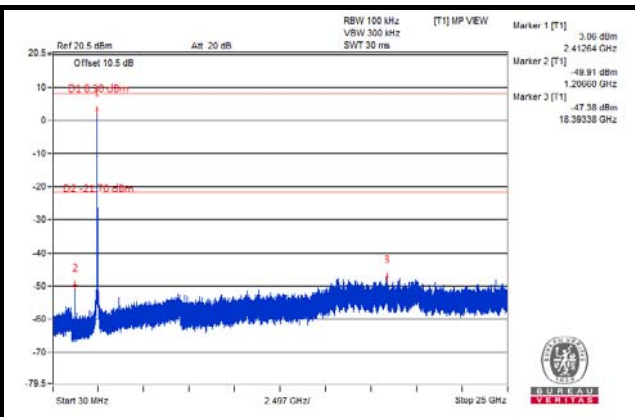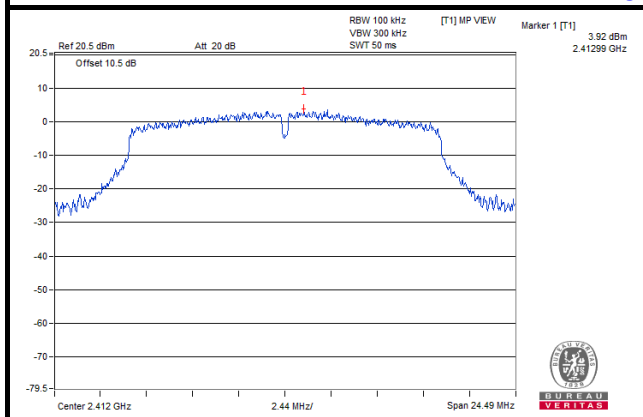


CH 6

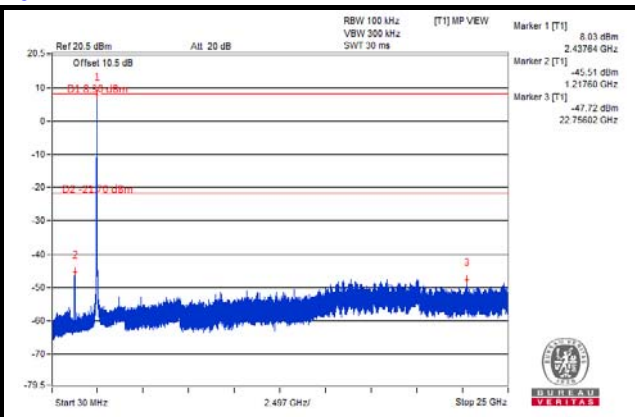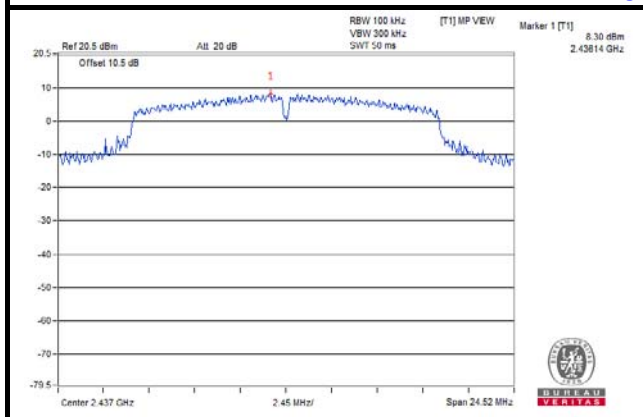


CH 11

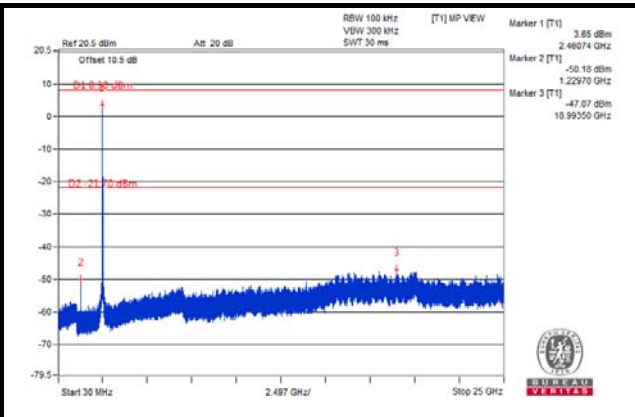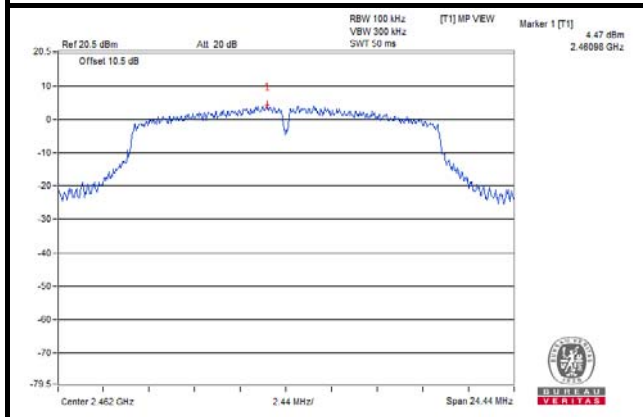

CH 1 Band edge


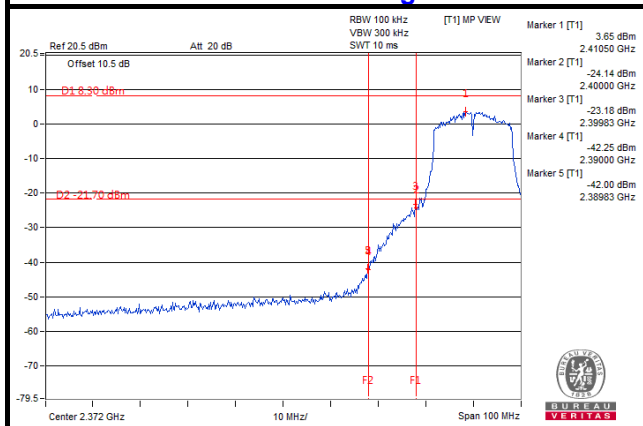


CH 11 Band edge


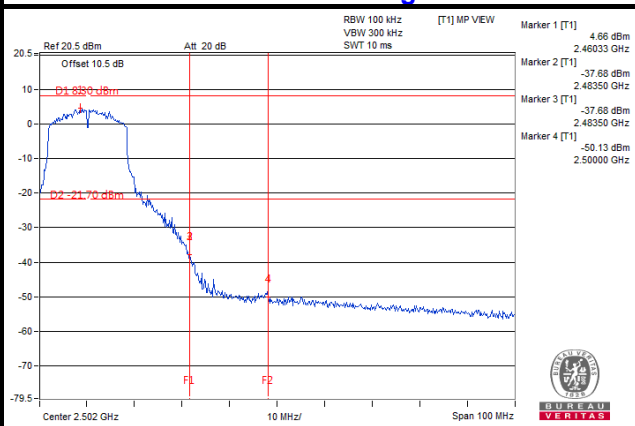


802.11n (20MHz): Chain 0



CH 1

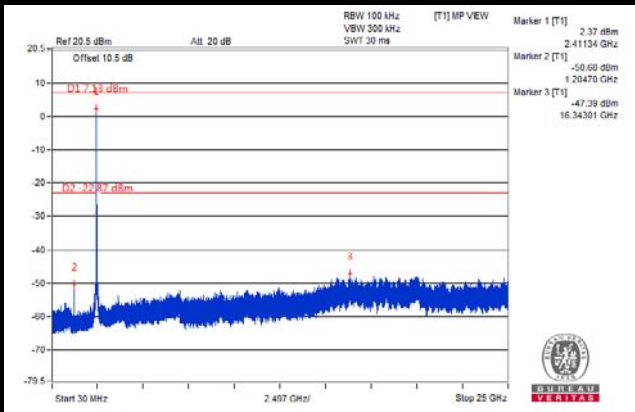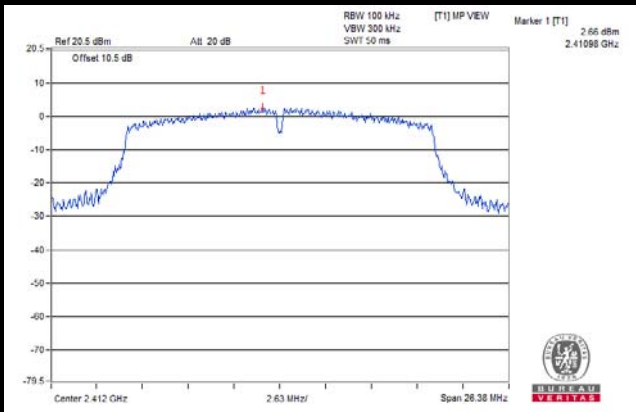


CH 6

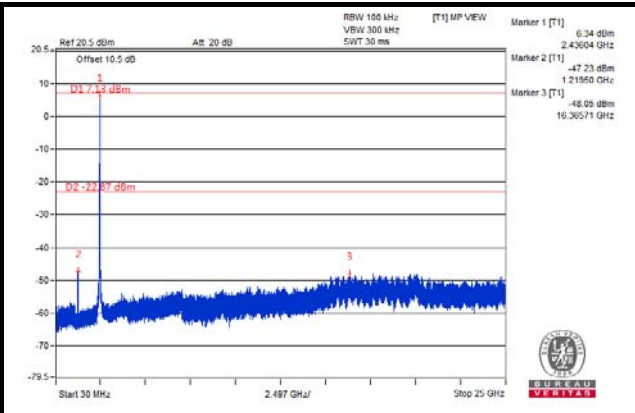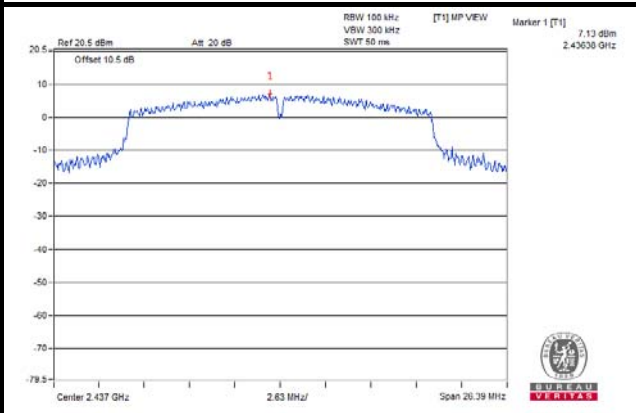


CH 11

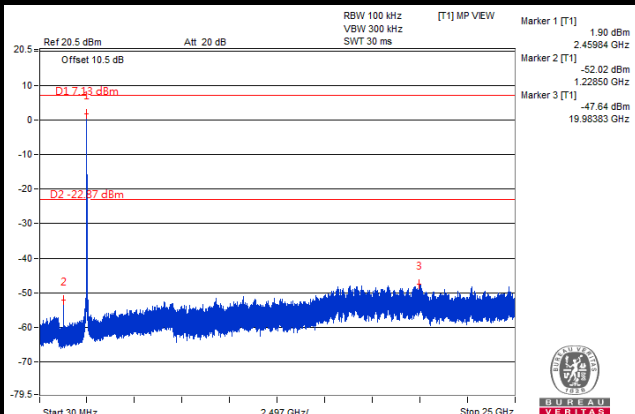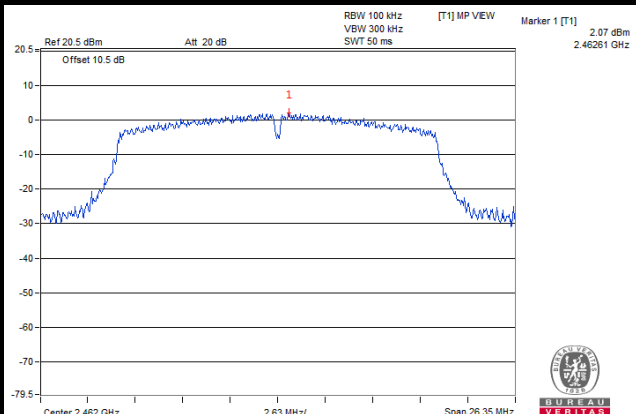

CH 1 Band edge


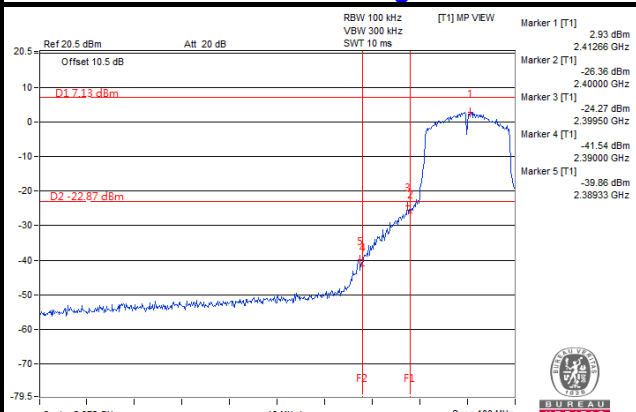


CH 11 Band edge


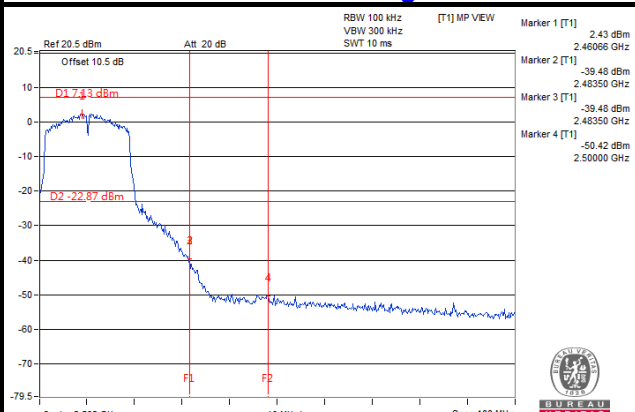


Chain 1



CH 1

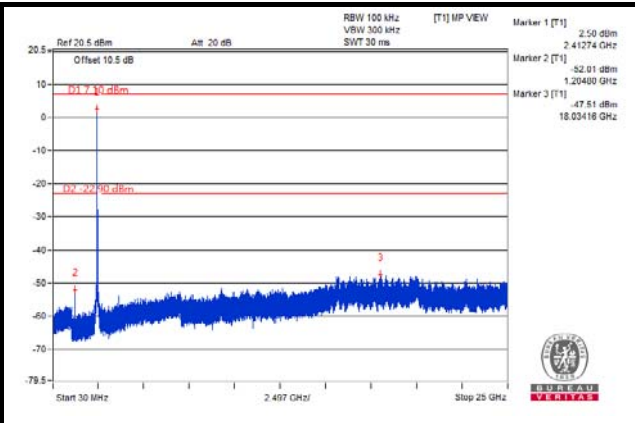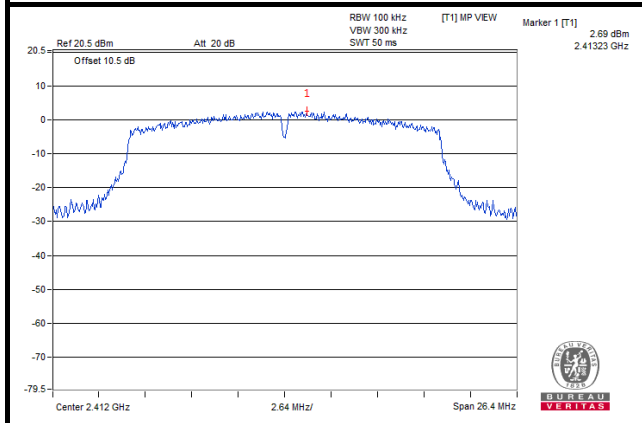


CH 6

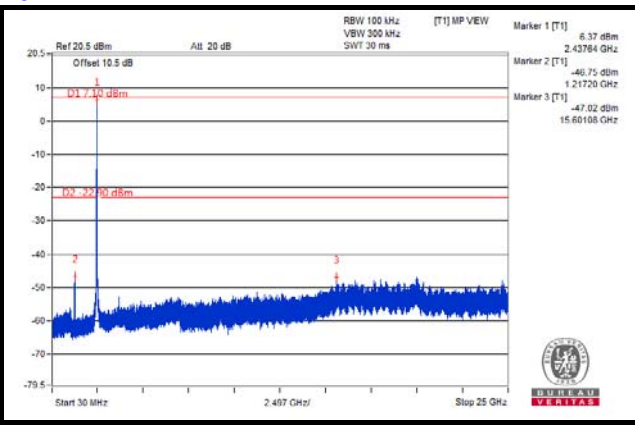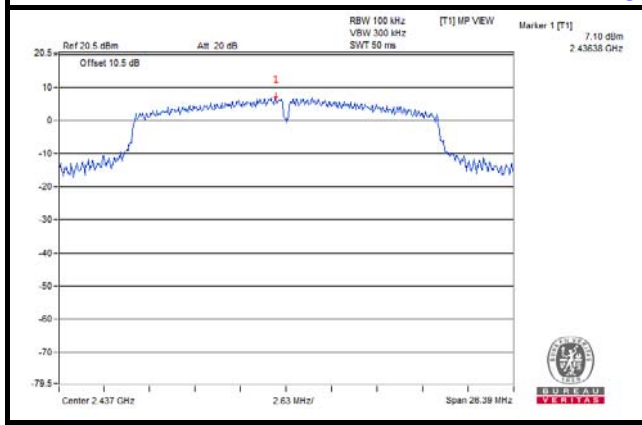


CH 11

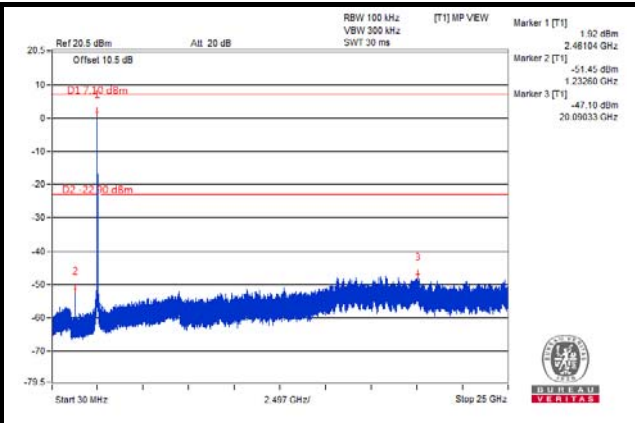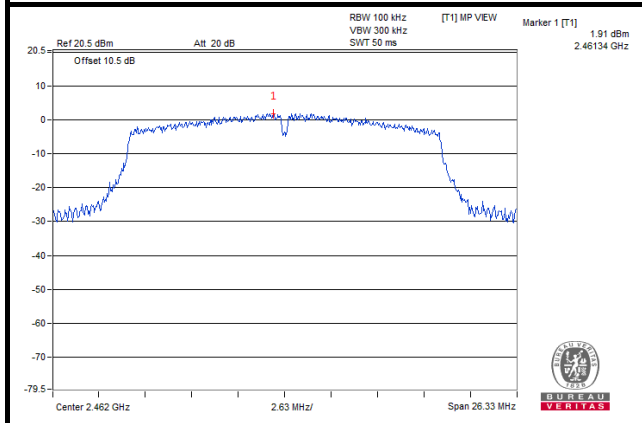

CH 1 Band edge


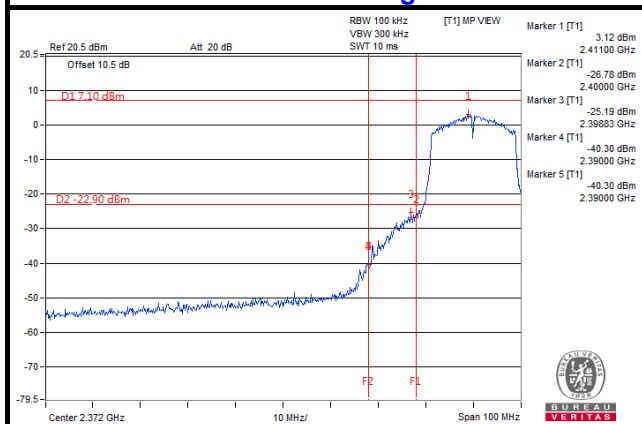


CH 11 Band edge


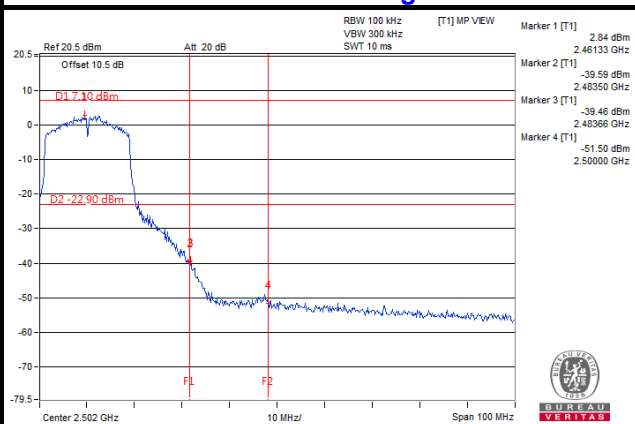


802.11n (40MHz): Chain 0



CH 3

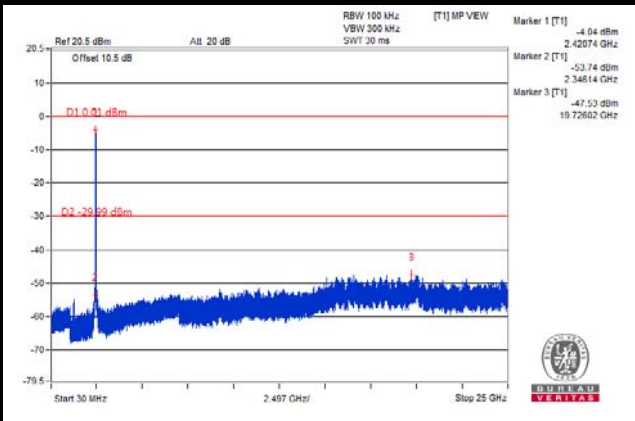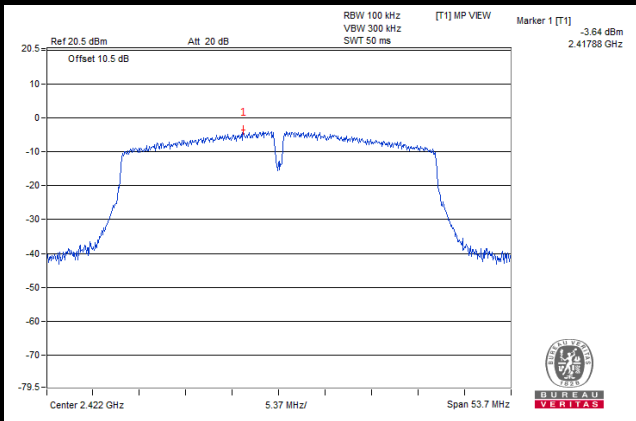


CH 6

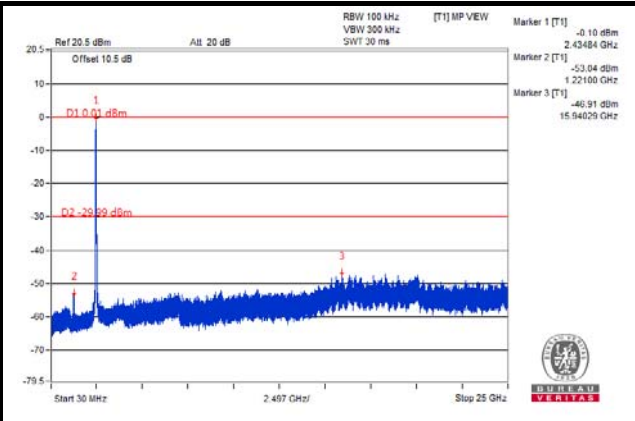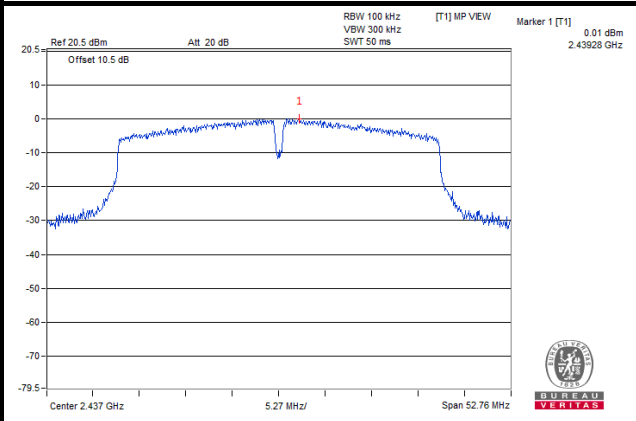


CH 9

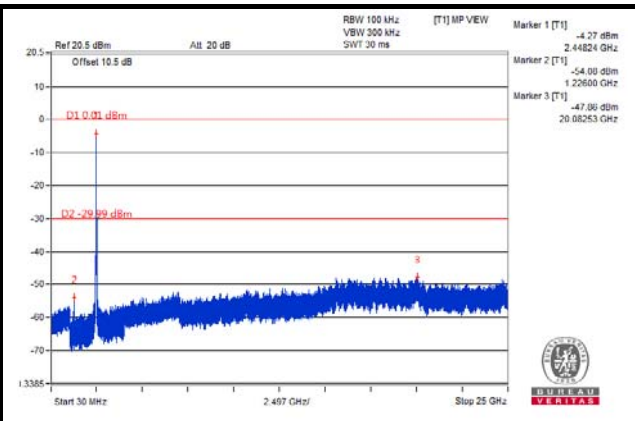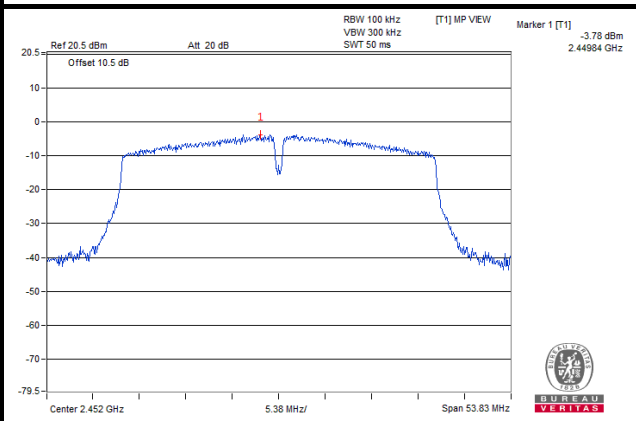

CH 3 Band edge


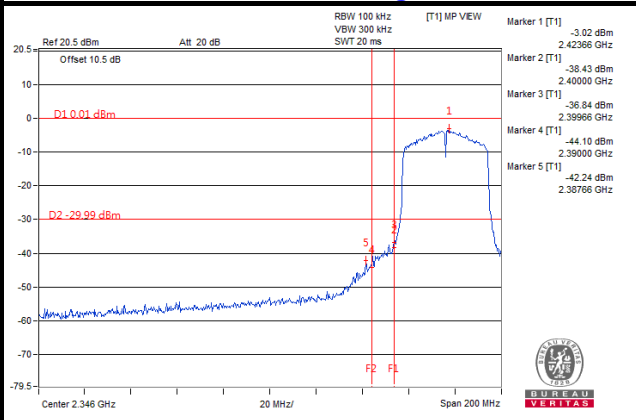


CH 9 Band edge


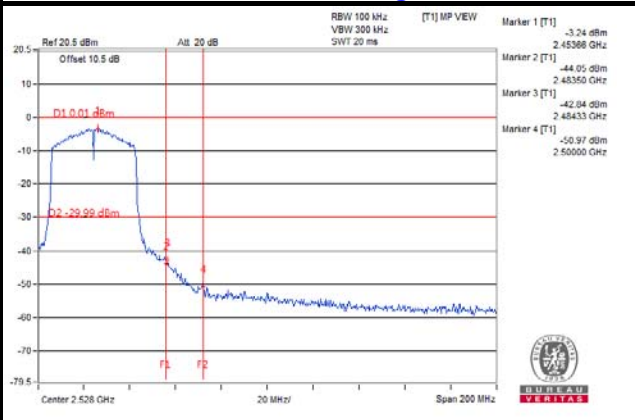


Chain 1



CH 3

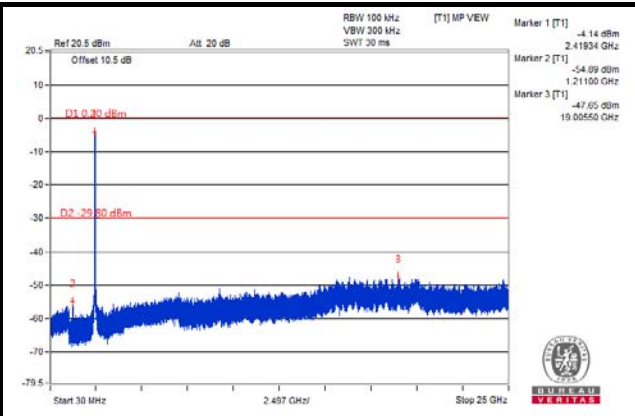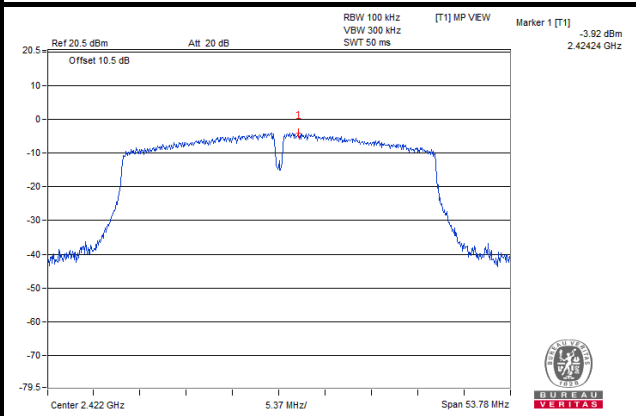


CH 6

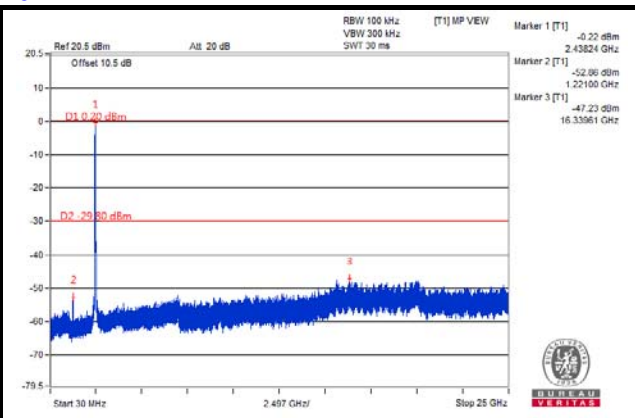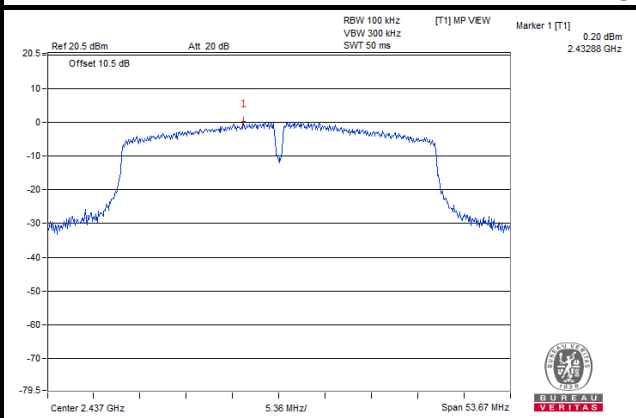


CH 9

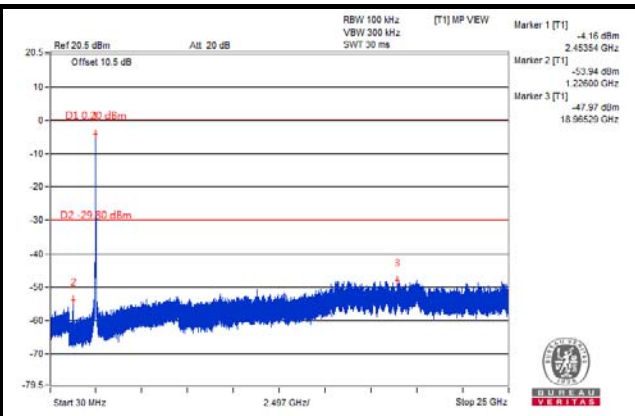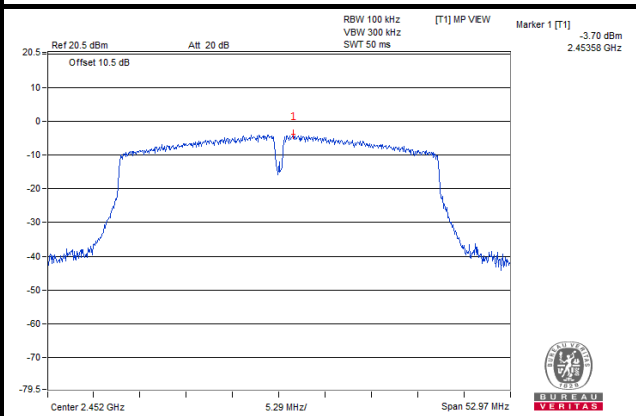

CH 3 Band edge

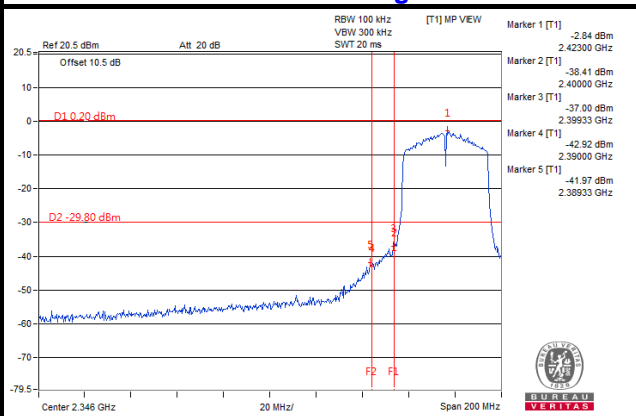


CH 9 Band edge

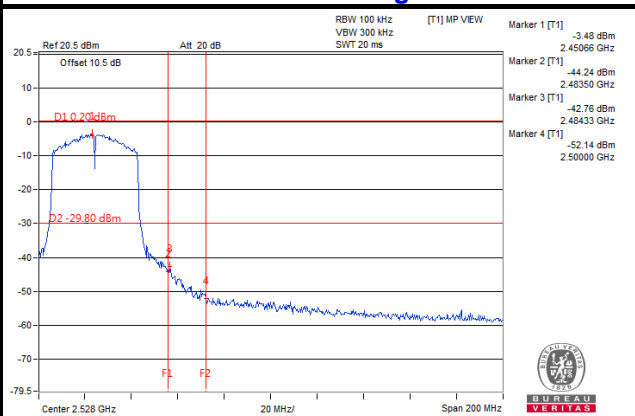


Additional test Chain 0


802.11b CH 2 Band edge

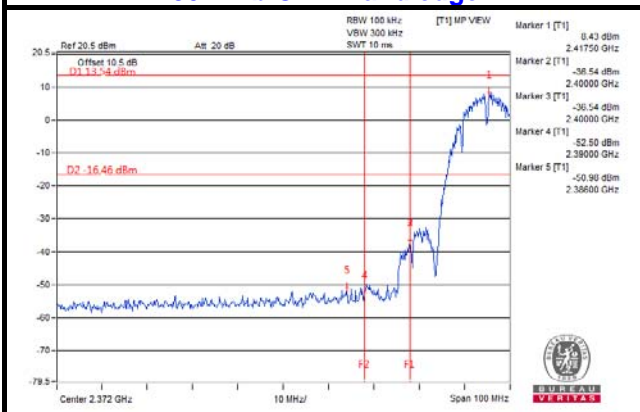


802.11b CH 10 Band edge

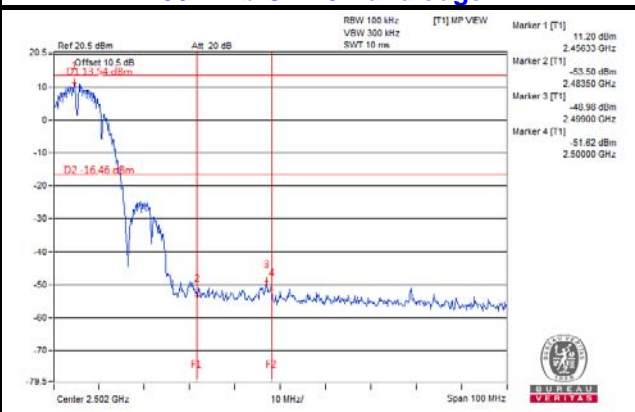


802.11g CH 2 Band edge

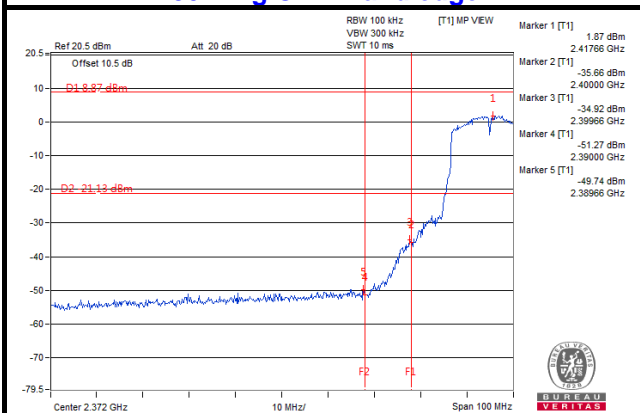


802.11g CH 10 Band edge

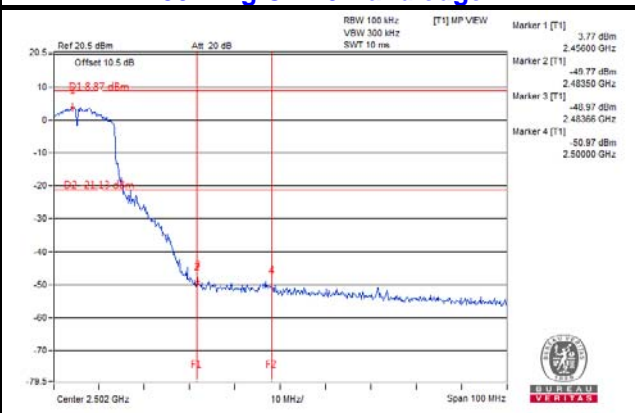


802.11n (20MHz) CH 2 Band edge

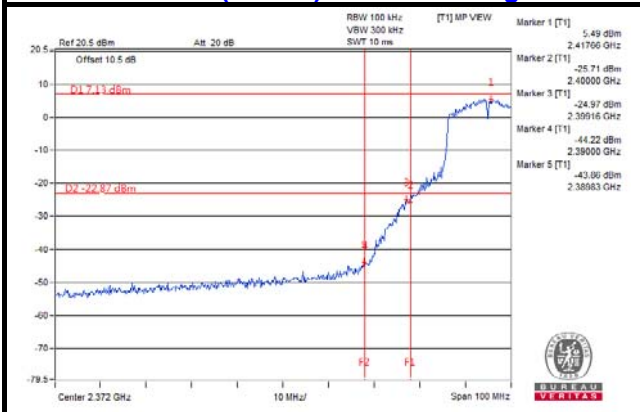


802.11n (20MHz) CH 10 Band edge

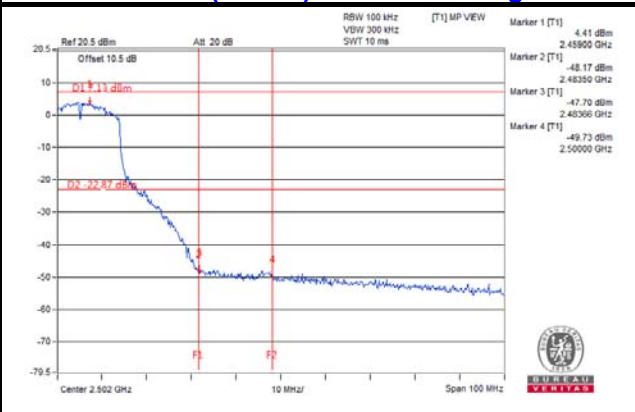

802.11n (40MHz) CH 4 Band edge

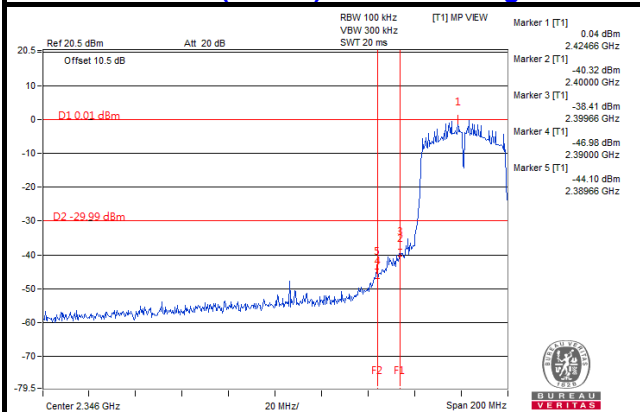


802.11n (40MHz) CH 8 Band edge

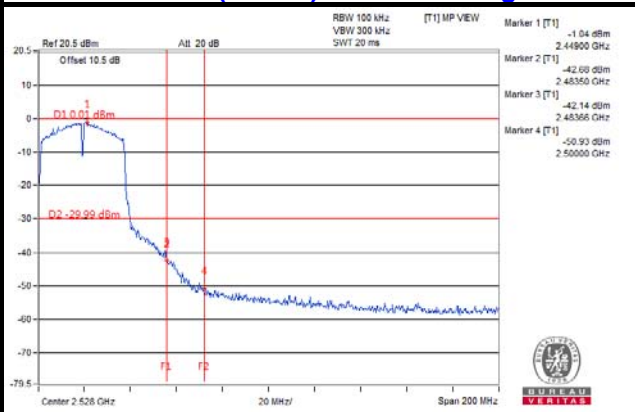


Additional test Chain 1


802.11b CH 2 Band edge

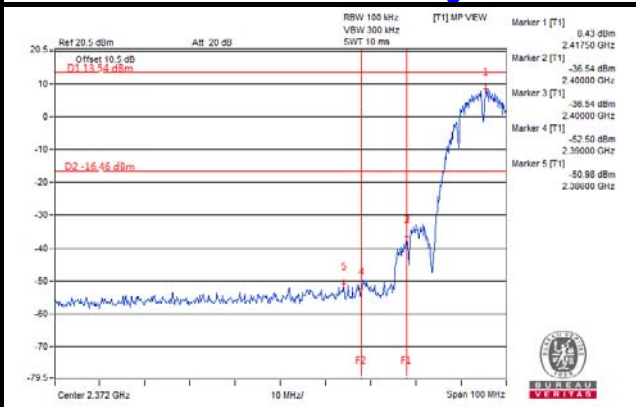


802.11b CH 10 Band edge

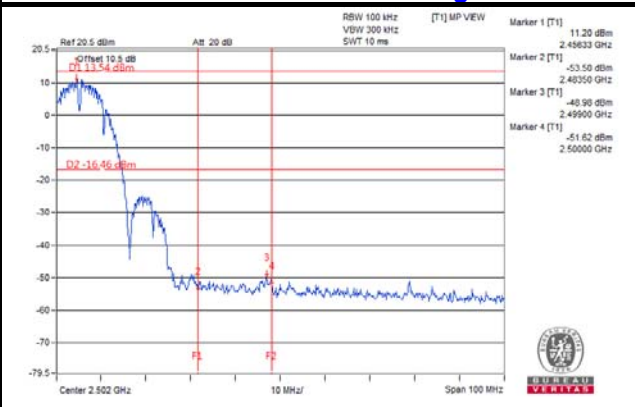


802.11g CH 2 Band edge

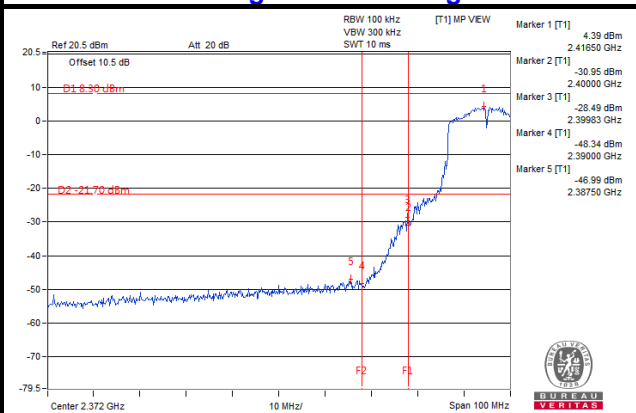


802.11g CH 10 Band edge

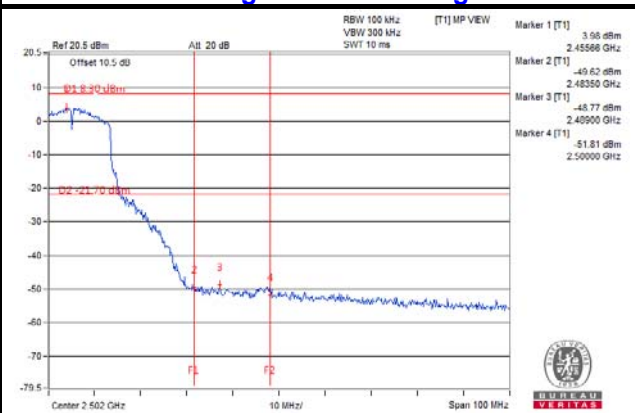


802.11n (20MHz) CH 2 Band edge

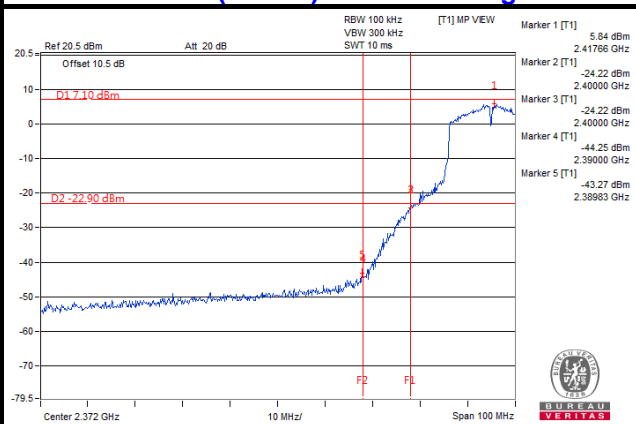


802.11n (20MHz) CH 10 Band edge

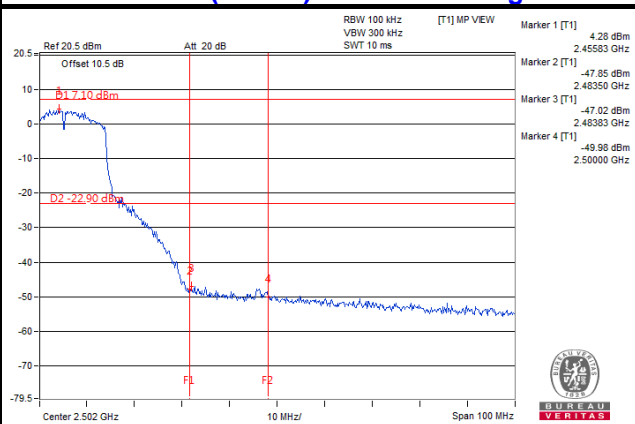

802.11n (40MHz) CH 4 Band edge

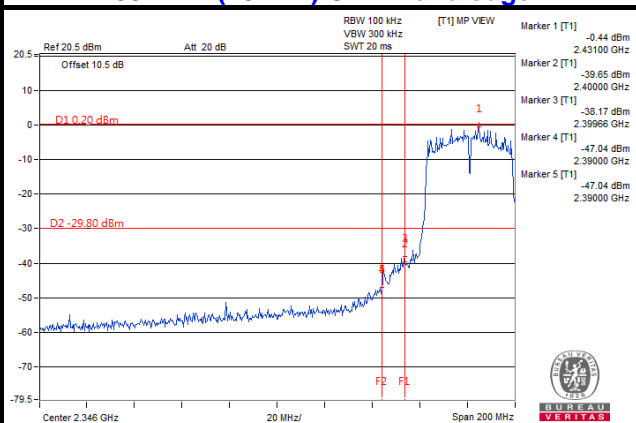

802.11n (40MHz) CH 8 Band edge

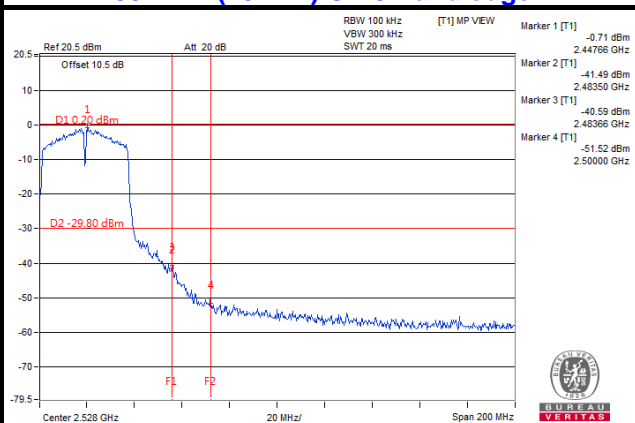

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---