

## FCC Test Report

**Report No.:** RF181026C02

**FCC ID:** PY318300419

**Test Model:** RBS50v2

**Received Date:** Aug. 08, 2018

**Test Date:** Sep. 05 ~ Oct. 27, 2018

**Issued Date:** Oct. 30, 2018

**Applicant:** NETGEAR, INC.

**Address:** 350 East Plumeria Drive San Jose, CA 95134

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Duty Cycle of Test Signal.....	12
3.4 Description of Support Units.....	14
3.4.1 Configuration of System under Test.....	14
3.5 General Description of Applied Standards.....	14
<b>4 Test Types and Results</b> .....	<b>15</b>
4.1 Radiated Emission and Bandedge Measurement.....	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	15
4.1.2 Test Instruments.....	16
4.1.3 Test Procedures.....	17
4.1.4 Deviation from Test Standard.....	17
4.1.5 Test Set Up.....	18
4.1.6 EUT Operating Conditions.....	19
4.1.7 Test Results.....	20
4.2 Conducted Emission Measurement.....	36
4.2.1 Limits of Conducted Emission Measurement.....	36
4.2.2 Test Instruments.....	36
4.2.3 Test Procedures.....	37
4.2.4 Deviation from Test Standard.....	37
4.2.5 Test Setup.....	37
4.2.6 EUT Operating Conditions.....	37
4.2.7 Test Results.....	38
4.3 6dB Bandwidth Measurement.....	42
4.3.1 Limits of 6dB Bandwidth Measurement.....	42
4.3.2 Test Setup.....	42
4.3.3 Test Instruments.....	42
4.3.4 Test Procedure.....	42
4.3.5 Deviation from Test Standard.....	42
4.3.6 EUT Operating Conditions.....	42
4.3.7 Test Result.....	43
4.4 Conducted Output Power Measurement.....	46
4.4.1 Limits of Conducted Output Power Measurement.....	46
4.4.2 Test Setup.....	46
4.4.3 Test Instruments.....	46
4.4.4 Test Procedures.....	46
4.4.5 Deviation from Test Standard.....	46
4.4.6 EUT Operating Conditions.....	46
4.4.7 Test Results.....	47
4.5 Power Spectral Density Measurement.....	49
4.5.1 Limits of Power Spectral Density Measurement.....	49
4.5.2 Test Setup.....	49
4.5.3 Test Instruments.....	49
4.5.4 Test Procedure.....	49
4.5.5 Deviation from Test Standard.....	49

4.5.6 EUT Operating Condition .....	49
4.5.7 Test Results .....	50
4.6 Conducted Out of Band Emission Measurement.....	55
4.6.1 Limits of Conducted Out of Band Emission Measurement .....	55
4.6.2 Test Setup.....	55
4.6.3 Test Instruments .....	55
4.6.4 Test Procedure .....	55
4.6.5 Deviation from Test Standard .....	55
4.6.6 EUT Operating Condition .....	55
4.6.7 Test Results .....	55
<b>5 Pictures of Test Arrangements.....</b>	<b>68</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>69</b>

### Release Control Record

Issue No.	Description	Date Issued
RF181026C02	Original release.	Oct. 30, 2018

## 1 Certificate of Conformity

**Product:** Orbi Satellite

**Brand:** NETGEAR

**Test Model:** RBS50v2

**Sample Status:** Engineering sample

**Applicant:** NETGEAR, INC.

**Test Date:** Sep. 05 ~ Oct. 27, 2018

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** Pettie Chen, **Date:** Oct. 30, 2018  
Pettie Chen / Senior Specialist

**Approved by :** Bruce Chen, **Date:** Oct. 30, 2018  
Bruce Chen / Project Engineer

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -13.31dB at 0.15391MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2483.50, 4924.00MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is I-PEX not a standard connector.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.44 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.59 dB
	200MHz ~ 1000MHz	3.60 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	Orbi Satellite
Brand	NETGEAR
Test Model	RBS50v2
Sample Status	Engineering sample
Power Supply Rating	12Vdc from adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 400Mbps
Operating Frequency	2412 ~ 2462MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
Output Power	CDD Mode: 860.364mW Beamforming NSS1 Mode: 843.503mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter
Cable Supplied	NA

Note:

1. The model is listed as below.

Brand	Model	Product Name	FCC ID	RF Module	Difference
NETGEAR	RBS50v2	Orbi Satellite	PY318300419	Module 1	software firmware: RBS50_V2.2.5.4 Master and Client mode for 5.50-5.70GHz band
				Module 2	

Note:  
 All of the RF specifications (include antenna type and location) are identical except the differences stated.  
 RF Module 1 support WLAN 2.4GHz band, 5.18 ~ 5.24GHz and 5.26 ~ 5.32GHz band functionally.  
 RF Module 2 WLAN 5.50 ~ 5.70GHz and 5.745 ~ 5.825GHz band functionally.

2. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Band	Modulation Mode	Beamforming Mode	TX Function
2.4GHz	802.11b	Not Support	2TX
	802.11g	Not Support	2TX
	802.11n (HT20)	Support (CDD / NSS1)	2TX
	802.11n (HT40)	Support (CDD / NSS1)	2TX

\* For 802.11n, CDD mode is the worst case for final radiated emission and power line conducted emission tests after pretesting CDD mode and beamforming mode.

3. The following antenna was provided to the EUT.

Ant. Type	Dipole					
Connecter Type	I-PEX (WLAN)					
Directional Antenna Gain (dBi)						
Item	2.4G	5G Band 1	5G Band 2	5G Band 3	5G Band 4	
					Nss1	Nss2
-	2.61	4.18	4.18	7.43	7.43	4.86

4. The EUT uses following adapters.

Adapter 1	
Brand	NETGEAR
Model	2ABL030F1 NJ
PN	332-10948-01
Input Power	100-240Vac, 50/60Hz 1.0A
Output Power	12Vdc, 2.5A
Power Line	1.8m power cable without core attached on adapter

Adapter 2	
Brand	NETGEAR
Model	AD2067F10
PN	332-10944-01
Input Power	100-240Vac, 50/60Hz 1.0A
Output Power	12Vdc, 2.5A
Power Line	1.80m power cable without core attached on adapter

5. Spurious emission of the simultaneous operation (2.4GHz and 5GHz) has been evaluated and no non-compliance was found.

### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE $\geq$ 1G	RE $<$ 1G	PLC	APCM	
A	√	√	√	√	EUT power from adapter 1
B	-	√	√	-	EUT power from adapter 2

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement  
 RE $<$ 1G: Radiated Emission below 1GHz  
 PLC: Power Line Conducted Emission  
 APCM: Antenna Port Conducted Measurement

Note:

- The EUT was positioned on the Z-plane during testing.
- "-" means no effect.

#### Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Date Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

#### Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Date Rate (Mbps)
A, B	802.11g	1 to 11	6	OFDM	BPSK	6.0

#### Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Date Rate (Mbps)
A, B	802.11g	1 to 11	6	OFDM	BPSK	6.0

#### Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Date Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	21 deg. C, 66% RH	120Vac, 60Hz	Rey Chen
RE $<$ 1G	25 deg. C, 70% RH	120Vac, 60Hz	Luis Lee
PLC	25 deg. C, 67% RH	120Vac, 60Hz	Jones Chang
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Ted Chang

### 3.3 Duty Cycle of Test Signal

#### CDD Mode

Duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.


Duty cycle of test signal is  $< 98\%$ , duty factor shall be considered.

802.11b: Duty cycle =  $12.374/12.524 = 0.988$

802.11g: Duty cycle =  $2.058/2.153 = 0.956$ , Duty factor =  $10 * \log(1/0.956) = 0.20$

802.11n (HT20): Duty cycle =  $4.995/5.098 = 0.980$

802.11n (HT40): Duty cycle =  $2.423/2.513 = 0.964$ , Duty factor =  $10 * \log(1/0.964) = 0.16$

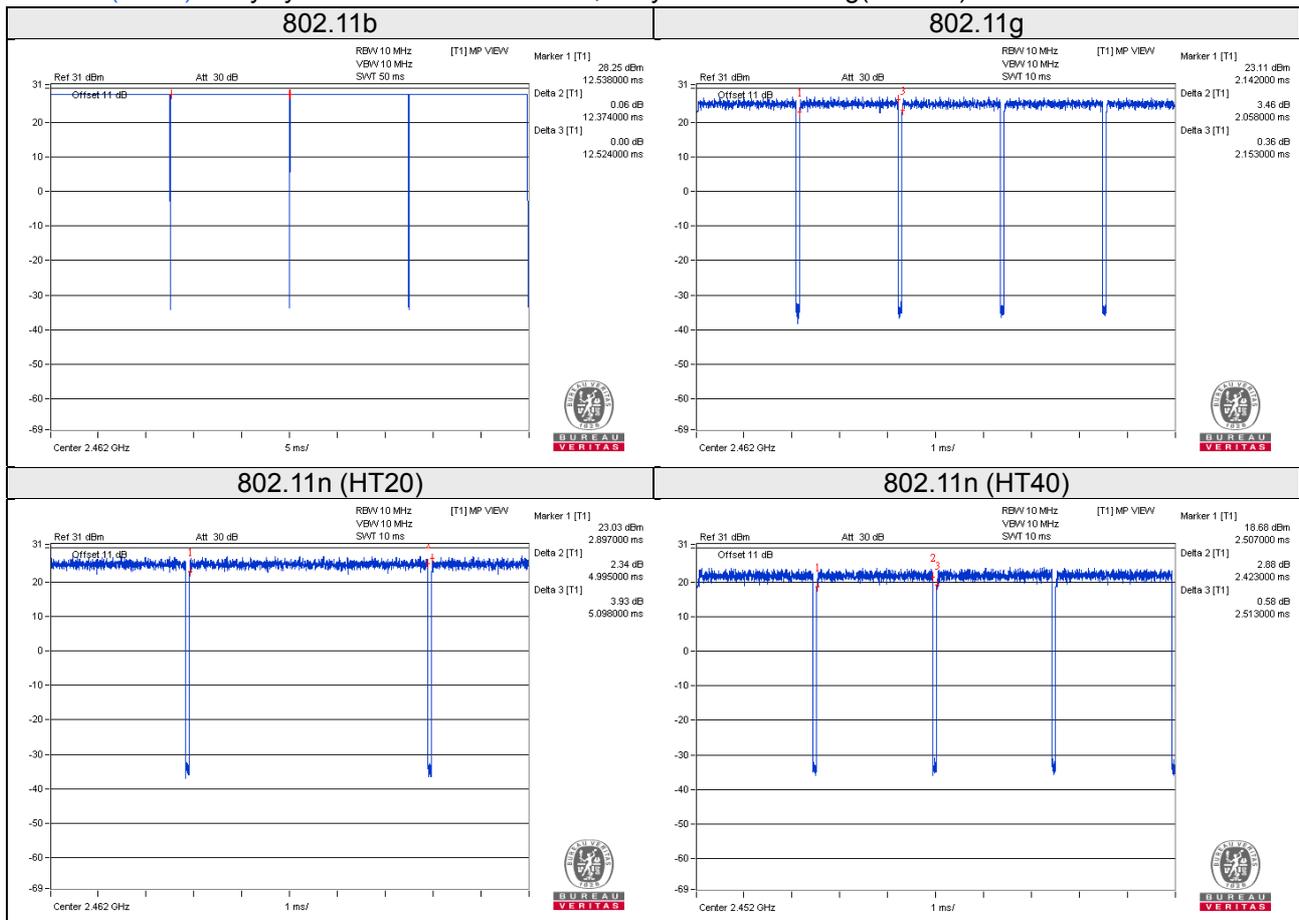


## Beamforming NSS1 Mode

Duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.

Duty cycle of test signal is  $< 98\%$ , duty factor shall be considered.

802.11n (HT20): Duty cycle =  $4.995/5.087 = 0.982$

802.11n (HT40): Duty cycle =  $2.420/2.505 = 0.966$ , Duty factor =  $10 * \log(1/0.966) = 0.15$

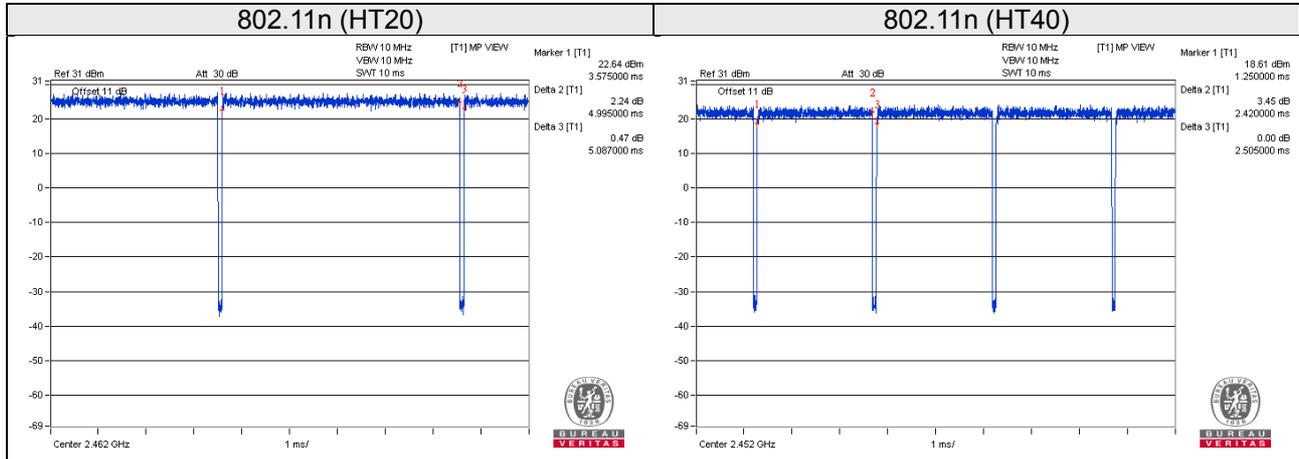

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	6RP2YM1	FCC DoC Approved	-
B.	Load	N/A	N/A	N/A	N/A	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45	3	1.8	N	0	-
2.	RJ45	1	10	N	0	-

#### 3.4.1 Configuration of System under Test

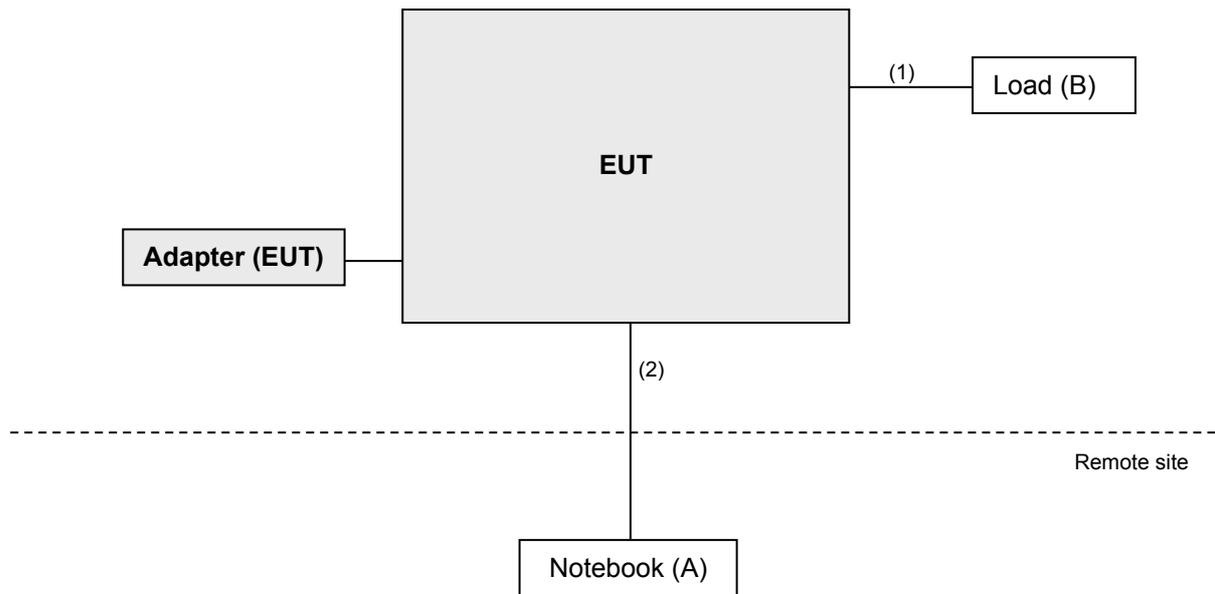

### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specification of the EUT declared by the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**  
**KDB 558074 D01 15.247 Meas Guidance v05**  
**KDB 662911 D01 Multiple Transmitter Output v02r01**  
**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	May 29, 2018	May 28, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Dec. 12, 2017	Dec. 11, 2018
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Dec. 11, 2017	Dec. 10, 2018
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Dec. 13, 2017	Dec. 12, 2018
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Dec. 01, 2017	Nov. 30, 2018
Preamplifier Agilent (Below 1GHz)	8447D	2944A10631	Aug. 08, 2018	Aug. 07, 2019
Preamplifier KEYSIGHT (Above 1GHz)	83017A	MY53270295	Jul. 02, 2018	Jul. 01, 2019
RF signal cable HUBER+SUHNER	SUCOFLEX 104	MY 13380+295012/04	Aug. 08, 2018	Aug. 07, 2019
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03 (250724)	Aug. 08, 2018	Aug. 07, 2019
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021703	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55190 004/MY55190007/MY55 210005	Jul. 17, 2018	Jul. 16, 2019

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Chamber 4.  
 3. The FCC Designation Number is TW0003. The number will be varied with the Lab location and scope as attached.  
 4. The IC Site Registration No. is IC 7450F-4.

#### 4.1.3 Test Procedures

##### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Set Up


##### For Radiated emission below 30MHz

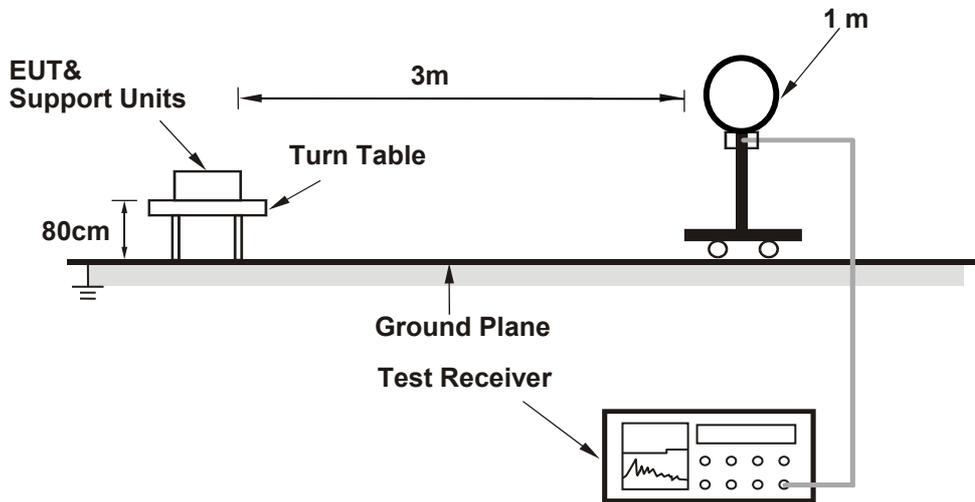

##### For Radiated emission 30MHz to 1GHz

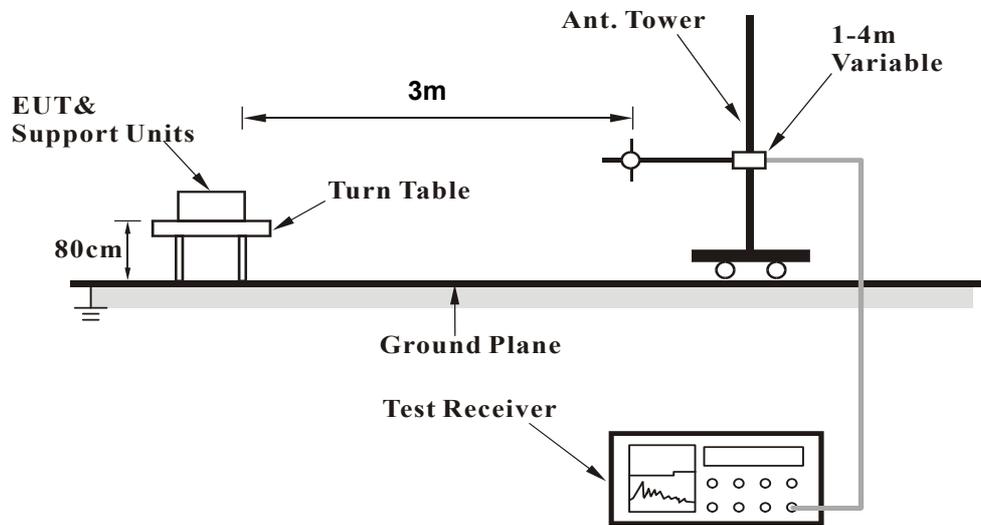

### For Radiated emission above 1GHz

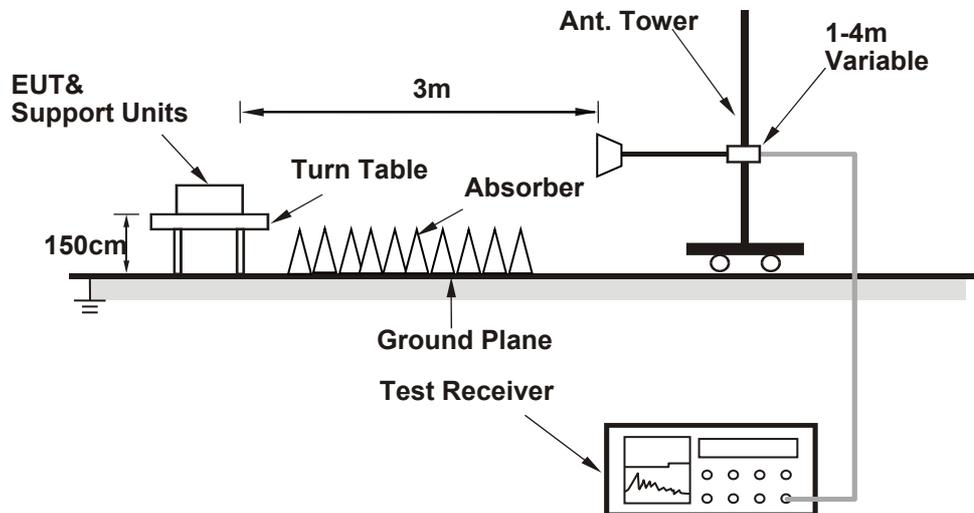

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".
- The necessary accessories enable the system in full functions.

#### 4.1.7 Test Results

Above 1GHz Worst-Case Data :

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.4 PK	74.0	-15.6	2.34 H	124	61.1	-2.7
2	2390.00	47.0 AV	54.0	-7.0	2.34 H	124	49.7	-2.7
3	*2412.00	108.1 PK			2.34 H	124	110.8	-2.7
4	*2412.00	103.2 AV			2.34 H	124	105.9	-2.7
5	4824.00	55.9 PK	74.0	-18.1	1.69 H	360	54.3	1.6
6	4824.00	46.8 AV	54.0	-7.2	1.69 H	360	45.2	1.6

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.7 PK	74.0	-13.3	1.19 V	127	63.4	-2.7
2	2390.00	50.1 AV	54.0	-3.9	1.19 V	127	52.8	-2.7
3	*2412.00	119.7 PK			1.19 V	127	122.4	-2.7
4	*2412.00	115.8 AV			1.19 V	127	118.5	-2.7
5	4824.00	56.4 PK	74.0	-17.6	2.38 V	244	54.8	1.6
6	4824.00	53.8 AV	54.0	-0.2	2.38 V	244	52.2	1.6

#### REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.1 PK			2.39 H	113	106.1	-3.0
2	*2437.00	99.0 AV			2.39 H	113	102.0	-3.0
3	4874.00	53.2 PK	74.0	-20.8	1.74 H	355	51.6	1.6
4	4874.00	44.3 AV	54.0	-9.7	1.74 H	355	42.7	1.6
5	7311.00	49.0 PK	74.0	-25.0	1.70 H	360	41.3	7.7
6	7311.00	38.2 AV	54.0	-15.8	1.70 H	360	30.5	7.7

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	119.2 PK			1.14 V	122	122.2	-3.0
2	*2437.00	115.1 AV			1.14 V	122	118.1	-3.0
3	4874.00	57.4 PK	74.0	-16.6	2.36 V	237	55.8	1.6
4	4874.00	53.4 AV	54.0	-0.6	2.36 V	237	51.8	1.6
5	7311.00	50.8 PK	74.0	-23.2	2.58 V	254	43.1	7.7
6	7311.00	40.1 AV	54.0	-13.9	2.58 V	254	32.4	7.7

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.3 PK			2.37 H	122	107.3	-3.0
2	*2462.00	100.4 AV			2.37 H	122	103.4	-3.0
3	2483.50	58.5 PK	74.0	-15.5	2.37 H	122	61.5	-3.0
4	2483.50	46.3 AV	54.0	-7.7	2.37 H	122	49.3	-3.0
5	4924.00	51.8 PK	74.0	-22.2	1.77 H	349	50.1	1.7
6	4924.00	43.8 AV	54.0	-10.2	1.77 H	349	42.1	1.7
7	7386.00	48.0 PK	74.0	-26.0	1.65 H	360	40.1	7.9
8	7386.00	37.6 AV	54.0	-16.4	1.65 H	360	29.7	7.9

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	118.3 PK			1.20 V	130	121.3	-3.0
2	*2462.00	114.6 AV			1.20 V	130	117.6	-3.0
3	2483.50	60.8 PK	74.0	-13.2	1.20 V	130	63.8	-3.0
4	2483.50	51.0 AV	54.0	-3.0	1.20 V	130	54.0	-3.0
5	4924.00	58.2 PK	74.0	-15.8	2.33 V	232	56.5	1.7
<b>6</b>	<b>4924.00</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>2.33 V</b>	<b>232</b>	<b>52.2</b>	<b>1.7</b>
7	7386.00	50.1 PK	74.0	-23.9	2.63 V	259	42.2	7.9
8	7386.00	39.7 AV	54.0	-14.3	2.63 V	259	31.8	7.9

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	2.37 H	117	59.6	-2.7
2	2390.00	45.9 AV	54.0	-8.1	2.37 H	117	48.6	-2.7
3	*2412.00	102.5 PK			2.37 H	117	105.2	-2.7
4	*2412.00	91.8 AV			2.37 H	117	94.5	-2.7
5	4824.00	51.1 PK	74.0	-22.9	1.70 H	341	49.5	1.6
6	4824.00	37.7 AV	54.0	-16.3	1.70 H	341	36.1	1.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.9 PK	74.0	-4.1	1.13 V	122	72.6	-2.7
2	2390.00	53.8 AV	54.0	-0.2	1.13 V	122	56.5	-2.7
3	*2412.00	114.9 PK			1.13 V	122	117.6	-2.7
4	*2412.00	105.2 AV			1.13 V	122	107.9	-2.7
5	4824.00	52.6 PK	74.0	-21.4	2.33 V	242	51.0	1.6
6	4824.00	38.7 AV	54.0	-15.3	2.33 V	242	37.1	1.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.1 PK			2.44 H	107	110.1	-3.0
2	*2437.00	96.6 AV			2.44 H	107	99.6	-3.0
3	4874.00	51.8 PK	74.0	-22.2	1.69 H	351	50.2	1.6
4	4874.00	37.9 AV	54.0	-16.1	1.69 H	351	36.3	1.6
5	7311.00	48.8 PK	74.0	-25.2	1.76 H	346	41.1	7.7
6	7311.00	37.8 AV	54.0	-16.2	1.76 H	346	30.1	7.7

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	120.2 PK			1.19 V	122	123.2	-3.0
2	*2437.00	110.2 AV			1.19 V	122	113.2	-3.0
3	4874.00	52.1 PK	74.0	-21.9	2.34 V	251	50.5	1.6
4	4874.00	38.1 AV	54.0	-15.9	2.34 V	251	36.5	1.6
5	7311.00	51.4 PK	74.0	-22.6	2.56 V	267	43.7	7.7
6	7311.00	40.4 AV	54.0	-13.6	2.56 V	267	32.7	7.7

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.0 PK			2.36 H	115	108.0	-3.0
2	*2462.00	95.1 AV			2.36 H	115	98.1	-3.0
3	2483.50	60.6 PK	74.0	-13.4	2.36 H	115	63.6	-3.0
4	2483.50	47.7 AV	54.0	-6.3	2.36 H	115	50.7	-3.0
5	4924.00	52.0 PK	74.0	-22.0	1.73 H	346	50.3	1.7
6	4924.00	37.9 AV	54.0	-16.1	1.73 H	346	36.2	1.7
7	7386.00	49.8 PK	74.0	-24.2	1.72 H	359	41.9	7.9
8	7386.00	38.7 AV	54.0	-15.3	1.72 H	359	30.8	7.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.6 PK			1.15 V	112	117.6	-3.0
2	*2462.00	104.8 AV			1.15 V	112	107.8	-3.0
3	2483.50	68.5 PK	74.0	-5.5	1.15 V	112	71.5	-3.0
<b>4</b>	<b>2483.50</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>1.15 V</b>	<b>112</b>	<b>56.9</b>	<b>-3.0</b>
5	4924.00	52.4 PK	74.0	-21.6	2.39 V	252	50.7	1.7
6	4924.00	38.1 AV	54.0	-15.9	2.39 V	252	36.4	1.7
7	7386.00	52.1 PK	74.0	-21.9	2.60 V	247	44.2	7.9
8	7386.00	40.9 AV	54.0	-13.1	2.60 V	247	33.0	7.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.8 PK	74.0	-15.2	2.44 H	108	61.5	-2.7
2	2390.00	47.4 AV	54.0	-6.6	2.44 H	108	50.1	-2.7
3	*2412.00	105.0 PK			2.44 H	108	107.7	-2.7
4	*2412.00	94.5 AV			2.44 H	108	97.2	-2.7
5	4824.00	50.8 PK	74.0	-23.2	1.74 H	346	49.2	1.6
6	4824.00	37.3 AV	54.0	-16.7	1.74 H	346	35.7	1.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.0 PK	74.0	-9.0	1.15 V	119	67.7	-2.7
2	2390.00	53.8 AV	54.0	-0.2	1.15 V	119	56.5	-2.7
3	*2412.00	115.8 PK			1.15 V	119	118.5	-2.7
4	*2412.00	105.5 AV			1.15 V	119	108.2	-2.7
5	4824.00	51.2 PK	74.0	-22.8	2.31 V	231	49.6	1.6
6	4824.00	38.0 AV	54.0	-16.0	2.31 V	231	36.4	1.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.7 PK			2.42 H	108	111.7	-3.0
2	*2437.00	98.9 AV			2.42 H	108	101.9	-3.0
3	4874.00	50.0 PK	74.0	-24.0	1.73 H	360	48.4	1.6
4	4874.00	37.0 AV	54.0	-17.0	1.73 H	360	35.4	1.6
5	7311.00	48.4 PK	74.0	-25.6	1.75 H	352	40.7	7.7
6	7311.00	37.6 AV	54.0	-16.4	1.75 H	352	29.9	7.7

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	120.3 PK			1.16 V	117	123.3	-3.0
2	*2437.00	109.8 AV			1.16 V	117	112.8	-3.0
3	4874.00	50.4 PK	74.0	-23.6	2.37 V	225	48.8	1.6
4	4874.00	37.5 AV	54.0	-16.5	2.37 V	225	35.9	1.6
5	7311.00	50.3 PK	74.0	-23.7	2.60 V	249	42.6	7.7
6	7311.00	39.5 AV	54.0	-14.5	2.60 V	249	31.8	7.7

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.4 PK			2.44 H	115	108.4	-3.0
2	*2462.00	95.0 AV			2.44 H	115	98.0	-3.0
3	2483.50	59.6 PK	74.0	-14.4	2.44 H	115	62.6	-3.0
4	2483.50	47.0 AV	54.0	-7.0	2.44 H	115	50.0	-3.0
5	4924.00	50.0 PK	74.0	-24.0	1.80 H	356	48.3	1.7
6	4924.00	37.3 AV	54.0	-16.7	1.80 H	356	35.6	1.7
7	7386.00	48.2 PK	74.0	-25.8	1.72 H	356	40.3	7.9
8	7386.00	37.4 AV	54.0	-16.6	1.72 H	356	29.5	7.9

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.1 PK			1.09 V	131	117.1	-3.0
2	*2462.00	103.2 AV			1.09 V	131	106.2	-3.0
3	2483.50	68.7 PK	74.0	-5.3	1.09 V	131	71.7	-3.0
4	2483.50	53.5 AV	54.0	-0.5	1.09 V	131	56.5	-3.0
5	4924.00	50.6 PK	74.0	-23.4	2.42 V	243	48.9	1.7
6	4924.00	37.7 AV	54.0	-16.3	2.42 V	243	36.0	1.7
7	7386.00	50.5 PK	74.0	-23.5	2.55 V	244	42.6	7.9
8	7386.00	39.9 AV	54.0	-14.1	2.55 V	244	32.0	7.9

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.5 PK	74.0	-16.5	2.40 H	113	60.2	-2.7
2	2390.00	45.8 AV	54.0	-8.2	2.40 H	113	48.5	-2.7
3	*2422.00	98.8 PK			2.40 H	113	101.7	-2.9
4	*2422.00	90.1 AV			2.40 H	113	93.0	-2.9
5	4844.00	50.3 PK	74.0	-23.7	1.80 H	356	48.7	1.6
6	4844.00	37.6 AV	54.0	-16.4	1.80 H	356	36.0	1.6
7	7266.00	48.9 PK	74.0	-25.1	1.66 H	359	41.1	7.8
8	7266.00	38.5 AV	54.0	-15.5	1.66 H	359	30.7	7.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.1 PK	74.0	-9.9	1.19 V	121	66.8	-2.7
2	2390.00	53.3 AV	54.0	-0.7	1.19 V	121	56.0	-2.7
3	*2422.00	108.7 PK			1.19 V	121	111.6	-2.9
4	*2422.00	99.6 AV			1.19 V	121	102.5	-2.9
5	4844.00	50.6 PK	74.0	-23.4	2.39 V	236	49.0	1.6
6	4844.00	37.6 AV	54.0	-16.4	2.39 V	236	36.0	1.6
7	7266.00	50.4 PK	74.0	-23.6	2.59 V	257	42.6	7.8
8	7266.00	40.0 AV	54.0	-14.0	2.59 V	257	32.2	7.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.5 PK			2.42 H	105	105.5	-3.0
2	*2437.00	93.1 AV			2.42 H	105	96.1	-3.0
3	2483.50	59.7 PK	74.0	-14.3	2.42 H	105	62.7	-3.0
4	2483.50	47.8 AV	54.0	-6.2	2.42 H	105	50.8	-3.0
5	4874.00	49.8 PK	74.0	-24.2	1.68 H	360	48.2	1.6
6	4874.00	36.9 AV	54.0	-17.1	1.68 H	360	35.3	1.6
7	7311.00	49.6 PK	74.0	-24.4	1.67 H	354	41.9	7.7
8	7311.00	38.1 AV	54.0	-15.9	1.67 H	354	30.4	7.7

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.7 PK			1.10 V	126	113.7	-3.0
2	*2437.00	101.8 AV			1.10 V	126	104.8	-3.0
3	2483.50	63.7 PK	74.0	-10.3	1.10 V	126	66.7	-3.0
<b>4</b>	<b>2483.50</b>	<b>53.9 AV</b>	<b>54.0</b>	<b>-0.1</b>	<b>1.10 V</b>	<b>126</b>	<b>56.9</b>	<b>-3.0</b>
5	4874.00	50.7 PK	74.0	-23.3	2.33 V	229	49.1	1.6
6	4874.00	37.5 AV	54.0	-16.5	2.33 V	229	35.9	1.6
7	7311.00	50.5 PK	74.0	-23.5	2.53 V	245	42.8	7.7
8	7311.00	39.6 AV	54.0	-14.4	2.53 V	245	31.9	7.7

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	101.8 PK			2.41 H	101	104.8	-3.0
2	*2452.00	92.4 AV			2.41 H	101	95.4	-3.0
3	2483.50	59.4 PK	74.0	-14.6	2.41 H	101	62.4	-3.0
4	2483.50	47.4 AV	54.0	-6.6	2.41 H	101	50.4	-3.0
5	4904.00	50.2 PK	74.0	-23.8	1.79 H	360	48.5	1.7
6	4904.00	37.1 AV	54.0	-16.9	1.79 H	360	35.4	1.7
7	7356.00	49.3 PK	74.0	-24.7	1.67 H	360	41.4	7.9
8	7356.00	37.9 AV	54.0	-16.1	1.67 H	360	30.0	7.9

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	110.9 PK			1.19 V	114	113.9	-3.0
2	*2452.00	101.3 AV			1.19 V	114	104.3	-3.0
3	2483.50	72.5 PK	74.0	-1.5	1.19 V	114	75.5	-3.0
4	2483.50	53.7 AV	54.0	-0.3	1.19 V	114	56.7	-3.0
5	4904.00	50.6 PK	74.0	-23.4	2.38 V	225	48.9	1.7
6	4904.00	37.6 AV	54.0	-16.4	2.38 V	225	35.9	1.7
7	7356.00	51.1 PK	74.0	-22.9	2.64 V	265	43.2	7.9
8	7356.00	40.1 AV	54.0	-13.9	2.64 V	265	32.2	7.9

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.


Below 1GHz Worst-Case Data: 802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	51.24	29.7 QP	40.0	-10.3	1.50 H	85	38.4	-8.7
2	134.68	27.7 QP	43.5	-15.8	1.50 H	100	37.4	-9.7
3	291.85	32.2 QP	46.0	-13.8	1.00 H	297	40.3	-8.1
4	476.19	32.2 QP	46.0	-13.8	1.50 H	209	37.4	-5.2
5	751.73	34.0 QP	46.0	-12.0	1.00 H	235	32.9	1.1
6	932.19	38.4 QP	46.0	-7.6	1.00 H	6	34.3	4.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

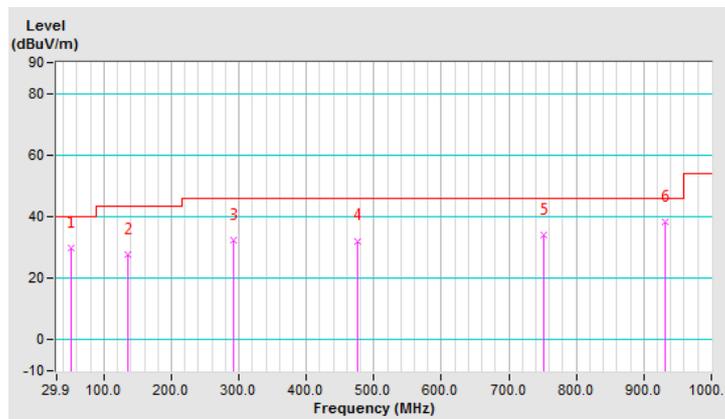


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	68.71	30.6 QP	40.0	-9.4	1.50 V	300	40.7	-10.1
2	103.64	26.0 QP	43.5	-17.5	1.50 V	269	38.7	-12.7
3	295.73	27.8 QP	46.0	-18.2	1.50 V	196	35.9	-8.1
4	394.70	32.3 QP	46.0	-13.7	1.50 V	276	38.8	-6.5
5	478.13	31.2 QP	46.0	-14.8	1.50 V	8	36.3	-5.1
6	899.20	31.9 QP	46.0	-14.1	1.01 V	85	28.3	3.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

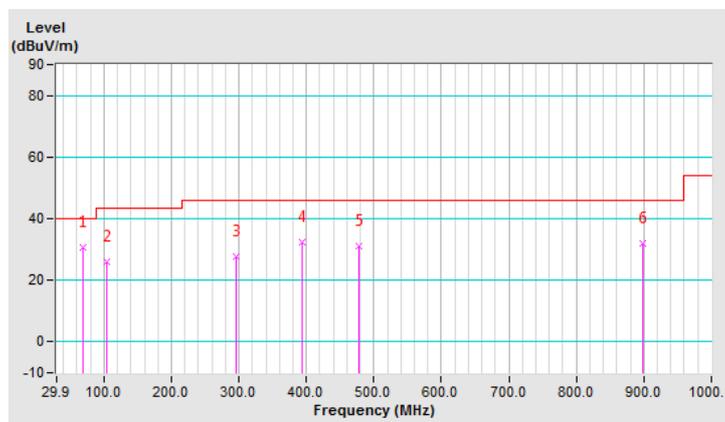


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	126.92	29.7 QP	43.5	-13.8	2.00 H	92	40.2	-10.5
2	156.03	32.9 QP	43.5	-10.6	1.51 H	105	41.4	-8.5
3	346.19	30.8 QP	46.0	-15.2	1.01 H	141	38.2	-7.4
4	478.13	32.6 QP	46.0	-13.4	1.51 H	6	37.7	-5.1
5	606.20	38.2 QP	46.0	-7.8	1.51 H	167	40.3	-2.1
6	747.85	35.6 QP	46.0	-10.4	1.51 H	125	34.6	1.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

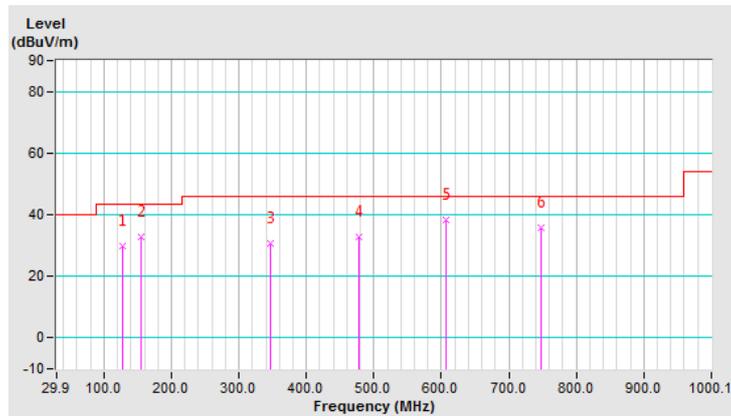


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	103.64	27.3 QP	43.5	-16.2	1.00 V	317	40.0	-12.7
2	142.44	28.5 QP	43.5	-15.0	1.00 V	144	37.6	-9.1
3	355.89	31.6 QP	46.0	-14.4	1.49 V	68	38.8	-7.2
4	604.26	35.8 QP	46.0	-10.2	1.49 V	184	38.0	-2.2
5	747.85	34.7 QP	46.0	-11.3	2.00 V	5	33.7	1.0
6	903.08	31.9 QP	46.0	-14.1	1.00 V	50	28.1	3.8

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

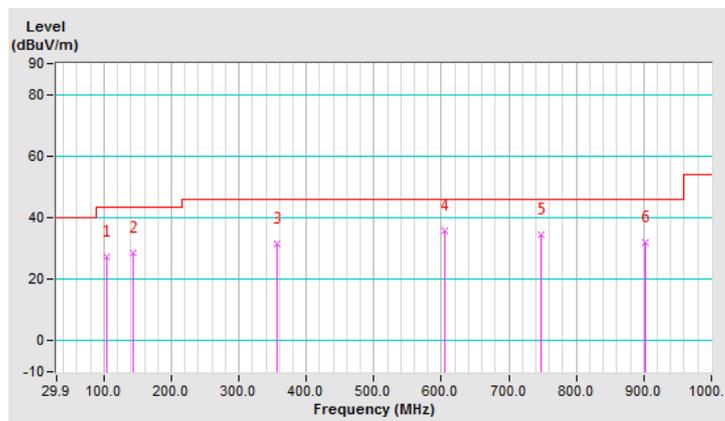

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESR3	102412	Feb. 08, 2018	Feb. 07, 2019
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Sep. 05, 2018	Sep. 04, 2019
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Feb. 05, 2018	Feb. 04, 2019
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Aug. 13, 2018	Aug. 12, 2019
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 2.

3. The VCCI Site Registration No. is C-2047.

### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

### 4.2.4 Deviation from Test Standard

No deviation.

### 4.2.5 Test Setup

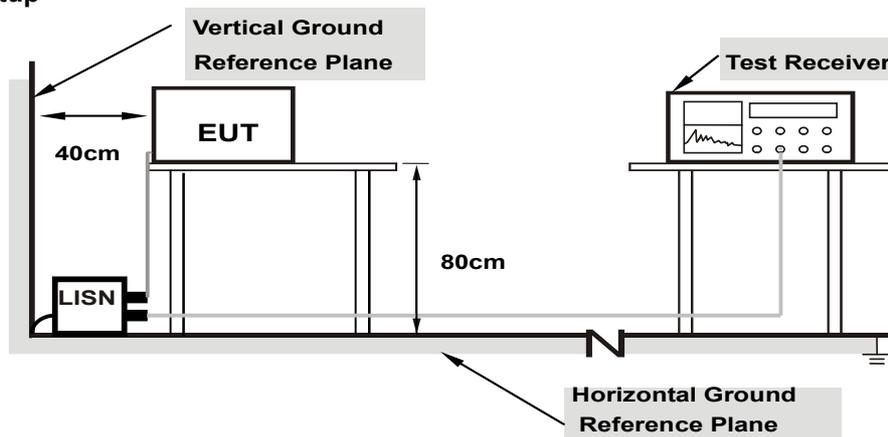

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 4.2.6 EUT Operating Conditions

Same as 4.1.6.


#### 4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.73	42.65	25.19	52.38	34.92	66.00	56.00	-13.62	-21.08
2	0.16181	9.73	36.86	18.37	46.59	28.10	65.37	55.37	-18.78	-27.27
3	0.24384	9.73	29.84	15.14	39.57	24.87	61.96	51.96	-22.39	-27.09
4	0.31813	9.74	30.52	20.59	40.26	30.33	59.76	49.76	-19.50	-19.43
5	0.56837	9.73	11.88	4.58	21.61	14.31	56.00	46.00	-34.39	-31.69
6	6.90648	9.83	8.76	0.29	18.59	10.12	60.00	50.00	-41.41	-39.88

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

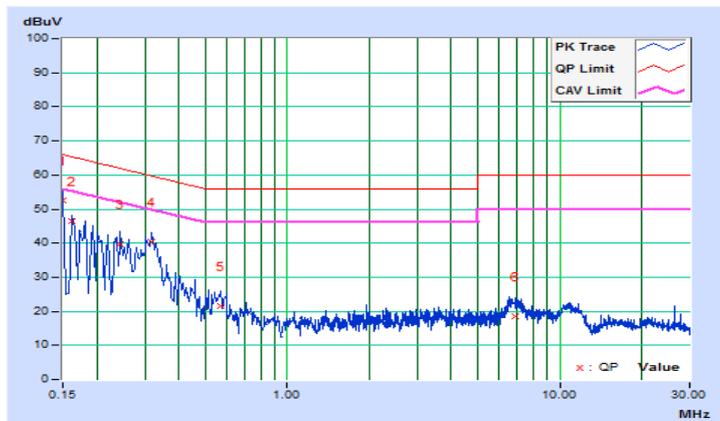


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			<b>1</b>	<b>0.15391</b>	<b>9.72</b>	<b>42.76</b>	<b>25.01</b>	<b>52.48</b>	<b>34.73</b>	<b>65.79</b>
2	0.16967	9.72	37.97	20.15	47.69	29.87	64.98	54.98	-17.29	-25.11
3	0.19978	9.73	32.67	17.01	42.40	26.74	63.62	53.62	-21.22	-26.88
4	0.32187	9.74	30.24	20.89	39.98	30.63	59.66	49.66	-19.68	-19.03
5	0.50908	9.74	13.94	5.48	23.68	15.22	56.00	46.00	-32.32	-30.78
6	6.95340	9.86	9.66	1.54	19.52	11.40	60.00	50.00	-40.48	-38.60

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

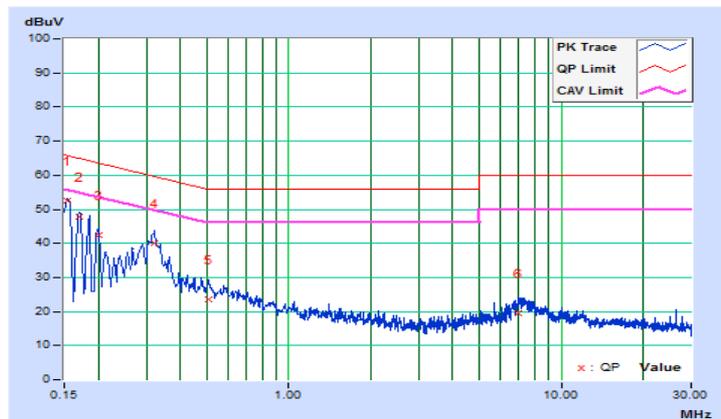


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.73	37.03	18.17	46.76	27.90	65.79
2	0.18128	9.72	31.73	16.71	41.45	26.43	64.43	54.43	-22.98	-28.00
3	0.47844	9.74	23.57	17.85	33.31	27.59	56.37	46.37	-23.06	-18.78
4	3.90360	9.79	15.79	5.56	25.58	15.35	56.00	46.00	-30.42	-30.65
5	8.86148	9.86	26.62	20.46	36.48	30.32	60.00	50.00	-23.52	-19.68
6	13.29933	9.91	21.45	14.60	31.36	24.51	60.00	50.00	-28.64	-25.49

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

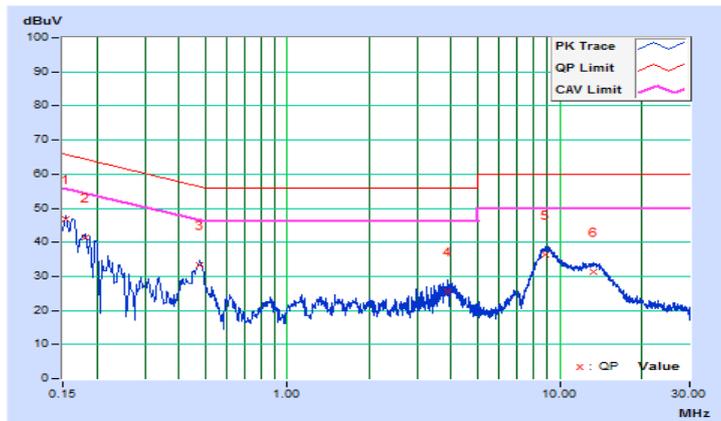


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16181	9.72	36.24	21.61	45.96	31.33	65.37
2	0.18128	9.73	32.01	18.26	41.74	27.99	64.43	54.43	-22.69	-26.44
3	0.47844	9.75	21.92	16.00	31.67	25.75	56.37	46.37	-24.70	-20.62
4	3.89969	9.81	12.58	2.06	22.39	11.87	56.00	46.00	-33.61	-34.13
5	8.77937	9.89	26.29	20.04	36.18	29.93	60.00	50.00	-23.82	-20.07
6	13.87410	9.98	18.62	12.19	28.60	22.17	60.00	50.00	-31.40	-27.83

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

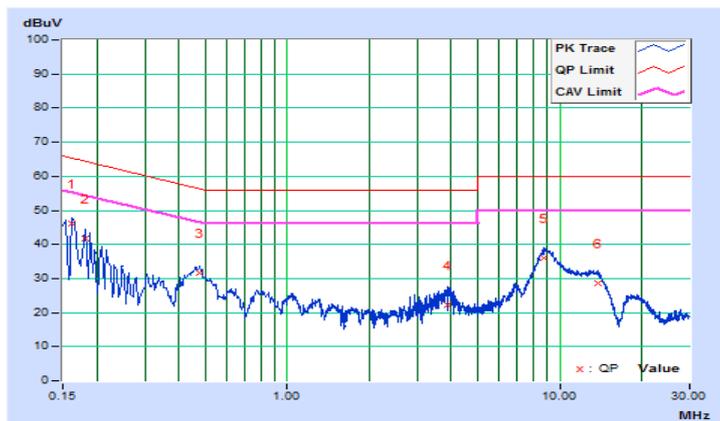


## 4.3 6dB Bandwidth Measurement

### 4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

### 4.3.2 Test Setup

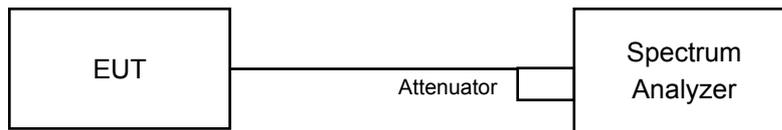

### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

### 4.3.5 Deviation from Test Standard

No deviation.

### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Result

##### CDD Mode

##### 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	8.11	8.12	0.5	Pass
6	2437	9.07	9.07	0.5	Pass
11	2462	9.10	8.07	0.5	Pass

##### 802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.42	16.40	0.5	Pass
6	2437	16.35	16.34	0.5	Pass
11	2462	16.39	16.37	0.5	Pass

##### 802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	17.62	17.62	0.5	Pass
6	2437	17.60	17.61	0.5	Pass
11	2462	17.60	17.60	0.5	Pass

##### 802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	35.22	35.23	0.5	Pass
6	2437	35.26	35.23	0.5	Pass
9	2452	35.23	35.25	0.5	Pass

### Spectrum Plot of Worst Value


#### 802.11b

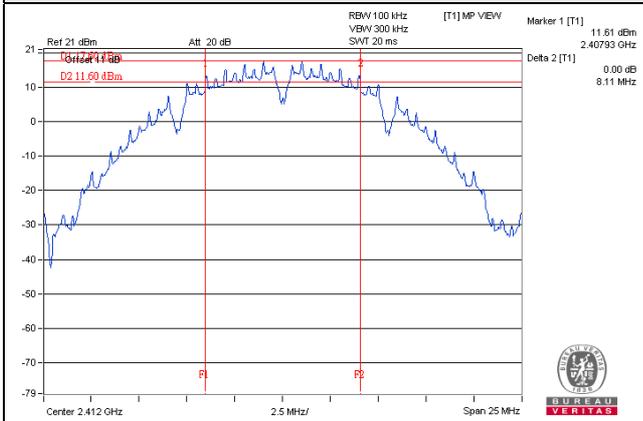


#### 802.11g

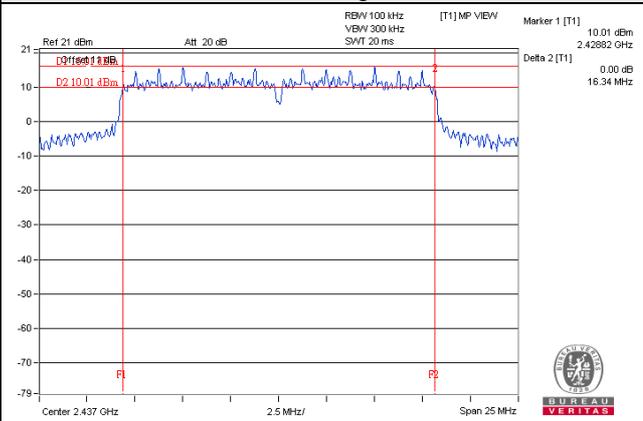

#### 802.11n (HT20)

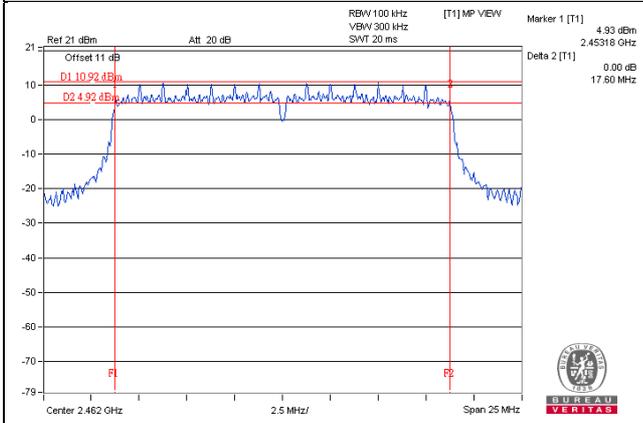

#### 802.11n (HT40)

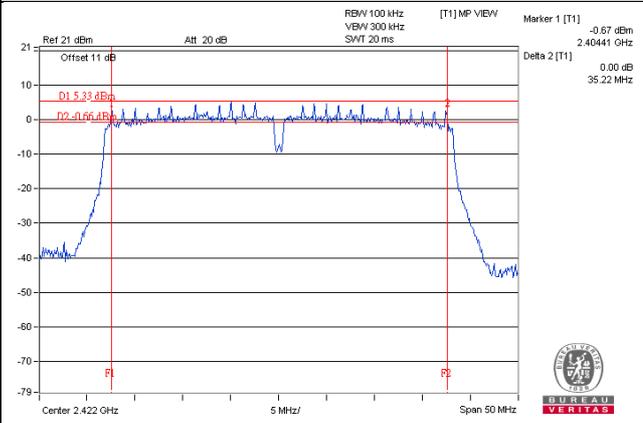


### Beamforming NSS1 Mode

#### 802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	17.59	17.61	0.5	Pass
6	2437	17.59	17.57	0.5	Pass
11	2462	17.59	17.59	0.5	Pass

#### 802.11n (HT40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	35.31	35.30	0.5	Pass
6	2437	35.26	35.20	0.5	Pass
9	2452	35.21	35.26	0.5	Pass

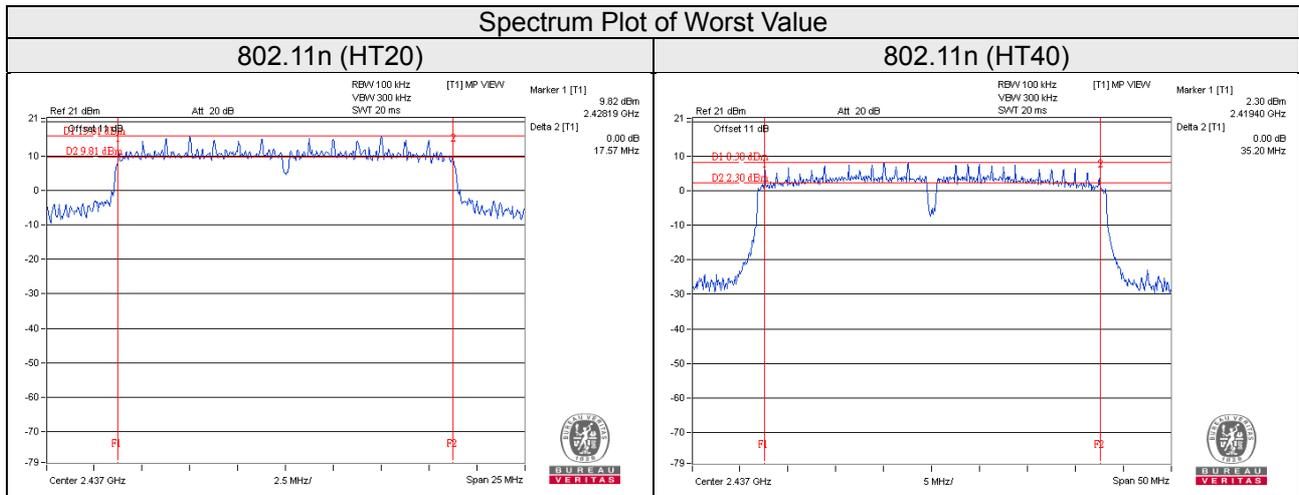

## 4.4 Conducted Output Power Measurement

### 4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)  
Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for  $NANT \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any NANT;

Array Gain =  $5 \log(NANT/NSS)$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $NANT \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(NANT/NSS)$  dB.

### 4.4.2 Test Setup

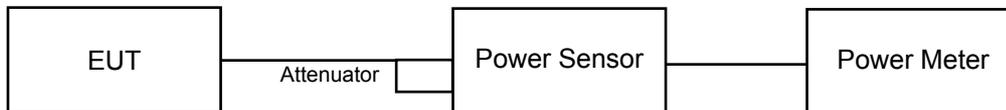

### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedures

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 EUT Operating Conditions

Same as item 4.3.6.

#### 4.4.7 Test Results

##### CDD Mode

##### 802.11b

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	25.29	25.21	669.959	28.26	30	Pass
6	2437	26.11	26.08	813.828	29.11	30	Pass
11	2462	25.91	25.77	767.514	28.85	30	Pass

##### 802.11g

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	21.56	21.18	274.439	24.38	30	Pass
6	2437	26.45	26.22	<b>860.364</b>	29.35	30	Pass
11	2462	21.44	21.20	271.142	24.33	30	Pass

##### 802.11n (HT20)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	21.41	21.45	277.994	24.44	30	Pass
6	2437	26.32	26.18	843.503	29.26	30	Pass
11	2462	21.32	21.31	270.726	24.33	30	Pass

##### 802.11n (HT40)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	18.63	18.83	149.330	21.74	30	Pass
6	2437	22.10	21.54	304.742	24.84	30	Pass
9	2452	21.53	21.08	270.466	24.32	30	Pass

### Beamforming NSS1 Mode

#### 802.11n (HT20)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	21.41	21.45	277.994	24.44	30	Pass
6	2437	26.32	26.18	<b>843.503</b>	29.26	30	Pass
11	2462	21.32	21.31	270.726	24.33	30	Pass

Note: Directional gain = 2.61dBi < 6dBi, so the power limit is not reduced.

#### 802.11n (HT40)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	18.63	18.83	149.330	21.74	30	Pass
6	2437	22.10	21.54	304.742	24.84	30	Pass
9	2452	21.53	21.08	270.466	24.32	30	Pass


Note: Directional gain = 2.61dBi < 6dBi, so the power limit is not reduced.

## 4.5 Power Spectral Density Measurement

### 4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 Test Setup

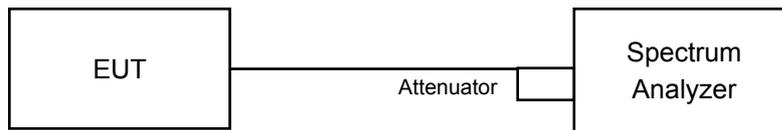

### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

#### For AVG. power (duty cycle $\geq 98\%$ )

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

#### For AVG. power (duty cycle $< 98\%$ )

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to “free run”.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add  $10 \log (1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Condition

Same as item 4.3.6

#### 4.5.7 Test Results

##### CDD Mode

##### 802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Total PSD (dBm)	Limit (dBm)	Pass/Fail
0	1	2412	-1.24	3.01	1.77	8.00	Pass
	6	2437	-1.23	3.01	1.78	8.00	Pass
	11	2462	-1.06	3.01	1.95	8.00	Pass
1	1	2412	-1.41	3.01	1.60	8.00	Pass
	6	2437	-0.86	3.01	2.15	8.00	Pass
	11	2462	-0.69	3.01	2.32	8.00	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 2.61dBi < 6dBi, so the limit no need to reduced.

##### 802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass/Fail
0	1	2412	-8.03	3.01	0.20	-4.82	8.00	Pass
	6	2437	-4.35	3.01	0.20	-1.14	8.00	Pass
	11	2462	-8.44	3.01	0.20	-5.23	8.00	Pass
1	1	2412	-8.27	3.01	0.20	-5.06	8.00	Pass
	6	2437	-4.52	3.01	0.20	-1.31	8.00	Pass
	11	2462	-8.46	3.01	0.20	-5.25	8.00	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 2.61dBi < 6dBi, so the limit no need to reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

### 802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Total PSD (dBm)	Limit (dBm)	Pass/Fail
0	1	2412	-7.86	3.01	-4.85	8.00	Pass
	6	2437	-4.14	3.01	-1.13	8.00	Pass
	11	2462	-7.87	3.01	-4.86	8.00	Pass
1	1	2412	-7.75	3.01	-4.74	8.00	Pass
	6	2437	-3.83	3.01	-0.82	8.00	Pass
	11	2462	-7.44	3.01	-4.43	8.00	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 2.61dBi < 6dBi, so the limit no need to reduced.

### 802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass/Fail
0	3	2422	-14.29	3.01	0.16	-11.12	8.00	Pass
	6	2437	-10.76	3.01	0.16	-7.59	8.00	Pass
	9	2452	-11.69	3.01	0.16	-8.52	8.00	Pass
1	3	2422	-14.07	3.01	0.16	-10.90	8.00	Pass
	6	2437	-11.33	3.01	0.16	-8.16	8.00	Pass
	9	2452	-11.66	3.01	0.16	-8.49	8.00	Pass



Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 2.61dBi < 6dBi, so the limit no need to reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

### Spectrum Plot of Worst Value



#### 802.11b

#### 802.11g

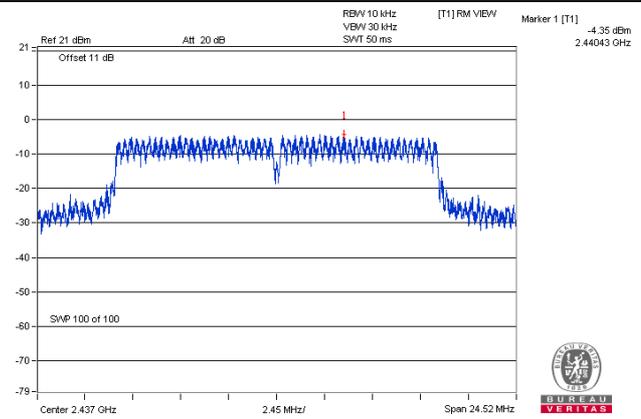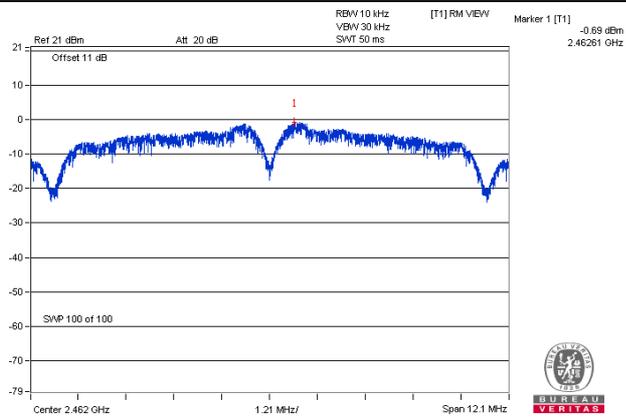

#### 802.11n (HT20)

#### 802.11n (HT40)

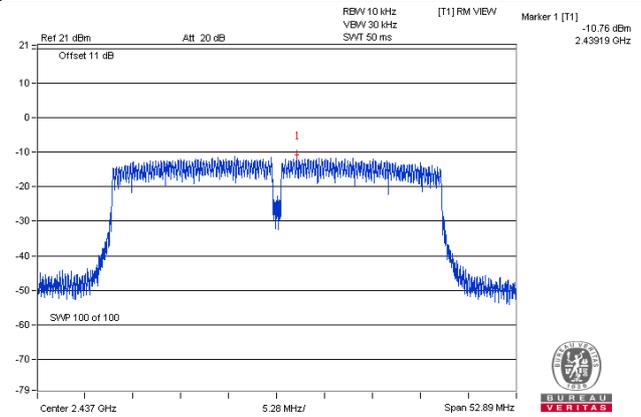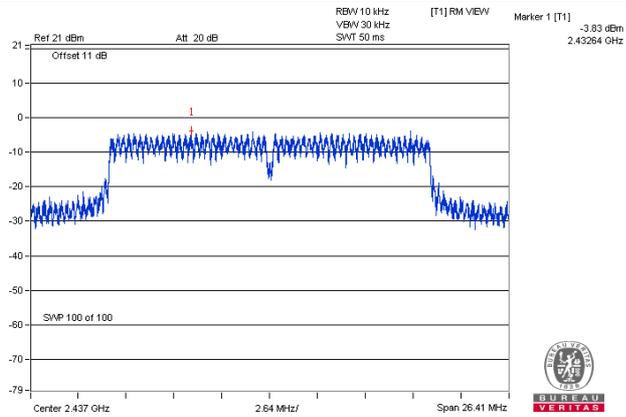

## Beamforming NSS1 Mode

### 802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Total PSD (dBm)	Limit (dBm)	Pass/Fail
0	1	2412	-7.92	3.01	-4.91	8.00	Pass
	6	2437	-4.12	3.01	-1.11	8.00	Pass
	11	2462	-8.06	3.01	-5.05	8.00	Pass
1	1	2412	-8.10	3.01	-5.09	8.00	Pass
	6	2437	-4.04	3.01	-1.03	8.00	Pass
	11	2462	-7.61	3.01	-4.60	8.00	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 2.61dBi < 6dBi, so the limit no need to reduced.

### 802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	Duty Factor	Total PSD with Duty Factor (dBm)	Limit (dBm)	Pass/Fail
0	3	2422	-14.21	3.01	0.15	-11.05	8.00	Pass
	6	2437	-11.51	3.01	0.15	-8.35	8.00	Pass
	9	2452	-12.40	3.01	0.15	-9.24	8.00	Pass
1	3	2422	-14.73	3.01	0.15	-11.57	8.00	Pass
	6	2437	-11.36	3.01	0.15	-8.20	8.00	Pass
	9	2452	-11.46	3.01	0.15	-8.30	8.00	Pass



Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 2.61dBi < 6dBi, so the limit no need to reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value

802.11n (HT20)

802.11n (HT40)

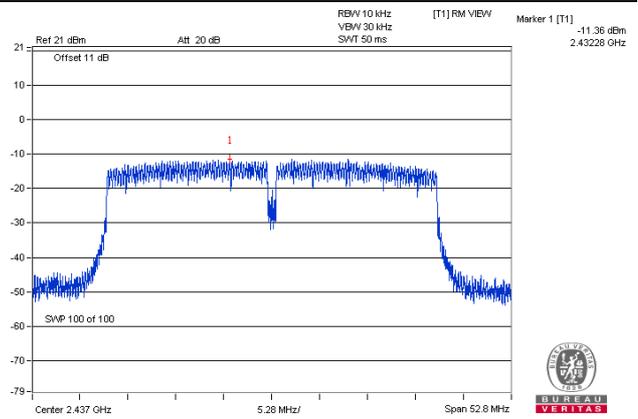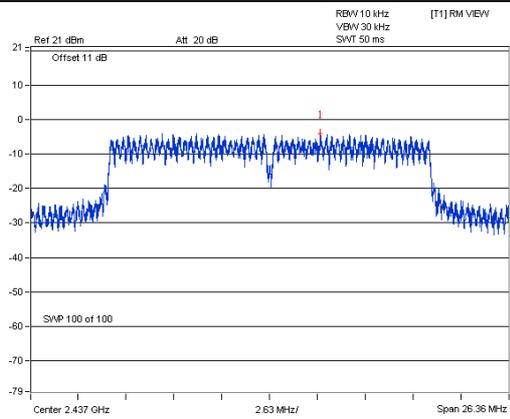


## 4.6 Conducted Out of Band Emission Measurement

### 4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 Test Setup

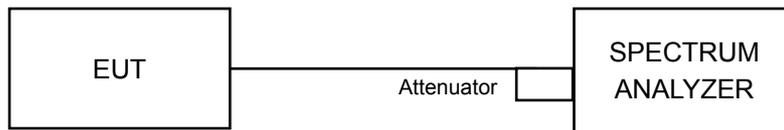

### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.6.5 Deviation from Test Standard

No deviation.

### 4.6.6 EUT Operating Condition

Same as item 4.3.6

### 4.6.7 Test Results


The conducted emission test is performed on each TX port of operating mode without summing or adding  $10\log(N)$  since the limit is relative emission limit.

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.




802.11b\_Chain 1


CH 1

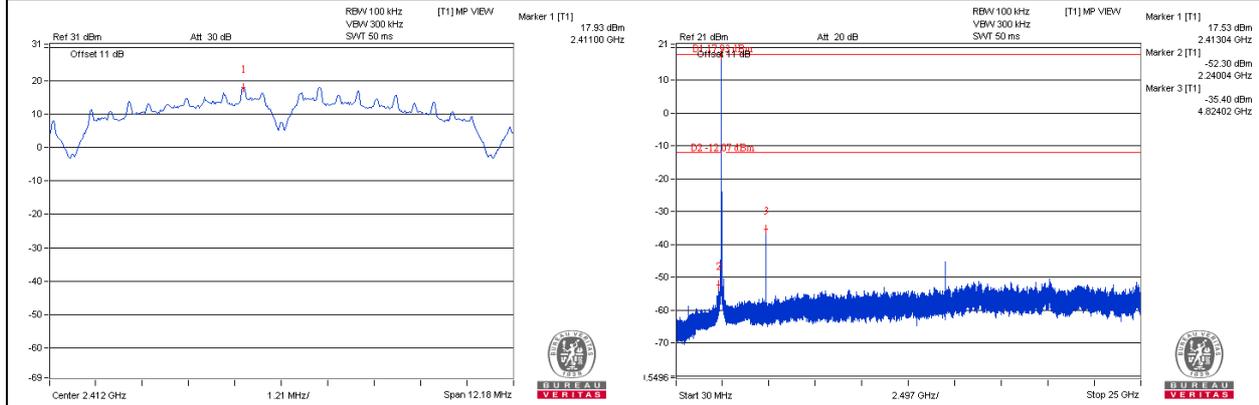

CH 6

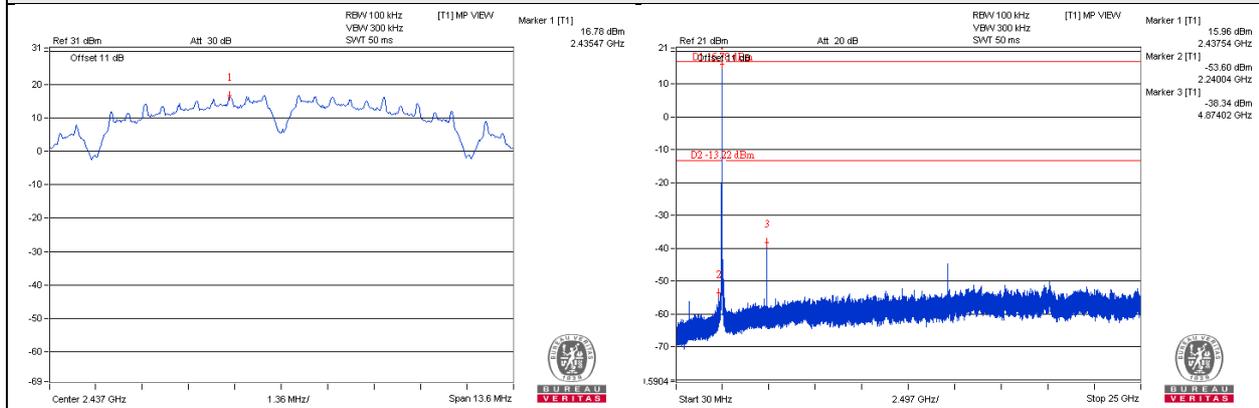


CH 11

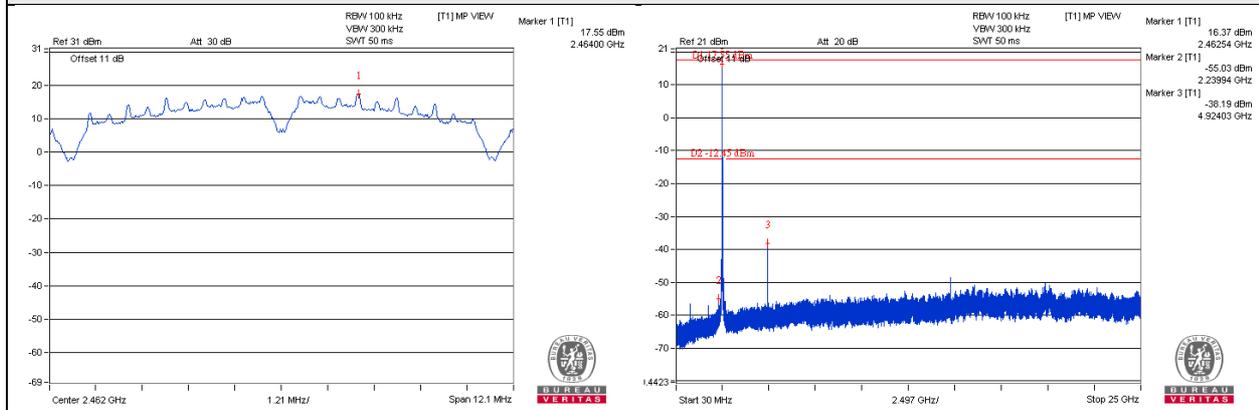


802.11g\_Chain 0


CH 1

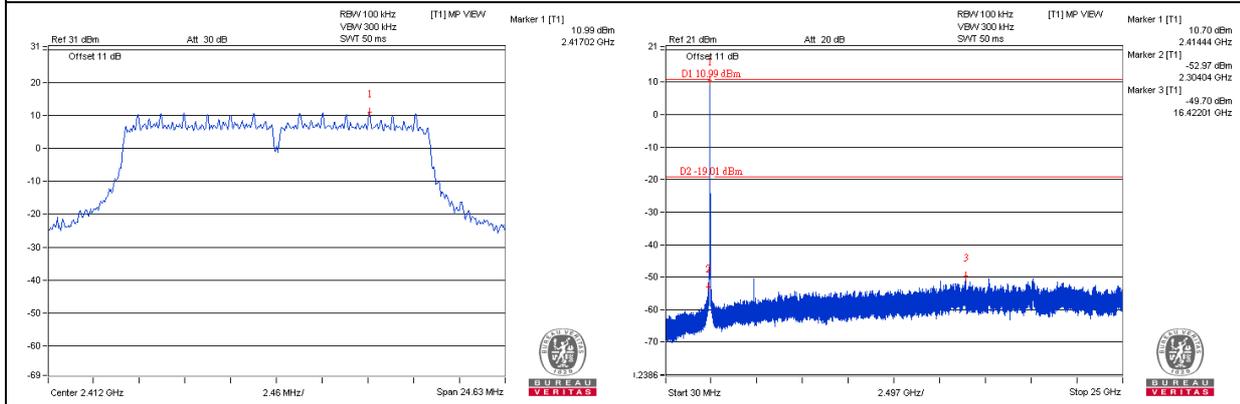

CH 6

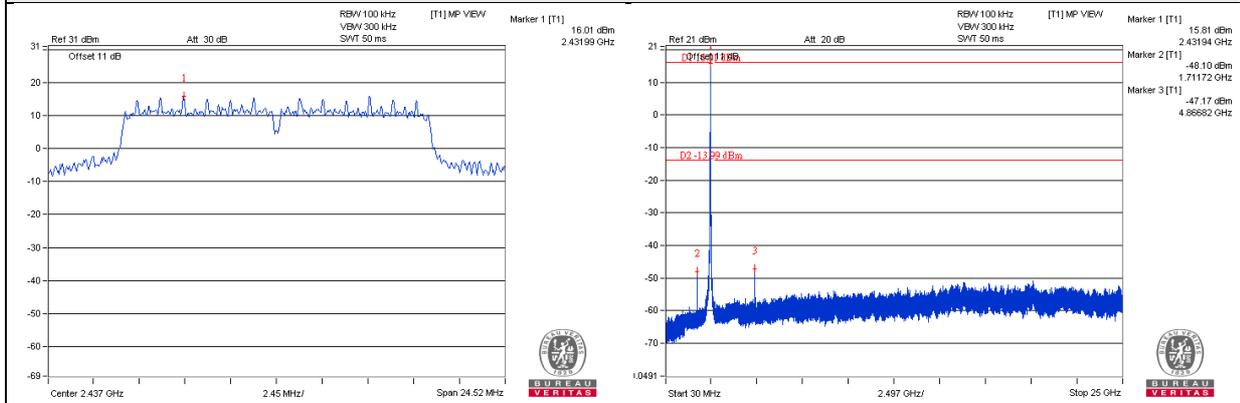


CH 11

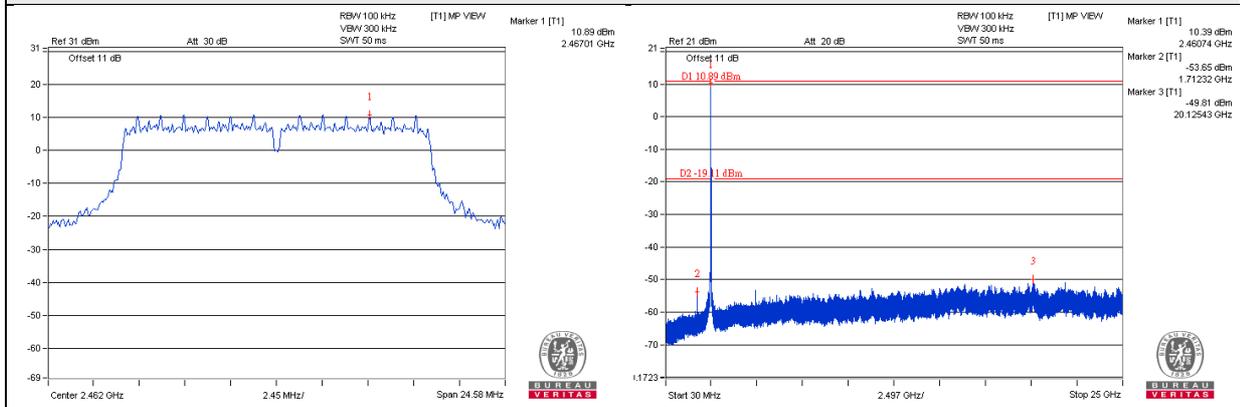


802.11g\_Chain 1


CH 1

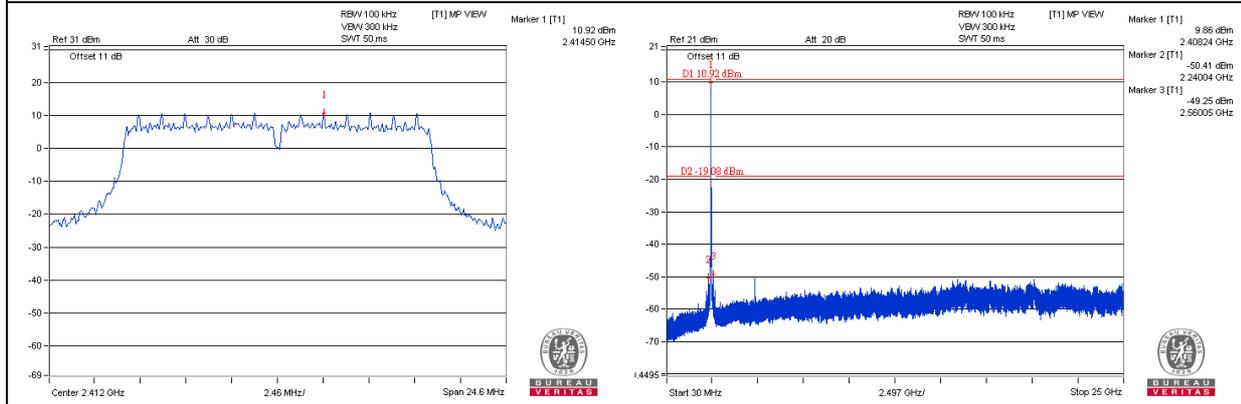

CH 6

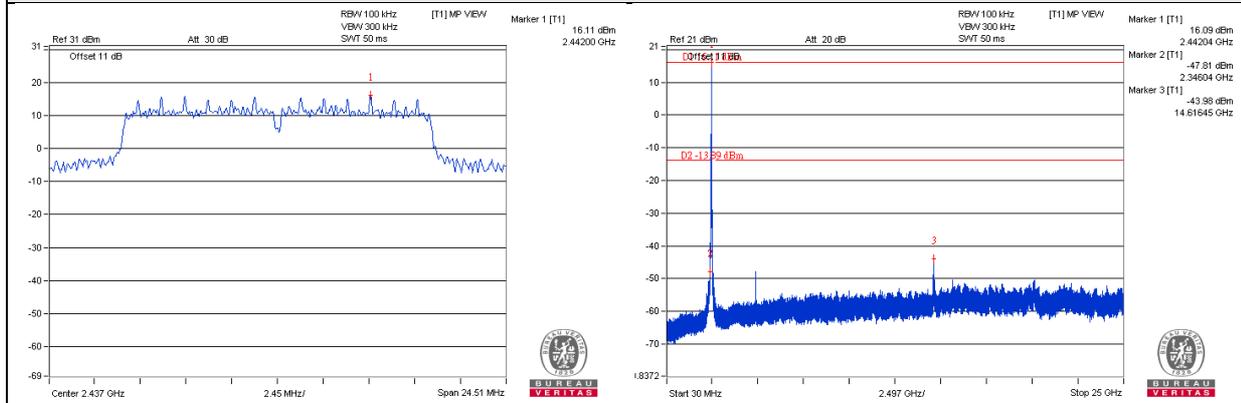


CH 11

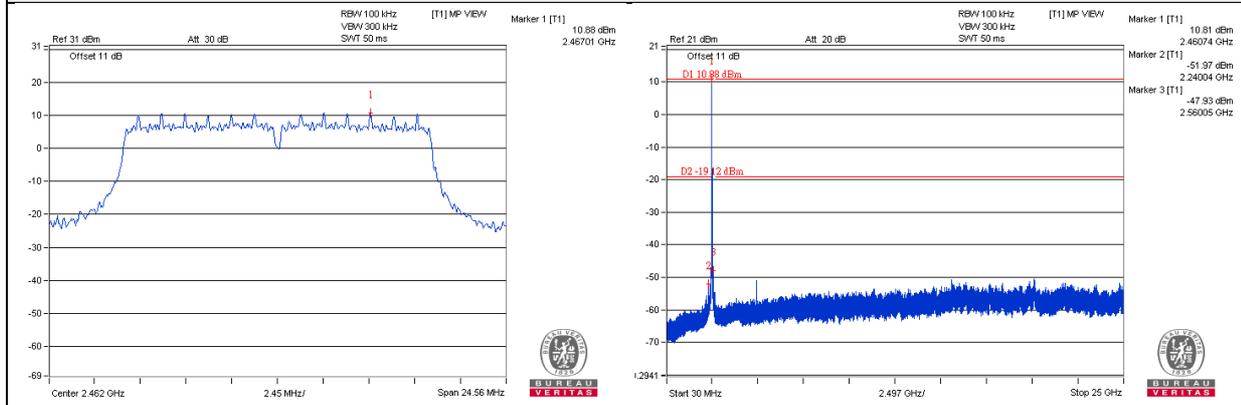


# 802.11n (HT20)\_Chain 0


## CH 1

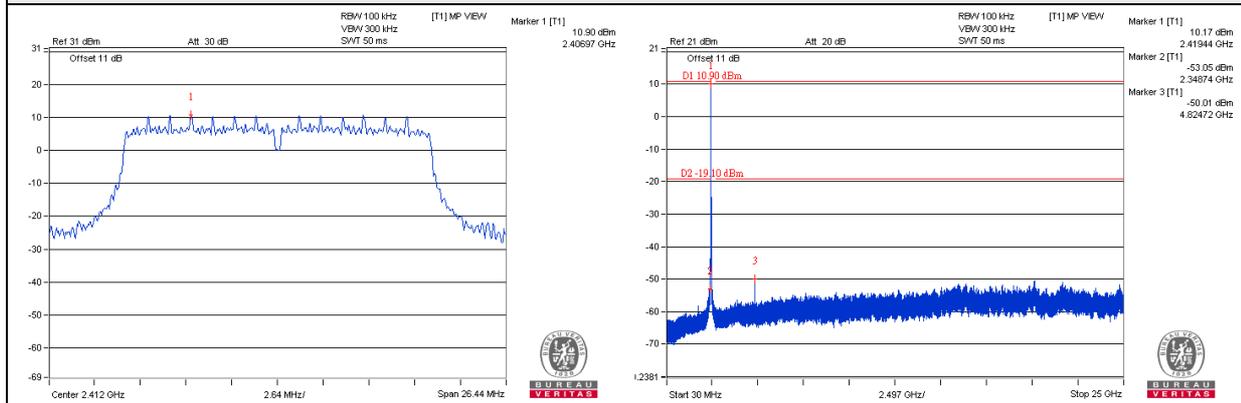


## CH 6

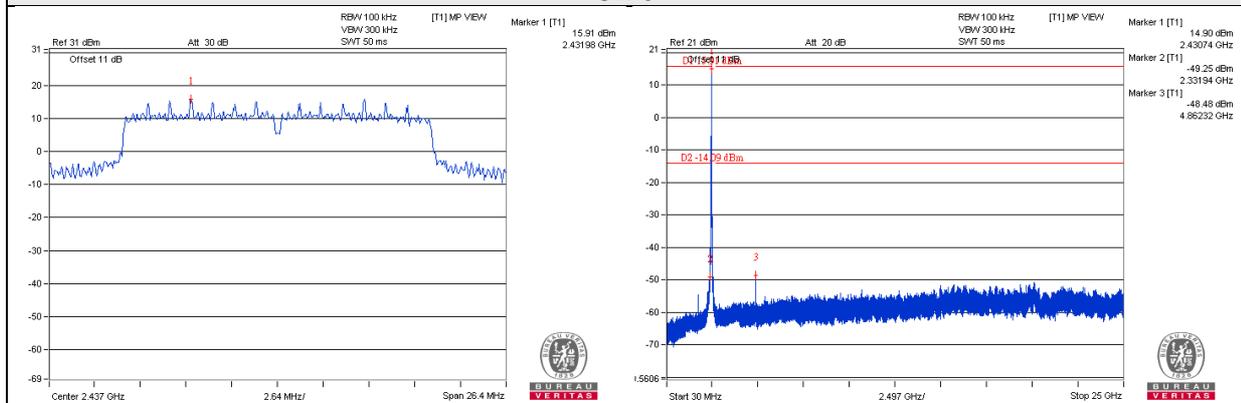

## CH 11

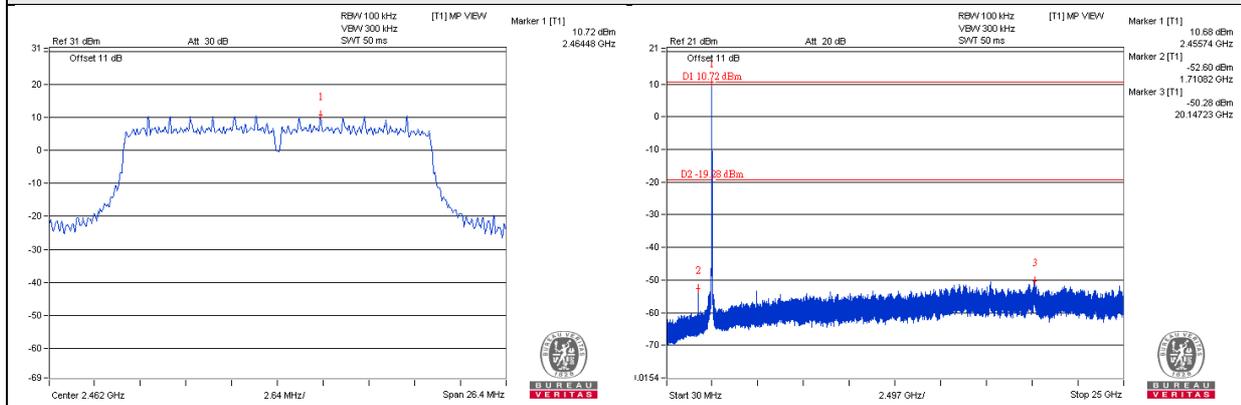


# 802.11n (HT20)\_Chain 1

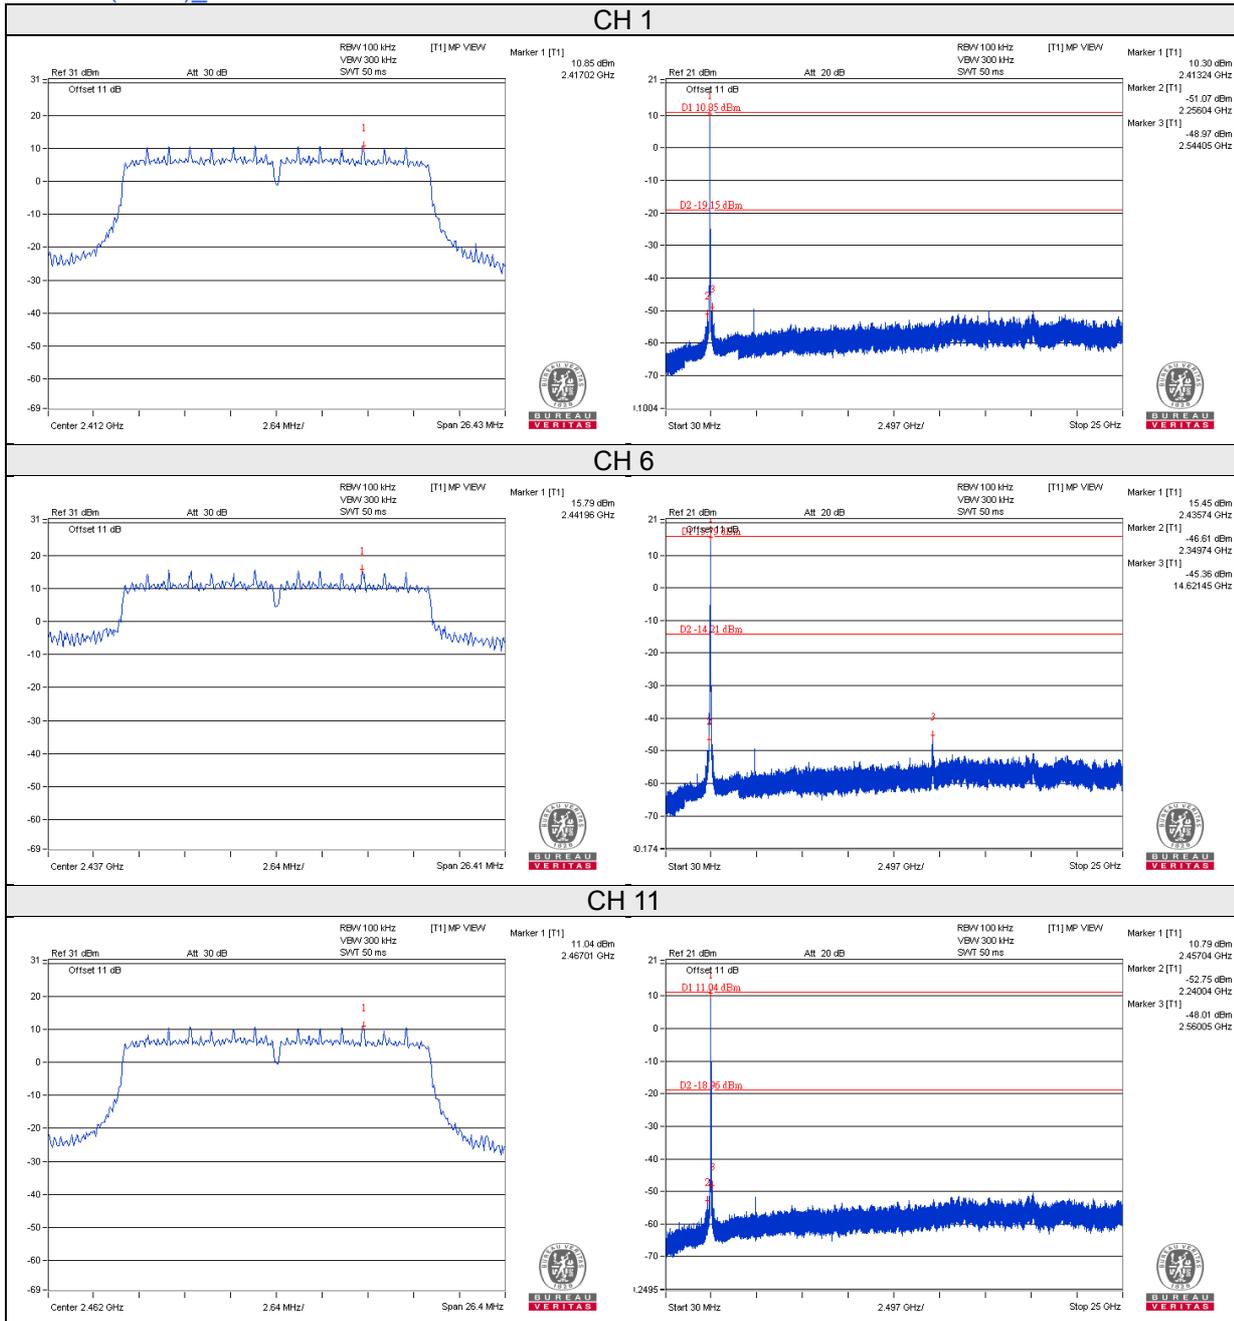


802.11n (HT40)\_Chain 0


CH 3

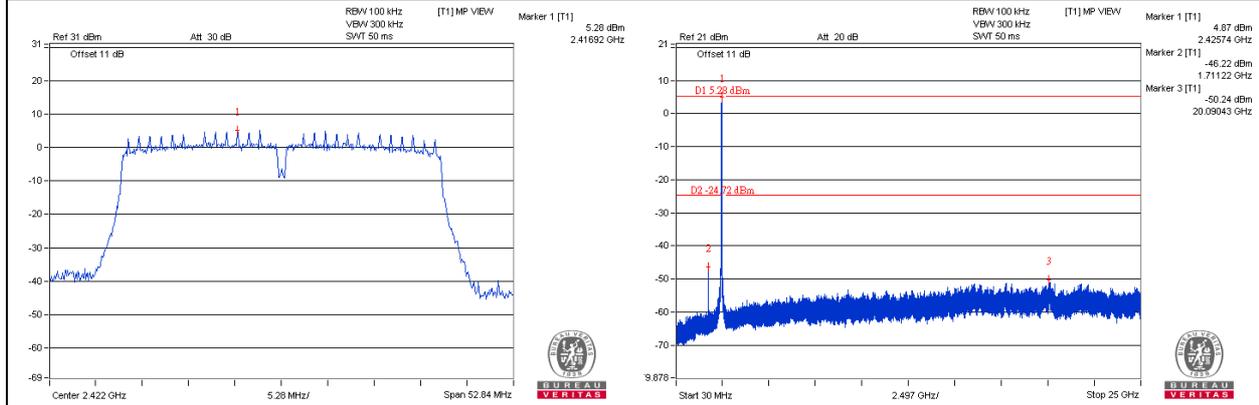

CH 6

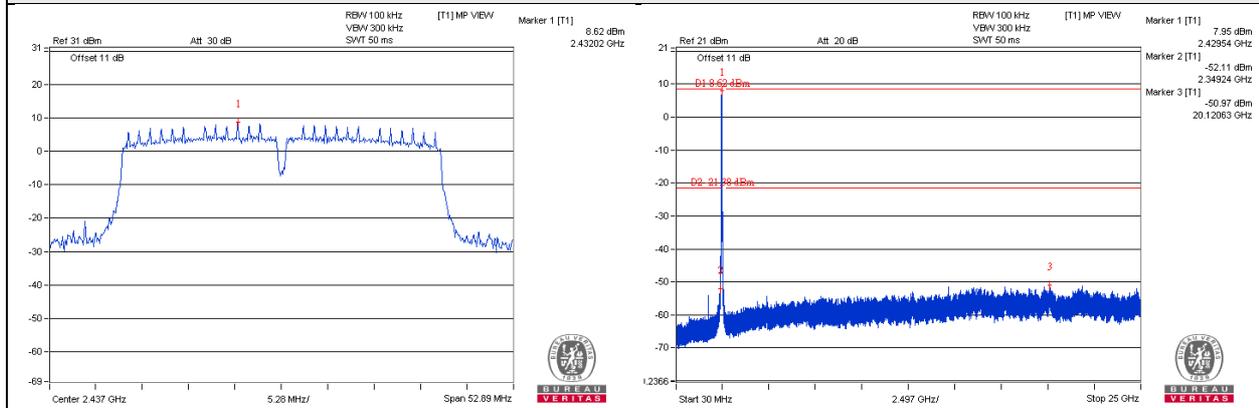


CH 9

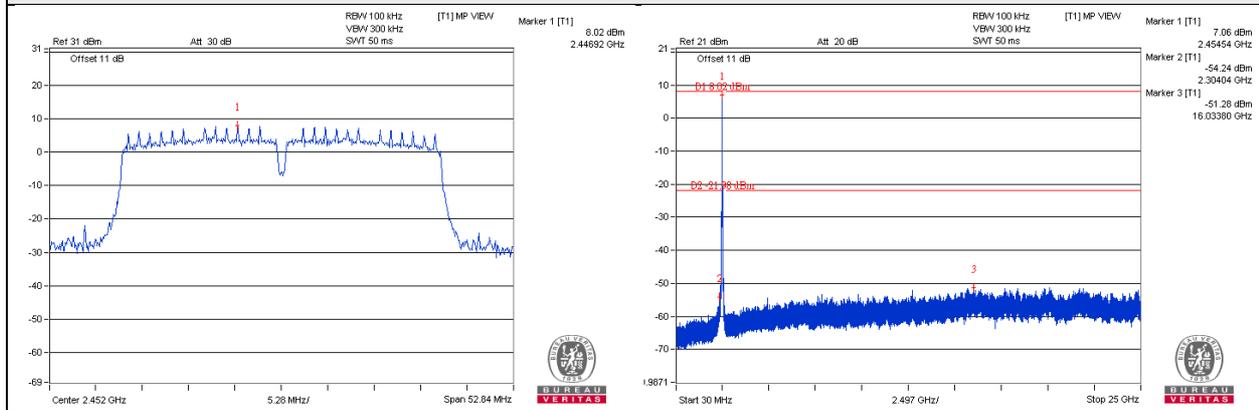


802.11n (HT40)\_Chain 1


CH 3

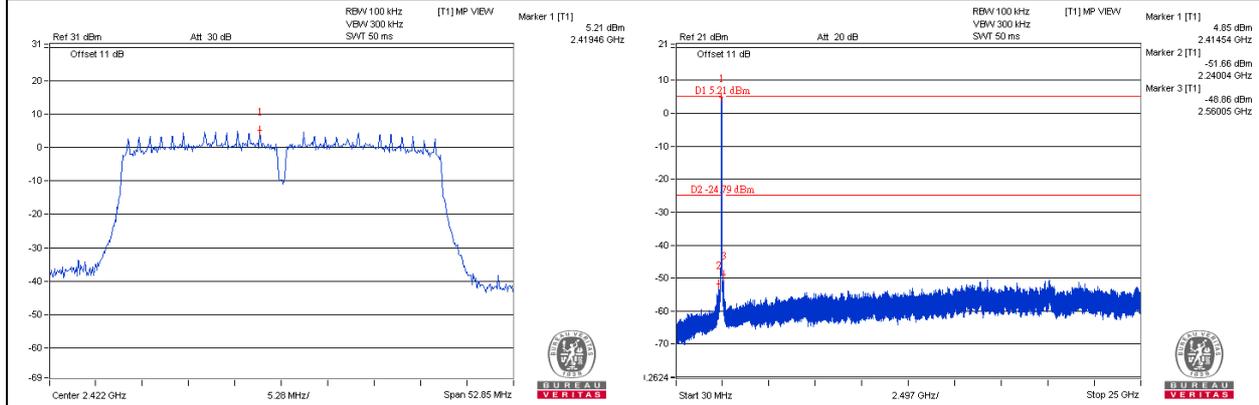


CH 6

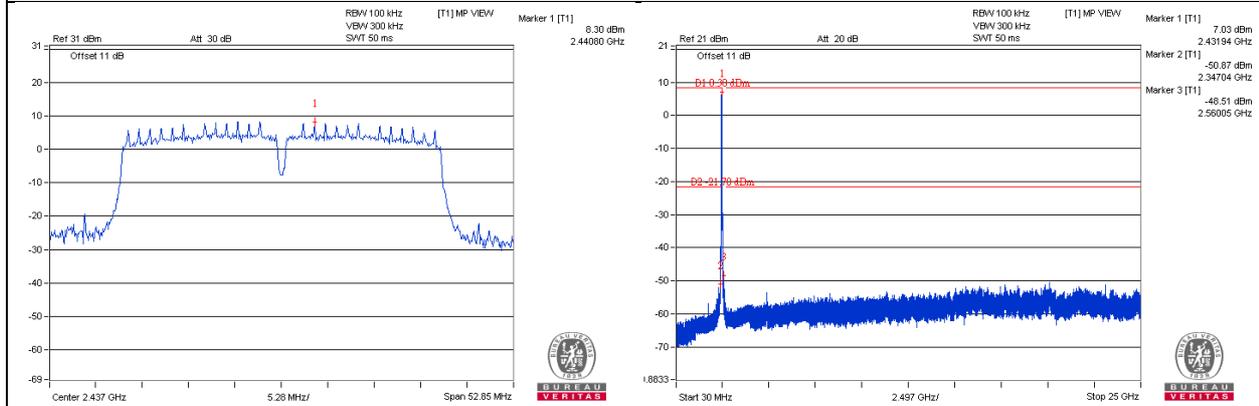

CH 9

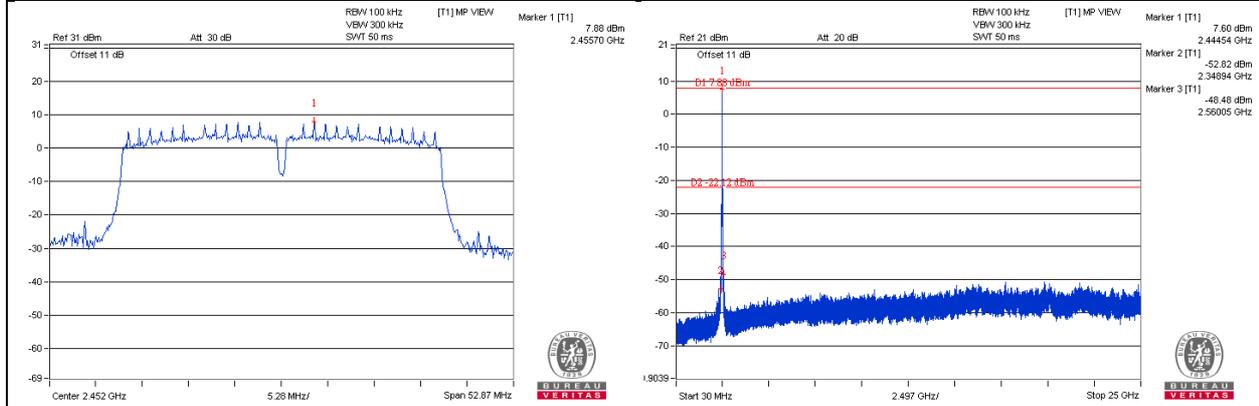


Beamforming NSS1 Mode  
802.11n (HT20)\_Chain 0

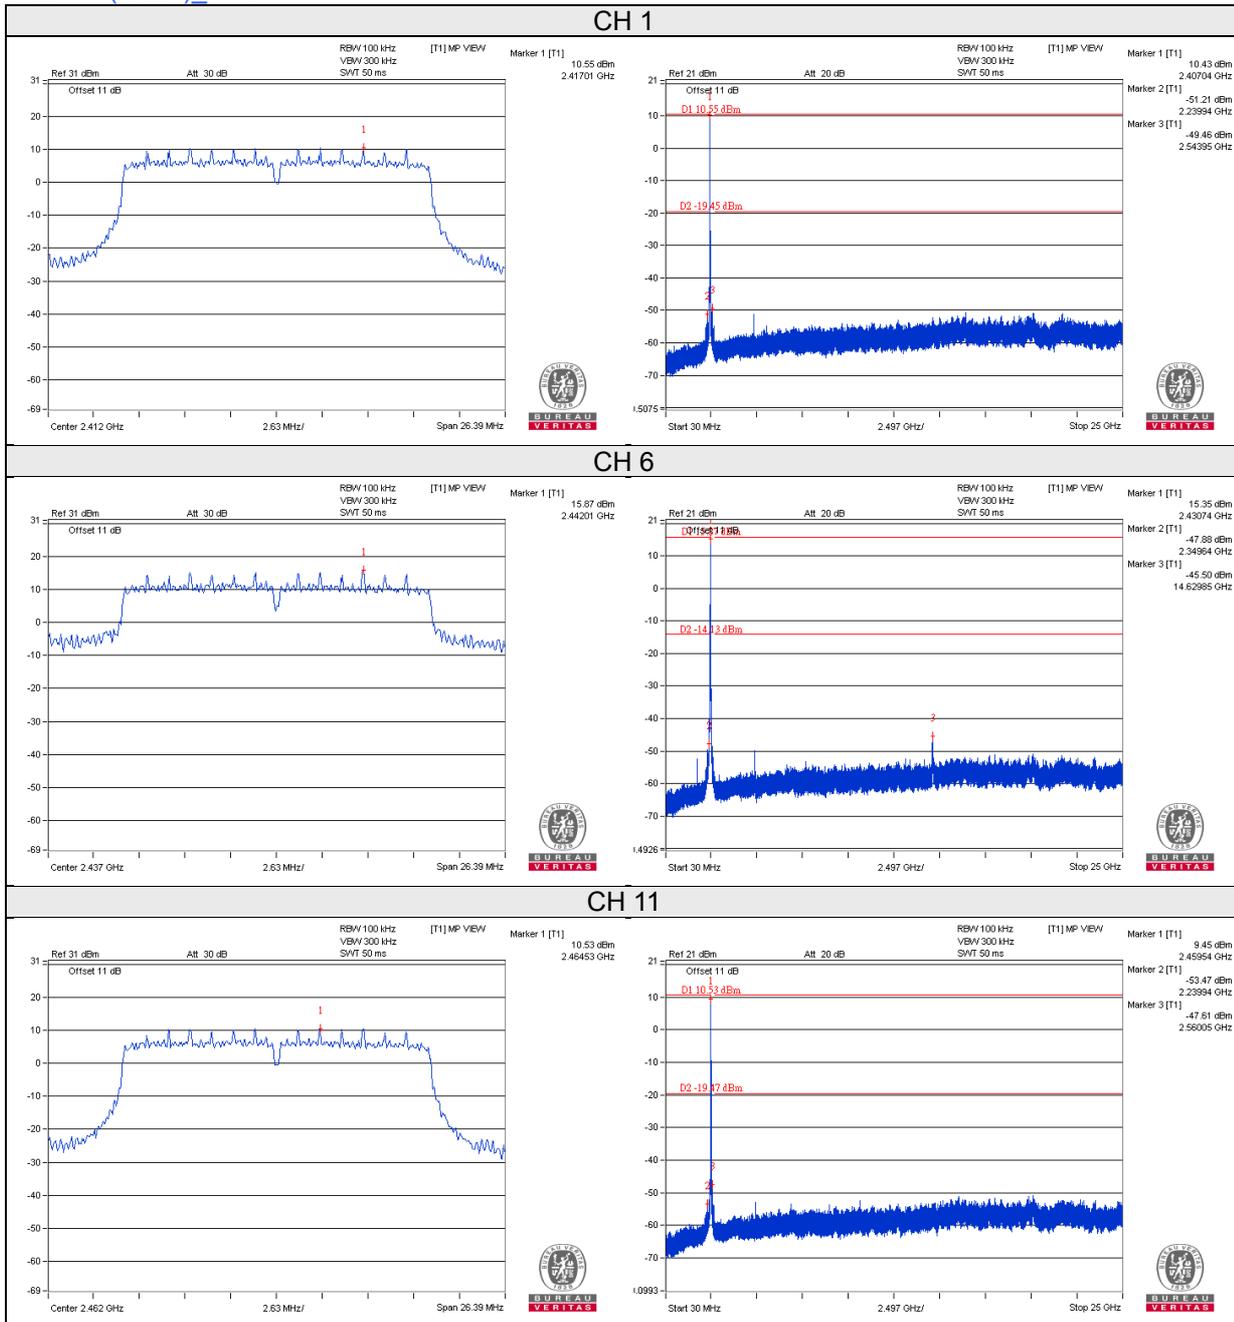


802.11n (HT20)\_Chain 1


CH 1

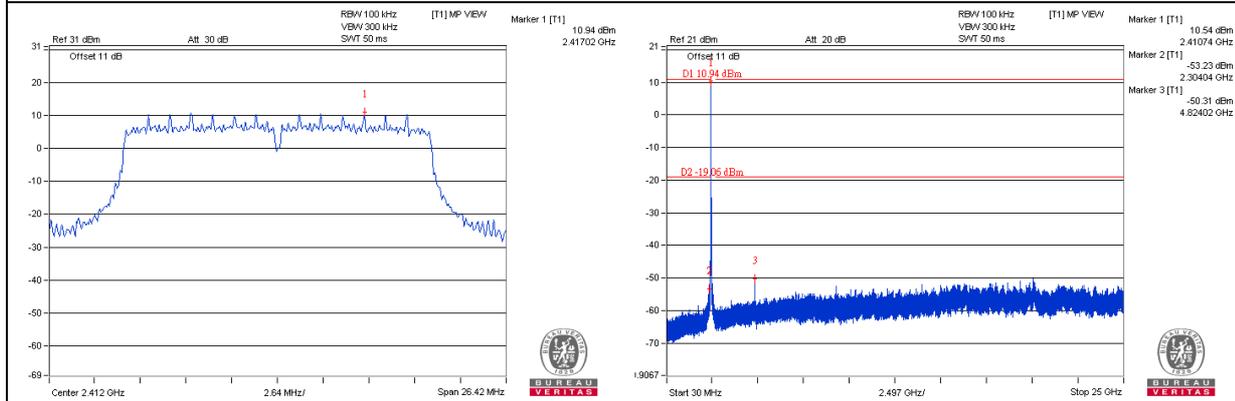

CH 6

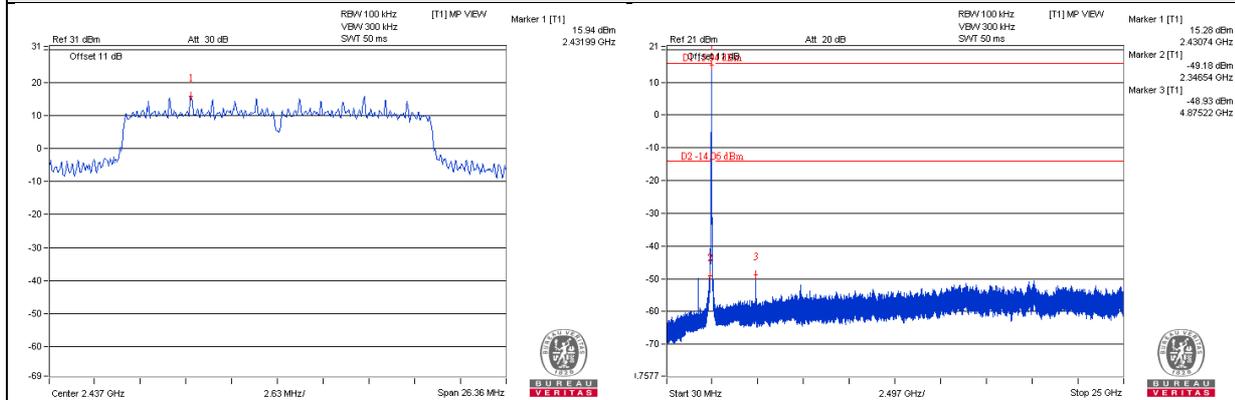


CH 11

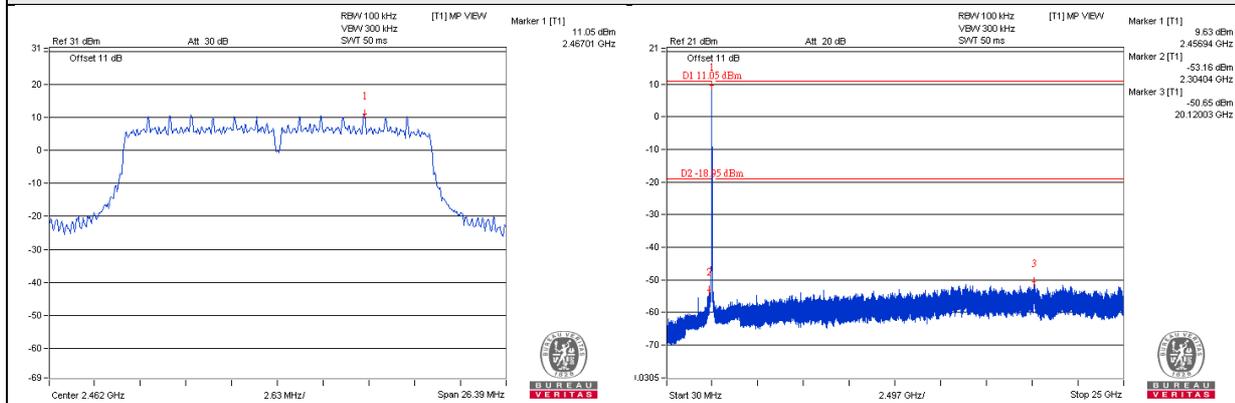


802.11n (HT40)\_Chain 0


CH 3

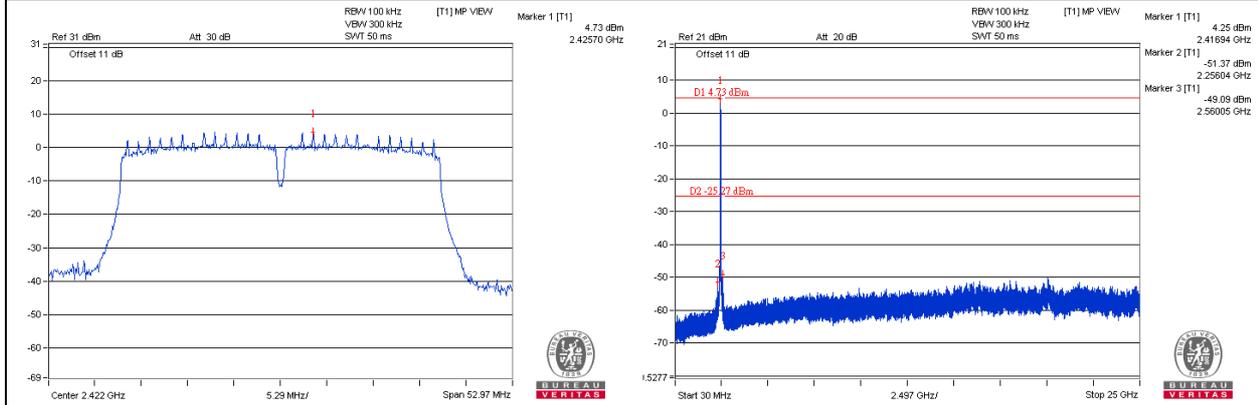

CH 6

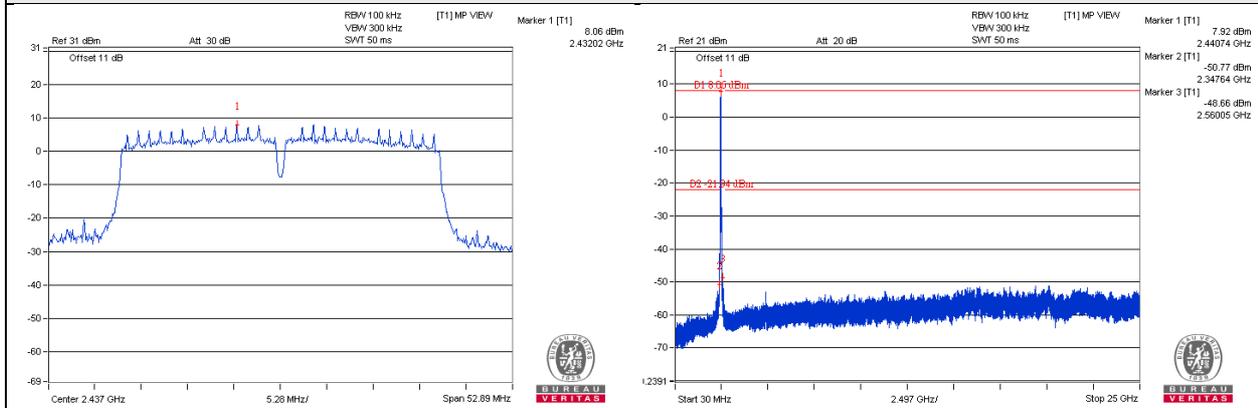


CH 9

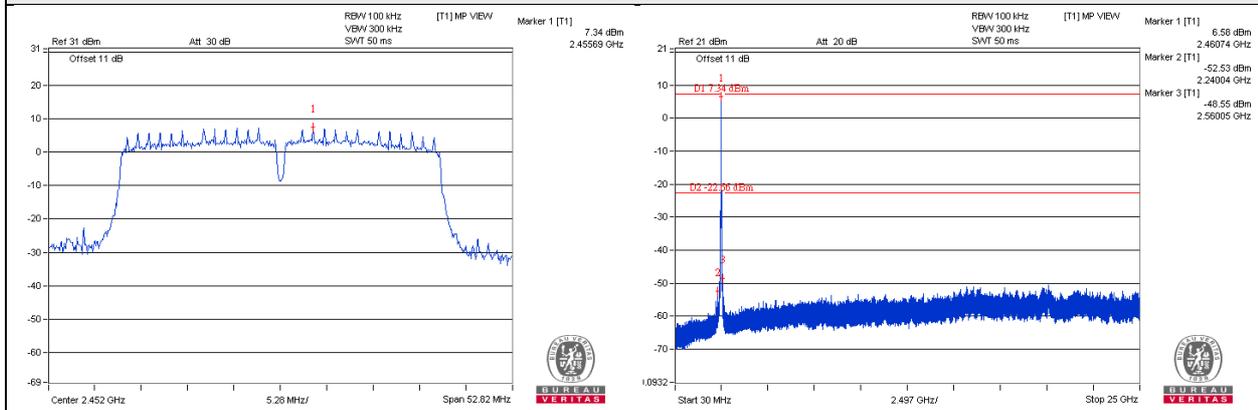


802.11n (HT40)\_Chain 1


CH 3

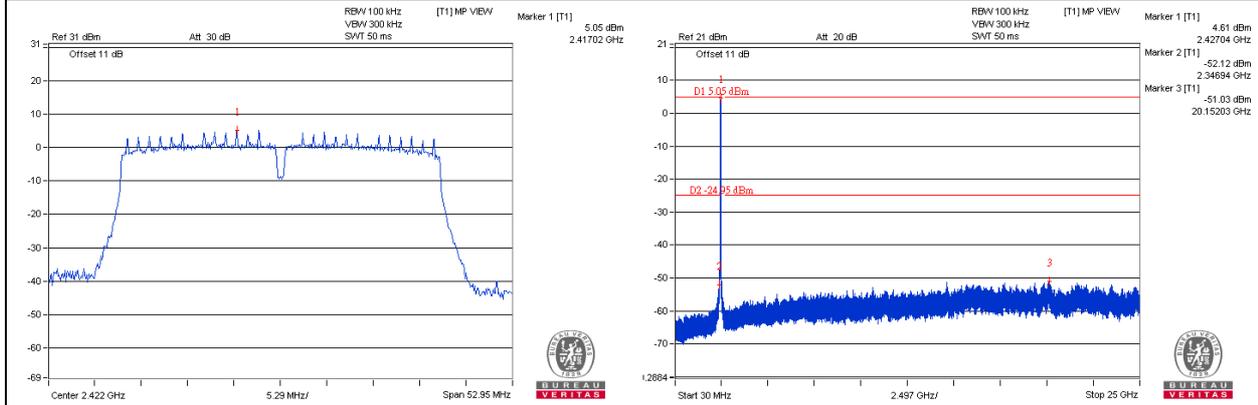

CH 6

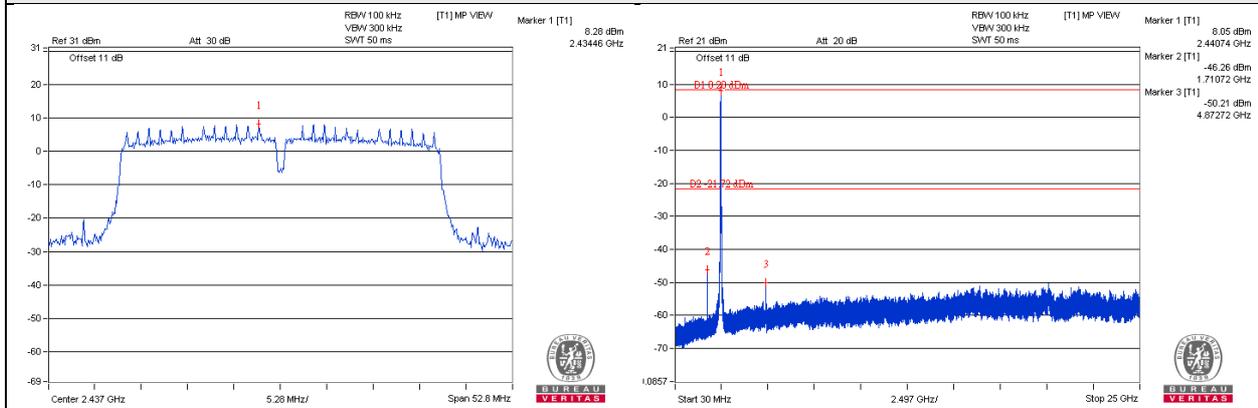

CH 9

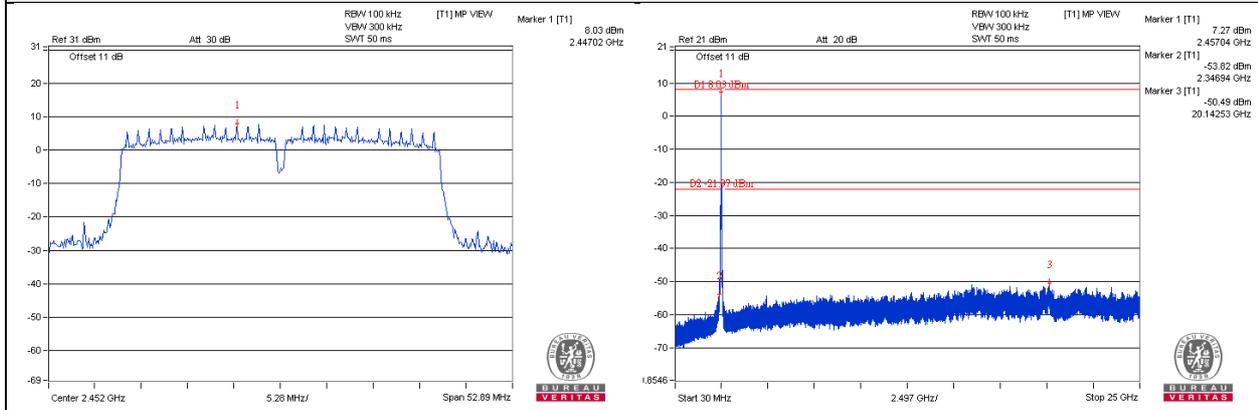

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---