

FCC Test Report

Report No.: RF190729C13

FCC ID: PY319300461

Test Model: CAX30

Received Date: Jul. 29, 2019

Test Date: Nov. 06, 2019 ~ Mar. 07, 2020

Issued Date: Mar. 16, 2020

Applicant: NETGEAR, Inc.

Address: 350 East Plumeria Drive San Jose, CA 95134

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN

FCC Registration / 788550 / TW0003
Designation Number:



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. This report should not be used by the client to claim and endorsement by TAF.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	13
3.5 General Description of Applied Standards and References	13
4 Test Types and Results	14
4.1 Radiated Emission and Bandedge Measurement	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement	14
4.1.2 Test Instruments	15
4.1.3 Test Procedures	16
4.1.4 Deviation from Test Standard	16
4.1.5 Test Setup	17
4.1.6 EUT Operating Conditions	18
4.1.7 Test Results	19
4.2 Conducted Emission Measurement	33
4.2.1 Limits of Conducted Emission Measurement	33
4.2.2 Test Instruments	33
4.2.3 Test Procedures	34
4.2.4 Deviation from Test Standard	34
4.2.5 Test Setup	34
4.2.6 EUT Operating Conditions	34
4.2.7 Test Results	35
4.3 6dB Bandwidth Measurement	37
4.3.1 Limits of 6dB Bandwidth Measurement	37
4.3.2 Test Setup	37
4.3.3 Test Instruments	37
4.3.4 Test Procedure	37
4.3.5 Deviation from Test Standard	37
4.3.6 EUT Operating Conditions	37
4.3.7 Test Result	38
4.4 Conducted Output Power Measurement	40
4.4.1 Limits of Conducted Output Power Measurement	40
4.4.2 Test Setup	40
4.4.3 Test Instruments	40
4.4.4 Test Procedures	40
4.4.5 Deviation from Test Standard	40
4.4.6 EUT Operating Conditions	40
4.4.7 Test Results	41
4.5 Power Spectral Density Measurement	44
4.5.1 Limits of Power Spectral Density Measurement	44
4.5.2 Test Setup	44
4.5.3 Test Instruments	44
4.5.4 Test Procedure	44
4.5.5 Deviation from Test Standard	44
4.5.6 EUT Operating Condition	44

4.5.7 Test Results	45
4.6 Conducted Out of Band Emission Measurement.....	48
4.6.1 Limits of Conducted Out of Band Emission Measurement	48
4.6.2 Test Setup.....	48
4.6.3 Test Instruments	48
4.6.4 Test Procedure	48
4.6.5 Deviation from Test Standard	48
4.6.6 EUT Operating Condition	48
4.6.7 Test Results	48
Annex A- Band Edge Measurement.....	61
5 Pictures of Test Arrangements.....	70
Appendix – Information of the Testing Laboratories	71

Release Control Record

Issue No.	Description	Date Issued
RF190729C13	Original release	Mar. 16, 2020

1 Certificate of Conformity

Product: AX2700 WiFi Cable Modem Router

Brand: Netgear

Test Model: CAX30

Sample Status: Engineering sample

Applicant: NETGEAR, Inc.

Test Date: Nov. 06, 2019 ~ Mar. 07, 2020

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** Mar. 16, 2020
Celine Chou / Senior Specialist

Approved by : Bruce Chen , **Date:** Mar. 16, 2020
Bruce Chen / Senior Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -18.44dB at 0.15000MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.3dB at 2483.50MHz and 2390.00MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is IPEX not a standard connector.

Note:

- For 2.4G band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.79 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.63 dB
	200MHz ~ 1000MHz	3.64 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AX2700 WiFi Cable Modem Router
Brand	Netgear
Test Model	CAX30
Sample Status	Engineering sample
Power Supply Rating	12Vdc from adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM for OFDMA
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 450Mbps 802.11ac: up to 600Mbps 802.11ax: up to 861Mbps
Operating Frequency	2412 ~ 2462MHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20), 802.11n (VHT20), 802.11ax (HE20): 11 802.11n (HT40), 802.11n (VHT40), 802.11ax (HE40): 7
Output Power	CDD Mode: 931.489mW Beamforming Mode: 842.965mW
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	Adapter
Cable Supplied	1.0m shielded Ethernet cable without core

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides 3 completed transmitters and 3 receivers.

Modulation Mode	Beamforming Mode	TX Function
802.11b	Not Support	3TX
802.11g	Not Support	3TX
802.11n (HT20)	Support	3TX
802.11n (HT40)	Support	3TX
802.11n (VHT20)	Support	3TX
802.11n (VHT40)	Support	3TX
802.11ax (HE20)	Support	3TX
802.11ax (HE40)	Support	3TX

* The bandwidth and modulation are similar for HT20/HT40 on 802.11n mode and VHT20/VHT40 on 802.11n mode and HE20/HE40 on 802.11ax mode. Therefore the investigated worst case is the representative mode in test report. (Final test mode refer section 3.2.1)

* For 802.11n and 802.11ac, CDD mode and Beamforming mode are presented in power output test item. For other test items, CDD mode is the worst case for final tests after pretesting.

2. The EUT consumes power from the following adapters.

Adapter 1	
Brand	NETGEAR
Model	2ABN042F 1
Input Power	100-120Vac, 50/60Hz, 1.3A
Output Power	12Vdc, 3.5A
Power Line	1.8m cable without core attached on adapter

Adapter 2	
Brand	NETGEAR
Model	AD2150F10
Input Power	100-120Vac, 50/60Hz, 1.0A
Output Power	12Vdc, 3.5A
Power Line	1.8m cable without core attached on adapter

* Adapter 1 was chosen for final test and presented in the test report.

3. The following antennas were provided to the EUT.

Ant. Type	PIFA		
Connector Type	IPEX		
Directional Antenna Gain (dBi)			
Item	2.4G	UNII-1	UNII-3
-	6.68	6.34	6.79

* For detailed antenna information, please refer to the Operational Description-Antenna Specification report.

* The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), 802.11n (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), 802.11n (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.
2. Radiated emission test (below 1GHz) and power line conducted emission test items chosen the worst maximum power.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
-	802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11g	1 to 11	6	OFDM	BPSK	6.0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11g	1 to 11	6	OFDM	BPSK	6.0

Conducted Emission Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (VHT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (VHT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
-	802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
-	802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Bandwidth, Power Spectral Density and Conducted Out of Band Emission Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
-	802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE _≥ 1G	25 deg. C, 70% RH	120Vac, 60Hz	Noah Chang
RE _{<} 1G	25 deg. C, 70% RH	120Vac, 60Hz	Noah Chang
PLC	25 deg. C, 75% RH	120Vac, 60Hz	Noah Chang
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Ivan Tseng

3.3 Duty Cycle of Test Signal


Duty cycle of test signal is < 98%, duty factor is required.

802.11b: Duty cycle = $12.395/13.065 = 0.949$, Duty factor = $10 * \log(1/0.949) = 0.23$

802.11g: Duty cycle = $2.063/2.175 = 0.949$, Duty factor = $10 * \log(1/0.949) = 0.23$

802.11ax (HE20): Duty cycle = $1.480/1.522 = 0.972$, Duty factor = $10 * \log(1/0.972) = 0.12$

802.11ax (HE40): Duty cycle = $0.764/0.806 = 0.948$, Duty factor = $10 * \log(1/0.948) = 0.23$

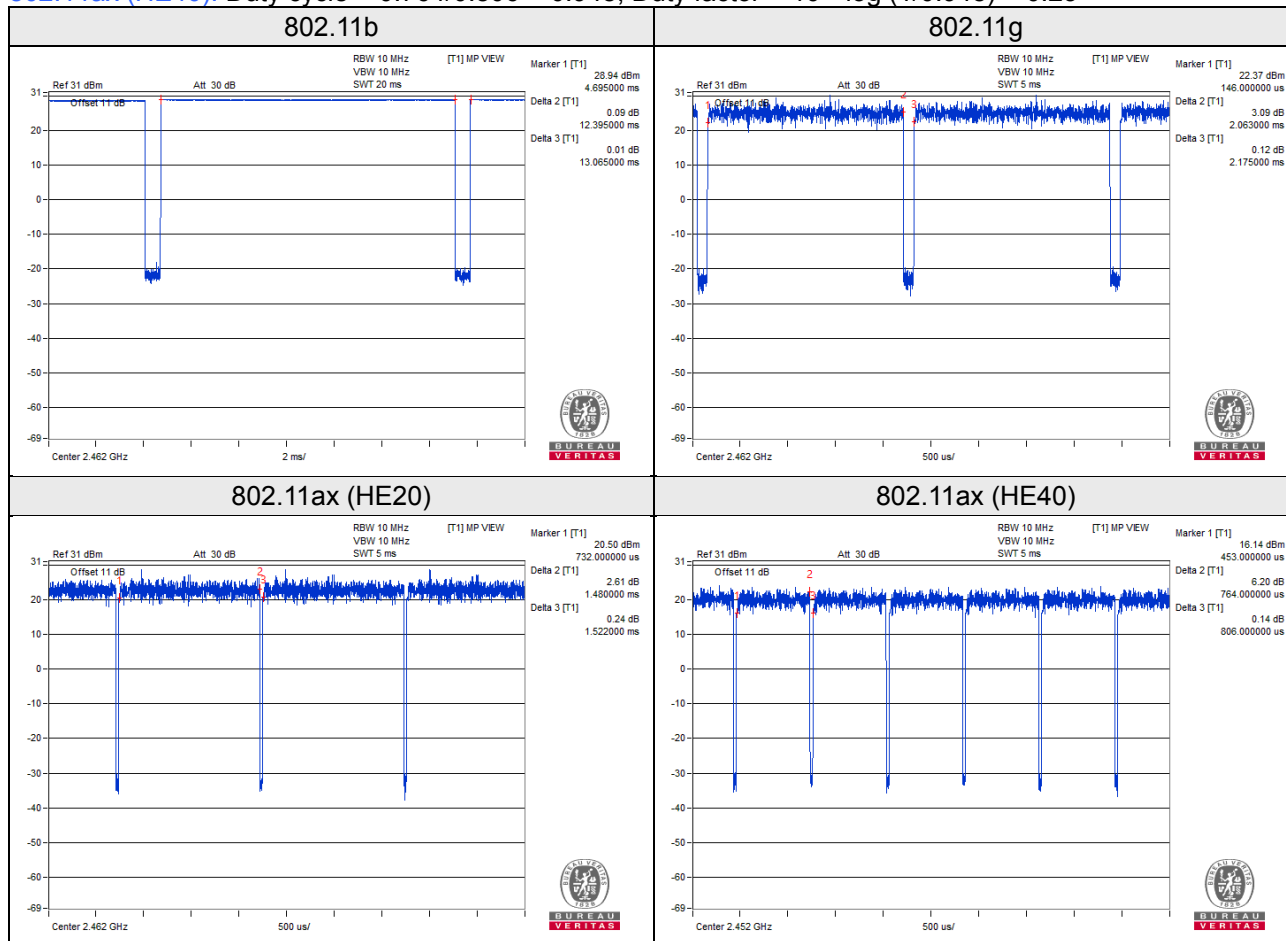

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	Lenovo	81A4	YD02TWF5	PPD-QCNFA435	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	LAN	1	5	N	0	RJ45, Cat5e

3.4.1 Configuration of System under Test

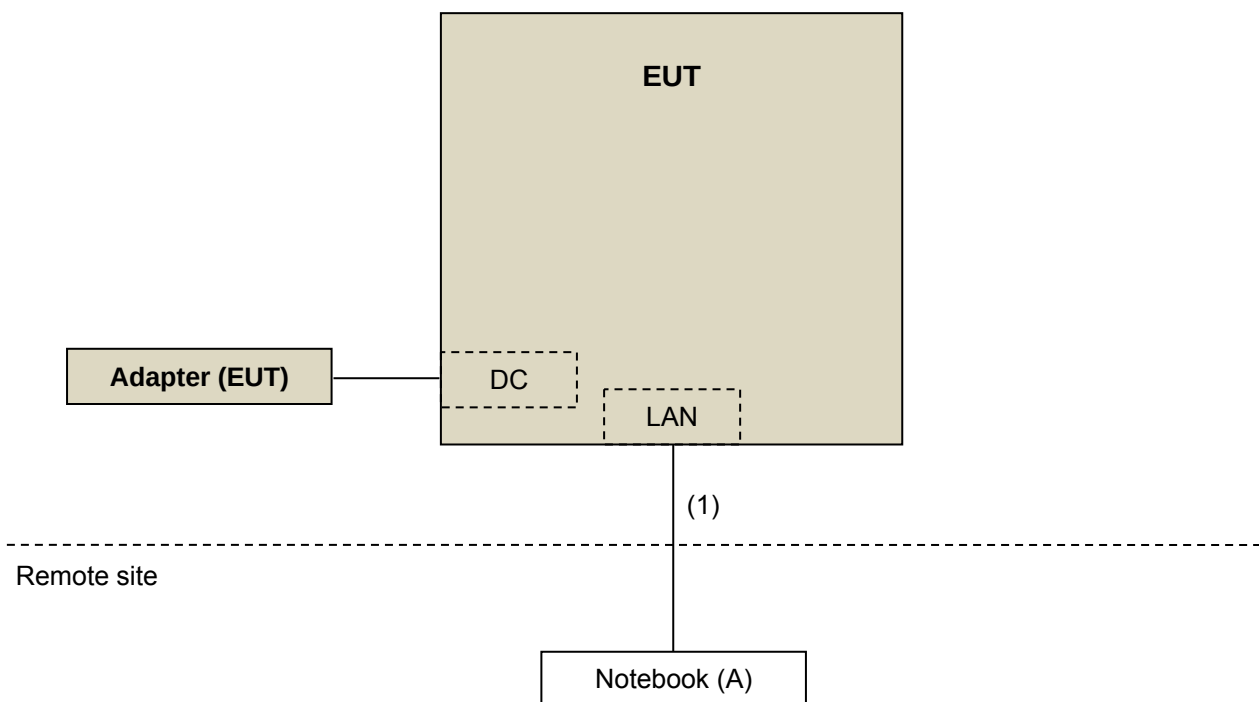

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Jan. 03, 2019	Jan. 02, 2020
			Dec. 31, 2019	Dec. 30, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Sep. 23, 2019	Sep. 22, 2020
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Dec. 12, 2018	Dec. 11, 2019
			Nov. 11, 2019	Nov. 10, 2020
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Nov. 25, 2018	Nov. 24, 2019
			Nov. 24, 2019	Nov. 23, 2020
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 25, 2018	Nov. 24, 2019
			Nov. 24, 2019	Nov. 23, 2020
Loop Antenna TESEQ	HLA 6121	45745	Jul. 01, 2019	Jun. 30, 2020
Preamplifier Agilent (Below 1GHz)	8447D	2944A10631	Jul. 11, 2019	Jul. 10, 2020
Preamplifier KEYSIGHT (Above 1GHz)	83017A	MY53270295	Jun. 11, 2019	Jun. 10, 2020
RF Coaxial Cable WORKEN With 5dB PAD	8D-FB	Cable-CH4-01	Aug. 20, 2019	Aug. 19, 2020
RF Coaxial Cable EMCI	EMC102-KM-KM-3000	150929	Aug. 20, 2019	Aug. 19, 2020
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	Aug. 20, 2019	Aug. 19, 2020
RF signal cable HUBER+SUHNER	SUCOFLEX 104	MY 13380+295012/04	Jul. 11, 2019	Jul. 10, 2020
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03 (250724)	Jul. 11, 2019	Jul. 10, 2020
Software BV ADT	ADT_Radiated_V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021703	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Pre-amplifier (18GHz-40GHz) EMC	EMC184045B	980175	Sep. 05, 2019	Sep. 04, 2020
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55190004/MY55190007/MY55210005	Jul. 15, 2019	Jul. 14, 2020

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 4.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz. (802.11b: RBW = 1MHz, VBW = 1kHz; 802.11g: RBW = 1MHz, VBW = 1kHz; 802.11ax (HE20): RBW = 1MHz, VBW = 1kHz; 802.11ax (HE40): RBW = 1MHz, VBW = 3kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

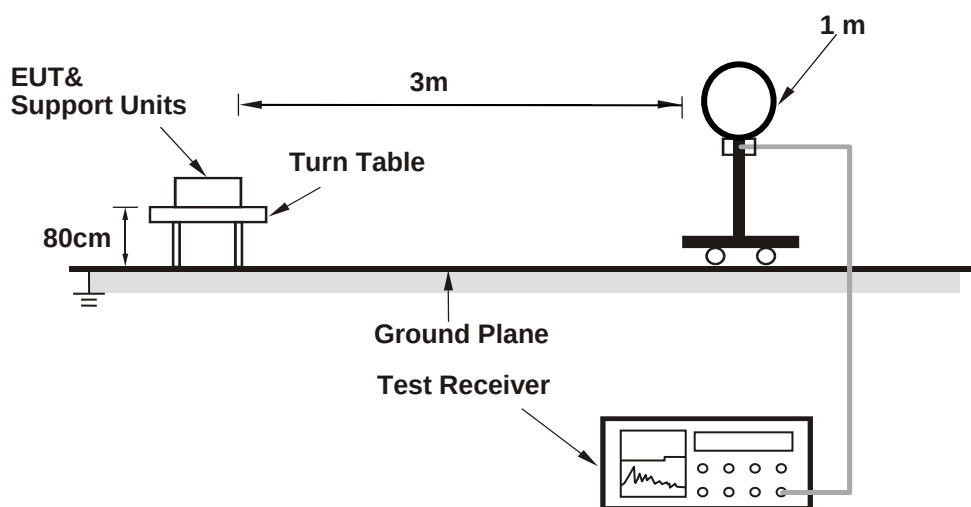

For Radiated emission 30MHz to 1GHz

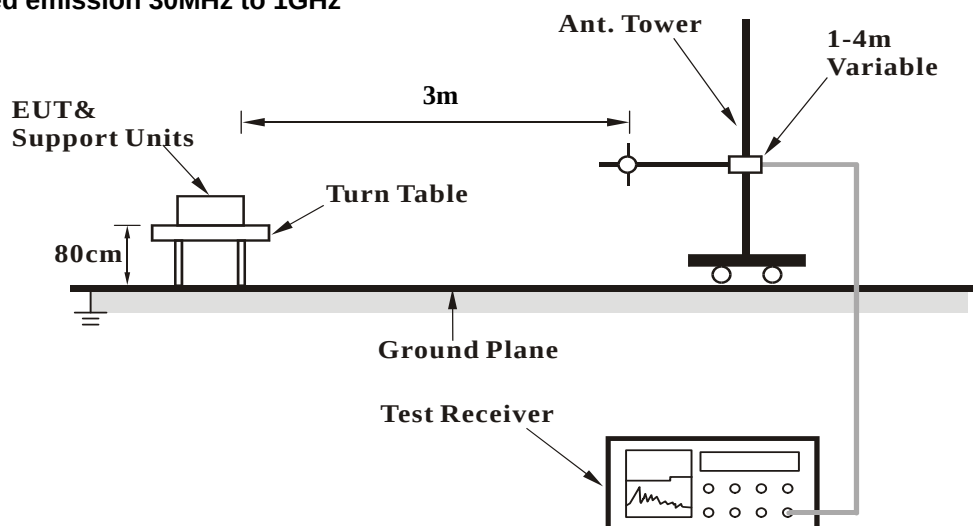

For Radiated emission above 1GHz

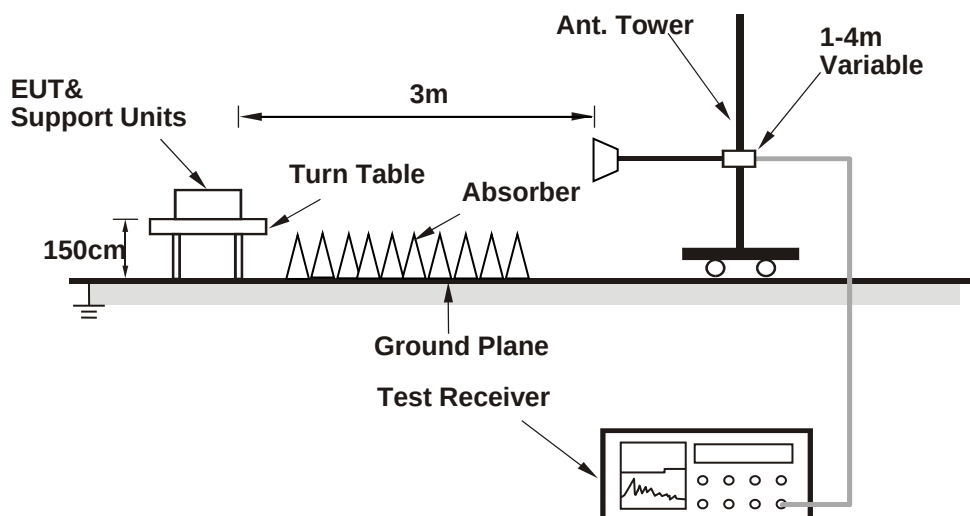

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".

4.1.7 Test Results

Above 1GHz Data:

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.7 PK	74.0	-11.3	2.15 H	118	29.2	33.5
2	2390.00	47.0 AV	54.0	-7.0	2.15 H	118	13.5	33.5
3	*2412.00	115.9 PK			1.05 H	126	82.4	33.5
4	*2412.00	112.1 AV			1.05 H	126	78.6	33.5
5	4824.00	48.8 PK	74.0	-25.2	2.15 H	200	39.0	9.8
6	4824.00	38.3 AV	54.0	-15.7	2.15 H	200	28.5	9.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.5 PK	74.0	-8.5	2.39 V	67	34.0	31.5
2	2390.00	53.5 AV	54.0	-0.5	2.39 V	67	22.0	31.5
3	*2412.00	120.9 PK			2.39 V	67	89.5	31.4
4	*2412.00	117.1 AV			2.39 V	67	85.7	31.4
5	4824.00	47.9 PK	74.0	-26.1	1.55 V	199	40.6	7.3
6	4824.00	41.8 AV	54.0	-12.2	1.55 V	199	34.5	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	118.4 PK			1.00 H	118	84.8	33.6
2	*2437.00	115.0 AV			1.00 H	118	81.4	33.6
3	4874.00	48.7 PK	74.0	-25.3	1.85 H	132	38.9	9.8
4	4874.00	40.0 AV	54.0	-14.0	1.85 H	132	30.2	9.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	123.4 PK			2.22 V	92	92.0	31.4
2	*2437.00	120.0 AV			2.22 V	92	88.6	31.4
3	4874.00	47.9 PK	74.0	-26.1	2.09 V	86	40.5	7.4
4	4874.00	41.7 AV	54.0	-12.3	2.09 V	86	34.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.7 PK			1.21 H	128	81.1	33.6
2	*2462.00	111.4 AV			1.21 H	128	77.8	33.6
3	2483.50	62.2 PK	74.0	-11.8	1.21 H	128	28.5	33.7
4	2483.50	47.3 AV	54.0	-6.7	1.21 H	128	13.6	33.7
5	4924.00	50.0 PK	74.0	-24.0	1.85 H	219	40.2	9.8
6	4924.00	38.3 AV	54.0	-15.7	1.85 H	219	28.5	9.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	119.7 PK			2.79 V	81	88.2	31.5
2	*2462.00	116.4 AV			2.79 V	81	84.9	31.5
3	2483.50	65.5 PK	74.0	-8.5	2.79 V	81	34.0	31.5
4	2483.50	53.7 AV	54.0	-0.3	2.79 V	81	22.2	31.5
5	4924.00	47.7 PK	74.0	-26.3	1.99 V	163	40.3	7.4
6	4924.00	41.6 AV	54.0	-12.4	1.99 V	163	34.2	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.8 PK	74.0	-7.2	1.00 H	131	33.3	33.5
2	2390.00	47.4 AV	54.0	-6.6	1.00 H	131	13.9	33.5
3	*2412.00	113.1 PK			1.00 H	131	79.6	33.5
4	*2412.00	103.9 AV			1.00 H	131	70.4	33.5
5	4824.00	47.8 PK	74.0	-26.2	2.66 H	230	38.0	9.8
6	4824.00	34.8 AV	54.0	-19.2	2.66 H	230	25.0	9.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.9 PK	74.0	-1.1	2.10 V	97	41.4	31.5
2	2390.00	53.7 AV	54.0	-0.3	2.10 V	97	22.2	31.5
3	*2412.00	118.1 PK			2.10 V	97	86.7	31.4
4	*2412.00	108.9 AV			2.10 V	97	77.5	31.4
5	4824.00	45.4 PK	74.0	-28.6	1.00 V	300	38.1	7.3
6	4824.00	32.4 AV	54.0	-21.6	1.00 V	300	25.1	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	117.4 PK			1.05 H	115	83.8	33.6
2	*2437.00	108.0 AV			1.05 H	115	74.4	33.6
3	4874.00	48.3 PK	74.0	-25.7	2.11 H	185	38.5	9.8
4	4874.00	35.1 AV	54.0	-18.9	2.11 H	185	25.3	9.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	122.4 PK			1.44 V	96	91.0	31.4
2	*2437.00	113.0 AV			1.44 V	96	81.6	31.4
3	4874.00	46.1 PK	74.0	-27.9	2.11 V	94	38.7	7.4
4	4874.00	33.0 AV	54.0	-21.0	2.11 V	94	25.6	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.6 PK			1.00 H	117	80.0	33.6
2	*2462.00	104.3 AV			1.00 H	117	70.7	33.6
3	2483.50	66.2 PK	74.0	-7.8	1.00 H	117	32.5	33.7
4	2483.50	47.2 AV	54.0	-6.8	1.00 H	117	13.5	33.7
5	4924.00	48.0 PK	74.0	-26.0	2.06 H	211	38.2	9.8
6	4924.00	35.0 AV	54.0	-19.0	2.06 H	211	25.2	9.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	118.6 PK			2.18 V	109	87.1	31.5
2	*2462.00	109.3 AV			2.18 V	109	77.8	31.5
3	2483.50	72.6 PK	74.0	-1.4	2.18 V	109	41.1	31.5
4	2483.50	53.5 AV	54.0	-0.5	2.18 V	109	22.0	31.5
5	4924.00	45.9 PK	74.0	-28.1	1.57 V	104	38.5	7.4
6	4924.00	32.8 AV	54.0	-21.2	1.57 V	104	25.4	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11ax (HE20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.1 PK	74.0	-7.9	1.00 H	118	32.6	33.5
2	2390.00	47.2 AV	54.0	-6.8	1.00 H	118	13.7	33.5
3	*2412.00	112.2 PK			1.00 H	118	78.7	33.5
4	*2412.00	101.2 AV			1.00 H	118	67.7	33.5
5	4824.00	47.3 PK	74.0	-26.7	2.18 H	52	37.5	9.8
6	4824.00	34.6 AV	54.0	-19.4	2.18 H	52	24.8	9.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.5 PK	74.0	-0.5	2.10 V	102	42.0	31.5
2	2390.00	51.5 AV	54.0	-2.5	2.10 V	102	20.0	31.5
3	*2412.00	117.2 PK			2.10 V	102	85.8	31.4
4	*2412.00	106.2 AV			2.10 V	102	74.8	31.4
5	4824.00	45.3 PK	74.0	-28.7	1.88 V	244	38.0	7.3
6	4824.00	32.3 AV	54.0	-21.7	1.88 V	244	25.0	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	120.0 PK			1.05 H	120	86.4	33.6
2	*2437.00	108.0 AV			1.05 H	120	74.4	33.6
3	2483.50	66.8 PK	74.0	-7.2	1.05 H	120	33.1	33.7
4	2483.50	47.1 AV	54.0	-6.9	1.05 H	120	13.4	33.7
5	4874.00	47.9 PK	74.0	-26.1	1.08 H	209	38.1	9.8
6	4874.00	34.7 AV	54.0	-19.3	1.08 H	209	24.9	9.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	125.2 PK			1.89 V	105	93.8	31.4
2	*2437.00	113.1 AV			1.89 V	105	81.7	31.4
3	2483.50	71.9 PK	74.0	-2.1	1.89 V	105	40.4	31.5
4	2483.50	52.4 AV	54.0	-1.6	1.89 V	105	20.9	31.5
5	4874.00	45.7 PK	74.0	-28.3	2.49 V	94	38.3	7.4
6	4874.00	32.2 AV	54.0	-21.8	2.49 V	94	24.8	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.3 PK			1.85 H	120	79.7	33.6
2	*2462.00	101.2 AV			1.85 H	120	67.6	33.6
3	2483.50	68.8 PK	74.0	-5.2	1.85 H	120	35.1	33.7
4	2483.50	47.7 AV	54.0	-6.3	1.85 H	120	14.0	33.7
5	4924.00	48.3 PK	74.0	-25.7	2.19 H	266	38.5	9.8
6	4924.00	35.0 AV	54.0	-19.0	2.19 H	266	25.2	9.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	118.3 PK			2.07 V	99	86.8	31.5
2	*2462.00	106.2 AV			2.07 V	99	74.7	31.5
3	2483.50	73.6 PK	74.0	-0.4	2.07 V	99	42.1	31.5
4	2483.50	51.3 AV	54.0	-2.7	2.07 V	99	19.8	31.5
5	4924.00	45.8 PK	74.0	-28.2	2.48 V	204	38.4	7.4
6	4924.00	32.5 AV	54.0	-21.5	2.48 V	204	25.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11ax (HE40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.0 PK	74.0	-12.0	1.00 H	119	28.5	33.5
2	2390.00	47.3 AV	54.0	-6.7	1.00 H	119	13.8	33.5
3	*2422.00	109.6 PK			1.00 H	119	76.0	33.6
4	*2422.00	97.3 AV			1.00 H	119	63.7	33.6
5	4844.00	48.5 PK	74.0	-25.5	2.09 H	216	38.7	9.8
6	4844.00	35.1 AV	54.0	-18.9	2.09 H	216	25.3	9.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.8 PK	74.0	-7.2	2.02 V	104	35.3	31.5
2	2390.00	53.7 AV	54.0	-0.3	2.02 V	104	22.2	31.5
3	*2422.00	114.6 PK			2.02 V	104	83.2	31.4
4	*2422.00	102.3 AV			2.02 V	104	70.9	31.4
5	4844.00	45.8 PK	74.0	-28.2	1.55 V	300	38.5	7.3
6	4844.00	32.3 AV	54.0	-21.7	1.55 V	300	25.0	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.2 PK	74.0	-7.8	1.00 H	115	32.7	33.5
2	2390.00	47.2 AV	54.0	-6.8	1.00 H	115	13.7	33.5
3	*2437.00	112.7 PK			1.00 H	115	79.1	33.6
4	*2437.00	101.1 AV			1.00 H	115	67.5	33.6
5	2483.50	66.2 PK	74.0	-7.8	1.00 H	115	32.5	33.7
6	2483.50	47.4 AV	54.0	-6.6	1.00 H	115	13.7	33.7
7	4874.00	47.6 PK	74.0	-26.4	1.85 H	156	37.8	9.8
8	4874.00	34.7 AV	54.0	-19.3	1.85 H	156	24.9	9.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.4 PK	74.0	-2.6	1.91 V	105	39.9	31.5
2	2390.00	53.7 AV	54.0	-0.3	1.91 V	105	22.2	31.5
3	*2437.00	117.7 PK			1.91 V	105	86.3	31.4
4	*2437.00	106.1 AV			1.91 V	105	74.7	31.4
5	2483.50	72.5 PK	74.0	-1.5	1.91 V	105	41.0	31.5
6	2483.50	53.7 AV	54.0	-0.3	1.91 V	105	22.2	31.5
7	4874.00	44.5 PK	74.0	-29.5	2.11 V	95	37.1	7.4
8	4874.00	31.9 AV	54.0	-22.1	2.11 V	95	24.5	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	109.4 PK			1.05 H	115	75.9	33.5
2	*2452.00	97.8 AV			1.05 H	115	64.3	33.5
3	2483.50	63.2 PK	74.0	-10.8	1.05 H	115	29.5	33.7
4	2483.50	47.0 AV	54.0	-7.0	1.05 H	115	13.3	33.7
5	4904.00	48.3 PK	74.0	-25.7	1.33 H	188	38.4	9.9
6	4904.00	35.0 AV	54.0	-19.0	1.33 H	188	25.1	9.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	114.4 PK			2.05 V	89	83.0	31.4
2	*2452.00	102.8 AV			2.05 V	89	71.4	31.4
3	2483.50	67.4 PK	74.0	-6.6	2.05 V	89	35.9	31.5
4	2483.50	53.5 AV	54.0	-0.5	2.05 V	89	22.0	31.5
5	4904.00	46.0 PK	74.0	-28.0	1.05 V	155	38.5	7.5
6	4904.00	32.8 AV	54.0	-21.2	1.05 V	155	25.3	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Below 1GHz worst-case data:


802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	80.35	31.7 QP	40.0	-8.3	1.50 H	207	44.6	-12.9
2	103.64	33.0 QP	43.5	-10.5	1.50 H	344	45.6	-12.6
3	136.62	38.0 QP	43.5	-5.5	1.50 H	130	47.4	-9.4
4	216.18	34.7 QP	46.0	-11.3	1.50 H	344	45.9	-11.2
5	322.90	34.8 QP	46.0	-11.2	1.00 H	258	41.5	-6.7
6	932.19	39.7 QP	46.0	-6.3	1.00 H	109	31.9	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

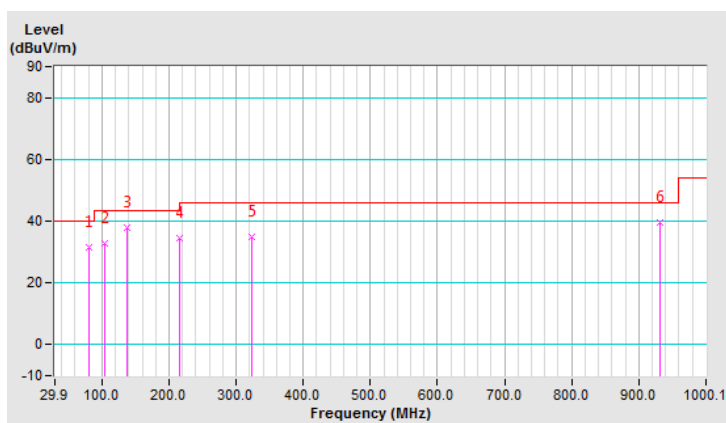


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	52.80	33.2 QP	40.0	-6.8	1.00 V	6	41.6	-8.4
2	156.03	35.4 QP	43.5	-8.1	1.00 V	326	44.0	-8.6
3	322.90	37.8 QP	46.0	-8.2	1.00 V	303	44.5	-6.7
4	676.05	42.8 QP	46.0	-3.2	1.49 V	310	41.1	1.7
5	858.45	36.5 QP	46.0	-9.5	1.00 V	254	30.4	6.1
6	939.95	37.5 QP	46.0	-8.5	1.49 V	61	29.6	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

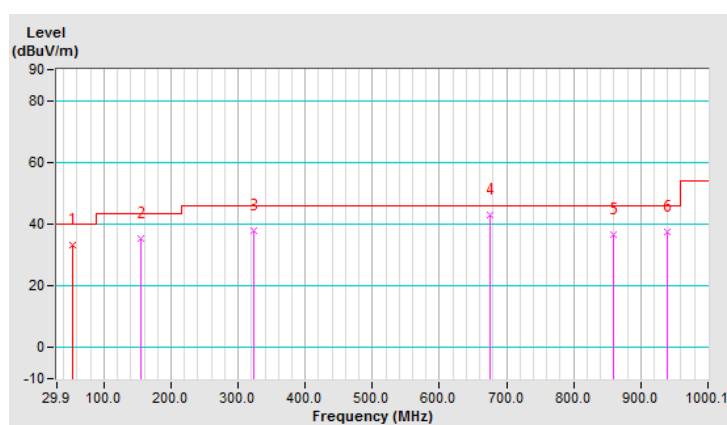

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 10, 2018	Dec. 09, 2019
			Dec. 11, 2019	Dec. 10, 2020
RF signal cable Woken	5D-FB	Cable-cond1-01	Sep. 05, 2019	Sep. 04, 2020
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 21, 2019	Feb. 20, 2020
			Feb. 20, 2020	Feb. 19, 2021
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 22, 2019	Aug. 21, 2020
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-12040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

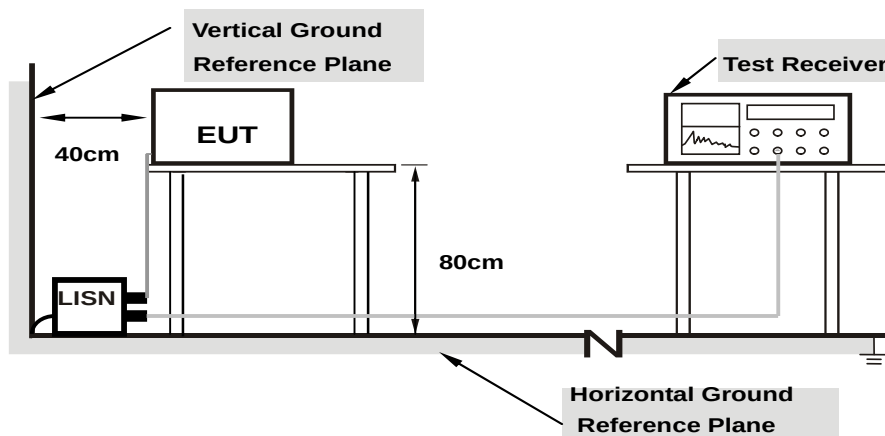

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results

Worst-case data:


802.11g

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.67	37.89	21.37	47.56	31.04	66.00	56.00	-18.44	-24.96
2	0.17000	9.67	34.51	19.16	44.18	28.83	64.96	54.96	-20.78	-26.13
3	0.21800	9.66	25.10	12.25	34.76	21.91	62.89	52.89	-28.13	-30.98
4	4.13400	9.84	20.55	12.71	30.39	22.55	56.00	46.00	-25.61	-23.45
5	5.31000	9.86	18.16	7.12	28.02	16.98	60.00	50.00	-31.98	-33.02
6	6.01400	9.87	17.54	5.45	27.41	15.32	60.00	50.00	-32.59	-34.68

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

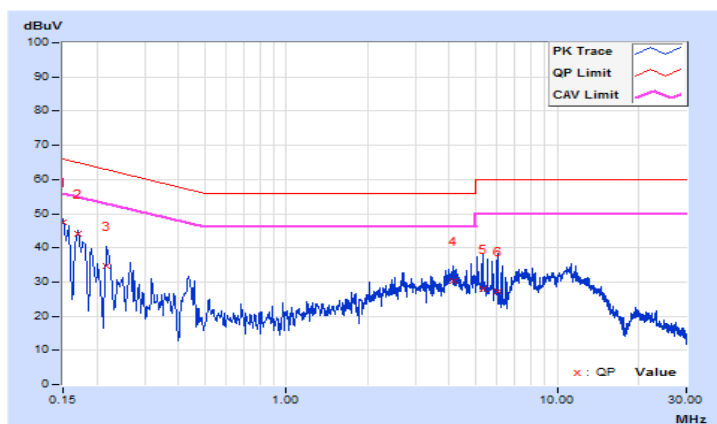


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	9.64	36.03	19.89	45.67	29.53	65.78	55.78	-20.11	-26.25
2	0.17800	9.64	31.08	15.94	40.72	25.58	64.58	54.58	-23.86	-29.00
3	0.21800	9.64	23.91	10.33	33.55	19.97	62.89	52.89	-29.34	-32.92
4	4.88600	9.82	17.08	8.23	26.90	18.05	56.00	46.00	-29.10	-27.95
5	5.59400	9.84	16.17	4.66	26.01	14.50	60.00	50.00	-33.99	-35.50
6	10.91400	9.92	19.65	12.71	29.57	22.63	60.00	50.00	-30.43	-27.37

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

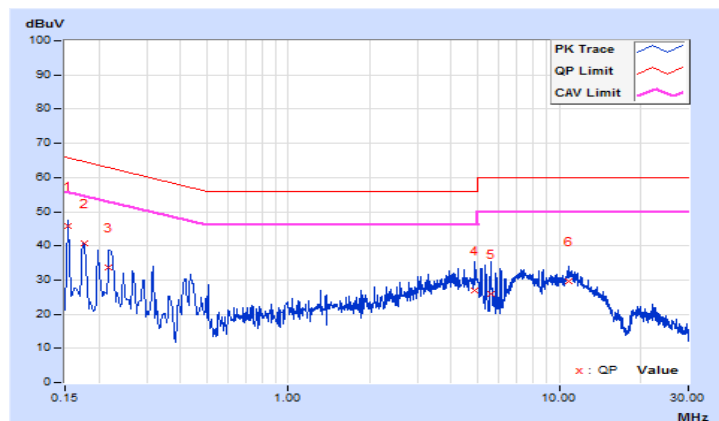


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
1	2412	7.09	7.08	7.07	0.5	Pass
6	2437	7.10	7.08	7.09	0.5	Pass
11	2462	7.06	7.09	7.08	0.5	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
1	2412	16.41	16.43	16.44	0.5	Pass
6	2437	16.41	16.42	16.41	0.5	Pass
11	2462	16.42	16.44	16.43	0.5	Pass

802.11ax (HE20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
1	2412	19.03	19.06	19.02	0.5	Pass
6	2437	19.02	19.05	18.96	0.5	Pass
11	2462	19.07	19.07	18.99	0.5	Pass

802.11ax (HE40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
3	2422	37.67	37.29	37.48	0.5	Pass
6	2437	37.72	37.45	37.49	0.5	Pass
9	2452	37.67	37.21	37.50	0.5	Pass

Spectrum Plot of Worst Value


802.11b

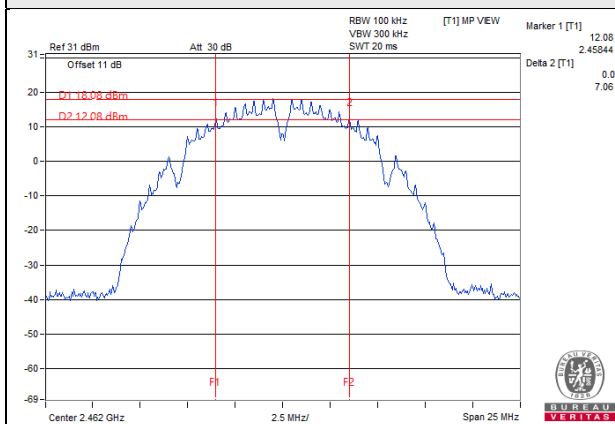


802.11g

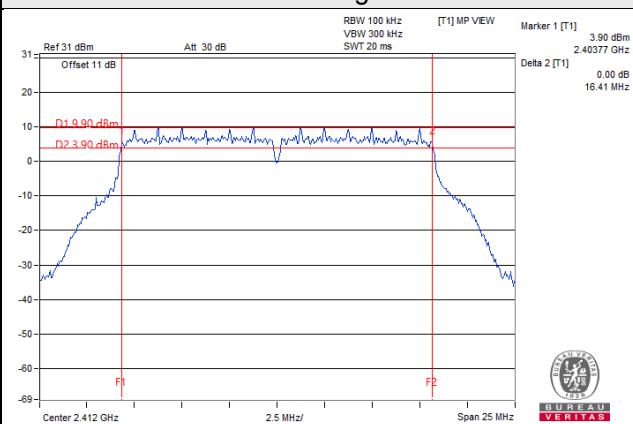

802.11ax (HE20)

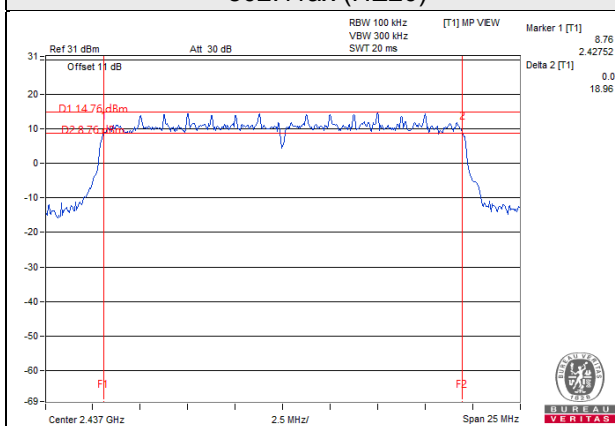

802.11ax (HE40)

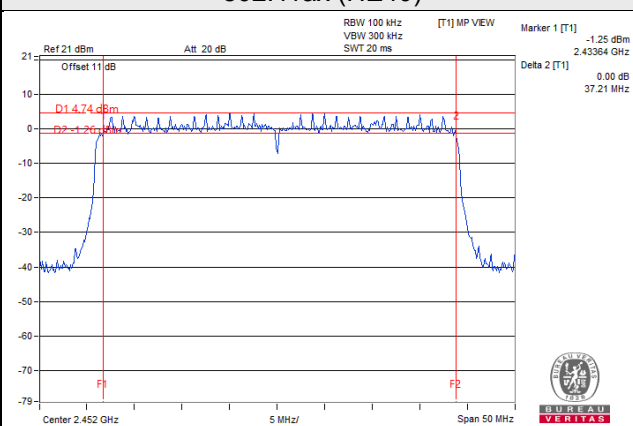

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as item 4.3.6.

4.4.7 Test Results

CDD Mode

802.11b

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
1	2412	24.08	23.92	24.51	784.951	28.95	30.00	Pass
6	2437	24.89	24.61	25.21	929.281	29.68	30.00	Pass
11	2462	24.38	24.26	24.79	842.144	29.25	30.00	Pass

802.11g

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
1	2412	20.22	20.00	20.82	325.977	25.13	30.00	Pass
6	2437	24.83	24.93	25.00	931.489	29.69	30.00	Pass
11	2462	20.51	20.20	21.05	344.523	25.37	30.00	Pass

802.11n (VHT20)

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
1	2412	19.60	18.71	19.91	263.452	24.21	30.00	Pass
6	2437	24.82	24.65	25.03	913.552	29.61	30.00	Pass
11	2462	18.76	18.37	18.78	219.378	23.41	30.00	Pass

802.11n (VHT40)

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
3	2422	18.76	18.44	18.78	220.494	23.43	30.00	Pass
6	2437	21.76	21.40	21.87	441.821	26.45	30.00	Pass
9	2452	18.69	18.42	18.86	220.376	23.43	30.00	Pass

802.11ax (HE20)

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
1	2412	19.67	18.74	19.96	266.583	24.26	30.00	Pass
6	2437	24.90	24.69	25.12	928.559	29.68	30.00	Pass
11	2462	18.86	18.42	18.86	223.328	23.49	30.00	Pass

802.11ax (HE40)

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
3	2422	18.84	18.56	18.81	224.372	23.51	30.00	Pass
6	2437	21.78	21.45	21.95	446.973	26.50	30.00	Pass
9	2452	18.77	18.57	18.89	224.727	23.52	30.00	Pass

Beamforming Mode

802.11n (VHT20)

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
1	2412	19.60	18.71	19.91	263.452	24.21	29.32	Pass
6	2437	24.39	24.30	24.53	827.734	29.18	29.32	Pass
11	2462	18.76	18.37	18.78	219.378	23.41	29.32	Pass

Note: Directional gain = 6.68dBi > 6dBi, so the power limit shall be reduced to $30 - (6.68 - 6) = 29.32\text{dBi}$.

802.11n (VHT40)

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
3	2422	18.76	18.44	18.78	220.494	23.43	29.32	Pass
6	2437	21.76	21.40	21.87	441.821	26.45	29.32	Pass
9	2452	18.69	18.42	18.86	220.376	23.43	29.32	Pass

Note: Directional gain = 6.68dBi > 6dBi, so the power limit shall be reduced to $30 - (6.68 - 6) = 29.32\text{dBi}$.

802.11ax (HE20)

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
1	2412	19.67	18.74	19.96	266.583	24.26	29.32	Pass
6	2437	24.48	24.27	24.70	842.965	29.26	29.32	Pass
11	2462	18.86	18.42	18.86	223.328	23.49	29.32	Pass

Note: Directional gain = 6.68dBi > 6dBi, so the power limit shall be reduced to $30 - (6.68 - 6) = 29.32\text{dBi}$.

802.11ax (HE40)

Channel	Frequency (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
3	2422	18.84	18.56	18.81	224.372	23.51	29.32	Pass
6	2437	21.78	21.45	21.95	446.973	26.50	29.32	Pass
9	2452	18.77	18.57	18.89	224.727	23.52	29.32	Pass


Note: Directional gain = 6.68dBi > 6dBi, so the power limit shall be reduced to $30 - (6.68 - 6) = 29.32\text{dBi}$.

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as item 4.3.6

4.5.7 Test Results

802.11b

TX chain	Channel	Frequency (MHz)	PSD w/o Duty Factor (dBm/10kHz)	10 log (N=3) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/10kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-2.03	4.77	0.23	2.97	7.32	Pass
	6	2437	-2.36	4.77	0.23	2.64	7.32	Pass
	11	2462	-2.62	4.77	0.23	2.38	7.32	Pass
1	1	2412	-2.36	4.77	0.23	2.64	7.32	Pass
	6	2437	-1.58	4.77	0.23	3.42	7.32	Pass
	11	2462	-2.75	4.77	0.23	2.25	7.32	Pass
2	1	2412	-1.36	4.77	0.23	3.64	7.32	Pass
	6	2437	-0.94	4.77	0.23	4.06	7.32	Pass
	11	2462	-1.77	4.77	0.23	3.23	7.32	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add 10 log (N_{ANT}) dB.
2. Directional gain = 6.68dBi > 6dBi, so the power density limit shall be reduced to 8 - (6.68 - 6) = 7.32dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11g

TX chain	Channel	Frequency (MHz)	PSD w/o Duty Factor (dBm/10kHz)	10 log (N=3) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/10kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-8.77	4.77	0.23	-3.77	7.32	Pass
	6	2437	-3.91	4.77	0.23	1.09	7.32	Pass
	11	2462	-8.42	4.77	0.23	-3.42	7.32	Pass
1	1	2412	-8.31	4.77	0.23	-3.31	7.32	Pass
	6	2437	-4.40	4.77	0.23	0.60	7.32	Pass
	11	2462	-8.48	4.77	0.23	-3.48	7.32	Pass
2	1	2412	-7.59	4.77	0.23	-2.59	7.32	Pass
	6	2437	-4.02	4.77	0.23	0.98	7.32	Pass
	11	2462	-7.56	4.77	0.23	-2.56	7.32	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add 10 log (N_{ANT}) dB.
2. Directional gain = 6.68dBi > 6dBi, so the power density limit shall be reduced to 8 - (6.68 - 6) = 7.32dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE20)

TX chain	Channel	Frequency (MHz)	PSD w/o Duty Factor (dBm/10kHz)	10 log (N=3) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/10kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-10.10	4.77	0.12	-5.21	7.32	Pass
	6	2437	-5.14	4.77	0.12	-0.25	7.32	Pass
	11	2462	-10.61	4.77	0.12	-5.72	7.32	Pass
1	1	2412	-10.87	4.77	0.12	-5.98	7.32	Pass
	6	2437	-5.09	4.77	0.12	-0.20	7.32	Pass
	11	2462	-11.42	4.77	0.12	-6.53	7.32	Pass
2	1	2412	-9.77	4.77	0.12	-4.88	7.32	Pass
	6	2437	-4.37	4.77	0.12	0.52	7.32	Pass
	11	2462	-10.37	4.77	0.12	-5.48	7.32	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add 10 log (N_{ANT}) dB.
2. Directional gain = 6.68dBi > 6dBi, so the power density limit shall be reduced to 8 - (6.68 - 6) = 7.32dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE40)


TX chain	Channel	Frequency (MHz)	PSD w/o Duty Factor (dBm/10kHz)	10 log (N=3) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/10kHz)	Limit (dBm/3kHz)	Pass / Fail
0	3	2422	-13.28	4.77	0.23	-8.28	7.32	Pass
	6	2437	-10.23	4.77	0.23	-5.23	7.32	Pass
	9	2452	-13.40	4.77	0.23	-8.40	7.32	Pass
1	3	2422	-14.12	4.77	0.23	-9.12	7.32	Pass
	6	2437	-10.77	4.77	0.23	-5.77	7.32	Pass
	9	2452	-14.27	4.77	0.23	-9.27	7.32	Pass
2	3	2422	-13.90	4.77	0.23	-8.90	7.32	Pass
	6	2437	-7.59	4.77	0.23	-2.59	7.32	Pass
	9	2452	-13.33	4.77	0.23	-8.33	7.32	Pass

Note:


1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add 10 log (N_{ANT}) dB.
2. Directional gain = 6.68dBi > 6dBi, so the power density limit shall be reduced to 8 - (6.68 - 6) = 7.32dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11b

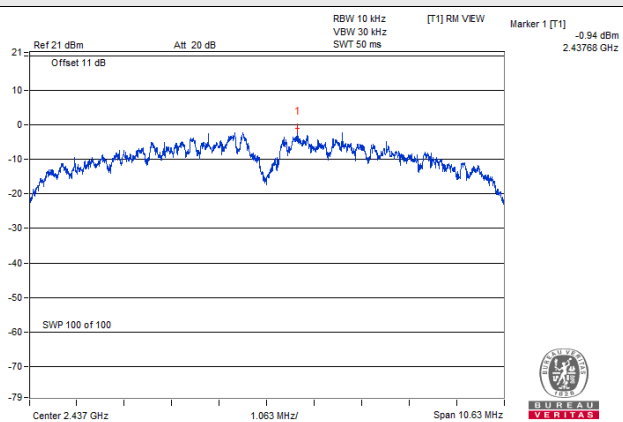


802.11g

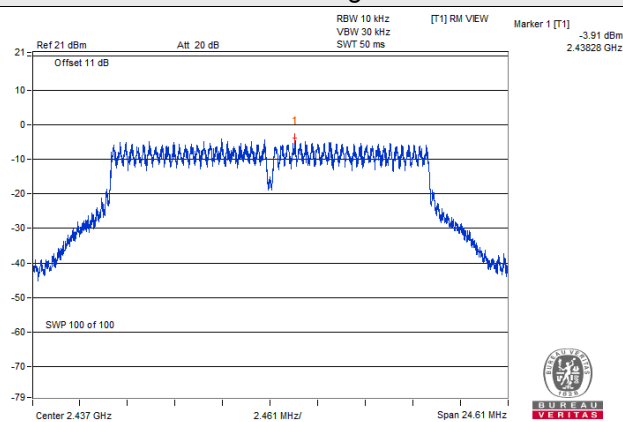

802.11ax (HE20)

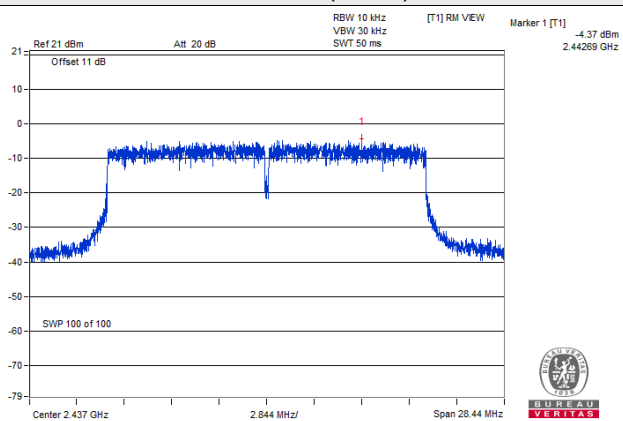

802.11ax (HE40)

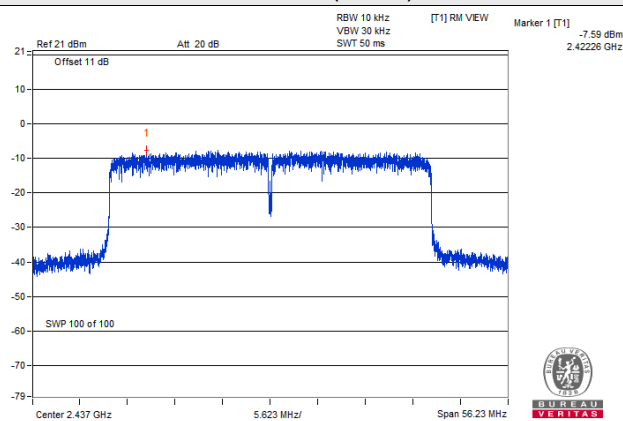


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set the RBW = 100 kHz.
- Set the VBW $\geq$ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW $\geq$ 300 kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Same as item 4.3.6


4.6.7 Test Results

The conducted emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b_Chain 0


CH 1

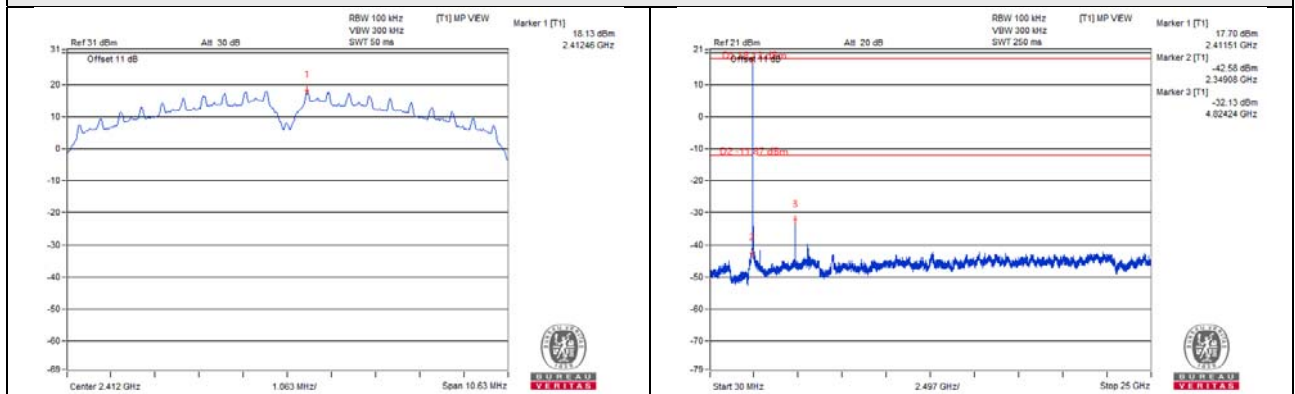


CH 6

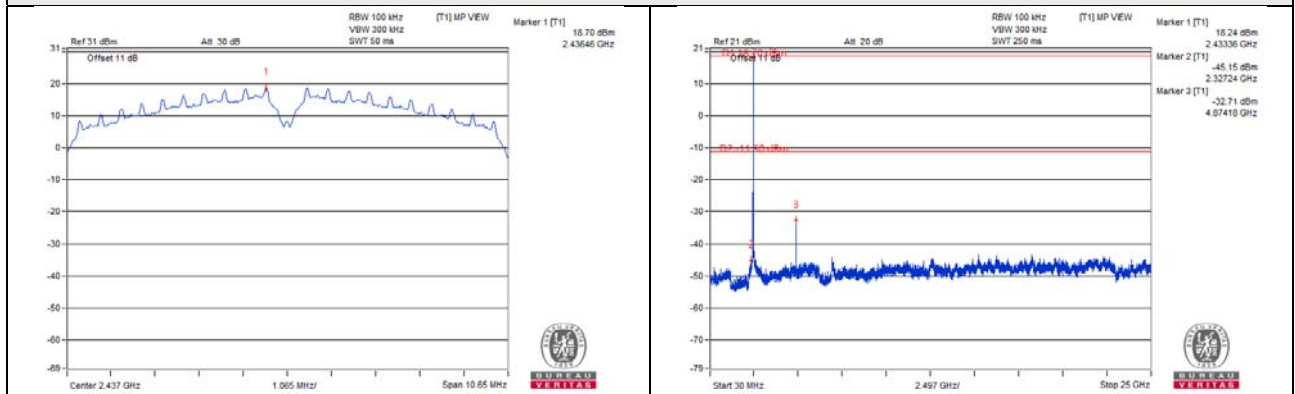


CH 11

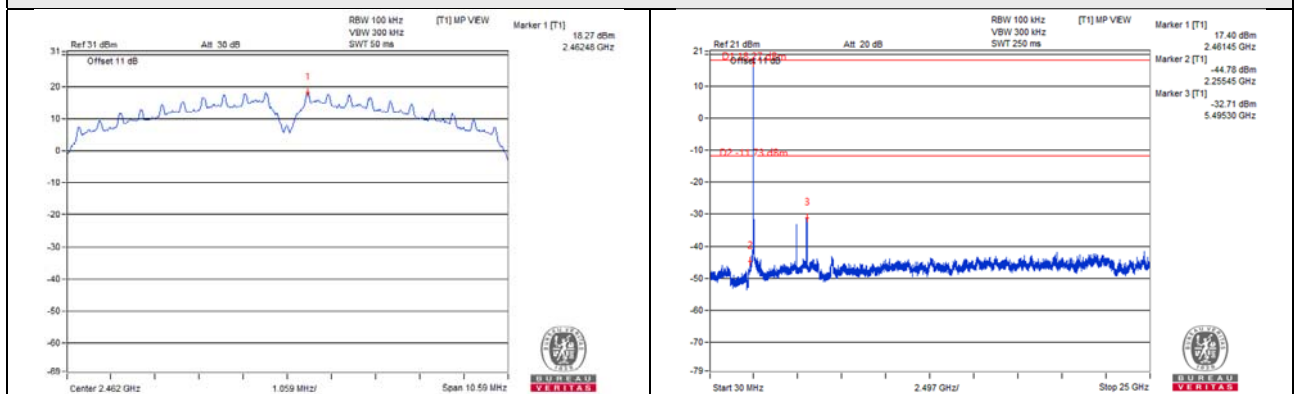

CH 1 Band edge


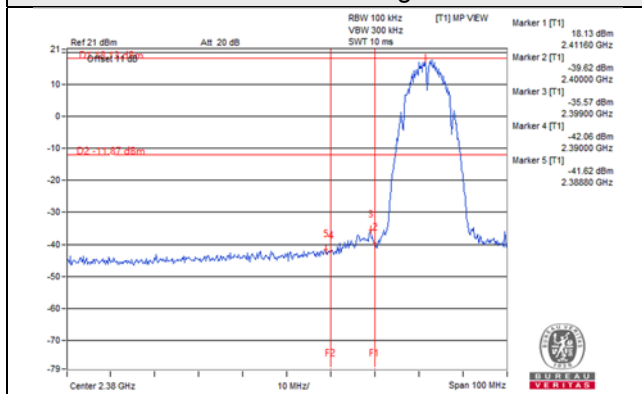


CH 11 Band edge


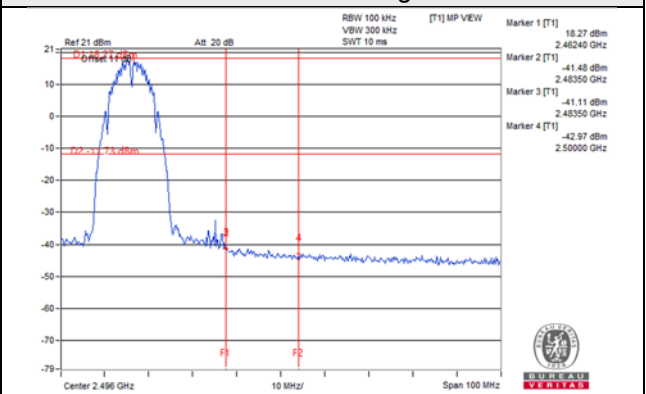


802.11b_Chain 1



CH 1

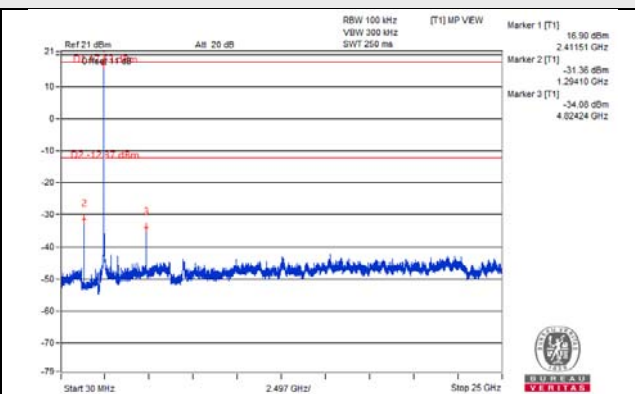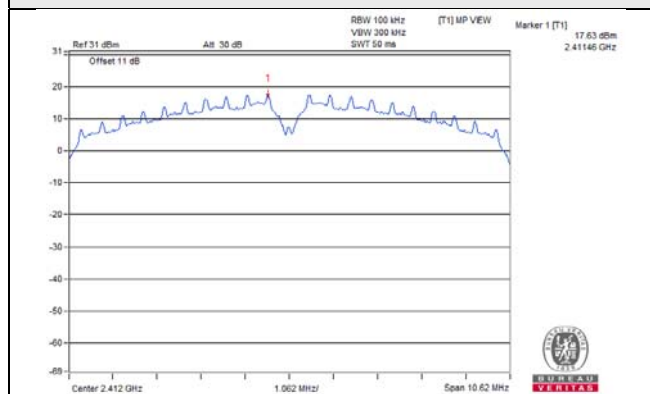


CH 6

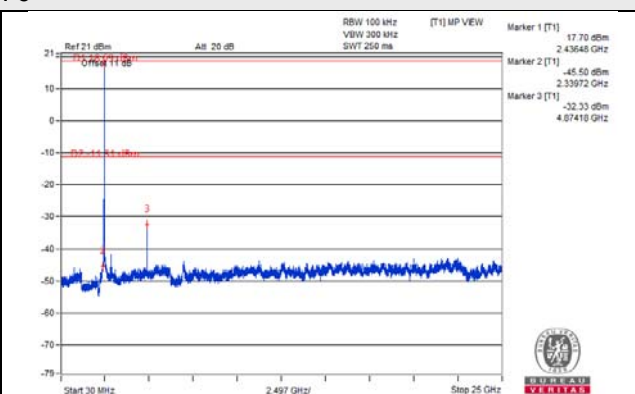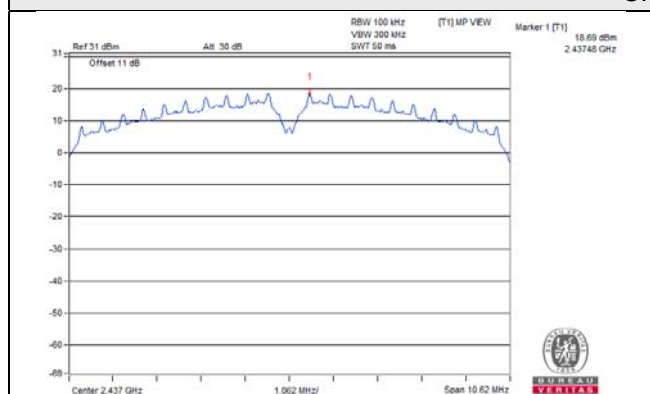


CH 11

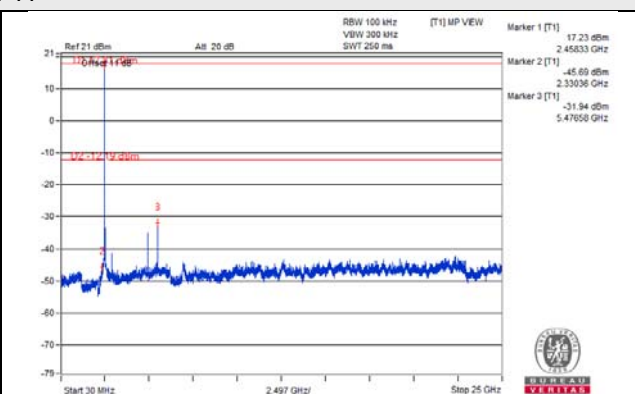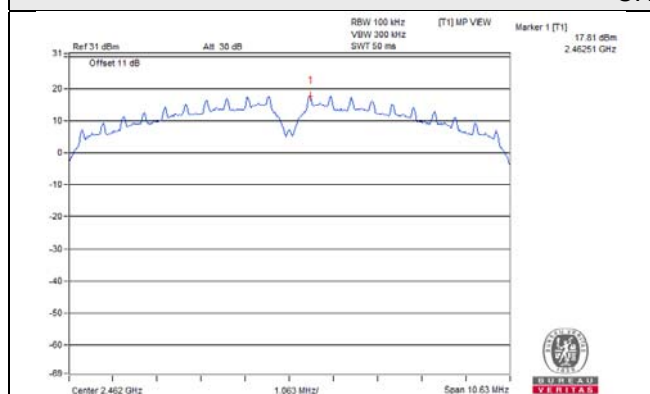

CH 1 Band edge


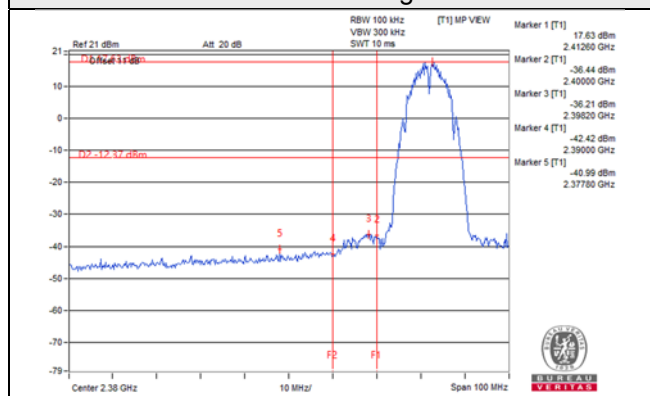


CH 11 Band edge


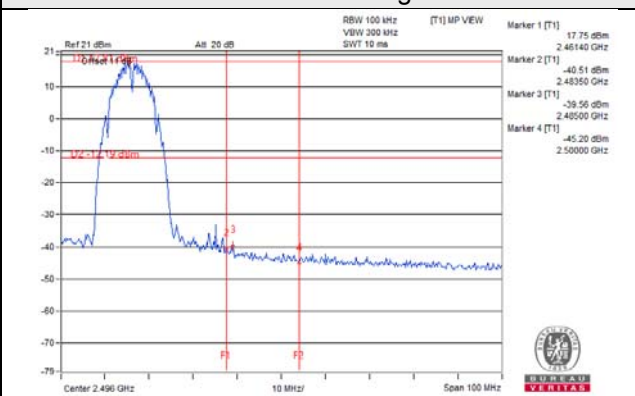


802.11b_Chain 2



CH 1

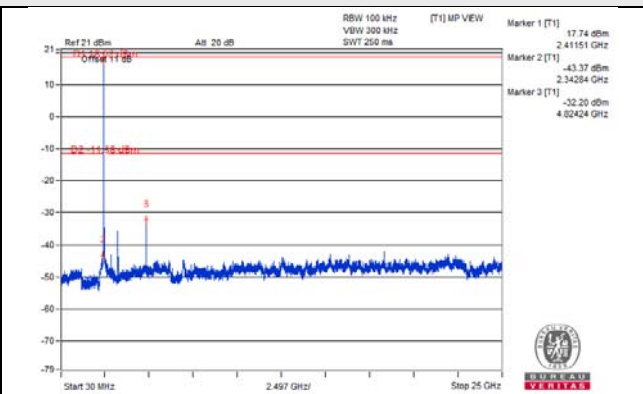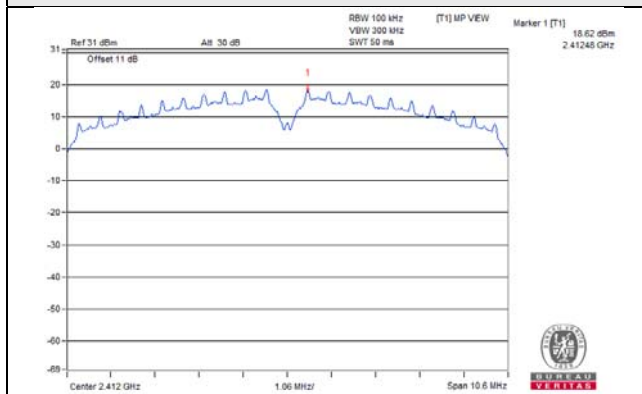


CH 6

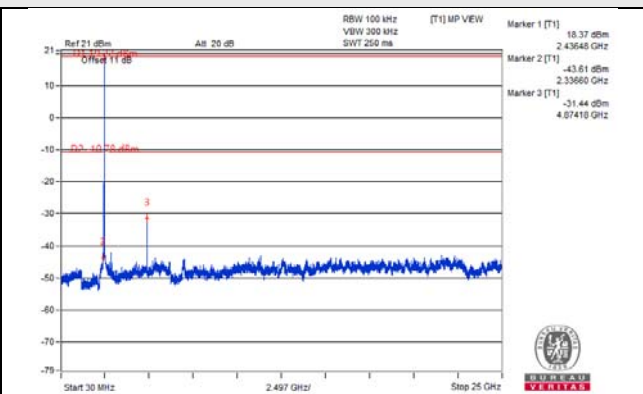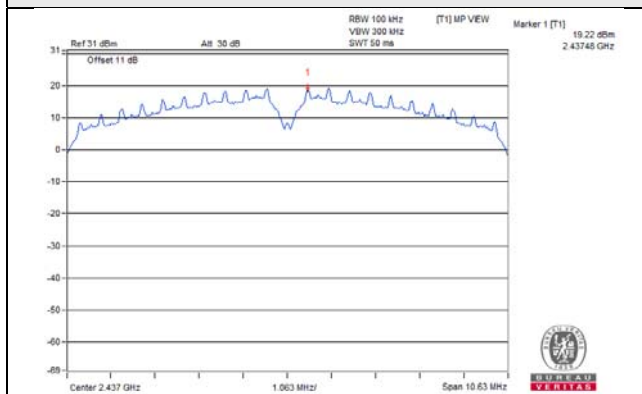


CH 11

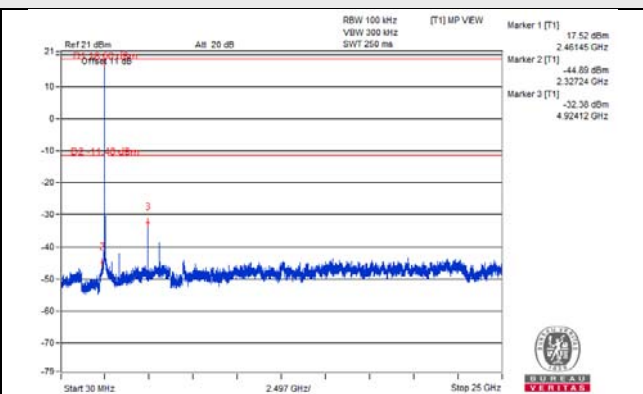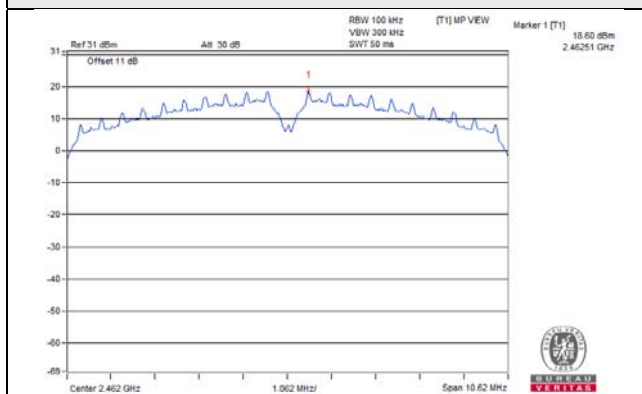

CH 1 Band edge


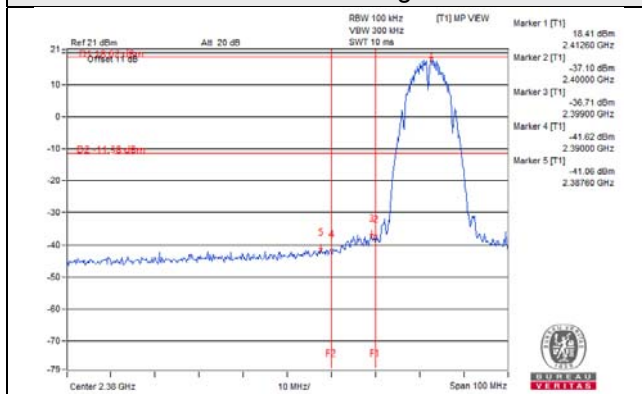


CH 11 Band edge


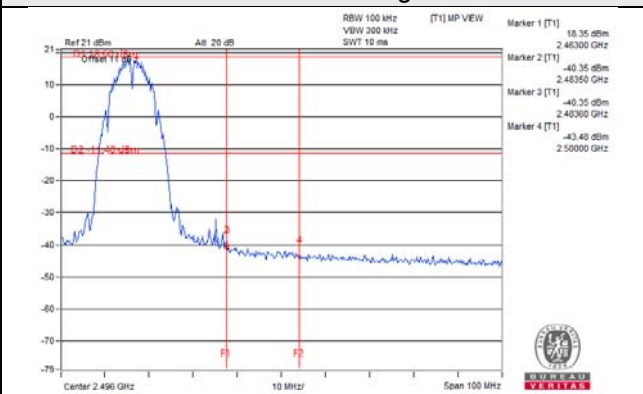


802.11g_Chain 0



CH 1

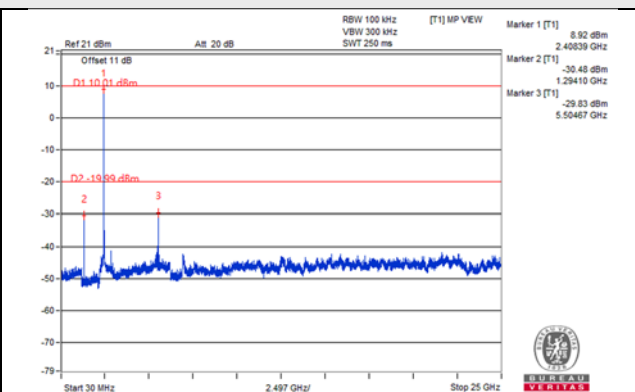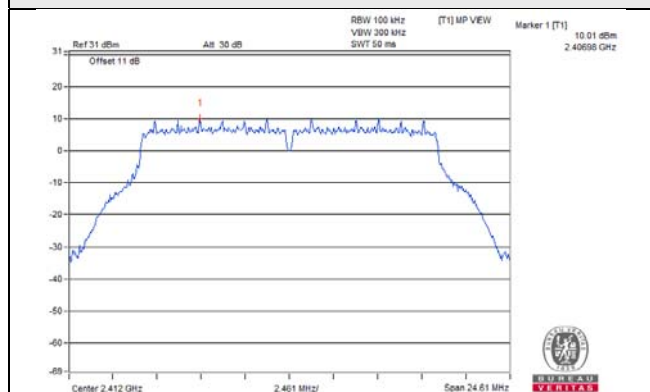


CH 6

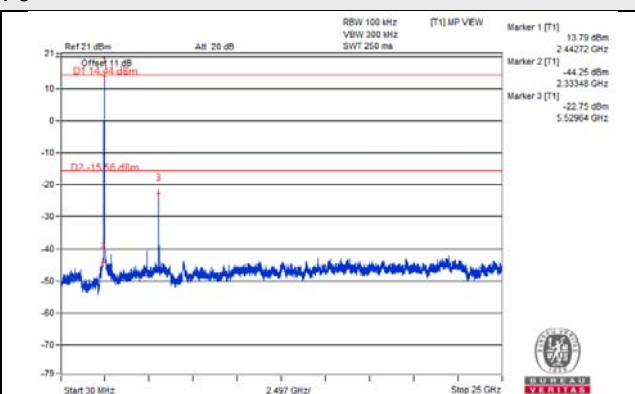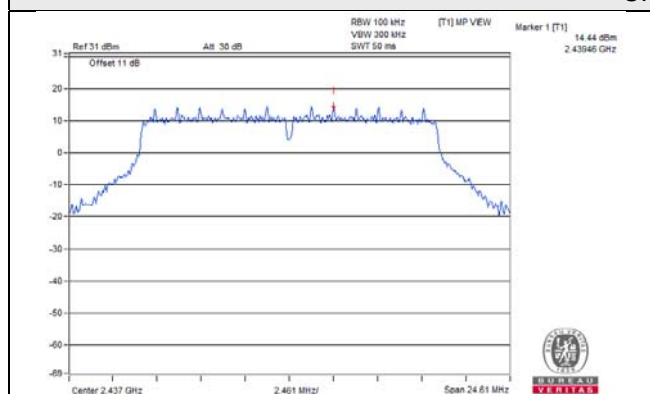


CH 11

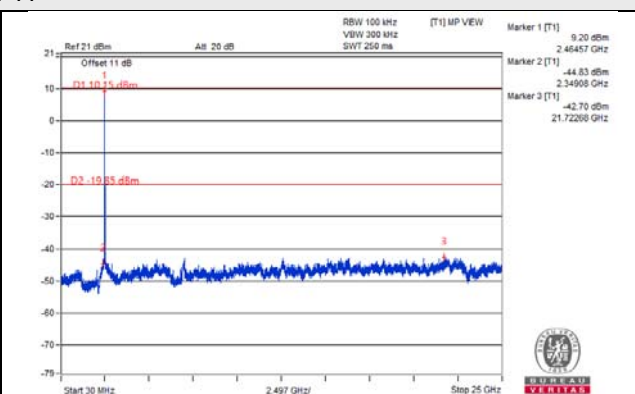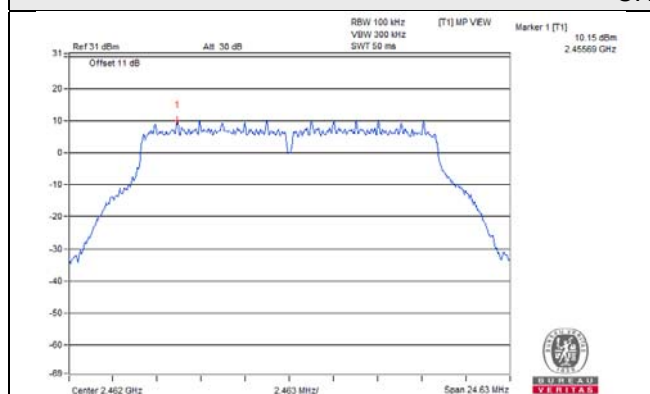

CH 1 Band edge


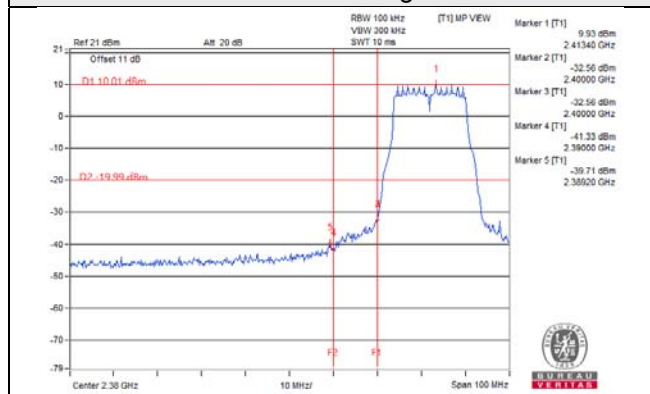


CH 11 Band edge


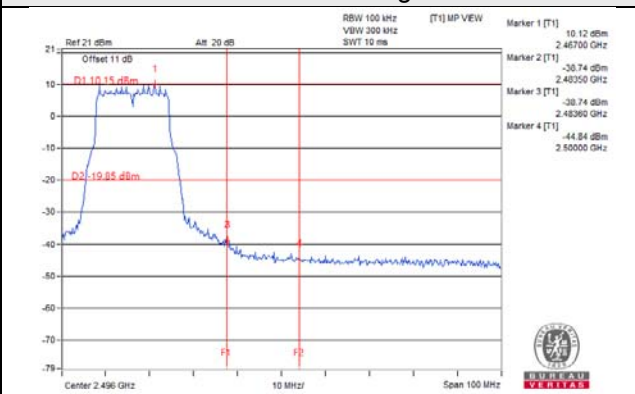


802.11g_Chain 1



CH 1

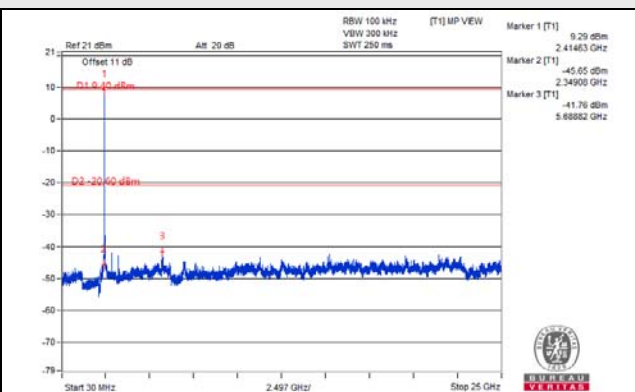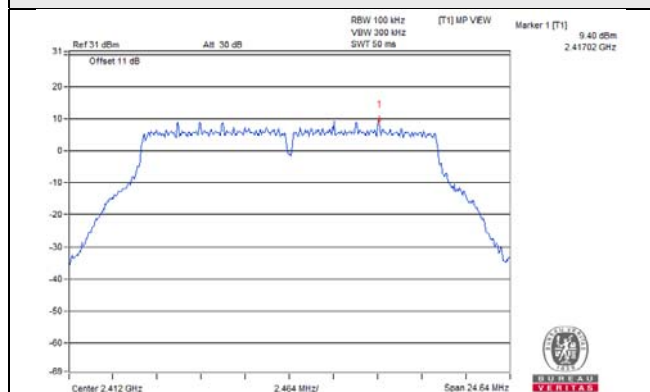


CH 6

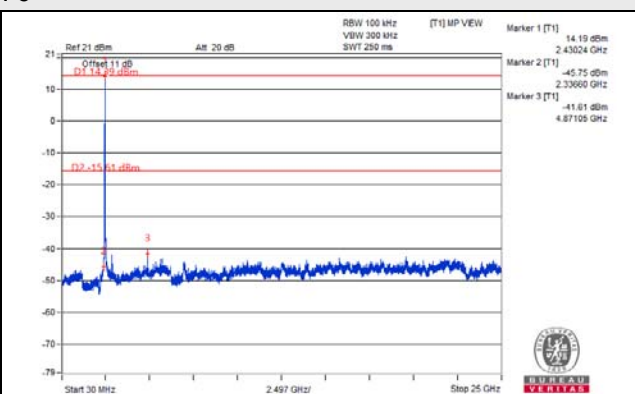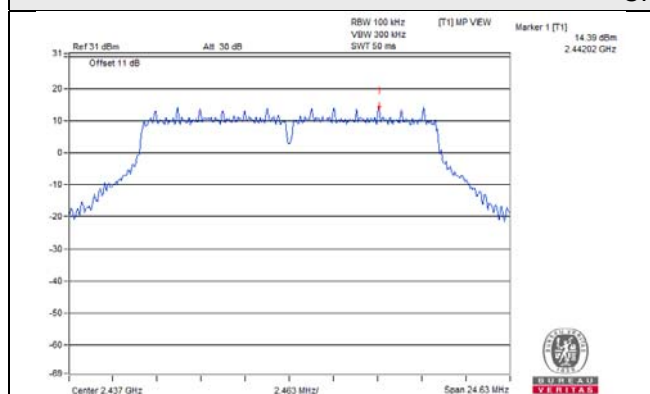


CH 11

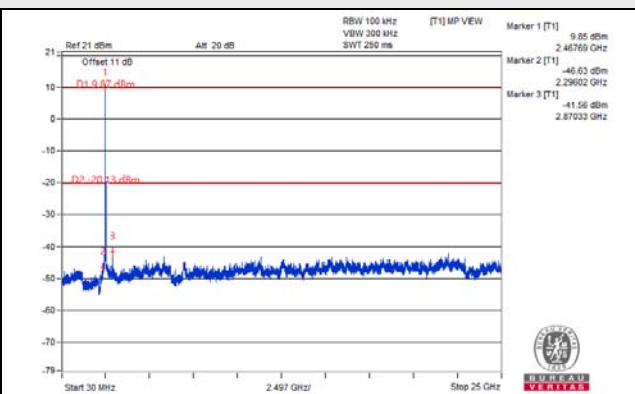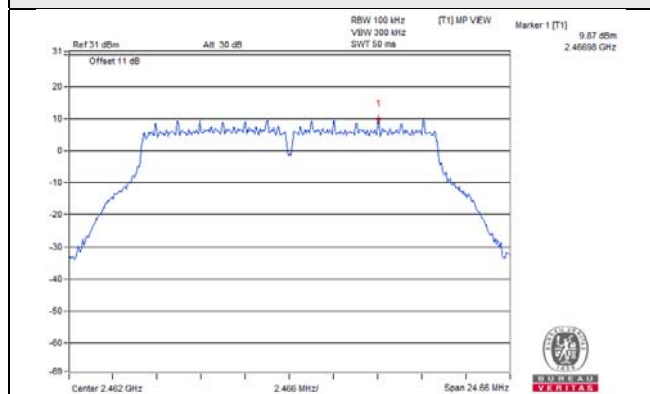

CH 1 Band edge

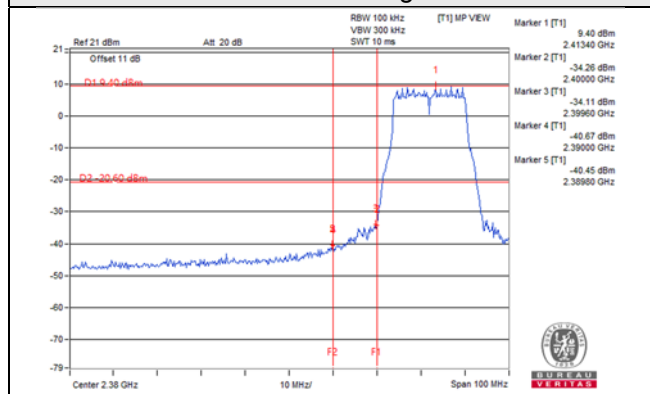


CH 11 Band edge

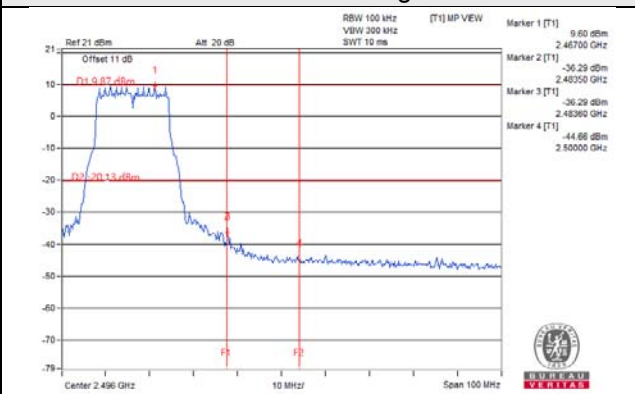


802.11g_Chain 2


CH 1

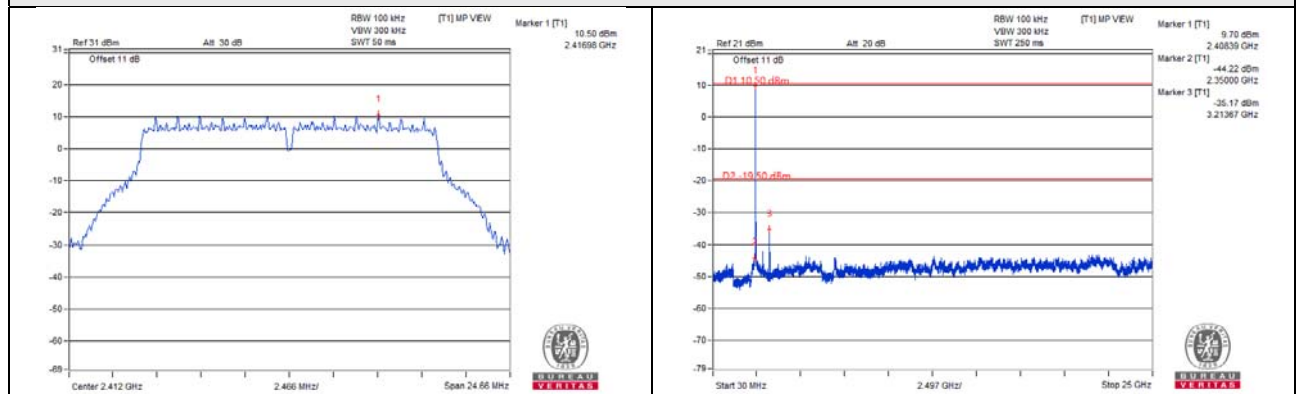


CH 6

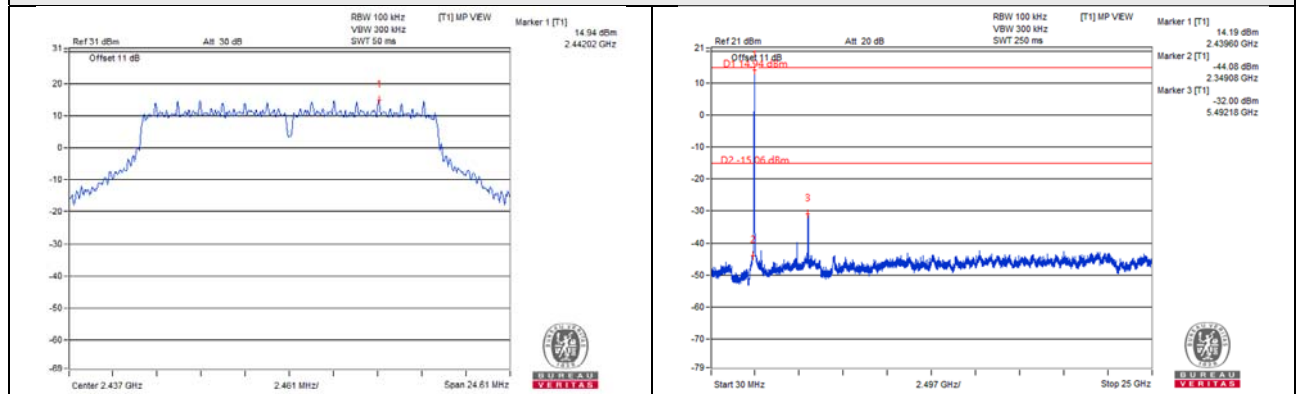


CH 11

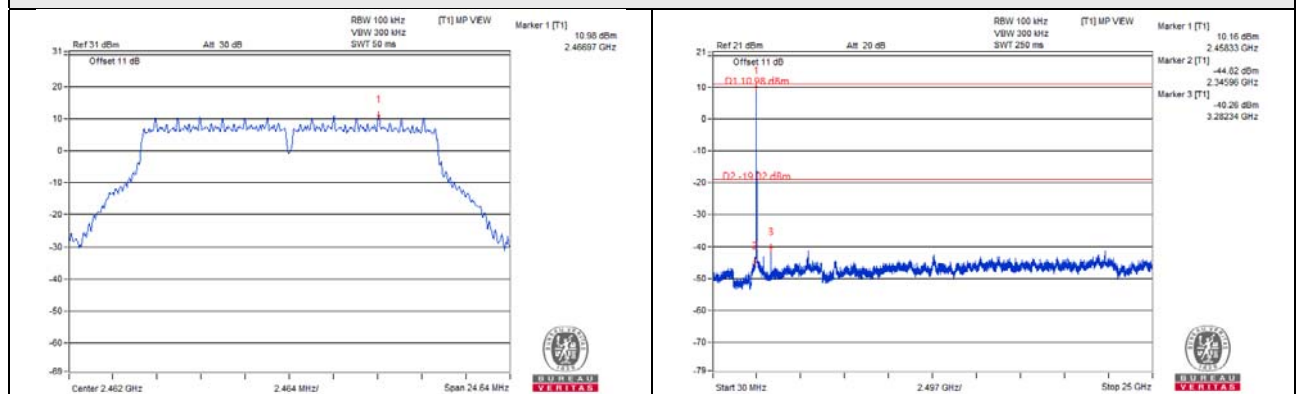

CH 1 Band edge


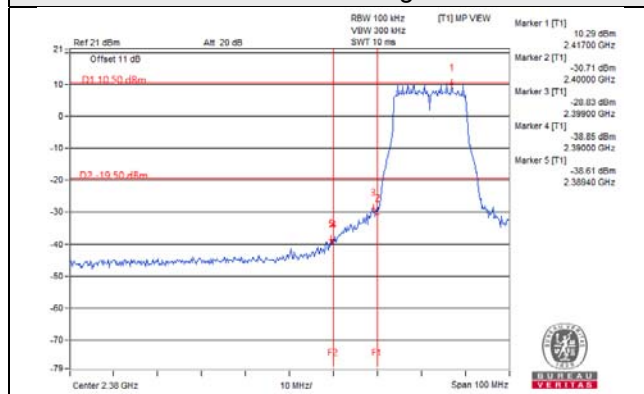


CH 11 Band edge


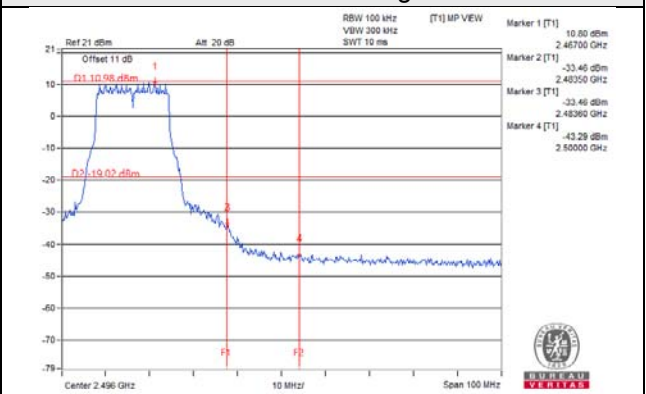


802.11ax (HE20)_Chain 0



CH 1

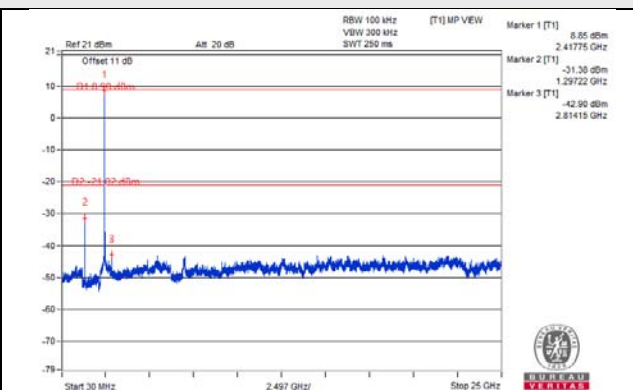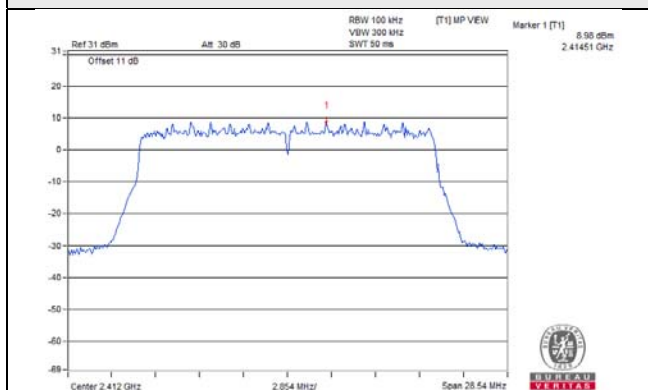


CH 6

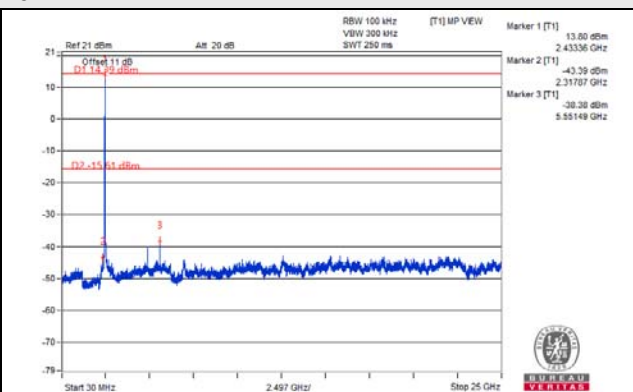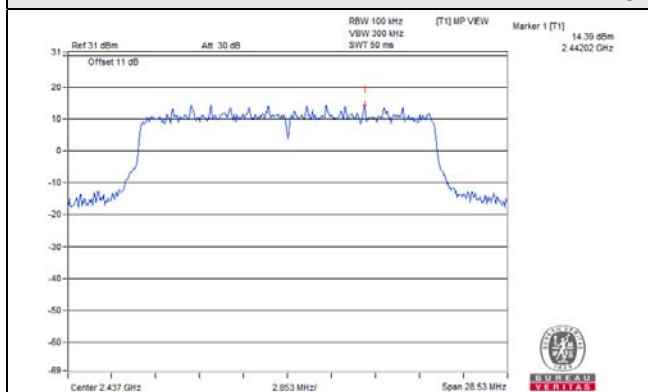


CH 11

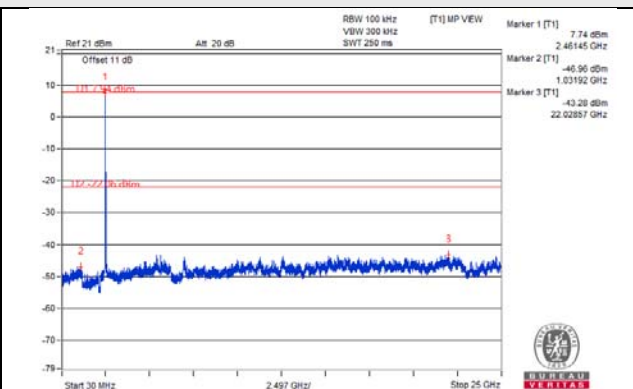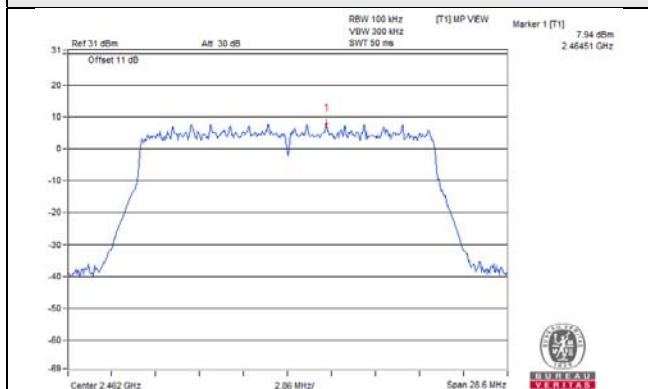

CH 1 Band edge


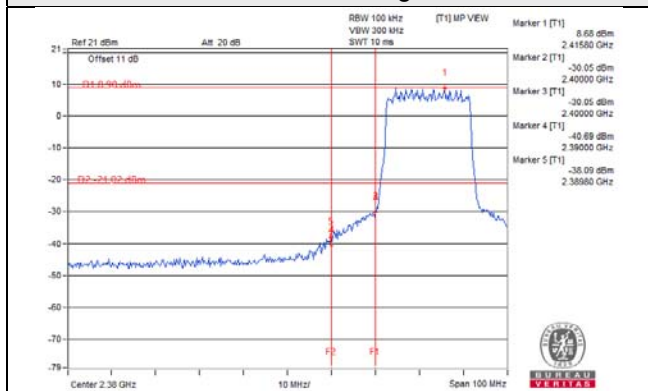


CH 11 Band edge


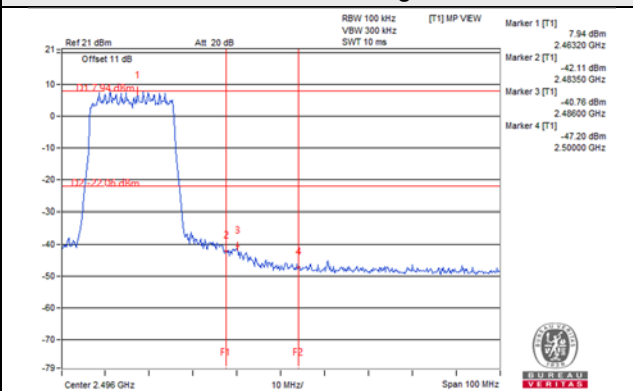


802.11ax (HE20)_Chain 1



CH 1

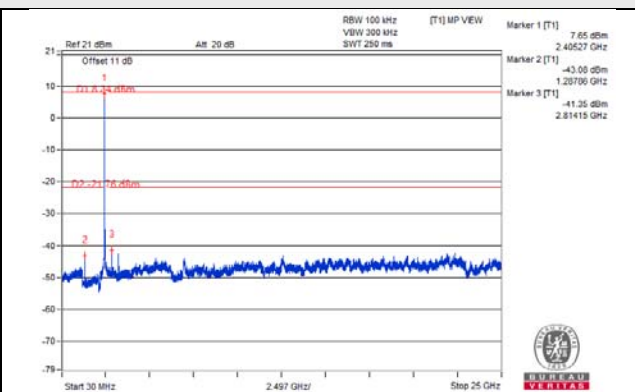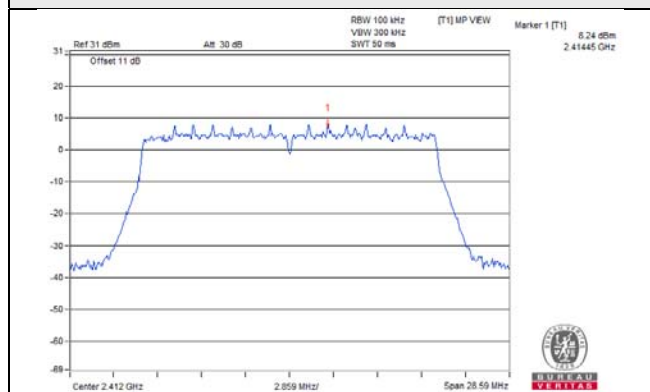


CH 6

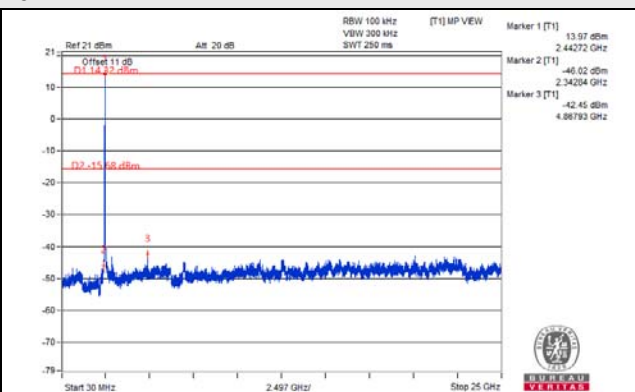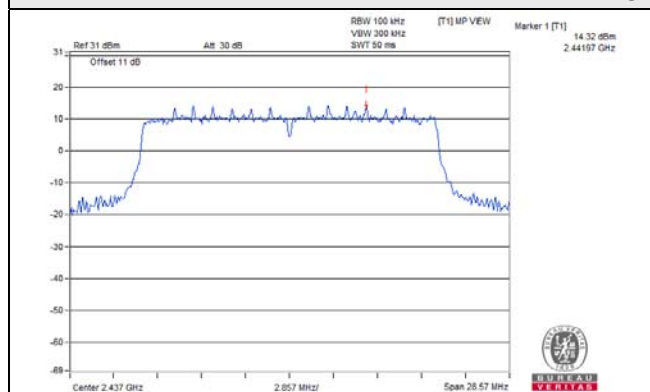


CH 11

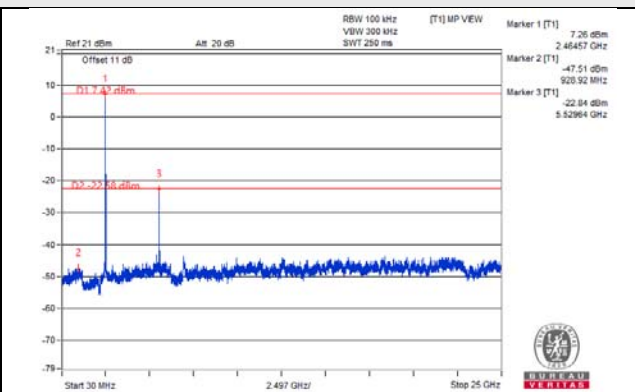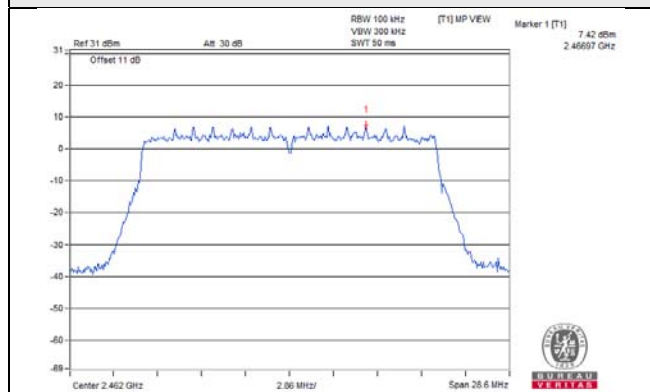

CH 1 Band edge

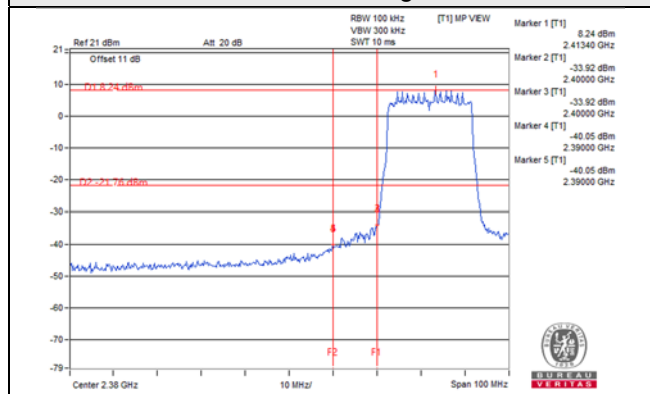


CH 11 Band edge

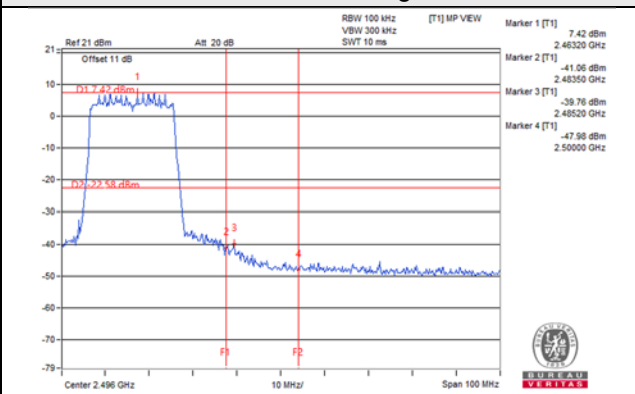


802.11ax (HE20)_Chain 2


CH 1

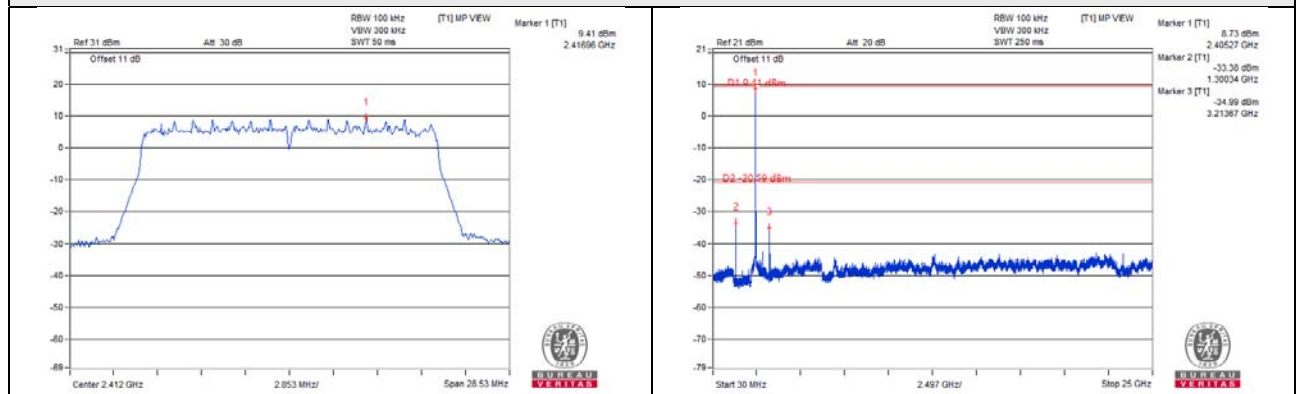


CH 6

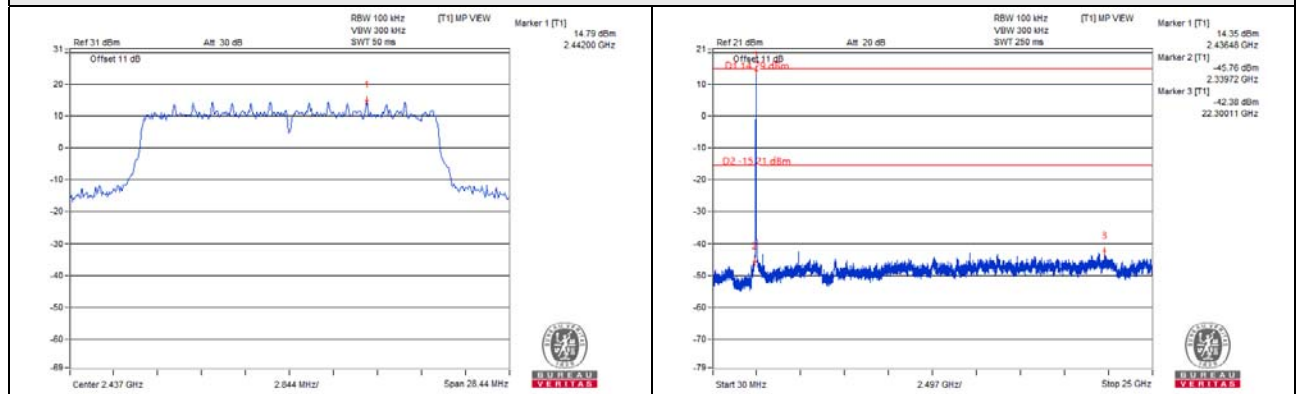


CH 11

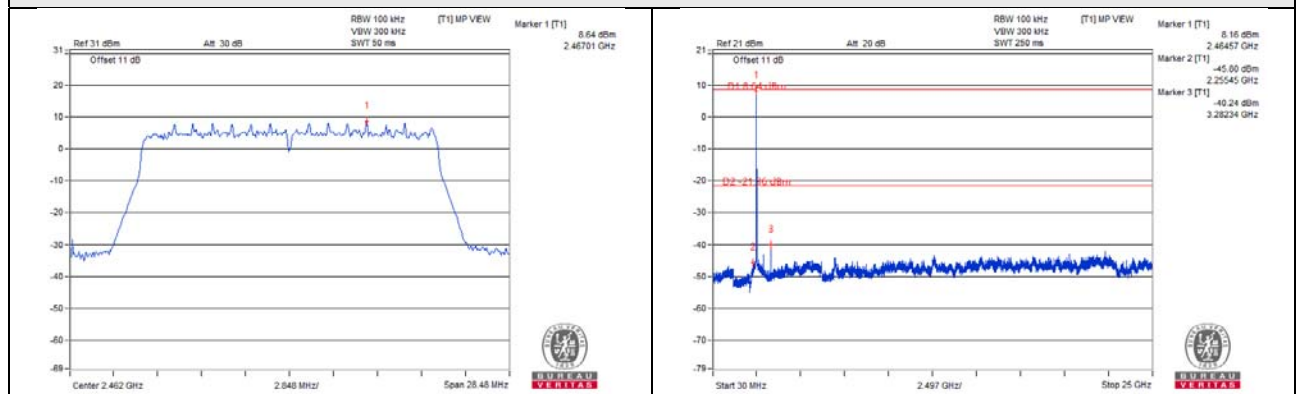

CH 1 Band edge


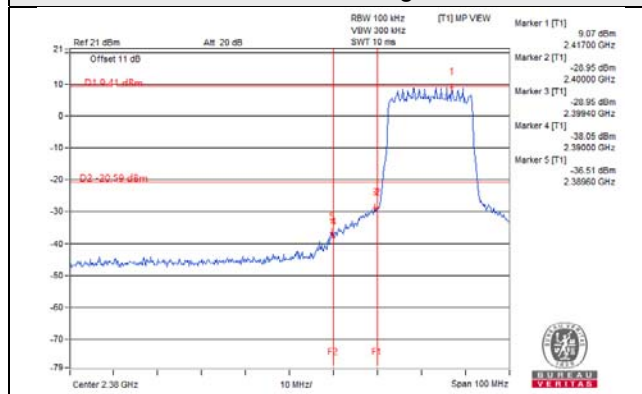


CH 11 Band edge


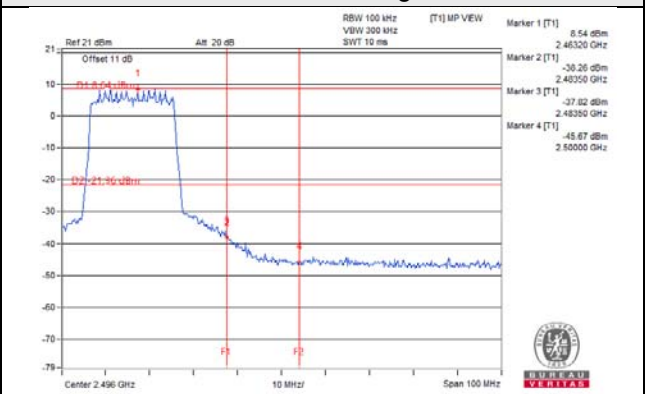


802.11ax (HE40)_Chain 0



CH 3

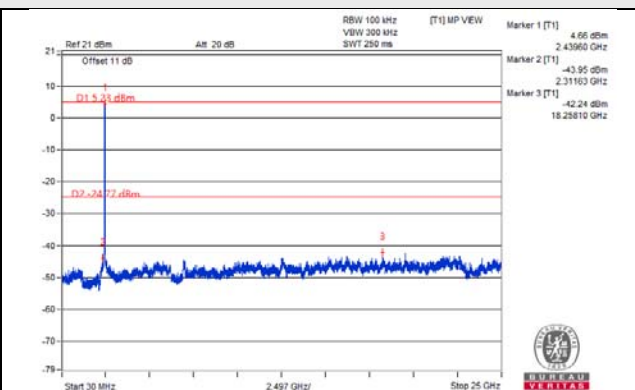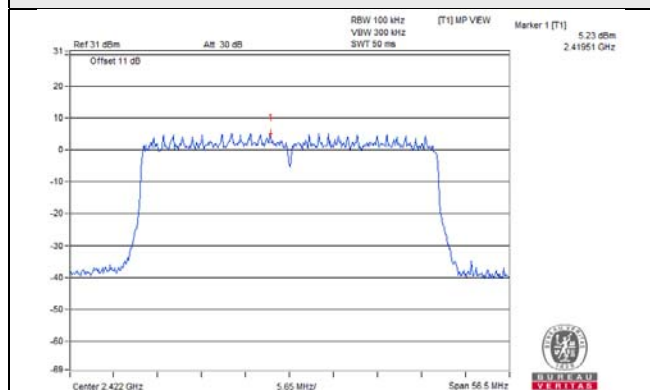


CH 6

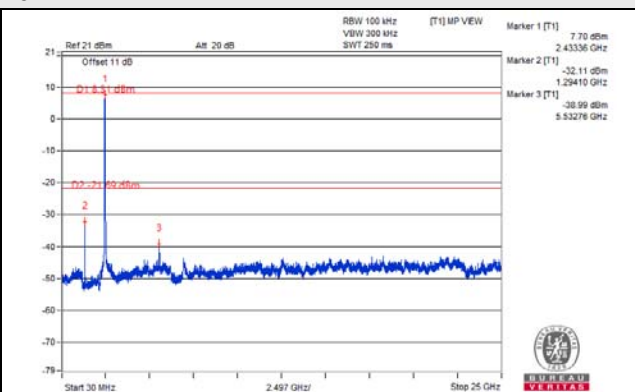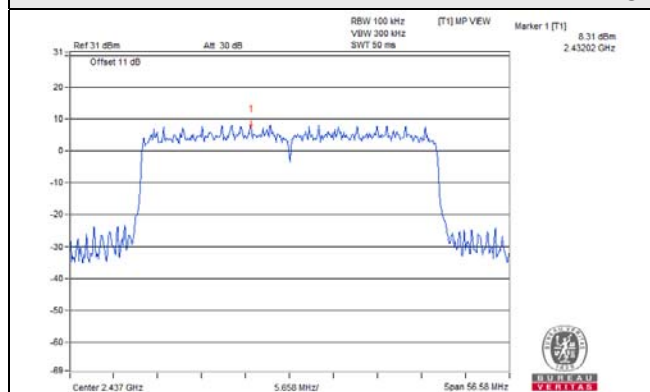


CH 9

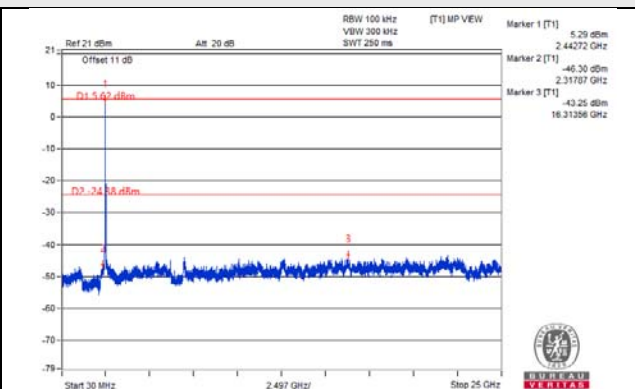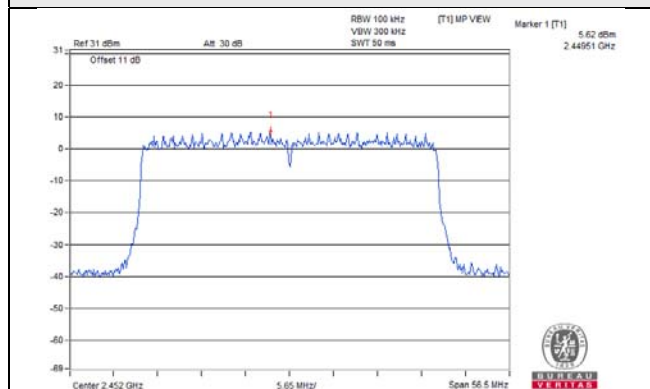

CH 3 Band edge


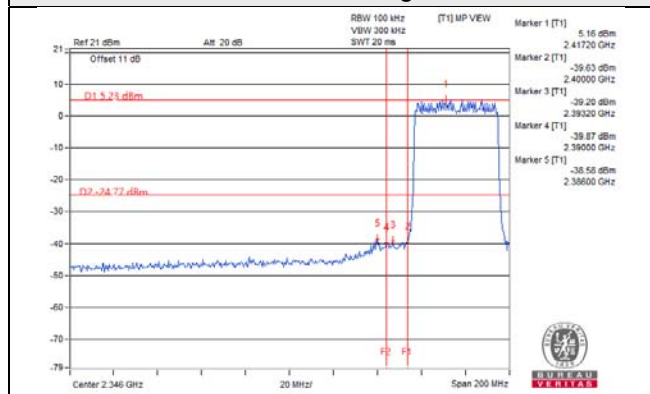


CH 9 Band edge


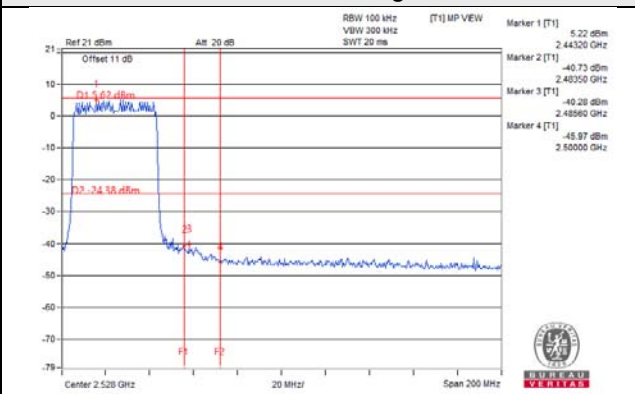


802.11ax (HE40)_Chain 1



CH 3

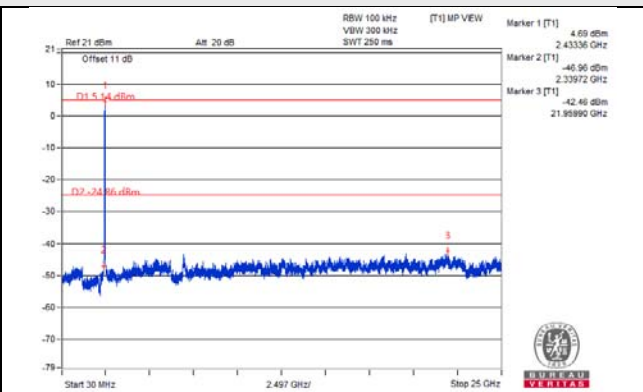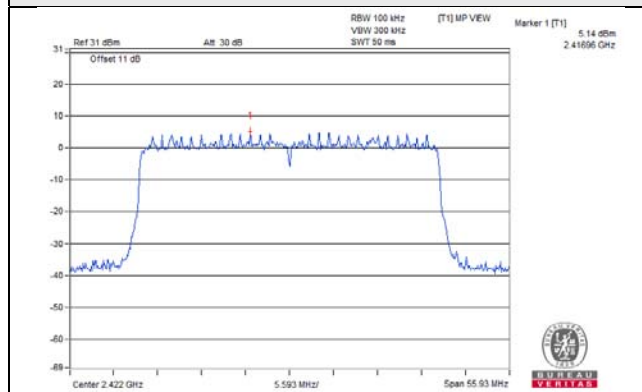


CH 6

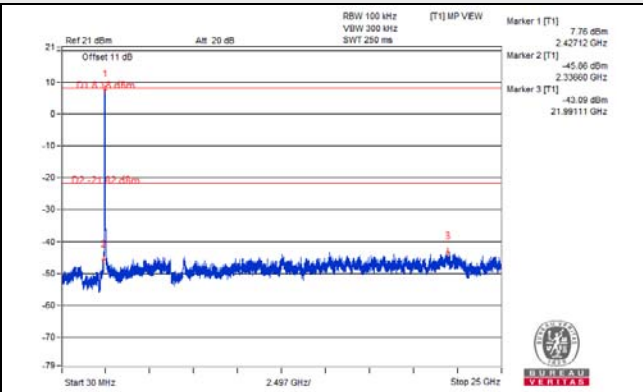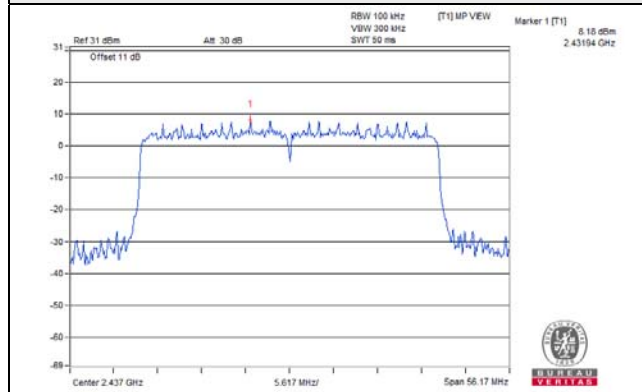


CH 9

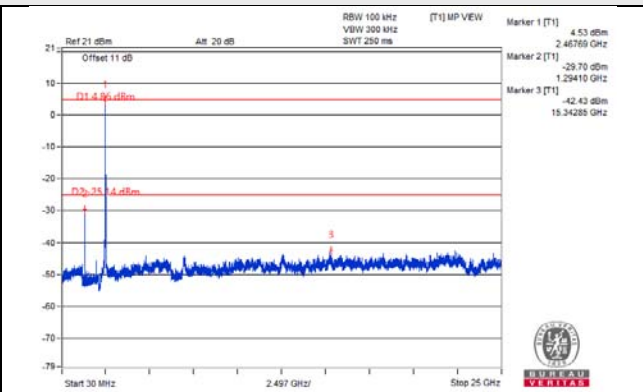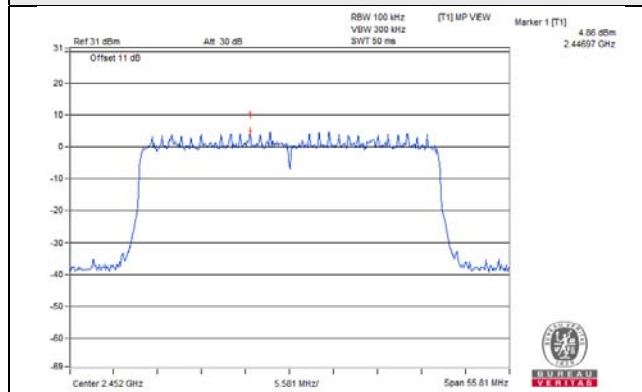

CH 3 Band edge


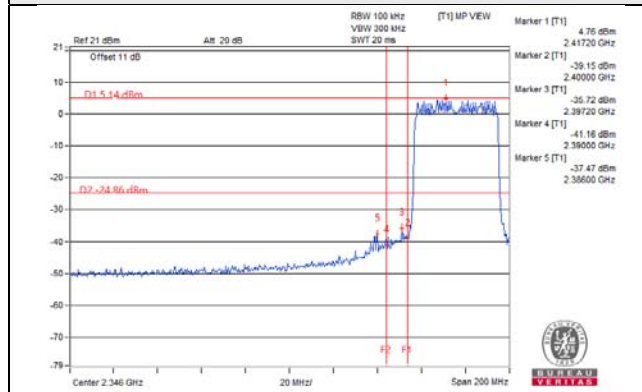


CH 9 Band edge


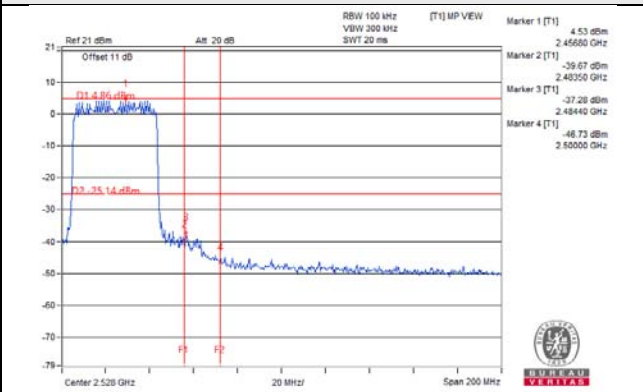


802.11ax (HE40)_Chain 2



CH 3

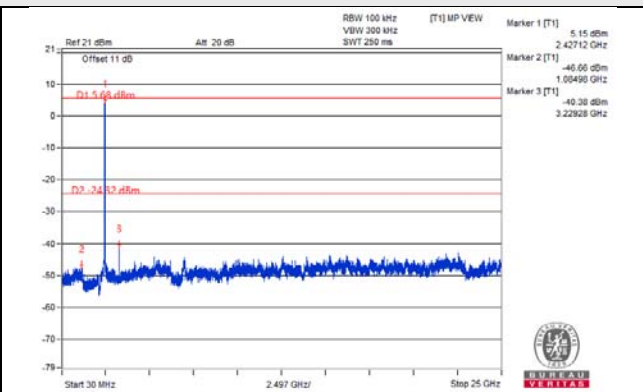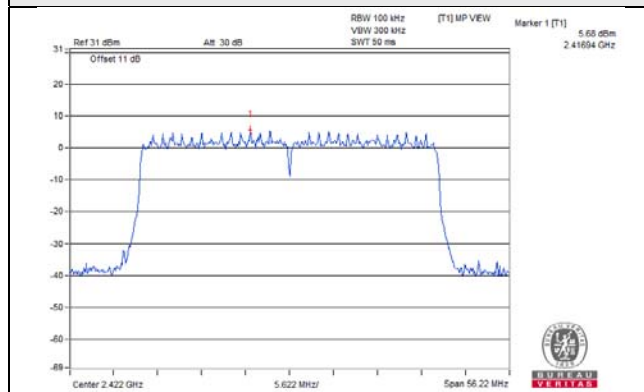


CH 6

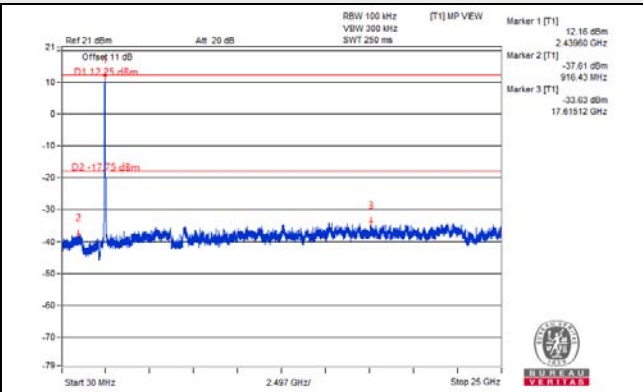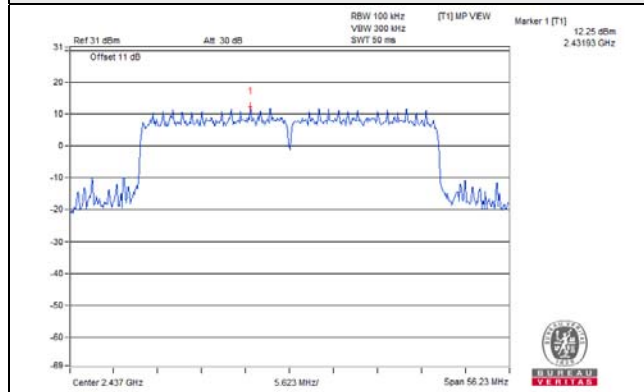


CH 9

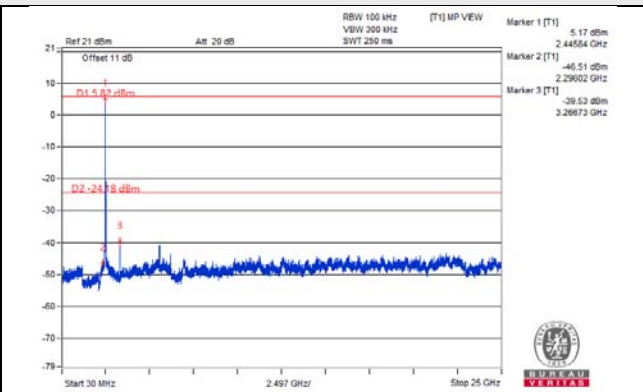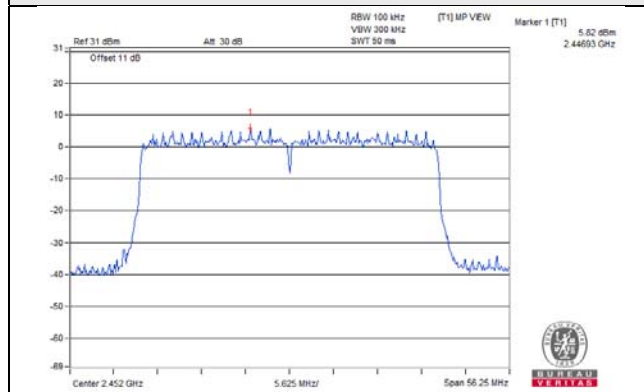

CH 3 Band edge

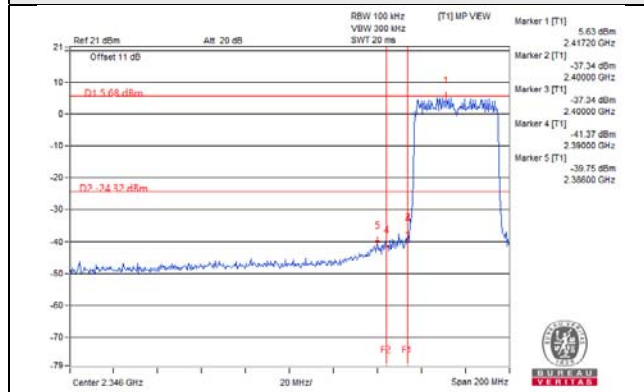



CH 9 Band edge

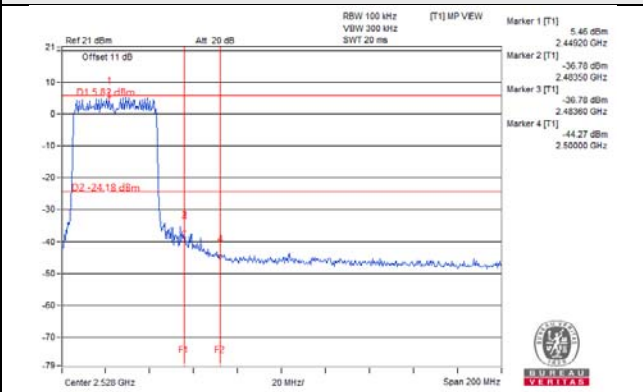


Annex A- Band Edge Measurement

802.11b

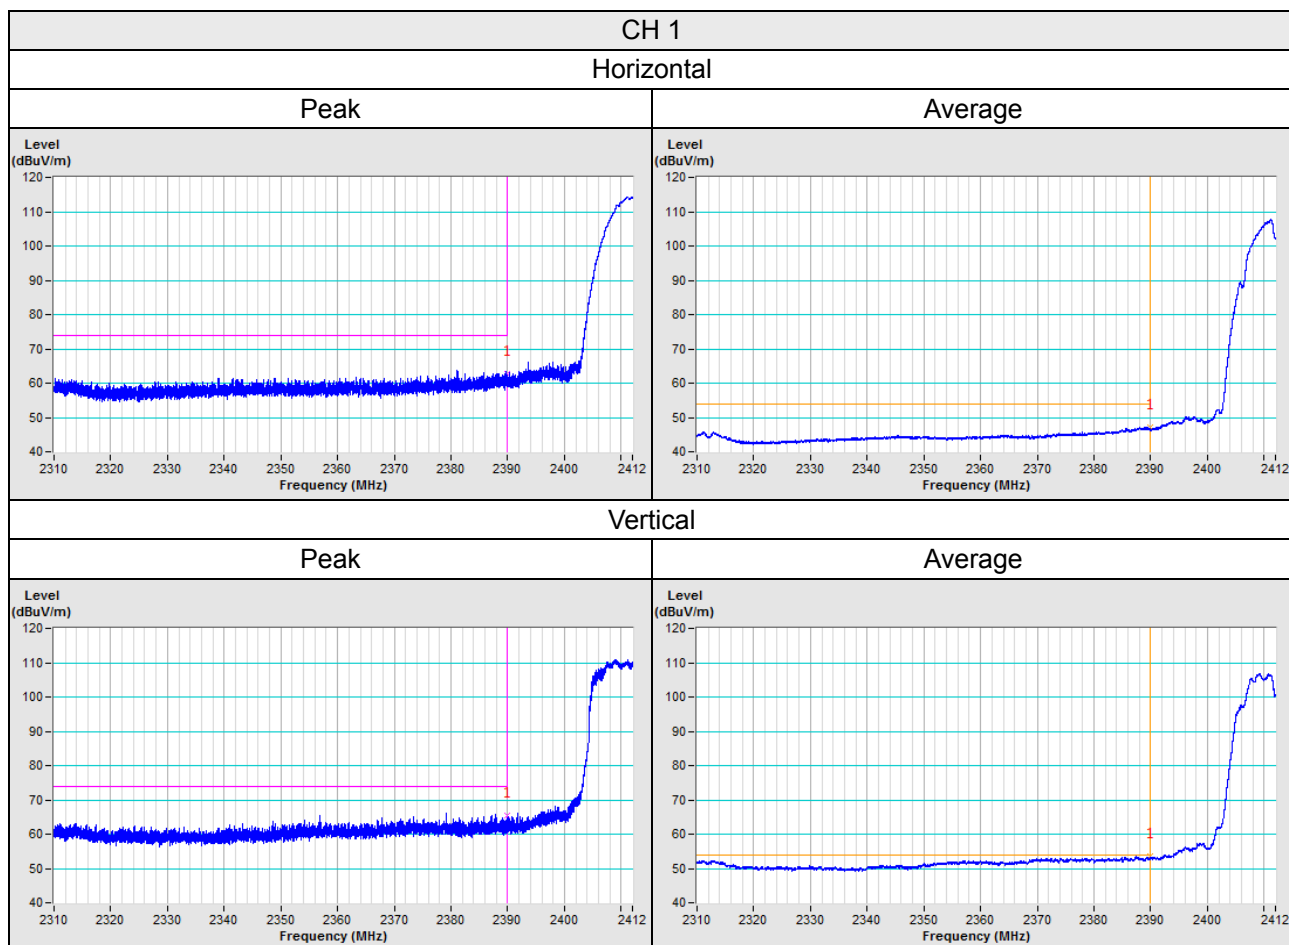

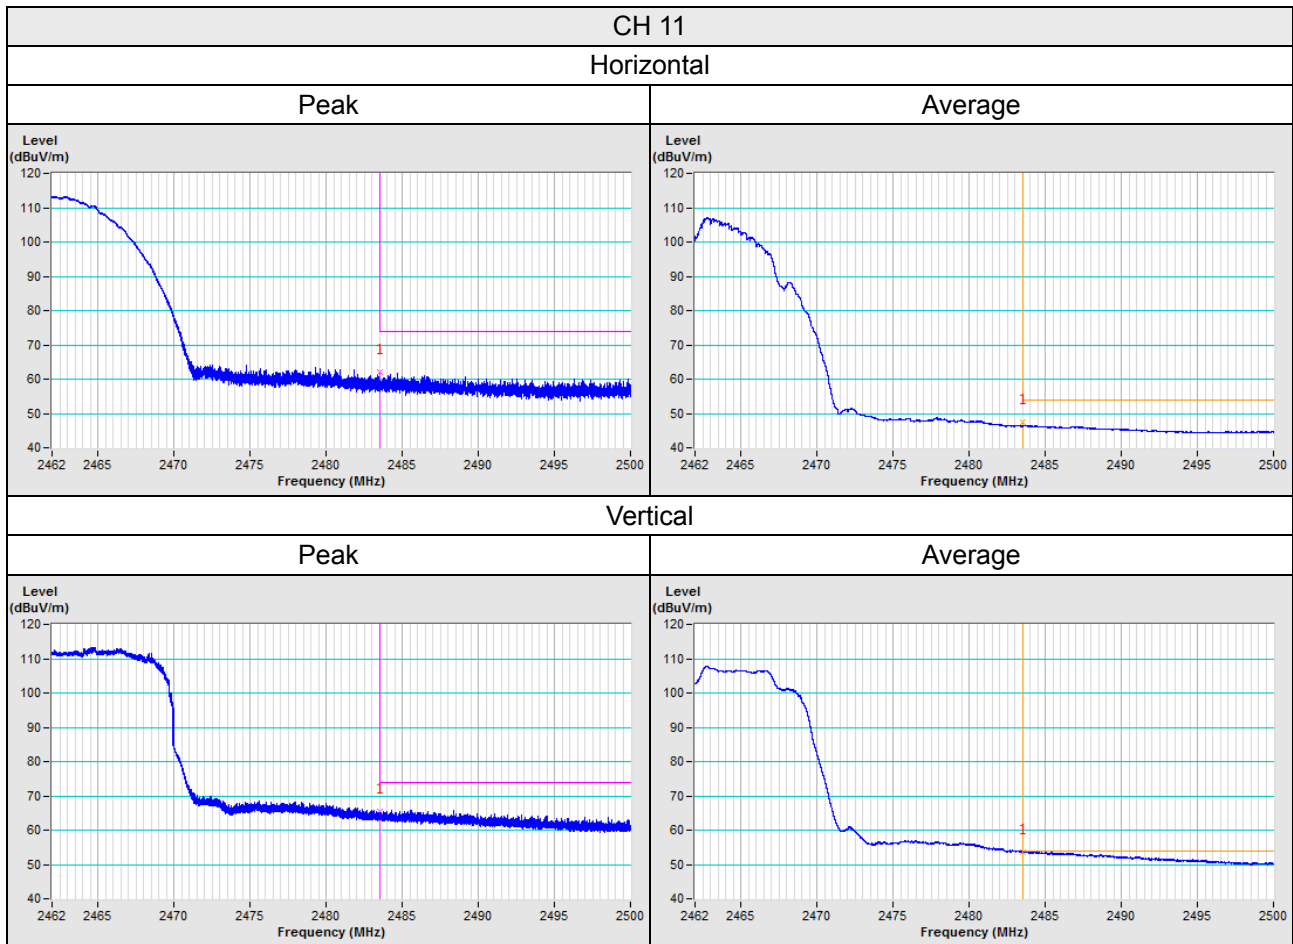


802.11g

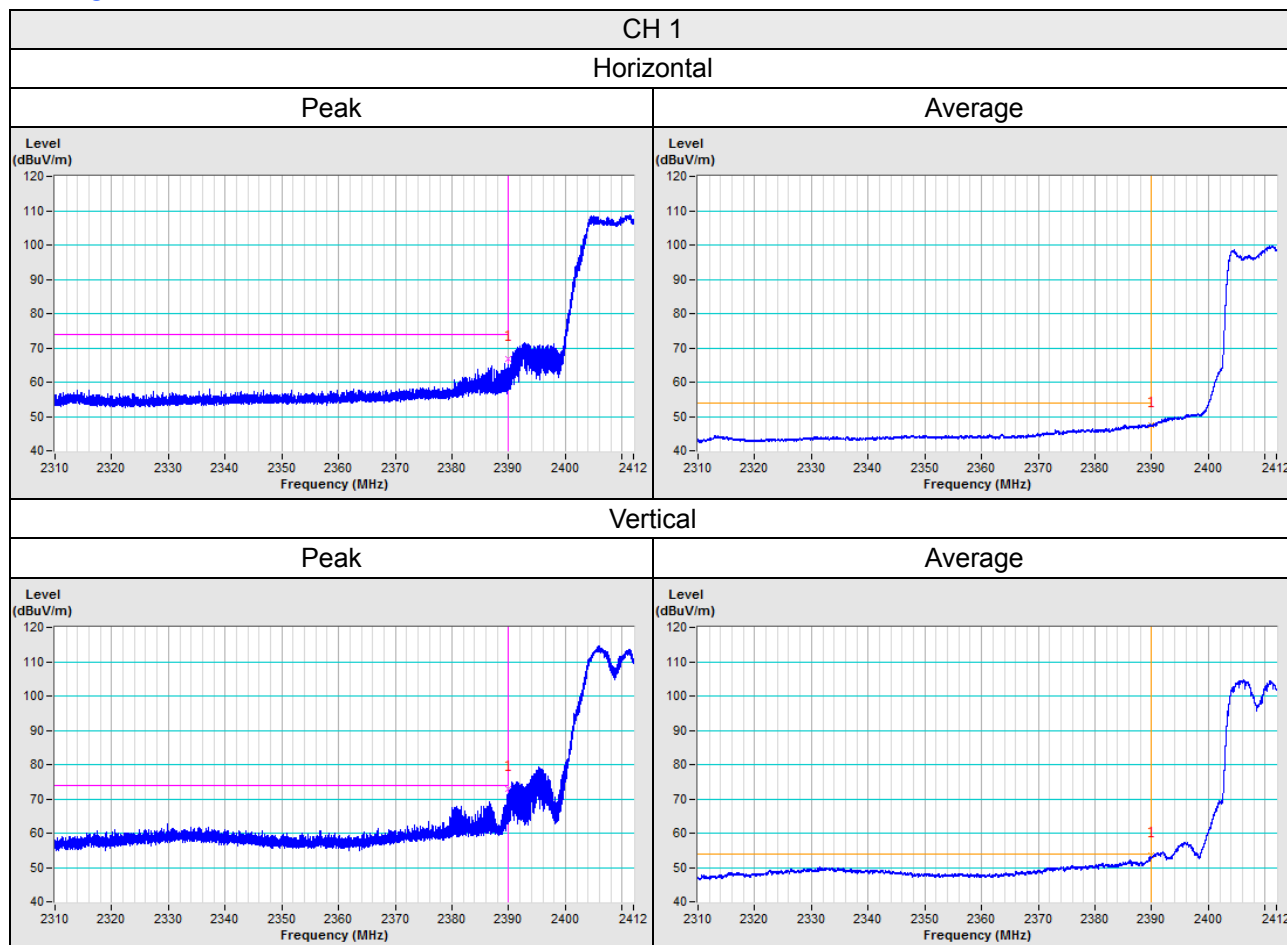


CH 11

Horizontal

Peak

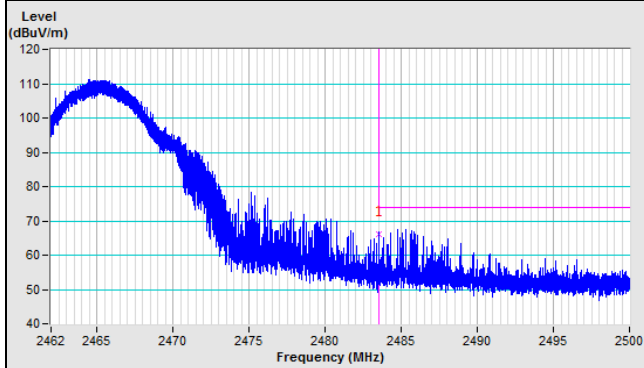


Average

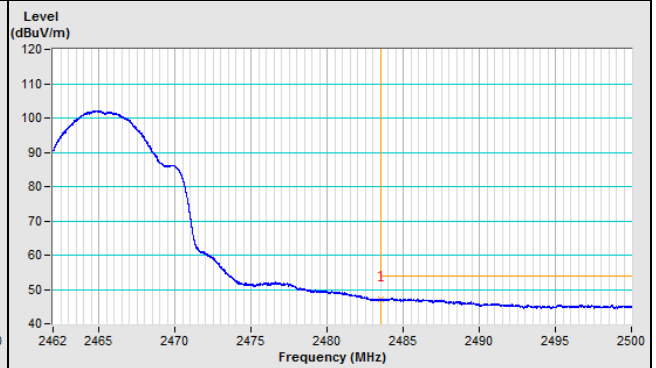


Vertical


Peak

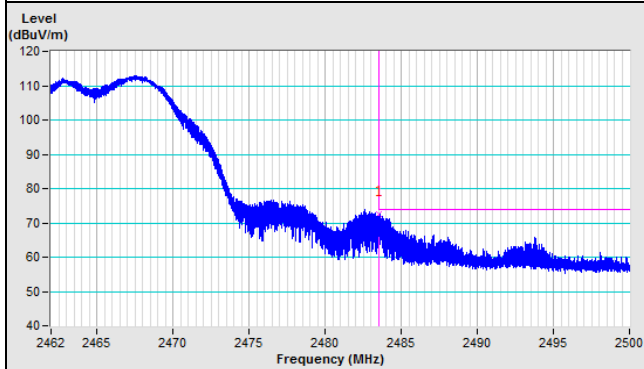


Average

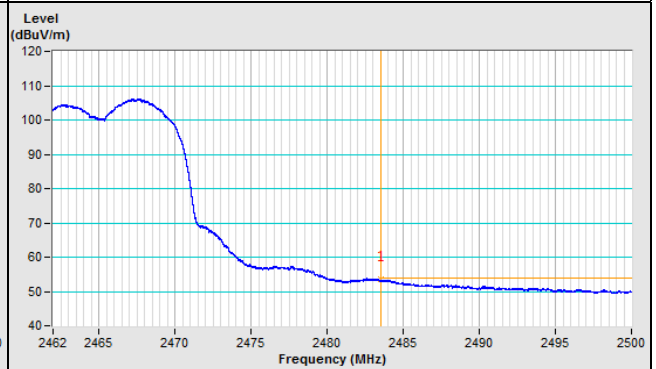


802.11ax (HE20)

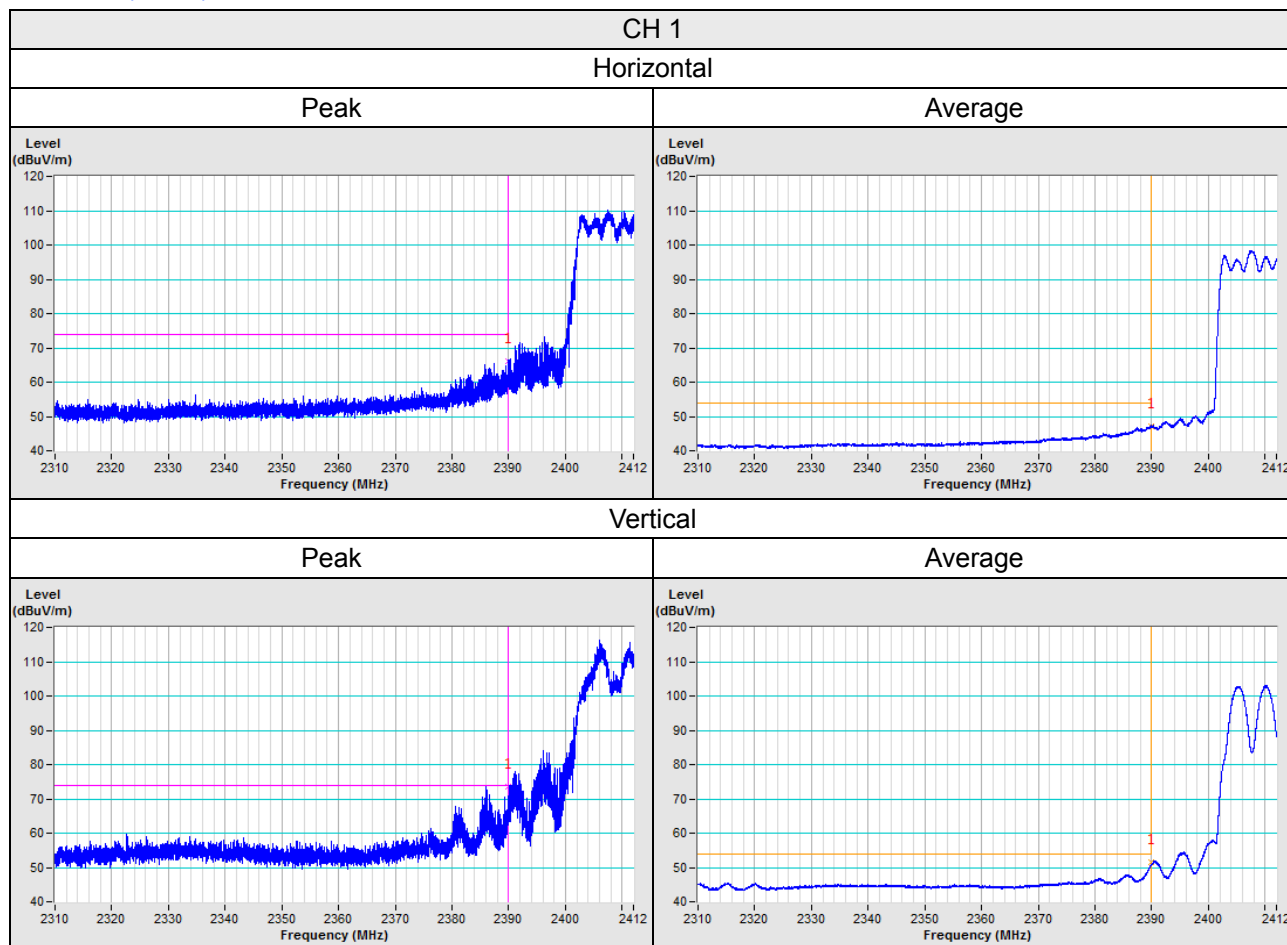

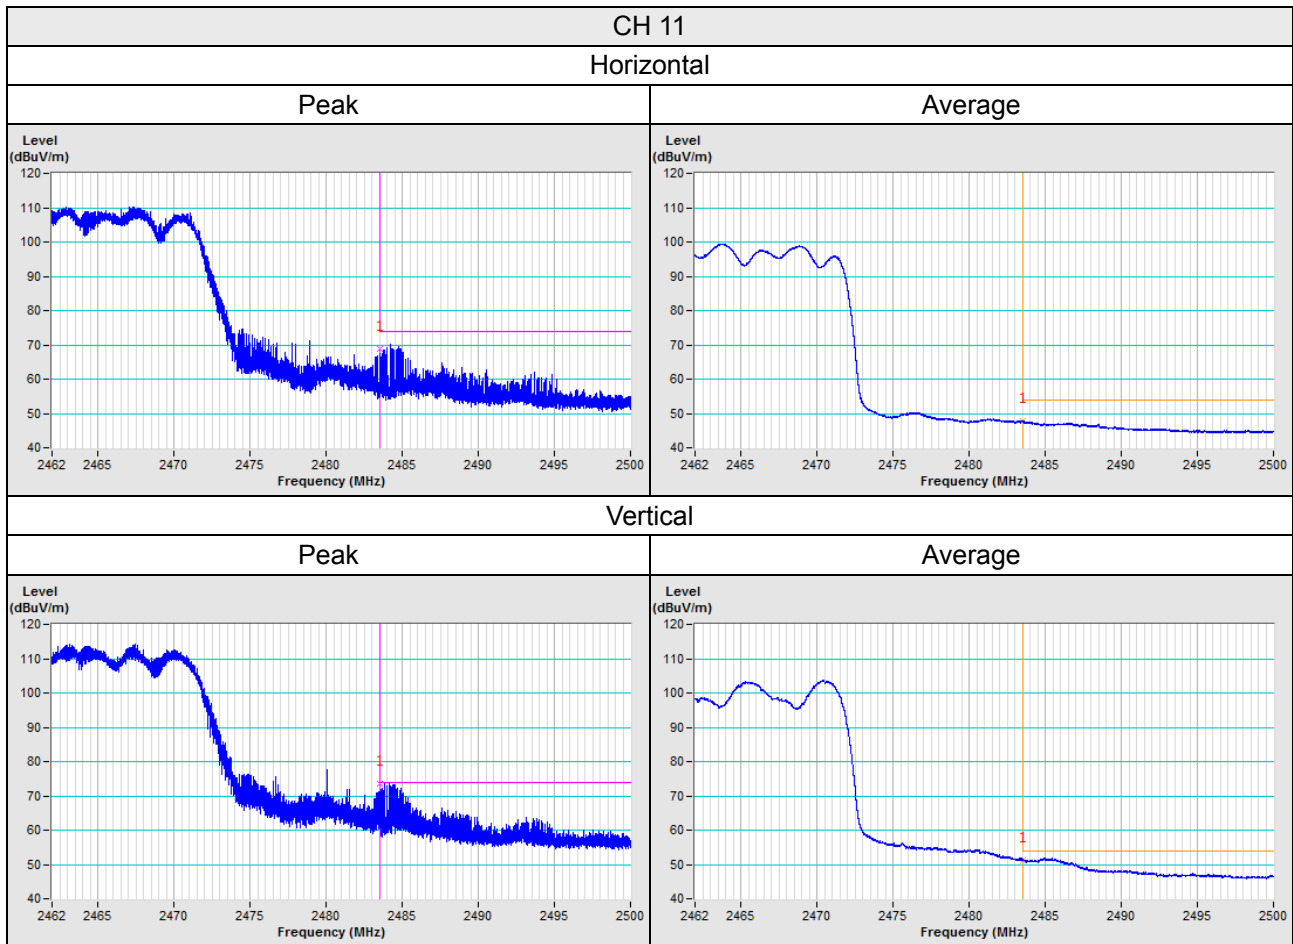


802.11ax (HE40)

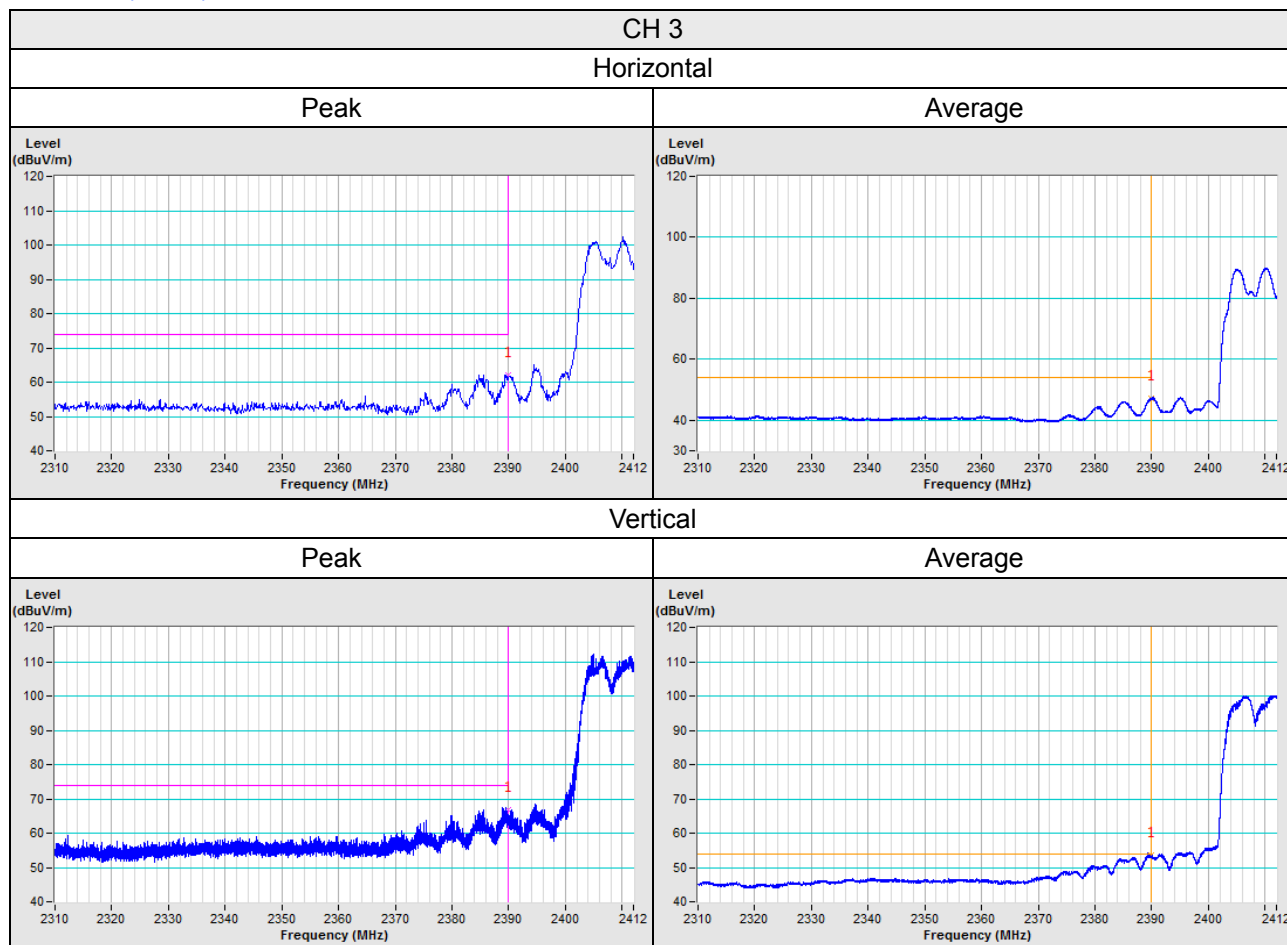


CH 6

Horizontal

Peak

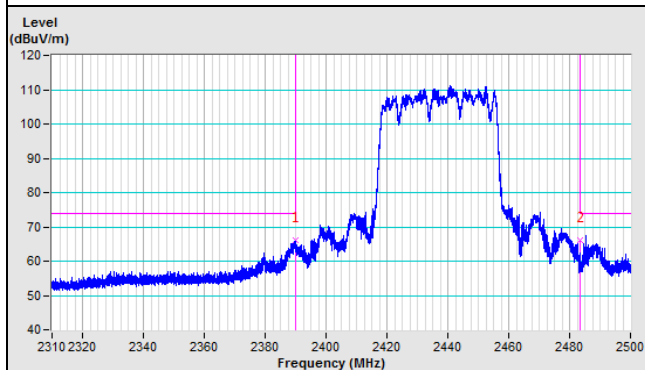


Average

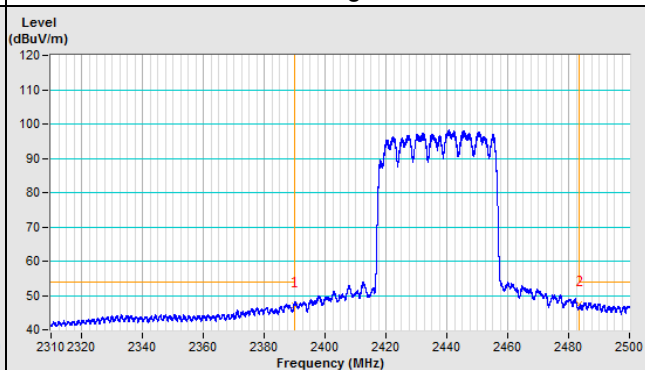


Vertical

Peak

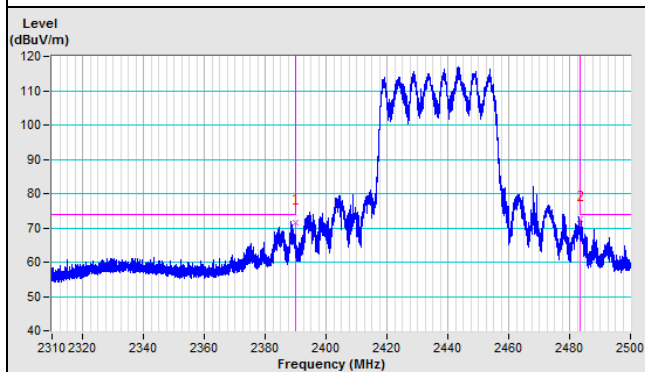


Average

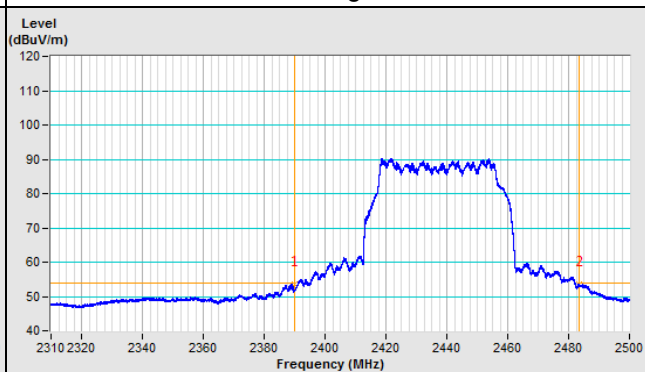


CH 9

Horizontal

Peak

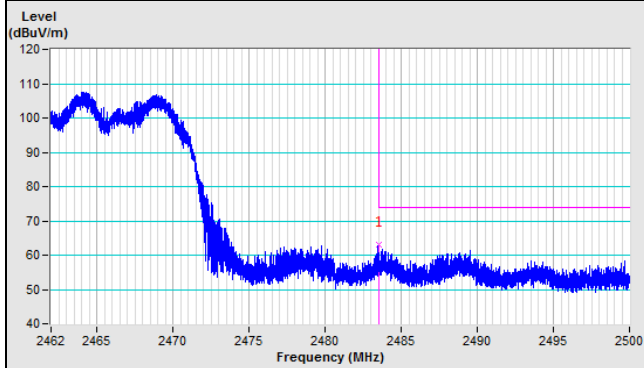


Average

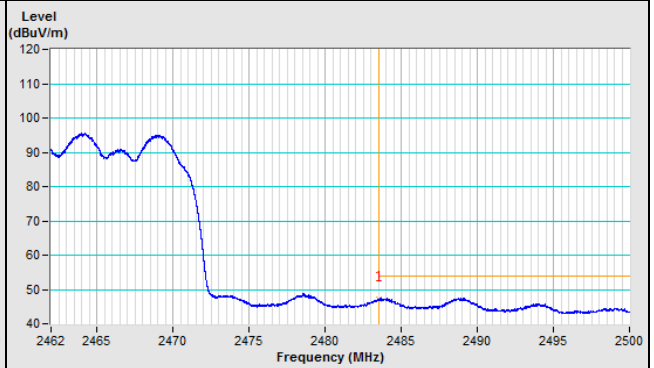


Vertical

Peak

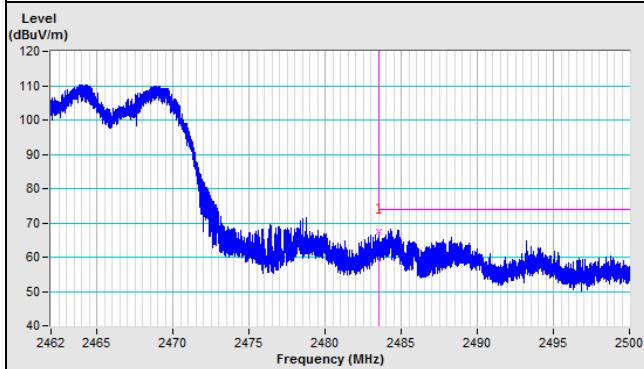

Average

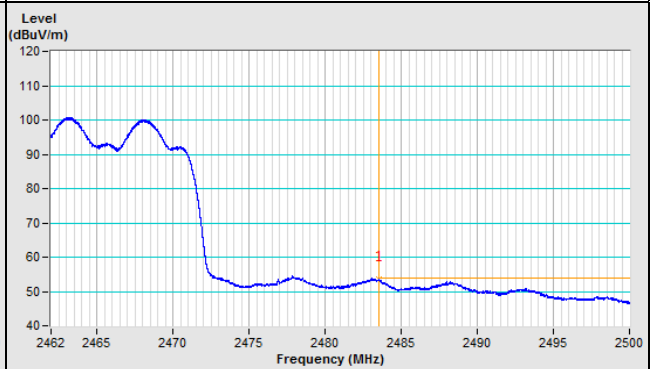

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---