

FCC Test Report (Part 22)

Report No.: RFBBQZ-WTW-P20120412

Contain module FCC ID: PY320300503

Test Model: LM1200

Received Date: Sep. 25, 2020

Test Date: Dec. 05 ~ Dec. 10, 2020

Issued Date: Dec. 15, 2020

Applicant: NETGEAR INC.

Address: 350 East Plumeria Drive, San Jose, CA 95134, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

FCC Registration / 788550 / TW0003

Designation Number:



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Test Site and Instruments	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Configuration of System under Test	8
3.2.1 Description of Support Units	8
3.3 Test Mode Applicability and Tested Channel Detail	9
3.4 EUT Operating Conditions	10
3.5 General Description of Applied Standards and References	10
4 Test Types and Results	11
4.1 Output Power Measurement	11
4.1.1 Limits of Output Power Measurement	11
4.1.2 Test Procedures	11
4.1.3 Test Setup	12
4.1.4 Test Results	13
4.2 Radiated Emission Measurement	18
4.2.1 Limits of Radiated Emission Measurement	18
4.2.2 Test Procedure	18
4.2.3 Deviation from Test Standard	18
4.2.4 Test Setup	19
4.2.5 Test Results	20
5 Pictures of Test Arrangements	32
Appendix – Information of the Testing Laboratories	33

Release Control Record

Issue No.	Description	Date Issued
RFBBQZ-WTW-P20120412	Original release	Dec. 15, 2020

1 Certificate of Conformity

Product: LTE modem

Brand: Netgear

Test Model: LM1200

Sample Status: Engineering Sample

Applicant: NETGEAR INC.

Test Date: Dec. 05 ~ Dec. 10, 2020

Standards: FCC Part 22, Subpart H

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Pettie Chen , **Date:** Dec. 15, 2020
Pettie Chen / Senior Specialist

Approved by : Bruce Chen , **Date:** Dec. 15, 2020
Bruce Chen / Senior Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 22 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 22.913 (a)	Effective radiated power	Pass	Meet the requirement of limit.
2.1053 22.917	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -31.0dB at 48.28MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.59 dB
	200MHz ~ 1000MHz	3.60 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 16, 2020	Apr. 15, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jun. 12, 2020	Jun. 11, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Nov. 06, 2020	Nov. 05, 2021
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Nov. 22, 2020	Nov. 21, 2021
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 22, 2020	Nov. 21, 2021
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	Jun. 08, 2020	Jun. 07, 2021
Preamplifier Agilent (Above 1GHz)	8449B	3008A02367	Feb. 18, 2020	Feb. 17, 2021
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104 & EMC104-SM-SM80 00	CABLE-CH9-02 (248780+171006)	Jan. 18, 2020	Jan. 17, 2021
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	Jan. 18, 2020	Jan. 17, 2021
RF signal cable Woken	8D-FB	Cable-CH9-01	Jun. 08, 2020	Jun. 07, 2021
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 01, 2020	May 31, 2021
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
True RMS Clamp Meter Fluke	325	31130711WS	Jun. 06, 2020	Jun. 05, 2021
DC power supply	U8002A	MY56330015	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 9.

3 General Information

3.1 General Description of EUT

Product	LTE modem		
Brand	Netgear		
Test Model	LM1200		
Sample Status	Engineering Sample		
Power Supply Rating	5 Vdc (Adapter)		
Modulation Type	WCDMA: BPSK, QPSK HSDPA: BPSK HSUPA: QPSK LTE: QPSK, 16QAM		
Operating Frequency	WCDMA Band 5	826.4~846.6MHz	
	LTE Band 5 (Channel Bandwidth 1.4MHz)	824.7~848.3MHz	
	LTE Band 5 (Channel Bandwidth 3MHz)	825.5~847.5MHz	
	LTE Band 5 (Channel Bandwidth 5MHz)	826.5~846.5MHz	
	LTE Band 5 (Channel Bandwidth 10MHz)	829.0~844.0MHz	
Max. ERP Power	WCDMA Band 5	173.780mW (22.4dBm)	
		QPSK	16QAM
	LTE Band 5 (Channel Bandwidth 1.4MHz)	97.724mW (19.9dBm)	77.625mW (18.9dBm)
	LTE Band 5 (Channel Bandwidth 3MHz)	91.021mW (19.6dBm)	72.444mW (18.6dBm)
	LTE Band 5 (Channel Bandwidth 5MHz)	112.202mW (20.5dBm)	89.125mW (19.5dBm)
	LTE Band 5 (Channel Bandwidth 10MHz)	120.226mW (20.8dBm)	95.499mW (19.8dBm)
Antenna Type	Refer to Note		
Antenna Connector	Refer to Note		
Accessory Device	Refer to Note		
Cable Supplied	Refer to Note		

Note:

- This report is prepared for FCC class II permissive change. The difference compared with the original report (BV CPS report no.: RFBBQZ-WTW-P20090593) is adding a WWAN antenna. Only Effective radiated power and Radiated Spurious Emissions were verified and recorded in this report. Other testing data please refer to the original TA Technology (Shanghai) Co., Ltd. report no.: R1806A0301-R1V1 (LTE Module, Brand: Quectel, Model: EC25-AF, FCC ID: XMR201808EC25AF).
- The following antenna was provided to the EUT.

Antenna Type	Monopole	
Antenna Connector	TS-9 plugs	
Antenna Gain (dBi)	WCDMA Band 5	0.54
	LTE Band 5	0.54


*The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

- The EUT contains following accessory devices.

Adapter	
Brand	Netgear
Model	AD2037320
Input Power	100-240Vac~50/60Hz, 0.3A
Output Power	5.0Vdc, 2.0A

Cable	Brand	Model	Information
USB cable	HOTRON PRECISION	D0017100R20HR	1.0m shielded cable without core
RJ45 Cable 1	EKSON	HS01-C442	1.5m non-shielded cable without core
RJ45 Cable 2	EKSON	HS01-C445	1.5m non-shielded cable without core

3.2 Configuration of System under Test

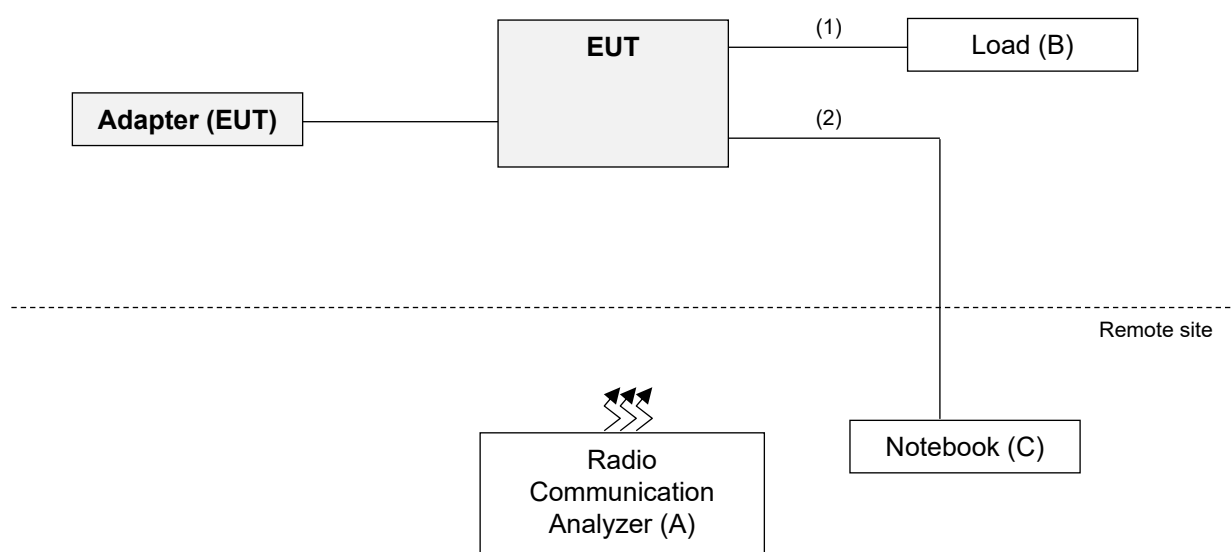

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Radio Communication Analyzer	Anritsu	MT8821C	6261806803	NA	-
B.	Load	NA	NA	NA	NA	-
C.	Notebook	DELL	E5410	1HC2XM1	FCC Doc Approved	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A, C acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	LAN cable	1	1.5	N	0	RJ45, Accessory
2.	LAN cable	1	10	N	0	RJ45, Provided by lab

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Z-plane. Following channel(s) was (were) selected for the final test as listed below.

WCDMA Band 5

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	ERP	4132 to 4233	4132 (826.4MHz), 4182 (836.4MHz), 4233 (846.6MHz)	WCDMA
-	Radiated Emission Below 1GHz	4132 to 4233	4132 (826.4MHz)	WCDMA
-	Radiated Emission Above 1GHz	4132 to 4233	4132 (826.4MHz), 4182 (836.4MHz), 4233 (846.6MHz)	WCDMA

LTE Band 5

EUT Configure Mode	Test item	Available channel	Tested channel	Channel Bandwidth	Modulation	Mode
-	ERP	20407 to 20643	20407(824.7MHz), 20525(836.5MHz), 20643(848.3MHz)	1.4MHz	QPSK / 16QAM	1 RB / 0 RB Offset 1 RB / 2 RB Offset 1 RB / 5 RB Offset 3 RB / 0 RB Offset 3 RB / 1 RB Offset 3 RB / 3 RB Offset 6 RB / 0 RB Offset
		20415 to 20635	20415(825.5MHz), 20525(836.5MHz), 20635(847.5MHz)	3MHz	QPSK / 16QAM	1 RB / 0 RB Offset 1 RB / 7 RB Offset 1 RB / 14 RB Offset 8 RB / 0 RB Offset 8 RB / 3 RB Offset 8 RB / 7 RB Offset 15 RB / 0 RB Offset
		20425 to 20625	20425(826.5MHz), 20525(836.5MHz), 20625(846.5MHz)	5MHz	QPSK / 16QAM	1 RB / 0 RB Offset 1 RB / 12 RB Offset 1 RB / 24 RB Offset 12 RB / 0 RB Offset 12 RB / 6 RB Offset 12 RB / 13 RB Offset 25 RB / 0 RB Offset
		20450 to 20600	20450(829.0MHz), 20525(836.5MHz), 20600(844.0MHz)	10MHz	QPSK / 16QAM	1 RB / 0 RB Offset 1 RB / 24 RB Offset 1 RB / 49 RB Offset 25 RB / 0 RB Offset 25 RB / 12 RB Offset 25 RB / 25 RB Offset 50 RB / 0 RB Offset
-	Radiated Emission Below 1GHz	20450 to 20600	20525(836.5MHz)	10MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission Above 1GHz	20407 to 20643	20407(824.7MHz), 20525(836.5MHz), 20643(848.3MHz)	1.4MHz	QPSK	1 RB / 0 RB Offset
		20425 to 20625	20425(826.5MHz), 20525(836.5MHz), 20625(846.5MHz)	5MHz	QPSK	1 RB / 0 RB Offset
		20450 to 20600	20450(829.0MHz), 20525(836.5MHz), 20600(844.0MHz)	10MHz	QPSK	1 RB / 0 RB Offset

Test Condition:

Test Item	Environmental Conditions	Input Power (system)	Tested By
ERP	23deg. C, 70%RH	120Vac, 60Hz	Willy Cheng
Radiated Emission	23deg. C, 70%RH	120Vac, 60Hz	Willy Cheng

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and References:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 7 watts e.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.2.7


$EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.

$ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.


4.1.3 Test Setup

EIRP / ERP Measurement:

For radiated emission 30MHz to 1GHz

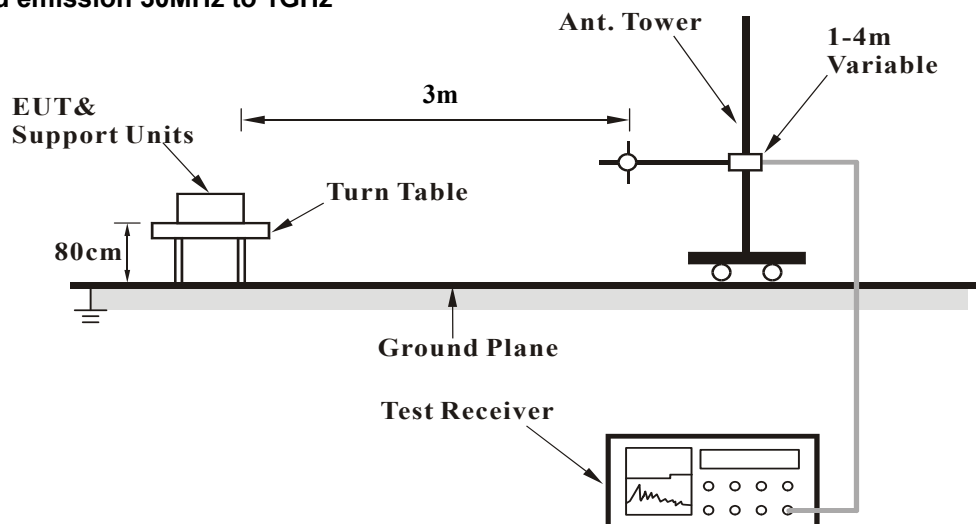

For radiated emission above 1GHz

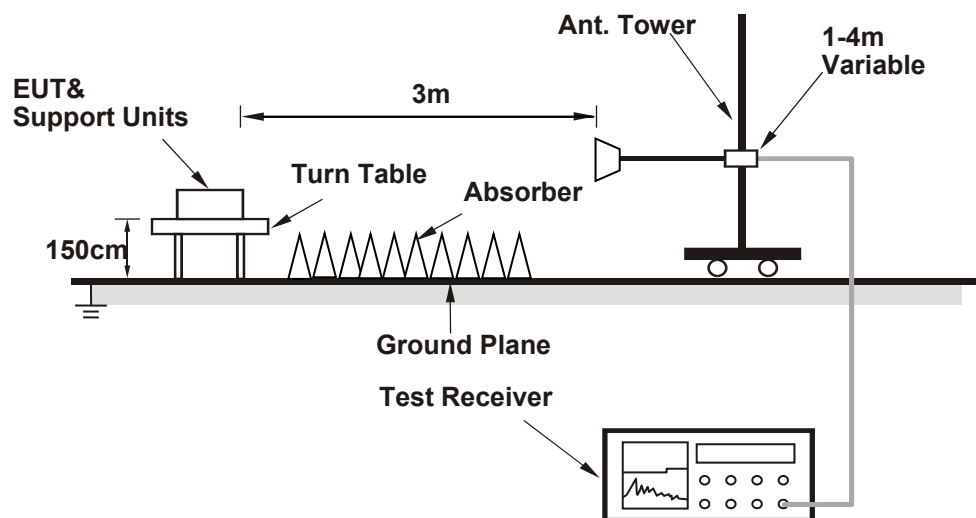

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 Test Results

ERP Power (dBm)

WCDMA Band V

Mode		TX channel 4132, 4182, 4233						
Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	826.40	22.2	38.5	-16.3	1.00 H	350	87.4	-65.2
2	836.40	22.4	38.5	-16.1	1.00 H	353	87.4	-65.0
3	846.60	22.1	38.5	-16.4	1.00 H	355	87.1	-65.0
Antenna Polarity & Test Distance: Vertical at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	826.40	20.0	38.5	-18.5	1.00 V	350	85.2	-65.2
2	836.40	20.3	38.5	-18.2	1.00 V	353	85.3	-65.0
3	846.60	20.5	38.5	-18.0	1.00 V	355	85.5	-65.0

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$

Modulation Type: QPSK

LTE Band 5, Channel Bandwidth: 1.4MHz

Mode		TX channel 20407, 20525, 20643						
Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	824.70	18.8	38.5	-19.7	1.00 H	111	84.0	-65.2
2	836.50	18.4	38.5	-20.1	1.00 H	96	83.4	-65.0
3	848.30	18.6	38.5	-19.9	1.00 H	115	83.6	-65.0
Antenna Polarity & Test Distance: Vertical at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	824.70	19.5	38.5	-19.0	1.00 V	341	84.8	-65.2
2	836.50	19.5	38.5	-19.0	1.00 V	346	84.5	-65.0
3	848.30	19.9	38.5	-18.6	1.00 V	345	84.8	-65.0

LTE Band 5, Channel Bandwidth: 3MHz

Mode		TX channel 20415, 20525, 20635						
Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	825.50	18.6	38.5	-19.9	1.00 H	7	83.8	-65.2
2	836.50	18.5	38.5	-20.0	1.00 H	16	83.5	-65.0
3	847.50	18.4	38.5	-20.1	1.00 H	15	83.3	-65.0
Antenna Polarity & Test Distance: Vertical at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	825.50	19.6	38.5	-18.9	1.00 V	99	84.8	-65.2
2	836.50	19.5	38.5	-19.0	1.00 V	123	84.5	-65.0
3	847.50	19.5	38.5	-19.0	1.00 V	150	84.5	-65.0

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$

LTE Band 5, Channel Bandwidth: 5MHz

Mode		TX channel 20425, 20525, 20625						
Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	826.50	18.6	38.5	-19.9	1.00 H	344	83.8	-65.2
2	836.50	18.6	38.5	-19.9	1.00 H	359	83.7	-65.0
3	846.50	18.8	38.5	-19.7	1.00 H	359	83.8	-65.0
Antenna Polarity & Test Distance: Vertical at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	826.50	20.0	38.5	-18.5	1.00 V	100	85.2	-65.2
2	836.50	20.4	38.5	-18.1	1.00 V	103	85.4	-65.0
3	846.50	20.5	38.5	-18.0	1.00 V	100	85.5	-65.0

LTE Band 5, Channel Bandwidth: 10MHz

Mode		TX channel 20450, 20525, 20600						
Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	829.00	18.8	38.5	-19.7	1.00 H	348	84.0	-65.2
2	836.50	19.0	38.5	-19.5	1.00 H	353	84.0	-65.0
3	844.00	19.2	38.5	-19.3	1.00 H	350	84.2	-65.0
Antenna Polarity & Test Distance: Vertical at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	829.00	20.4	38.5	-18.1	1.00 V	100	85.6	-65.2
2	836.50	20.8	38.5	-17.7	1.00 V	353	85.8	-65.0
3	844.00	20.6	38.5	-17.9	1.00 V	350	85.6	-65.0

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$

Modulation Type: 16QAM

LTE Band 5, Channel Bandwidth: 1.4MHz

Mode		TX channel 20407, 20525, 20643						
Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	824.70	17.7	38.5	-20.8	1.00 H	111	83.0	-65.2
2	836.50	17.4	38.5	-21.1	1.00 H	96	82.4	-65.0
3	848.30	17.5	38.5	-21.0	1.00 H	115	82.5	-65.0
Antenna Polarity & Test Distance: Vertical at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	824.70	18.4	38.5	-20.1	1.00 V	341	83.7	-65.2
2	836.50	18.5	38.5	-20.0	1.00 V	346	83.5	-65.0
3	848.30	18.9	38.5	-19.6	1.00 V	345	83.8	-65.0

LTE Band 5, Channel Bandwidth: 3MHz

Mode		TX channel 20415, 20525, 20635						
Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	825.50	17.6	38.5	-20.9	1.00 H	7	82.8	-65.2
2	836.50	17.5	38.5	-21.0	1.00 H	16	82.5	-65.0
3	847.50	17.4	38.5	-21.1	1.00 H	15	82.3	-65.0
Antenna Polarity & Test Distance: Vertical at 3 m								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	825.50	18.6	38.5	-19.9	1.00 V	99	83.8	-65.2
2	836.50	18.5	38.5	-20.0	1.00 V	123	83.5	-65.0
3	847.50	18.4	38.5	-20.1	1.00 V	150	83.3	-65.0

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$

LTE Band 5, Channel Bandwidth: 5MHz

Mode		TX channel 20425, 20525, 20625						
Antenna Polarity & Test Distance: Horizontal at 3 M								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	826.50	17.6	38.5	-20.9	1.00 H	344	82.8	-65.2
2	836.50	17.6	38.5	-20.9	1.00 H	359	82.7	-65.0
3	846.50	17.8	38.5	-20.7	1.00 H	359	82.8	-65.0
Antenna Polarity & Test Distance: Vertical at 3 M								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	826.50	19.0	38.5	-19.5	1.00 V	100	84.2	-65.2
2	836.50	19.4	38.5	-19.1	1.00 V	103	84.4	-65.0
3	846.50	19.5	38.5	-19.0	1.00 V	100	84.5	-65.0

LTE Band 5, Channel Bandwidth: 10MHz

Mode		TX channel 20450, 20525, 20600						
Antenna Polarity & Test Distance: Horizontal at 3 M								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	829.00	17.8	38.5	-20.7	1.00 H	348	83.0	-65.2
2	836.50	18.0	38.5	-20.5	1.00 H	353	83.0	-65.0
3	844.00	18.2	38.5	-20.3	1.00 H	350	83.2	-65.0
Antenna Polarity & Test Distance: Vertical at 3 M								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	829.00	19.4	38.5	-19.1	1.00 V	100	84.6	-65.2
2	836.50	19.8	38.5	-18.7	1.00 V	353	84.8	-65.0
3	844.00	19.6	38.5	-18.9	1.00 V	350	84.6	-65.0

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$

4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.2.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5
$$\text{EIRP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8; \text{ where } D \text{ is the measurement distance (in the far field region) in m.}$$
$$\text{ERP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8 - 2.15; \text{ where } D \text{ is the measurement distance (in the far field region) in m.}$$


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.2.3 Deviation from Test Standard


No deviation.

4.2.4 Test Setup

For radiated emission 30MHz to 1GHz

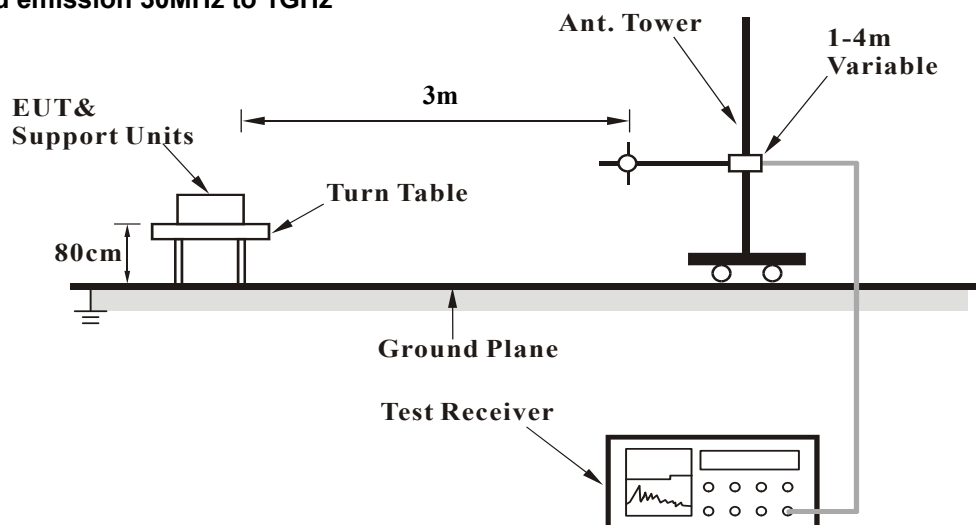

For radiated emission above 1GHz

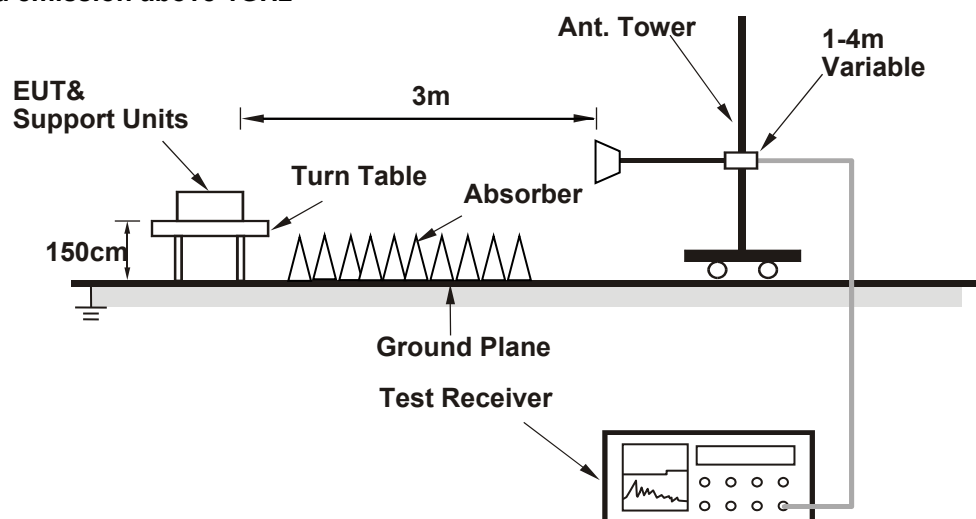

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results


Below 1GHz
WCDMA Band 5

Mode	TX channel 4132 (826.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Willy Cheng		

Antenna Polarity & Test Distance: Horizontal at 3 M								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.46	-57.7	-13.0	-44.7	1.50 H	152	48.9	-106.6
2	93.26	-57.4	-13.0	-44.4	2.00 H	24	54.3	-111.7
3	114.35	-56.1	-13.0	-43.1	1.00 H	105	53.0	-109.1
4	173.39	-53.1	-13.0	-40.1	1.50 H	241	53.5	-106.6
5	205.72	-57.8	-13.0	-44.8	1.50 H	227	50.8	-108.5
6	302.72	-61.1	-13.0	-48.1	2.00 H	88	42.9	-104.0

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

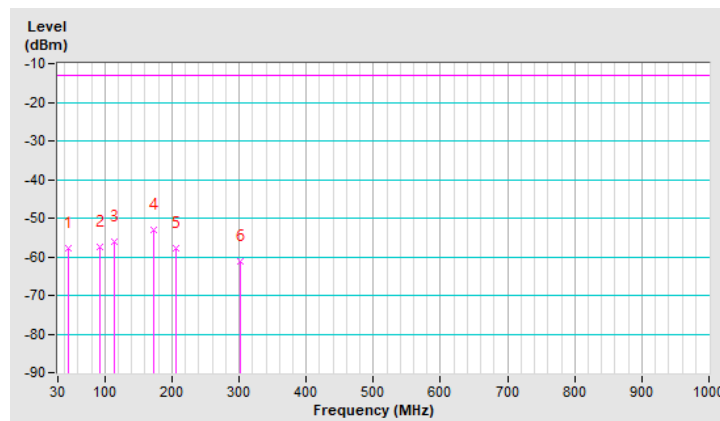


Mode	TX channel 4132 (826.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Willy Cheng		

Antenna Polarity & Test Distance: Vertical at 3 M								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.28	-44.6	-13.0	-31.6	1.50 V	73	61.9	-106.5
2	65.14	-45.5	-13.0	-32.5	1.00 V	7	62.2	-107.7
3	104.51	-53.6	-13.0	-40.6	2.00 V	0	56.3	-109.9
4	160.74	-53.7	-13.0	-40.7	1.50 V	152	52.1	-105.8
5	519.22	-60.7	-13.0	-47.7	2.00 V	353	38.6	-99.3
6	746.96	-56.0	-13.0	-43.0	1.00 V	263	38.3	-94.3

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

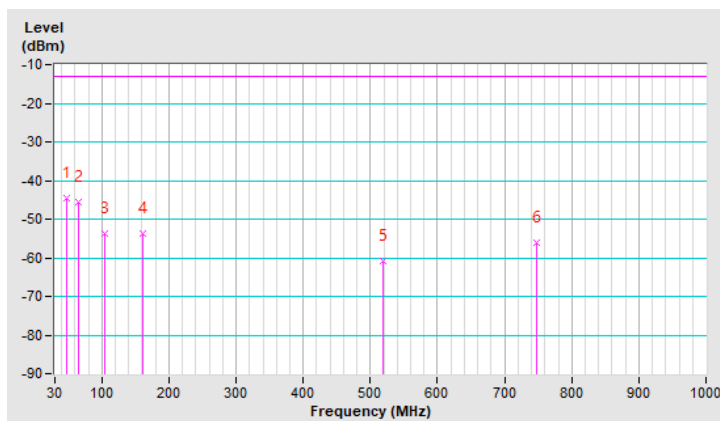


LTE Band 5, Channel Bandwidth: 10MHz

Mode	TX channel 20525 (836.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Willy Cheng		

Antenna Polarity & Test Distance: Horizontal at 3 M								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.28	-57.2	-13.0	-44.2	2.00 H	136	49.3	-106.5
2	103.10	-58.3	-13.0	-45.3	1.00 H	7	51.9	-110.2
3	118.57	-56.5	-13.0	-43.5	1.50 H	227	52.0	-108.5
4	171.99	-55.7	-13.0	-42.7	1.50 H	253	50.7	-106.4
5	211.35	-58.3	-13.0	-45.3	2.00 H	260	50.0	-108.3
6	675.26	-57.4	-13.0	-44.4	1.50 H	7	38.4	-95.8

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

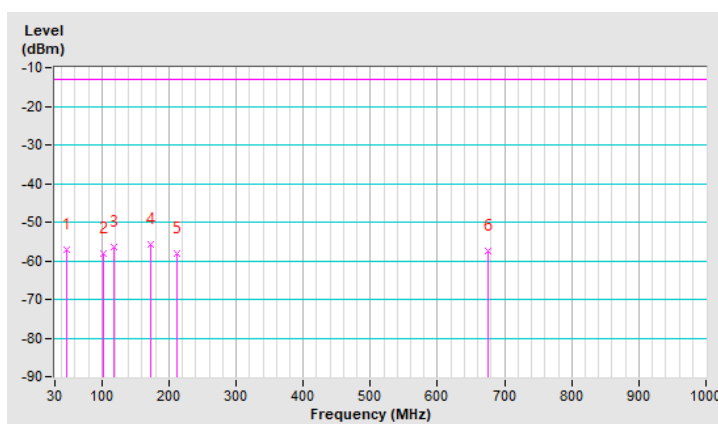


Mode	TX channel 20525 (836.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Willy Cheng		

Antenna Polarity & Test Distance: Vertical at 3 M								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.28	-44.0	-13.0	-31.0	1.50 V	26	62.5	-106.5
2	63.74	-45.0	-13.0	-32.0	1.00 V	7	62.2	-107.2
3	104.51	-53.2	-13.0	-40.2	2.00 V	16	56.7	-109.9
4	157.93	-52.0	-13.0	-39.0	1.50 V	147	53.8	-105.8
5	299.91	-64.6	-13.0	-51.6	2.00 V	187	39.5	-104.1
6	661.20	-58.6	-13.0	-45.6	1.50 V	4	37.6	-96.2

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

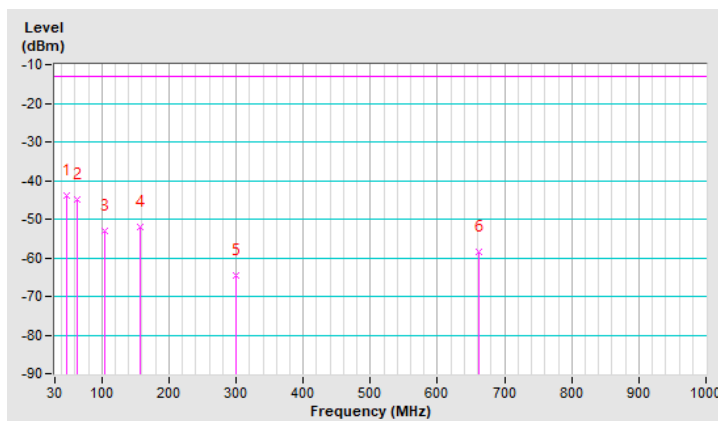

Above 1GHz
WCDMA Band 5

Mode	TX channel 4132 (826.4MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Willy Cheng		

Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1652.80	-56.4	-13.0	-43.4	2.66 H	210	46.1	-102.5
Antenna Polarity & Test Distance: Vertical at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1652.80	-52.2	-13.0	-39.2	1.49 V	100	50.3	-102.5

Mode	TX channel 4182 (836.4MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Willy Cheng		

Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1672.80	-55.9	-13.0	-42.9	2.69 H	213	46.6	-102.5
Antenna Polarity & Test Distance: Vertical at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1672.80	-51.8	-13.0	-38.8	1.44 V	104	50.8	-102.5

Mode	TX channel 4233 (846.6MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Willy Cheng		

Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.20	-56.0	-13.0	-43.0	2.66 H	210	46.6	-102.6
Antenna Polarity & Test Distance: Vertical at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.20	-52.5	-13.0	-39.5	1.51 V	99	50.1	-102.6

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 5, Channel Bandwidth: 1.4MHz

Mode	TX channel 20407 (824.7MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Willy Cheng		

Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-56.8	-13.0	-43.8	2.06 H	224	45.8	-102.5
Antenna Polarity & Test Distance: Vertical at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-53.2	-13.0	-40.2	1.55 V	89	49.3	-102.5

Mode	TX channel 20525 (836.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Willy Cheng		

Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-56.7	-13.0	-43.7	2.05 H	228	45.8	-102.5
Antenna Polarity & Test Distance: Vertical at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-53.4	-13.0	-40.4	1.53 V	90	49.1	-102.5

Mode	TX channel 20643 (848.3MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Willy Cheng		

Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-56.9	-13.0	-43.9	2.02 H	230	45.7	-102.6
Antenna Polarity & Test Distance: Vertical at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-54.0	-13.0	-41.0	1.52 V	96	48.6	-102.6

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 5, Channel Bandwidth: 5MHz

Mode	TX channel 20425 (826.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Willy Cheng		

Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-55.6	-13.0	-42.6	2.00 H	211	46.9	-102.5
Antenna Polarity & Test Distance: Vertical at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-53.9	-13.0	-40.9	1.48 V	99	48.6	-102.5

Mode	TX channel 20525 (836.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Willy Cheng		

Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-55.5	-13.0	-42.5	2.01 H	222	47.0	-102.5
Antenna Polarity & Test Distance: Vertical at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-53.7	-13.0	-40.7	1.48 V	101	48.8	-102.5

Mode	TX channel 20625 (846.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Willy Cheng		

Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-55.8	-13.0	-42.8	2.11 H	225	46.8	-102.6
Antenna Polarity & Test Distance: Vertical at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-53.5	-13.0	-40.5	1.49 V	106	49.1	-102.6

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 5, Channel Bandwidth: 10MHz

Mode	TX channel 20450 (829.0MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Willy Cheng		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1658.00	-55.5	-13.0	-42.5	2.10 H	229	47.0	-102.5

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1658.00	-53.2	-13.0	-40.2	1.50 V	102	49.3	-102.5

Mode	TX channel 20525 (836.5MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Willy Cheng		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-55.1	-13.0	-42.1	2.12 H	226	47.4	-102.5

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-52.8	-13.0	-39.8	1.47 V	104	49.8	-102.5

Mode	TX channel 20600 (844.0MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	23deg. C, 70%RH	Input Power	120Vac, 60Hz
Tested By	Willy Cheng		

Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1688.00	-55.5	-13.0	-42.5	2.10 H	220	47.1	-102.6
Antenna Polarity & Test Distance: Vertical at 3 M								
No.	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1688.00	-53.0	-13.0	-40.0	1.50 V	100	49.6	-102.6

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB)$
 $+ 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---